

| | | |
|-------------------------------------------|--------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry Wireless Handheld Model RBD50UW | Page 1(26) |
| Author Data Daoud Attayi | Dates of Test Jan. 09-31, Mar. 21-23, 2006 | Test Report No RTS-0258-0601-08 rev. 02 FCC ID: L6ARBD50UW |




SAR Compliance Test Report

| | | | |
|---------------------|-------------------------------------------------------------------------------------------------------------------------------------|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Testing Lab: | RIM Testing Services (RTS) 305 Phillip Street Waterloo, Ontario Canada N2L 3W8 Phone: 519-888-7465 Fax: 519-880-8173 | Applicant: | Research In Motion Limited 295 Phillip Street Waterloo, Ontario Canada N2L 3W8 Phone: 519-888-7465 Fax: 519-888-6906 Web site: www.rim.com |
|---------------------|-------------------------------------------------------------------------------------------------------------------------------------|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|

Statement of Compliance: RIM Testing Services declares under its sole responsibility that the product to which this declaration relates, is in conformity with the appropriate RF exposure standards, recommendations and guidelines. It also declares that the product was tested in accordance with the appropriate measurement standards, guidelines and recommended practices.

Device Category: This wireless handheld is a portable device, designed to be used in direct contact with the user's head, hand and to be carried in approved accessories when carried on the user's body.

RF exposure environment: This wireless portable device has been shown to be in compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in OET Bulletin 65 Supplement C (Edition 01-01), FCC 96-326, IEEE Std. C95.1-1999, Health Canada's Safety Code 6, and reproduced in RSS-102, issue 2 - 2005 and has been tested in accordance with the measurement procedures specified in OET Bulletin 65 Supplement C (Edition 01-01), ANSI/IEEE Std. C95.3-1991, IEEE 1528-2003 and Health Canada's Safety Code 6.

| Tested and documented by: | Signatures | Date |
|------------------------------------------------------------------|--------------------------------------------------------------------------------------|-------------|
| Daoud Attayi Senior Compliance Specialist |  | 27-Mar-2006 |
| | | |
| Reviewed by: Lauren Weber Compliance Specialist |  | 30-Mar-2006 |
| | | |
| Approved by: Paul G. Cardinal, Ph.D. Manager |  | 03-Apr-2006 |

| | | | |
|-----------------------------|----------------------------------------------------------------------------------------------|-----------------------------------------------|--------------------------------------------|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry Wireless Handheld Model RBD50UW | | Page 2(26) |
| | Author Data Daoud Attayi | Dates of Test Jan. 09-31, Mar. 21-23, 2006 | Test Report No RTS-0258-0601-08 rev. 02 |
| | | FCC ID: L6ARBD50UW | |

CONTENTS

| | |
|-----------------------------------------------------------|----|
| GENERAL INFORMATION | 1 |
| 1.0 OPERATING CONFIGURATIONS AND TEST CONDITIONS | 4 |
| 1.1 PICTURE OF HANDHELD | 4 |
| 1.2 ANTENNA DESCRIPTION | 4 |
| 1.3 HANDHELD DESCRIPTION | 4 |
| 1.4 BODY WORN ACCESSORIES | 5 |
| 1.5 HEADSETS | 6 |
| 1.6 BATTERIES | 6 |
| 1.7 LCDS | 6 |
| 1.8 PROCEDURE USED TO ESTABLISH TEST SIGNALS | 6 |
| 2.0 DESCRIPTION OF THE TEST EQUIPMENT | 6 |
| 2.1 SAR MEASUREMENT SYSTEM | 6 |
| 2.2 DESCRIPTION OF THE TEST SETUP | 8 |
| 2.2.1 HANDHELD AND BASE STATION SIMULATOR | 8 |
| 2.2.2 DASY SETUP | 8 |
| 3.0 ELECTRIC FIELD PROBE CALIBRATION | 8 |
| 3.1 PROBE SPECIFICATIONS | 8 |
| 3.2 PROBE CALIBRATION AND MEASUREMENT ERROR | 9 |
| 4.0 SAR MEASUREMENT SYSTEM VERIFICATION | 9 |
| 4.1 SYSTEM ACCURACY VERIFICATION for Head Adjacent Use | 9 |
| 5.0 PHANTOM DESCRIPTION | 10 |
| 6.0 TISSUE DIELECTRIC PROPERTIES | 11 |
| 6.1 COMPOSITION OF TISSUE SIMULANT | 11 |
| 6.1.1 EQUIPMENT | 11 |
| 6.1.2 PREPARATION PROCEDURE | 11 |
| 6.2 ELECTRICAL PARAMETERS OF THE TISSUE SIMULATING LIQUID | 12 |
| 6.2.1 EQUIPMENT | 12 |
| 6.2.2 TEST CONFIGURATION | 13 |
| 6.2.3 TEST PROCEDURE | 13 |
| 7.0 SAR SAFETY LIMITS | 16 |
| 8.0 DEVICE POSITIONING | 17 |
| 8.1 DEVICE HOLDER | 17 |
| 8.2 DESCRIPTION OF TEST POSITION | 18 |
| 8.2.1 TEST POSITION OF DEVICE RELATIVE TO HEAD | 18 |
| 8.2.1.1 DEFINITION OF THE "CHEEK" POSITION | 19 |
| 8.2.1.2 DEFINITION OF THE "TILTED" POSITION | 20 |

| | | | |
|-------------------------------------------|----------------------------------------------------------------------------------------------|---------------------------------------------------|------------------------------|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry Wireless Handheld Model RBD50UW | | Page 3(26) |
| Author Data Daoud Attayi | Dates of Test Jan. 09-31, Mar. 21-23, 2006 | Test Report No RTS-0258-0601-08 rev. 02 | FCC ID: L6ARBD50UW |

| | |
|----------------------------------------------|----|
| 8.2.2 BODY -WORN TEST CONFIGURATION | 20 |
| 9.0 HIGH LEVEL EVALUATION | 21 |
| 9.1 MAXIMUM SEARCH | 21 |
| 9.2 EXTRAPOLATION | 21 |
| 9.3 BOUNDARY CORRECTION | 21 |
| 9.4 PEAK SEARCH FOR 1g AND 10g AVERAGED SAR | 21 |
| 10.0 MEASUREMENT UNCERTAINTY | 22 |
| 11.0 SAR TEST RESULTS | 23 |
| 11.1 HEAD CONFIGURATION | 23 |
| 11.2 BODY -WORN CONFIGURATION USING HOLSTERS | 24 |
| 12.0 REFERENCES | 25 |

APPENDIX A: SAR DISTRIBUTION COMPARISON FOR ACCURACY VERIFICATION

APPENDIX B: SAR DISTRIBUTION PLOTS - HEAD CONFIGURATION

APPENDIX C: SAR DISTRIBUTION PLOTS - BODY-WORN CONFIGURATION

APPENDIX D: PROBE & DIPOLE CALIBRATION DATA

APPENDIX E: SAR TEST SETUP PHOTOGRAPHS

| | | | |
|-------------------------------------------|----------------------------------------------------------------------------------------------|---------------------------------------------------|------------------------------|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry Wireless Handheld Model RBD50UW | | Page 4(26) |
| Author Data Daoud Attayi | Dates of Test Jan. 09-31, Mar. 21-23, 2006 | Test Report No RTS-0258-0601-08 rev. 02 | FCC ID: L6ARBD50UW |

1.0 OPERATING CONFIGURATIONS AND TEST CONDITIONS

1.1 Picture of Handheld

Please see Annex E for picture

Figure 1. BlackBerry Wireless Handheld

1.2 Antenna description

| | |
|----------------------|------------------------|
| Type | Internal fixed antenna |
| Location | Back bottom centre |
| Configuration | Internal fixed antenna |

Table 1. Antenna description

1.3 Handheld description

| | | | | |
|----------------------------------------------------------|--------------------------------------------------------------------|----------------------------------|-------------------|-----------------|
| Handheld Model | RBD50UW | | | |
| FCC ID | L6ARBD50UW | | | |
| PIN | 20331BAC (LCD1); 203AB78B (LCD2); 203F529A (body worn measurement) | | | |
| Prototype or Production Unit | Production | | | |
| Mode(s) of Operation in North America | GSM 850 GSM 1900 | GPRS 850 GPRS 1900 | * WCDMA FDD I | ** Bluetooth |
| Maximum nominal conducted RF Output Power (dBm) | 33.0 30.0 | 33.0 30.0 | 21.0 | 3.5 |
| Tolerance in Power Setting on centre channel (dB) | ± 0.50 | ± 0.50 | ± 0.50 | N/A |
| Duty Cycle | 1:8 | 2:8 | 1:1 | N/A |
| Transmitting Frequency Range (MHz) | 824.2 – 848.8 1850.2 – 1909.8 | 824.2 – 848.8 1850.2 – 1909.8 | 1922.4- 1977.6 | 2402-2483 |

Table 2. Test device description

* GSM/GPRS 900, GSM/GPRS 1800 and WCDMA (FDD I) bands are not operational in North America and therefore are not included in this report.

** Bluetooth application is for hands-free operation with headset only. Therefore, no head SAR testing with BT on is required. Worst case body SAR with holster was tested with BT turned on as shown in the Table 16.

? This is a revised test report showing body SAR with 2 timeslots uplink with the in-box holster holster.

| | | | |
|-------------------------------------------|-------------------------------------------------------------------------------------------|---------------------------------------------------|------------------------------|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry Wireless Handheld Model RBD50UW | | Page 5(26) |
| Author Data Daoud Attayi | Dates of Test Jan. 09-31, Mar. 21-23, 2006 | Test Report No RTS-0258-0601-08 rev. 02 | FCC ID: L6ARBD50UW |

The GPRS operation for the BlackBerry RBD50UW is a multiclass 10 technology with **2 timeslots uplink**. In the GPRS mode or 2 timeslots uplink, the device can be attached to both GPRS and GSM services, using one service at a time. During voice calls or SMS, GPRS services are suspended and then resumed automatically after the call or SMS session has ended.

1.4 Body worn accessories

The BlackBerry Wireless Handheld has been tested with the following holster which contains metal components and the separation distance between the handheld and the user's body is listed in the table below. The holster is designed with the intended handheld orientation being with the LCD facing the belt clip. Proper positioning is vital for protection of the LCD display, and to help maximize the battery life of the handheld. The handheld can also be placed in the holster with the backside facing the belt clip. Body SAR was evaluated with back and front side of handheld facing belt clip or body.

| Holster Type | Model / Part Number | Separation (mm) |
|------------------------|---------------------|-----------------|
| Leather Swivel Holster | ASY-09288-003 | 15.00 |



Figure 2. Body-worn holsters

| | | | |
|-------------------------------------------|-------------------------------------------------------------------------------------------|---------------------------------------------------|------------------------------|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry Wireless Handheld Model RBD50UW | | Page 6(26) |
| Author Data Daoud Attayi | Dates of Test Jan. 09-31, Mar. 21-23, 2006 | Test Report No RTS-0258-0601-08 rev. 02 | FCC ID: L6ARBD50UW |

1.5 Headsets

The BlackBerry Wireless Handheld was tested with and without with the headset model number HDW-03458-001.

1.6 Batteries

The BlackBerry Wireless Handheld was tested with the following Lithium Ion Batteries.

- 1) BAT-06860-003
- 2) BAT-06860-003 (Alternate)
- 3) BAT-06985-002 (Higher capacity, alternate)

1.7 LCDs

The BlackBerry Wireless Handhelds were tested with the following LCDs.

- 1) LCD-08818-001
- 2) LCD-08818-002 (Alternate)

1.8 Procedure used to establish test signal

The Handheld was put into test mode for SAR measurements by placing a voice call from a Wavetek 4400M / CMU 200 Communications Test Instrument. The power control level was set to command the handheld to transmit at full power at the specified frequency. Other parameters include: Channel type = full rate, discontinuous transmission off, frequency hopping off. A Rohde & Schwarz CMU-200 was used to establish a connection with the EUT's Bluetooth radio. Worst case SAR was evaluated with Bluetooth on.

2.0 DESCRIPTION OF THE TEST EQUIPMENT

2.1 SAR measurement system

SAR measurements were performed using a Dosimetric Assessment System (DASY4), an automated SAR measurement system manufactured by Schmid & Partner Engineering AG (SPEAG), of Zurich, Switzerland.

The DASY 4 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software.
- An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A DAE module that performs the signal amplification, signal multiplexing, A/D conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the Electro-optical coupler (EOC).
- A unit to operate the optical surface detector that is connected to the EOC.
- The EOC performs the conversion from an optical signal into the digital electric signal of the DAE. The EOC is connected to the PC plug-in card.

| | | | |
|-------------------------------------------|----------------------------------------------------------------------------------------------|---------------------------------------------------|------------------------------|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry Wireless Handheld Model RBD50UW | | Page 8(26) |
| Author Data Daoud Attayi | Dates of Test Jan. 09-31, Mar. 21-23, 2006 | Test Report No RTS-0258-0601-08 rev. 02 | FCC ID: L6ARBD50UW |

Table 3. Equipment list

| | | | |
|-----------------------------|----------------------------------------------------------------------------------------------|-----------------------------------------------|--------------------------------------------|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry Wireless Handheld Model RBD50UW | | Page 9(26) |
| | Author Data Daoud Attayi | Dates of Test Jan. 09-31, Mar. 21-23, 2006 | Test Report No RTS-0258-0601-08 rev. 02 |
| | | FCC ID: L6ARBD50UW | |

2.2 Description of the test setup

Before a SAR test is conducted, the Handheld and the DASY equipment are setup as follows:

2.2.1 Handheld and base station simulator setup

- Power up the Handheld.
- Turn on the base station simulator and set the radio channel and power to the appropriate values.
- Connect an antenna to the RF IN/OUT of the communication test set and place it close to the Handheld.

2.2.2 DASY setup

- Turn the computer on and log on to Windows 2000.
- Start the DASY4 software by clicking on the icon located on the Windows desktop.
- Mount the DAE unit and the probe. Turn on the DAE unit.
- Turn the Robot Controller on by turning the main power switch to the horizontal position
- Align the probe by clicking the 'Align probe in light beam' button.
- Open a file and configure the proper parameters - probe, medium, communications system etc.
- Establish a connection between the Handheld and the communications test instrument. Place the Handheld on the stand and adjust it under the phantom.
- Start SAR measurements.

3.0 ELECTRIC FIELD PROBE CALIBRATION

3.1 Probe Specifications

SAR measurements were conducted using the dosimetric probe ET3DV6, designed by Schmid & Partner Engineering AG for the measurement of SAR. The probe is constructed using the thin film technique, with printed resistive lines on ceramic substrates. It has a symmetrical design with triangular core, built-in optical fibre for the surface detection system and built-in shielding against static discharge. The probe is sensitive to Efields and thus incorporates three small dipoles arranged so that the overall response is close to isotropic. The table below summarizes the technical data for the probe.

| Property | Data |
|---------------------------------------------|---------------------------|
| Frequency range | 30 MHz – 3 GHz |
| Linearity | ± 0.1 dB |
| Directivity (rotation around probe axis) | = ± 0.2 dB |
| Directivity (rotation normal to probe axis) | ± 0.4 dB |
| Dynamic Range | 5 mW/kg – 100 W/kg |
| Probe positioning repeatability | ± 0.2 mm |
| Spatial resolution | < 0.125 mm ³ |

Table 4. Probe specifications

| | | | |
|-------------------------------------------|----------------------------------------------------------------------------------------------|---------------------------------------------------|------------------------------|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry Wireless Handheld Model RBD50UW | | Page 10(26) |
| Author Data Daoud Attayi | Dates of Test Jan. 09-31, Mar. 21-23, 2006 | Test Report No RTS-0258-0601-08 rev. 02 | FCC ID: L6ARBD50UW |

3.2 Probe calibration and measurement errors

The probe was calibrated on March 15, 2005 with an accuracy better than $\pm 10\%$. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe were tested. The probe calibration parameters are shown on Appendix D.

4.0 SAR MEASUREMENT SYSTEM VERIFICATION

Prior to conducting SAR measurements, the system was validated using the dipole validation kit and the flat section of the SAM phantom. A power level of 1.0W was applied to the dipole antenna. The verification results are in the table below with a comparison to reference values. Printouts are shown in Appendix A. All the measured parameters are within the allowed tolerances.

4.1 System accuracy verification for Head Adjacent use

| f (MHz) | Limits / Measured | SAR (W/kg) 1 g/ 10 g | Dielectric Parameters | | Liquid Temp (°C) |
|------------|-----------------------|-------------------------|-----------------------|----------------|---------------------|
| | | | ϵ_r | σ [S/m] | |
| 835 | Measured (01/16/2006) | 9.26 / 6.04 | 40.78 | 0.86 | 23.1 |
| | Measured (01/19/2006) | 9.64 / 6.31 | 41.02 | 0.89 | 23.9 |
| | Measured (03/21/2006) | 9.16 / 5.93 | 42.69 | 0.87 | 23.0 |
| | Recommended Limits | 9.10 / 5.93 | 41.50 | 0.90 | N/A |
| 1900 | Measured (01/09/2006) | 42.0 / 22.2 | 38.91 | 1.44 | 23.5 |
| | Measured (01/11/2006) | 42.6 / 22.5 | 38.23 | 1.43 | 22.8 |
| | Measured (03/23/2006) | 38.5 / 20.3 | 39.75 | 1.46 | 22.8 |
| | Recommended Limits | 39.5 / 20.7 | 40.00 | 1.40 | N/A |

Table 5. System accuracy (Validation for Head Adjacent use)

| | | | |
|-------------------------------------------|----------------------------------------------------------------------------------------------|---------------------------------------------------|------------------------------|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry Wireless Handheld Model RBD50UW | | Page 11(26) |
| Author Data Daoud Attayi | Dates of Test Jan. 09-31, Mar. 21-23, 2006 | Test Report No RTS-0258-0601-08 rev. 02 | FCC ID: L6ARBD50UW |

5.0 PHANTOM DESCRIPTION

The SAM Twin Phantom, manufactured by SPEAG, was used during the SAR measurements. The phantom is made of a fibreglass shell integrated with a wooden table.

The SAM Twin Phantom is a fibreglass shell phantom with 2 mm shell thickness. It has three measurement areas:

- Left side head
- Right side head
- Flat phantom

The phantom table dimensions are: 100x50x85 cm (LxWxH). The table is intended for use with freestanding robots.

The bottom shelf contains three pair of bolts for locking the device holder in place. The device holder positions are adjusted to the standard measurement positions in the three sections. Only one device holder is necessary if two phantoms are used (e.g., for different solutions).

A white cover is provided to top the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on the cover are possible; however the optical surface detector does not work properly at the cover surface. Place a sheet of white paper on the cover when using optical surface detection.

Liquid depth of = 15 cm is maintained in the phantom for all the measurements.



Figure 4. SAM Twin Phantom

| | | | |
|-------------------------------------------|----------------------------------------------------------------------------------------------|---------------------------------------------------|------------------------------|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry Wireless Handheld Model RBD50UW | | Page 12(26) |
| Author Data Daoud Attayi | Dates of Test Jan. 09-31, Mar. 21-23, 2006 | Test Report No RTS-0258-0601-08 rev. 02 | FCC ID: L6ARBD50UW |

6.0 TISSUE DIELECTRIC PROPERTIES

6.1 Composition of tissue simulant

The composition of the brain and muscle simulating liquids for 800-900 MHz and 1800-1900 MHz are shown in the table below.

| INGREDIENT | MIXTURE 800-900MHz | | MIXTURE 1800-1900MHz | |
|-------------|--------------------|----------|----------------------|----------|
| | Brain % | Muscle % | Brain % | Muscle % |
| Water | 51.07 | 65.45 | 54.88 | 69.91 |
| Sugar | 47.31 | 34.31 | 0 | 0 |
| Salt | 1.15 | 0.62 | 0.21 | 0.13 |
| HEC | 0.23 | 0 | 0 | 0 |
| Bactericide | 0.24 | 0.10 | 0 | 0 |
| DGBE | 0 | 0 | 44.91 | 29.96 |

Table 6. Tissue simulant recipe

6.1.1 Equipment

| Manufacturer | Test Equipment | Model Number | Serial Number | Cal. Due Date |
|-----------------|---------------------|--------------|---------------|---------------|
| Pyrex, England | Graduated Cylinder | N/A | N/A | N/A |
| Pyrex, USA | Beaker | N/A | N/A | N/A |
| Acculab | Weight Scale | VI-1200 | 018WB2003 | N/A |
| Control Company | Digital Thermometer | 15-077-21 | 51129471 | 05/20/2007 |
| IKA Works Inc. | Hot Plate | RC Basic | 3.107433 | N/A |

Table 7. Tissue simulant preparation equipment

6.1.2 Preparation procedure

800-900 MHz liquids

- Fill the container with **water**. Begin heating and stirring.
- Add the **Cellulose**, the **preservative substance** and the **salt**. After several hours, the liquid will become more transparent again. The container must be covered to prevent evaporation.
- Add **Sugar**. Stir it well until the sugar is sufficiently dissolved.
- Keep the liquid hot but below the boiling point for at least an hour. The container must be covered to prevent evaporation.
- Remove the container from, and turn the hotplate off and allow the liquid to cool off to room temperature prior to performing dielectric measurements.

1800-1900 MHz liquid

- Fill the container with **water**. Begin heating and stirring.
- Add the **salt** and **Glycol**. The container must be covered to prevent evaporation.

| | | | |
|-------------------------------------------|----------------------------------------------------------------------------------------------|---------------------------------------------------|------------------------------|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry Wireless Handheld Model RBD50UW | | Page 13(26) |
| Author Data Daoud Attayi | Dates of Test Jan. 09-31, Mar. 21-23, 2006 | Test Report No RTS-0258-0601-08 rev. 02 | FCC ID: L6ARBD50UW |

- Keep the liquid hot but below the boiling point for at least an hour. The container must be covered to prevent evaporation.
- Remove the container from, and turn the hotplate off and allow the liquid to cool off to room temperature prior to performing dielectric measurements.

6.2 Electrical parameters of the tissue simulating liquid

The tissue dielectric parameters shall be measured before a batch can be used for SAR measurements to ensure that the simulated tissue was properly made and will simulate the desired human characteristic. Limits and measured electrical parameters are shown in the table below.

Recommended limits are adopted from IEEE P1528-2003:

“Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, SPEAG dipole calibration certificates and from FCC Tissue Dielectric Properties web page at <http://www.fcc.gov/fcc-bin/dielec.sh>

| f (MHz) | Tissue Type | Limits / Measured | Dielectric Parameters | | Liquid Temp (°C) |
|---------|-------------|-----------------------|-----------------------|----------------|------------------|
| | | | ϵ_r | σ [S/m] | |
| 835 | Head | Measured (01/16/2006) | 40.78 | 0.86 | 23.1 |
| | | Measured (01/19/2006) | 41.02 | 0.89 | 23.9 |
| | | Measured (03/21/2006) | 42.69 | 0.87 | 23.0 |
| | | Recommended Limits | 41.50 | 0.90 | N/A |
| | Muscle | Measured (01/19/2006) | 53.98 | 0.98 | 22.6 |
| | | Measured (03/21/2006) | 53.27 | 0.98 | 23.0 |
| | | Recommended Limits | 55.20 | 0.97 | N/A |
| 1900 | Head | Measured (01/09/2006) | 38.91 | 1.44 | 23.5 |
| | | Measured (01/11/2006) | 38.23 | 1.43 | 22.8 |
| | | Measured (03/23/2006) | 39.75 | 1.46 | 22.8 |
| | | Recommended Limits | 40.00 | 1.40 | N/A |
| | Muscle | Measured (01/11/2006) | 51.56 | 1.56 | 22.8 |
| | | Measured (03/23/2006) | 51.10 | 1.57 | 22.8 |
| | | Recommended Limits | 53.30 | 1.52 | N/A |

Table 8. Electrical parameters of tissue simulating liquid

6.2.1 Equipment

| Manufacturer | Test Equipment | Model Number | Serial Number | Cal. Due Date |
|----------------------|----------------------|--------------|---------------|---------------|
| Agilent Technologies | Network Analyzer | 8753ES | US39174857 | 07/27/2006 |
| Agilent Technologies | Dielectric probe kit | HP 85070C | US9936135 | CNR |
| Dell | PC using GPIB card | GX110 | 347 | N/A |
| Control Company | Digital Thermometer | 15-077-21 | 51129471 | 05/20/2007 |

Table 9. Equipment required for electrical parameter measurements

| | | | |
|------------------------------------------------|-------------------------------------------------------------------------------|--------------------------|------------|
| <div>RTS</div> <div>RIM Testing Services</div> | Document | | Page |
| | SAR Compliance Test Report for the BlackBerry Wireless Handheld Model RBD50UW | | 14(26) |
| Author Data | Dates of Test | Test Report No | FCC ID: |
| Daoud Attayi | Jan. 09-31, Mar. 21-23, 2006 | RTS-0258-0601-08 rev. 02 | L6ARBD50UW |

6.2.2 Test Configuration

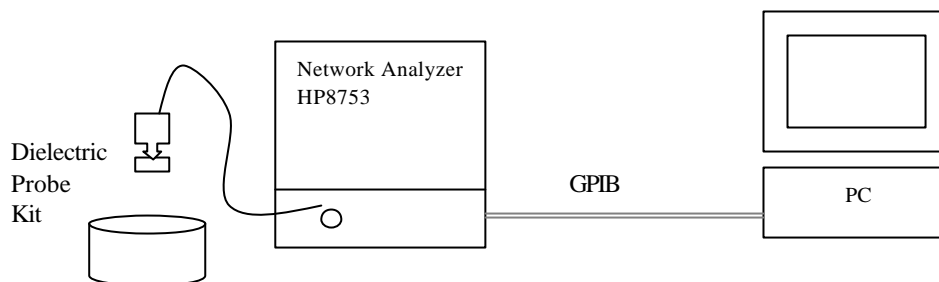


Figure 5. Test configuration

6.2.3 Procedure

1. Turn NWA on and allow at least 30 minutes for warm up.
2. Mount dielectric probe kit so that interconnecting cable to NWA will not be moved during measurements or calibration.
3. Pour de-ionized water and measure water temperature ($\pm 1^\circ$).
4. Set water temperature in HP-Software (Calibration Setup).
5. Perform calibration.
6. Relative permittivity $\epsilon_r = \epsilon'$ and conductivity can be calculated from ϵ''

$$\sigma = \omega \epsilon_0 \epsilon''$$
7. Measure liquid shortly after calibration.
8. Stir the liquid to be measured. Take a sample (~50ml) with a syringe from the center of the liquid container.
9. Pour the liquid into a small glass flask. Hold the syringe at the bottom of the flask to avoid air bubbles.
10. Put the dielectric probe in the glass flask. Check that there are no air bubbles in front of the opening in the dielectric probe kit.
11. Perform measurements.
12. Adjust medium parameters in DASY4 for the frequencies necessary for the measurements ('Setup Config', select medium (e.g. Head 835 MHz) and press 'Option'-button.
13. Select the current medium for the frequency of the validation (e.g. Setup Medium Brain 835 MHz).

Sample calculation for 835 MHz head tissue dielectric parameters using data from Table 10.

Relative permittivity $\epsilon_r = \epsilon' = 40.78$

Conductivity $\sigma = \omega \epsilon_0 \epsilon'' = (2\pi \times 835 \times 10^6)(8.854 \times 10^{-12})(18.48) = 0.86 \text{ S/m}$

| | | | |
|-------------------------------------------|----------------------------------------------------------------------------------------------|---------------------------------------------------|------------------------------|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry Wireless Handheld Model RBD50UW | | Page 15(26) |
| Author Data Daoud Attayi | Dates of Test Jan. 09-31, Mar. 21-23, 2006 | Test Report No RTS-0258-0601-08 rev. 02 | FCC ID: L6ARBD50UW |

Title

SubTitle

January 18, 2006 10:03 AM

Title

SubTitle

January 18, 2006 10:03 AM

| Frequency | e' | e" | Frequency | e' | e" |
|----------------|---------|---------|----------------|---------|---------|
| 800.000000 MHz | 41.1629 | 18.5422 | 800.000000 MHz | 54.3696 | 21.2454 |
| 805.000000 MHz | 41.1240 | 18.5352 | 805.000000 MHz | 54.3132 | 21.2053 |
| 810.000000 MHz | 41.0403 | 18.4975 | 810.000000 MHz | 54.2535 | 21.2007 |
| 815.000000 MHz | 41.0095 | 18.4941 | 815.000000 MHz | 54.2128 | 21.1670 |
| 820.000000 MHz | 40.9332 | 18.4766 | 820.000000 MHz | 54.1536 | 21.1571 |
| 825.000000 MHz | 40.8977 | 18.4695 | 825.000000 MHz | 54.1010 | 21.1617 |
| 830.000000 MHz | 40.8373 | 18.4640 | 830.000000 MHz | 54.0267 | 21.1188 |
| 835.000000 MHz | 40.7832 | 18.4779 | 835.000000 MHz | 53.9848 | 21.1309 |
| 840.000000 MHz | 40.7167 | 18.4432 | 840.000000 MHz | 53.8812 | 21.1216 |
| 845.000000 MHz | 40.6565 | 18.4280 | 845.000000 MHz | 53.8598 | 21.0934 |
| 850.000000 MHz | 40.6079 | 18.4510 | 850.000000 MHz | 53.7841 | 21.0637 |
| 855.000000 MHz | 40.5537 | 18.4140 | 855.000000 MHz | 53.7393 | 21.0555 |
| 860.000000 MHz | 40.4753 | 18.4148 | 860.000000 MHz | 53.6896 | 21.0170 |
| 865.000000 MHz | 40.4329 | 18.3956 | 865.000000 MHz | 53.6161 | 20.9985 |
| 870.000000 MHz | 40.3945 | 18.4058 | 870.000000 MHz | 53.5720 | 21.0121 |
| 875.000000 MHz | 40.3238 | 18.4051 | 875.000000 MHz | 53.4962 | 20.9951 |
| 880.000000 MHz | 40.2883 | 18.3845 | 880.000000 MHz | 53.4542 | 21.0080 |
| 885.000000 MHz | 40.2194 | 18.3837 | 885.000000 MHz | 53.4302 | 20.9822 |
| 890.000000 MHz | 40.1692 | 18.3925 | 890.000000 MHz | 53.4031 | 20.9736 |
| 895.000000 MHz | 40.1443 | 18.3497 | 895.000000 MHz | 53.3486 | 20.9599 |
| 900.000000 MHz | 40.0858 | 18.3416 | 900.000000 MHz | 53.3160 | 20.9327 |
| 905.000000 MHz | 40.0494 | 18.3224 | 905.000000 MHz | 53.2669 | 20.9277 |
| 910.000000 MHz | 39.9880 | 18.3156 | 910.000000 MHz | 53.2304 | 20.9127 |
| 915.000000 MHz | 39.9372 | 18.3253 | 915.000000 MHz | 53.1974 | 20.9172 |
| 920.000000 MHz | 39.8718 | 18.3152 | 920.000000 MHz | 53.1369 | 20.8760 |

Head

Muscle

Table 10. 835 MHz head and muscle tissue dielectric parameters

| | | | |
|-------------------------------------------|----------------------------------------------------------------------------------------------|---------------------------------------------------|------------------------------|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry Wireless Handheld Model RBD50UW | | Page 16(26) |
| Author Data Daoud Attayi | Dates of Test Jan. 09-31, Mar. 21-23, 2006 | Test Report No RTS-0258-0601-08 rev. 02 | FCC ID: L6ARBD50UW |

| Title | | | Title | | |
|---------------------------|---------|---------|---------------------------|---------|---------|
| SubTitle | | | SubTitle | | |
| January 09, 2006 13:28 PM | | | January 11, 2006 12:25 AM | | |
| Frequency | e' | e'' | Frequency | e' | e'' |
| 1.800000000 GHz | 39.3167 | 13.3891 | 1.800000000 GHz | 51.8939 | 14.4304 |
| 1.805000000 GHz | 39.2906 | 13.3947 | 1.805000000 GHz | 51.8754 | 14.4334 |
| 1.810000000 GHz | 39.2740 | 13.4006 | 1.810000000 GHz | 51.8632 | 14.4562 |
| 1.815000000 GHz | 39.2527 | 13.4184 | 1.815000000 GHz | 51.8586 | 14.4619 |
| 1.820000000 GHz | 39.2420 | 13.4480 | 1.820000000 GHz | 51.8506 | 14.4884 |
| 1.825000000 GHz | 39.2411 | 13.4535 | 1.825000000 GHz | 51.8400 | 14.5027 |
| 1.830000000 GHz | 39.2293 | 13.4655 | 1.830000000 GHz | 51.8160 | 14.5177 |
| 1.835000000 GHz | 39.2124 | 13.4686 | 1.835000000 GHz | 51.8042 | 14.5296 |
| 1.840000000 GHz | 39.1827 | 13.4796 | 1.840000000 GHz | 51.7886 | 14.5448 |
| 1.845000000 GHz | 39.1691 | 13.5167 | 1.845000000 GHz | 51.7656 | 14.5592 |
| 1.850000000 GHz | 39.1355 | 13.5302 | 1.850000000 GHz | 51.7489 | 14.5970 |
| 1.855000000 GHz | 39.1344 | 13.5327 | 1.855000000 GHz | 51.7641 | 14.5964 |
| 1.860000000 GHz | 39.1188 | 13.5501 | 1.860000000 GHz | 51.7315 | 14.6229 |
| 1.865000000 GHz | 39.0908 | 13.5662 | 1.865000000 GHz | 51.7098 | 14.6365 |
| 1.870000000 GHz | 39.0673 | 13.5795 | 1.870000000 GHz | 51.6922 | 14.6502 |
| 1.875000000 GHz | 39.0420 | 13.5941 | 1.875000000 GHz | 51.6749 | 14.6637 |
| 1.880000000 GHz | 39.0171 | 13.6233 | 1.880000000 GHz | 51.6412 | 14.6702 |
| 1.885000000 GHz | 38.9869 | 13.6290 | 1.885000000 GHz | 51.6141 | 14.6675 |
| 1.890000000 GHz | 38.9719 | 13.6491 | 1.890000000 GHz | 51.5998 | 14.7072 |
| 1.895000000 GHz | 38.9345 | 13.6565 | 1.895000000 GHz | 51.5773 | 14.7328 |
| 1.900000000 GHz | 38.9125 | 13.6692 | 1.900000000 GHz | 51.5586 | 14.7623 |
| 1.905000000 GHz | 38.8866 | 13.6844 | 1.905000000 GHz | 51.5471 | 14.7711 |
| 1.910000000 GHz | 38.8644 | 13.7239 | 1.910000000 GHz | 51.5406 | 14.7970 |
| 1.915000000 GHz | 38.8510 | 13.7253 | 1.915000000 GHz | 51.5142 | 14.8121 |
| 1.920000000 GHz | 38.8340 | 13.7438 | 1.920000000 GHz | 51.5045 | 14.8054 |

Head

Muscle

Table 11. 1900 MHz head and muscle tissue dielectric parameters

| | | | |
|-----------------------------|----------------------------------------------------------------------------------------------|-----------------------------------------------|--------------------------------------------|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry Wireless Handheld Model RBD50UW | | Page 17(26) |
| | Author Data Daoud Attayi | Dates of Test Jan. 09-31, Mar. 21-23, 2006 | Test Report No RTS-0258-0601-08 rev. 02 |
| | | FCC ID: L6ARBD50UW | |

7.0 SAR SAFETY LIMITS

| Standards/Guideline | Localized SAR Limit (W/kg) General public (uncontrolled) | Localized SAR Limits (W/kg) Workers (controlled) |
|----------------------------|----------------------------------------------------------------|--------------------------------------------------------|
| ICNIRP (1998) Standard | 2.0 (10g) | 10.0 (10g) |
| IEEE C95.1 (1999) Standard | 1.6 (1g) | 8.0 (1g) |

Table 12. SAR safety limits for Controlled / Uncontrolled environment

| Human Exposure | Localized SAR Limits (W/kg) 10g, ICNIRP (1998) Standard | Localized SAR Limits (W/kg) 1g, IEEE C95.1 (1999) Standard |
|------------------------------------------------------------|---------------------------------------------------------------|------------------------------------------------------------------|
| Spatial Average (averaged over the whole body) | 0.08 | 0.08 |
| Spatial Peak (averaged over any X g of tissue) | 2.00 | 1.60 |
| Spatial Peak (hands/wrists/feet/ankles averaged over 10 g) | 4.00 | 4.00 (10g) |

Table 13. SAR safety limits

Uncontrolled Environments are defined as locations where there is exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

| | | |
|-------------------------------------------|--------------------------------------------------------------------------------------------------|---------------------------------------------------|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry Wireless Handheld Model RBD50UW | Page 18(26) |
| Author Data Daoud Attayi | Dates of Test Jan. 09-31, Mar. 21-23, 2006 | Test Report No RTS-0258-0601-08 rev. 02 |
| FCC ID: L6ARBD50UW | | |

8.0 DEVICE POSITIONING

8.1 Device holder for SAM Twin Phantom

The Handheld was positioned for all test configurations using the DASY4 holder. The device holder facilitates the rotation of the mounted transmitter in spherical coordinates whereby the rotation point is the ear opening. The devices can be easily, accurately and with repeatability positioned according to FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).



Figure 6. Device Holder

1. Put the phone in the clamp mechanism (1) and hold it straight while tightening. (Curved phones or phones with asymmetrical ear pieces should be positioned so that the earpiece is in the symmetry plane of the clamp).

2. Adjust the sliding carriage (2) to 90°. Then adjust the phone holder angle (3) until the reference line of the phone is horizontal (parallel to the flat phantom bottom). The phone reference line is defined as the front tangential line between the earpiece and the center of the device bottom (or the center of the flip hinge). For devices with parallel front and backsides, the phone holder angle (3) is 0°.

3. Place the device holder at the desired phantom section and move it securely against the positioning pins (4). The screw in front of the turning plate can be applied for correct positioning (5). (Do not tighten it too strongly).

4. Shift the phone clamp (6) so that the earpiece is exactly below the ear marking of the phantom. The phone is now correctly positioned in the holder for all standard phantom measurements, even after changing the phantom or phantom section.

| | | | |
|------------------------------------------------|----------------------------------------------------------------------------------------------|--------------------------------------------|-----------------------|
| <div>RTS</div> <div>RIM Testing Services</div> | Document SAR Compliance Test Report for the BlackBerry Wireless Handheld Model RBD50UW | | Page 19(26) |
| Author Data Daoud Attayi | Dates of Test Jan. 09-31, Mar. 21-23, 2006 | Test Report No RTS-0258-0601-08 rev. 02 | FCC ID: L6ARBD50UW |

5. Adjust the device position angles to the desired measurement position.

6. After fixing the device angles, move the phone fixture up until the phone touches the ear marking. (The point of contact depends on the design of the device and the positioning angle).

8.2 Description of the test positioning

8.2.1 Test Positions of Device Relative to Head

The handset was tested in two test positions against the head phantom, the “cheek” position and the “tilted” position, on both left and right sides of the phantom.

The handset was tested in the above positions according to IEEE 1528- 2003 “Recommended Practice for Determining the Spatial-Peak Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques”.

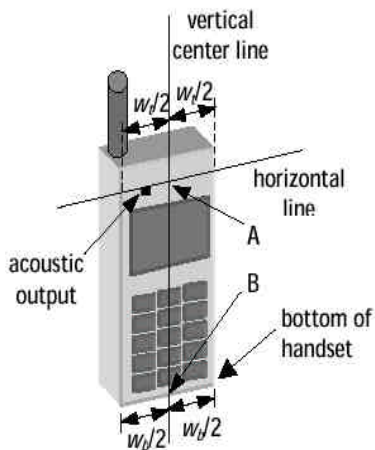


Figure 7a. Handset vertical and horizontal reference lines – fixed case

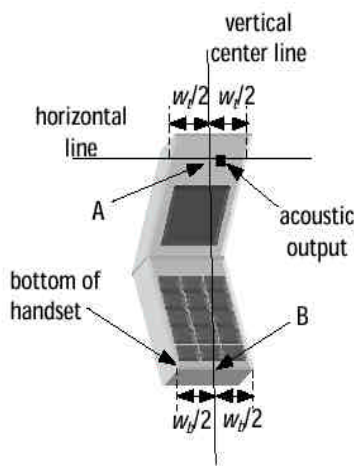


Figure 7b. Handset vertical and horizontal reference lines – “clam-shell”

| | | | |
|-------------------------------------------|----------------------------------------------------------------------------------------------|---------------------------------------------------|------------------------------|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry Wireless Handheld Model RBD50UW | | Page 20(26) |
| Author Data Daoud Attayi | Dates of Test Jan. 09-31, Mar. 21-23, 2006 | Test Report No RTS-0258-0601-08 rev. 02 | FCC ID: L6ARBD50UW |

8.2.1.1 Definition of the “cheek” position

- 1) Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece, open the cover.
- 2) Define two imaginary lines on the handset: the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset: the midpoint of the width w_t of the handset at the level of the acoustic output (point A on Figures 7a and 7b), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 7a). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output. However, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 7b), especially for clamshell handsets, handsets with flip pieces, and other irregularly shaped handsets.
- 3) Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 7), such that the plane defined by the vertical center line and the horizontal center line is in a plane approximately parallel to the sagittal plane of the phantom.
- 4) Translate the handset towards the phantom along the line passing through RE and LE until the handset touches the ear.
- 5) While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is the plane normal to MB (“mouth-back”) - NF (“neck-front”) including the line MB (reference plane).
- 6) Rotate the phone around the vertical centerline until the phone (horizontal line) is symmetrical with respect to the line NF.
- 7) While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the phone contact with the ear, rotate the handset about the line NF until any point on the handset is in contact with a phantom point below the ear (cheek).

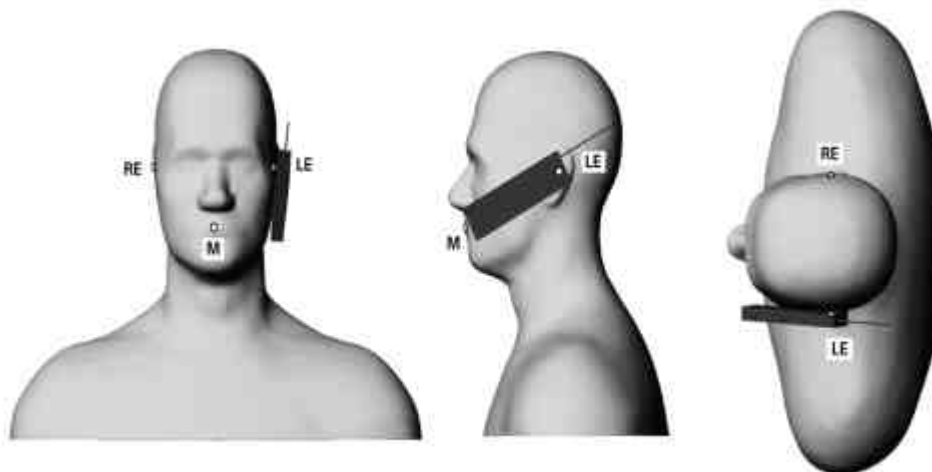


Figure 8. Phone position 1, “cheek” or “touch” position. The reference points for the right ear (RE), left ear (LE) and mouth (M), which define the reference plane for phone positioning, are indicated. The shoulders are shown for illustration purposes only

| | | | |
|-------------------------------------------|----------------------------------------------------------------------------------------------|---------------------------------------------------|------------------------------|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry Wireless Handheld Model RBD50UW | | Page 21(26) |
| Author Data Daoud Attayi | Dates of Test Jan. 09-31, Mar. 21-23, 2006 | Test Report No RTS-0258-0601-08 rev. 02 | FCC ID: L6ARBD50UW |

8.2.1.2 Definition of the “Tilted” Position

- 1) Repeat steps 1 to 7 of 5.4.1 (in this report 8.2.1.1) to replace the device in the “cheek position.”
- 2) While maintaining the device in the reference plane (described above) and pivoting against the ear, move the device outward away from the mouth by an angle of 15 degrees, or until the antenna touches the phantom.

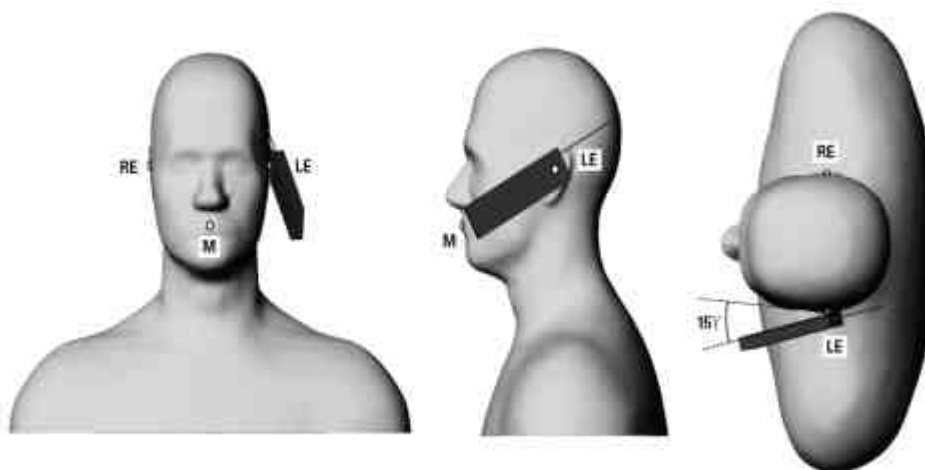


Figure 9. Phone position 2, “tilted position.” The reference points for the right ear (RE), left ear (LE) and mouth (M), which define the reference plane for phone positioning, are indicated. The shoulders are shown for illustration purposes only.

8.2.2 Body Holster Configuration

A body worn holster, as shown on Figure 2, was tested with the Wireless Handheld for FCC RF exposure compliance. The EUT was positioned in the holster case and the belt clip was placed against the flat section of the phantom. A headset was then connected to the handheld to simulate hands-free operation in a body worn holster configuration.

| | | | |
|-------------------------------------------|--------------------------------------------------------------------------------------------------|---------------------------------------------------|------------------------------|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry Wireless Handheld Model RBD50UW | | Page 22(26) |
| Author Data Daoud Attayi | Dates of Test Jan. 09-31, Mar. 21-23, 2006 | Test Report No RTS-0258-0601-08 rev. 02 | FCC ID: L6ARBD50UW |

9.0 HIGH LEVEL EVALUATION

9.1 Maximum search

The maximum search is automatically performed after each coarse scan measurement. It is based on splines in two or three dimensions. The procedure can find the maximum for most SAR distributions even with relatively large grid spacing. After the coarse scan measurement, the probe is automatically moved to a position at the interpolated maximum. The following scan can directly use this position for reference, e.g., for a finer resolution grid or the cube evaluations.

9.2 Extrapolation

The extrapolation can be used in z-axis scans with automatic surface detection. The SAR values can be extrapolated to the inner phantom surface. The extrapolation distance is the sum of the probe sensor offset, the surface detection distance and the grid offset. The extrapolation is based on fourth order polynomial functions. The extrapolation is only available for SAR values.

9.3 Boundary correction

The correction of the probe boundary effect in the vicinity of the phantom surface is done in the standard (worst case) evaluation; the boundary effect is reduced by different weights for the lowest measured points in the extrapolation routine. The result is a slight overestimation of the extrapolated SAR values (2% to 8%) depending on the SAR distribution and gradient. The advanced evaluation makes a full compensation of the boundary effect before doing the extrapolation. This is only possible for probes with specifications on the boundary effect.

9.4 Peak search for 1g and 10g cube averaged SAR

The 1g and 10g peak evaluations are only available for the predefined cube 7x7x7 scan. The routines are verified and optimized for the grid dimensions used in these cube measurements.

The measured volume of 30x30x30mm mm with 5mm resolution amounts to 343 measurement points. The first procedure is an extrapolation (incl. Boundary correction) to get the points between the lowest measured plane and the surface. The next step uses 3D interpolation to get all points within the measured volume in a 1mm grid. In the last step, a 1g cube is placed numerically into the volume and its averaged SAR is calculated. This cube is then moved around until the highest averaged SAR is found. This last procedure is repeated for a 10 g cube. If the highest SAR is found at the edge of the measured volume, the system will issue a warning: higher SAR values might be found outside of the measured volume. In that case the cube measurement can be repeated, using the new interpolated maximum as the center.

| | | | |
|------------------------------------|----------------------------------------------------------------------------------------------|-----------------------------------------------|--------------------------------------------|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry Wireless Handheld Model RBD50UW | | Page 23(26) |
| | Author Data Daoud Attayi | Dates of Test Jan. 09-31, Mar. 21-23, 2006 | Test Report No RTS-0258-0601-08 rev. 02 |
| | | FCCID: L6ARBD50UW | |

10.0 MEASUREMENT UNCERTAINTY

| DASY4 Uncertainty Budget According to IEEE P1528 [1] | | | | | | | | |
|----------------------------------------------------------------|-------------------|-------------|------|--------------|---------------|----------------|-----------------|---------------------|
| Error Description | Uncertainty value | Prob. Dist. | Div. | (c_i) 1g | (c_i) 10g | Std. Unc. (1g) | Std. Unc. (10g) | (v_i) v_{eff} |
| Measurement System | | | | | | | | |
| Probe Calibration | ±4.8% | N | 1 | 1 | 1 | ±4.8% | ±4.8% | ∞ |
| Axial Isotropy | ±4.7% | R | √3 | 0.7 | 0.7 | ±1.9% | ±1.9% | ∞ |
| Hemispherical Isotropy | ±9.6% | R | √3 | 0.7 | 0.7 | ±3.9% | ±3.9% | ∞ |
| Boundary Effects | ±1.0% | R | √3 | 1 | 1 | ±0.6% | ±0.6% | ∞ |
| Linearity | ±4.7% | R | √3 | 1 | 1 | ±2.7% | ±2.7% | ∞ |
| System Detection Limits | ±1.0% | R | √3 | 1 | 1 | ±0.6% | ±0.6% | ∞ |
| Readout Electronics | ±1.0% | N | 1 | 1 | 1 | ±1.0% | ±1.0% | ∞ |
| Response Time | ±0.8% | R | √3 | 1 | 1 | ±0.5% | ±0.5% | ∞ |
| Integration Time | ±2.6% | R | √3 | 1 | 1 | ±1.5% | ±1.5% | ∞ |
| RF Ambient Conditions | ±3.0% | R | √3 | 1 | 1 | ±1.7% | ±1.7% | ∞ |
| Probe Positioner | ±0.4% | R | √3 | 1 | 1 | ±0.2% | ±0.2% | ∞ |
| Probe Positioning | ±2.9% | R | √3 | 1 | 1 | ±1.7% | ±1.7% | ∞ |
| Max. SAR Eval. | ±1.0% | R | √3 | 1 | 1 | ±0.6% | ±0.6% | ∞ |
| Test Sample Related | | | | | | | | |
| Device Positioning | ±2.9% | N | 1 | 1 | 1 | ±2.9% | ±2.9% | 145 |
| Device Holder | ±3.6% | N | 1 | 1 | 1 | ±3.6% | ±3.6% | 5 |
| Power Drift | ±5.0% | R | √3 | 1 | 1 | ±2.9% | ±2.9% | ∞ |
| Phantom and Setup | | | | | | | | |
| Phantom Uncertainty | ±4.0% | R | √3 | 1 | 1 | ±2.3% | ±2.3% | ∞ |
| Liquid Conductivity (target) | ±5.0% | R | √3 | 0.64 | 0.43 | ±1.8% | ±1.2% | ∞ |
| Liquid Conductivity (meas.) | ±2.5% | N | 1 | 0.64 | 0.43 | ±1.6% | ±1.1% | ∞ |
| Liquid Permittivity (target) | ±5.0% | R | √3 | 0.6 | 0.49 | ±1.7% | ±1.4% | ∞ |
| Liquid Permittivity (meas.) | ±2.5% | N | 1 | 0.6 | 0.49 | ±1.5% | ±1.2% | ∞ |
| Combined Std. Uncertainty | | | | | | ±10.3% | ±10.0% | 330 |
| Expanded STD Uncertainty | | | | | | ±20.6% | ±20.1% | |

Table 14. Worst-Case uncertainty budget for DASY4 assessed according to IEEE P1528.

Source: Schmid & Partner Engineering AG.

[1] The budget is valid for the frequency range 300MHz - 3 GHz and represents a worst-case analysis. For specific tests and configurations, the uncertainty could be considerably smaller.

| | | | |
|-------------------------------------------|----------------------------------------------------------------------------------------------|---------------------------------------------------|------------------------------|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry Wireless Handheld Model RBD50UW | | Page 24(26) |
| Author Data Daoud Attayi | Dates of Test Jan. 09-31, Mar. 21-23, 2006 | Test Report No RTS-0258-0601-08 rev. 02 | FCC ID: L6ARBD50UW |

11.0 TEST RESULTS

11.1 SAR Measurement results at highest power measured against the head

| Mode | f (MHz) | Cond. Output Power (dBm) | Battery #, LCD # | SAR, averaged over 1 g (W/kg) | | | SAR, averaged over 1 g (W/kg) | | |
|-------------|------------|-----------------------------------|---------------------|----------------------------------|-------|--------|----------------------------------|-------------|--------|
| | | | | Left-hand | | | Right-hand | | |
| | | | | Liquid Temp (°C) | Cheek | Tilted | Liquid Temp (°C) | Cheek | Tilted |
| GSM 850 | 824.2 | 33.20 | 1, 1 | 22.9 | 0.75 | | 23.1 | 0.81 | |
| | * 836.8 | 33.10 | 1, 1 | 22.9 | 0.94 | 0.40 | 23.0 | 0.99 | 0.53 |
| | 848.8 | 33.00 | 1, 1 | 23.1 | 1.26 | | 22.9 | 1.26 | |
| | 1850.2 | 30.40 | 1, 1 | 23.6 | 1.12 | | 23.4 | 1.44 | |
| | * 1880.0 | 30.20 | 1, 1 | 23.6 | 1.04 | 0.40 | 23.1 | 1.33 | 0.35 |
| GSM 1900 | 1909.8 | 30.40 | 1, 1 | 23.3 | 0.99 | | 23.5 | 1.30 | |
| | 1850.2 | | 2, 1 | | | | 23.4 | 1.45 | |
| | 1850.2 | | 2, 2 | | | | 22.9 | 1.18 | |
| | 1850.2 | | 3, 1 | | | | 23.1 | 1.33 | |

Table 15. SAR results for head configuration

* Supplement C: Middle channel testing is sufficient only if SAR < 3dB below limit see PN 02-1438

| | | | |
|-------------------------------------------|----------------------------------------------------------------------------------------------|---------------------------------------------------|------------------------------|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry Wireless Handheld Model RBD50UW | | Page 25(26) |
| Author Data Daoud Attayi | Dates of Test Jan. 09-31, Mar. 21-23, 2006 | Test Report No RTS-0258-0601-08 rev. 02 | FCC ID: L6ARBD50UW |

11.2 SAR measurement highest power measured against the body using accessories.

| Mode | f (MHz) | Cond. Power (dBm) | Liquid Temp (°C) | Handheld configuration / position with holster | Measured Body SAR (1 timeslot up) , averaged over 1 g (W/kg) | ** Calculated Body SAR (2 timeslots up) , averaged over 1 g (W/kg) |
|--------------|------------|-------------------------|------------------------|------------------------------------------------------------|--------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
| GPRS 850 | 824.2 | 33.20 | 23.2 | back side facing the phantom | 0.45 | 0.90 |
| | 836.8 | 33.10 | 23.1 | back side facing the phantom | 0.57 | 1.14 |
| | 848.8 | 33.00 | 23.0 | back side facing the phantom | 0.64 | 1.28 |
| | 836.8 | | 22.9 | front side facing the phantom | 0.69 | 1.38 |
| | 836.8 | | 22.7 | front side facing the phantom; BT ON; headset connected | 0.44 | 0.88 |
| | 836.8 | | 22.7 | No holster, 15 mm away from the flat phantom | 0.69 | 1.38 |
| GPRS 1900 | * 1880.0 | 30.20 | 22.7 | back side facing the phantom | 0.26 | 0.52 |
| | 1880.0 | | 22.8 | front side facing the phantom | 0.25 | 0.50 |
| | 1880.0 | | 22.7 | back side facing the phantom; BT ON; Headset connected | 0.26 | 0.52 |
| | 1880.0 | | 22.9 | No holster, 15 mm away from the flat phantom | 0.22 | 0.44 |

Table 16. SAR results for body -worn configurations

* Supplement C: Middle channel testing is sufficient only if SAR < 3dB below limit see
PN 02-1438

** Formula used to calculate SAR values for 2 timeslots uplink :

Calculated SAR for 2 timeslots up = [Measured SAR for 1 timeslot up * (10^{3.0/10})]
= [Measured SAR for 1 timeslot up * 2.0]

| | | | |
|-------------------------------------------|--------------------------------------------------------------------------------------------------|---------------------------------------------------|------------------------------|
| RTS RIM Testing Services | Document SAR Compliance Test Report for the BlackBerry Wireless Handheld Model RBD50UW | | Page 26(26) |
| Author Data Daoud Attayi | Dates of Test Jan. 09-31, Mar. 21-23, 2006 | Test Report No RTS-0258-0601-08 rev. 02 | FCC ID: L6ARBD50UW |

12.0 REFERENCES

- [1] IEEE 1528-2003: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.
- [2] EN 50360: 2001, Product standard to demonstrate the compliance of mobile phones with the basic restrictions related to human exposure to electromagnetic fields (300 MHz – 3 GHz)
- [3] EN 50361: 2001, Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz – 3 GHz)
- [4] ICNIRP, International Commission on Non-Ionizing Radiation Protection (1998), Guidelines for limiting exposure in time-varying electric, magnetic, and electromagnetic fields (up to 300 GHz).
- [5] Council Recommendation 1999/519/EC of July 1999 on the limitation of exposure of the general public to electromagnetic fields (0 Hz to 300 GHz)
- [6] IEEE C95.3-1991, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields – RF and Microwave.
- [7] IEEE C95.1-1999, IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.
- [8] FCC OET Bulletin 65 (Edition 97-01) Supplement C (Edition 01-01), Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields.
- [9] FCC 96-326, Guidelines for Evaluating the Environmental Effects of Radio-Frequency Radiation.
- [10] DASY 4 DOSIMETRIC ASSESSMENT SYSTEM SOFTWARE MANUAL V4.6 Schmid & Partner Engineering AG, 2005.
- [11] Health Canada, Safety Code 6, 1999: Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency range from 3 kHz to 300 GHz.
- [12] RSS-102, Issue 2, November 2005: Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands).