

FCC and ISED Test Report

Apple Inc
Model: A2941

In accordance with FCC 47 CFR Part 15C, ISED
RSS-247 and ISED RSS-GEN
(2.4 GHz WLAN)

Prepared for: Apple Inc
One Apple Park Way
Cupertino
California
95014
USA



Add value.
Inspire trust.

FCC ID: BCGA2941

IC: 579C-A2941

COMMERCIAL-IN-CONFIDENCE

Document 75957632-11 Issue 01

SIGNATURE

NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Steve Marshall	Senior Engineer	Authorised Signatory	27 March 2023

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD document control rules.

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15C, ISED RSS-247 and ISED RSS-GEN. The sample tested was found to comply with the requirements defined in the applied rules.

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Report Generation	Hollie Marshall	27 March 2023	

FCC Accreditation

90987 Octagon House, Fareham Test Laboratory

ISED Accreditation

12669A Octagon House, Fareham Test Laboratory

EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with FCC 47 CFR Part 15C: 2021, ISED RSS-247: Issue 2 (02-2017) and ISED RSS-GEN: Issue 5 (04-2018) + A2 (02-2021) for the tests detailed in section 1.3.



DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD. No part of this document may be reproduced without the prior written approval of TÜV SÜD. © 2023 TÜV SÜD. This report relates only to the actual item/items tested.

ACCREDITATION

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation. Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited).

TÜV SÜD
is a trading name of TÜV SÜD Ltd
Registered in Scotland at East Kilbride,
Glasgow G75 0QF, United Kingdom
Registered number: SC215164

TÜV SÜD Ltd is a
TÜV SÜD Group Company

Phone: +44 (0) 1489 558100
Fax: +44 (0) 1489 558101
www.tuvsud.com/en

TÜV SÜD
Octagon House
Concorde Way
Fareham
Hampshire PO15 5RL
United Kingdom



Contents

1	Report Summary	2
1.1	Report Modification Record.....	2
1.2	Introduction.....	2
1.3	Brief Summary of Results	3
1.4	Product Information	4
1.5	Deviations from the Standard.....	5
1.6	EUT Modification Record	5
1.7	Test Location	5
2	Test Details	6
2.1	Restricted Band Edges.....	6
2.2	Emission Bandwidth	37
2.3	Maximum Conducted Output Power	51
2.4	Authorised Band Edges	65
2.5	Spurious Radiated Emissions	76
2.6	Power Spectral Density.....	104
3	Measurement Uncertainty	113



1 Report Summary

1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
1	First Issue	27-March-2023

Table 1

1.2 Introduction

Applicant	Apple Inc
Manufacturer	Apple Inc
Model Number(s)	A2941
Serial Number(s)	F91VYD72Q5 and GF6K93M959
Hardware Version(s)	REV1.0
Software Version(s)	22E11180t and 22E11181e
Number of Samples Tested	2
Test Specification/Issue/Date	FCC 47 CFR Part 15C: 2021 ISED RSS-247: Issue 2 (02-2017) ISED RSS-GEN: Issue 5 (04-2018) + A2 (02-2021)
Start of Test	11-January-2023
Finish of Test	07-March-2023
Name of Engineer(s)	Elliot Callender, James Woods, Mohammad Malik, Taha Shafique, Daniel Cameron and Thomas Biddlecombe
Related Document(s)	ANSI C63.10 (2020) ANSI C63.10 (2013) KDB 662911 D01 v02r01 ANSI C63.4 (2014)



1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15C, ISSED RSS-247 and ISSED RSS-GEN is shown below.

Section	Specification Clause			Test Description	Result	Comments/Base Standard
	Part 15C	RSS-247	RSS-GEN			
Configuration and Mode: 2.4 GHz WLAN						
-	15.203	-	-	Antenna Requirement	N/T	The device complies with the provisions of this section, as it uses permanently attached integral antennas.
2.1	15.205	3.3	8.10	Restricted Band Edges	Pass	
2.2	15.247 (a)(2)	5.2	6.7	Emission Bandwidth	Pass	
2.3	15.247 (b)	5.4	6.12	Maximum Conducted Output Power	Pass	
2.4	15.247 (d)	5.5	-	Authorised Band Edges	Pass	
2.5	15.209 and 15.247 (d)	3.3 and 5.5	6.13 and 8.9	Spurious Radiated Emissions	Pass	
2.6	15.247 (e)	5.2	6.12	Power Spectral Density	Pass	

Table 2



1.4 Product Information

1.4.1 Technical Description

The equipment under test (EUT) was an Apple laptop computer with Bluetooth®, Bluetooth® Low Energy and IEEE 802.11 a/b/g/n/ac/ax Wi-Fi capabilities in the 2.4 GHz and 5 GHz bands.

1.4.2 Test Modes

The EUT's 2.4 GHz 802.11 radio supports Single Input/Single Output (SISO) and 2x2 Multiple Input/Multiple Output (MIMO). It supports 802.11b and g for SISO and 802.11n and ax at 20 MHz channel bandwidths for SISO and MIMO. 802.11ax supports RU 26/52/106/242.

The EUT uses different output powers per core dependent on how many cores are used. It uses the same conducted power across all cores in any given mode, but due to the different antenna gains the radiated powers per core differs.

After preliminary investigations were performed, the EUT was therefore tested in the following worst-case modes:

SISO Modes (Core 0):

- 802.11b 1 Mbps
- 802.11g 12 Mbps
- 802.11n HT20 MCS2
- 802.11ax HE20 MCS2x1 SU, RU26/52/106*

2x2 MIMO Modes (Core 0 + Core 1):

- 802.11n HT20 MCS2 – CDD
- 802.11ax HE20 MCS2x1 CDD SU, RU26/52/106*

*Note: The RU offset for bottom and middle channels were placed in the lowest position and on the top channel, the offset was placed in the upper most position.

1.4.3 Test Set-up

For conducted tests the EUT antennas were disconnected and replaced with U.FL to SMA test cables to enable conducted testing on each core. The loss of these test cables were known and compensated for in any conducted measurements.

For all tests, the EUT was put into a continuous transmit test mode with the chipset manufacturer's test commands. The EUT then transmitted the required type of packeted 802.11 data frames of fixed length, containing the standard headers and with pseudo-random data content, ensuring the measured signals were representative and contained all the symbols at the highest power control level.

All testing was performed with the EUT powered via a 120 V AC, 60 Hz source.

1.4.4 Antenna Gain Table

Antenna Port	Frequency Range (MHz)	Peak Gain (dBi)	Conducted Cable Loss (dB)
Core 0	2400 to 2480	4.85	0.8
Core 1	2400 to 2480	4.50	0.8

Table 3



1.5 Deviations from the Standard

No deviations from the applicable test standard were made during testing.

1.6 EUT Modification Record

The table below details modifications made to the EUT during the test programme.

The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
Model: A2941, Serial Number: GF6K93M959			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A2941, Serial Number: F91VYD72Q5			
0	As supplied by the customer	Not Applicable	Not Applicable

Table 4

1.7 Test Location

TÜV SÜD conducted the following tests at our Concorde Park Test Laboratory.

Test Name	Name of Engineer(s)	Accreditation
Configuration and Mode: 2.4 GHz WLAN		
Restricted Band Edges	Mohammed Malik, Elliot Callender, James Woods and Taha Shafique	UKAS
Emission Bandwidth	Daniel Cameron	UKAS
Maximum Conducted Output Power	Daniel Cameron	UKAS
Authorised Band Edges	Mohammed Malik, Elliot Callender, James Woods and Taha Shafique	UKAS
Spurious Radiated Emissions	Elliot Callender, Mohammad Malik, Taha Shafique and James Woods	UKAS
Power Spectral Density	Thomas Biddlecombe	UKAS

Table 5

Office Address:

TÜV SÜD
Concorde Park
Concorde Way
Fareham
Hampshire
PO15 5FG
United Kingdom



2 Test Details

2.1 Restricted Band Edges

2.1.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.205
ISED RSS-247, Clause 3.3
ISED RSS-GEN, Clause 8.10

2.1.2 Equipment Under Test and Modification State

A2941, S/N: F91VYD72Q5 - Modification State 0

2.1.3 Date of Test

11-January-2023 to 18-January-2023

2.1.4 Test Method

This test was performed in accordance with ANSI C63.10, clause 6.10.5 and 11.12.1.

Plots for average measurements were taken in accordance with ANSI C63.10, clause 11.12.2.5.2.

The following conversion can be applied to convert from dB μ V/m to μ V/m:
 $10^{(\text{Field Strength in dB}\mu\text{V/m}/20)}$.

2.1.5 Environmental Conditions

Ambient Temperature	21.0 - 24.4 °C
Relative Humidity	43.0 - 51.0 %




2.1.6 Test Results

2.4 GHz WLAN


20 MHz Bandwidth - Core 0 (SISO)

Mode	Data Rate/ MCS	Resource Size	Resource Index	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBuV/m)
802.11b	1 Mbps	-	-	2412	2390	56.87	51.19
802.11g	24 Mbps	-	-	2412	2390	63.80	51.46
802.11n, HT20	MCS2	-	-	2412	2390	64.94	51.39
802.11ax, HE20	MCS9x1	SU	-	2412	2390	67.05	51.40
802.11ax, HE20	MCS9x1	106	54	2412	2390	69.50	49.14
802.11b	1 Mbps	-	-	2462	2483.5	59.13	49.96
802.11b	1 Mbps	-	-	2467	2483.5	61.01	51.21
802.11b	1 Mbps	-	-	2472	2483.5	60.84	51.50
802.11g	12 Mbps	-	-	2462	2483.5	63.40	51.45
802.11g	24 Mbps	-	-	2467	2483.5	64.57	51.38
802.11g	12 Mbps	-	-	2472	2483.5	62.65	51.41
802.11n, HT20	MCS2	-	-	2462	2483.5	64.86	51.45
802.11n, HT20	MCS2	-	-	2467	2483.5	62.96	51.28
802.11n, HT20	MCS7	-	-	2472	2483.5	66.28	51.17
802.11ax, HE20	MCS2x1	SU	-	2462	2483.5	63.52	51.37
802.11ax, HE20	MCS9x1	106	53	2462	2483.5	69.28	50.28
802.11ax, HE20	MCS9x1	SU	-	2467	2483.5	64.60	51.50
802.11ax, HE20	MCS9x1	106	53	2467	2483.5	69.49	47.78
802.11ax, HE20	MCS4x1	SU	-	2472	2483.5	66.75	51.36
802.11ax, HE20	MCS9x1	52	37	2472	2483.5	69.44	48.88


Table 6 - SISO Restricted Band Edge Results

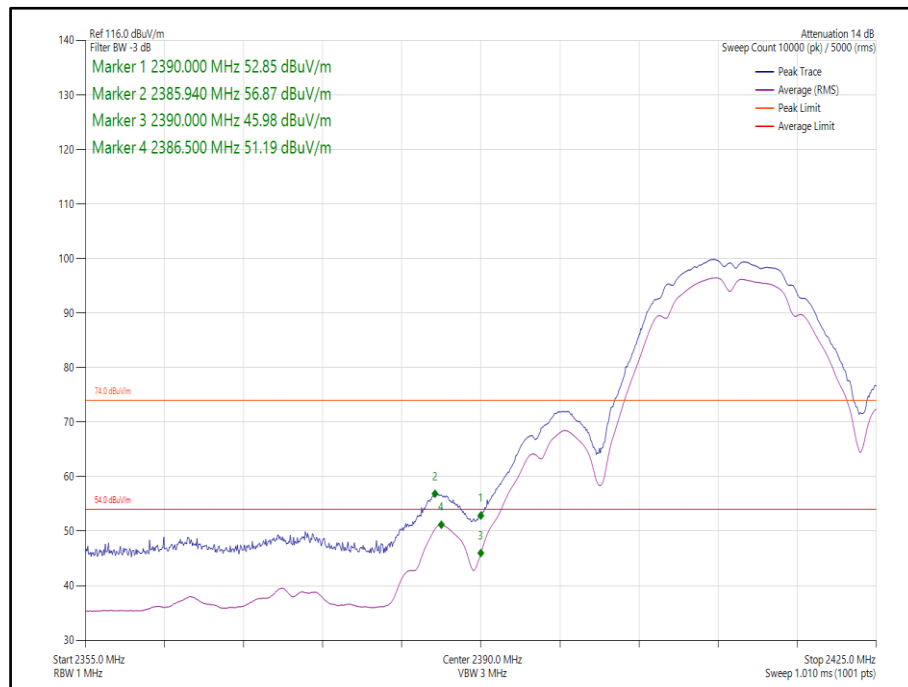


**Figure 1 - 802.11b, SISO, Core 0 - 2412 MHz,
Band Edge Frequency 2390 MHz**

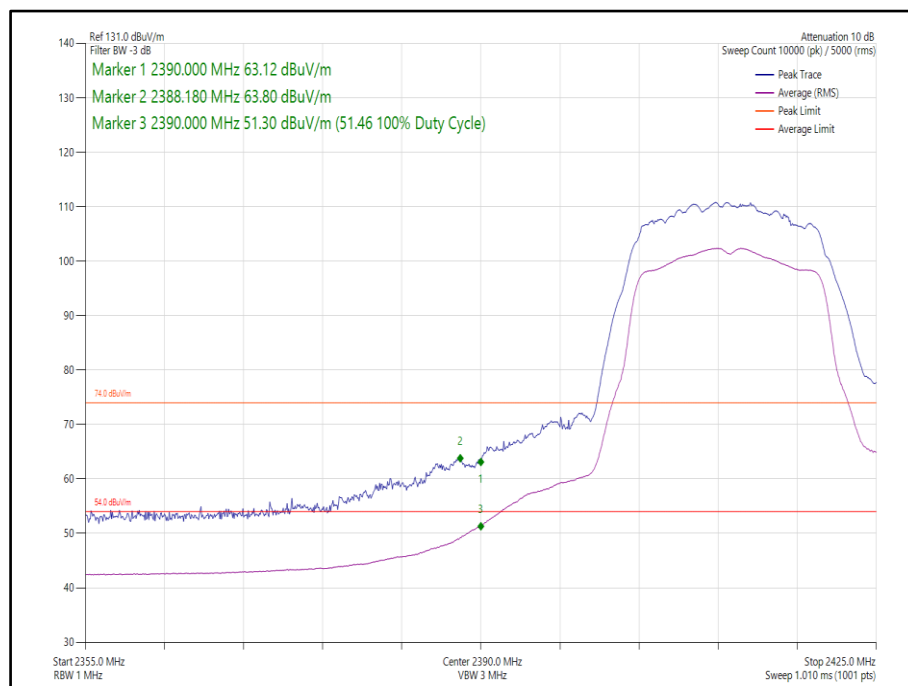


**Figure 2 - 802.11g, SISO, Core 0 - 2412 MHz,
Band Edge Frequency 2390 MHz**

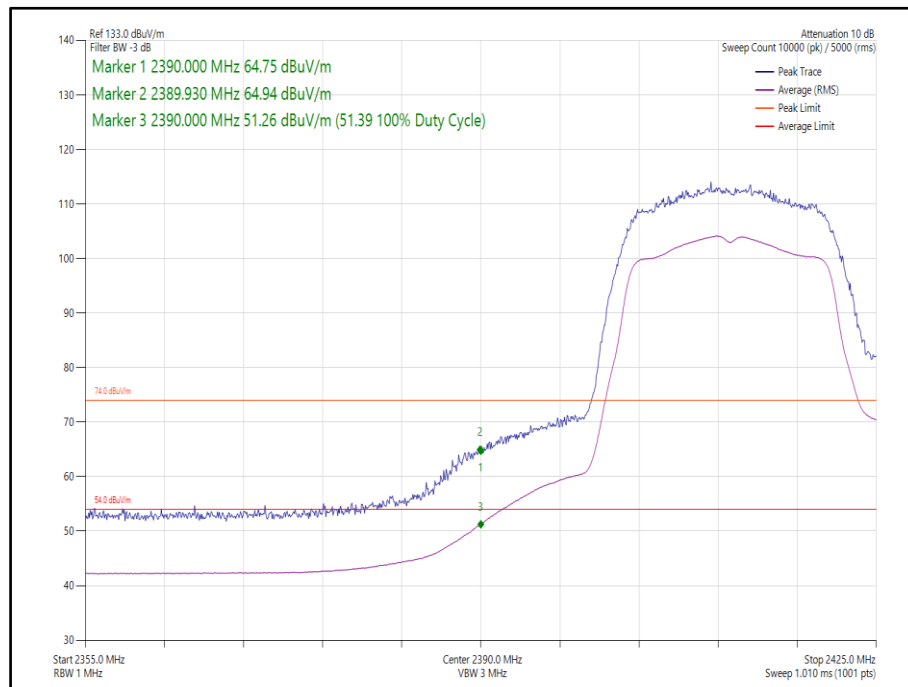


**Figure 3 - 802.11n, HT20, SISO, Core 0 - 2412 MHz,
Band Edge Frequency 2390 MHz**

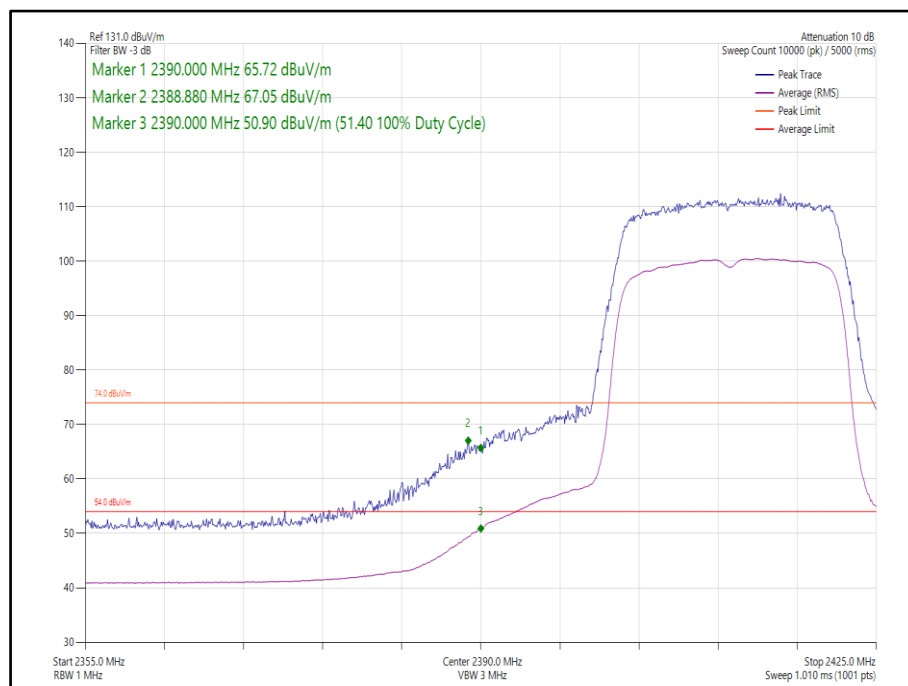


**Figure 4 - 802.11ax, HE20, SU, SISO, Core 0 - 2412 MHz,
Band Edge Frequency 2390 MHz**

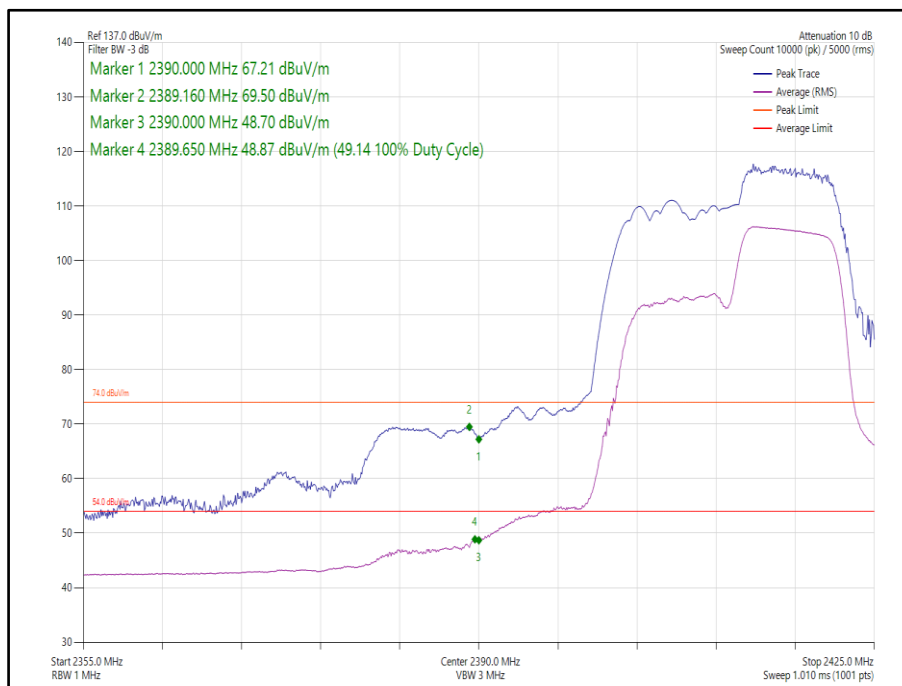


**Figure 5 - 802.11ax, HE20, RU 106-54, SISO, Core 0 - 2412 MHz,
Band Edge Frequency 2390 MHz**

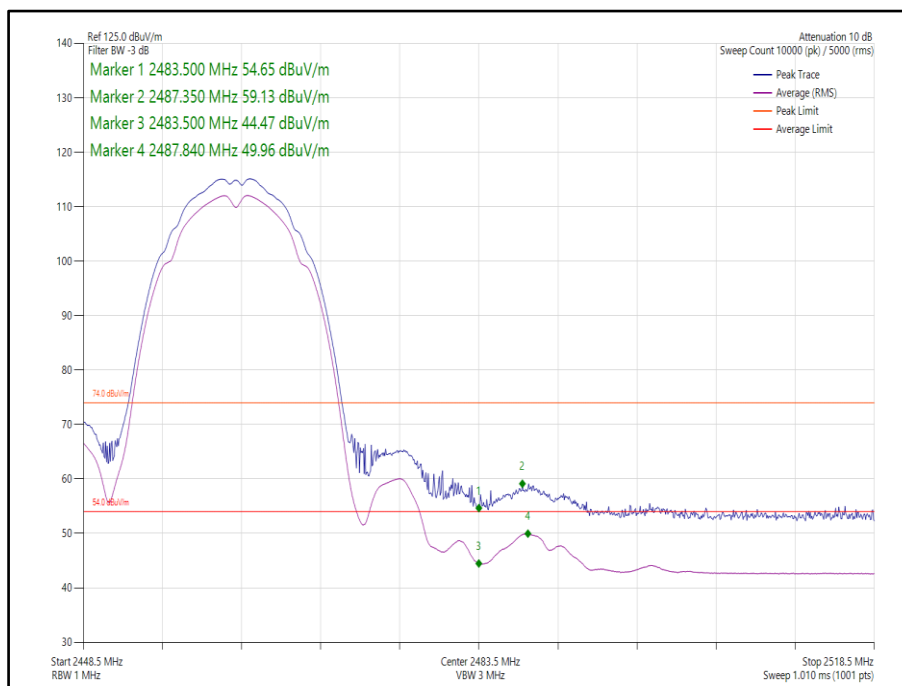

**Figure 6 - 802.11b, SISO, Core 0 - 2462 MHz,
Band Edge Frequency 2483.5 MHz**

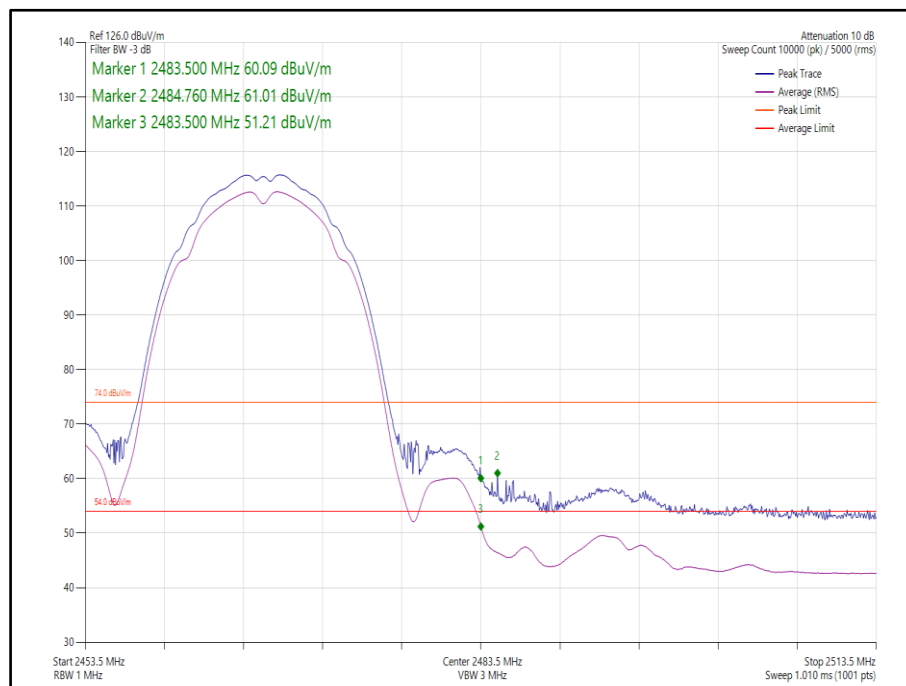

**Figure 7 - 802.11b, SISO, Core 0 - 2467 MHz,
Band Edge Frequency 2483.5 MHz**

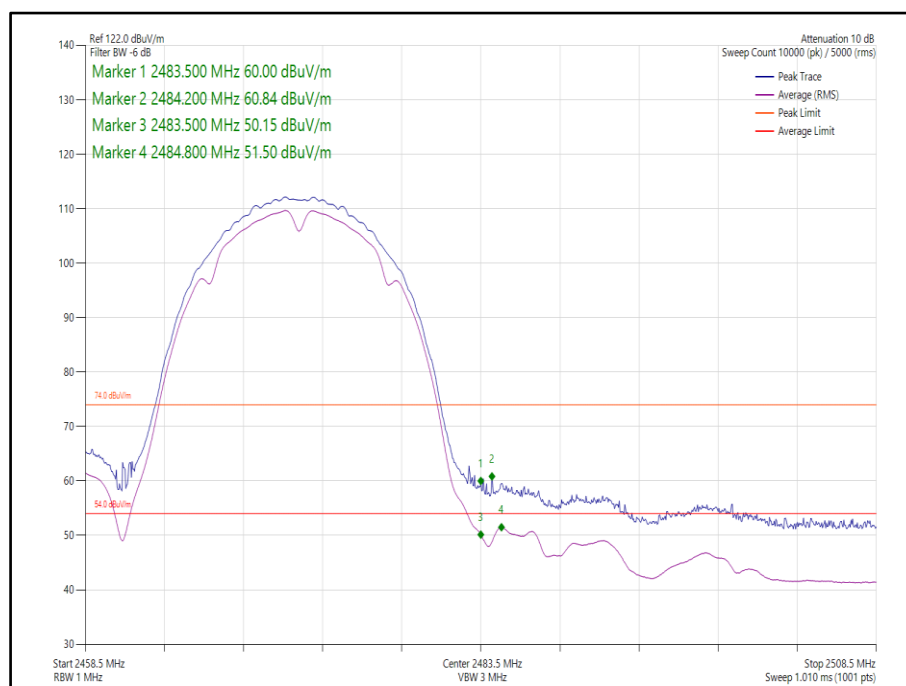

**Figure 8 - 802.11b, SISO, Core 0 - 2472 MHz,
Band Edge Frequency 2483.5 MHz**

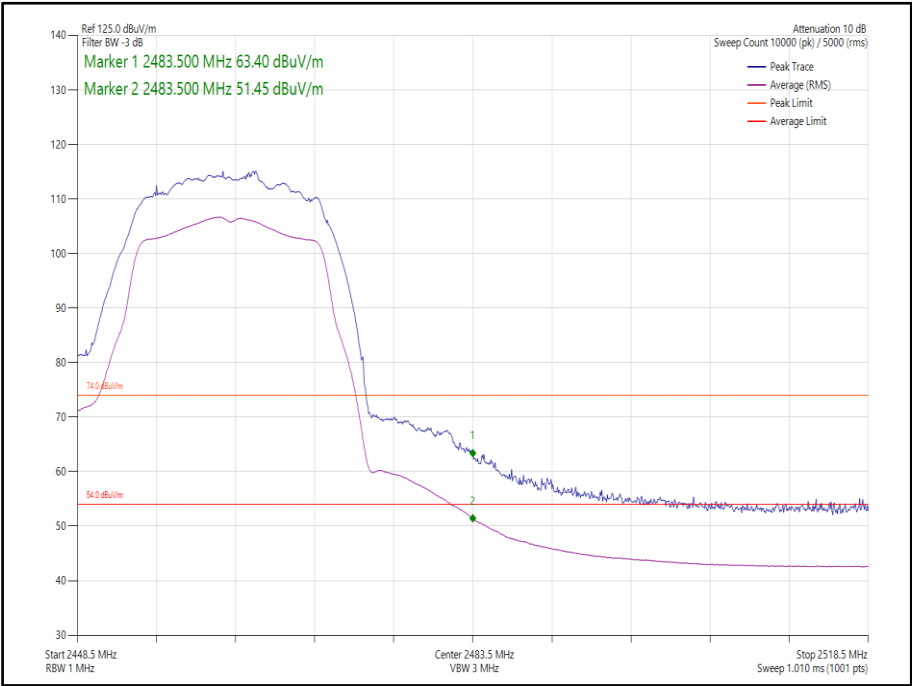


Figure 9 - 802.11g, SISO, Core 0 - 2462 MHz,
Band Edge Frequency 2483.5 MHz



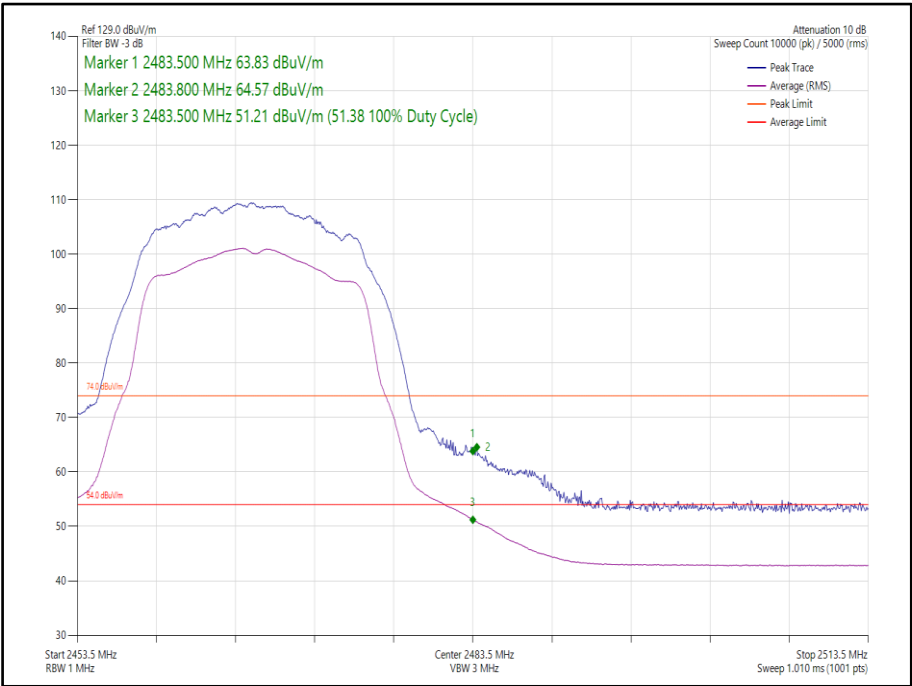



Figure 10 - 802.11g, SISO, Core 0 - 2467 MHz,
Band Edge Frequency 2483.5 MHz

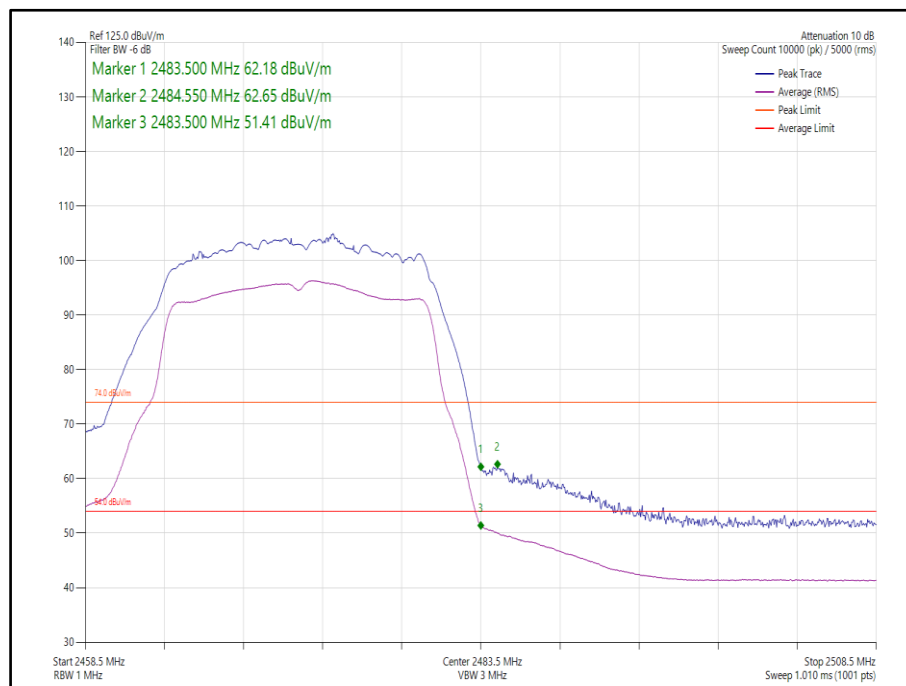


**Figure 11 - 802.11g, SISO, Core 0 - 2472 MHz,
Band Edge Frequency 2483.5 MHz**

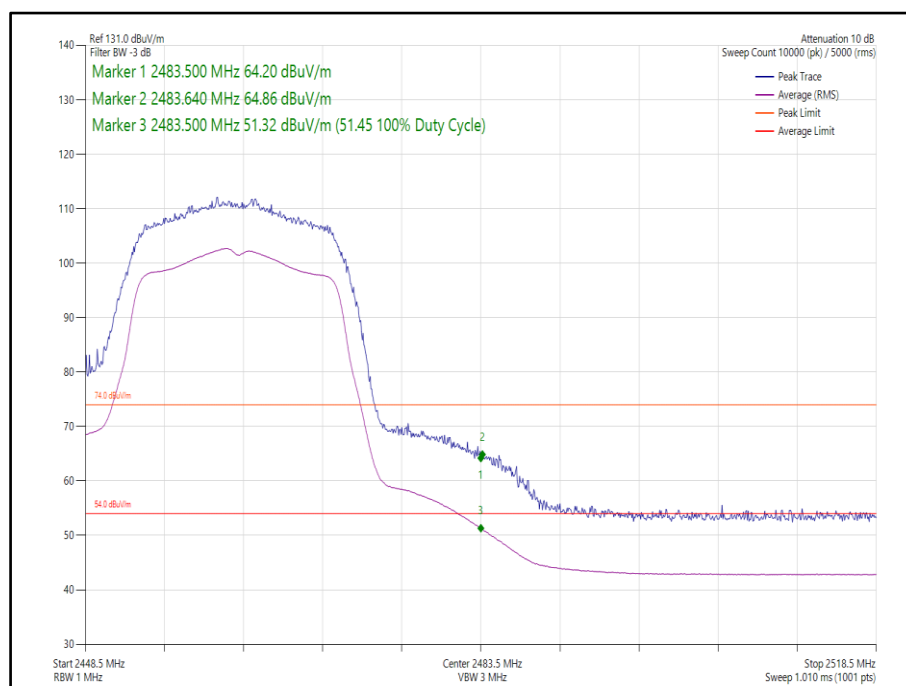


**Figure 12 - 802.11n, HT20, SISO, Core 0 - 2462 MHz,
Band Edge Frequency 2483.5 MHz**

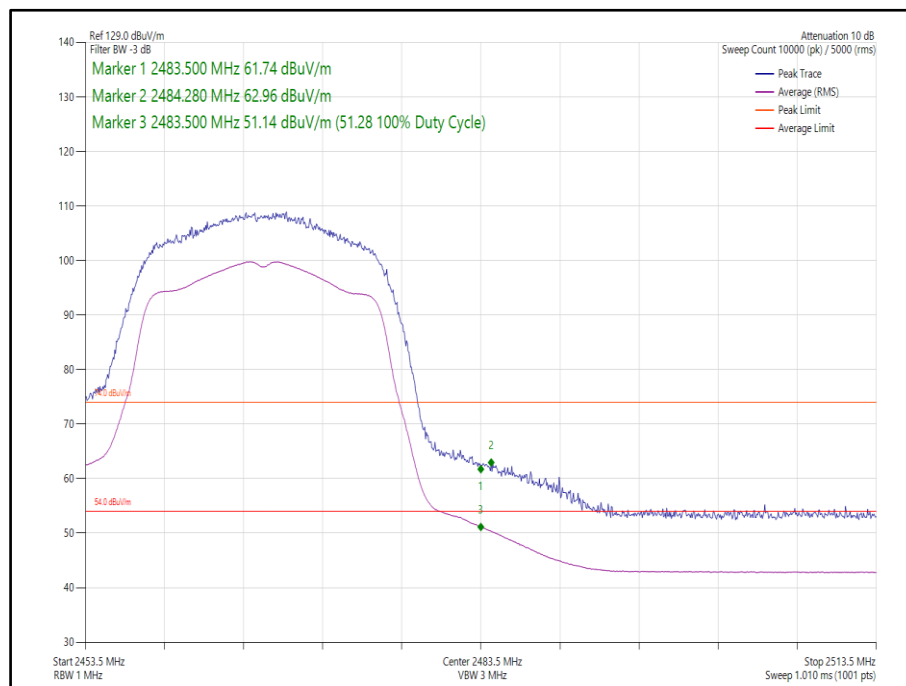


**Figure 13 - 802.11n, HT20, SISO, Core 0 - 2467 MHz,
Band Edge Frequency 2483.5 MHz**

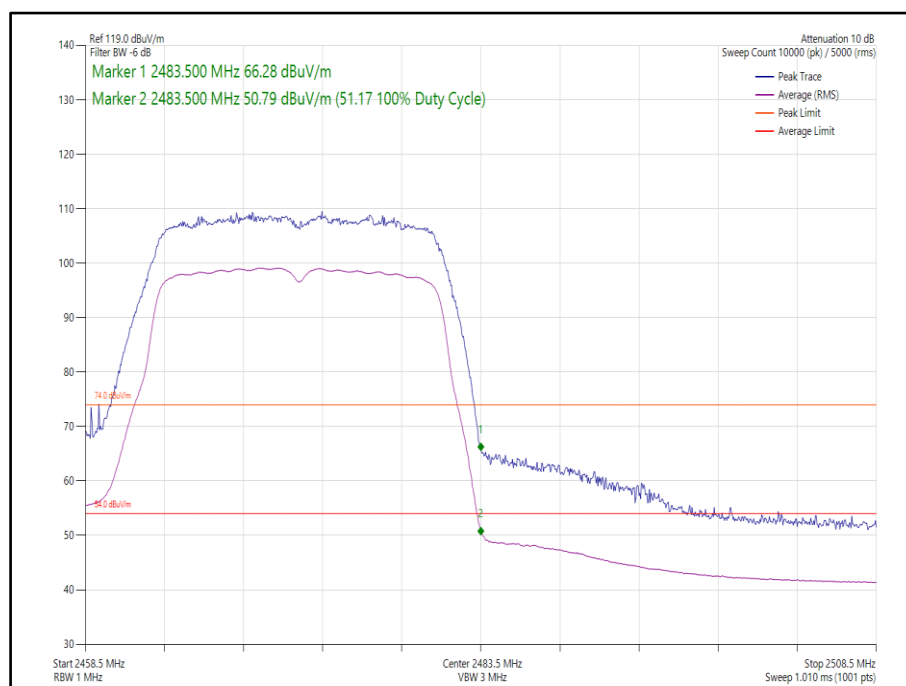


**Figure 14 - 802.11n, HT20, SISO, Core 0 - 2472 MHz,
Band Edge Frequency 2483.5 MHz**

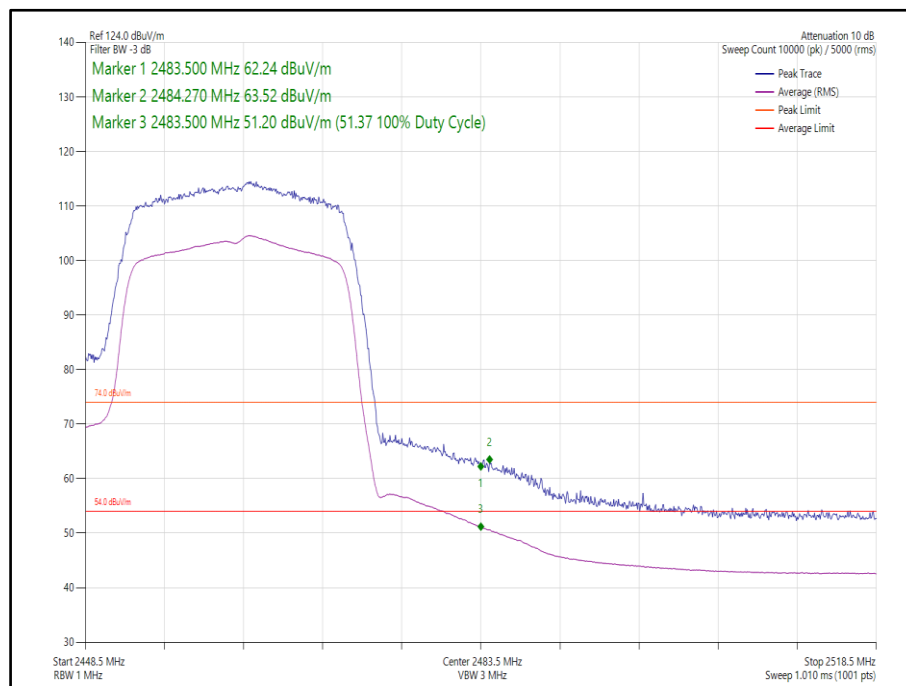


**Figure 15 - 802.11ax, HE20, SU, SISO, Core 0 - 2462 MHz,
Band Edge Frequency 2483.5 MHz**

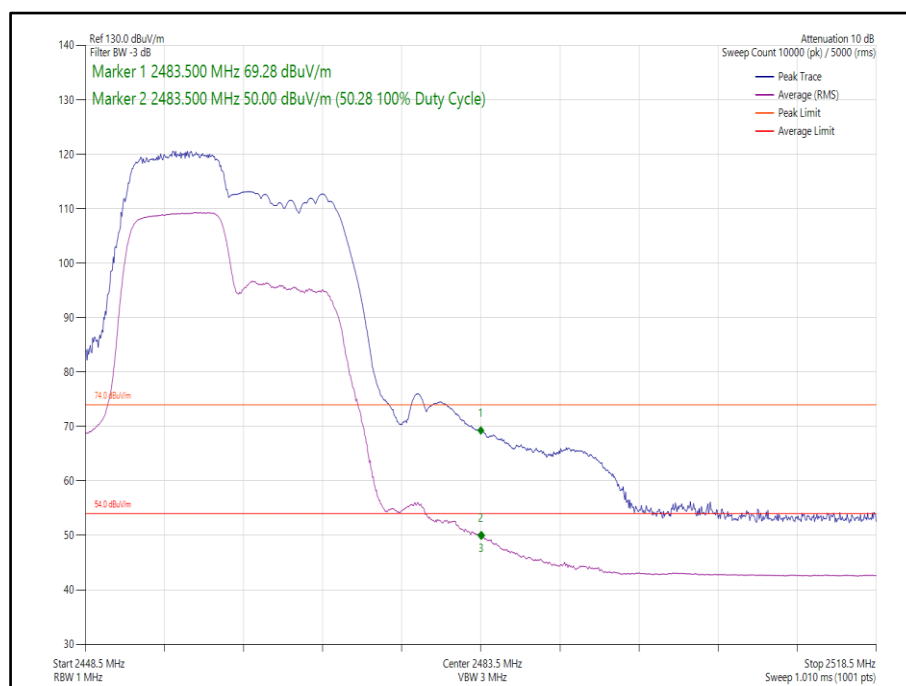


**Figure 16 - 802.11ax, HE20, RU 106-53, SISO, Core 0 - 2462 MHz,
Band Edge Frequency 2483.5 MHz**

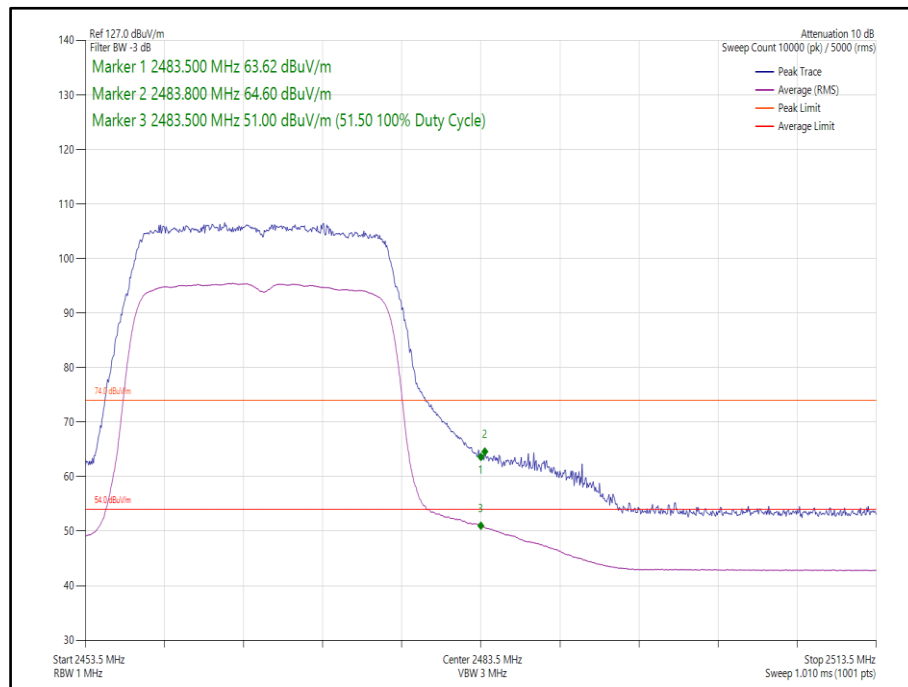


**Figure 17 - 802.11ax, HE20, SU, SISO, Core 0 - 2467 MHz,
Band Edge Frequency 2483.5 MHz**

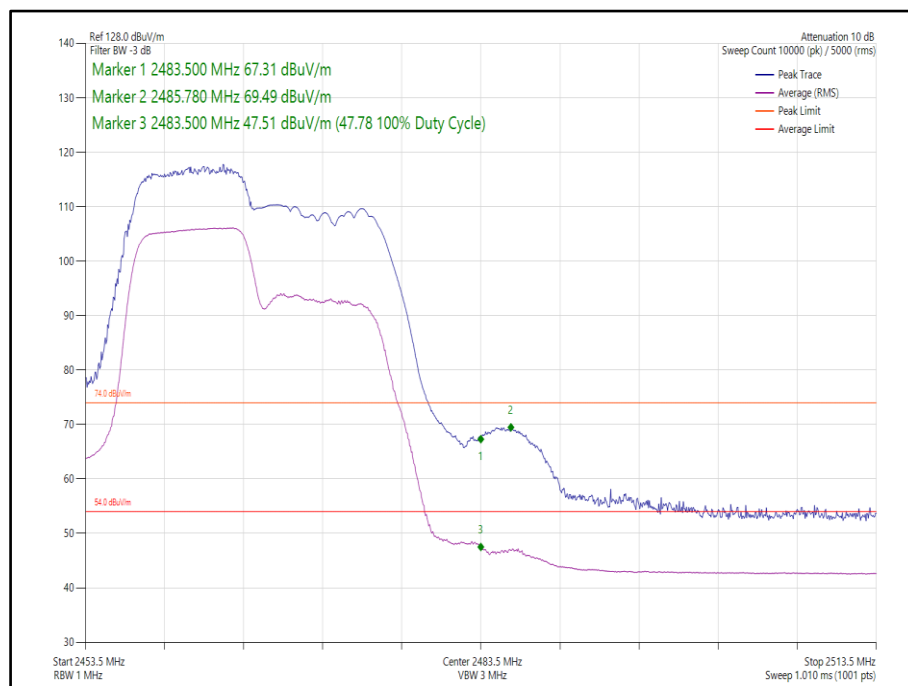

**Figure 18 - 802.11ax, HE20, RU 106-53, SISO, Core 0 - 2467 MHz,
Band Edge Frequency 2483.5 MHz**

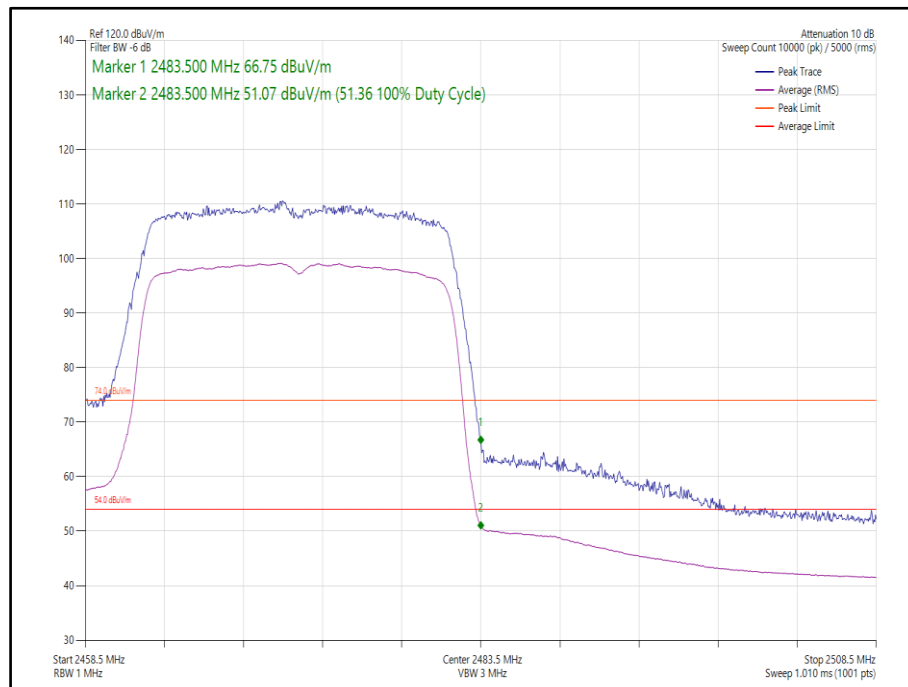

**Figure 19 - 802.11ax, HE20, SU, SISO, Core 0 - 2472 MHz,
Band Edge Frequency 2483.5 MHz**

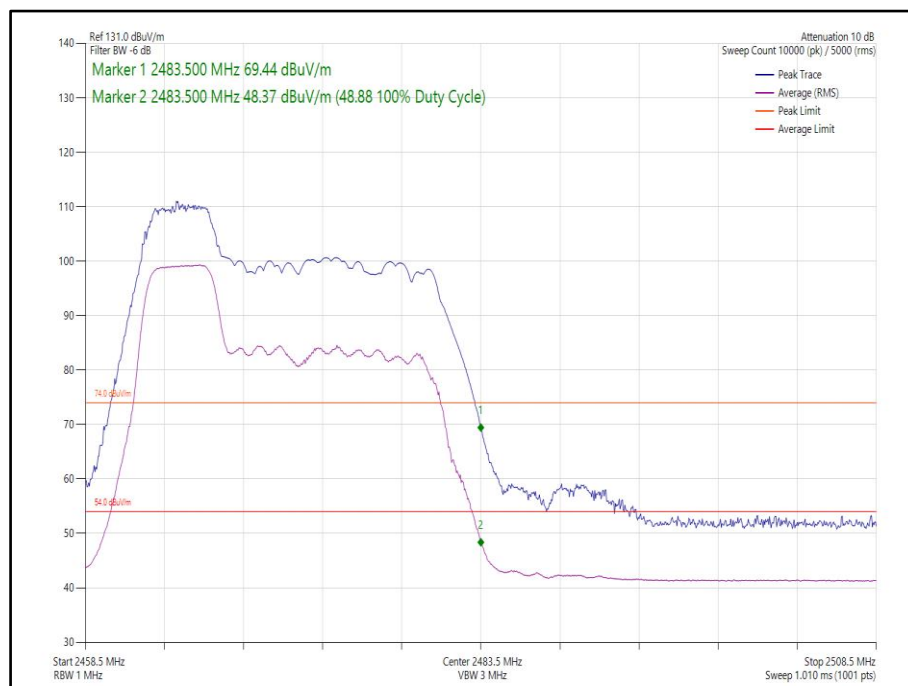


**Figure 20 - 802.11ax, HE20, RU 52-37, SISO, Core 0 - 2472 MHz,
Band Edge Frequency 2483.5 MHz**




20 MHz Bandwidth - Core 1 (SISO)

Mode	Data Rate/ MCS	Resource Size	Resource Index	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBuV/m)
802.11b	1 Mbps	-	-	2412	2390	59.02	50.44
802.11g	24 Mbps	-	-	2412	2390	62.89	51.34
802.11n, HT20	MCS7	-	-	2412	2390	67.26	51.41
802.11ax, HE20	MCS9x1	SU	-	2412	2390	69.28	50.30
802.11ax, HE20	MCS9x1	106	54	2412	2390	69.01	48.81
802.11b	1 Mbps	-	-	2462	2483.5	57.99	49.14
802.11b	1 Mbps	-	-	2467	2483.5	59.74	51.06
802.11b	1 Mbps	-	-	2472	2483.5	58.27	51.25
802.11g	54 Mbps	-	-	2462	2483.5	67.16	51.31
802.11g	54 Mbps	-	-	2467	2483.5	65.08	51.46
802.11g	12 Mbps	-	-	2472	2483.5	62.70	51.49
802.11n, HT20	MCS2	-	-	2462	2483.5	64.64	51.35
802.11n, HT20	MCS4	-	-	2467	2483.5	64.48	51.45
802.11n, HT20	MCS2	-	-	2472	2483.5	64.94	51.49
802.11ax, HE20	MCS4x1	SU	-	2462	2483.5	64.92	51.28
802.11ax, HE20	MCS9x1	106	53	2462	2483.5	68.70	47.68
802.11ax, HE20	MCS4x1	SU	-	2467	2483.5	64.18	51.42
802.11ax, HE20	MCS9x1	106	54	2467	2483.5	69.29	50.19
802.11ax, HE20	MCS2x1	SU	-	2472	2483.5	64.98	51.46
802.11ax, HE20	MCS9x1	26	8	2472	2483.5	69.38	48.59


Table 7 - SISO Restricted Band Edge Results

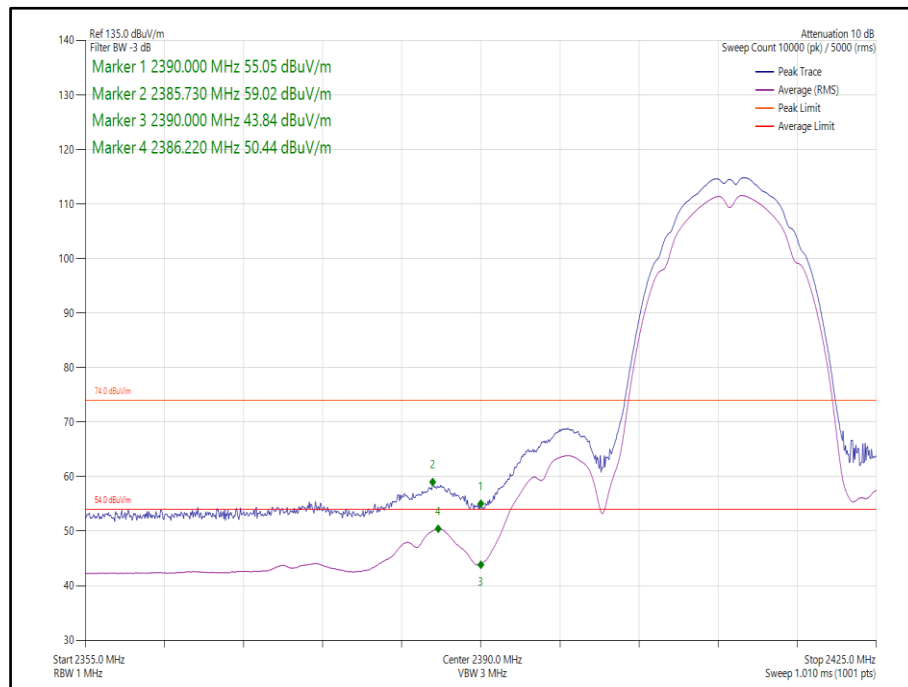


**Figure 21 - 802.11b, SISO, Core 1 - 2412 MHz,
Band Edge Frequency 2390 MHz**

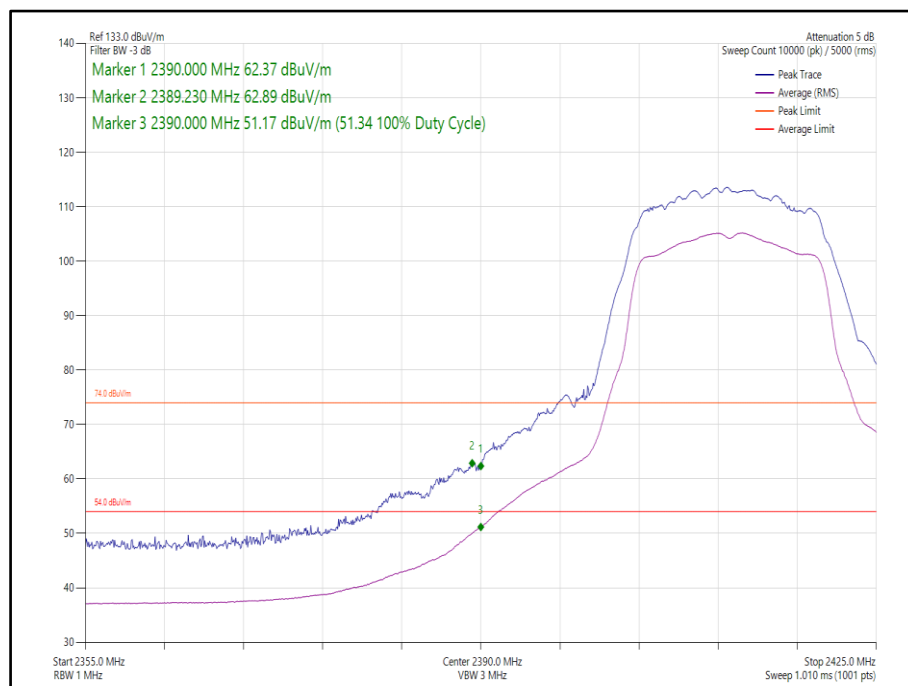


**Figure 22 - 802.11g, SISO, Core 1 - 2412 MHz,
Band Edge Frequency 2390 MHz**

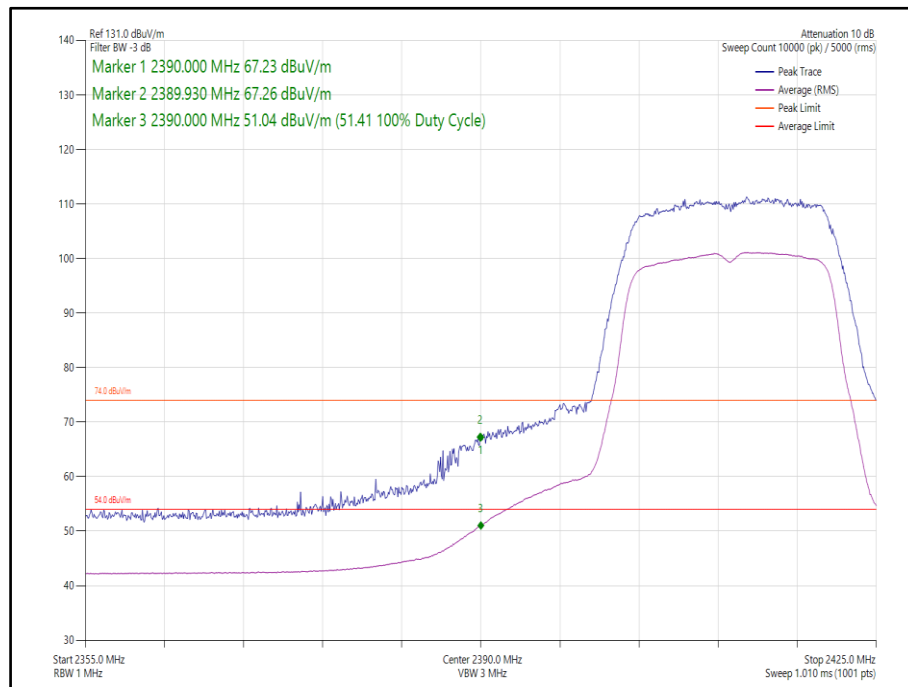


**Figure 23 - 802.11n, HT20, SISO, Core 1 - 2412 MHz,
Band Edge Frequency 2390 MHz**

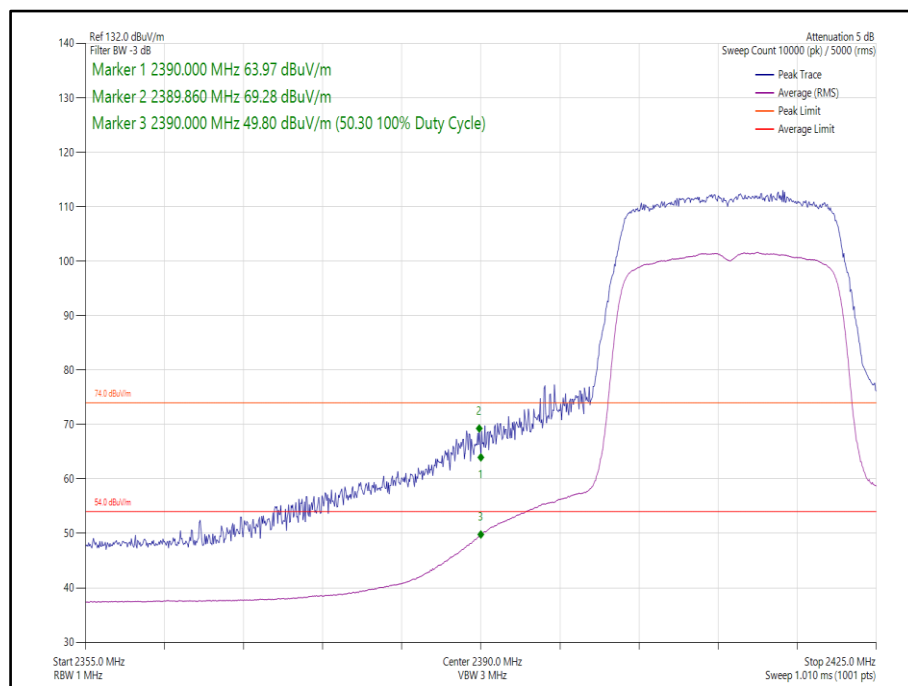


**Figure 24 - 802.11ax, HE20, SU, SISO, Core 1 - 2412 MHz,
Band Edge Frequency 2390 MHz**

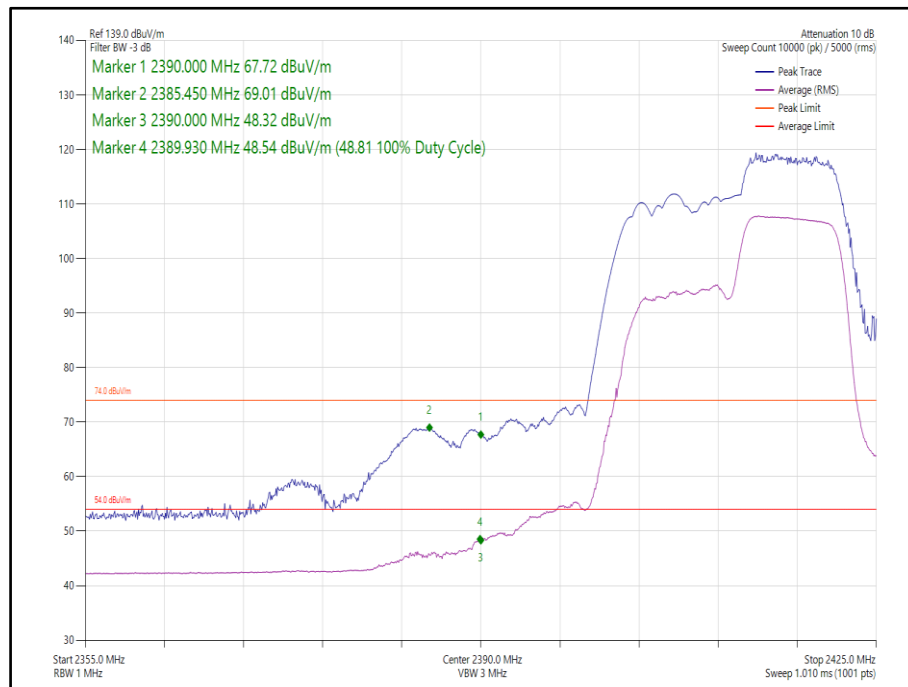


**Figure 25 - 802.11ax, HE20, RU 106-54, SISO, Core 1 - 2412 MHz,
Band Edge Frequency 2390 MHz**

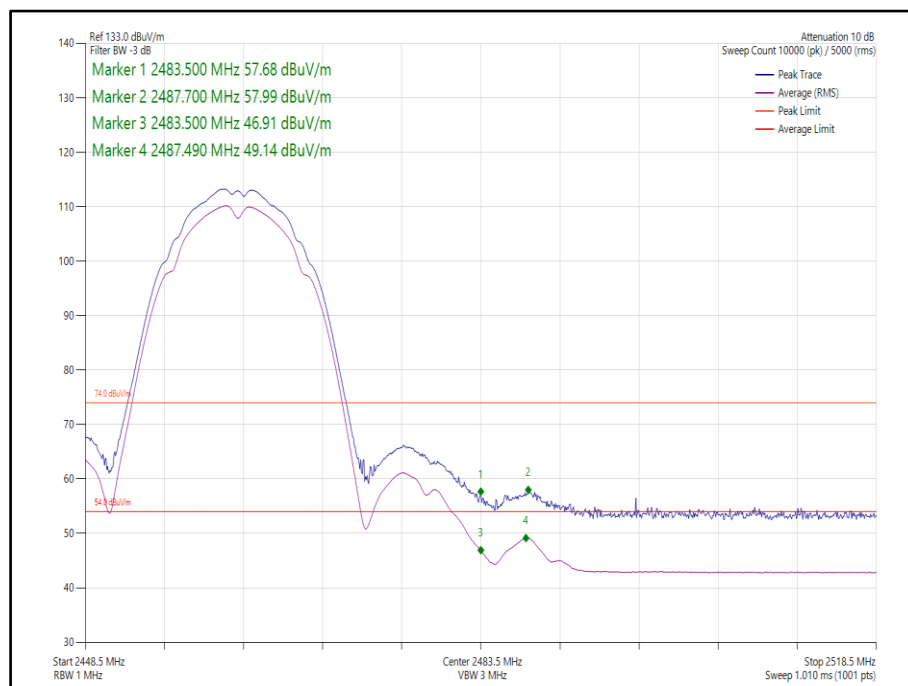


**Figure 26 - 802.11b, SISO, Core 1 - 2462 MHz,
Band Edge Frequency 2483.5 MHz**

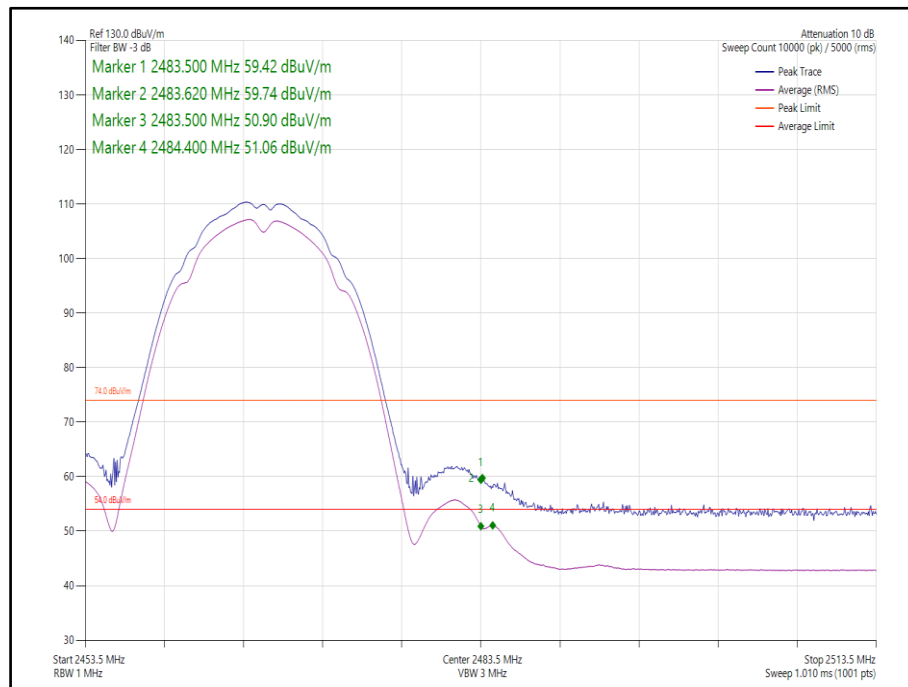


**Figure 27 - 802.11b, SISO, Core 1 - 2467 MHz,
Band Edge Frequency 2483.5 MHz**

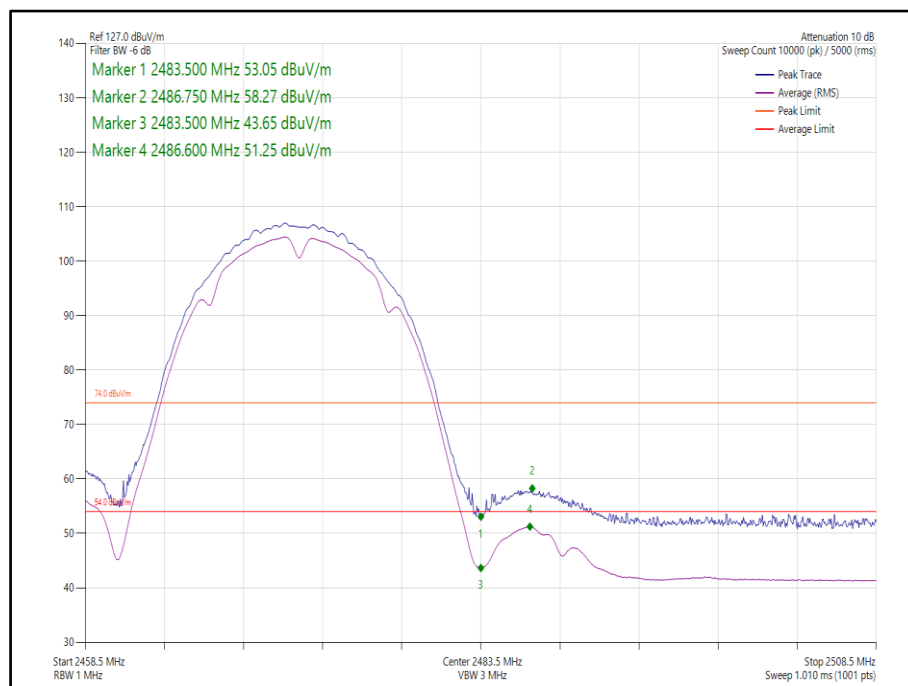

**Figure 28 - 802.11b, SISO, Core 1 - 2472 MHz,
Band Edge Frequency 2483.5 MHz**

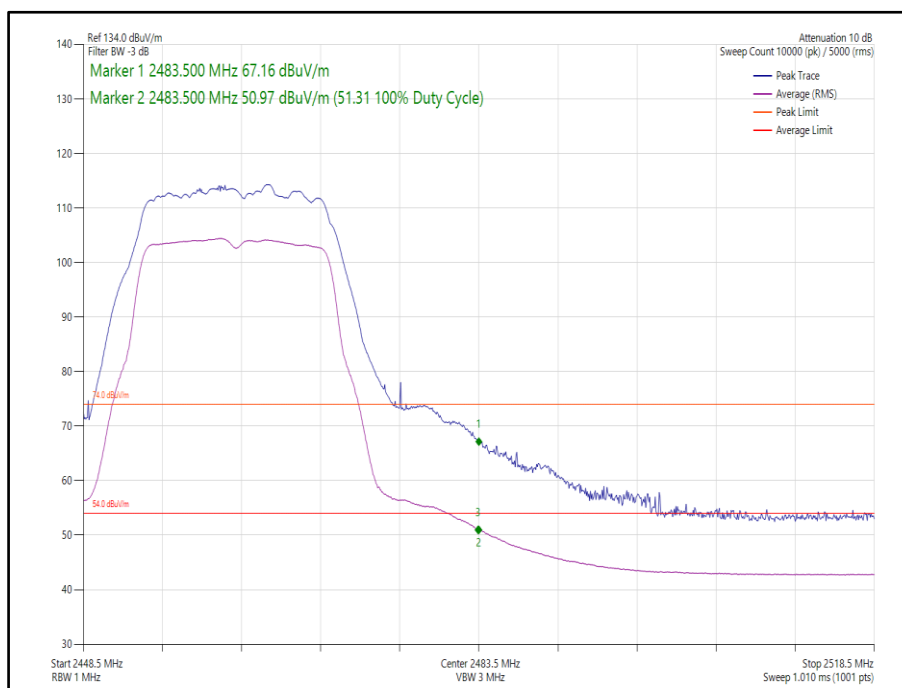

**Figure 29 - 802.11g, SISO, Core 1 - 2462 MHz,
Band Edge Frequency 2483.5 MHz**

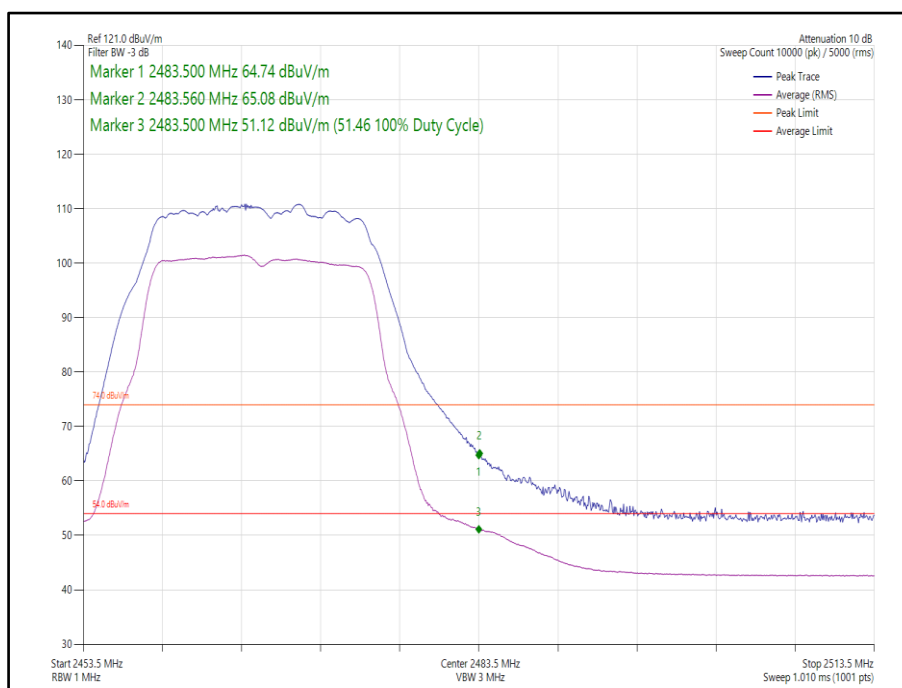

**Figure 30 - 802.11g, SISO, Core 1 - 2467 MHz,
Band Edge Frequency 2483.5 MHz**

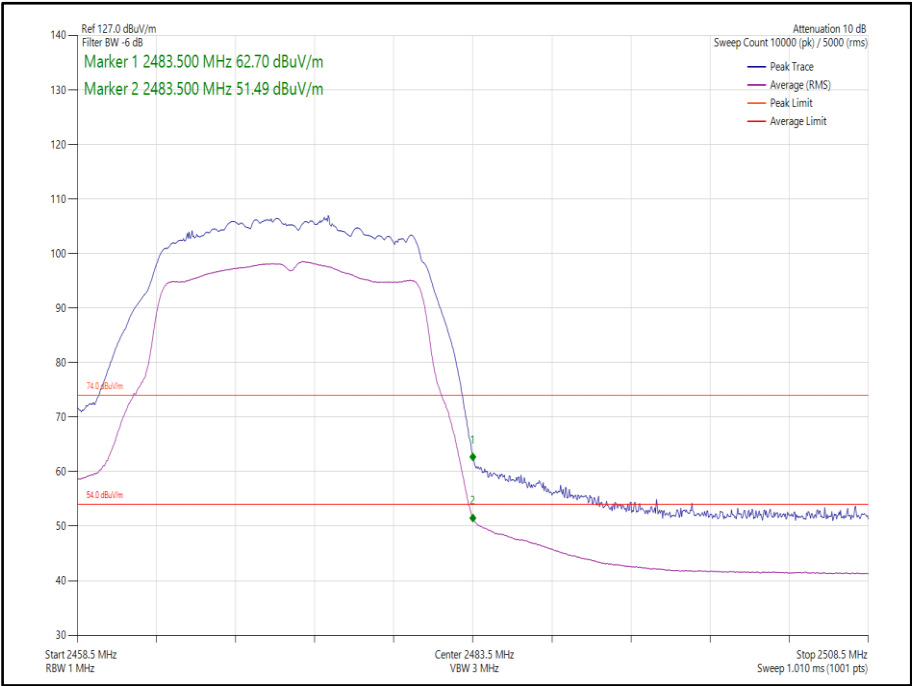


Figure 31 - 802.11g, SISO, Core 1 - 2472 MHz,
Band Edge Frequency 2483.5 MHz



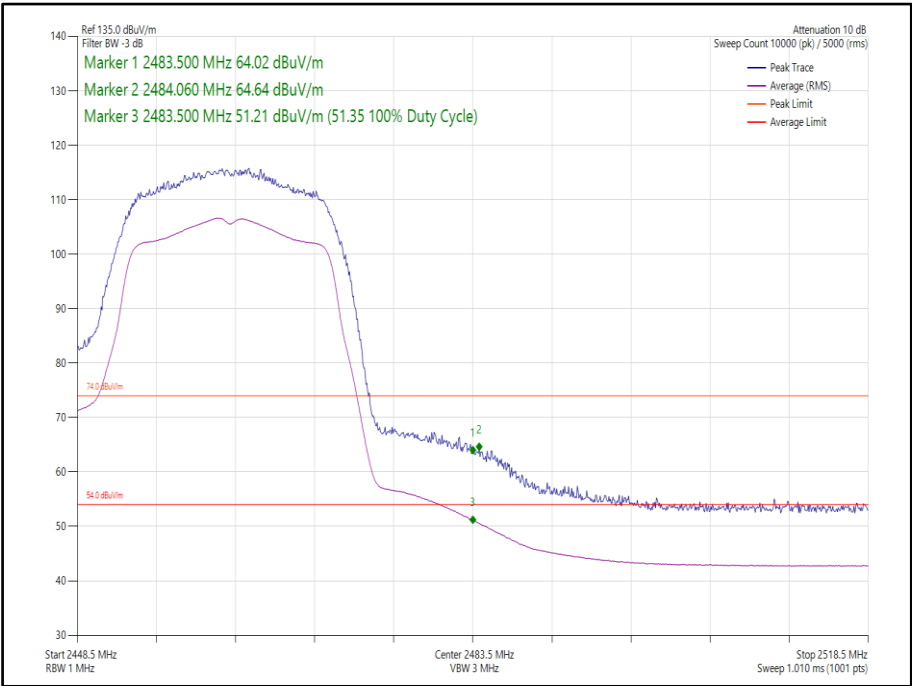


Figure 32 - 802.11n, HT20, SISO, Core 1 - 2462 MHz,
Band Edge Frequency 2483.5 MHz

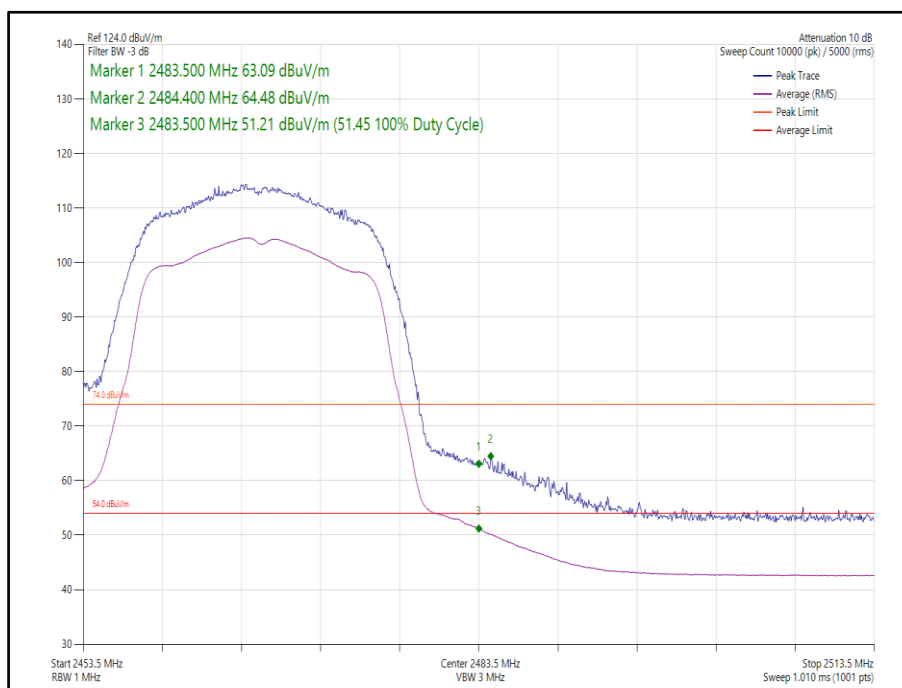

**Figure 33 - 802.11n, HT20, SISO, Core 1 - 2467 MHz,
Band Edge Frequency 2483.5 MHz**

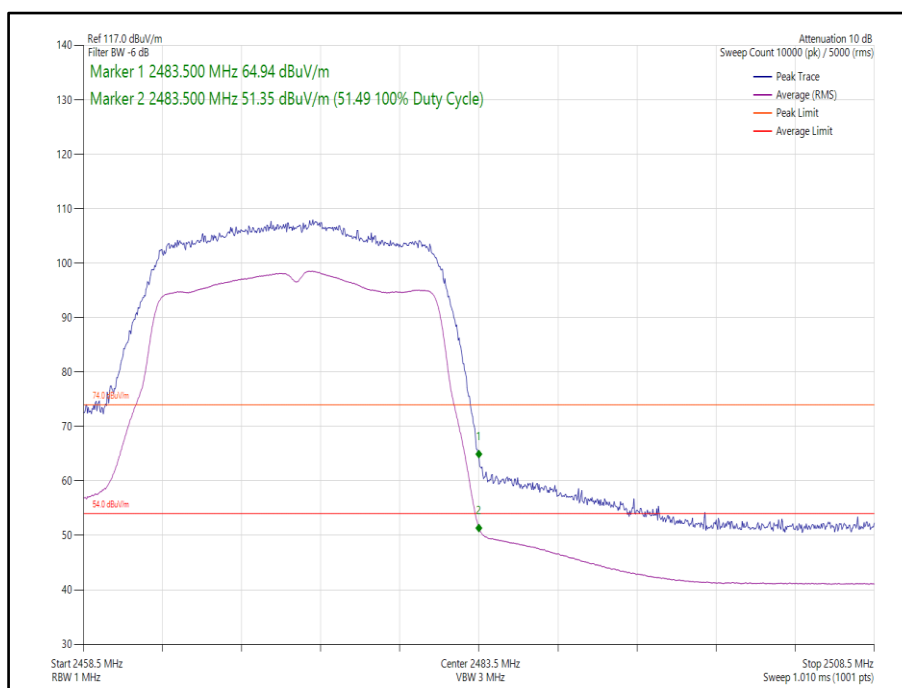

**Figure 34 - 802.11n, HT20, SISO, Core 1 - 2472 MHz,
Band Edge Frequency 2483.5 MHz**

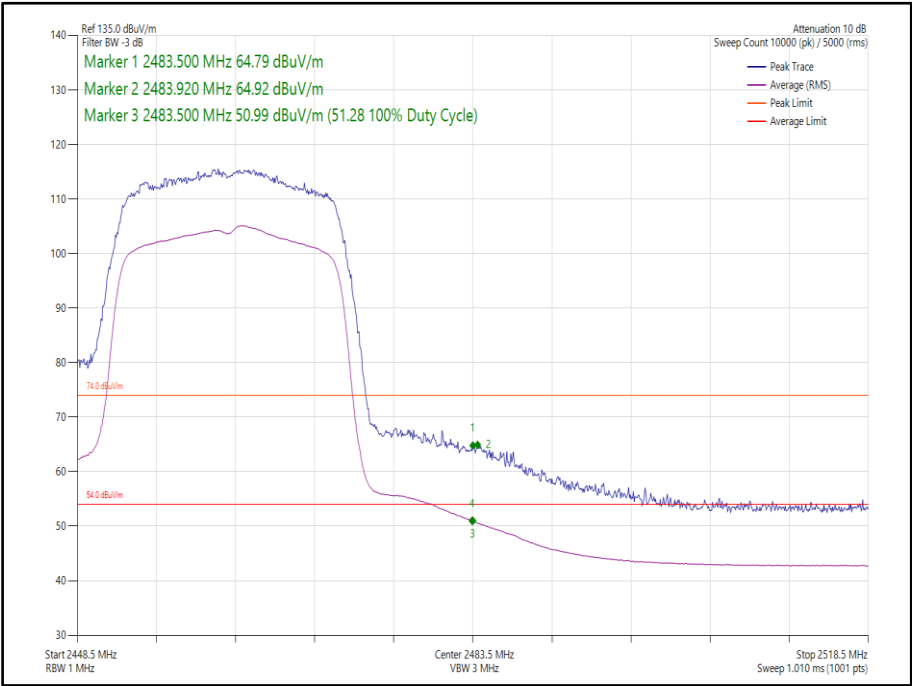


Figure 35 - 802.11ax, HE20, SU, SISO, Core 1 - 2462 MHz,
Band Edge Frequency 2483.5 MHz



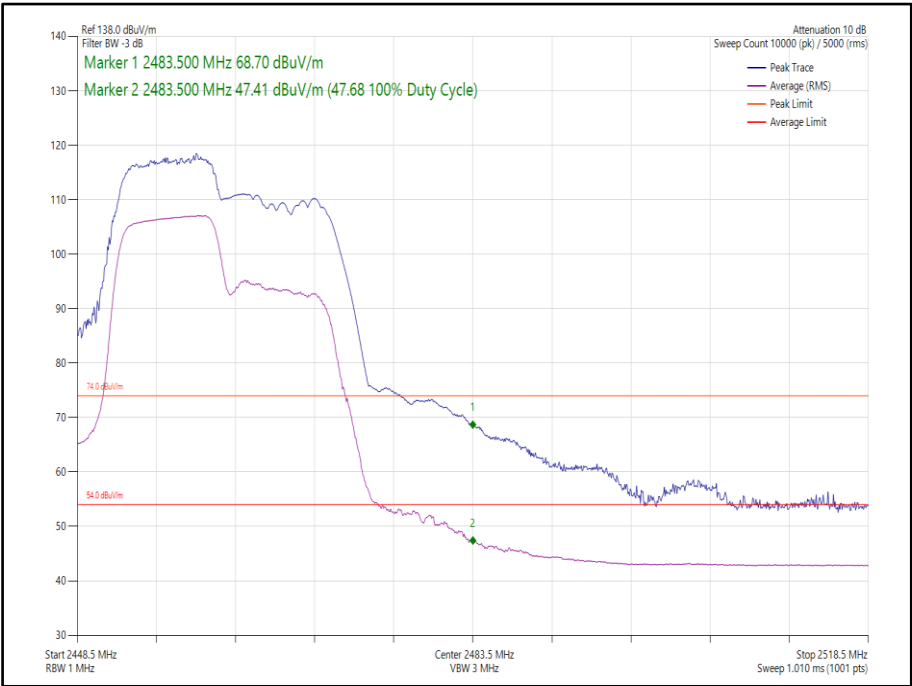



Figure 36 - 802.11ax, HE20, RU 106-53, SISO, Core 1 - 2462 MHz,
Band Edge Frequency 2483.5 MHz

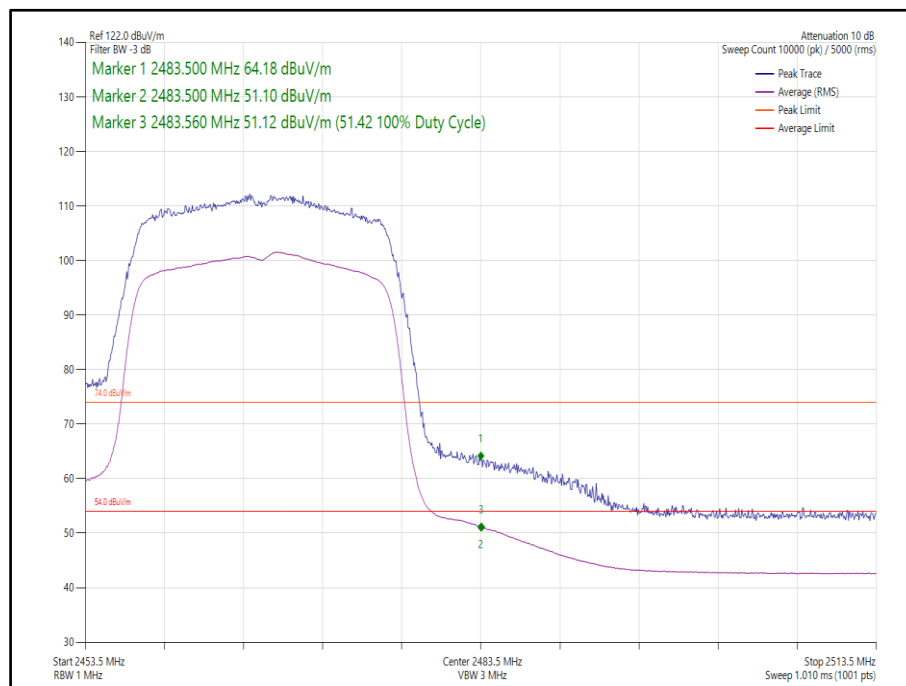


**Figure 37 - 802.11ax, HE20, SU, SISO, Core 1 - 2467 MHz,
Band Edge Frequency 2483.5 MHz**

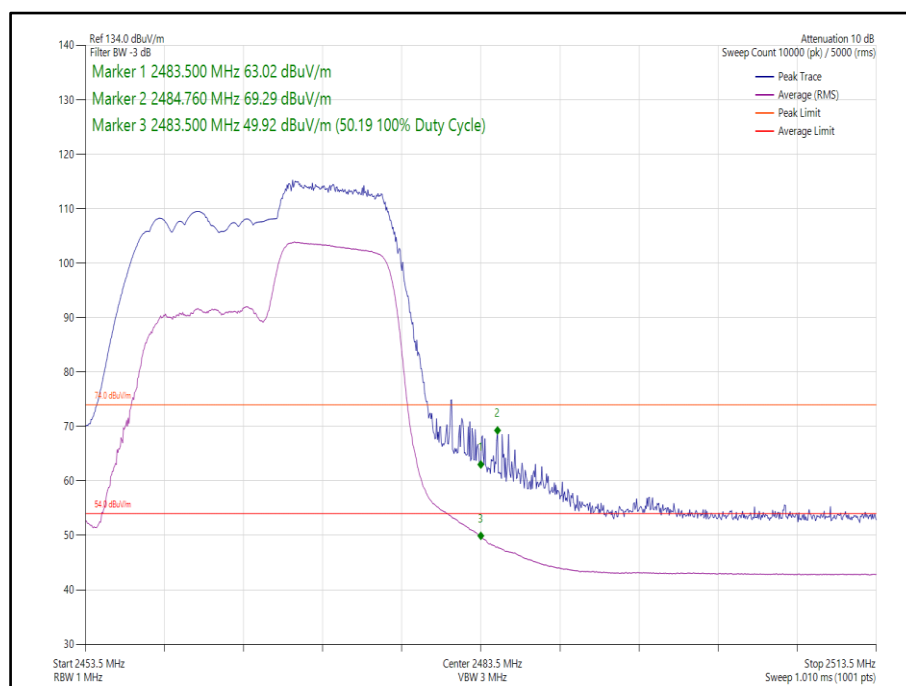

**Figure 38 - 802.11ax, HE20, RU 106-54, SISO, Core 1 - 2467 MHz,
Band Edge Frequency 2483.5 MHz**

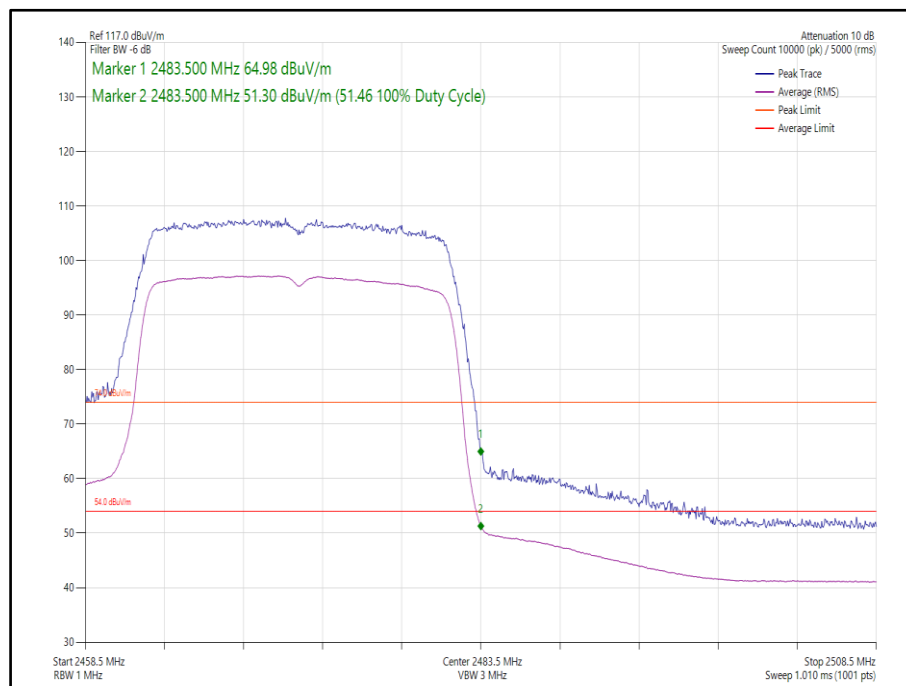

**Figure 39 - 802.11ax, HE20, SU, SISO, Core 1 - 2472 MHz,
Band Edge Frequency 2483.5 MHz**

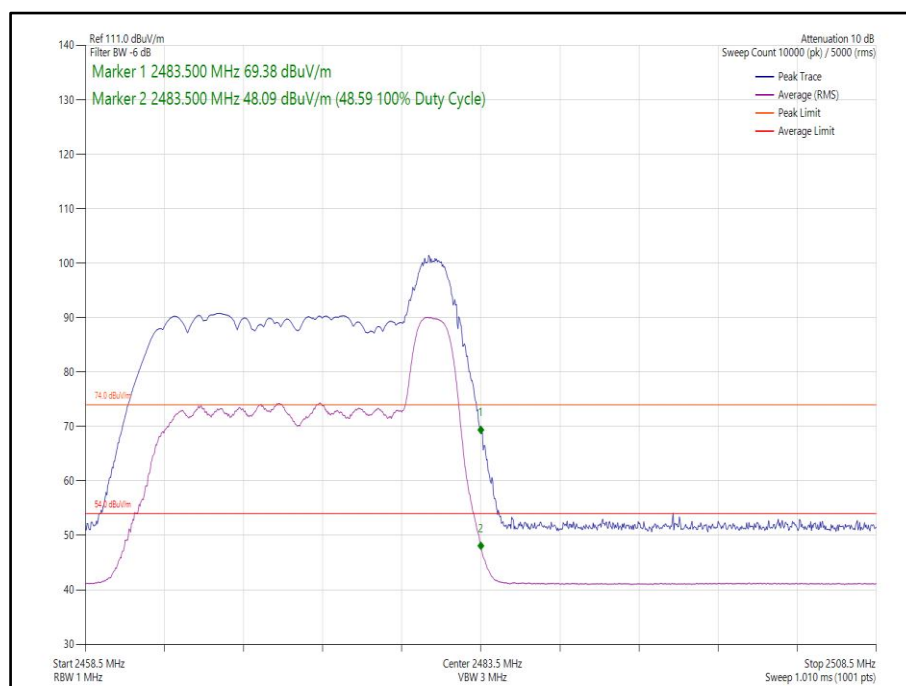


**Figure 40 - 802.11ax, HE20, RU 26-8, SISO, Core 1 - 2472 MHz,
Band Edge Frequency 2483.5 MHz**




20 MHz Bandwidth - Core 0-1 (CDD)

Mode	Data Rate/ MCS	Resource Size	Resource Index	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
802.11n, HT20	MCS4	-	-	2412	2390	64.10	51.24
802.11ax, HE20	MCS4x1	SU	-	2412	2390	66.95	51.35
802.11ax, HE20	MCS9x1	106	53	2412	2390	69.46	51.17
802.11n, HT20	MCS4	-	-	2462	2483.5	66.25	51.41
802.11n, HT20	MCS4	-	-	2467	2483.5	63.88	51.46
802.11n, HT20	MCS7	-	-	2472	2483.5	65.02	51.46
802.11ax, HE20	MCS2x1	SU	-	2462	2483.5	64.39	51.49
802.11ax, HE20	MCS9x1	106	54	2462	2483.5	69.11	50.27
802.11ax, HE20	MCS9x1	SU	-	2467	2483.5	65.12	51.33
802.11ax, HE20	MCS9x1	106	53	2467	2483.5	69.50	50.31
802.11ax, HE20	MCS2x1	SU	-	2472	2483.5	66.03	51.50
802.11ax, HE20	MCS9x1	106	53	2472	2483.5	69.24	49.97


Table 8 - CDD Restricted Band Edge Results

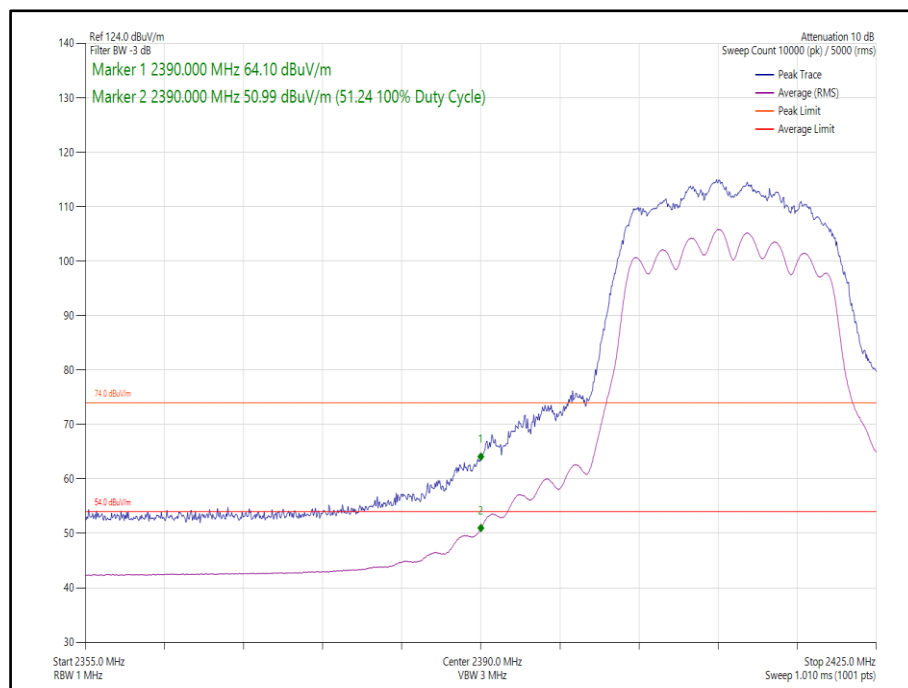


**Figure 41 - 802.11n, HT20, CDD, Core 0-1 - 2412 MHz,
Band Edge Frequency 2390 MHz**

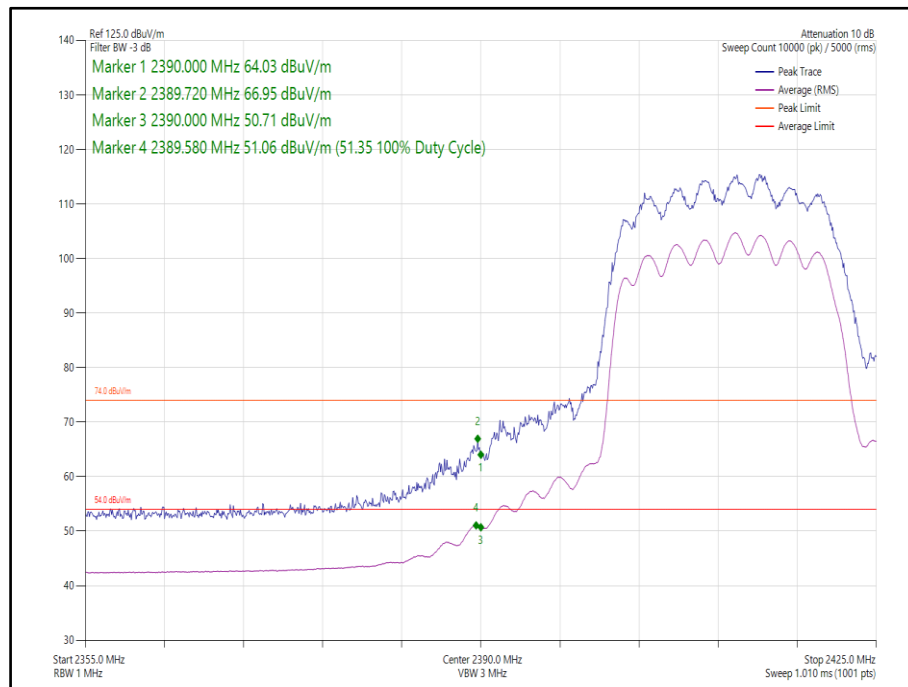


**Figure 42 - 802.11ax, HE20, SU, CDD, Core 0-1 - 2412 MHz,
Band Edge Frequency 2390 MHz**

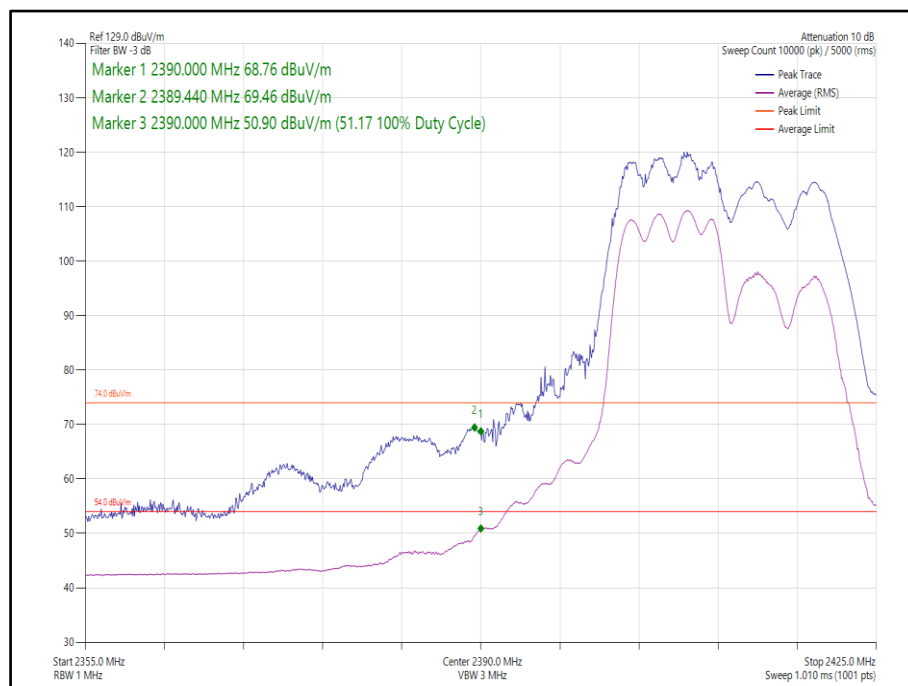


**Figure 43 - 802.11ax, HE20, RU 106-53, CDD, Core 0-1 - 2412 MHz,
Band Edge Frequency 2390 MHz**

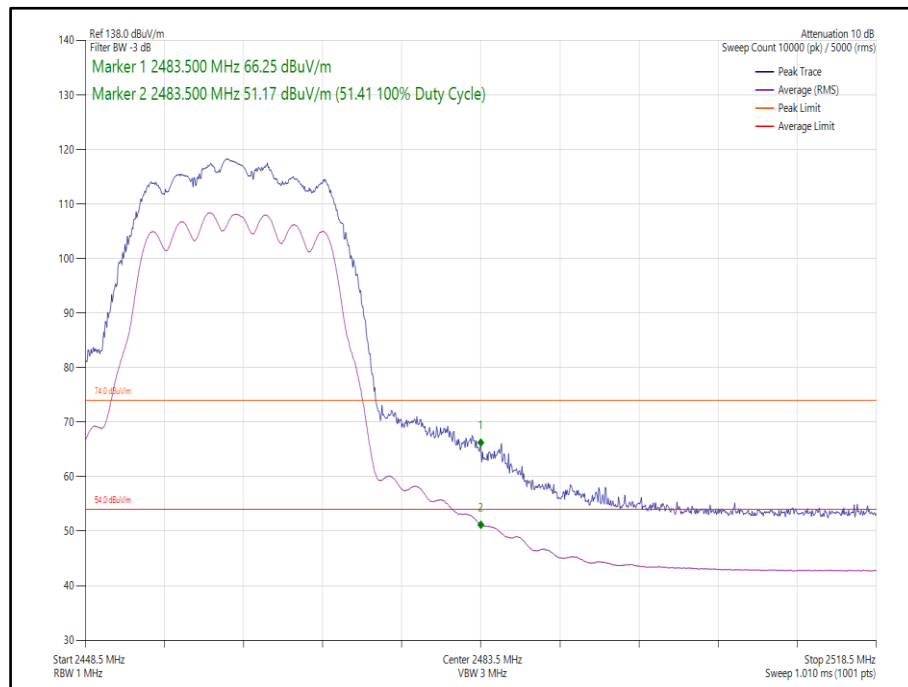


**Figure 44 - 802.11n, HT20, CDD, Core 0-1 - 2462 MHz,
Band Edge Frequency 2483.5 MHz**

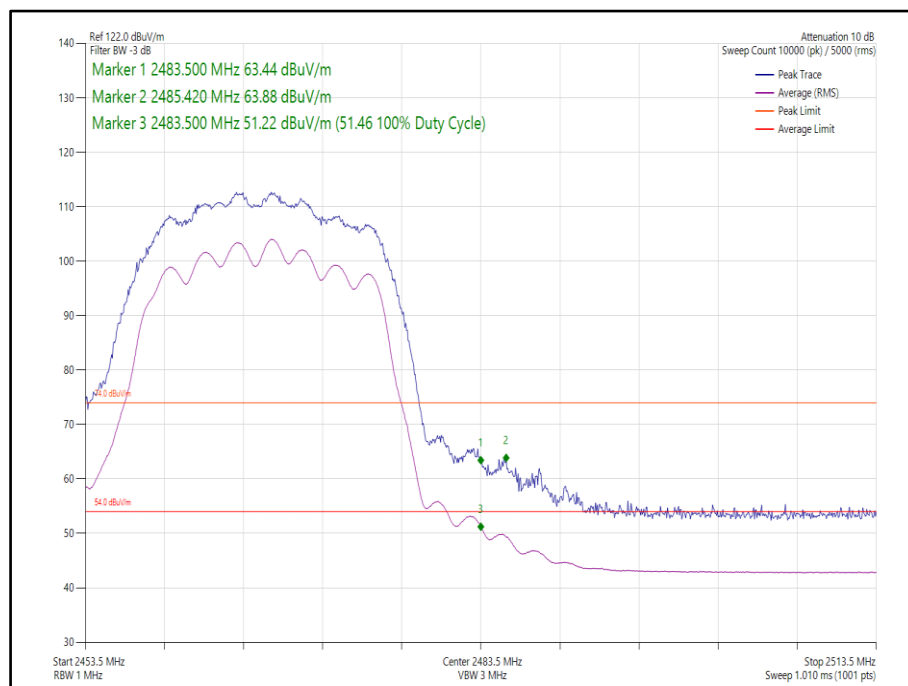

**Figure 45 - 802.11n, HT20, CDD, Core 0-1 - 2467 MHz,
Band Edge Frequency 2483.5 MHz**

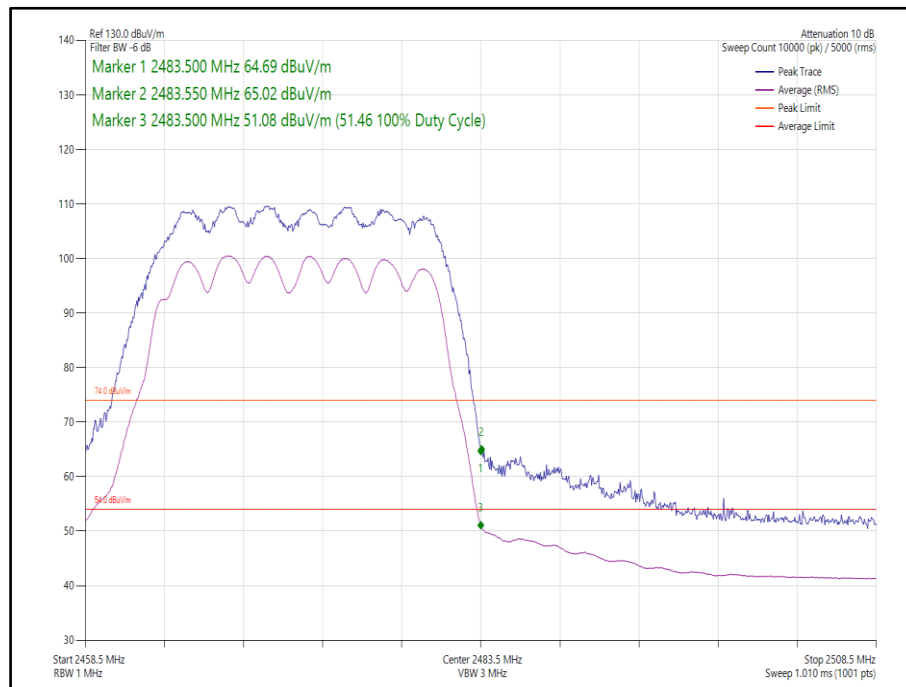


**Figure 46 - 802.11n, HT20, CDD, Core 0-1 - 2472 MHz,
Band Edge Frequency 2483.5 MHz**

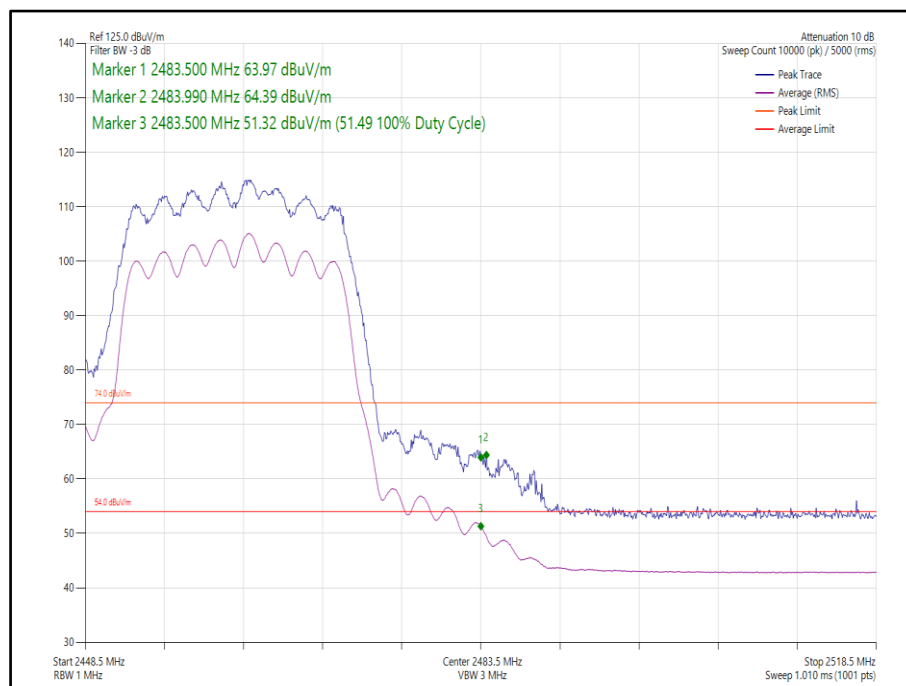


**Figure 47 - 802.11ax, HE20, SU, CDD, Core 0-1 - 2462 MHz,
Band Edge Frequency 2483.5 MHz**




**Figure 48 - 802.11ax, HE20, RU 106-54, CDD, Core 0-1 - 2462 MHz,
Band Edge Frequency 2483.5 MHz**

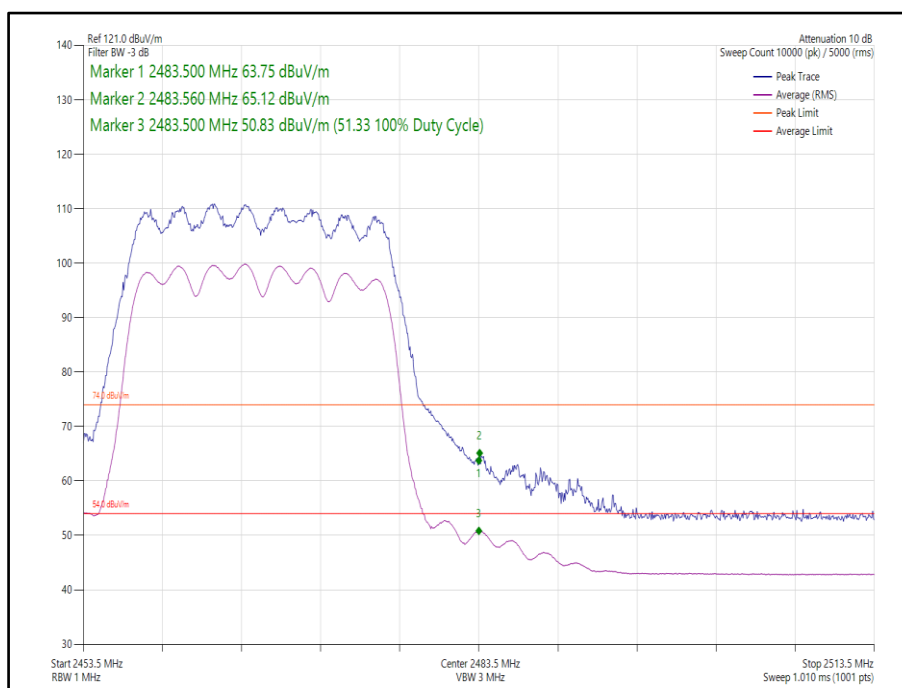

**Figure 49 - 802.11ax, HE20, SU, CDD, Core 0-1 - 2467 MHz,
Band Edge Frequency 2483.5 MHz**

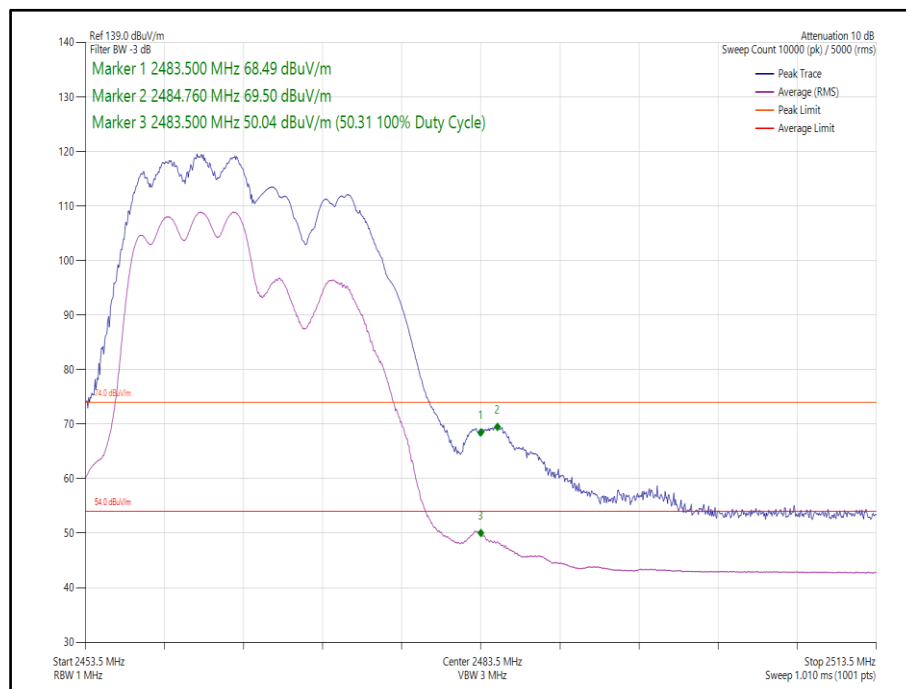

**Figure 50 - 802.11ax, HE20, RU 106-53, CDD, Core 0-1 - 2467 MHz,
Band Edge Frequency 2483.5 MHz**

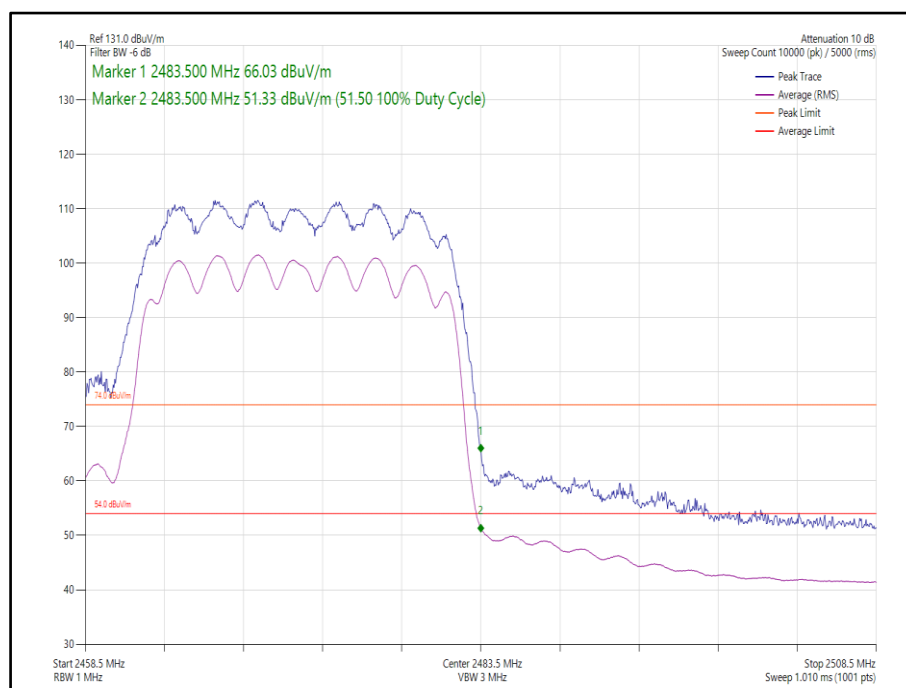

**Figure 51 - 802.11ax, HE20, SU, CDD, Core 0-1 - 2472 MHz,
Band Edge Frequency 2483.5 MHz**

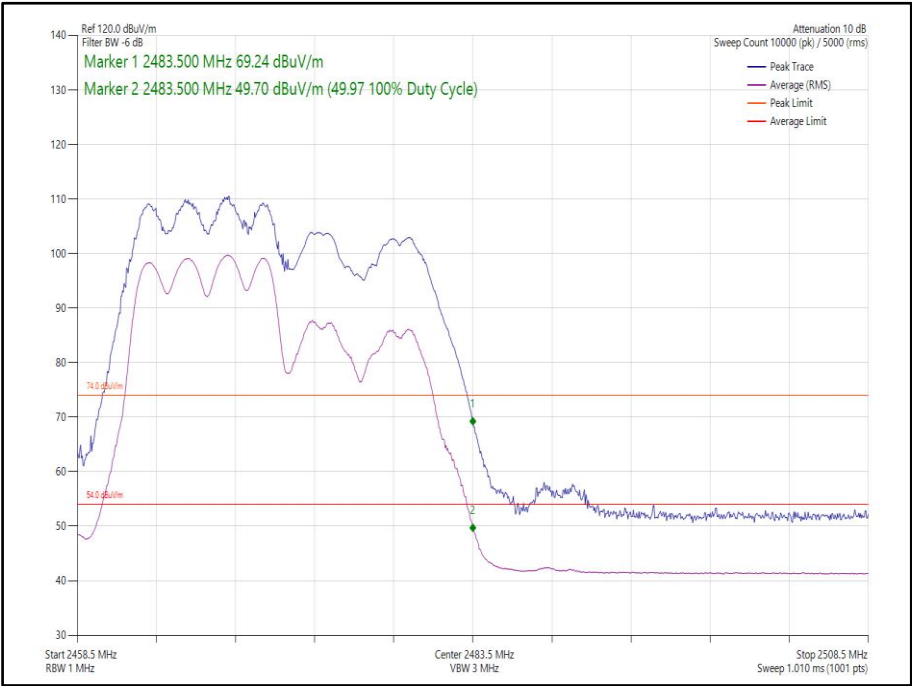


Figure 52 - 802.11ax, HE20, RU 106-53, CDD, Core 0-1 - 2472 MHz, Band Edge Frequency 2483.5 MHz

FCC 47 CFR Part 15, Limit Clause 15.209

Frequency (MHz)	Field Strength (µV/m at 3 m)
30 to 88	100
88 to 216	150
216 to 960	200
Above 960	500

Table 9

ISED RSS-GEN, Limit Clause 8.9

Frequency (MHz)	Field Strength (µV/m at 3 m)
30 to 88	100
88 to 216	150
216 to 960	200
Above 960*	500

Table 10

*Unless otherwise specified, for all frequencies greater than 1 GHz, the radiated emission limits for licence-exempt radio apparatus stated in applicable RSSs (including RSS-Gen) are based on measurements using a linear average detector function having a minimum resolution bandwidth of 1 MHz. If an average limit is specified for the EUT, then the peak emission shall also be measured with instrumentation properly adjusted for such factors as pulse desensitization to ensure the peak emission is less than 20 dB above the average limit.



2.1.7 Test Location and Test Equipment Used

This test was carried out in RF Chamber 15.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Expires
Emissions Software	TUV SUD	EmX V3.1.10	5125	-	Software
1500W (300V 12A) AC Power Supply	iTech	IT7324	5955	-	O/P Mon
5m Semi-Anechoic Chamber (Dual-Axis)	Albatross Projects	RF Chamber 15	5963	36	28-Apr-2025
Mast & Turntable Controller	Maturo Gmbh	FCU3.0	5966	-	TU
Turntable	Maturo Gmbh	TT1.5SI	5968	-	TU
Cable (SMA to SMA 1m)	Junkosha	MWX221-01000AMSAMS/A	5996	12	06-Jun-2023
Cable (N to N 1m)	Junkosha	MWX221-01000NMSNMS/B	5999	12	05-Jun-2023
Cable (N to N 7m)	Junkosha	MWX221-07000NMSNMS/B	6005	12	05-Jun-2023
Cable (N to N 8m)	Junkosha	MWX221-08000NMSNMS/A	6006	12	05-Jun-2023
Cable (SMA to SMA 1m)	Junkosha	MWX221-01000AMSAMS/A	6007	12	06-Jun-2023
Cable (SMA to SMA 6.5m)	Junkosha	MWX221-06500AMSAMS/B	6014	12	07-Jun-2023
Horn Antenna (1-10 GHz)	Schwarzbeck	BBHA9120B	6140	12	21-Jun-2023
Digital Multimeter	Fluke	115	6147	12	16-Jun-2023
Humidity & Temperature meter	R.S Components	1364	6150	12	17-Jun-2023
SAC Switch Unit	TUV SUD	TUV_SSU_001	6191	12	12-Dec-2023

Table 11

TU - Traceability Unscheduled

O/P Mon – Output Monitored using calibrated equipment



2.2 Emission Bandwidth

2.2.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (a)(2)
ISED RSS-247, Clause 5.2
ISED RSS-GEN, Clause 6.7

2.2.2 Equipment Under Test and Modification State

A2941, S/N: GF6K93M959 - Modification State 0

2.2.3 Date of Test

07-March-2023

2.2.4 Test Method

This test was performed in accordance with ANSI C63.10, clause 11.8.1 for 6 dB BW and 6.9.3 for 99% occupied bandwidth measurements.

2.2.5 Environmental Conditions

Ambient Temperature	21.5 °C
Relative Humidity	31.4 %

2.2.6 Test Results

2.4 GHz WLAN

Protocol	6 dB Bandwidth (MHz)	
	Minimum	Maximum
802.11b	8.160	8.600
802.11g	15.240	15.840
802.11n HT20	15.240	16.500
802.11ax HE20 SU	17.040	18.960

Table 12 - 6 dB Bandwidth Summary Results - SISO

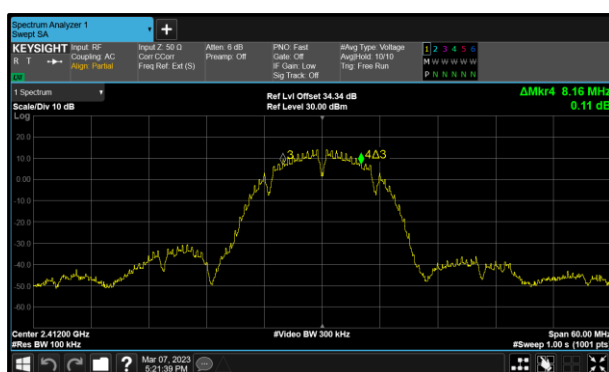


Figure 53 - 802.11b Minimum 6 dB EBW

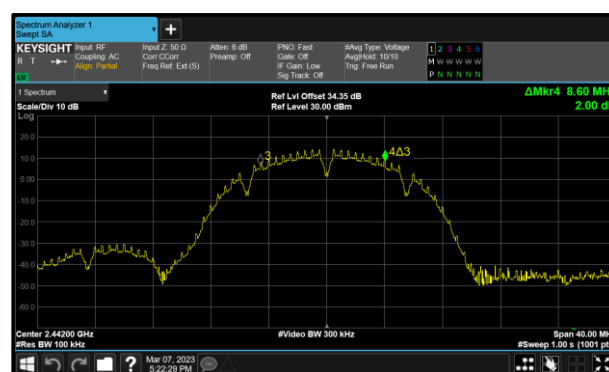


Figure 54 - 802.11b Maximum 6 dB EBW

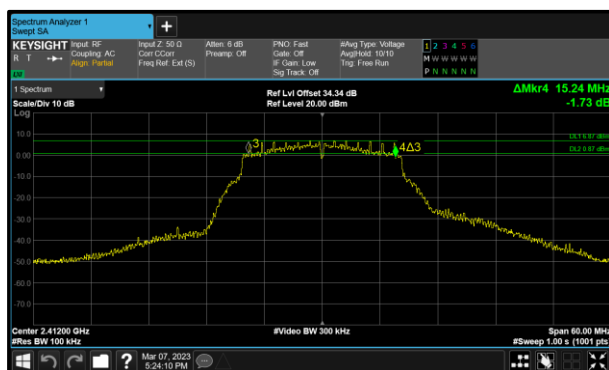


Figure 55 - 802.11g Minimum 6 dB EBW

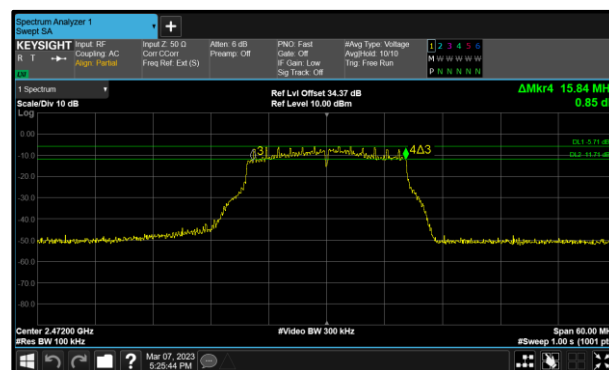


Figure 56 - 802.11g Maximum 6 dB EBW