



SAR EVALUATION REPORT

**FCC 47 CFR § 2.1093
IEEE Std 1528-2013**

For
SMARTPHONE

FCC ID: BCG-E8427A

Model Name: A2846

**Report Number: 14523758-S9V1
Issue Date: 7/11/2023**

Prepared for
**APPLE INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014-2084**

Prepared by
**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



Revision History

Rev.	Date	Revisions	Revised By
V1	7/11/2023	Initial Issue	--

Table of Contents

1.	Attestation of Test Results	4
2.	Test Specification, Methods and Procedures.....	5
3.	Facilities and Accreditation	5
4.	SAR Measurement System & Test Equipment	6
4.1.	<i>SAR Measurement System.....</i>	<i>6</i>
4.2.	<i>SAR Scan Procedures.....</i>	<i>7</i>
4.3.	<i>Power Density Measurement System</i>	<i>9</i>
4.3.1.	<i>Power Density Test Environment.....</i>	<i>9</i>
4.3.2.	<i>Power Density Probe</i>	<i>9</i>
4.4.	<i>Test Equipment.....</i>	<i>10</i>
5.	Measurement Uncertainty.....	12
6.	Dielectric Property Measurements & System Check	13
6.1.	<i>Dielectric Property Measurements</i>	<i>13</i>
6.2.	<i>SAR System Check</i>	<i>15</i>
6.3.	<i>Power Density Measurement System Validation & Verification</i>	<i>16</i>
7.	Test Results.....	17
7.1.	<i>Measured and Reported (Scaled) SAR Results</i>	<i>17</i>
7.2.	<i>Measured PD Results.....</i>	<i>17</i>
Appendixes	18	
Appendix A:	<i>Setup Photos.....</i>	<i>18</i>
Appendix B:	<i>System Check Plots</i>	<i>18</i>
Appendix C:	<i>Highest Test Plots</i>	<i>18</i>
Appendix D:	<i>SAR Tissue Ingredients.....</i>	<i>18</i>
Appendix E:	<i>Probe Certificates.....</i>	<i>18</i>
Appendix F:	<i>SAR Dipole Certificates</i>	<i>18</i>
Appendix G:	<i>5G Source Certificate.....</i>	<i>18</i>

1. Attestation of Test Results

Applicant Name	APPLE INC.
FCC ID	BCG-E8427A
Model Name	A2846
Applicable Standards	FCC 47 CFR § 2.1093 Published RF exposure KDB procedures IEEE Std 1528-2013
Date Tested	3/16/2023 to 7/3/2023
Test Results	Pass

This test report is supplemental to UL SAR report 14523758-S1 and UL Smart Tx report 14523758-S4 Part 1. This report contains SAR and PD test results obtained while the DUT was transmitting WPT energy to a MagSafe compatible battery pack (FCC ID: BCG-A2384). Refer to § 7 for a description of the modes tested as well as Standalone SAR and PD test results from UL SAR report 14523758-S1 and UL Smart Tx report 14523758-S4 Part 1

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested can demonstrate compliance with the requirements as documented in this report.

This report contains data provided by the customer which can impact the validity of results. UL Verification Services Inc. is only responsible for the validity of results after the integration of the data provided by the customer.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not considered unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by A2LA, NIST, any agency of the Federal Government, or any agency of the U.S. government.

Approved & Released By: 	Prepared By: 
Devin Chang Senior Test Engineer UL Verification Services Inc.	Coltyce Sanders Staff Laboratory Engineer UL Verification Services Inc.

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE Std 1528-2013, the following FCC Published RF exposure [KDB](#) procedures:

- 248227 D01 802.11 Wi-Fi SAR v02r02
- 447498 D01 General RF Exposure Guidance v06
- 447498 D03 Supplement C Cross-Reference v01
- 648474 D04 Handset SAR v01r03
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02
- 941225 D01 3G SAR Procedures v03r01
- 941225 D05 SAR for LTE Devices v02r05
- 941225 D05A LTE Rel.10 KDB Inquiry Sheet v01r02
- 941225 D06 Hotspot Mode v02r01
- SPEAG DASY 6 System Handbook; part 4 cDASY6 Module mmWave
- IEC TR 63170: 2018

In addition to the above, the following information was used:

- **TCB workshop** October 2014; RF Exposure Procedures (Other LTE Considerations)
- **TCB workshop** April 2015; RF Exposure Procedures (Overlapping LTE Bands)
- **TCB workshop** October 2015; RF Exposure Procedures (KDB 941225 D05A)
- **TCB workshop** April 2016; RF Exposure Procedures (LTE Carrier Aggregation for DL)
- **TCB workshop** October 2016; RF Exposure Procedures (LTE Carrier Aggregation for UL)
- **TCB workshop** October 2016; RF Exposure Procedures (Bluetooth Duty Factor)
- **TCB workshop** October 2016; RF Exposure Procedures (DUT Holder Perturbations)
- **TCB workshop** May 2017; RF Exposure Procedures (Broadband Liquid Above 3 GHz)
- **TCB workshop** May 2017; RF Exposure Procedures (LTE Band 41 Power Class 2)
- **TCB workshop** November 2017; RF Exposure Procedures (LTE UL/DL Carrier Aggregation SAR)
- **TCB workshop** April 2018; RF Exposure Procedures (LTE DL CA SAR Test Exclusion)
- **TCB workshop** October 2018; RF Exposure Procedures (LTE Inter-Band Uplink Carrier Aggregation – Interim Procedures)
- **TCB workshop** April 2019; RF Exposure Procedures (802.11ax SAR Testing)
- **TCB workshop** November 2019; RF Exposure Policy Updates (5G NR FR1 NSA EN-DCUE SAR Evaluations)
- **TCB workshop** April 2021; RF Exposure Procedures (Remarks on Test Reductions via Data Referencing for Closely Related Products)

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at


47173 Benicia Street	47266 Benicia Street
SAR Labs A to I	SAR Labs 1 to 19

UL Verification Services Inc. is accredited by A2LA, Certificate Number 0751.05

4. SAR Measurement System & Test Equipment

4.1. SAR Measurement System

The DASY system used for performing compliance tests consists of the following items:

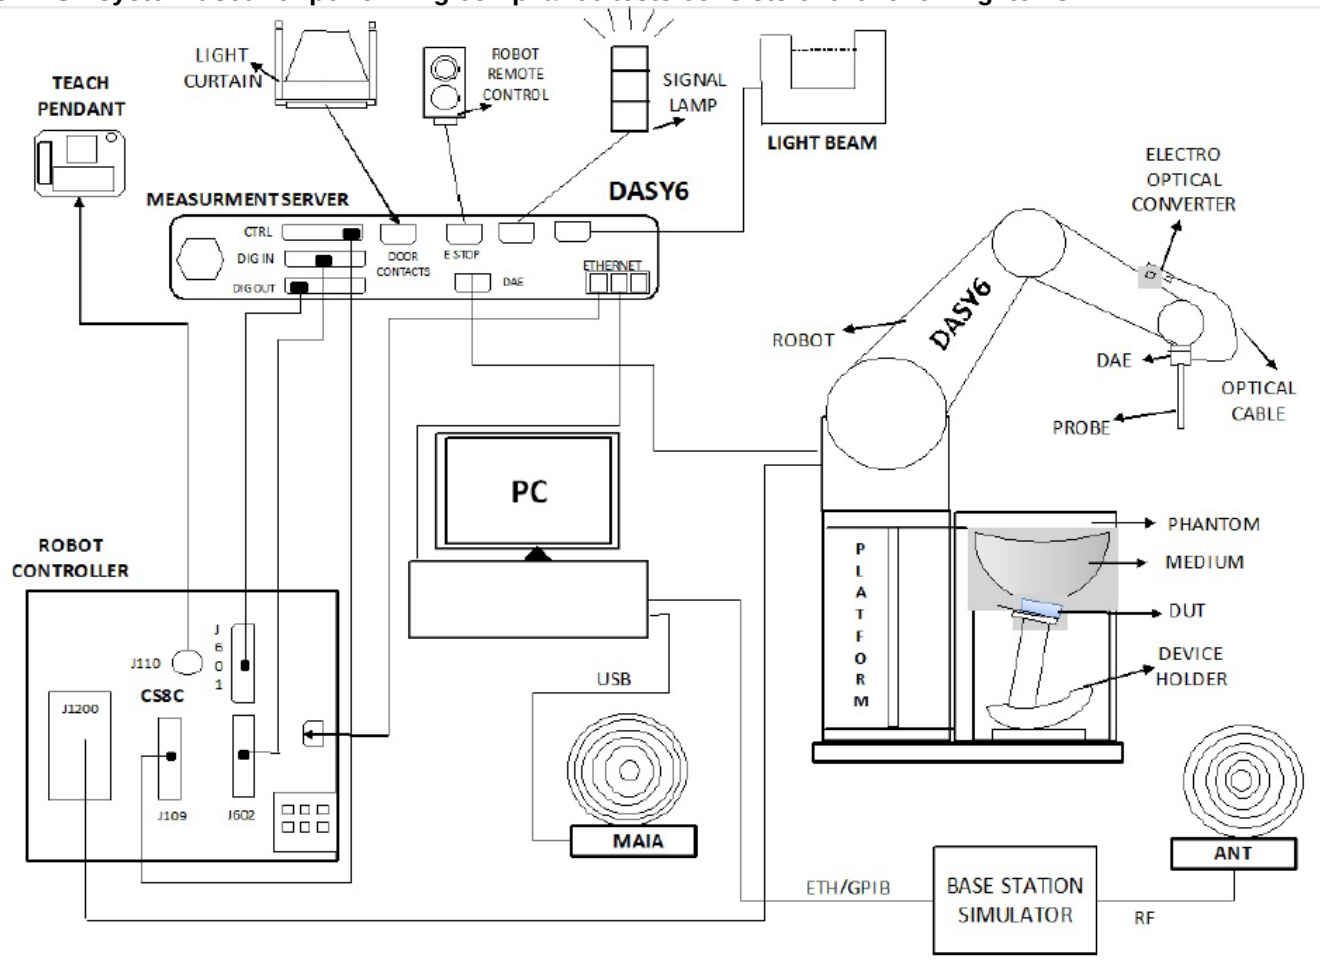

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win10 and the DASY6/8¹ software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder, and other accessories according to the targeted measurement.

¹ DASY6/8 software used: DASY6.16.2 or DASY8.16.2 and older generations.

4.2. SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEC/IEEE 62209-1528, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

4.3. Power Density Measurement System

The power density measurement system is constructed based on the DASY6 platform by SPEAG. The DASY6/8 with EUmillimeter wavev2, EUmillimeter wavev3, and EUmillimeter wavev4 and 5G software module can measure the electromagnetic exposure (electromagnetic and power density) up to 110GHz as close as 2mm from any transmitter.

4.3.1. Power Density Test Environment

Test Location	UL Verification Services
Ambient Temperature	22±2°C
Tissue Simulating Liquid	22±2°C
Humidity Range	30% ~ 49%

4.3.2. Power Density Probe

The novel EUmillimeter wavev2, EUmillimeter wavev3, and EUmillimeter wavev4 probe is used in the power density measurement. It is designed for precise near-field measurements in the mm-wave range by Schmid & Partner Engineering AG of Zurich, Switzerland. The specifications are:

- Frequency range: 0.75 ~ 110 GHz
- Dynamic range: <50 – 3000 V/m (up to 10000 V/m with additional PRE-10 voltage divider)
- Linearity: < ± 0.2 dB
- Supports sensor model calibration (SMC)
- ISO17025 accredited calibration

4.4. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations and is traceable to recognized national standards.

Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Vector Network Analyzer	ROHDE & SCHWARZ	ZNLE6	101274-mn	2/19/2024
Dielectric Probe kit	SPEAG	DAK-3.5	1103	2/28/2024
Shorting Block	SPEAG	DAK-1.2/3.5 Short	SM DAK 200 BA	2/28/2024
Thermometer	Fisher Scientific	Traceable	122529162	8/9/2023
Vector Network Analyzer	ROHDE & SCHWARZ	ZNLE6	101273-VA	2/19/2024
Dielectric Probe kit	SPEAG	DAK-3.5	1082	9/19/2023
Dielectric Probe kit	SPEAG	DAK-12	1128	1/16/2024
Shorting Block	SPEAG	DAK-1.2/3.5 Short	SM DAK 200 BA	9/19/2023
Shorting Block	SPEAG	DAK-12 Short	SM DAK 220 AC	1/16/2024
Thermometer	Fisher Scientific	Traceable	140493798	4/30/2024
Vector Network Analyzer	Copper Mountain Tech	R140N	21130078	4/30/2024
Dielectric Probe kit	SPEAG	DAK-3.5	1087	11/17/2023
Shorting Block	SPEAG	DAK-1.2/3.5 Short	SM DAK 200 BA	11/17/2023
Thermometer	Fisher Scientific	Traceable	170064398	4/10/2024

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
MXG Analog Signal Generator	Agilent	N5181A	MY50140610	1/31/2024
Power Meter	HP	437B	3125U11364	1/31/2024
Power Meter	HP	437B	3125U11347	1/31/2024
Power Sensor	HP	8481A	3318A92374	1/31/2024
Power Sensor	HP	8481A	1926A27049	1/31/2024
Amplifier	Miteq	AMF-4D-00400600-50-30P	1795093	N/A
Bi-directional coupler	Werlatone	C8060-102	2711	N/A
DC Power Supply	Sorensen	XT 15-4	1802A01877	N/A
MXG Analog Signal Generator	Agilent	N5181A	MY50140630	1/31/2024
Power Meter	Keysight	N1912A	MY55196004	1/31/2024
Power Sensor	Agilent	N1921A	MY53260010	1/31/2024
Power Sensor	Agilent	N1921A	MY52260009	1/31/2024
Amplifier	Miteq	AMF-4D-00400600-50-30P	1795092	N/A
Bi-directional coupler	Werlatone	C8060-102	2149	N/A
DC Power Supply	Sorensen	XT 15-4	PRE0178948	N/A
Signal Generator	R&S	SMB 100A	171706	2/29/2024
Power Meter	Keysight	N1912A	MY55196007	1/31/2024
Power Sensor	Agilent	N1921A	MY53020038	1/31/2024
Power Sensor	R&S	NRP18A	171503	2/29/2024
Bi-directional coupler	Werlatone	C8060-102	4054	N/A
Signal Generator	R&S	SMB 100A	171705	2/29/2024
Power Meter	HP	437B	3125U09248	1/31/2024
Power Sensor	HP	8481A	2237A31744	1/31/2024
Power Sensor	R&S	NRP8S	199180	2/29/2024
Bi-directional coupler	Werlatone	C8060-102	2710	N/A
Signal Generator	R&S	SMB 100A	171705	2/29/2024
Power Meter	HP	437B	3125U09248	1/31/2024
Power Sensor	R&S	NRP18A	171443	2/29/2024
Power Sensor	Agilent	8481A	2237A31744	1/26/2024
Bi-directional coupler	Werlatone	C8060-102	2710	N/A

Lab Equipment

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
E-Field Probe (SAR Lab A)	SPEAG	EX3DV4	3772	2/13/2024
E-Field Probe (SAR Lab I)	SPEAG	EX3DV4	7810	4/25/2024
E-Field Probe (SAR Lab 2)	SPEAG	EX3DV4	3989	1/26/2024
E-Field Probe (SAR Lab 3)	SPEAG	EUmmWV4	9589	9/20/2023
E-Field Probe (SAR Lab 8)	SPEAG	EX3DV4	7807	4/11/2024
E-Field Probe (SAR Lab 15)	SPEAG	EX3DV4	3885	9/20/2023
Data Acquisition Electronics (SAR Lab A)	SPEAG	DAE4	1359	1/24/2024
Data Acquisition Electronics (SAR Lab I)	SPEAG	DAE4	1439	3/16/2024
Data Acquisition Electronics (SAR Lab 2)	SPEAG	DAE4	1257	9/20/2023
Data Acquisition Electronics (SAR Lab 3)	SPEAG	DAE4	1377	9/15/2023
Data Acquisition Electronics (SAR Lab 8)	SPEAG	DAE4	1799	4/4/2024
Data Acquisition Electronics (SAR Lab 15)	SPEAG	DAE4	1548	2/14/2024
Thermometer	TRACEABLE	6530CC	170361	2/29/2024
Thermometer	TRACEABLE	6530CC	155512	2/29/2024
Thermometer	TRACEABLE	6530CC	174046	2/29/2024
Thermometer	TRACEABLE	6530CC	168571	2/29/2024
Thermometer	TRACEABLE	6530CC	155354	2/29/2024
Thermometer	TRACEABLE	6530CC	174045	2/29/2024
Thermometer	TRACEABLE	6530CC	175732	2/29/2024

Lab Equipment

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
System Validation Dipole	SPEAG	D1750V2	1053	10/17/2023
System Validation Dipole	SPEAG	D1900V2	5d163	10/28/2023
System Validation Dipole	SPEAG	D2450V2	706	1/20/2024
System Validation Dipole	SPEAG	D2600V2	1036	4/11/2024
System Validation Dipole	SPEAG	D5GHzV2	1138	2/3/2024
5G Verification Source	SPEAG	5G Verification Source 30 GHz	1003	9/14/2023

Other

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Power Meter	Keysight	N1911A	MY55196015	1/31/2024
Power Sensor	Agilent	N1921A	MY52270022	1/31/2024
Wideband Radio Communication Tester	R&S	CMW500	85780	2/29/2024
Wideband Radio Communication Tester	R&S	CMW500	85781	2/29/2024

5. Measurement Uncertainty

SAR

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

Therefore, the measurement uncertainty is not required.

Power Density

a		b	c	d f(d,k)	e	f = b×e/d	g
Error Description		Unc.Value (±dB)	Probab. Distri.	Div.	ci	Std. Unc. (±dB)	vi
Uncertainty terms dependent on the measurement system							
CAL	Calibration Repeatability	0.49	Normal	1	1	0.49	∞
COR	Probe correction	0	Rectangular	1.732	1	0.00	∞
FRS	Frequency response (BW 1 GHz)	0.20	Rectangular	1.732	1	0.12	∞
SCC	Sensor cross coupling	0	Rectangular	1.732	1	0.00	∞
ISO	Isotropy	0.50	Rectangular	1.732	1	0.29	∞
LIN	Linearity	0.20	Rectangular	1.732	1	0.12	∞
PSC	Probe scattering	0	Rectangular	1.732	1	0.00	∞
PPO	Probe positioning o set	0.30	Rectangular	1.732	1	0.17	∞
PPR	Probe positioning repeatability	0.04	Rectangular	1.732	1	0.02	∞
SMO	Sensor mechanical o set	0	Rectangular	1.732	1	0.00	∞
PSR	Probe spatial resolution	0	Rectangular	1.732	1	0.00	∞
FLD	Field impedance dependance	0	Rectangular	1.732	1	0.00	∞
APD	Amplitude and phase drift	0	Rectangular	1.732	1	0.00	∞
APN	Amplitude and phase noise	0.04	Rectangular	1.732	1	0.02	∞
TR	Measurement area truncation	0	Rectangular	1.732	1	0.00	∞
DAQ	Data acquisition	0.03	Normal	1	1	0.03	∞
SMP	Sampling	0	Rectangular	1.732	1	0.00	∞
REC	Field reconstruction	0.60	Rectangular	1.732	1	0.35	∞
TRA	Forward transformation	0	Rectangular	1.732	1	0.00	∞
SCA	Power density scaling	-	Rectangular	1.732	1	-	∞
SAV	Spatial averaging	0.10	Rectangular	1.732	1	0.06	∞
SDL	System detection limit	0.04	Rectangular	1.732	1	0.02	∞
Uncertainty terms dependent on the DUT and environmental factors							
PC	Probe coupling with DUT	0	Rectangular	1.732	1	0	∞
MOD	Modulation response	0.40	Rectangular	1.732	1	0.23	∞
IT	Integration time	0	Rectangular	1.732	1	0	∞
RT	Response time	0	Rectangular	1.732	1	0	∞
DH	Device holder influence	0.10	Rectangular	1.732	1	0.06	∞
DAQ	DUT alignment	0	Rectangular	1.732	1	0	∞
AC	RF ambient conditions	0.04	Rectangular	1.732	1	0.02	∞
AR	Ambient reflections	0.04	Rectangular	1.732	1	0.02	∞
MSI	Immunity / secondary reception	0	Rectangular	1.732	1	0	∞
DRI	Drift of the DUT	0.21	Rectangular	1.732	1	0.12	∞
Combined Standard Uncertainty Uc(f) =			RSS			0.76	∞
Expanded Uncertainty U, Coverage Factor = 2, > 95 % Confidence =						1.52	

6. Dielectric Property Measurements & System Check

6.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

The dielectric constant (ϵ_r) and conductivity (σ) of typical tissue-equivalent media recipes are expected to be within $\pm 5\%$ of the required target values; but for SAR measurement systems that have implemented the SAR error compensation algorithms documented in IEEE Std 1528-2013, to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters, the tolerance for ϵ_r and σ may be relaxed to $\pm 10\%$. This is limited to frequencies $\leq 3\text{ GHz}$.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

Dielectric Property Measurements

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta	Measured	Target	Delta
A	6/29/2023	2450	Head	2450	37.67	39.2	-3.90%	1.85	1.80	2.67%
				2400	37.79	39.3	-3.83%	1.80	1.75	2.93%
				2500	37.57	39.1	-4.00%	1.88	1.85	1.62%
I	7/2/2023	5750	Head	5750	36.23	35.4	2.45%	5.17	5.21	-0.80%
				5700	36.59	35.4	3.30%	5.11	5.16	-1.12%
				5850	36.12	35.3	2.32%	5.33	5.32	0.19%
2	6/15/2023	1750	Head	1750	40.31	40.1	0.56%	1.31	1.37	-4.31%
				1695	40.41	40.2	0.60%	1.28	1.34	-4.41%
				1755	40.29	40.1	0.53%	1.31	1.37	-4.29%
8	6/21/2023	1900	Head	1900	38.22	40.0	-4.45%	1.44	1.40	2.86%
				1850	38.38	40.0	-4.05%	1.41	1.40	0.79%
				1920	38.19	40.0	-4.53%	1.45	1.40	3.79%
8	6/25/2023	1900	Head	1900	38.13	40.0	-4.67%	1.41	1.40	0.86%
				1850	38.22	40.0	-4.45%	1.39	1.40	-1.07%
				1920	38.10	40.0	-4.75%	1.43	1.40	1.86%
15	6/28/2023	2600	Head	2600	39.27	39.0	0.66%	1.96	1.96	-0.11%
				2495	39.42	39.1	0.71%	1.87	1.85	1.37%
				2690	39.14	38.9	0.62%	2.04	2.06	-1.09%

6.2. SAR System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 $\pm$ 0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be $\geq$ 15.0 cm for SAR measurements $\leq$ 3 GHz and $\geq$ 10.0 cm for measurements $>$ 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within $\pm 10\%$ of the manufacturer calibrated dipole SAR target. Refer to Appendix B for the SAR System Check Plots.

SAR Lab	Date	Tissue Type	Dipole Type & Serial Number	Dipole Cal. Due Date	Measured results for 1-g SAR				Measured results for 10-g SAR				Plot No.
					Zoom Scan at 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	Zoom Scan at 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	
A	6/29/2023	Head	D2450V2 SN: 706	1/20/2024	5.20	52.0	52.3	-0.57%	2.42	24.2	24.5	-1.22%	1
I	7/2/2023	Head	D5GHzV2 SN: 1138 (5.75 GHz)	2/3/2024	7.59	75.9	78.3	-3.07%	2.18	21.8	22.2	-1.80%	2
2	6/15/2023	Head	D1750V2 SN: 1053	10/17/2023	3.60	36.0	36.6	-1.64%	1.95	19.5	19.4	0.52%	3
8	6/21/2023	Head	D1900V2 SN: 5d163	10/28/2023	4.08	40.8	39.1	4.35%	2.13	21.3	20.4	4.41%	
8	6/25/2023	Head	D1900V2 SN: 5d163	10/28/2023	4.10	41.0	39.1	4.86%	2.14	21.4	20.4	4.90%	4
15	6/28/2023	Head	D2600V2 SN: 1036	4/11/2024	6.03	60.3	55.4	8.84%	2.71	27.1	24.9	8.84%	5

6.3. Power Density Measurement System Validation & Verification

Power density system validation and verification is performed using the SPEAG verification source. The verification source consists of a ka-band horn antenna with a corresponding gun oscillator packaged within a cube-shaped housing.

The specification of the verification source is:

- Calibrated frequency: 30 GHz at 10 mm from the case surface
- Frequency accuracy: ± 100 MHz
- E-field polarization: linear
- Harmonics: -20 dBc (typ)
- Total radiated power: 14 dBm (typ)
- Power stability: 0.05 dB
- Power consumption: 5 W (max)
- Size: 100 × 100 × 100 mm
- Weight: 1 kg

System Validation Results

The measured power density (PD) value is within ± 1.2 dB of the target level; for the 5G verification source's uncertainty, please refer to Appendix G. Refer to Appendix B for the System Validation Plot.

SAR Lab	Test Date	Frequency (GHz)	5G Probe SN	Probe Cal. Due Date	DAE SN	DAE Cal. Due Date	5G Verification Source SN	Source Cal. Due Date	Measured psPDn (W/m ²) over 4cm ²	Target psPDn (W/m ²) over 4cm ²	Deviation (dB)	Measured psPDtot (W/m ²) over 4cm ²	Target psPDtot (W/m ²) over 4cm ²	Deviation (dB)	Plot
3	3/16/2023	30	9589	9/20/2023	1377	9/15/2023	1003	9/14/2023	33.8	33.3	0.06	34.7	33.3	0.18	
3	3/16/2023	30	9589	9/20/2023	1377	9/15/2023	1003	9/14/2023	33.0	33.3	-0.04	34.4	33.3	0.14	
3	3/16/2023	30	9589	9/20/2023	1377	9/15/2023	1003	9/14/2023	32.5	33.3	-0.11	33.9	33.3	0.08	
3	3/16/2023	30	9589	9/20/2023	1377	9/15/2023	1003	9/14/2023	33.5	33.3	0.03	34.8	33.3	0.19	
3	3/16/2023	30	9589	9/20/2023	1377	9/15/2023	1003	9/14/2023	34.7	33.3	0.18	36.1	33.3	0.35	6
3	3/21/2023	30	9589	9/20/2023	1377	9/15/2023	1003	9/14/2023	33.5	33.3	0.03	34.9	33.3	0.20	
3	3/21/2023	30	9589	9/20/2023	1377	9/15/2023	1003	9/14/2023	33.3	33.3	0.00	34.7	33.3	0.18	
3	3/21/2023	30	9589	9/20/2023	1377	9/15/2023	1003	9/14/2023	33.2	33.3	-0.01	34.6	33.3	0.17	
3	3/21/2023	30	9589	9/20/2023	1377	9/15/2023	1003	9/14/2023	33.3	33.3	0.00	34.8	33.3	0.19	
3	3/21/2023	30	9589	9/20/2023	1377	9/15/2023	1003	9/14/2023	33.1	33.3	-0.03	34.6	33.3	0.17	
Average									33.4	33.3	0.01	34.8	33.3	0.19	

System Check Results

Refer to Appendix B for the System Check Plot.

SAR Lab	Date	Frequency (GHz)	5G Verification Source SN	Source Cal. Due Date	Measured psPDn (W/m ²) over 4cm ²	Target psPDn (W/m ²) over 4cm ²	Deviation (dB)	Measured psPDtot (W/m ²) over 4cm ²	Target psPDtot (W/m ²) over 4cm ²	Deviation (dB)	Plot
3	5/30/2023	30	1003	9/14/2023	32.5	33.4	-0.12	34.1	34.8	-0.08	7

7. Test Results

7.1. Measured and Reported (Scaled) SAR Results

The DUT supports an inductive charging system in both Tx and Rx modes. The DUT only supports Tx mode while it is connected to an external power supply via the lightning connector.

SAR testing was performed on the worst-case Head position for each supported technology in accordance with FCC guidance. Body testing was deemed unnecessary as the body-worn scenario would not be supported while the DUT is plugged in to the external power supply.

Technology	Band	Antenna	RF Exposure Condition	Mode	Power Mode	Dist (mm)	Test Position	Channel	Freq. (MHz)	RB Allocation	RB Offset	Duty Cycle (%)	Max Output Pow (dBm)	Meas. (dBm)	Standalone				with Battery Pack				1-g Scaled SAR Delta (%)	Plot No.
															1-g Meas. (W/kg)	1-g Scaled (W/kg)	10-g Meas. (W/kg)	10-g Scaled (W/kg)	1-g Meas. (W/kg)	1-g Scaled (W/kg)	10-g Meas. (W/kg)	10-g Scaled (W/kg)		
GSM	1900	ANT 2	Head	GPRS 2 Slots	Mode A	0	Right Tilt	661	1880.0				26.3	25.4	0.622	0.765	0.300	0.369	0.689	0.848	0.337	0.415	10.8%	1
WCDMA	8	ANT 2	Head	Rel. 99	Mode A	0	Right Cheek	9202	1852.4				20.3	19.4	0.763	0.939	0.399	0.490	0.731	0.899	0.391	0.481	-4.2%	2
LTE	66	ANT 2	Head	QPSK	Mode A	0	Right Tilt	132572	1770.0	1	49		19.8	19.0	0.783	0.941	0.362	0.455	0.723	0.869	0.344	0.414	-7.7%	3
FRL	n4L	ANT 4	Head	OF-TS-OFDM m2 BPSK	Mode A	0	Left Cheek	518599	2592.0	125	69		18.7	18.4	0.882	0.945	0.356	0.391	0.795	0.852	0.313	0.325	-8.9%	4
WiFi 2.4GHz	2.4GHz	ANT 4	Head	802.11b	Power State 1 Mode A	0	Left Cheek	1	2412.0			99.94%	20.25	18.97	0.834	1.121	0.349	0.469	0.821	1.103	0.354	0.476	-1.6%	5
WiFi 5GHz	5.8 GHz	ANT 6	Head	802.11ac (VHT80)	Power State 3 Mode A	0	Right Cheek	155	5775.0			98.76%	20.00	18.64	0.777	1.076	0.250	0.346	0.815	1.119	0.265	0.367	4.9%	6

7.2. Measured PD Results

The DUT supports an inductive charging system in both Tx and Rx modes. The DUT only supports Tx mode while it is connected to an external power supply via the lightning connector.

PD testing was performed on the worst-case position.

Technology	Band	Antenna	Signal Type	Channel	Freq. (MHz)	Beam ID1	Beam ID2	Input Power Limit (dBm)	CC #	BW (MHz)	Modulation	RB #	Dist (mm)	DUT Surface	Standalone		with Battery Pack		Total psPD Delta (%)	Plot No.
															Normal psPD (W/m ²)	Total psPD (W/m ²)	Normal psPD (W/m ²)	Total psPD (W/m ²)		
FR2	n258	M3	CW	2018233	34250.0	47		-0.5	1	50	QPSK	1	2	Edge Right	3.67	4.85	2.18	3.12	-35.7%	7

Appendixes

Refer to separated files for the following appendixes.

Appendix A: Setup Photos

Appendix B: System Check Plots

Appendix C: Highest Test Plots

Appendix D: SAR Tissue Ingredients

Appendix E: Probe Certificates

Appendix F: SAR Dipole Certificates

Appendix G: 5G Source Certificate

END OF REPORT