

2618.396923	53.75	7.5	46.25	V
2662.048461	54.68	7.8	46.88	V

**GFSK Ch78 1GHz-3GHz (Average)**

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
2526.953846	41.76	6.8	34.96	H
2662.048461	42.6	7.8	34.8	V

**GFSK Ch78 3GHz-18GHz (Peak)**

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
12878.3308	52.46	16.9	35.56	V
13846.7208	53.6	18.5	35.1	H
14758.57073	54.94	20.8	34.14	H
15410.31067	55.82	22.7	33.12	V
16005.2648	59.4	25.4	34	V
16756.3598	58.93	26.6	32.33	V

**GFSK Ch78 3GHz-18GHz (Average)**

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
14758.57073	42.71	20.8	21.91	H
15410.31067	43.94	22.7	21.24	V
16005.2648	47.3	25.4	21.9	V
16756.3598	47.13	26.6	20.53	V

**Note: Only the worst case is written in the report.**

**Conclusion: PASS**

**Test graphs as below:**

**Main supply**

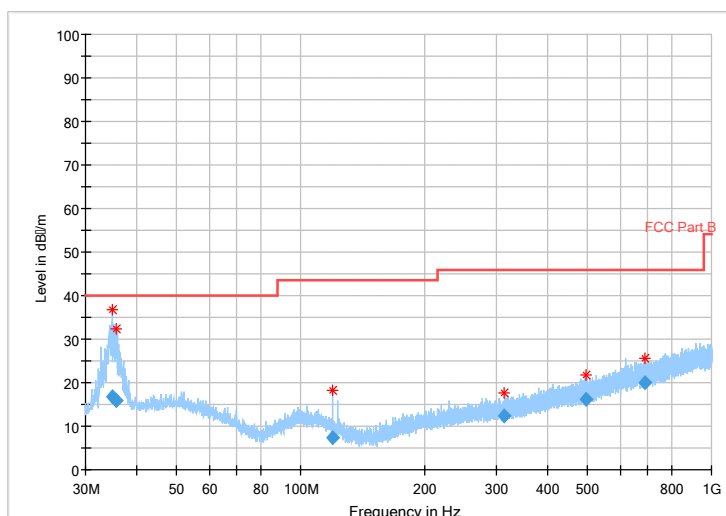


Fig.40 Radiated emission: GFSK, Ch78, 30MHz~1GHz

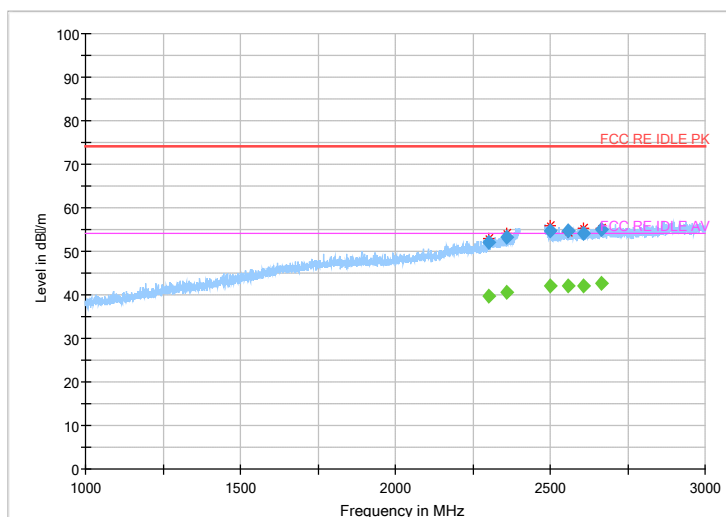


Fig.41 Radiated emission: GFSK, Ch78, 1GHz~3GHz

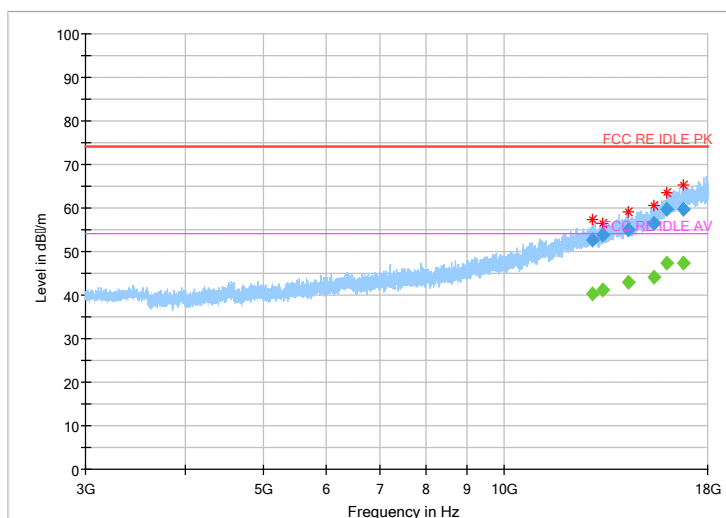


Fig.42 Radiated emission: GFSK, Ch78, 3GHz~18GHz

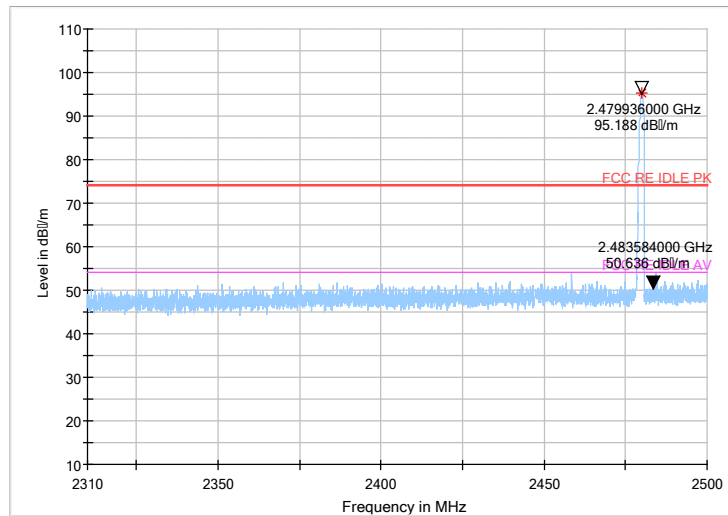


Fig.43 Radiated emission (Power): GFSK, low channel

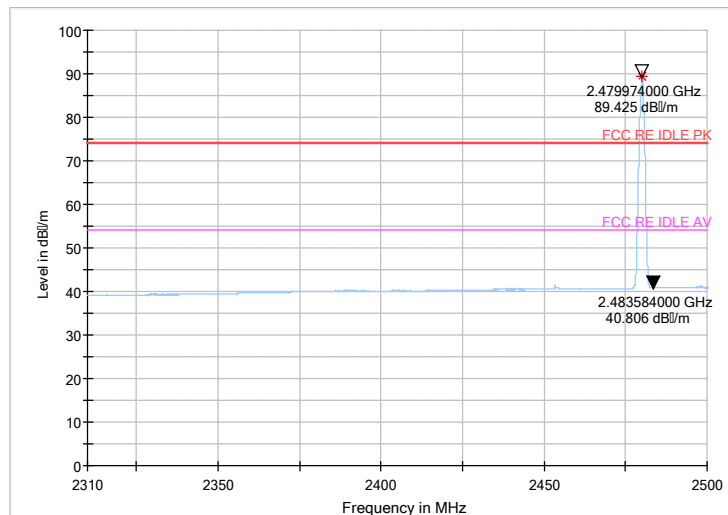


Fig.44 Radiated emission (Power): GFSK, high channel

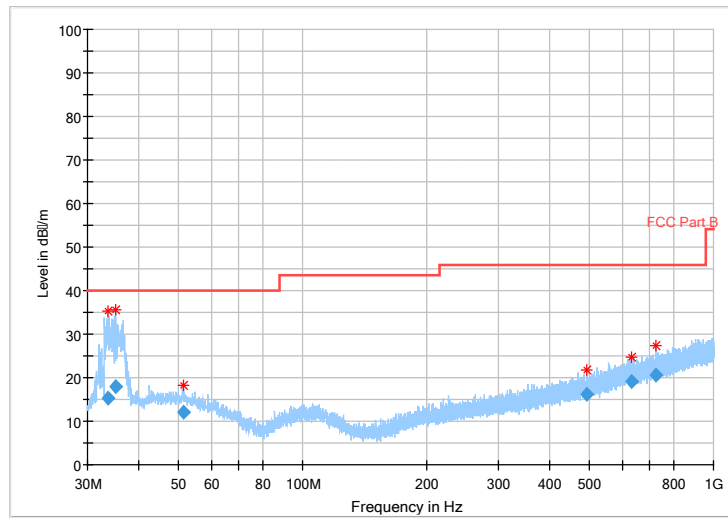


Fig.45 Radiated emission:  $\pi/4$  DQPSK, Ch78, 30MHz~1GHz

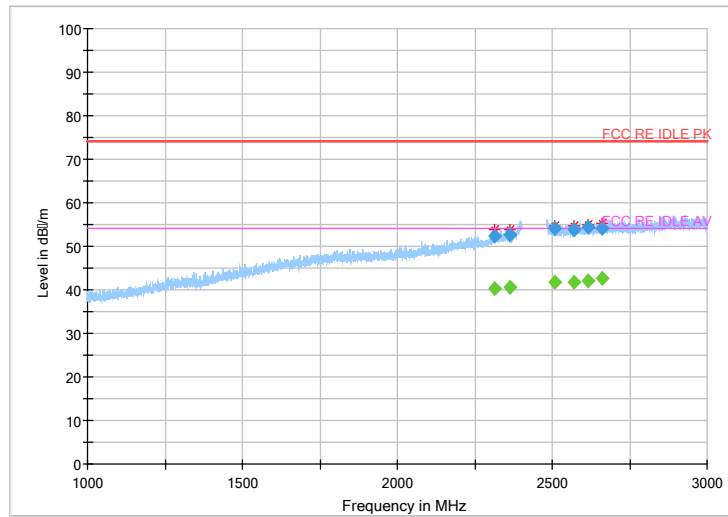


Fig.46 Radiated emission:  $\pi/4$  DQPSK, Ch78, 1GHz~3GHz

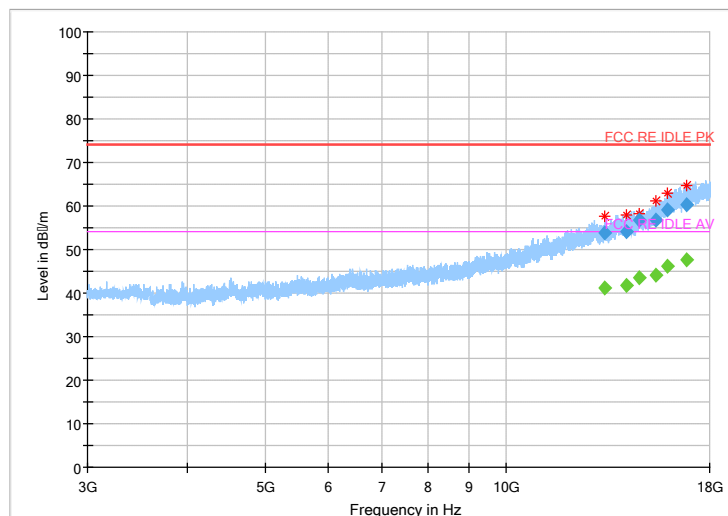


Fig.47 Radiated emission:  $\pi/4$  DQPSK, Ch78, 3GHz~18GHz

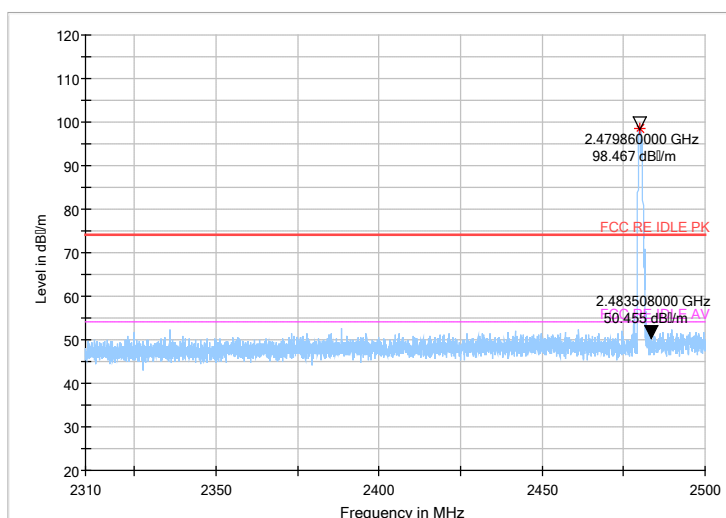


Fig.48 Radiated emission (Power):  $\pi/4$  DQPSK, low channel

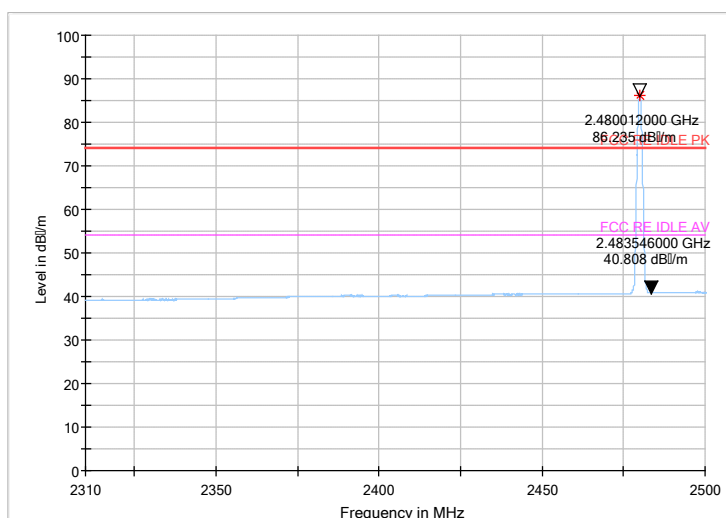


Fig.49 Radiated emission (Power):  $\pi/4$  DQPSK, high channel

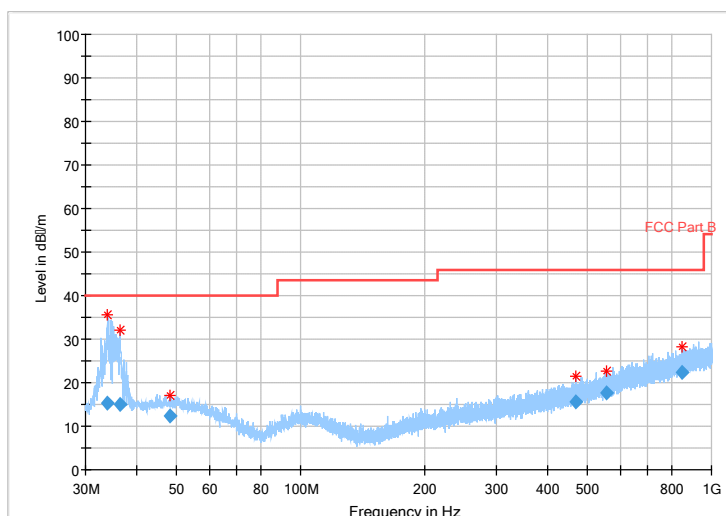


Fig.50 Radiated emission: 8DPSK, Ch78, 30MHz~1GHz

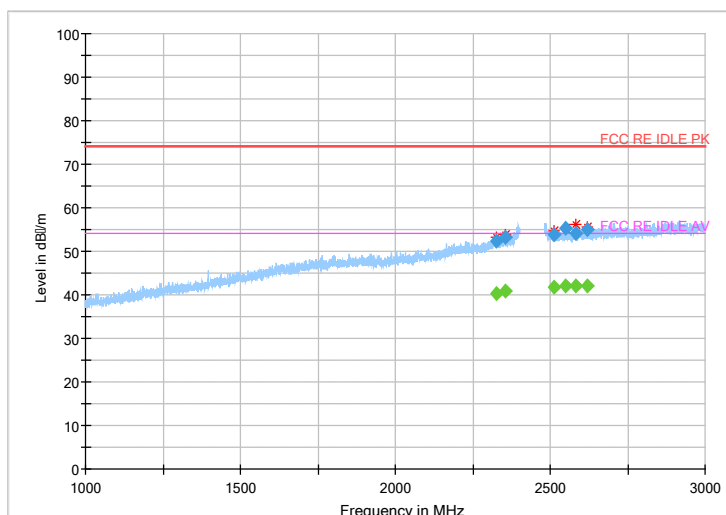


Fig.51 Radiated emission: 8DPSK, Ch78, 1GHz~3GHz

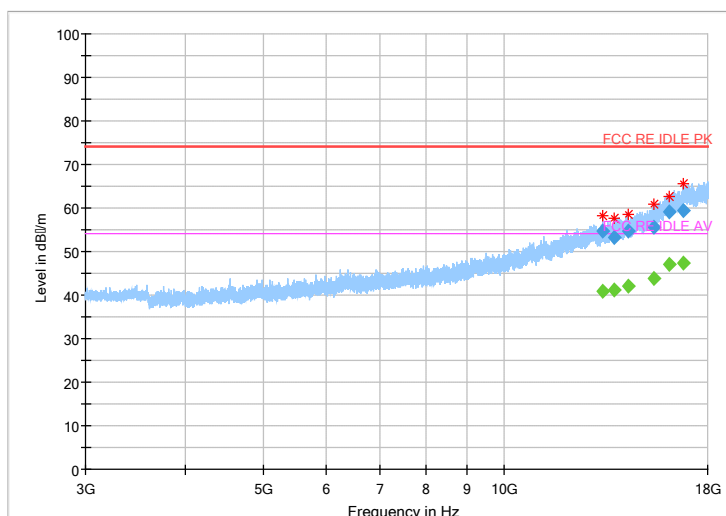


Fig.52 Radiated emission: 8DPSK, Ch78, 3GHz~18GHz

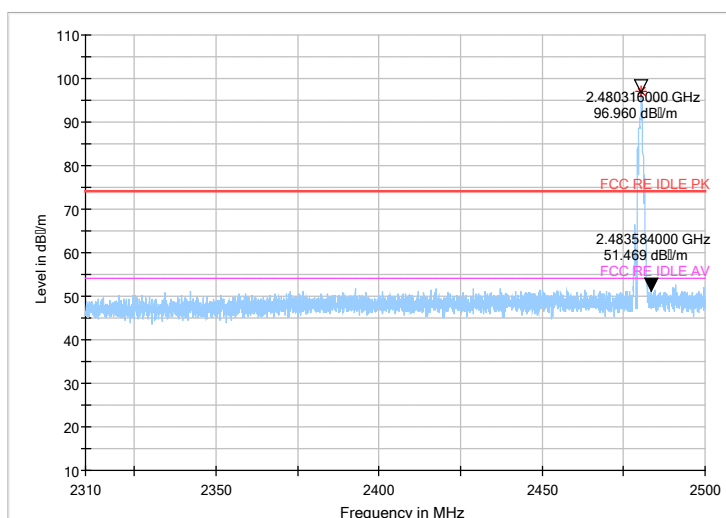


Fig.53 Radiated emission (Power): 8DPSK, low channel

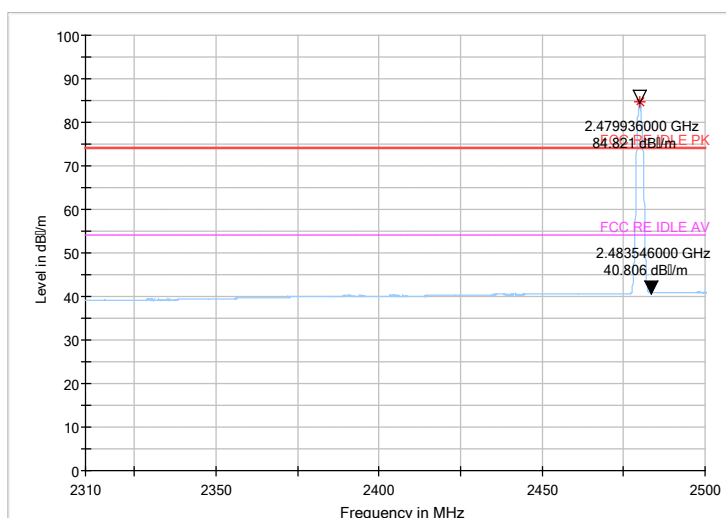


Fig.54 Radiated emission (Power): 8DPSK, high channel

Secondary supply

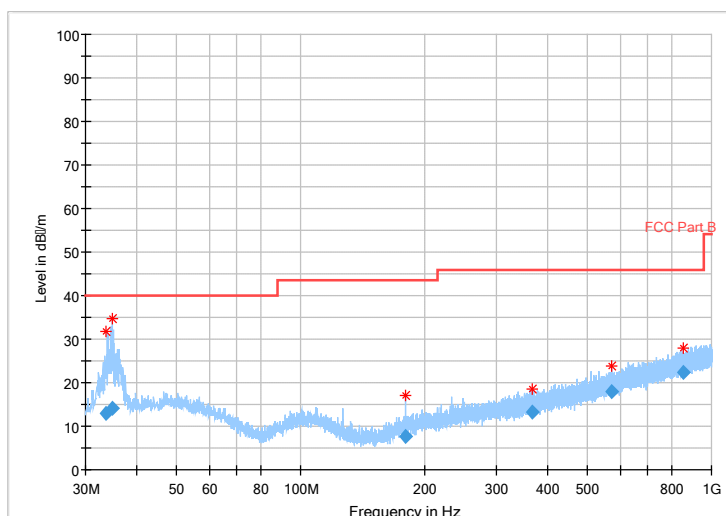


Fig.55 Radiated emission: GFSK, Ch78, 30MHz~1GHz

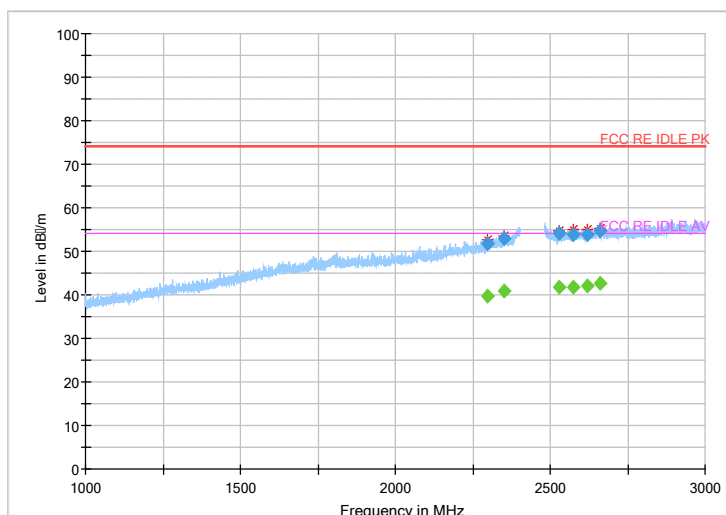


Fig.56 Radiated emission: GFSK, Ch78, 1GHz~3GHz

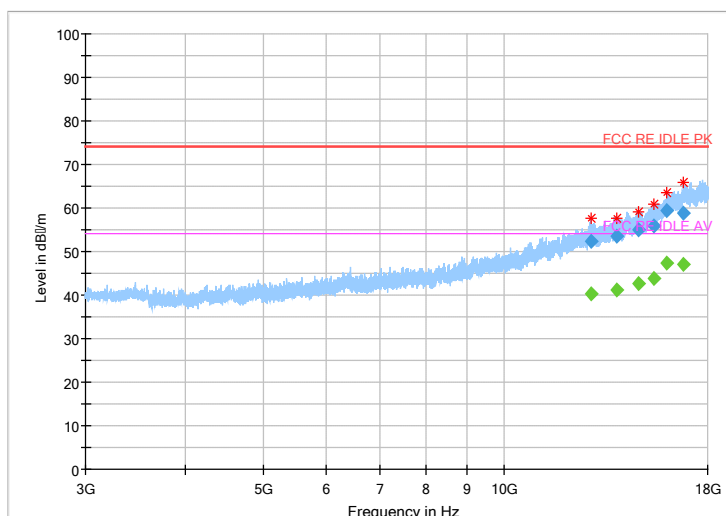




Fig.57 Radiated emission: GFSK, Ch78, 3GHz~18GHz

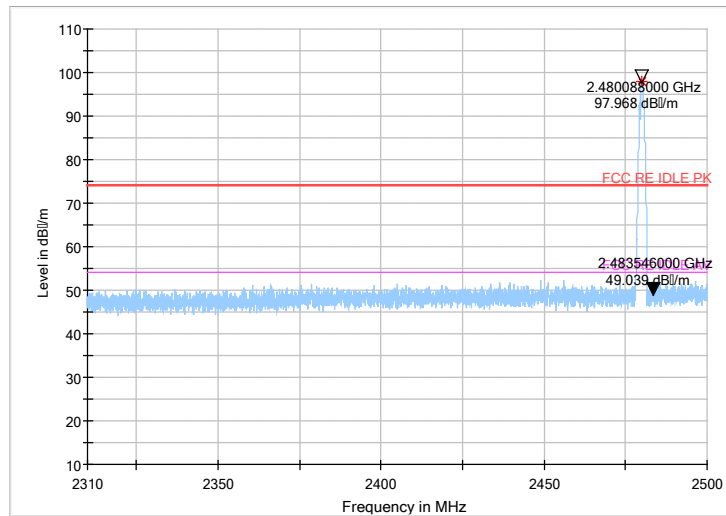


Fig.58 Radiated emission (Power): GFSK, low channel


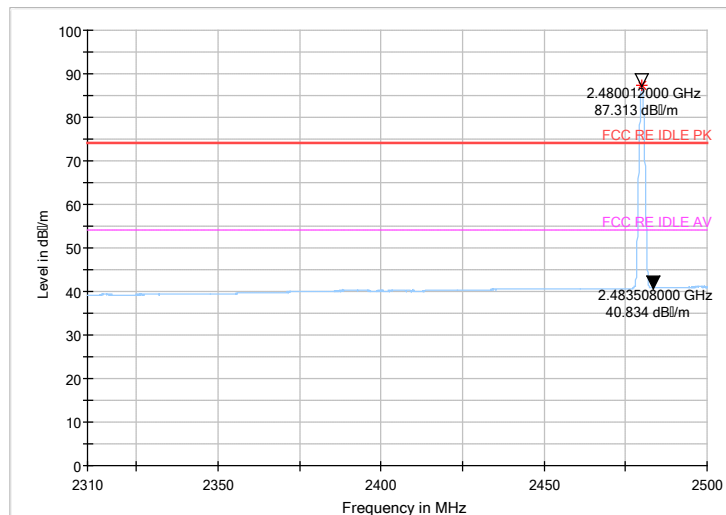


Fig.59 Radiated emission (Power): GFSK, high channel

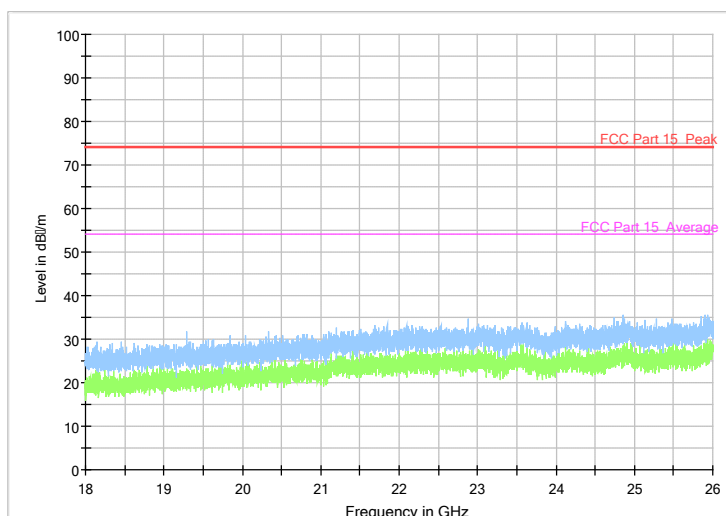

ALL Channel 18GHz~26GHz

## 6.5. Time Of Occupancy (Dwell Time)

### 6.5.1 Measurement Limit:

Standard	Limit (ms)
FCC 47CFR Part 15.247 (a) (1) (iii)	< 400

### 6.5.2 Test procedures

The measurement is according to ANSI C63.10 clause 7.8.4

1. Connect the EUT through cable and divide with CBT32 and spectrum analyzer.
2. Enable the EUT transmit maximum power.
3. Set the spectrum analyzer as step 4 to step 8.
4. Span: Zero span, centered on a hopping channel.
5. RBW shall be  $\leq$  channel spacing and where possible RBW should be set  $\gg 1 / T$ , where T is the expected dwell time per channel.
6. Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
7. Detector function: Peak.
8. Trace: Max hold.
9. Use the marker-delta function, and record it.

### 6.5.3 Measurement Result

**For GFSK**

Channel	Packet	Dwell Time (ms)		Conclusion
39	DH1	Fig.55	33.09	P
		Fig.56		
	DH3	Fig.57	194.21	P
		Fig.58		
	DH5	Fig.59	273.60	P
		Fig.60		


**For  $\pi/4$  DQPSK**

Channel	Packet	Dwell Time (ms)		Conclusion
39	2DH1	Fig.61	64.51	P
		Fig.62		
	2DH3	Fig.63	197.47	P
		Fig.64		
	2DH5	Fig.65	264.96	P
		Fig.66		

**For 8DPSK**


Channel	Packet	Dwell Time (ms)		Conclusion
39	3DH1	Fig.67	59.14	P
		Fig.68		
	3DH3	Fig.69	200.74	P
		Fig.70		
	3DH5	Fig.71	267.84	P
		Fig.72		

**Conclusion: PASS**
**Test graphs as below:**

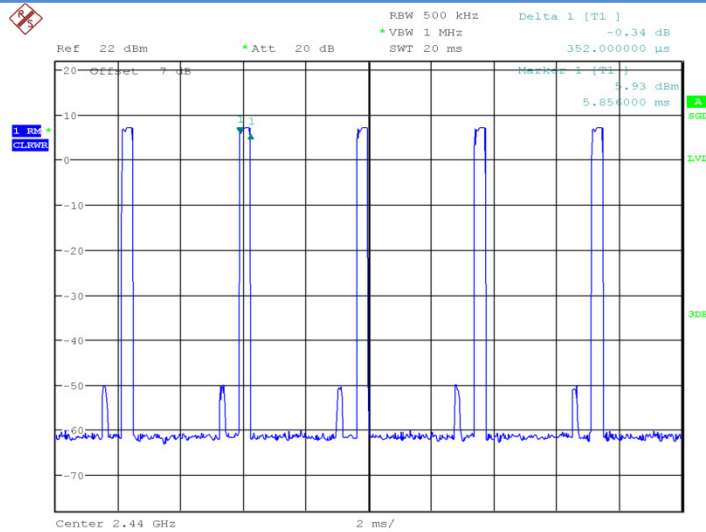


IF Overload  
Date: 1.JAN.2003 00:56:00

Fig.55 Time of occupancy (Dwell Time): Ch39, Packet DH1

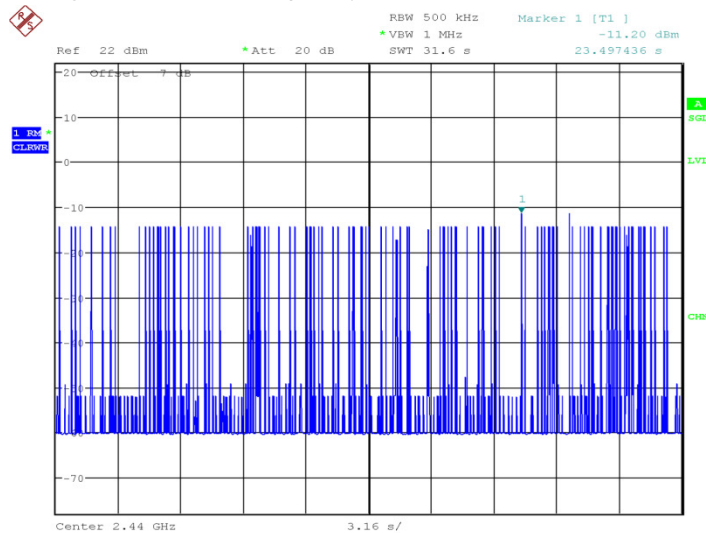


IF Overload  
Date: 1.JAN.2003 00:56:59

Fig.56 Number of Transmissions Measurement: Ch39, Packet DH1

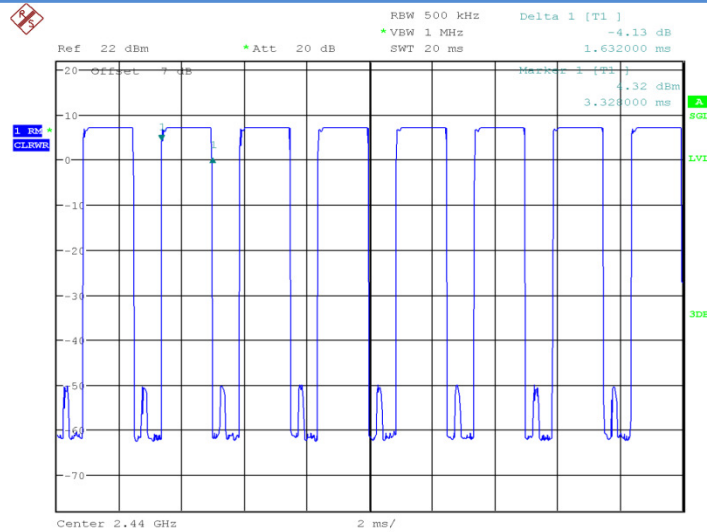


IF Overload  
 Date: 1.JAN.2003 00:44:40

Fig.57 Time of occupancy (Dwell Time): Ch39, Packet DH3

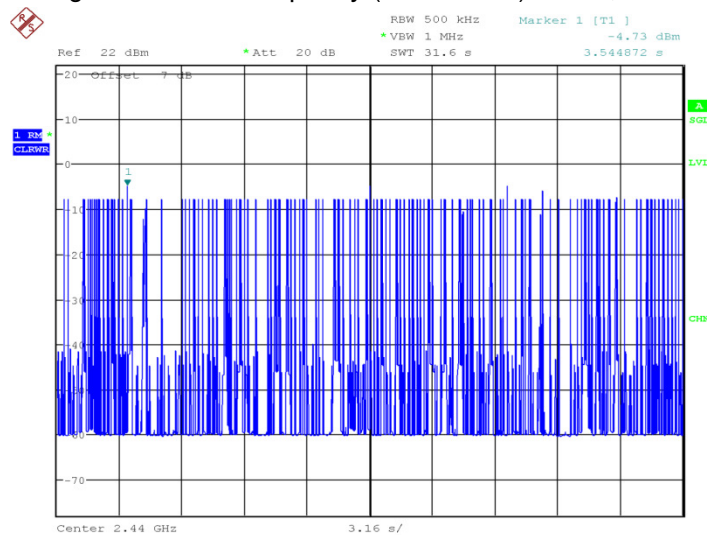


IF Overload  
 Date: 1.JAN.2003 00:45:40

Fig.58 Number of Transmissions Measurement: Ch39, Packet DH3

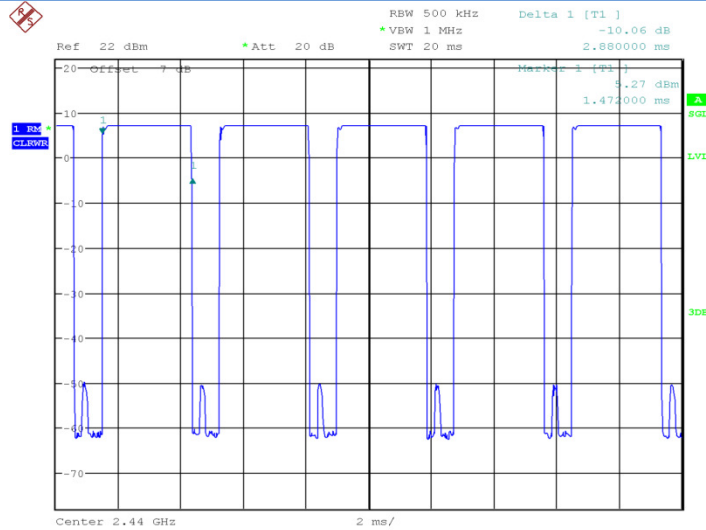


IF Overload  
Date: 1.JAN.2003 00:50:00

Fig.59 Time of occupancy (Dwell Time): Ch39,Packet DH5

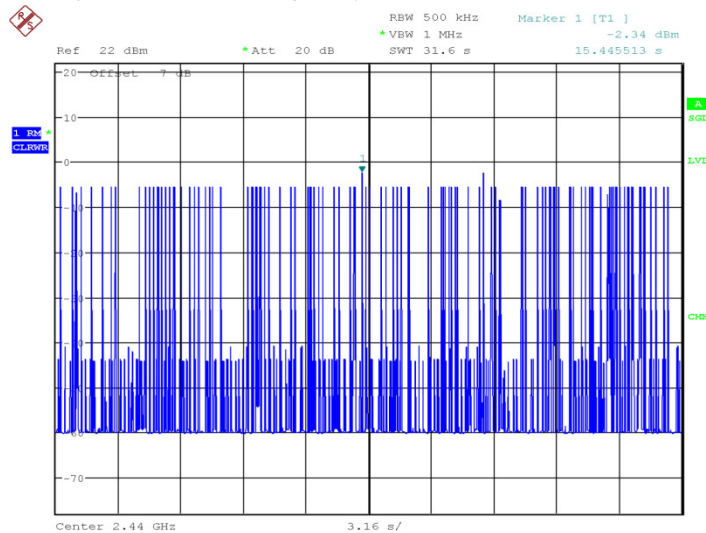


IF Overload  
Date: 1.JAN.2003 00:51:00

Fig.60 Number of Transmissions Measurement: Ch39, Packet DH5

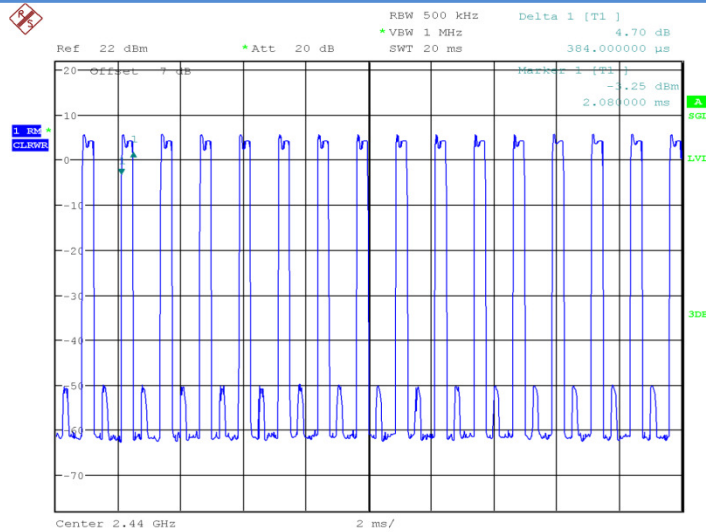


IF Overload  
Date: 1.JAN.2003 00:57:25

Fig.61 Time of occupancy (Dwell Time): Ch39, Packet 2-DH1

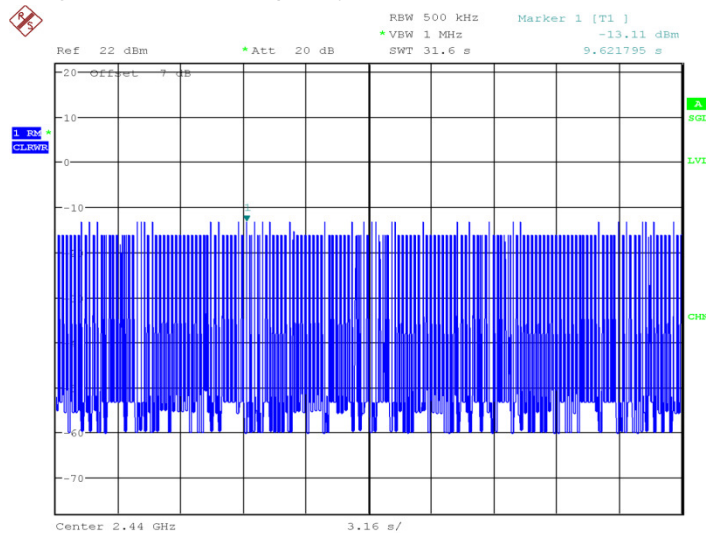


IF Overload  
Date: 1.JAN.2003 00:58:25

Fig.62 Number of Transmissions Measurement: Ch39, Packet 2-DH1

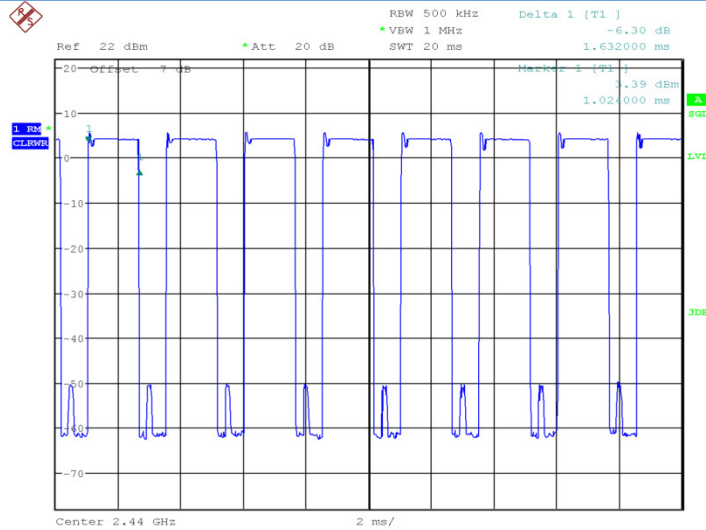

IF Overload  
Date: 1.JAN.2003 00:46:06


Fig.63 Time of occupancy (Dwell Time): Ch39,Packet 2-DH3

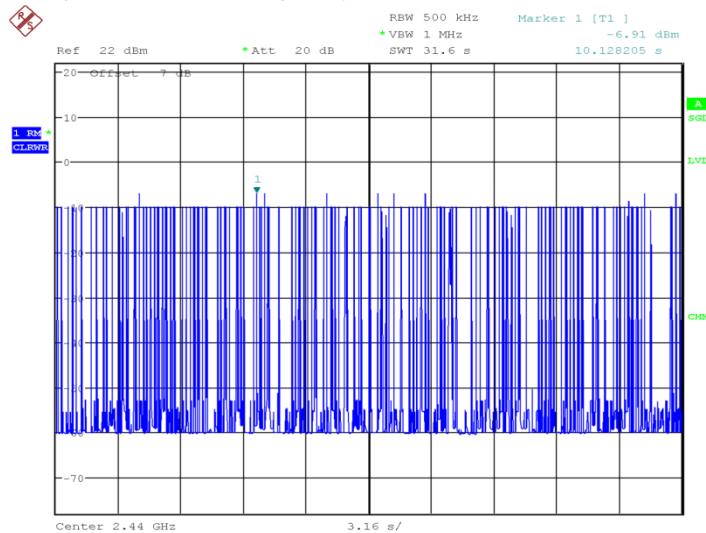

IF Overload  
Date: 1.JAN.2003 00:47:05


Fig.64 Number of Transmissions Measurement: Ch39, Packet 2-DH3



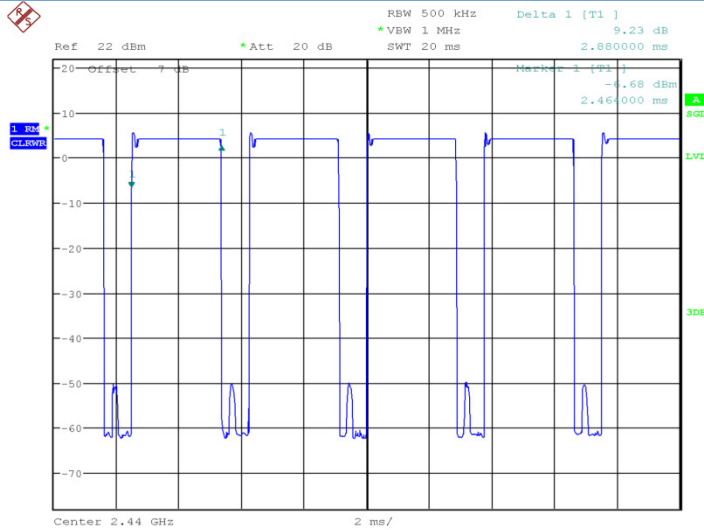


IF Overload  
 Date: 1.JAN.2003 00:51:26

Fig.65 Time of occupancy (Dwell Time): Ch39, Packet 2-DH5

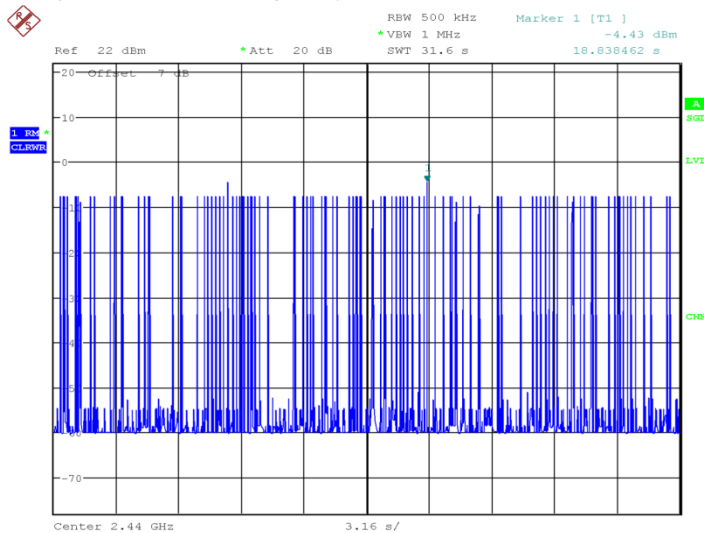


IF Overload  
 Date: 1.JAN.2003 00:52:25

Fig.66 Number of Transmissions Measurement: Ch39, Packet 2-DH5

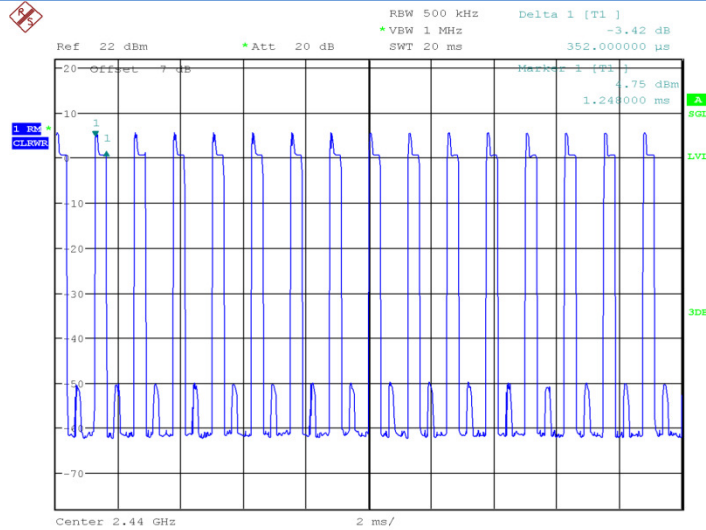


IF Overload  
Date: 1.JAN.2003 00:58:51

Fig.67 Time of occupancy (Dwell Time): Ch39,Packet 3-DH1

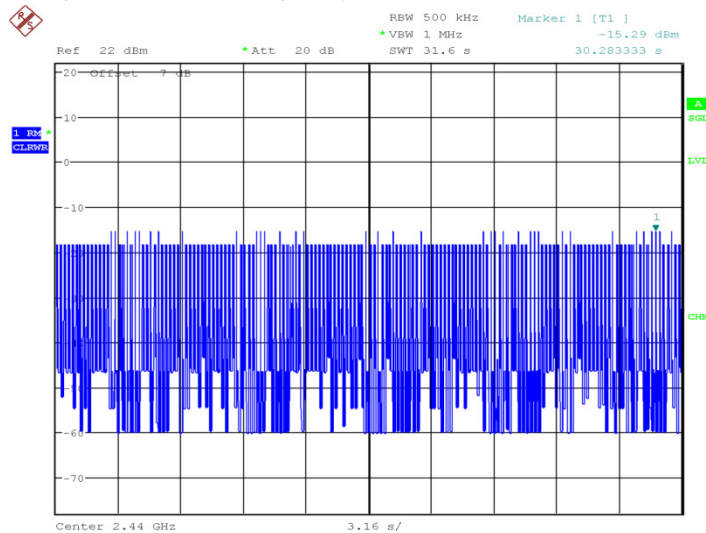


IF Overload  
Date: 1.JAN.2003 00:59:50

Fig.68 Number of Transmissions Measurement: Ch39, Packet 3-DH1

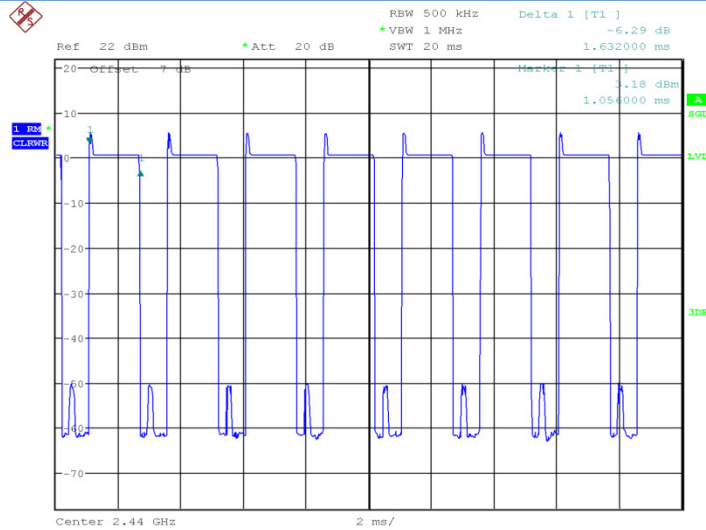


IF Overload  
 Date: 1.JAN.2003 00:47:31

Fig.69 Time of occupancy (Dwell Time): Ch39,Packet 3-DH3

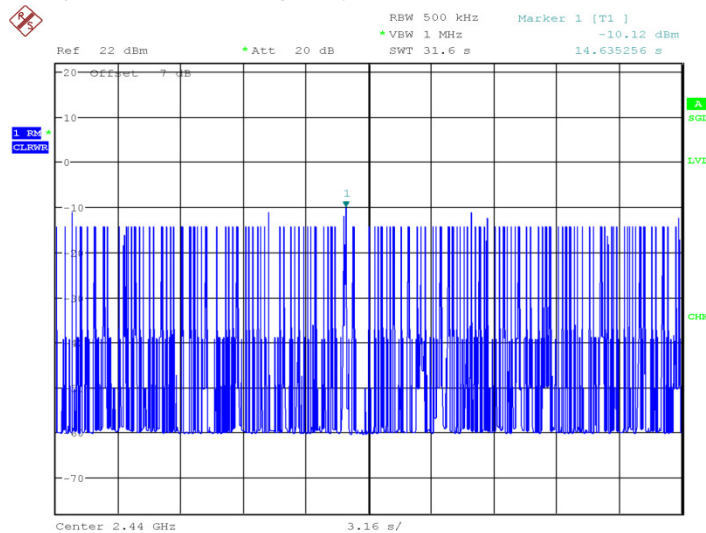


IF Overload  
 Date: 1.JAN.2003 00:48:30

Fig.70 Number of Transmissions Measurement: Ch39, Packet 3-DH3

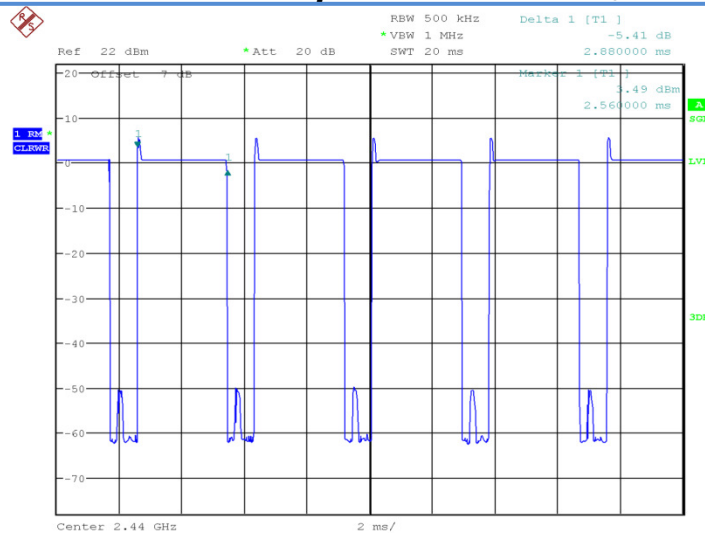

IF Overload  
 Date: 1.JAN.2003 00:52:51

Fig.71 Time of occupancy (Dwell Time): Ch39,Packet 3-DH5

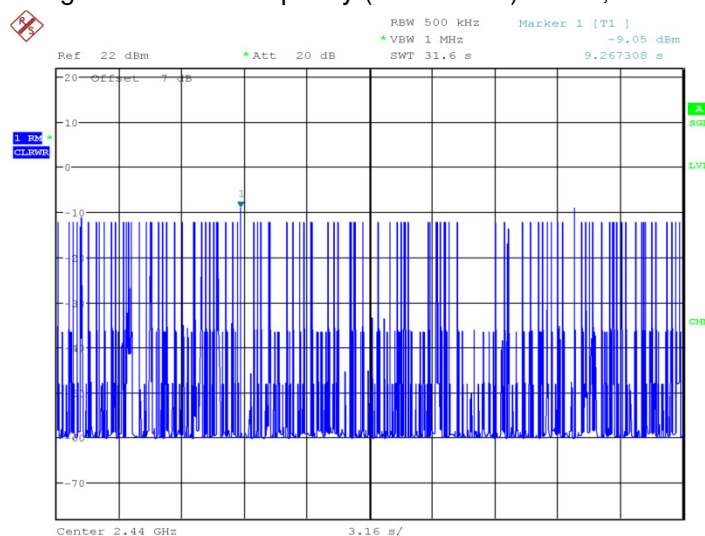

IF Overload  
 Date: 1.JAN.2003 00:53:50

Fig.72 Number of Transmissions Measurement: Ch39, Packet 3-DH5

## 6.6. 20dB Bandwidth

### 6.6.1 Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (a) (1)	N/A

## 6.6.2 Test procedures

The measurement is according to ANSI C63.10 clause 7.8.7

1. Connect the EUT through cable and divide with CBT32 and spectrum analyzer.
2. Enable the EUT transmit maximum power.
3. Set the spectrum analyzer as step 4 to step 7.
4. Span: two or five times of OBW
5. RBW= 1% to 5% of the OBW; VBW is approximately three times of RBW; Max Hold.
6. Select the max peak, and N DB DOWN=20dB.
7. Record the results.

### Measurement Result:

#### For GFSK

Channel	20dB Bandwidth (MHz)		Conclusion
0	Fig.73	1.029	P
39	Fig.74	1.034	P
78	Fig.75	1.029	P

#### For $\pi/4$ DQPSK


Channel	20dB Bandwidth (MHz)		Conclusion
0	Fig.76	1.091	P
39	Fig.77	1.087	P
78	Fig.78	1.087	P

#### For 8DPSK

Channel	20dB Bandwidth (MHz)		Conclusion
0	Fig.79	1.188	P
39	Fig.80	1.192	P
78	Fig.81	1.188	P


**Conclusion: PASS**

**Test graphs as below:**

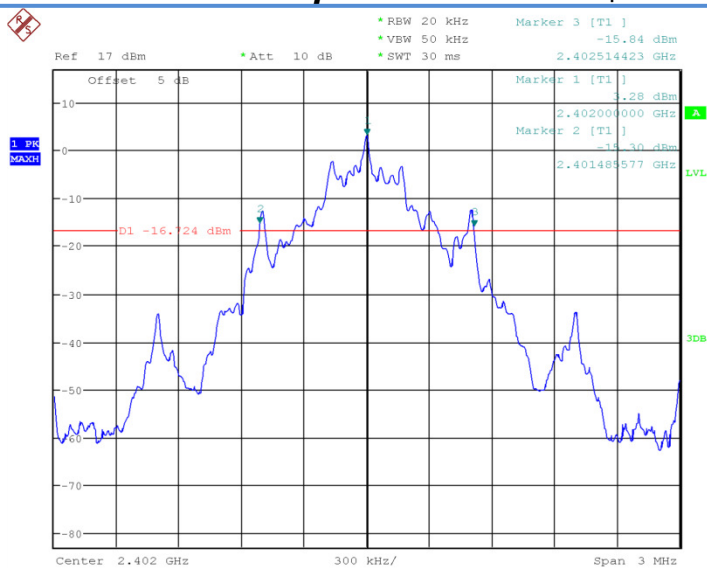


Date: 2.FEB.2018 15:43:37

Fig.73 20dB Bandwidth: GFSK, Ch0

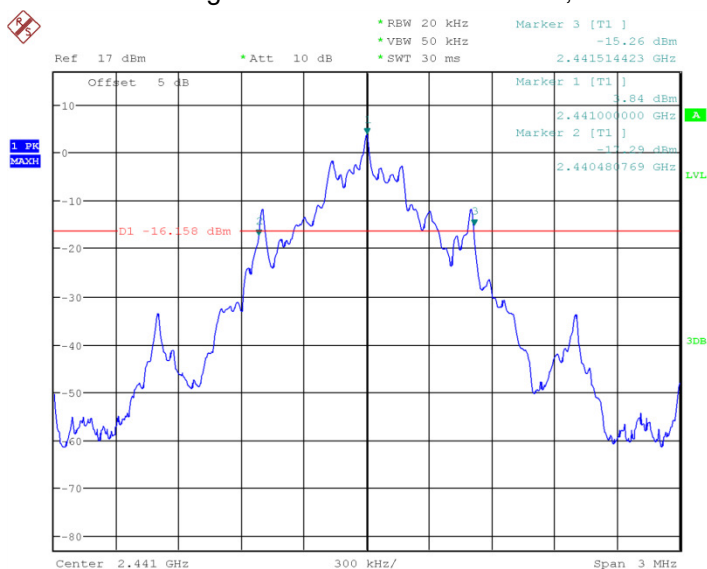


Date: 2.FEB.2018 15:43:54

Fig.74 20dB Bandwidth: GFSK, Ch39

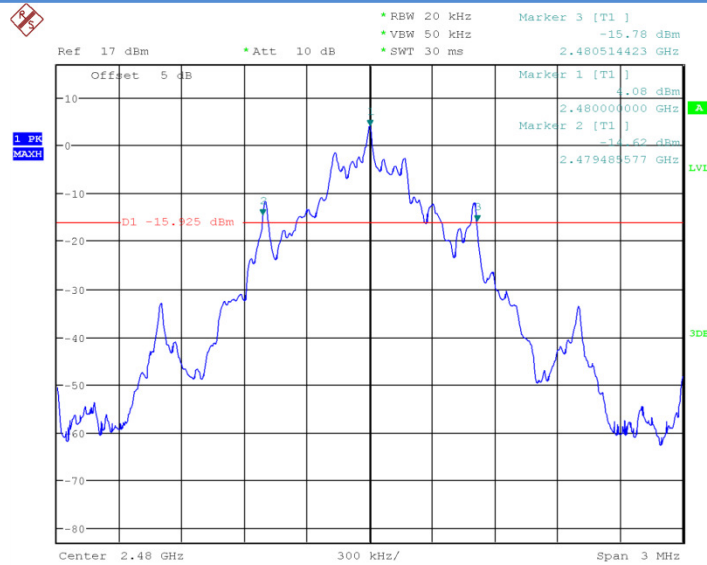


Date: 2.FEB.2018 15:44:10

Fig.75 20dB Bandwidth: GFSK, Ch78

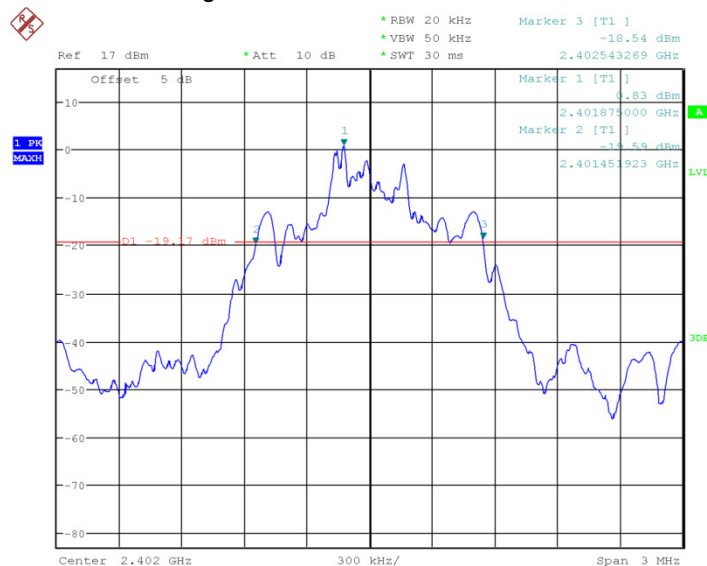


Date: 2.FEB.2018 15:44:27

Fig.76 20dB Bandwidth:  $\pi/4$  DQPSK, Ch0

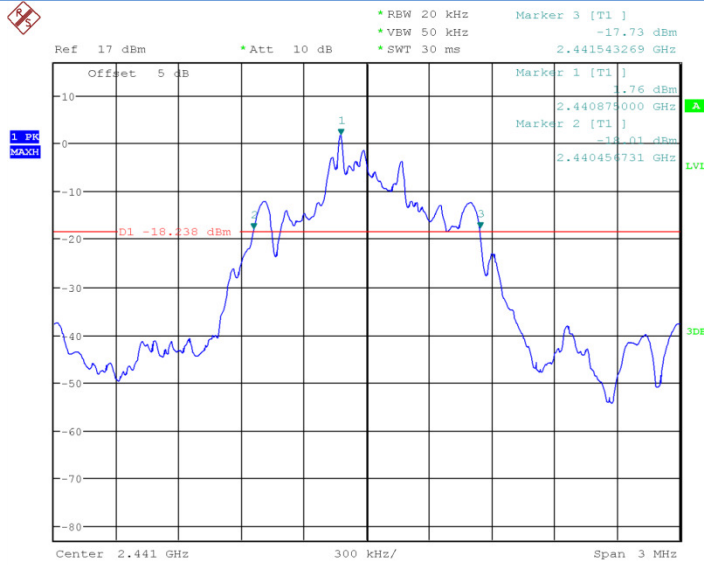

Date: 2.FEB.2018 15:44:43


Fig.77 20dB Bandwidth:  $\pi/4$  DQPSK, Ch39

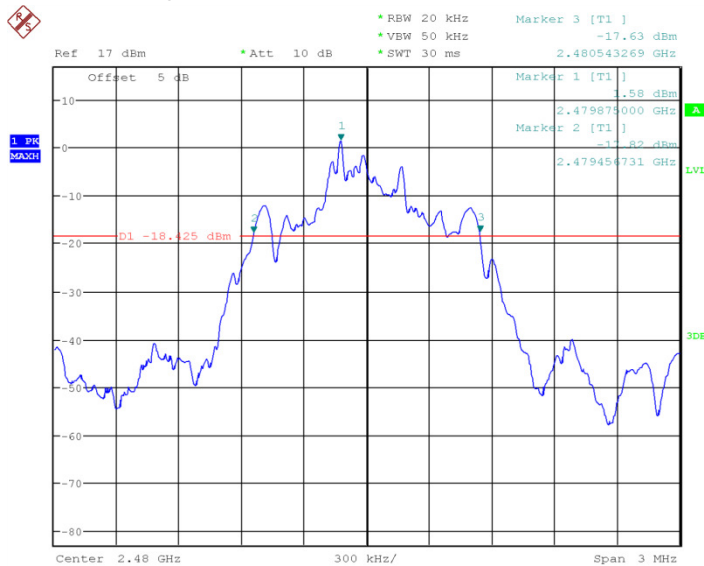

Date: 2.FEB.2018 15:45:00


Fig.78 20dB Bandwidth:  $\pi/4$  DQPSK, Ch78



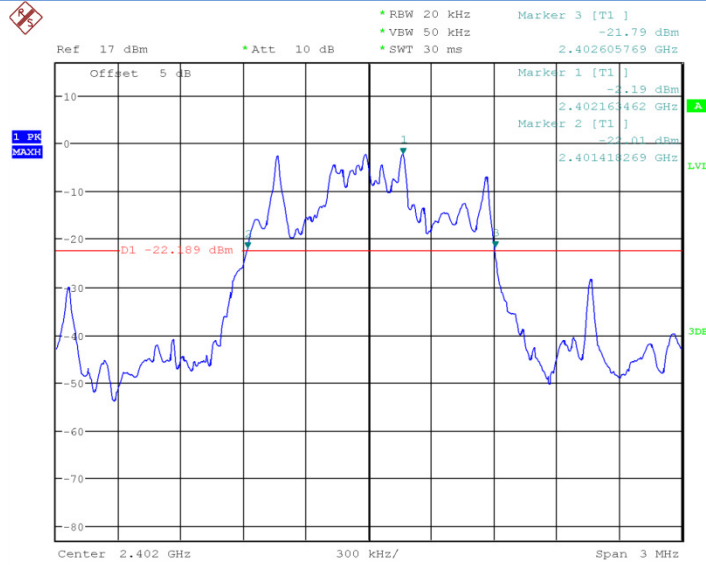


Date: 2.FEB.2018 15:45:16

Fig.79 20dB Bandwidth: 8DPSK, Ch0

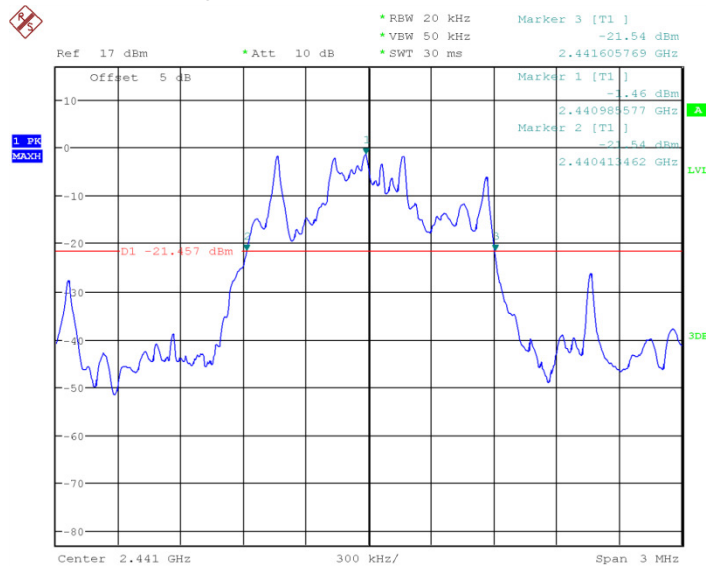

Date: 2.FEB.2018 15:45:33

Fig.80 20dB Bandwidth: 8DPSK, Ch39

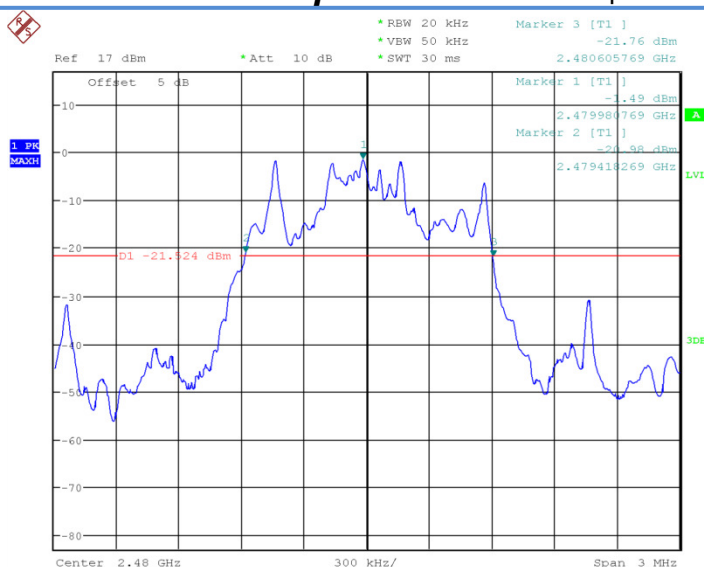

Date: 2.FEB.2018 15:45:50

Fig.81 20dB Bandwidth: 8DPSK, Ch78

## 6.7. Carrier Frequency Separation

### 6.7.1 Measurement Limit:

Standard	Limit (KHz)
FCC 47 CFR Part 15.247 (a) (1)	Over 25KHz or (2/3)*20dB bandwidth

### 6.7.2 Test procedures

The measurement is according to ANSI C63.10 clause 7.8.2.

1. Connect the EUT through cable and divide with CBT32 and spectrum analyzer.
2. Enable the EUT transmit in hopping mode.
3. Span: Wide enough to capture the peaks of two adjacent channels.
4. RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
5. Video (or average) bandwidth (VBW)  $\geq$  RBW.
6. Sweep: Auto.
7. Detector function: Peak.
8. Trace: Max hold.
9. Allow the trace to stabilize.

### 6.7.3 Measurement Result:

#### For GFSK

Channel	Carrier separation (KHz)	Conclusion
---------	--------------------------	------------

39	Fig.82	1024.0385	P
----	--------	-----------	---

## For $\pi/4$ DQPSK


Channel	Carrier separation (KHz)	Conclusion
39	Fig.83	1000
39	Fig.84	990.3846

## For 8DPSK

Channel	Carrier separation (KHz)	Conclusion
39	Fig.84	990.3846


**Conclusion: PASS**

**Test graphs as below:**

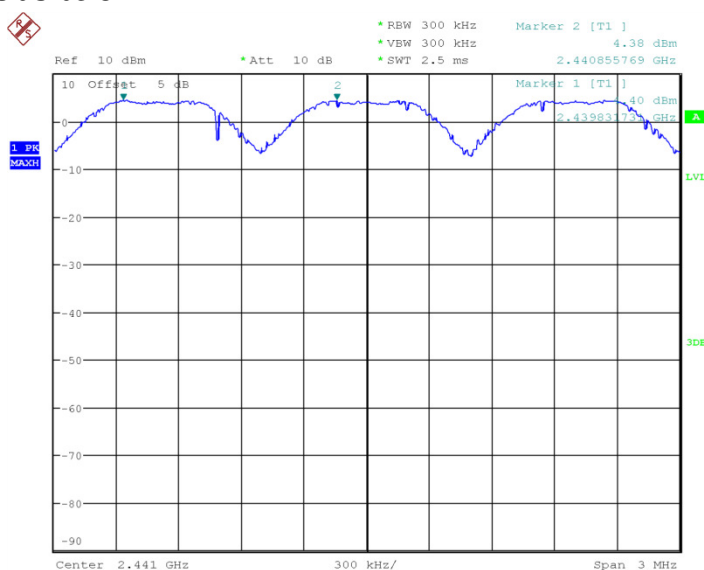


Date: 2.FEB.2018 15:47:36

Fig.82 Carrier separation measurement: GFSK, Ch39

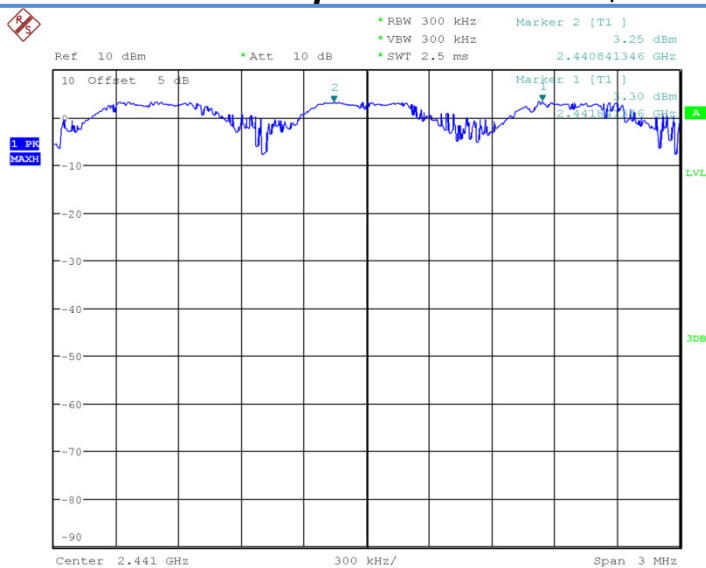

Date: 2.FEB.2018 15:48:49

Fig.83 Carrier separation measurement:  $\pi/4$  DQPSK, Ch39

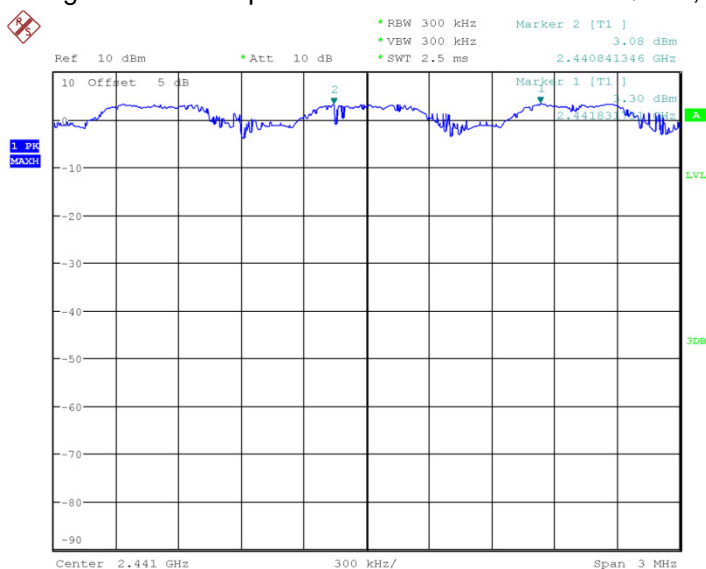

Date: 2.FEB.2018 15:50:03

Fig.84 Carrier separation measurement: 8DPSK, Ch39

## 6.8. Number Of Hopping Channels

### 6.8.1 Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (a)(1)(iii)	At least 15 non-overlapping channels

## 6.8.2 Test procedure

The measurement is according to ANSI C63.10 clause 7.8.3.

1. Connect the EUT through cable and divide with CBT32 and spectrum analyzer.
2. Enable the EUT transmit in hopping mode.
3. Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
4. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
5. VBW  $\geq$  RBW.
6. Sweep: Auto.
7. Detector function: Peak.
8. Trace: Max hold.
9. Allow the trace to stabilize.
10. Record the test results.

## 6.8.3 Measurement Result:

### For GFSK

Channel	Number of hopping channels		Conclusion
0~39	Fig.85	79	P
40~78	Fig.86		P

### For $\pi/4$ DQPSK


Channel	Number of hopping channels		Conclusion
0~39	Fig.87	79	P
40~78	Fig.88		P

### For 8DPSK

Channel	Number of hopping channels		Conclusion
0~39	Fig.89	79	P
40~78	Fig.90		P


**Conclusion: PASS**

**Test graphs as below:**

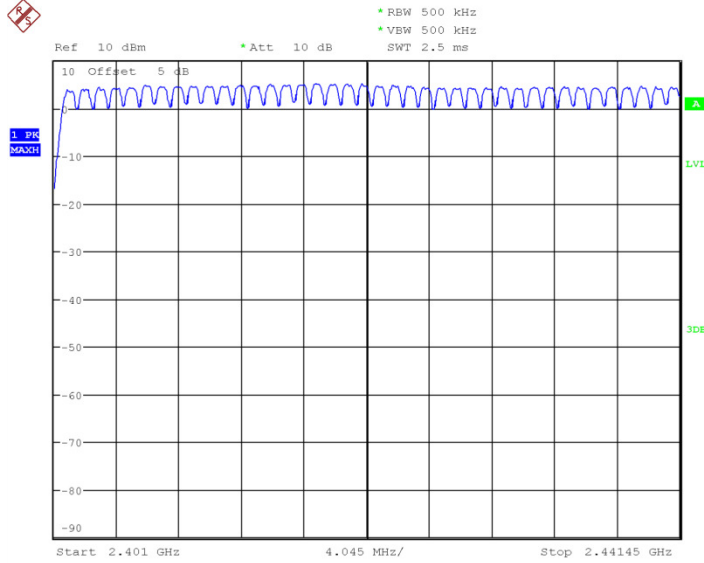


Date: 2.FEB.2018 15:52:40

Fig.85 Number of hopping frequency: GFSK, Ch0~39

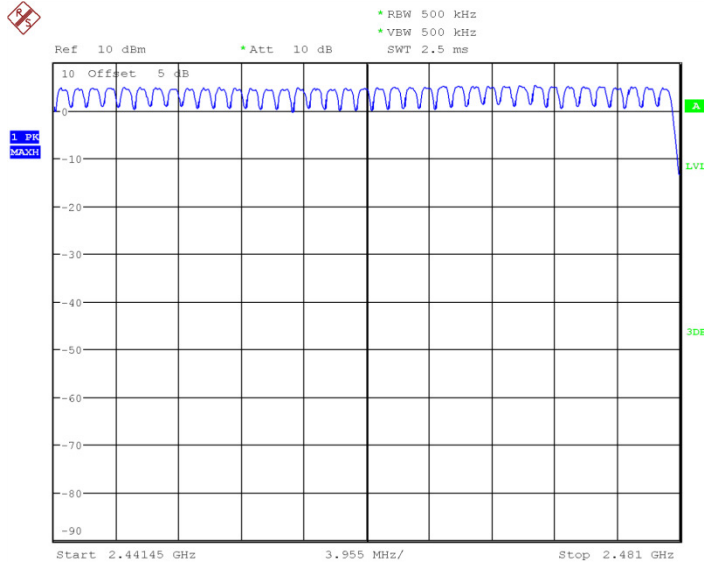


Date: 2.FEB.2018 15:54:45

Fig.86 Number of hopping frequency: GFSK, Ch40~78

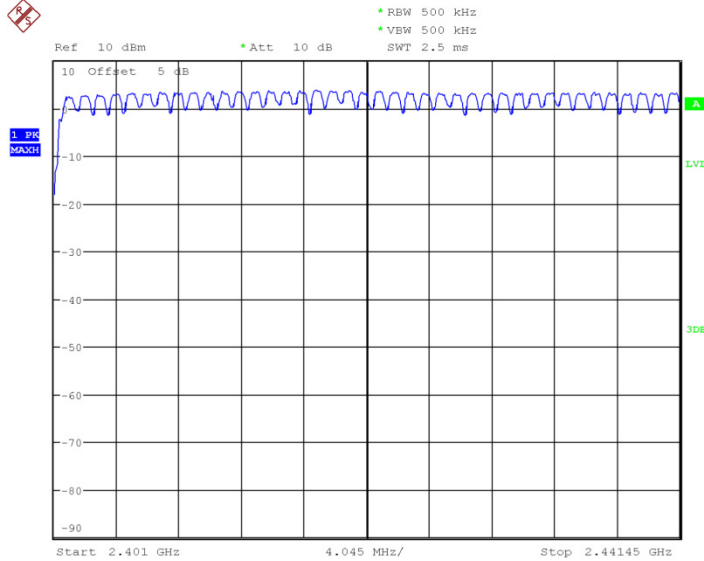


Date: 2.FEB.2018 15:56:50

Fig.87 Number of hopping frequency:  $\pi/4$  DQPSK, Ch0~39

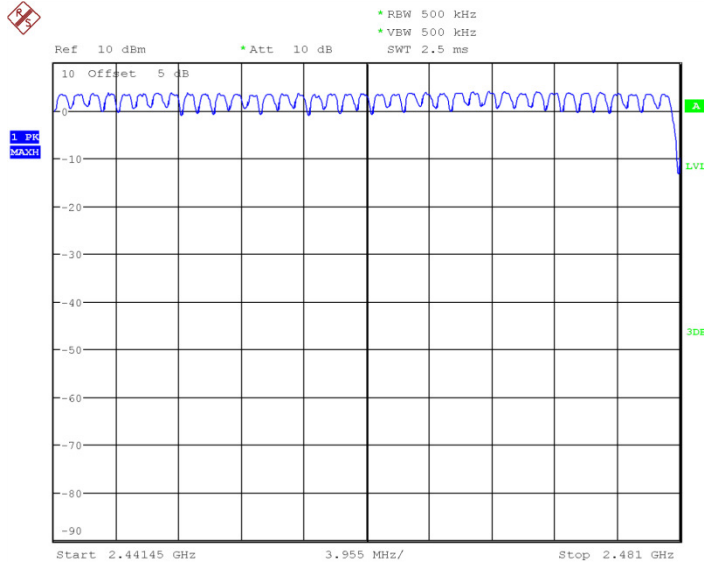


Date: 2.FEB.2018 15:58:55

Fig.88 Number of hopping frequency:  $\pi/4$  DQPSK, Ch40~78

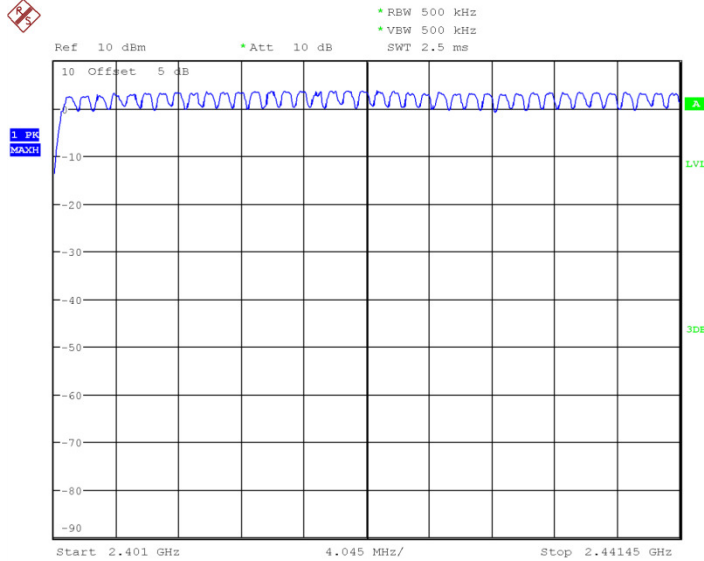

Date: 2.FEB.2018 16:01:00

Fig.89 Number of hopping frequency: 8DPSK, Ch0~39

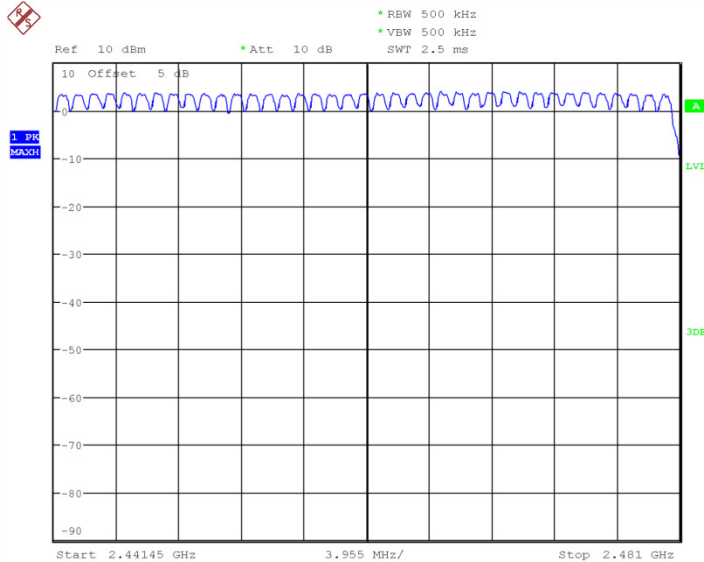

Date: 2.FEB.2018 16:03:05

Fig.90 Number of hopping frequency: 8DPSK, Ch40~78



**6.9. AC Powerline Conducted Emission****Method of Measurement: See ANSI C63.10-2013-clause 6.2**

- 1 The one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT.
- 2 If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed.
- 3 The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation.
- 4 If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.

If the EUT uses a detachable antenna, these measurements shall be made with a suitable dummy load connected to the antenna output terminals; otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. When measuring the ac conducted emissions from a device that operates between 150 kHz and 30 MHz a non-detachable antenna may be replaced with a dummy load for the measurements within the fundamental emission band of the transmitter, but only for those measurements.<sup>36</sup> Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency. Diagram or photograph the test setup that was used. See Clause 8 for full reporting requirements.

**Test Condition:**

Voltage (V)	Frequency (Hz)
120	60


**Measurement Result and limit:**

(Quasi-peak-average Limit)

Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Average Limit (dB $\mu$ V)	Result (dB $\mu$ V)	Conclusion
			With charger	
			BT	
0.15 to 0.5	66 to 56	56 to 46	Fig.91	P
0.5 to 5	56	46		
5 to 30	60	50		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

**Conclusion: Pass**

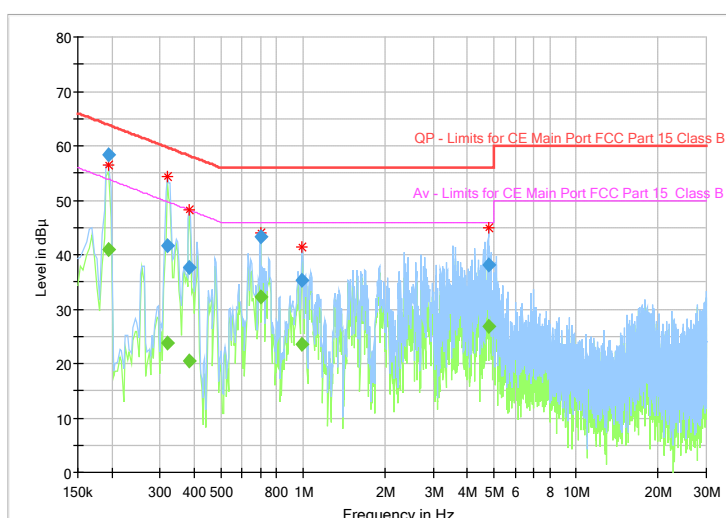

**Fig.91 AC Powerline Conducted Emission**

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Average (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.194775	---	41.02	53.83	12.81	1000.0	9.000	N	ON	9.6
0.194775	58.34	---	63.83	5.49	1000.0	9.000	N	ON	9.6
0.317906	41.75	---	59.76	18.01	1000.0	9.000	L1	ON	9.6
0.317906	---	23.87	49.76	25.89	1000.0	9.000	L1	ON	9.6
0.385069	37.61	---	58.17	20.56	1000.0	9.000	N	ON	9.7
0.385069	---	20.49	48.17	27.68	1000.0	9.000	N	ON	9.7
0.698494	43.22	---	56.00	12.78	1000.0	9.000	L1	ON	9.7
0.698494	---	32.15	46.00	13.85	1000.0	9.000	L1	ON	9.7
0.993262	35.31	---	56.00	20.69	1000.0	9.000	L1	ON	9.7
0.993262	---	23.56	46.00	22.44	1000.0	9.000	L1	ON	9.7
4.769288	---	26.77	46.00	19.23	1000.0	9.000	N	ON	9.7
4.769288	38.02	---	56.00	17.98	1000.0	9.000	N	ON	9.7

## 7. Test Equipment and Ancillaries Used For Tests

The test equipments and ancillaries used are as follows.

### Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration date	Cal.interval
1	Vector Signal	FSQ26	101096	Rohde&Schwarz	2017-05-11	1 Year
2	DC Power Supply	ZUP60-14	LOC-220Z006	TDL-Lambda	2017-05-11	1 Year
3	Bluetooth Tester	CBT32	100785	Rohde&Schwarz	2017-05-11	1 Year

### Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration date	Cal.interval
1	Universal Radio Communication Tester	CMU200	123123	R&S	2017-05-11	1 Year
2	EMI Test Receiver	ESU40	100307	R&S	2017-05-11	1 Year
3	TRILOG Broadband Antenna	VULB9163	VULB9163-515	Schwarzbeck	2017-02-25	3 Year
4	Double- ridged Waveguide Antenna	ETS-3117	00135890	ETS	2017-01-11	3 Year
5	2-Line V-Network	ENV216	101380	R&S	2017-05-11	1 Year

**Anechoic chamber**

Fully anechoic chamber by Frankonia German.

**8. Test Environment**

**Shielding Room1** (6.0 meters×3.0 meters×2.7 meters) did not exceed following limits along the conducted RF performance testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Ground system resistance	< 0.5 Ω

**Control room** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

**Fully-anechoic chamber1** (6.9 meters×10.9 meters×5.4 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 25 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
VSWR	Between 0 and 6 dB, from 1GHz to 18GHz
Site Attenuation Deviation	Between -4 and 4 dB, 30MHz to 1GHz
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

## **ANNEX A. Deviations from Prescribed Test Methods**

No deviation from Prescribed Test Methods.

**ANNEX B. Accreditation Certificate**

\*\*\*\*\*END OF REPORT\*\*\*\*\*