



TESTING LABORATORY
CERTIFICATE#4323.01



FCC PART 15.247

TEST REPORT

For

ShangHai Ehong Technology Co.,Ltd.

Suite501, No.3 building, No.439 Jinglian road, Minhang district, Shanghai, China

FCC ID: 2ACCRHOMEHUB100

Report Type: Original Report	Product Type: Development Kit
Test Engineer:	Winnie Yang Winnie Yang
Report Number:	RSHF200528002-00B
Report Date:	2020-08-07
Reviewed By:	Oscar Ye EMC Manager Oscar Ye
Prepared By:	Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu province, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	7
SUPPORT EQUIPMENT LIST AND DETAILS	11
EXTERNAL I/O CABLE.....	11
BLOCK DIAGRAM OF TEST SETUP	11
SUMMARY OF TEST RESULTS	13
TEST EQUIPMENT LIST	14
FCC §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)	15
FCC §15.203 - ANTENNA REQUIREMENT.....	17
APPLICABLE STANDARD	17
ANTENNA CONNECTOR CONSTRUCTION	17
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	18
APPLICABLE STANDARD	18
EUT SETUP	18
EMI TEST RECEIVER SETUP.....	18
TEST PROCEDURE	19
FACTOR & OVER LIMIT CALCULATION.....	19
TEST RESULTS SUMMARY	19
TEST DATA	19
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	28
APPLICABLE STANDARD	28
EUT SETUP	28
EMI TEST RECEIVER SETUP.....	29
TEST PROCEDURE	29
CORRECTED AMPLITUDE & MARGIN CALCULATION	29
TEST RESULTS SUMMARY	29
TEST DATA	30
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	69
APPLICABLE STANDARD	69
TEST PROCEDURE	69
TEST DATA	69
FCC §15.247(b) (3) - Maximum CONDUCTED Output Power.....	80
APPLICABLE STANDARD	80
TEST PROCEDURE	80
TEST DATA	81
FCC §15.247(d) – BAND EDGE.....	86
APPLICABLE STANDARD	86
TEST PROCEDURE	86
TEST DATA	86

FCC §15.247(e) - Power Spectral Density.....	93
APPLICABLE STANDARD	93
TEST PROCEDURE	93
TEST DATA	93

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant	ShangHai Ehong Technology Co.,Ltd.
Tested Model	Home Hub 100
Product Type	Development Kit
Power Supply	DC 5 V
RF Function	2.4G Wi-Fi, BLE(1Mbps), BLE(2Mbps)
Operating Band/Frequency	2.4G Wi-Fi: 2412~2462 MHz (802.11b/g/n20), 2422~2452 MHz (802.11n40) BLE(1Mbps)/BLE(2Mbps): 2402-2480 MHz
Channel Number	2.4G Wi-Fi: 11 (802.11b/g/n20), 7(802.11n40), BLE(1Mbps)/BLE(2Mbps): 40
Channel Separation	2.4G Wi-Fi: 5MHz, BLE(1Mbps)/BLE(2Mbps): 2 MHz
Modulation Type	Wi-Fi: OFDM,DSSS; BLE(1Mbps)/BLE(2Mbps): GFSK
Antenna Type	2.4G Wi-Fi/BLE(1Mbps)/BLE(2Mbps): PCB Antenna
Maximum Antenna Gain	Wi-Fi/ BLE(1Mbps)/BLE(2Mbps): 1 dBi

**All measurement and test data in this report was gathered from production sample serial number: 20200528002.
(Assigned by the BACL. The EUT supplied by the applicant was received on 2020-05-28)*

Objective

This report is prepared on behalf of *ShangHai Ehong Technology Co.,Ltd.* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine Compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DTS submittal with FCC ID: 2ACCRHOMEHUB100.

FCC Part 15.407 NII submittal with FCC ID: 2ACCRHOMEHUB100.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01 and CAB identifier CN0004 under the ISED requirement. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

Test channel list is as below:

For 802.11b, 802.11g and 802.11n-HT20 mode, EUT was tested with Channel 1, 6 and 11.

For 802.11n-HT40 mode, EUT was tested with Channel 3, 6 and 9.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For BLE mode, EUT was tested with channel 0, 19 and 39.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	...	...
...	...	...	...
...	...	...	...
18	2438	38	2478
19	2440	39	2480

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software


RF test tool: QRCT4.0

Pre-scan with all the data rates, and the worst case was performed as below:


Mode	Data Rate	Channel	Power Level
802.11b	1 Mbps	Low	20
		Middle	20
		High	20
802.11g	6 Mbps	Low	19
		Middle	18
		High	18
802.11n-HT20	MCS0	Low	19
		Middle	18
		High	18
802.11n-HT40	MCS0	Low	19
		Middle	18
		High	18
BLE	1Mbps	Low	9
		Middle	9
		High	9
	2Mbps	Low	9
		Middle	9
		High	9

Duty Cycle:


802.11b Mode Middle Channel

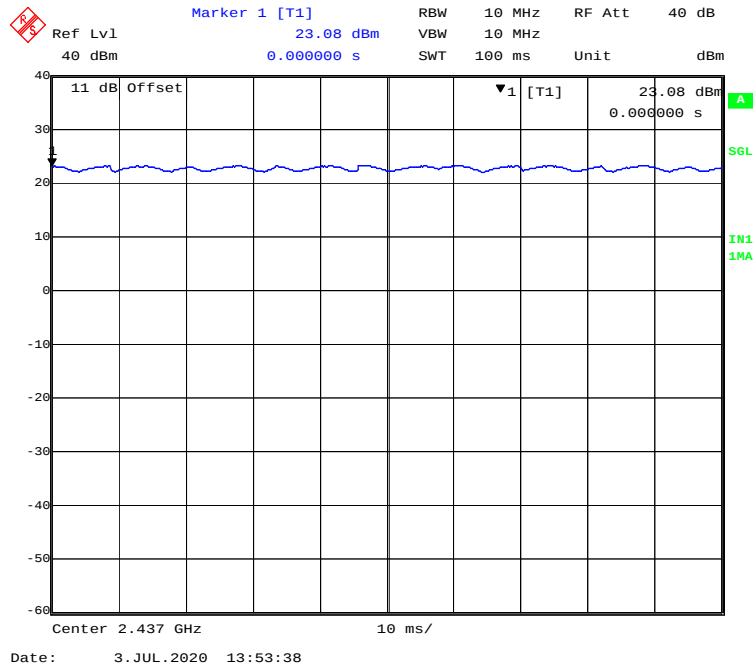


802.11g Mode Middle Channel

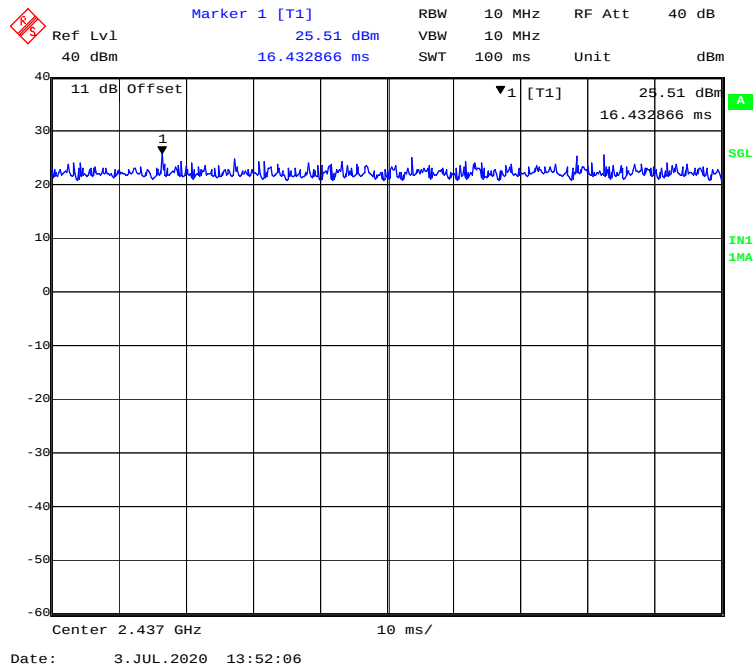


802.11n-HT20 Mode Middle Channel

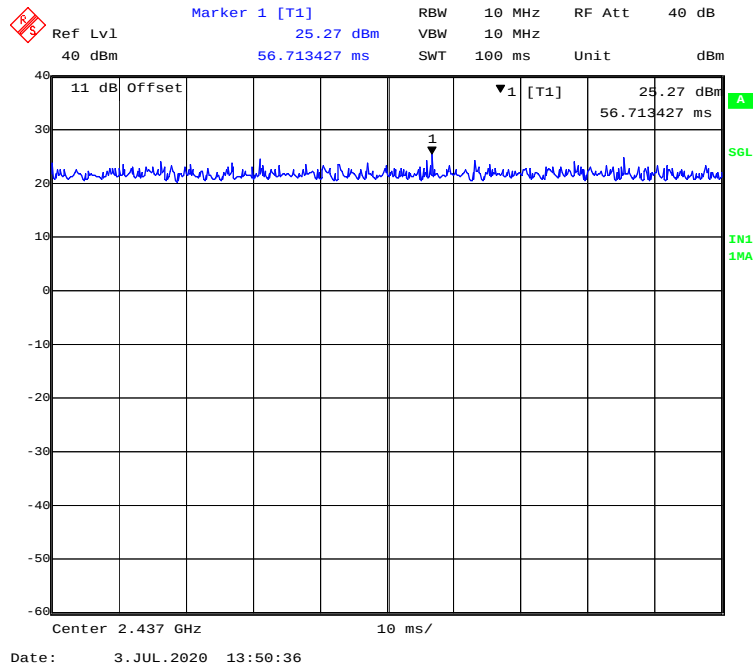


802.11n-HT40 Mode Middle Channel

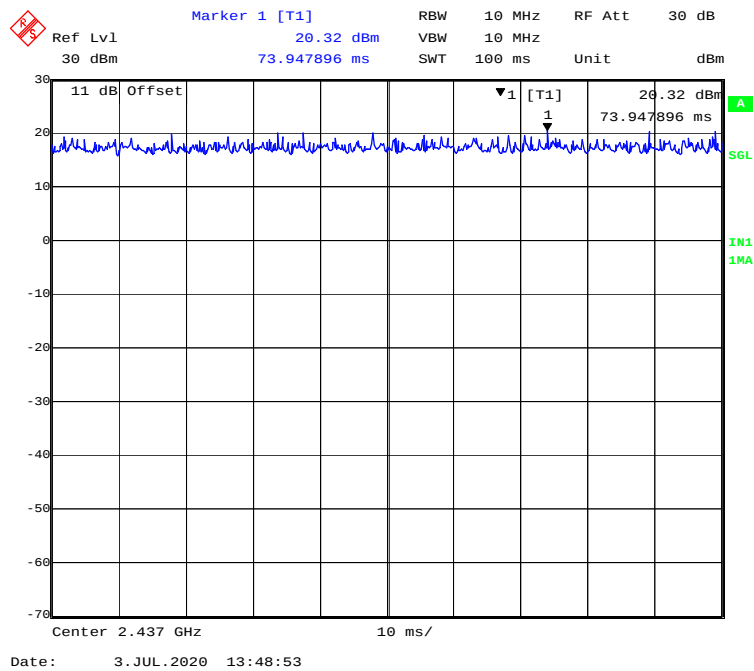

BLE(1Mbps) Mode Middle Channel

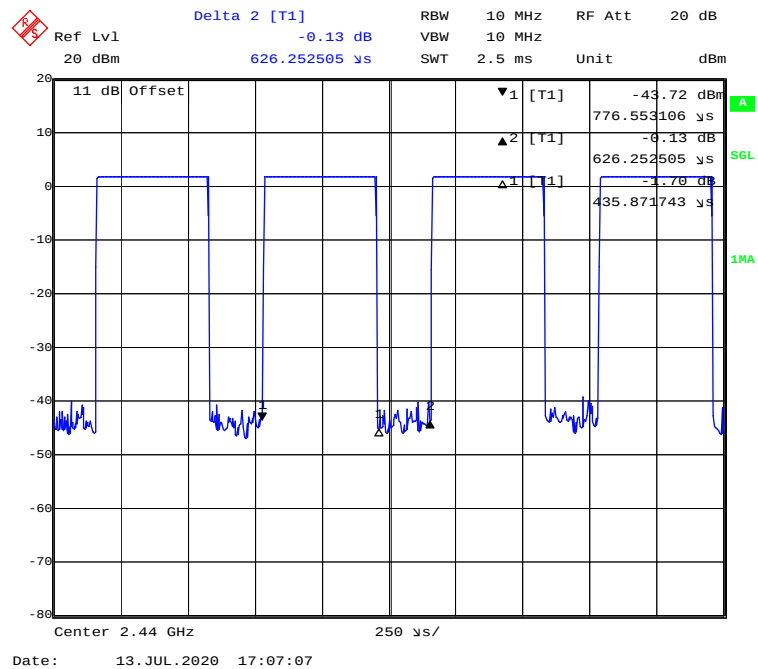

BLE(2Mbps) Mode Middle Channel

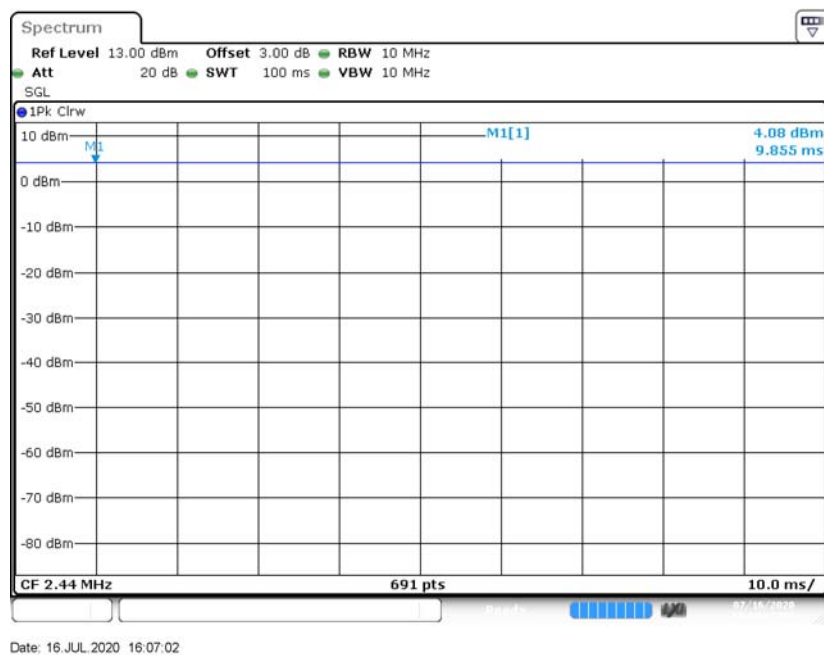

Mode	Duty Cycle (%)	T(ms)	1/T(kHz)	10log(1/x)
802.11b	100	/	/	0
802.11g	100	/	/	0
802.11n-HT20	100	/	/	0
BLE(1Mbps)	69.60	0.436	2.29	1.57
BLE(2Mbps)	100	/	/	0

Note: “x” means the Duty Cycle.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
DELL	Notebook	E6410	3094742521
DELL	Adapter	LA65NS0-00	DF263
/	Trumpet 1	/	/
/	Trumpet 2	/	/

External I/O Cable


Cable Description	Length (m)	From Port	To
USB Cable	1.0	Debug Board	Notebook
Power Cable	2.0	Notebook	Adapter
Power Cable	2.0	Adapter	LISN/AC source
Power Cable	1.0	EUT	Trumpet 1
Power Cable	1.0	EUT	Trumpet 2

Block Diagram of Test Setup


For Conducted Emissions:

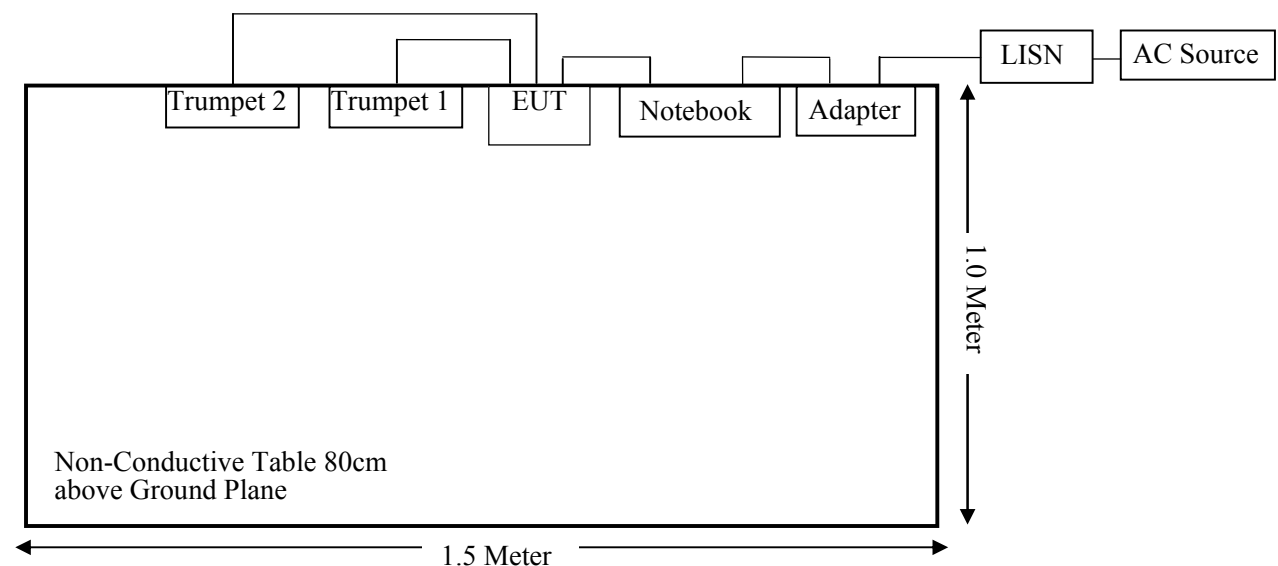

For Radiated Emissions (Below 1GHz):

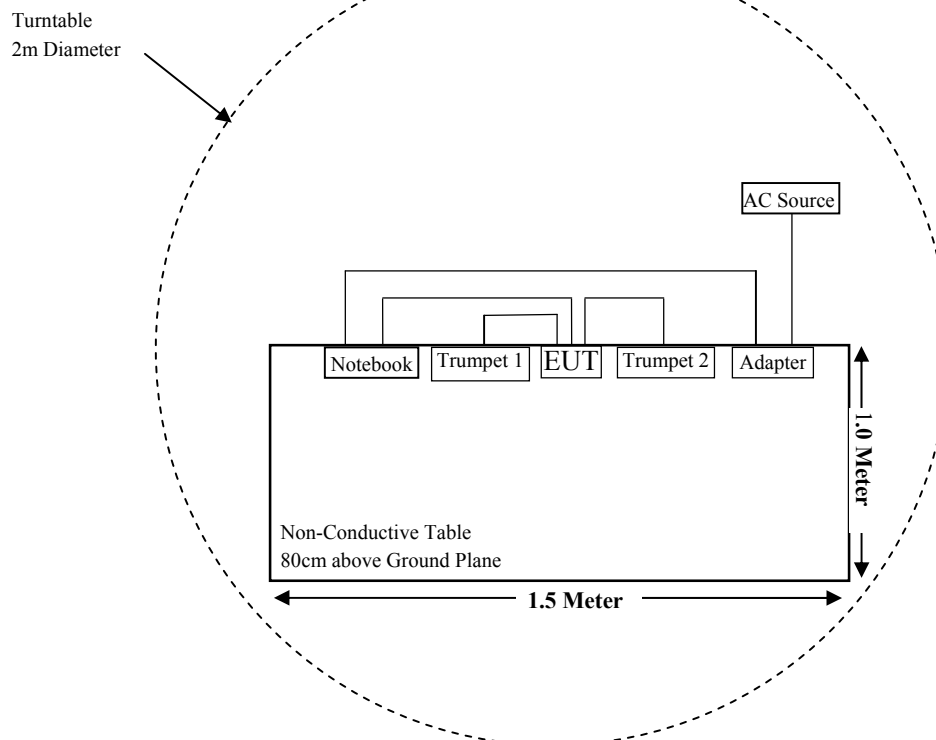

For Radiated Emissions (Above 1GHz):

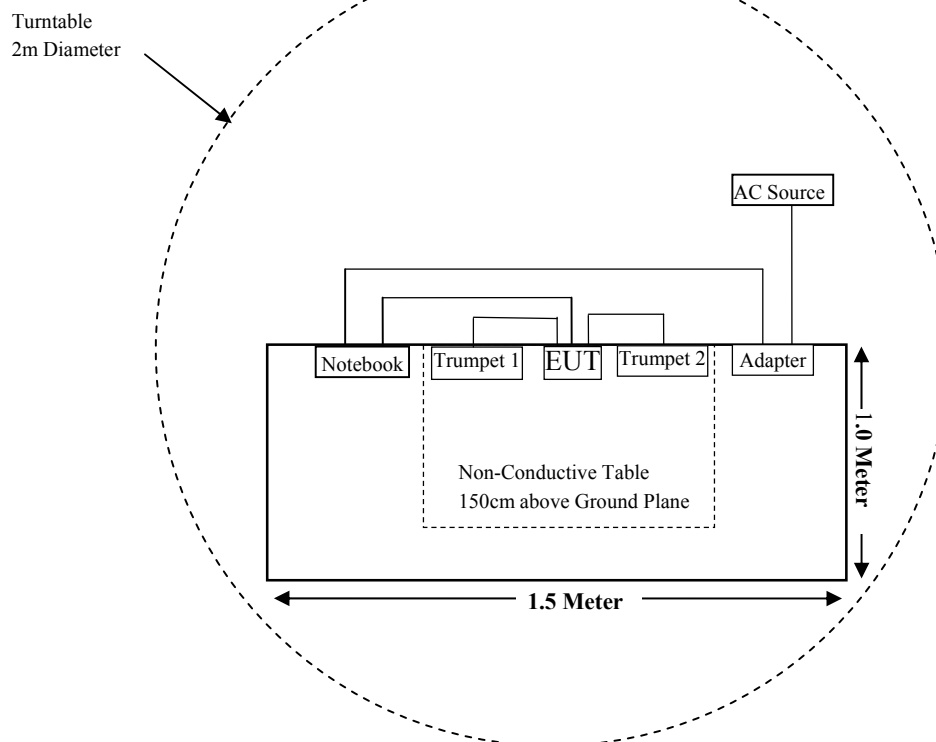

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1310 & §2.1091	RF EXPOSURE	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.247(d)	Spurious Emissions at Antenna Port	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber 1#)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2019-12-14	2020-12-13
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2017-12-26	2020-12-25
Sonoma Instrument	Pre-amplifier	310N	171205	2019-08-14	2020-08-13
Rohde & Schwarz	Auto test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-8	008	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2019-08-15	2020-08-14
Radiated Emission Test (Chamber 2#)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2020-04-01	2021-03-31
ETS-LINDGREN	Horn Antenna	3115	9207-3900	2017-07-15	2020-07-14
ETS-LINDGREN	Horn Antenna	3115	9207-3900	2020-07-15	2023-07-14
ETS-LINDGREN	Horn Antenna	3116	00084159	2019-12-12	2022-12-11
A.H.Systems,inc	Amplifier	PAM-0118P	512	2020-02-20	2021-02-19
EM Electronics Corporation	Amplifier	EM18G40G	060726	2020-03-22	2021-03-21
MICRO-TRONICS	Band Reject Filter	BRM50702	G024	2019-08-05	2020-08-04
Narda	Attenuator	10dB	010	2019-08-15	2020-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-6	006	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-11	011	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2019-08-15	2020-08-14
RF Conducted Test					
Rohde & Schwarz	EMI Test Receiver	ESIB26	100146	2019-12-14	2020-12-13
Agilent	Power Meter	N1912A	MY5000492	2019-11-18	2020-11-17
Agilent	Power Sensor	N1921A	MY54210024	2019-11-18	2020-11-17
Narda	Attenuator	10dB	010	2019-08-15	2020-08-14
Narda	Attenuator	2dB	002	2020-05-17	2021-05-16
Rohde & Schwarz	Signal Analyzer	FSV40	100146	2019-08-05	2020-08-04
Ehong	RF Cable	Ehong 01	C01	Each Time	N/A
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2019-08-05	2020-08-04
Rohde & Schwarz	LISN	ENV216	3560655016	2019-11-30	2020-11-29
Audix	Test Software	e3	V9	N/A	N/A
Rohde & Schwarz	Pulse limiter	ESH3-Z2	0357.8810.54	2020-01-10	2021-01-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2019-08-15	2020-08-14

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247 (i) and subpart 1.1310, 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm²)	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/		f/1500	30
1500-100,000	/		1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

Calculated Data (worst case):

Mode	Frequency (MHz)	Maximum Antenna Gain		Tune-up Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
2.4G WiFi 802.11b	2412-2462	1.0	1.26	23.00	199.53	20	0.0500	1.0
2.4G WiFi 802.11g		1.0	1.26	24.00	251.19	20	0.0630	1.0
802.11n-HT20		1.0	1.26	23.50	223.87	20	0.0561	1.0
802.11n-HT40	2422-2452	1.0	1.26	22.00	158.49	20	0.0397	1.0
BLE(1Mbps)	2402-2480	1.0	1.26	2.50	1.78	20	0.0004	1.0
BLE(2Mbps)	2402-2480	1.0	1.26	1.50	1.41	20	0.0004	1.0
Zigbee	2405~2475	1.0	1.26	1.00	1.26	20	0.0003	1.0
5G WiFi	5180-5240	1.0	1.26	22.00	158.49	20	0.0397	1.0
5G WiFi	5745-5825	1.0	1.26	19.00	79.43	20	0.0199	1.0

Note: 2.4G Wi-Fi/5G Wi-Fi and BLE/Zigbee can transmit simultaneously; the worst condition as below:

$$\sum_i \frac{S_i}{S_{Limit,i}} = 0.0630/1.00 + 0.0004/1.00 = 0.0634 < 1.0$$

Conclusion: The device meets MPE at distance 20cm.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine Compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
 - b. Antenna must use a unique type of connector to attach to the EUT.
- Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has a PCB Antenna for WIFI and a PCB Antenna for BLE, Wi-Fi and BLE antenna gain is 1 dBi, which is permanently attached to the unit, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

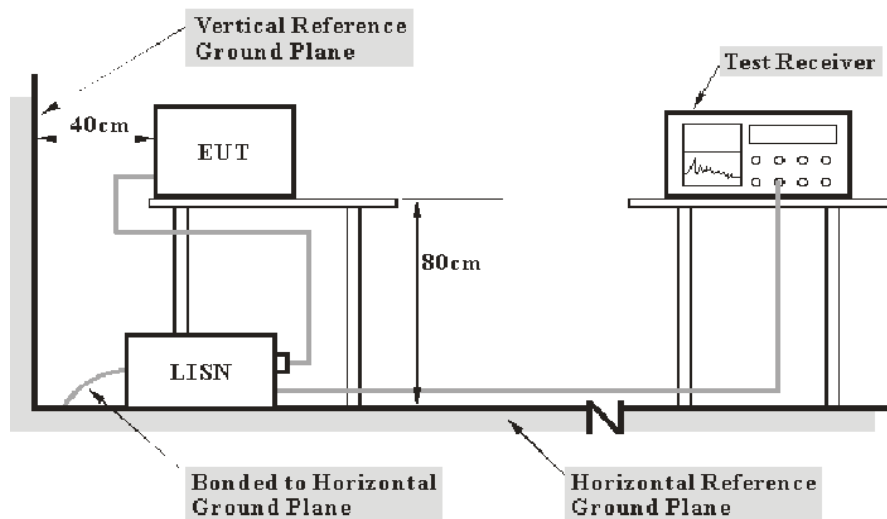

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

ANSI C63.10-2013 clause 6.2

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Factor & Over Limit Calculation

The Factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit of 7 dB means the emission is 7 dB above the limit. The equation for Over Limit calculation is as follows:

$$\text{Over Limit (dB)} = \text{Read level (dB}\mu\text{V)} + \text{Factor (dB)} - \text{Limit (dB}\mu\text{V)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data

Environmental Conditions

Temperature:	24.8°C
Relative Humidity:	53 %
ATM Pressure:	101.1 kPa


The testing was performed by Winnie Yang on 2020-06-24.

Test Result: Compliant.

For Wi-Fi Mode:

EUT operation mode: Transmitting in 802.11g mode middle channel (worst case)


AC 120V/60 Hz, Line

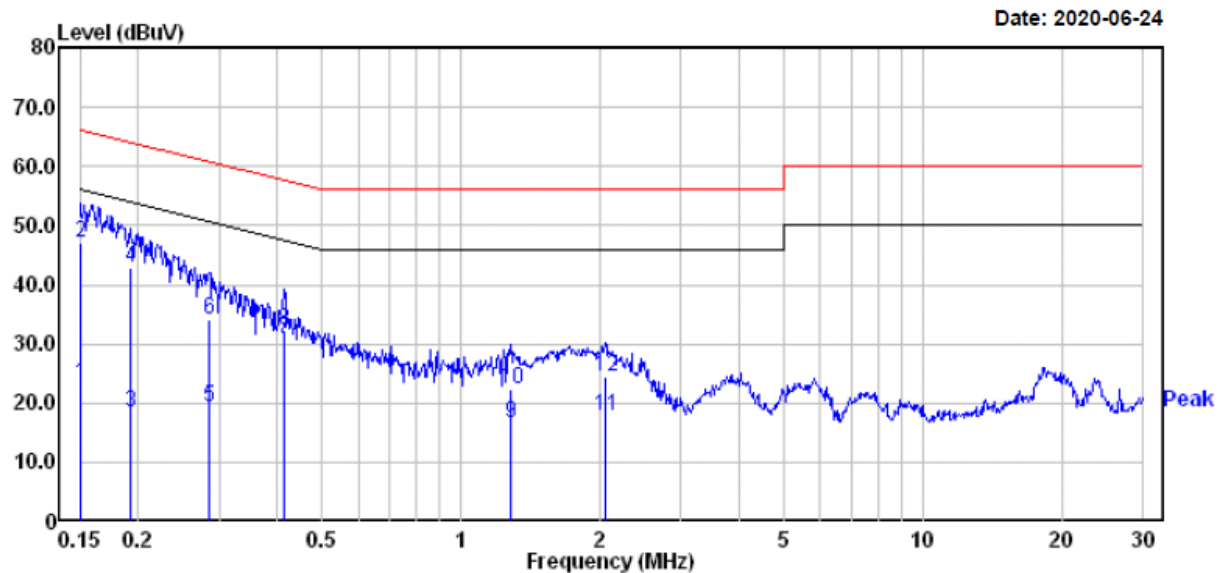

		Read		Limit	Over	
	Freq	Level	Factor	Level	Line	Limit Remark
	MHz	dBuV	dB	dBuV	dBuV	dB
1	0.150	3.50	19.82	23.32	56.00	-32.68 Average
2	0.150	27.30	19.82	47.12	66.00	-18.88 QP
3	0.192	-1.40	19.82	18.42	53.93	-35.51 Average
4	0.192	23.10	19.82	42.92	63.93	-21.01 QP
5	0.285	-0.60	19.82	19.22	50.68	-31.46 Average
6	0.285	14.30	19.82	34.12	60.68	-26.56 QP
7	0.415	11.00	19.74	30.74	47.55	-16.81 Average
8	0.415	12.60	19.74	32.34	57.55	-25.21 QP
9	1.282	-3.30	19.82	16.52	46.00	-29.48 Average
10	1.282	2.60	19.82	22.42	56.00	-33.58 QP
11	2.055	-1.90	19.79	17.89	46.00	-28.11 Average
12	2.055	4.70	19.79	24.49	56.00	-31.51 QP

AC 120V/60 Hz, Neutral

Date: 2020-06-24

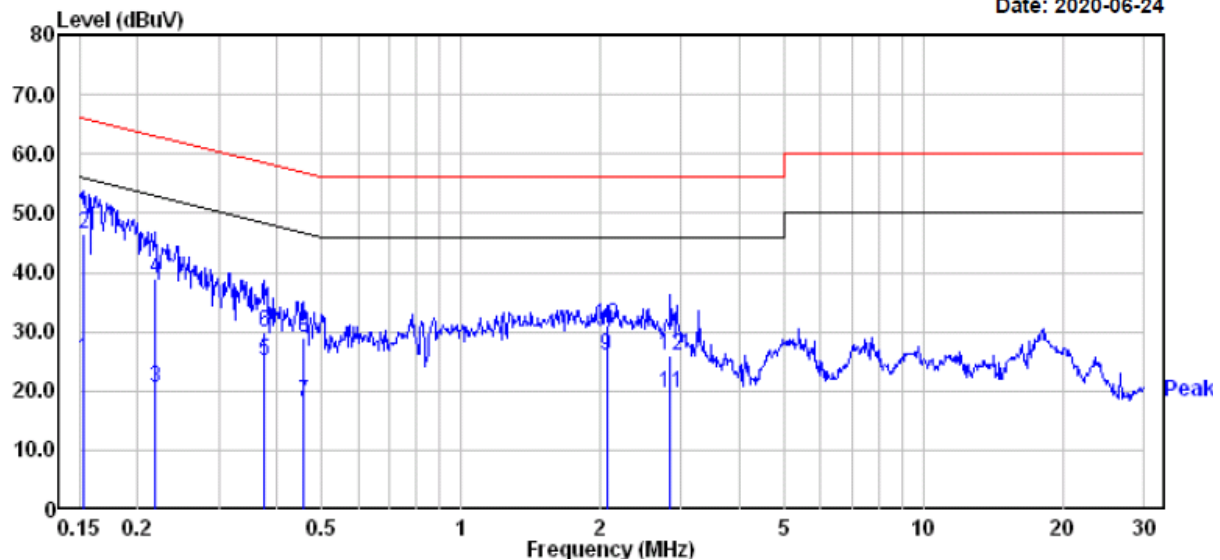


	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.153	5.50	19.82	25.32	55.82	-30.50	Average
2	0.153	26.60	19.82	46.42	65.82	-19.40	QP
3	0.217	0.80	19.82	20.62	52.92	-32.30	Average
4	0.217	19.10	19.82	38.92	62.92	-24.00	QP
5	0.375	5.40	19.77	25.17	48.39	-23.22	Average
6	0.375	10.00	19.77	29.77	58.39	-28.62	QP
7	0.459	-1.50	19.75	18.25	46.71	-28.46	Average
8	0.459	9.20	19.75	28.95	56.71	-27.76	QP
9	2.066	6.10	19.78	25.88	46.00	-20.12	Average
10	2.066	11.30	19.78	31.08	56.00	-24.92	QP
11	2.839	0.29	19.47	19.76	46.00	-26.24	Average
12	2.839	6.59	19.47	26.06	56.00	-29.94	QP

Note:


1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)

2) Over Limit (dB) = Read level (dBuV) + Factor (dB) - Limit (dBuV)

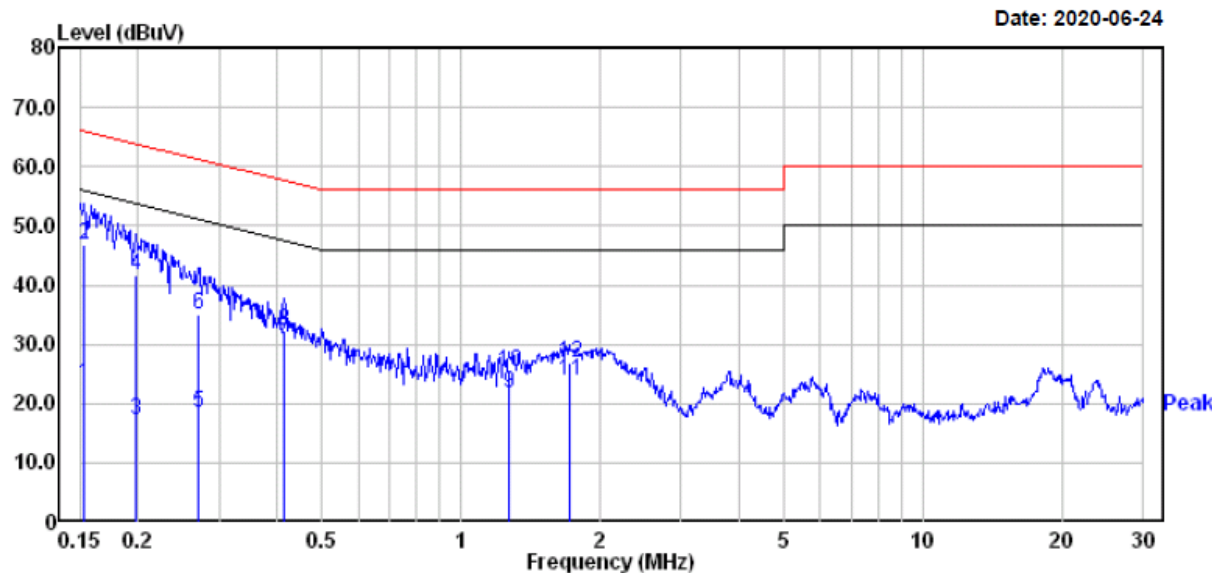For BLE(1M) Mode:*EUT operation mode: Transmitting in middle channel (worst case)***AC 120V/60 Hz, Line**

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.153	3.30	19.82	23.12	55.82	-32.70	Average
2	0.153	27.10	19.82	46.92	65.82	-18.90	QP
3	0.198	-2.60	19.82	17.22	53.71	-36.49	Average
4	0.198	21.80	19.82	41.62	63.71	-22.09	QP
5	0.270	-1.50	19.82	18.32	51.12	-32.80	Average
6	0.270	15.30	19.82	35.12	61.12	-26.00	QP
7	0.415	11.10	19.74	30.84	47.55	-16.71	Average
8	0.415	12.60	19.74	32.34	57.55	-25.21	QP
9	1.276	2.00	19.82	21.82	46.00	-24.18	Average
10	1.276	5.40	19.82	25.22	56.00	-30.78	QP
11	1.716	3.90	19.84	23.74	46.00	-22.26	Average
12	1.716	6.90	19.84	26.74	56.00	-29.26	QP

AC 120V/60 Hz, Neutral

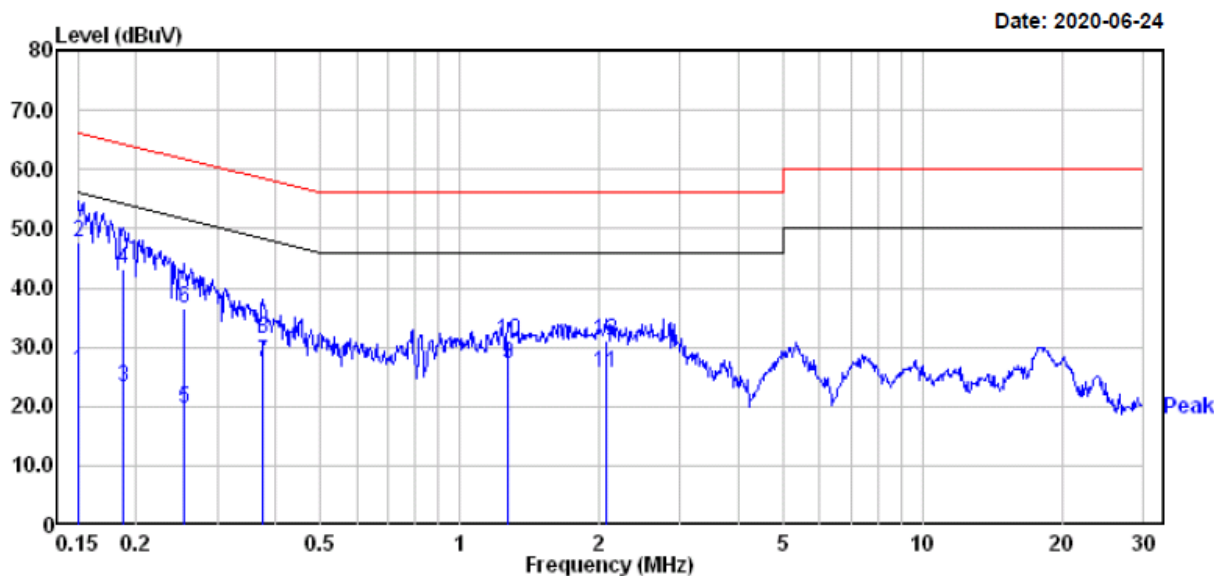


	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.150	6.10	19.82	25.92	56.00	-30.08	Average
2	0.150	27.90	19.82	47.72	66.00	-18.28	QP
3	0.187	3.31	19.82	23.13	54.15	-31.02	Average
4	0.187	23.21	19.82	43.03	64.15	-21.12	QP
5	0.253	-0.10	19.82	19.72	51.64	-31.92	Average
6	0.253	16.60	19.82	36.42	61.64	-25.22	QP
7	0.375	7.70	19.77	27.47	48.39	-20.92	Average
8	0.375	11.50	19.77	31.27	58.39	-27.12	QP
9	1.276	7.50	19.82	27.32	46.00	-18.68	Average
10	1.276	11.30	19.82	31.12	56.00	-24.88	QP
11	2.066	5.90	19.78	25.68	46.00	-20.32	Average
12	2.066	11.30	19.78	31.08	56.00	-24.92	QP

Note:

1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)


2) Over Limit (dB) = Read level (dBuV) + Factor (dB) - Limit (dBuV)

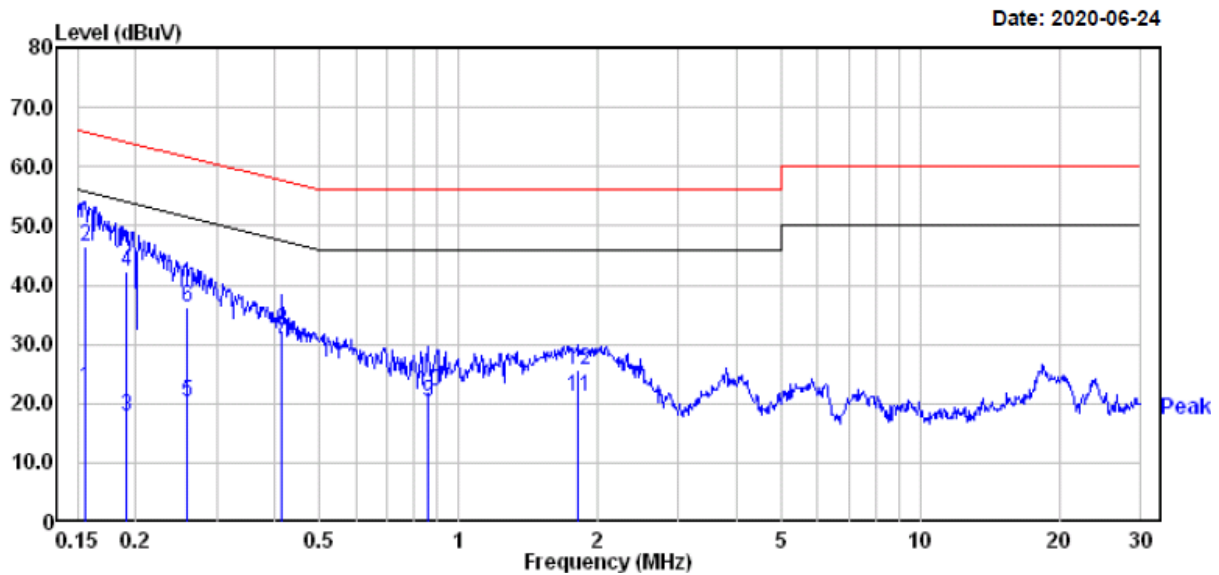For BLE(2M) Mode:*EUT operation mode: Transmitting in high channel (worst case)***AC 120V/60 Hz, Line**

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBUV	dB	dBUV	dBUV	dB	
1	0.156	2.90	19.82	22.72	55.69	-32.97	Average
2	0.156	26.80	19.82	46.62	65.69	-19.07	QP
3	0.191	-1.90	19.82	17.92	53.98	-36.06	Average
4	0.191	22.40	19.82	42.22	63.98	-21.76	QP
5	0.258	0.50	19.82	20.32	51.51	-31.19	Average
6	0.258	16.30	19.82	36.12	61.51	-25.39	QP
7	0.415	11.20	19.74	30.94	47.55	-16.61	Average
8	0.415	12.70	19.74	32.44	57.55	-25.11	QP
9	0.857	0.61	19.71	20.32	46.00	-25.68	Average
10	0.857	2.41	19.71	22.12	56.00	-33.88	QP
11	1.810	1.40	19.84	21.24	46.00	-24.76	Average
12	1.810	5.80	19.84	25.64	56.00	-30.36	QP

AC 120V/60 Hz, Neutral

Date: 2020-06-24

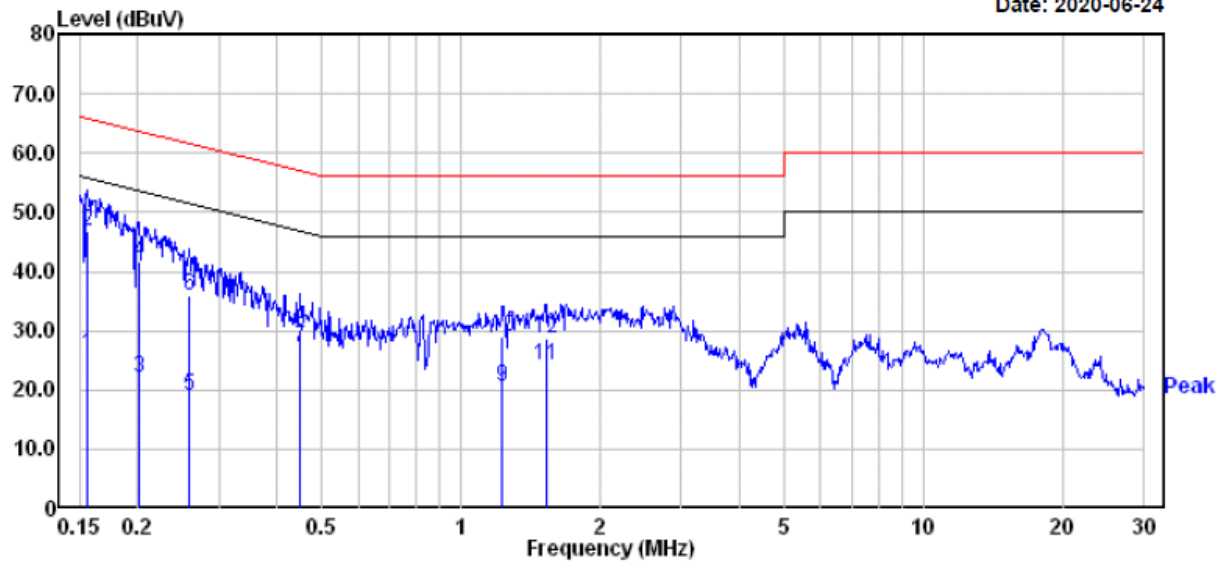

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.156	6.00	19.82	25.82	55.69	-29.87	Average
2	0.156	27.10	19.82	46.92	65.69	-18.77	QP
3	0.201	2.30	19.82	22.12	53.58	-31.46	Average
4	0.201	21.70	19.82	41.52	63.58	-22.06	QP
5	0.259	-0.70	19.82	19.12	51.47	-32.35	Average
6	0.259	16.20	19.82	36.02	61.47	-25.45	QP
7	0.449	7.40	19.75	27.15	46.89	-19.74	Average
8	0.449	10.10	19.75	29.85	56.89	-27.04	QP
9	1.229	0.61	19.81	20.42	46.00	-25.58	Average
10	1.229	9.31	19.81	29.12	56.00	-26.88	QP
11	1.527	4.39	19.85	24.24	46.00	-21.76	Average
12	1.527	8.69	19.85	28.54	56.00	-27.46	QP

Note:


1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)

2) Over Limit (dB) = Read level (dBuV) + Factor (dB) - Limit (dBuV)

Transmitting simultaneously test:

(The worst case middle channel of BLE(1Mbps) and 802.11g middle Channel of Wi-Fi mode transmitting simultaneously was recorded)


AC 120V/60 Hz, Line

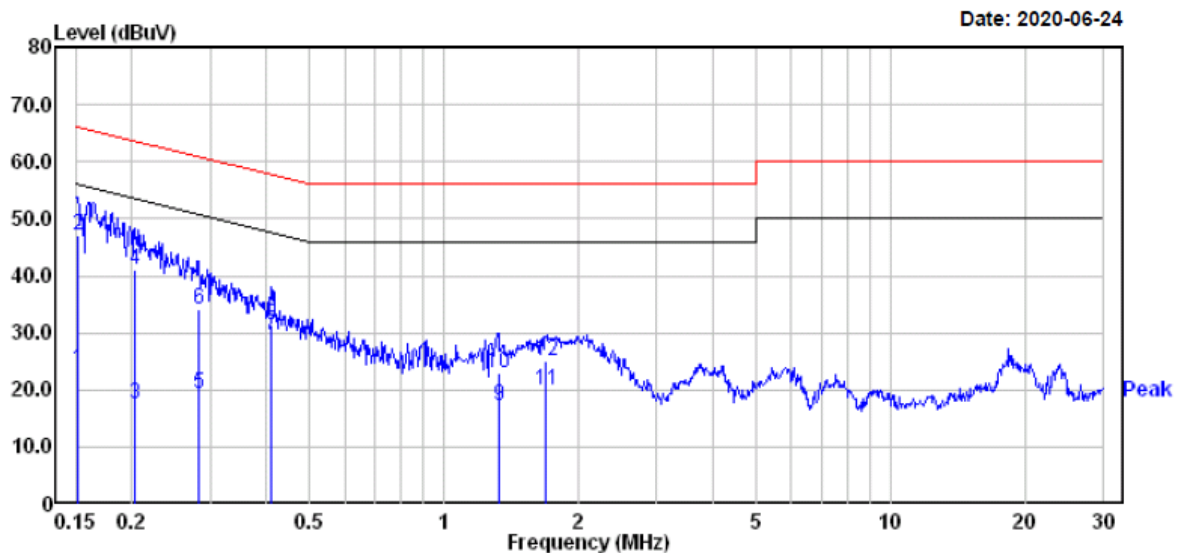

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.152	3.60	19.82	23.42	55.91	-32.49	Average
2	0.152	27.30	19.82	47.12	65.91	-18.79	QP
3	0.204	-2.40	19.82	17.42	53.45	-36.03	Average
4	0.204	21.20	19.82	41.02	63.45	-22.43	QP
5	0.282	-0.60	19.82	19.22	50.76	-31.54	Average
6	0.282	14.40	19.82	34.22	60.76	-26.54	QP
7	0.410	9.80	19.74	29.54	47.64	-18.10	Average
8	0.410	11.60	19.74	31.34	57.64	-26.30	QP
9	1.324	-2.49	19.82	17.33	46.00	-28.67	Average
10	1.324	3.01	19.82	22.83	56.00	-33.17	QP
11	1.698	0.10	19.84	19.94	46.00	-26.06	Average
12	1.698	5.20	19.84	25.04	56.00	-30.96	QP

AC 120V/60 Hz, Neutral

Date: 2020-06-24

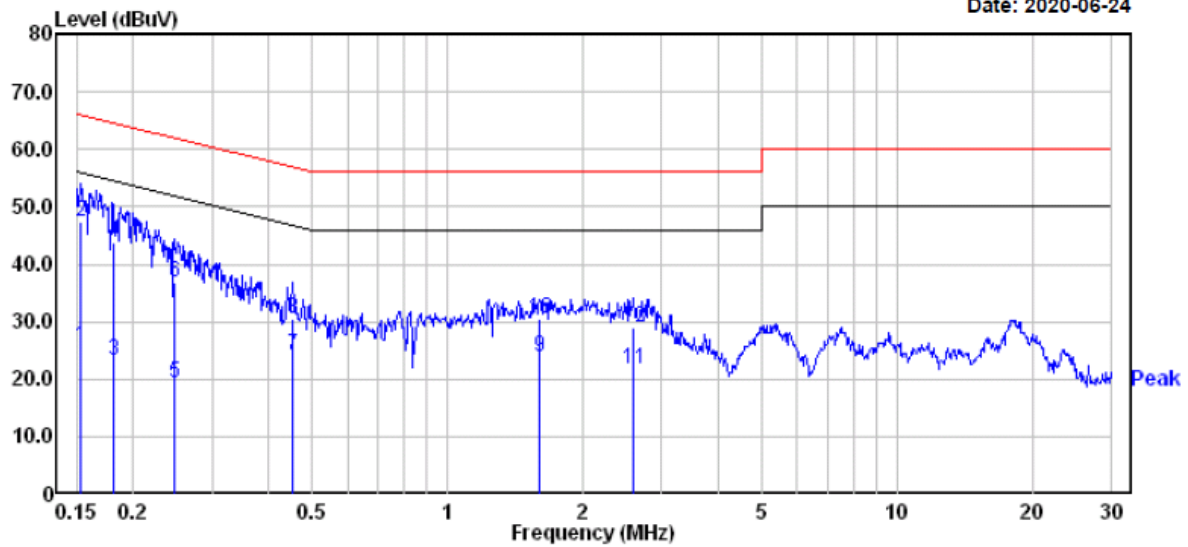

		Read		Limit	Over	
	Freq	Level	Factor	Level	Line	Limit Remark
	MHz	dBuV	dB	dBuV	dBuV	dB
1	0.152	5.90	19.82	25.72	55.87	-30.15 Average
2	0.152	27.50	19.82	47.32	65.87	-18.55 QP
3	0.181	3.50	19.83	23.33	54.46	-31.13 Average
4	0.181	23.90	19.83	43.73	64.46	-20.73 QP
5	0.247	-0.40	19.82	19.42	51.86	-32.44 Average
6	0.247	17.10	19.82	36.92	61.86	-24.94 QP
7	0.454	4.30	19.75	24.05	46.80	-22.75 Average
8	0.454	10.60	19.75	30.35	56.80	-26.45 QP
9	1.602	3.89	19.85	23.74	46.00	-22.26 Average
10	1.602	10.49	19.85	30.34	56.00	-25.66 QP
11	2.594	2.39	19.48	21.87	46.00	-24.13 Average
12	2.594	9.49	19.48	28.97	56.00	-27.03 QP



Note:

1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)

2) Over Limit (dB) = Read level (dBuV) + Factor (dB) - Limit (dBuV)

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**Applicable Standard**

FCC §15.247 (d); §15.209; §15.205;

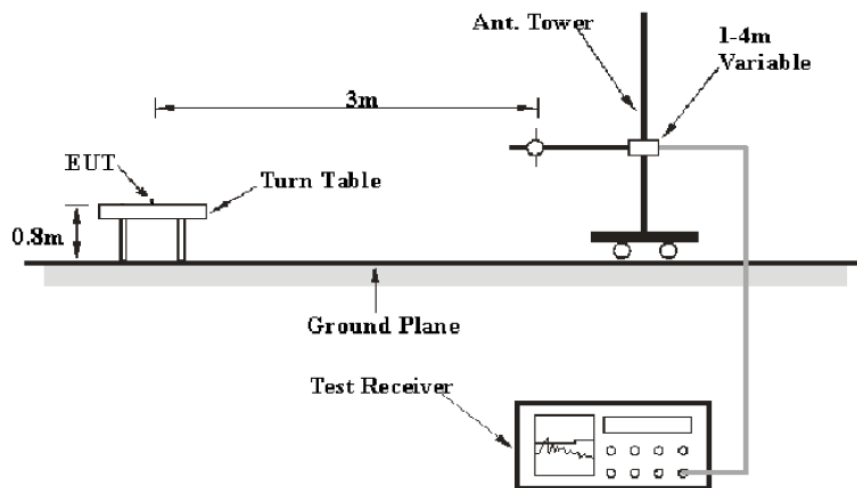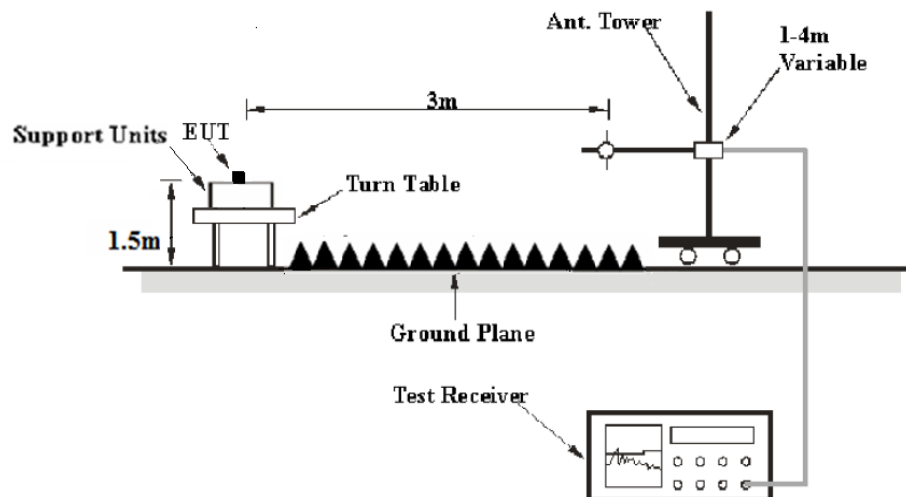EUT Setup**Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	PK
	1MHz	3 MHz	/	Ave.

Test Procedure

According to ANSI C63.10-2013 clause 6.5, 6.6 and 6.7.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection mode for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude (dB μ V/m) = Meter Reading (dB μ V) + Antenna Factor (dB/m) + Cable Loss (dB) - Amplifier Gain (dB)

The “**Margin**” column of the following data tables indicates the degree of Compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V/m)

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data**Environmental Conditions**

Temperature:	23.1~25.8℃
Relative Humidity:	49~72 %
ATM Pressure:	100.7~101.9 kPa

The testing was performed by Winnie Yang from 2020-06-24 to 2020-07-17.


Test Result: Compliant.

EUT operation mode: Transmitting

For Wi-Fi Mode:

Spurious Emission Test:**30MHz-1GHz:**

Pre-scan with 802.11b, 802.11g, 802.11n-HT20 and 802.11n-HT40 modes of operation in the X,Y and Z axes of orientation, the worst case **high channel of 802.11n-HT40 mode in Z-axis of orientation** was recorded.

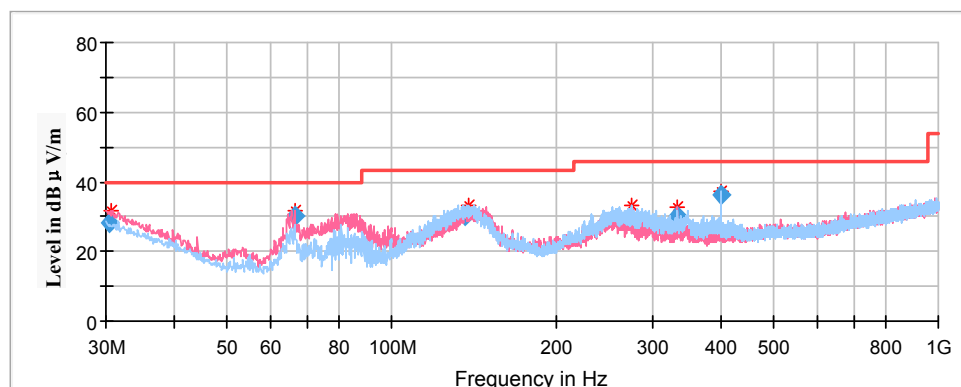

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	QuasiPeak (dBμV/m)	Height (cm)	Polar (H/V)				
30.470302	28.01	100.0	V	129.0	-4.7	40.00	11.99
66.565000	30.42	100.0	V	245.0	-17.9	40.00	9.58
136.626050	30.13	200.0	H	200.0	-12.3	43.50	13.37
275.904150	28.90	100.0	H	289.0	-11.8	46.00	17.10
331.929900	30.09	200.0	V	185.0	-10.3	46.00	15.91
399.978500	36.02	100.0	H	152.0	-8.6	46.00	9.98

1GHz-18GHz:**802.11b Mode:**


(Pre-scan in the X,Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V/m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V/m)

Low Channel: 2412MHz


Full Spectrum

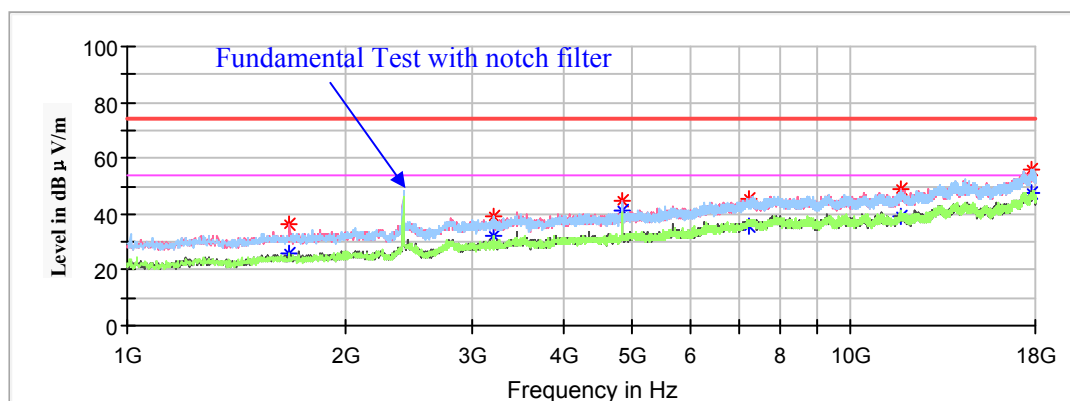

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1678.300000	---	25.58	200.0	V	289.0	-15.7	54.00	28.42
1678.300000	36.30	---	200.0	V	289.0	-15.7	74.00	37.70
3215.100000	---	32.49	200.0	H	204.0	-9.5	54.00	21.51
3215.100000	38.96	---	200.0	H	204.0	-9.5	74.00	35.04
4824.000000	---	40.95	150.0	V	260.0	-5.5	54.00	13.05
4824.000000	44.83	---	150.0	V	260.0	-5.5	74.00	29.17
7242.400000	---	35.93	200.0	V	234.0	0.5	54.00	18.07
7242.400000	45.69	---	200.0	V	234.0	0.5	74.00	28.31
11738.900000	---	39.51	150.0	V	0.0	3.3	54.00	14.49
11738.900000	48.96	---	150.0	V	0.0	3.3	74.00	25.04
17799.400000	55.97	---	200.0	H	259.0	8.8	74.00	18.03
17799.400000	---	47.65	200.0	H	259.0	8.8	54.00	6.35

Middle Channel: 2437MHz


Full Spectrum

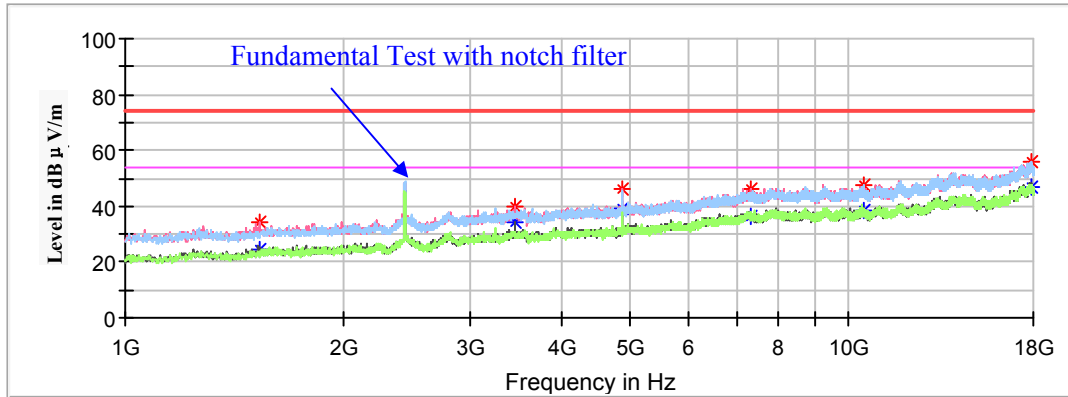

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1532.100000	33.99	---	200.0	V	174.0	-16.2	74.00	40.01
1532.100000	---	24.45	200.0	V	174.0	-16.2	54.00	29.55
3454.800000	39.86	---	150.0	V	234.0	-8.9	74.00	34.14
3454.800000	---	33.93	150.0	V	234.0	-8.9	54.00	20.07
4874.000000	46.25	---	200.0	V	234.0	-5.4	74.00	27.75
4874.000000	---	39.24	200.0	V	234.0	-5.4	54.00	14.76
7341.000000	---	36.63	150.0	V	263.0	0.7	54.00	17.37
7341.000000	45.87	---	150.0	V	263.0	0.7	74.00	28.13
10474.100000	---	38.69	200.0	H	321.0	2.3	54.00	15.31
10474.100000	47.42	---	200.0	H	321.0	2.3	74.00	26.58
17918.400000	---	46.54	200.0	H	219.0	8.8	54.00	7.46
17918.400000	55.68	---	200.0	H	219.0	8.8	74.00	18.32

High Channel: 2462MHz

Full Spectrum

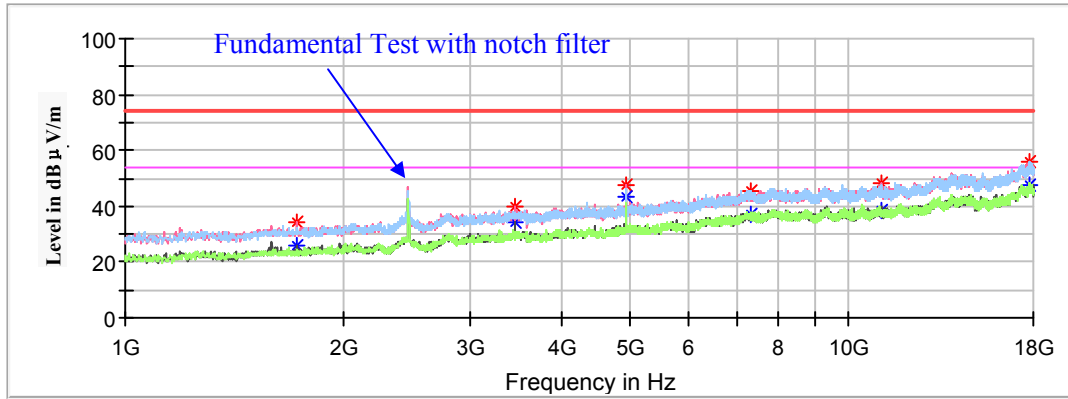

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1725.900000	34.61	---	200.0	V	322.0	-15.5	74.00	39.39
1725.900000	---	25.60	200.0	V	322.0	-15.5	54.00	28.40
3454.800000	40.18	---	200.0	V	293.0	-8.9	74.00	33.82
3454.800000	---	33.94	200.0	V	293.0	-8.9	54.00	20.06
4924.000000	47.43	---	200.0	V	249.0	-5.3	74.00	26.57
4924.000000	---	43.14	200.0	V	249.0	-5.3	54.00	10.86
7310.400000	---	37.00	150.0	V	279.0	0.6	54.00	17.00
7310.400000	45.76	---	150.0	V	279.0	0.6	74.00	28.24
11104.800000	---	38.19	200.0	V	295.0	2.9	54.00	15.81
11104.800000	48.39	---	200.0	V	295.0	2.9	74.00	25.61
17790.900000	---	47.26	200.0	H	0.0	8.8	54.00	6.74
17790.900000	55.69	---	200.0	H	0.0	8.8	74.00	18.31

802.11g Mode:


(Pre-scan in the X,Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V/m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V/m)

Low Channel: 2412MHz


Full Spectrum

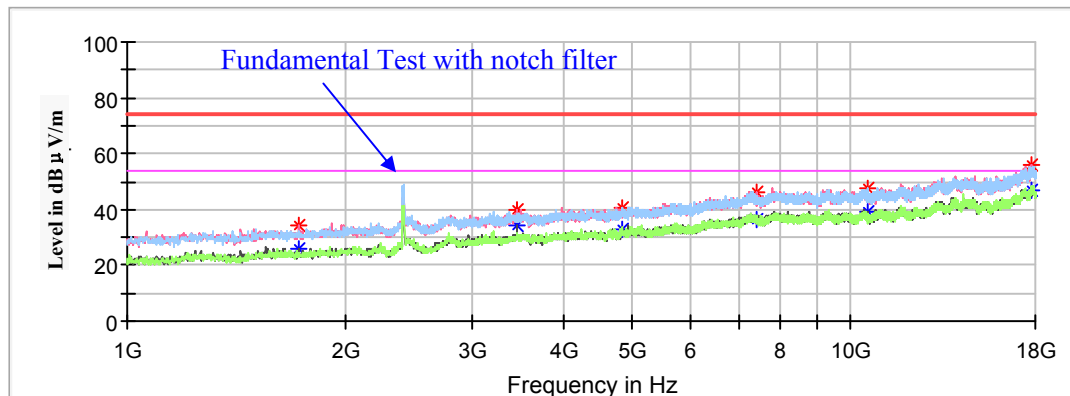

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1724.200000	34.35	---	200.0	V	171.0	-15.5	74.00	39.65
1724.200000	---	25.96	200.0	V	171.0	-15.5	54.00	28.04
3454.800000	39.81	---	200.0	V	309.0	-8.9	74.00	34.19
3454.800000	---	34.55	200.0	V	309.0	-8.9	54.00	19.45
4824.000000	40.81	---	150.0	V	220.0	-5.5	74.00	33.19
4824.000000	---	32.54	150.0	V	220.0	-5.5	54.00	21.46
7410.700000	46.12	---	200.0	H	294.0	0.8	74.00	27.88
7410.700000	---	36.65	200.0	H	294.0	0.8	54.00	17.35
10530.200000	---	38.95	150.0	V	349.0	2.3	54.00	15.05
10530.200000	47.45	---	150.0	V	349.0	2.3	74.00	26.55
17765.400000	---	47.06	200.0	V	220.0	8.8	54.00	6.94
17765.400000	55.74	---	200.0	V	220.0	8.8	74.00	18.26

Middle Channel: 2437MHz


Full Spectrum

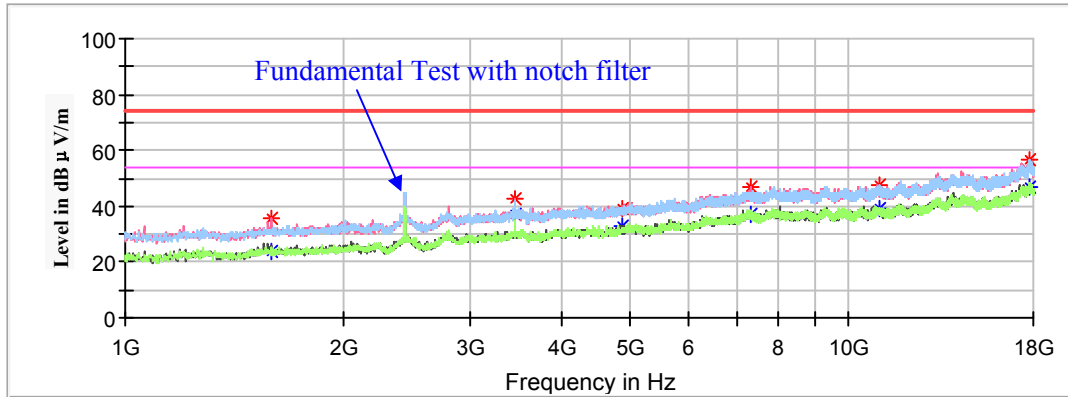

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1589.900000	35.62	---	150.0	V	282.0	-16.0	74.00	38.38
1589.900000	---	23.77	150.0	V	282.0	-16.0	54.00	30.23
3454.800000	---	36.85	150.0	V	251.0	-8.9	54.00	17.15
3454.800000	42.33	---	150.0	V	251.0	-8.9	74.00	31.67
4874.000000	38.94	---	150.0	V	251.0	-5.4	74.00	35.06
4874.000000	---	32.93	150.0	V	251.0	-5.4	54.00	21.07
7305.300000	---	37.26	200.0	V	250.0	0.6	54.00	16.74
7305.300000	47.06	---	200.0	V	250.0	0.6	74.00	26.94
11023.200000	---	39.00	200.0	H	67.0	2.9	54.00	15.00
11023.200000	47.61	---	200.0	H	67.0	2.9	74.00	26.39
17765.400000	56.74	---	150.0	H	186.0	8.8	74.00	17.26
17765.400000	---	47.20	150.0	H	186.0	8.8	54.00	6.80

High Channel: 2462MHz

Full Spectrum

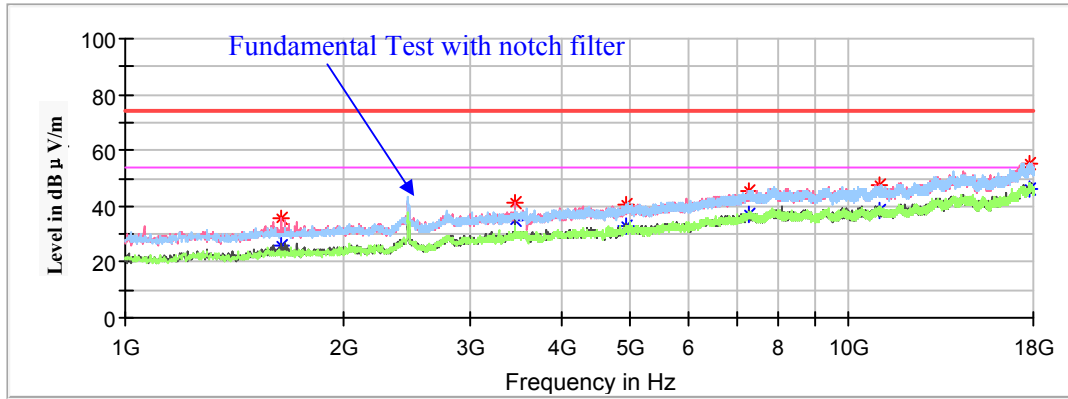

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1644.300000	---	25.99	150.0	V	280.0	-15.8	54.00	28.01
1644.300000	35.40	---	150.0	V	280.0	-15.8	74.00	38.60
3454.800000	41.33	---	150.0	V	249.0	-8.9	74.00	32.67
3454.800000	---	34.97	150.0	V	249.0	-8.9	54.00	19.03
4924.000000	---	32.92	200.0	V	103.0	-5.3	54.00	21.08
4924.000000	40.48	---	200.0	V	103.0	-5.3	74.00	33.52
7300.200000	---	36.79	150.0	V	16.0	0.6	54.00	17.21
7300.200000	45.55	---	150.0	V	16.0	0.6	74.00	28.45
11001.100000	---	38.30	150.0	V	312.0	2.9	54.00	15.70
11001.100000	47.82	---	150.0	V	312.0	2.9	74.00	26.18
17736.500000	---	46.26	200.0	V	111.0	8.8	54.00	7.74
17736.500000	55.53	---	200.0	V	111.0	8.8	74.00	18.47

802.11n-HT20 Mode:


(Pre-scan in the X,Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V/m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V/m)

Low Channel: 2412MHz


Full Spectrum

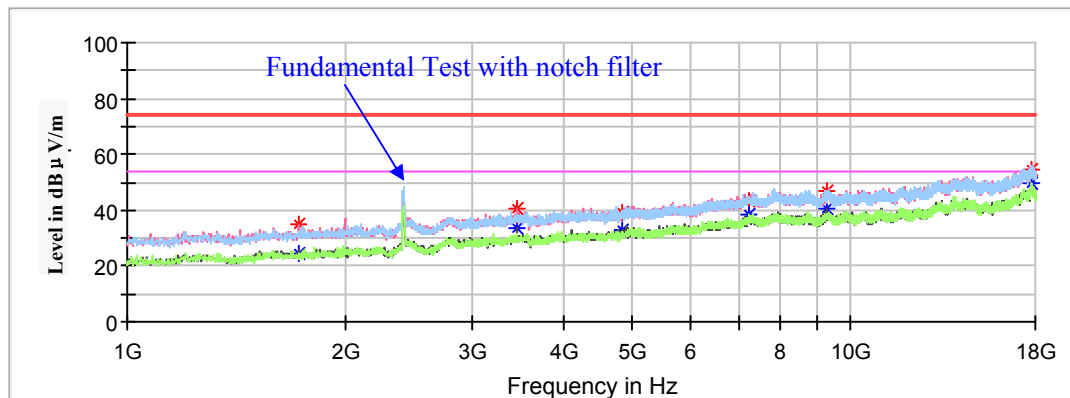

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1731.000000	---	24.33	200.0	V	198.0	-15.5	54.00	29.67
1731.000000	34.92	---	200.0	V	198.0	-15.5	74.00	39.08
3454.800000	---	33.76	150.0	V	311.0	-8.9	54.00	20.24
3454.800000	40.78	---	150.0	V	311.0	-8.9	74.00	33.22
4824.000000	---	32.93	200.0	V	248.0	-5.5	54.00	21.07
4824.000000	38.96	---	200.0	V	248.0	-5.5	74.00	35.04
7237.300000	---	38.67	200.0	H	126.0	0.5	54.00	15.33
7237.300000	43.46	---	200.0	H	126.0	0.5	74.00	30.54
9279.000000	---	40.23	150.0	V	127.0	2.0	54.00	13.77
9279.000000	46.71	---	150.0	V	127.0	2.0	74.00	27.29
17789.200000	---	49.36	200.0	H	346.0	8.8	54.00	4.64
17789.200000	54.82	---	200.0	H	346.0	8.8	74.00	19.18

Middle Channel: 2437MHz


Full Spectrum

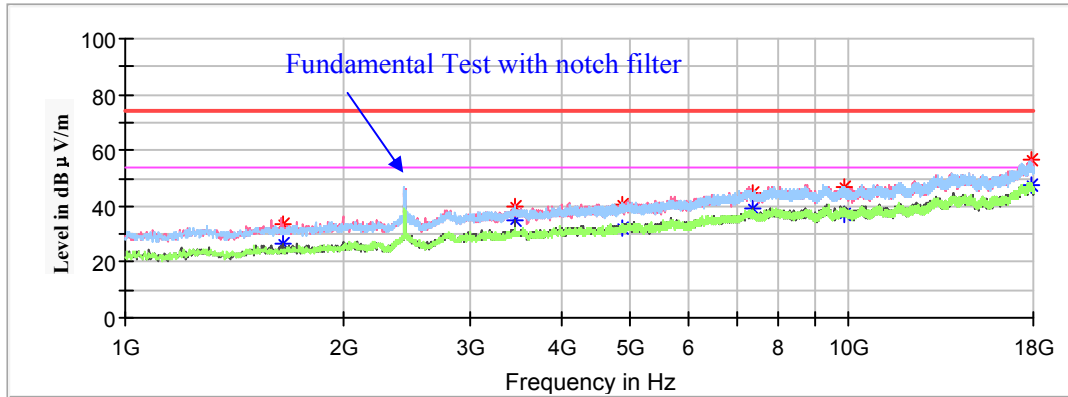

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1647.700000	---	26.58	200.0	V	297.0	-15.8	54.00	27.42
1647.700000	33.37	---	200.0	V	297.0	-15.8	74.00	40.63
3454.800000	---	34.96	200.0	V	313.0	-8.9	54.00	19.04
3454.800000	40.09	---	200.0	V	313.0	-8.9	74.00	33.91
4874.000000	---	32.11	150.0	H	258.0	-5.4	54.00	21.89
4874.000000	40.63	---	150.0	H	258.0	-5.4	74.00	33.37
7354.600000	---	38.86	150.0	V	231.0	0.7	54.00	15.14
7354.600000	44.45	---	150.0	V	231.0	0.7	74.00	29.55
9834.900000	---	37.34	150.0	V	0.0	2.0	54.00	16.66
9834.900000	47.12	---	150.0	V	0.0	2.0	74.00	26.88
17841.900000	---	47.74	150.0	V	65.0	8.8	54.00	6.26
17841.900000	56.72	---	150.0	V	65.0	8.8	74.00	17.28

High Channel: 2462MHz

Full Spectrum

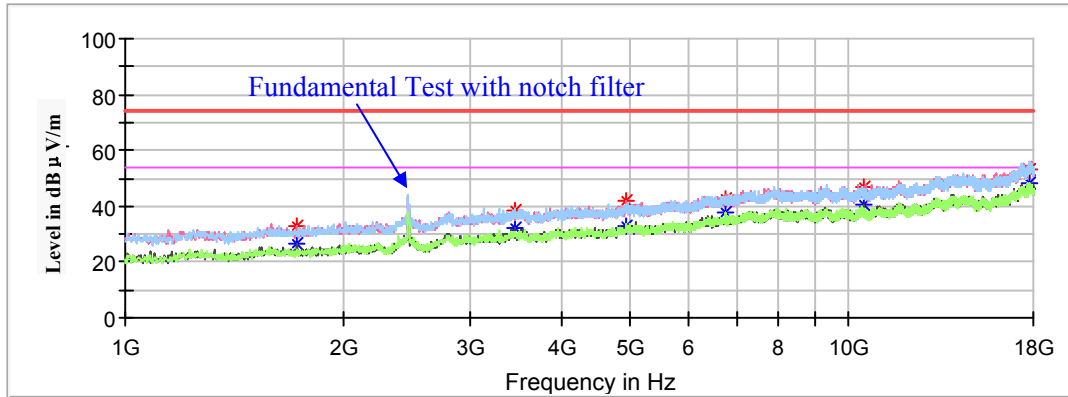

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1725.900000	---	26.70	200.0	V	191.0	-15.5	54.00	27.30
1725.900000	33.09	---	200.0	V	191.0	-15.5	74.00	40.91
3454.800000	---	32.45	200.0	V	309.0	-8.9	54.00	21.55
3454.800000	38.71	---	200.0	V	309.0	-8.9	74.00	35.29
4924.000000	---	32.89	200.0	V	206.0	-5.3	54.00	21.11
4924.000000	41.61	---	200.0	V	206.0	-5.3	74.00	32.39
6749.400000	---	37.67	150.0	H	224.0	-0.6	54.00	16.33
6749.400000	42.48	---	150.0	H	224.0	-0.6	74.00	31.52
10486.000000	---	40.83	200.0	V	131.0	2.3	54.00	13.17
10486.000000	47.09	---	200.0	V	131.0	2.3	74.00	26.91
17799.400000	---	48.57	200.0	V	146.0	8.8	54.00	5.43
17799.400000	53.26	---	200.0	V	146.0	8.8	74.00	20.74

802.11n-HT40 Mode:


(Pre-scan in the X,Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V/m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V/m)

Low Channel: 2422MHz


Full Spectrum

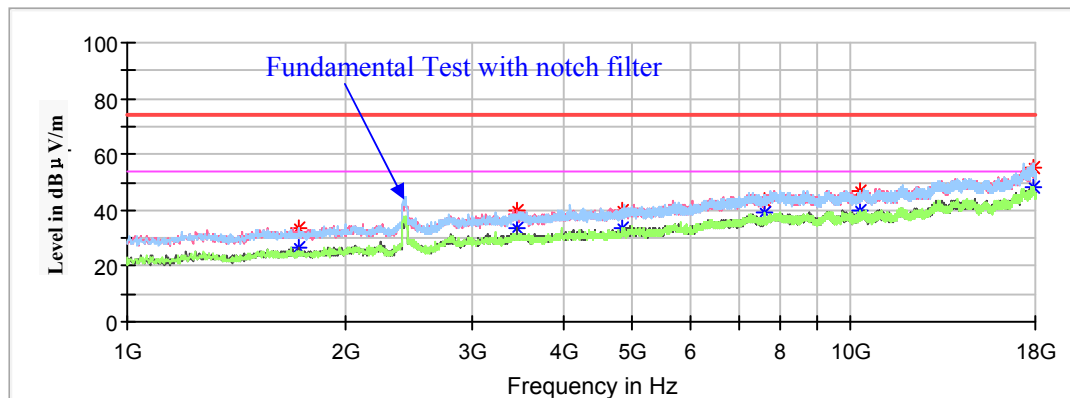

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1729.300000	---	26.63	200.0	V	189.0	-15.5	54.00	27.37
1729.300000	33.62	---	200.0	V	189.0	-15.5	74.00	40.38
3454.800000	---	33.38	200.0	V	311.0	-8.9	54.00	20.62
3454.800000	39.52	---	200.0	V	311.0	-8.9	74.00	34.48
4844.000000	---	33.66	200.0	H	306.0	-5.5	54.00	20.34
4844.000000	40.15	---	200.0	H	306.0	-5.5	74.00	33.85
7623.200000	---	38.83	200.0	H	37.0	1.2	54.00	15.17
7623.200000	43.66	---	200.0	H	37.0	1.2	74.00	30.34
10285.400000	---	39.71	200.0	H	356.0	2.1	54.00	14.29
10285.400000	46.90	---	200.0	H	356.0	2.1	74.00	27.10
17836.800000	---	48.54	200.0	V	279.0	8.8	54.00	5.46
17836.800000	54.92	---	200.0	V	279.0	8.8	74.00	19.08

Middle Channel: 2437MHz


Full Spectrum

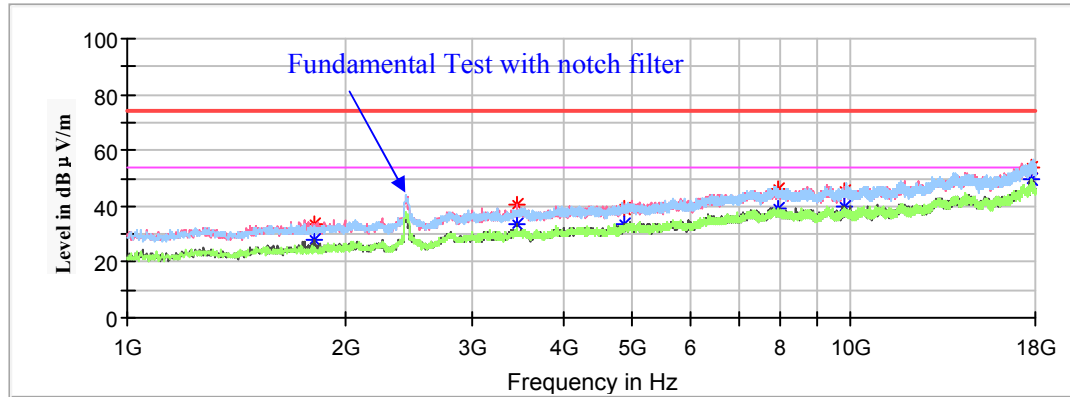

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1810.900000	---	28.08	200.0	V	306.0	-15.2	54.00	25.92
1810.900000	33.90	---	200.0	V	306.0	-15.2	74.00	40.10
3454.800000	---	33.87	150.0	V	306.0	-8.9	54.00	20.13
3454.800000	40.76	---	150.0	V	306.0	-8.9	74.00	33.24
4874.000000	---	33.39	150.0	V	277.0	-5.4	54.00	20.61
4874.000000	39.03	---	150.0	V	277.0	-5.4	74.00	34.97
7936.000000	---	39.14	200.0	H	0.0	1.7	54.00	14.86
7936.000000	46.31	---	200.0	H	0.0	1.7	74.00	27.69
9826.400000	---	40.01	200.0	V	24.0	2.0	54.00	13.99
9826.400000	45.78	---	200.0	V	24.0	2.0	74.00	28.22
17809.600000	---	49.62	200.0	H	125.0	8.8	54.00	4.38
17809.600000	53.55	---	200.0	H	125.0	8.8	74.00	20.45

High Channel: 2452MHz


Full Spectrum

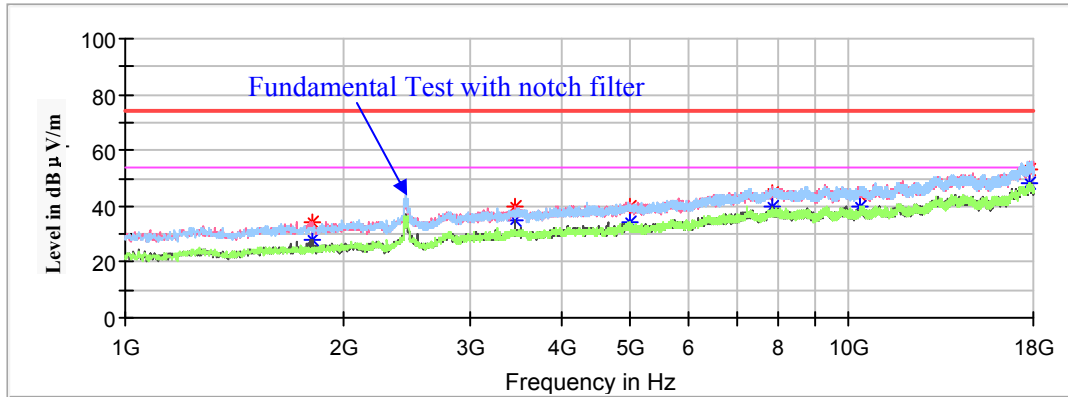


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1816.000000	---	27.93	200.0	V	81.0	-15.2	54.00	26.07
1816.000000	33.95	---	200.0	V	81.0	-15.2	74.00	40.05
3454.800000	---	34.74	200.0	V	312.0	-8.9	54.00	19.26
3454.800000	40.03	---	200.0	V	312.0	-8.9	74.00	33.97
4904.000000	---	34.45	200.0	H	199.0	-5.2	54.00	19.55
4904.000000	39.95	---	200.0	H	199.0	-5.2	74.00	34.05
7862.900000	---	39.56	150.0	V	349.0	1.6	54.00	14.44
7862.900000	44.96	---	150.0	V	349.0	1.6	74.00	29.04
10350.000000	---	40.15	200.0	V	169.0	2.2	54.00	13.85
10350.000000	44.24	---	200.0	V	169.0	2.2	74.00	29.76
17779.000000	---	48.47	200.0	V	52.0	8.8	54.00	5.53
17779.000000	53.35	---	200.0	V	52.0	8.8	74.00	20.65

18GHz-25GHz:

Pre-scan with 802.11b, 802.11g, 802.11n-HT20 and 802.11n-HT40 modes of operation in the X,Y and Z axes of orientation, the worst case **high channel of 802.11n-HT40 mode in Z-axis of orientation** was recorded.

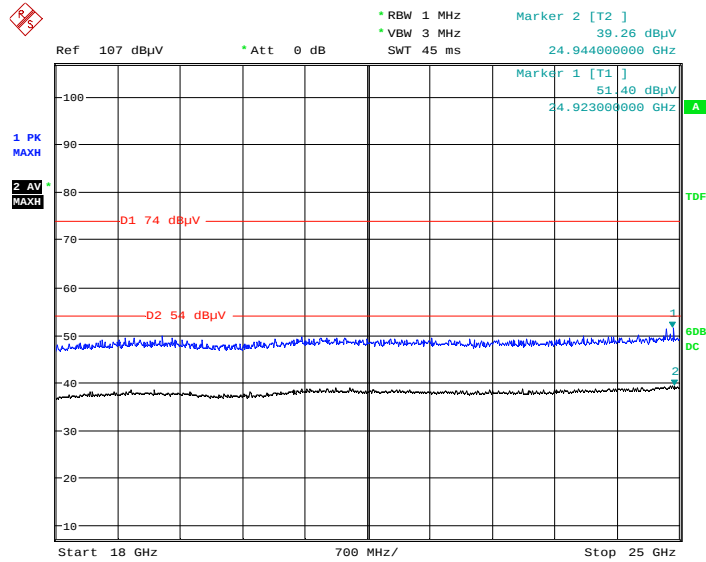Horizontal

Date: 17.JUL.2020 04:14:58

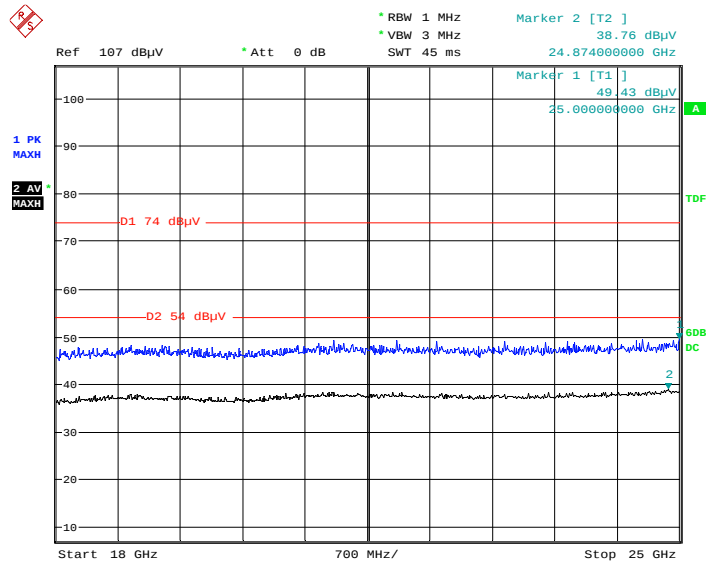Vertical

Date: 17.JUL.2020 04:29:56

Restricted Bands Emissions Test:

Note:

1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)

Corrected Amplitude (dB μ V/m) = Corrected Factor (dB/m) + Reading (dB μ V)Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V/m)**802.11b Mode:** (Pre-scan in the X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 2412MHz								
2390.00	---	43.10	200.0	H	351.0	-2.9	54.00	10.90
2390.00	49.04	---	200.0	H	351.0	-2.9	74.00	24.96
High Channel: 2462MHz								
2483.50	48.62	---	150.0	H	328.0	-2.5	74.00	25.38
2483.50	---	44.66	150.0	H	328.0	-2.5	54.00	9.34

802.11g Mode: (Pre-scan in the X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 2412MHz								
2390.00	57.66	---	200.0	H	325.0	-2.9	74.00	16.34
2390.00	---	50.86	200.0	H	325.0	-2.9	54.00	3.14
High Channel: 2462MHz								
2483.50	59.03	---	150.0	H	204.0	-2.5	74.00	14.97
2483.50	---	49.66	150.0	H	204.0	-2.5	54.00	4.34

802.11n-HT20 Mode: (Pre-scan in the X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 2412MHz								
2390.00	58.76	---	150.0	H	191.0	-2.9	74.00	15.24
2390.00	---	52.29	150.0	H	191.0	-2.9	54.00	1.71
High Channel: 2462MHz								
2483.50	---	50.53	150.0	H	198.0	-2.5	54.00	3.47
2483.50	58.38	---	150.0	H	198.0	-2.5	74.00	15.62

802.11n-HT40 Mode: (Pre-scan in the X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 2422MHz								
2390.000000	54.20	---	150.0	H	317.0	-2.9	74.00	19.80
2390.000000	---	52.05	150.0	H	317.0	-2.9	54.00	1.95
High Channel: 2452MHz								
2483.500000	---	51.82	150.0	H	205.0	-2.5	54.00	2.18
2483.500000	57.34	---	150.0	H	205.0	-2.5	74.00	16.66

For BLE(1M) Mode:**Spurious Emission Test:****30MHz-1GHz**

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **high** channel of operation in the Z axis of orientation was recorded)

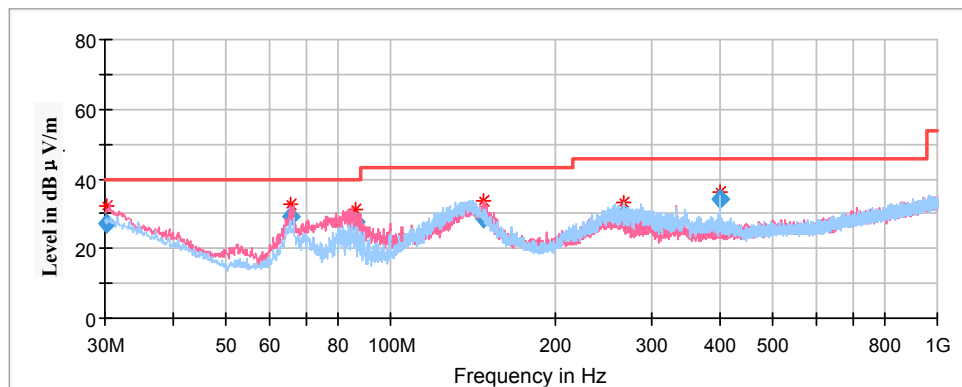

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	QuasiPeak (dBμV/m)	Height (cm)	Polar (H/V)				
30.195075	27.14	100.0	V	216.0	-4.5	40.00	12.86
65.631600	29.40	100.0	V	308.0	-18.0	40.00	10.60
86.264050	27.84	100.0	V	164.0	-18.0	40.00	12.16
148.232250	28.71	100.0	V	341.0	-12.7	43.50	14.79
266.334300	29.62	100.0	H	312.0	-12.1	46.00	16.38
400.019900	34.46	100.0	H	253.0	-8.6	46.00	11.54

1GHz-18GHz


(Pre-scan in the X,Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dBμV/m) = Corrected Factor (dB/m) + Reading (dBμV)
 Margin (dB) = Limit (dBμV/m) – Corrected Amplitude (dBμV/m)

Low Channel: 2402MHz


Full Spectrum

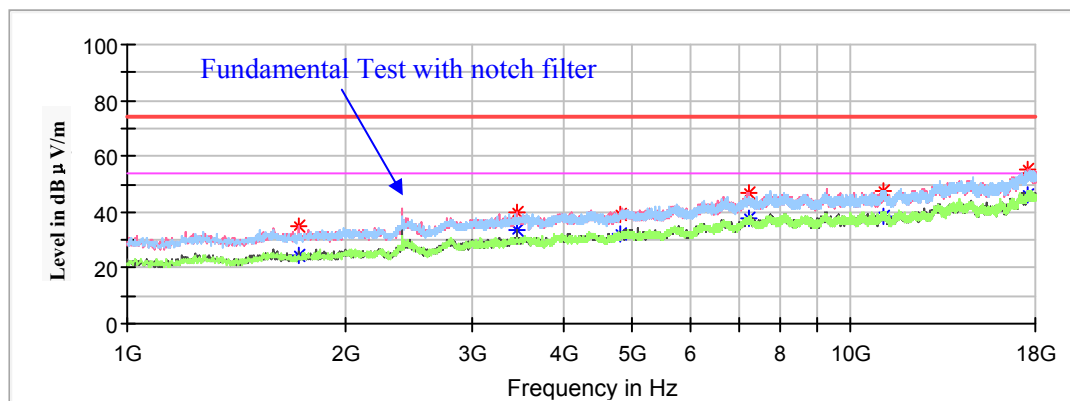

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1729.300000	34.72	---	200.0	V	174.0	-15.5	74.00	39.28
1729.300000	---	24.61	200.0	V	174.0	-15.5	54.00	29.39
3454.800000	39.93	---	150.0	V	300.0	-8.9	74.00	34.07
3454.800000	---	33.86	150.0	V	300.0	-8.9	54.00	20.14
4804.000000	38.92	---	200.0	H	220.0	-5.6	74.00	35.08
4804.000000	---	31.98	200.0	H	220.0	-5.6	54.00	22.02
7228.800000	---	37.59	200.0	V	110.0	0.4	54.00	16.41
7228.800000	46.68	---	200.0	V	110.0	0.4	74.00	27.32
11070.800000	---	38.37	200.0	H	264.0	2.9	54.00	15.63
11070.800000	47.72	---	200.0	H	264.0	2.9	74.00	26.28
17609.000000	---	46.37	200.0	V	174.0	8.9	54.00	7.63
17609.000000	55.16	---	200.0	V	174.0	8.9	74.00	18.84

Middle Channel: 2440MHz


Full Spectrum

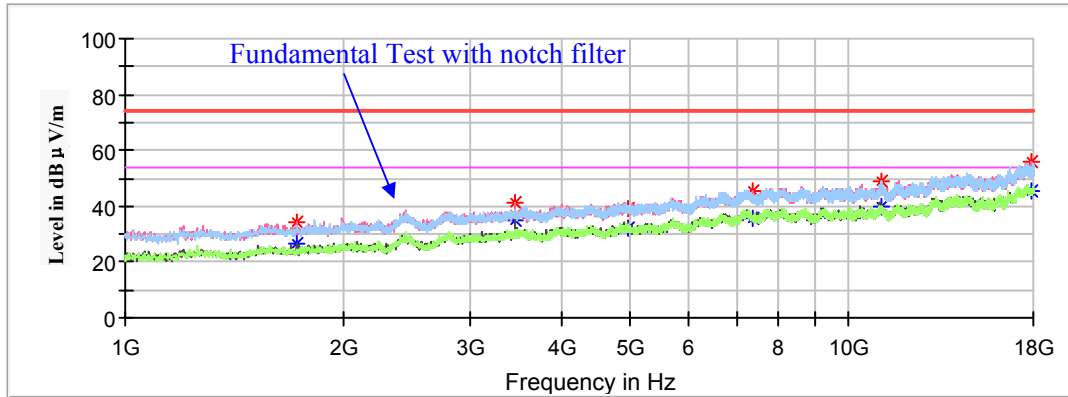

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1724.200000	---	26.78	200.0	V	199.0	-15.5	54.00	27.22
1724.200000	33.99	---	200.0	V	199.0	-15.5	74.00	40.01
3454.800000	---	34.91	200.0	V	312.0	-8.9	54.00	19.09
3454.800000	41.23	---	200.0	V	312.0	-8.9	74.00	32.77
4880.000000	---	32.35	150.0	V	336.0	-5.4	54.00	21.65
4880.000000	39.34	---	150.0	V	336.0	-5.4	74.00	34.66
7356.300000	---	35.74	150.0	V	265.0	0.7	54.00	18.26
7356.300000	45.15	---	150.0	V	265.0	0.7	74.00	28.85
11109.900000	---	39.64	200.0	H	0.0	2.9	54.00	14.36
11109.900000	48.79	---	200.0	H	0.0	2.9	74.00	25.21
17933.700000	---	45.59	150.0	V	81.0	8.8	54.00	8.41
17933.700000	55.80	---	150.0	V	81.0	8.8	74.00	18.20

High Channel: 2480MHz

Full Spectrum

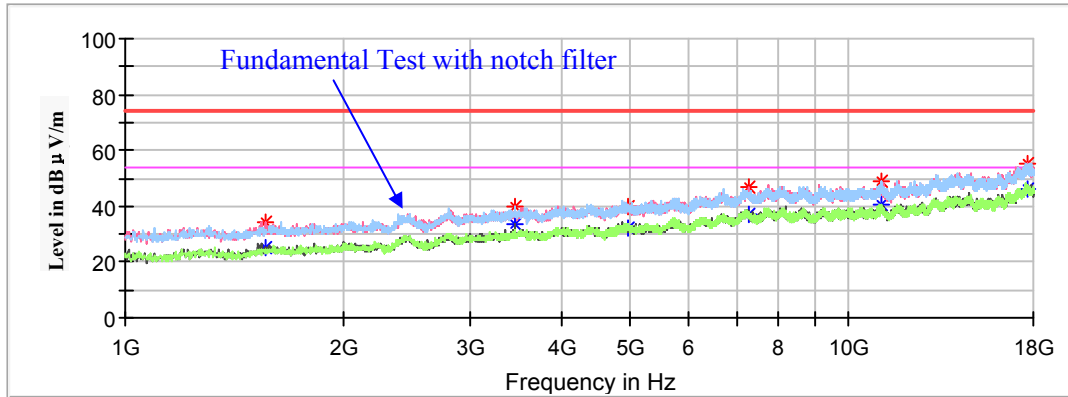


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1562.700000	34.49	---	150.0	V	278.0	-16.1	74.00	39.51
1562.700000	---	24.89	150.0	V	278.0	-16.1	54.00	29.11
3454.800000	39.70	---	200.0	V	229.0	-8.9	74.00	34.30
3454.800000	---	33.53	200.0	V	229.0	-8.9	54.00	20.47
4960.000000	40.14	---	150.0	V	348.0	-5.3	74.00	33.86
4960.000000	---	32.04	150.0	V	348.0	-5.3	54.00	21.96
7256.000000	---	37.09	200.0	V	274.0	0.5	54.00	16.91
7256.000000	47.15	---	200.0	V	274.0	0.5	74.00	26.85
11128.600000	---	40.54	200.0	H	80.0	2.9	54.00	13.46
11128.600000	49.27	---	200.0	H	80.0	2.9	74.00	24.73
17637.900000	---	46.07	150.0	V	160.0	8.9	54.00	7.93
17637.900000	55.37	---	150.0	V	160.0	8.9	74.00	18.63

18GHz-25GHz


(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **high** channel of operation in the Z axis of orientation was recorded)

Horizontal

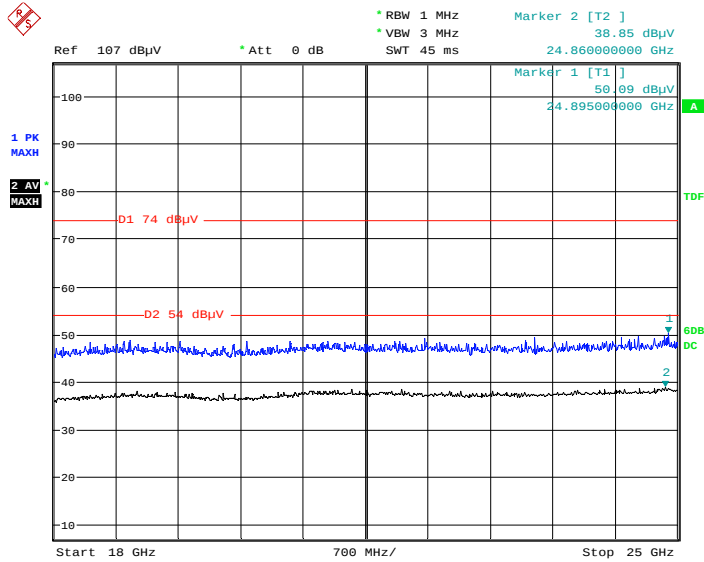

Date: 17.JUL.2020 04:43:07


Vertical

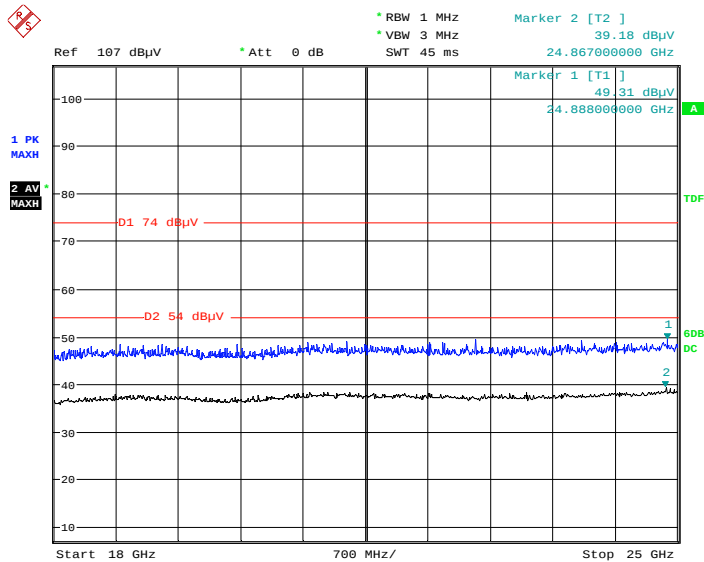

Date: 17.JUL.2020 04:59:41

For BLE(2M) Mode:**Spurious Emission Test:****30MHz-1GHz**

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **high** channel of operation in the Z axis of orientation was recorded)

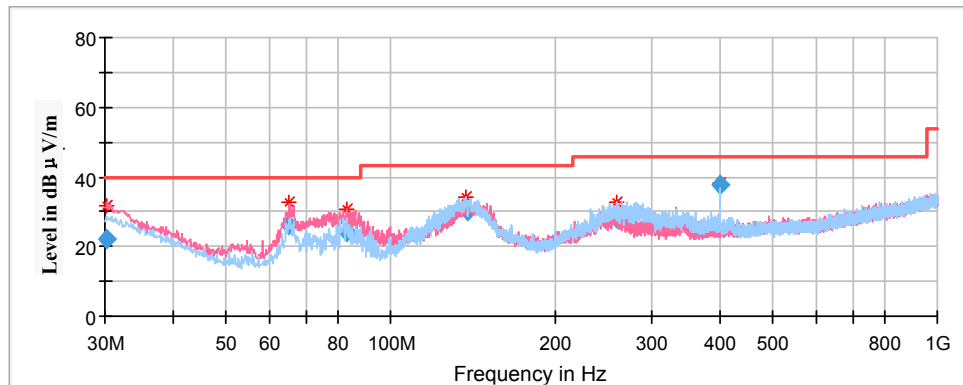

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	QuasiPeak (dBμV/m)	Height (cm)	Polar (H/V)				
30.321317	22.05	100.0	V	204.0	-4.6	40.00	17.95
65.267600	26.17	100.0	V	308.0	-18.0	40.00	13.83
82.957750	24.29	100.0	V	0.0	-18.1	40.00	15.71
138.480550	30.06	200.0	H	196.0	-12.3	43.50	13.44
259.608950	28.04	100.0	H	311.0	-12.3	46.00	17.96
400.000100	37.60	100.0	H	157.0	-8.6	46.00	8.40

1GHz-18GHz:


(Pre-scan in the X,Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dBμV/m) = Corrected Factor (dB/m) + Reading (dBμV)
 Margin (dB) = Limit (dBμV/m) – Corrected Amplitude (dBμV/m)

Low Channel: 2402MHz


Full Spectrum

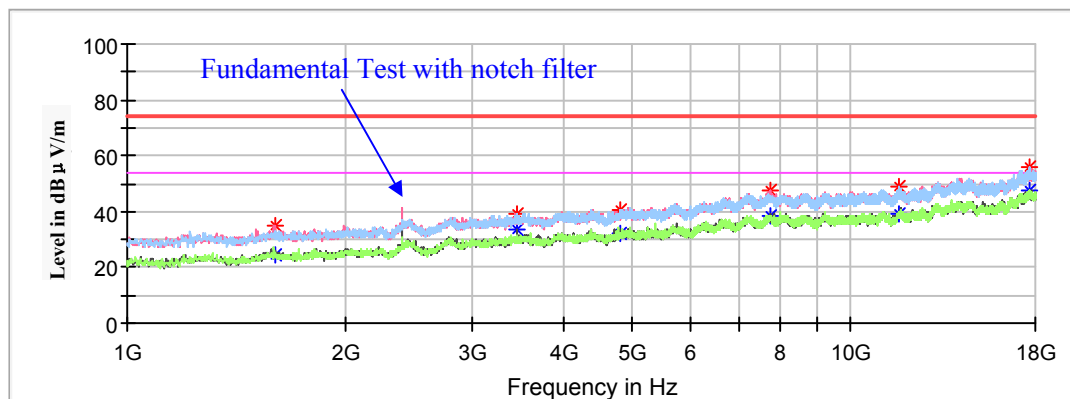

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1598.400000	35.30	---	150.0	V	334.0	-16.0	74.00	38.70
1598.400000	---	24.67	150.0	V	334.0	-16.0	54.00	29.33
3454.800000	---	33.65	200.0	V	306.0	-8.9	54.00	20.35
3454.800000	39.43	---	200.0	V	306.0	-8.9	74.00	34.57
4804.000000	---	32.10	150.0	V	291.0	-5.6	54.00	21.90
4804.000000	40.23	---	150.0	V	291.0	-5.6	74.00	33.77
7732.000000	---	38.15	150.0	H	229.0	1.4	54.00	15.85
7732.000000	47.87	---	150.0	H	229.0	1.4	74.00	26.13
11655.600000	---	39.36	200.0	H	287.0	3.1	54.00	14.64
11655.600000	49.12	---	200.0	H	287.0	3.1	74.00	24.88
17678.700000	---	47.34	150.0	H	169.0	8.9	54.00	6.66
17678.700000	55.76	---	150.0	H	169.0	8.9	74.00	18.24

Middle Channel: 2440MHz


Full Spectrum

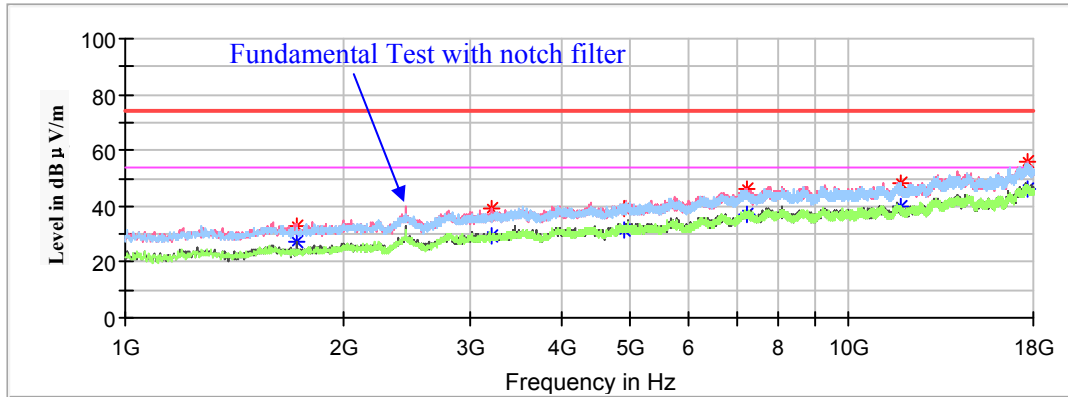

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1725.900000	33.12	---	150.0	V	219.0	-15.5	74.00	40.88
1725.900000	---	27.54	150.0	V	219.0	-15.5	54.00	26.46
3206.600000	38.81	---	200.0	V	145.0	-9.6	74.00	35.19
3206.600000	---	29.23	200.0	V	145.0	-9.6	54.00	24.77
4880.000000	39.46	---	150.0	H	53.0	-5.4	74.00	34.54
4880.000000	---	31.56	150.0	H	53.0	-5.4	54.00	22.44
7252.600000	---	37.11	200.0	V	19.0	0.5	54.00	16.89
7252.600000	46.12	---	200.0	V	19.0	0.5	74.00	27.88
11835.800000	---	39.71	200.0	H	64.0	3.5	54.00	14.29
11835.800000	48.57	---	200.0	H	64.0	3.5	74.00	25.43
17675.300000	---	46.31	200.0	H	322.0	8.9	54.00	7.69
17675.300000	55.69	---	200.0	H	322.0	8.9	74.00	18.31

High Channel: 2480MHz

Full Spectrum

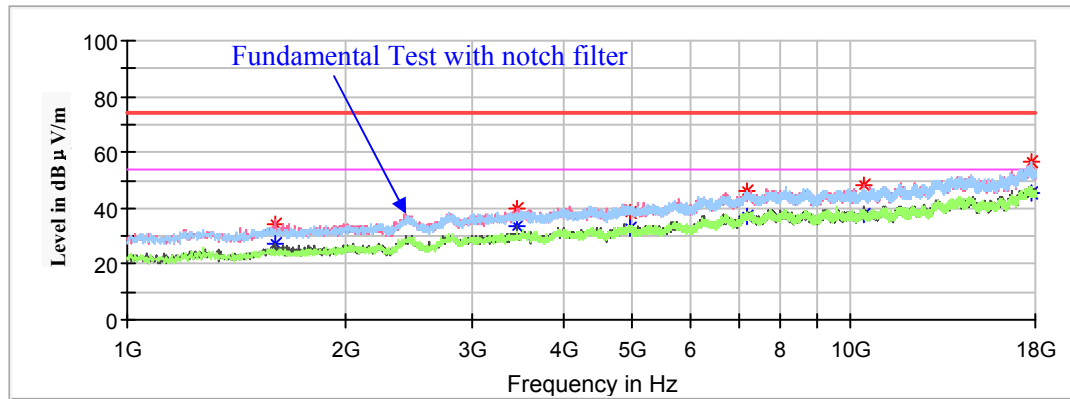


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1605.200000	34.61	---	200.0	V	280.0	-16.0	74.00	39.39
1605.200000	---	27.58	200.0	V	280.0	-16.0	54.00	26.42
3454.800000	40.03	---	200.0	V	0.0	-8.9	74.00	33.97
3454.800000	---	33.44	200.0	V	0.0	-8.9	54.00	20.56
4960.000000	---	32.71	150.0	V	43.0	-5.3	54.00	21.29
4960.000000	38.78	---	150.0	V	43.0	-5.3	74.00	35.22
7203.300000	---	37.22	200.0	H	189.0	0.4	54.00	16.78
7203.300000	45.82	---	200.0	H	189.0	0.4	74.00	28.18
10433.300000	---	37.99	200.0	V	175.0	2.3	54.00	16.01
10433.300000	48.00	---	200.0	V	175.0	2.3	74.00	26.00
17724.600000	---	45.49	200.0	H	0.0	8.8	54.00	8.51
17724.600000	56.40	---	200.0	H	0.0	8.8	74.00	17.60

18GHz-25GHz


(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **middle** channel of operation in the Z axis of orientation was recorded)

Horizontal

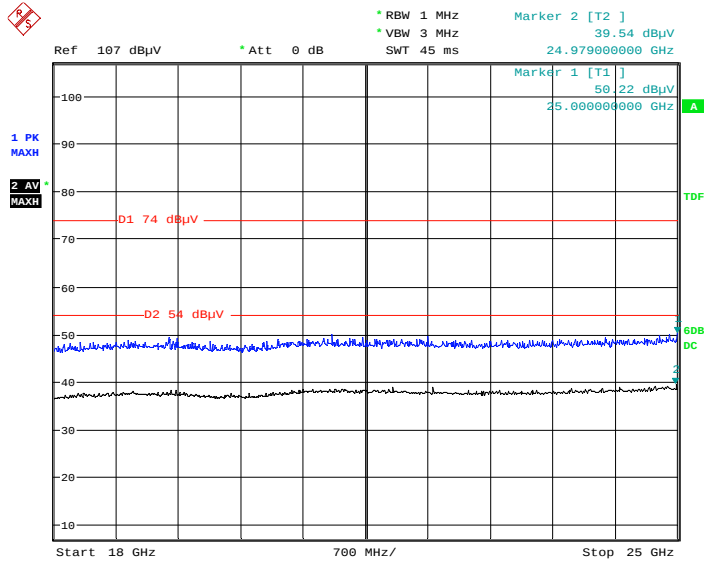

Date: 17.JUL.2020 05:04:35

Vertical

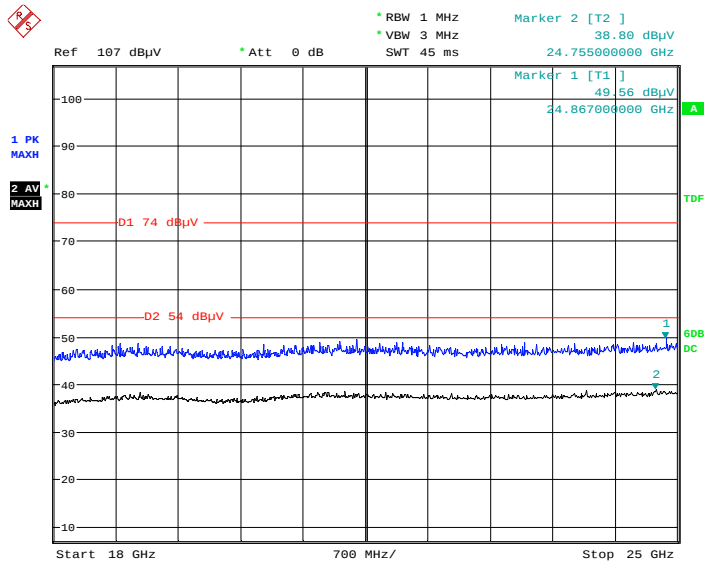

Date: 17.JUL.2020 05:20:59

Restricted Bands Emissions Test:

(Pre-scan in the X,Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded)

Note:

- Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V/m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V/m)

BLE(1Mbps) mode:


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 2402MHz								
2390.000000	---	35.41	150.0	V	118.0	-2.9	54.00	18.59
2390.000000	45.72	---	150.0	V	118.0	-2.9	74.00	28.28
High Channel: 2480MHz								
2483.500000	50.71	---	150.0	V	352.0	-2.5	74.00	23.29
2483.500000	---	45.59	150.0	V	352.0	-2.5	54.00	8.41

BLE(2Mbps) mode:

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 2402MHz								
2390.000000	44.80	---	200.0	H	235.0	-2.9	74.00	29.20
2390.000000	---	37.91	200.0	H	235.0	-2.9	54.00	16.09
High Channel: 2480MHz								
2483.500000	---	44.41	200.0	H	0.0	-2.5	54.00	9.59
2483.500000	51.83	---	200.0	H	0.0	-2.5	74.00	22.17

Transmitting simultaneously test:**30MHz-1GHz**

(The worst case middle channel of BLE(1Mbps) and 802.11n-HT40 high Channel of Wi-Fi mode transmitting simultaneously in Z-axis of orientation was recorded)

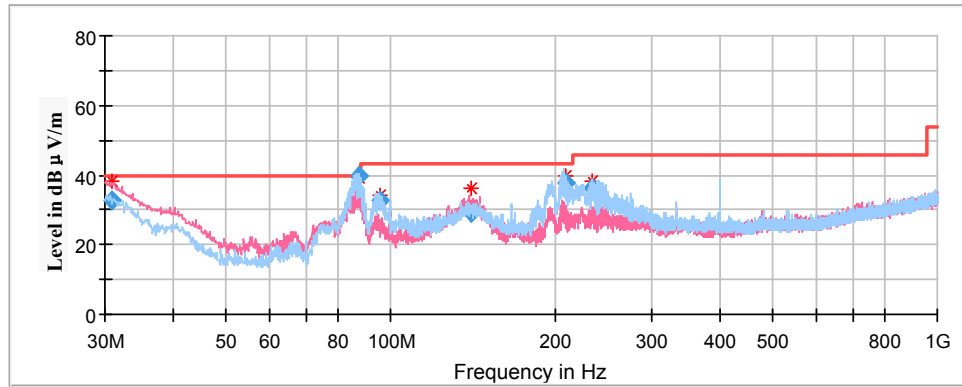


Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	QuasiPeak (dBµV/m)	Height (cm)	Polar (H/V)				
30.908525	32.68	100.0	V	344.0	-5.0	40.00	7.32
87.336250	39.95	200.0	H	125.0	-18.0	40.00	0.05
95.349650	32.78	200.0	H	323.0	-16.5	43.50	10.72
140.027300	28.99	100.0	V	0.0	-12.4	43.50	14.51
208.839850	37.81	200.0	H	0.0	-12.7	43.50	5.69
233.907850	36.24	100.0	H	313.0	-12.6	46.00	9.76

1GHz-18GHz

(The worst case middle channel of BLE(1Mbps) and 802.11n-HT40 high Channel of Wi-Fi mode transmitting simultaneously in Z-axis of orientation was recorded)


Full Spectrum

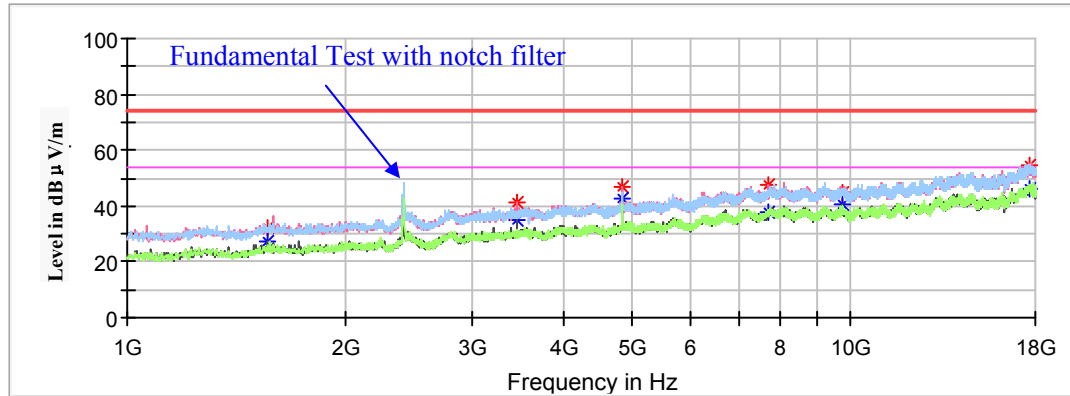


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1562.700000	---	27.53	200.0	V	243.0	-16.1	54.00	26.47
1562.700000	31.89	---	200.0	V	243.0	-16.1	74.00	42.11
3454.800000	---	35.28	200.0	V	310.0	-8.9	54.00	18.72
3454.800000	41.28	---	200.0	V	310.0	-8.9	74.00	32.72
4823.300000	---	42.81	150.0	V	262.0	-5.5	54.00	11.19
4823.300000	47.05	---	150.0	V	262.0	-5.5	74.00	26.95
7701.400000	---	37.96	200.0	V	296.0	1.3	54.00	16.04
7701.400000	47.44	---	200.0	V	296.0	1.3	74.00	26.56
9739.700000	---	40.36	150.0	V	29.0	2.0	54.00	13.64
9739.700000	44.74	---	150.0	V	29.0	2.0	74.00	29.26
17651.500000	---	46.06	200.0	H	288.0	8.9	54.00	7.94
17651.500000	54.69	---	200.0	H	288.0	8.9	74.00	19.31

18GHz-25GHz:



(The worst case middle channel of BLE(1Mbps) and 802.11n-HT40 high Channel of Wi-Fi mode transmitting simultaneously in Z-axis of orientation was recorded)

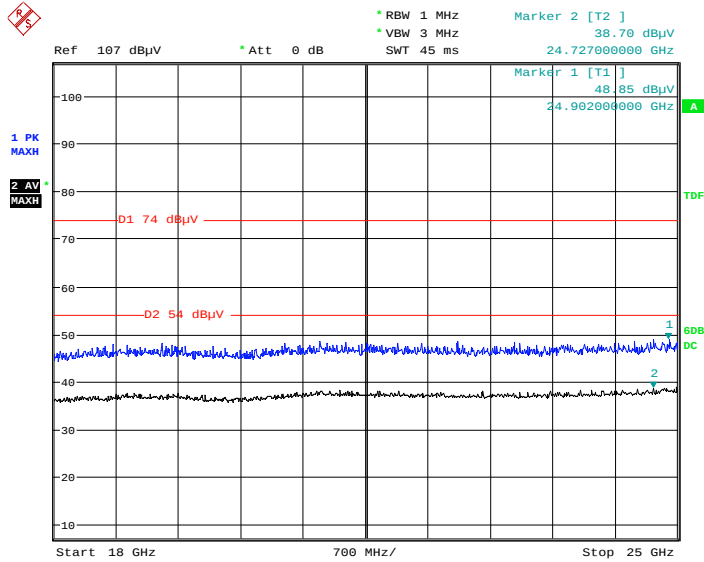Vertical


Date: 17.JUL.2020 05:43:34

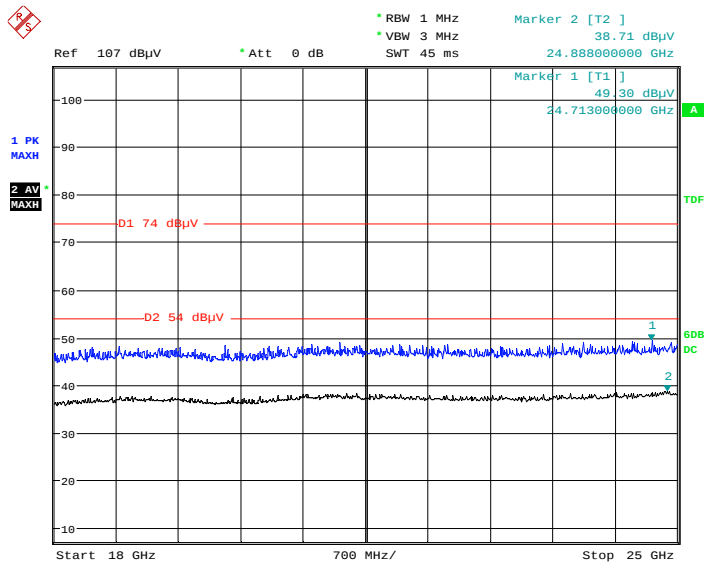Horizontal


Date: 17.JUL.2020 06:00:02

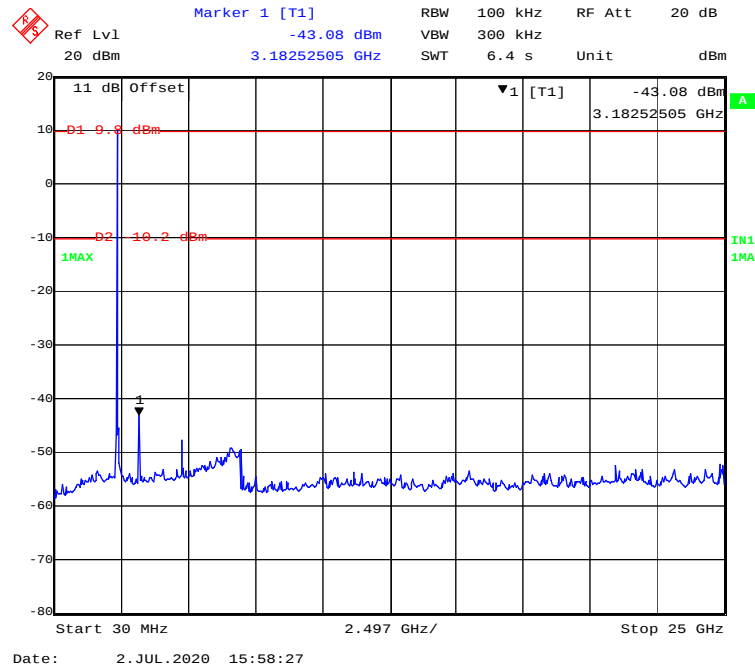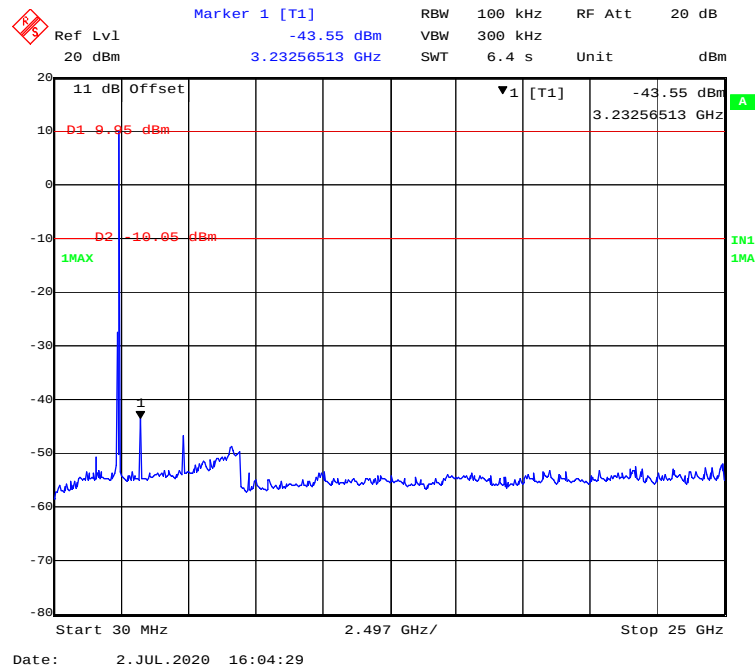Conducted Spurious Emissions at Antenna Port**802.11b Mode Low Channel****802.11b Mode Middle Channel**


802.11b Mode High Channel

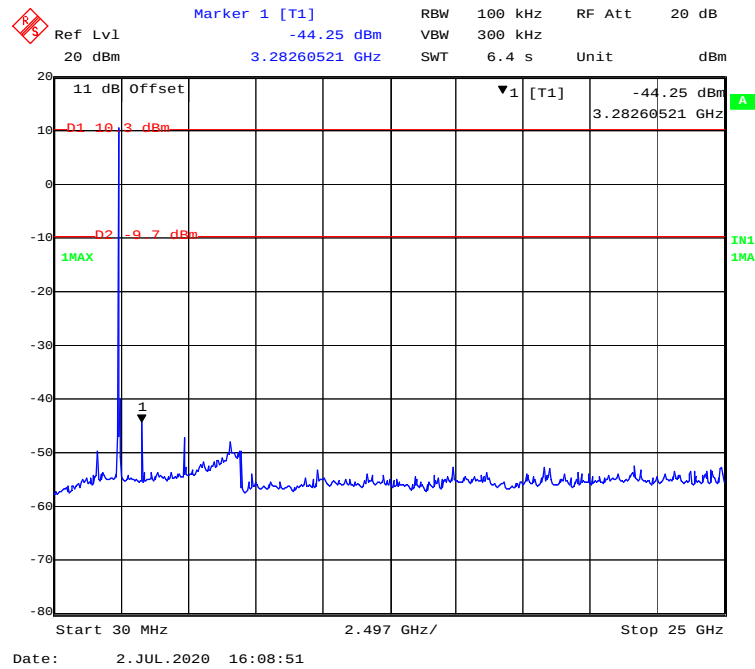


802.11g Mode Low Channel

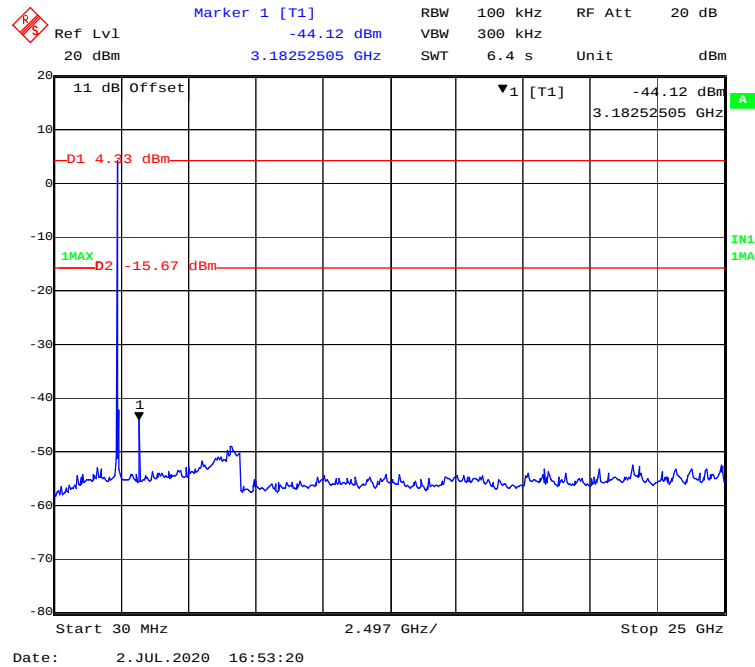


802.11g Mode Middle Channel

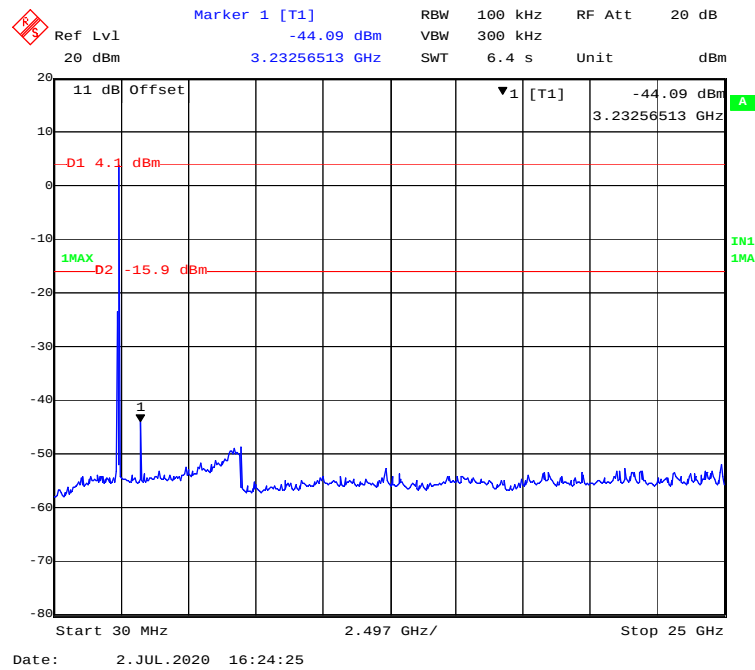


802.11g Mode High Channel

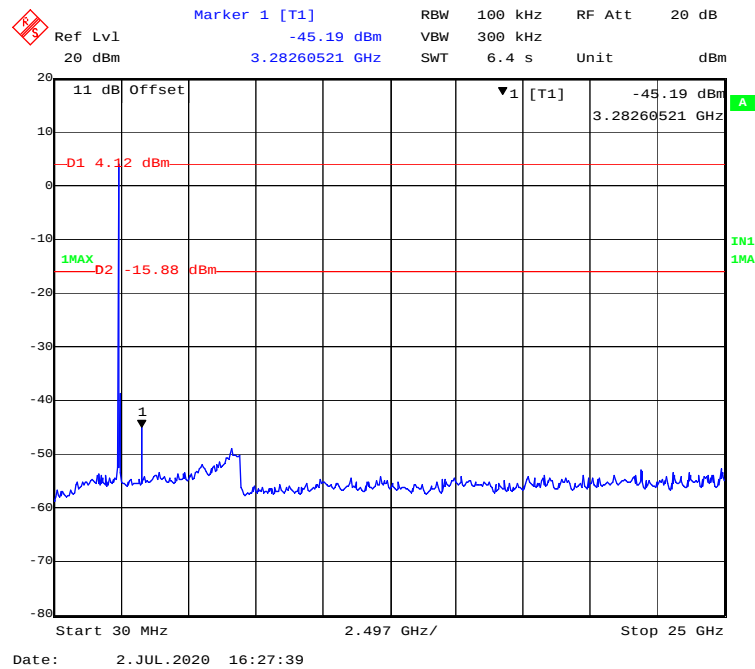


802.11n-HT20 Mode Low Channel

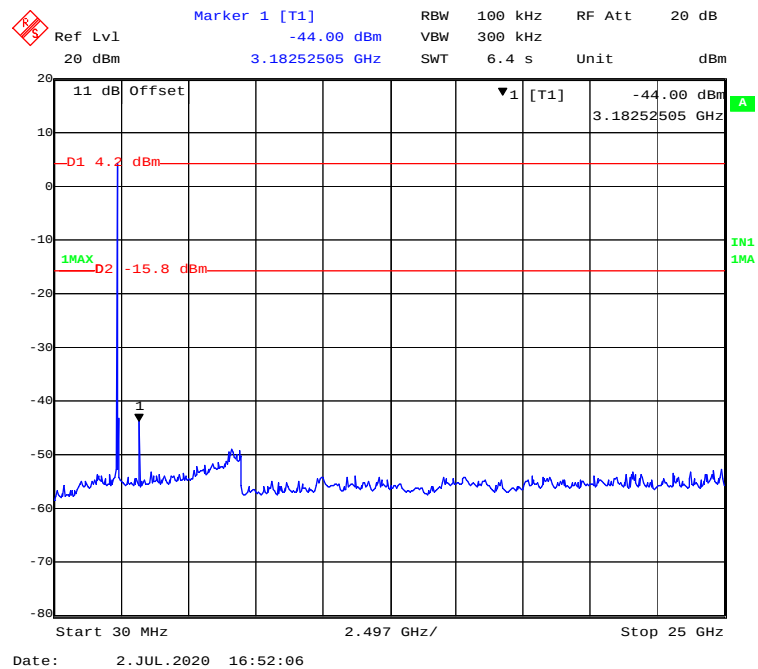


802.11n-HT20 Mode Middle Channel

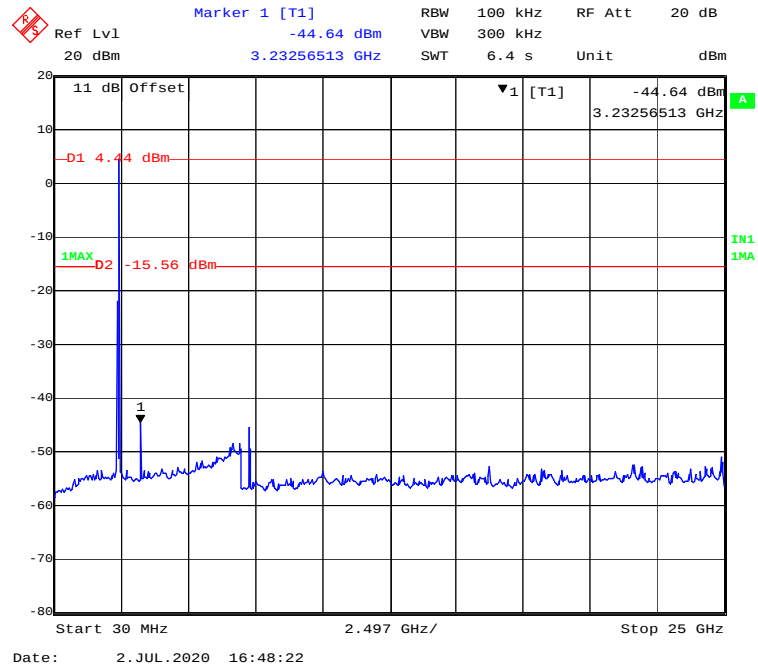


802.11n-HT20 Mode High Channel

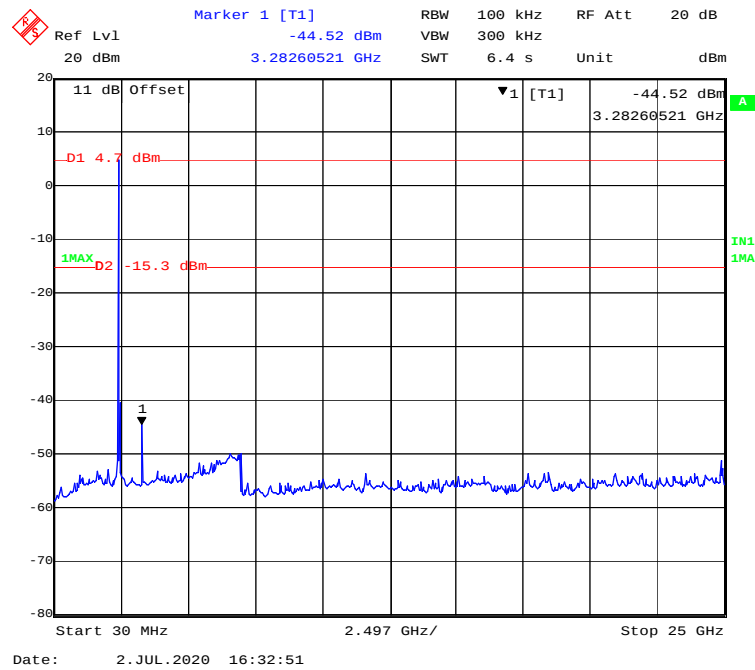


802.11n-HT40 Mode Low Channel


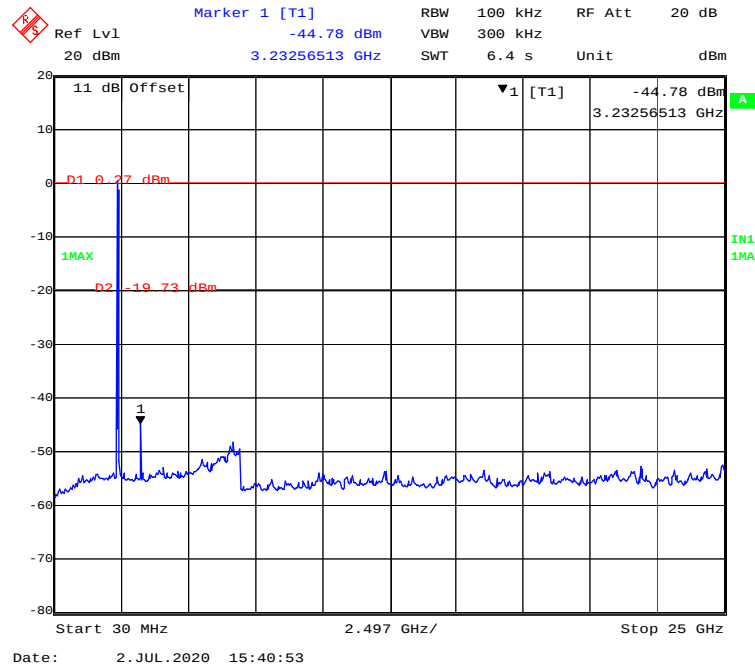


802.11n-HT40 Mode Middle Channel

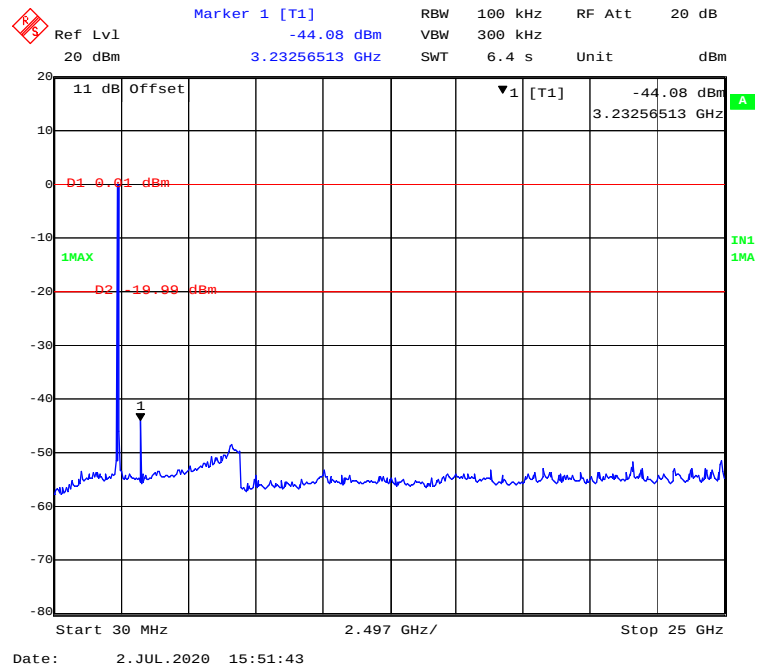


802.11n-HT40 Mode High Channel

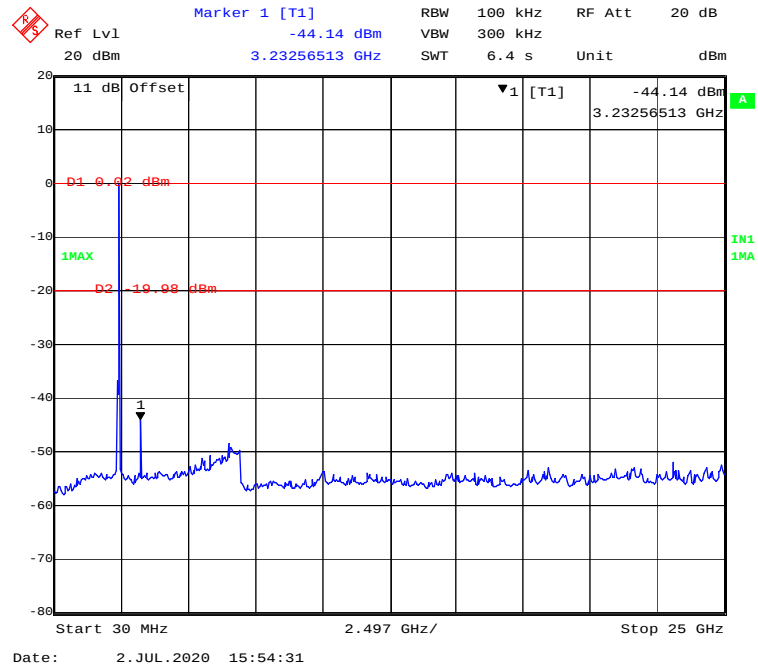


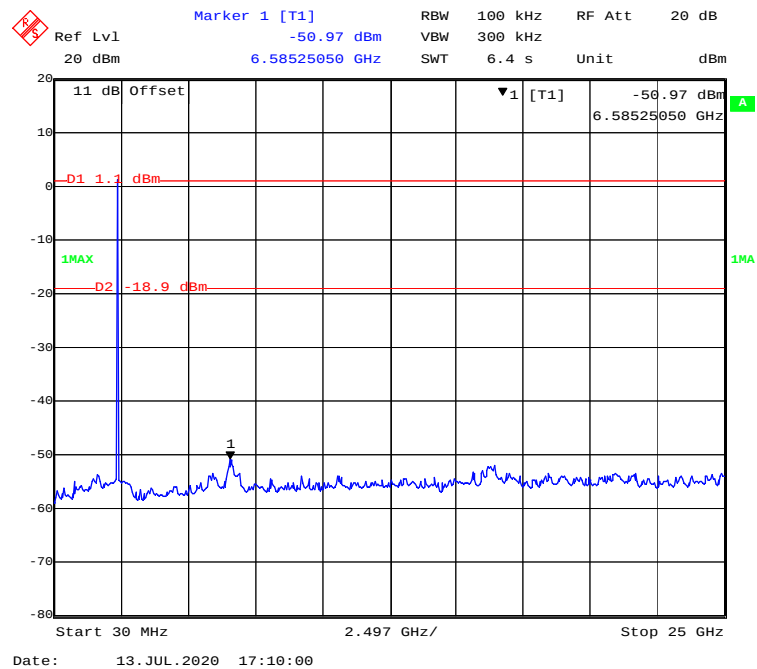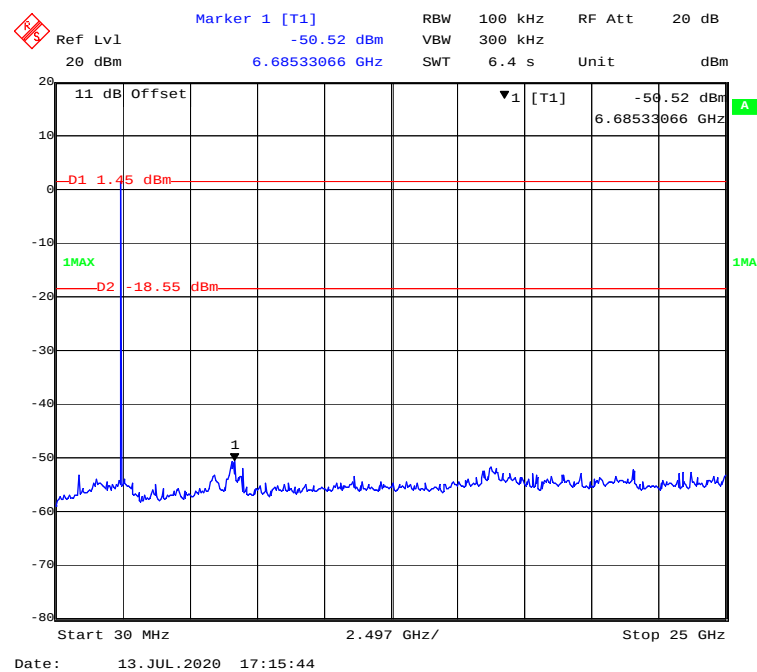BLE(1Mbps) Mode Low Channel**BLE(1Mbps) Mode Middle Channel**

BLE(1Mbps) Mode High Channel

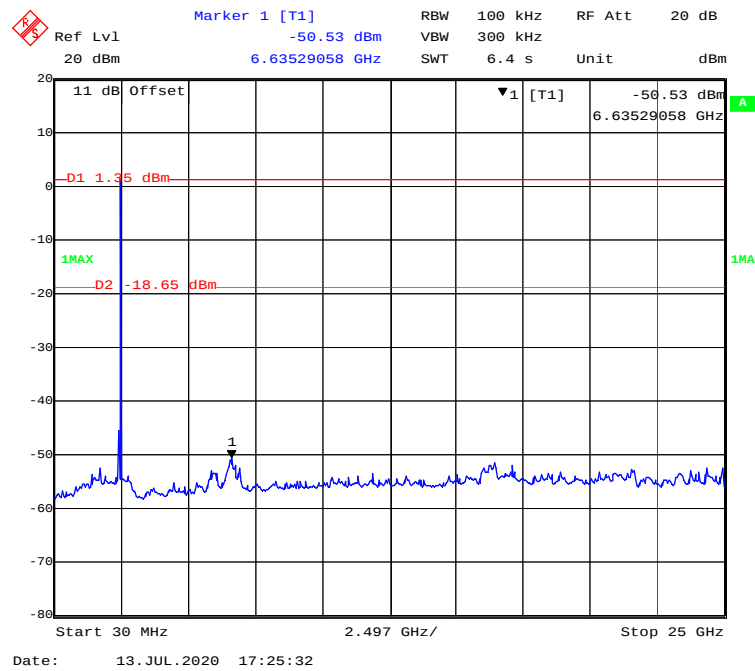

BLE(2Mbps) Mode Low Channel

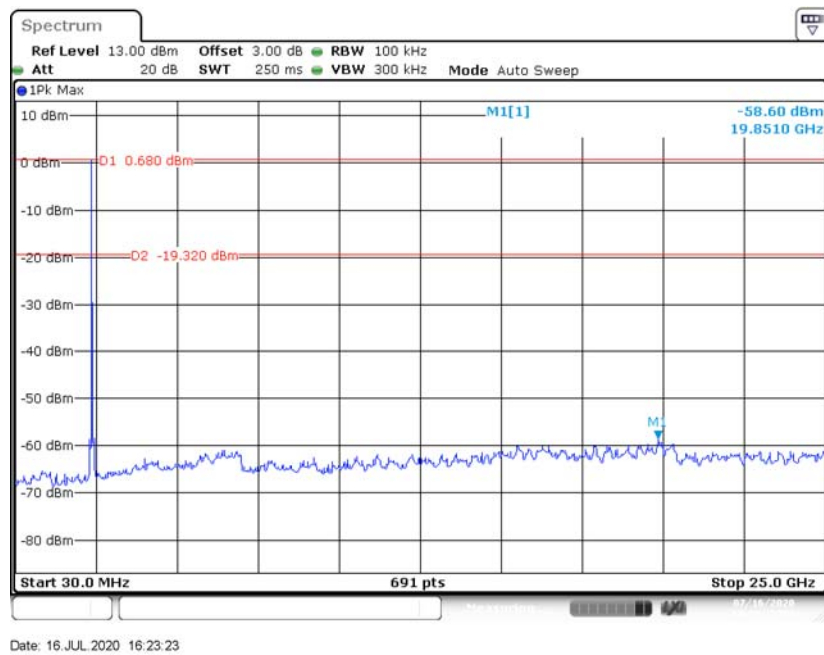

Spectrum

Ref Level 13.00 dBm Offset 3.00 dB RBW 100 kHz
 Att 20 dB SWT 250 ms VBW 300 kHz Mode Auto Sweep

1Pk Max

10 dBm -59.35 dBm 15.5140 GHz
 0 dBm D1 0.820 dBm
 -10 dBm
 -20 dBm D2 -19.180 dBm
 -30 dBm
 -40 dBm
 -50 dBm
 -60 dBm M1
 -70 dBm
 -80 dBm

Start 30.0 MHz 691 pts Stop 25.0 GHz

Date: 16 JUL 2020 16:20:33

Spectrum

Ref Level 13.00 dBm Offset 3.00 dB RBW 100 kHz
 Att 20 dB SWT 250 ms VBW 300 kHz Mode Auto Sweep

● 1Pk Max

10 dBm M1[1] -59.73 dBm 19.9230 GHz
 0 dBm D1 0.780 dBm
 -10 dBm
 -20 dBm D2 -19.220 dBm
 -30 dBm
 -40 dBm
 -50 dBm
 -60 dBm M1
 -70 dBm
 -80 dBm

Start 30.0 MHz 691 pts Stop 25.0 GHz

Date: 16 JUL 2020 16:16:20


FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH**Applicable Standard**

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.8.1

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

**Test Data****Environmental Conditions**

Temperature:	24.8-26.3°C
Relative Humidity:	53-67 %
ATM Pressure:	101.1-102.5 kPa

The testing was performed by Winnie Yang from 2020-07-02 to 2020-07-16.


Test Result: Compliant.

EUT operation mode: Transmitting


Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (MHz)
802.11b Mode			
Low	2412	10.220	≥ 0.5
Middle	2437	10.160	≥ 0.5
High	2462	10.160	≥ 0.5
802.11g Mode			
Low	2412	16.413	≥ 0.5
Middle	2437	16.413	≥ 0.5
High	2462	16.413	≥ 0.5
802.11n-HT20 Mode			
Low	2412	17.615	≥ 0.5
Middle	2437	17.615	≥ 0.5
High	2462	17.615	≥ 0.5
802.11n-HT40 Mode			
Low	2422	35.351	≥ 0.5
Middle	2437	35.351	≥ 0.5
High	2452	35.351	≥ 0.5

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (MHz)
BLE(1Mbps) Mode			
Low	2402	0.745	≥ 0.5
Middle	2440	0.764	≥ 0.5
High	2480	0.770	≥ 0.5
BLE(2Mbps) Mode			
Low	2402	1.223	≥ 0.5
Middle	2440	1.237	≥ 0.5
High	2480	1.245	≥ 0.5



802.11b Mode Low Channel

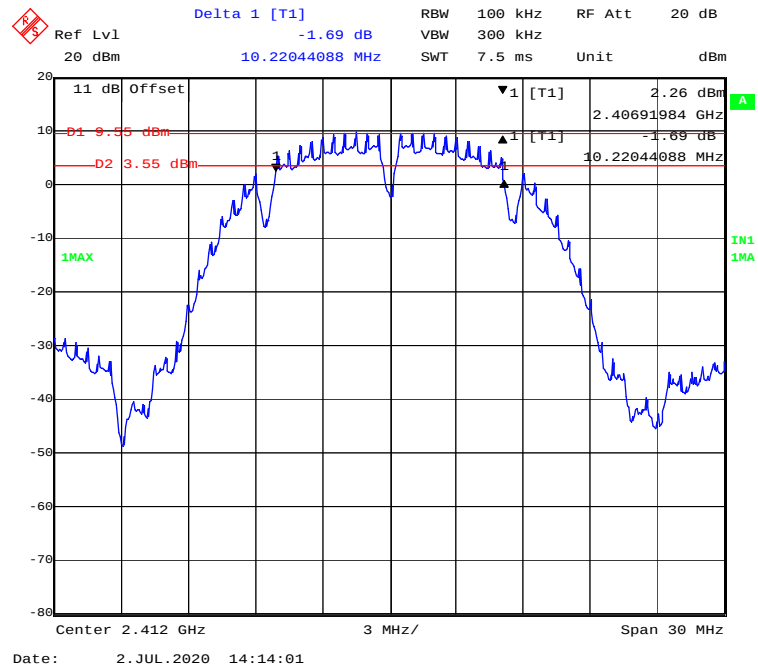


802.11b Mode Middle Channel

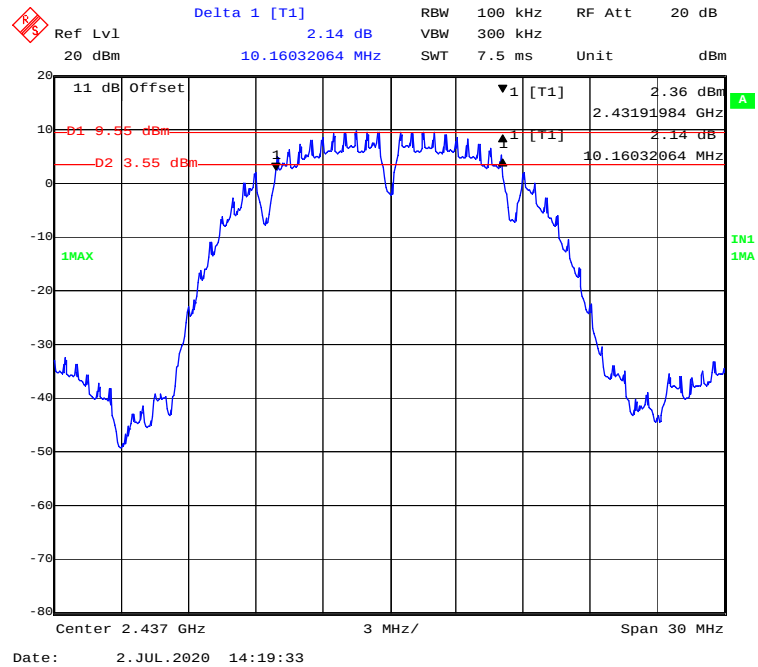


802.11b Mode High Channel

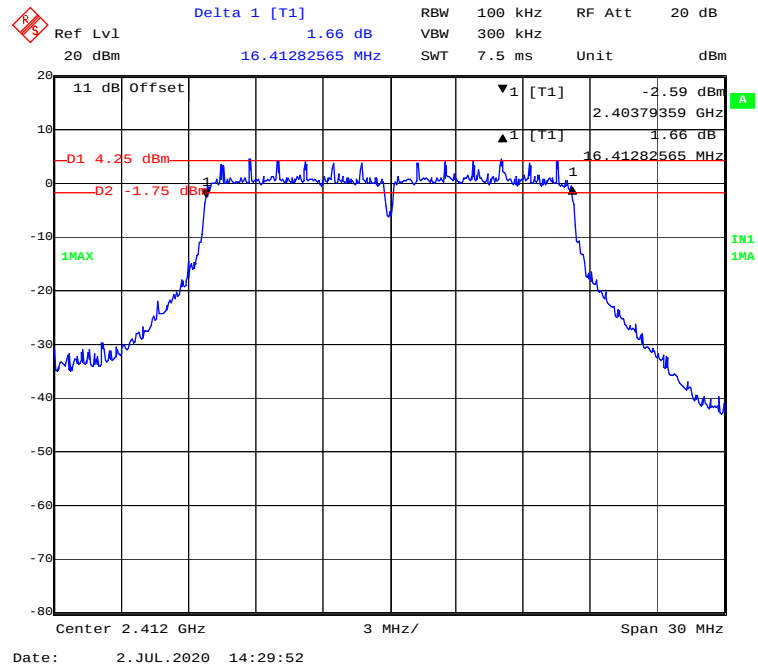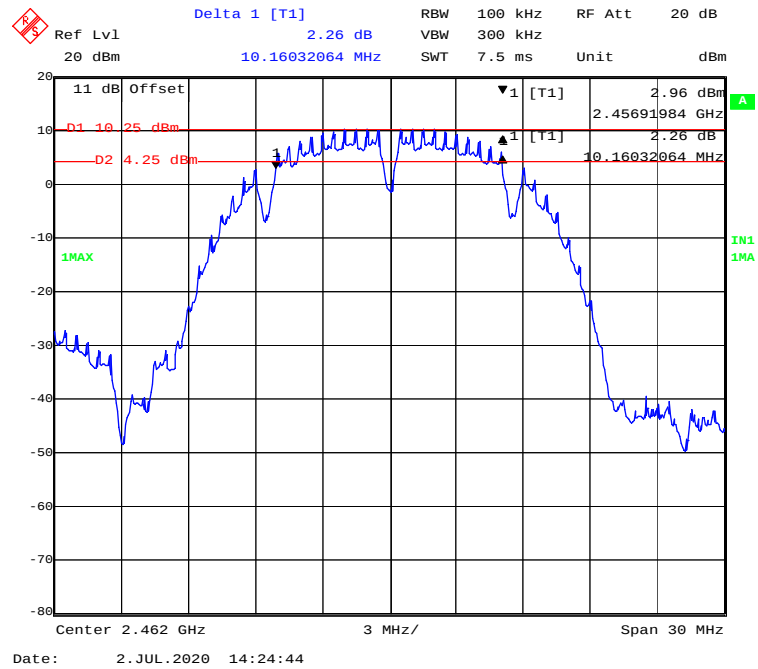

802.11g Mode Middle Channel

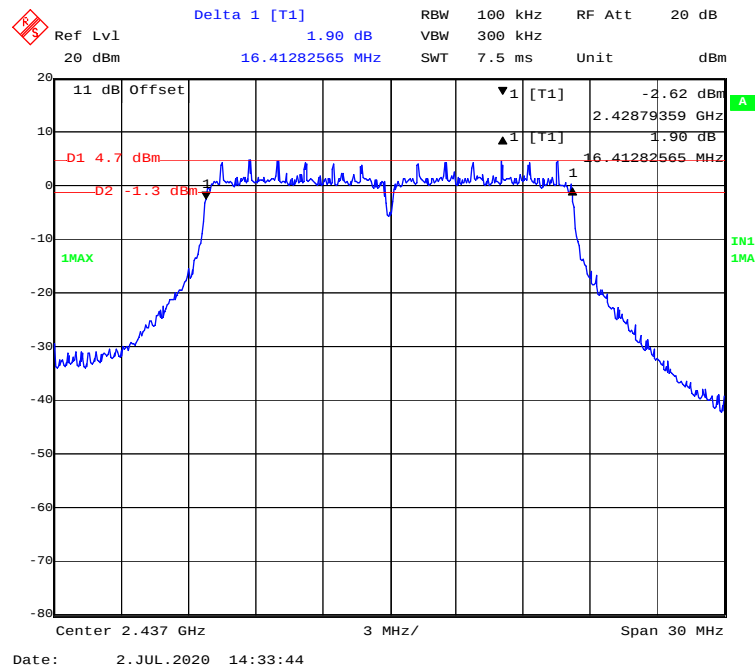

802.11g Mode High Channel

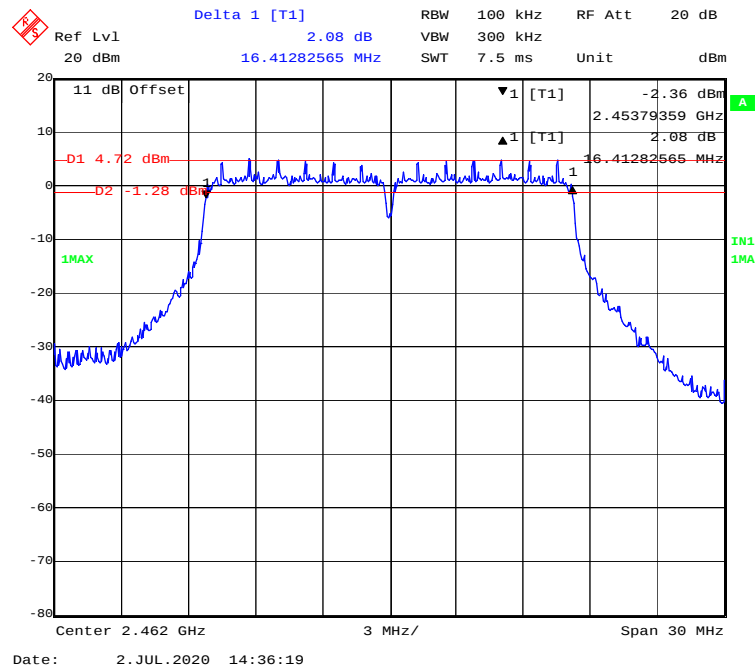

Delta 1 [T1] 1.28 dB
 RBW 100 kHz RF Att 20 dB
 Ref Lvl 20 dBm 17.61523046 MHz SWT 7.5 ms Unit dBm

11 dB Offset
 -D1 4.95 dBm
 D2 -1.45 dBm
 1 [T1]
 1 [T1]
 -2.38 dBm
 2.40319238 GHz
 1.28 dB
 17.61523046 MHz
 IN1 IMA

Center 2.412 GHz 3 MHz/ Span 30 MHz

Date: 2.JUL.2020 14:40:53

Delta 1 [T1] 1.16 dB

RBW 100 kHz VBW 300 kHz

SWT 7.5 ms Unit dBm

Ref Lvl 20 dBm

11 dB Offset

-D1 4.6 dBm

D2 -1.4 dBm

1MAX

▼1 [T1]

▲1 [T1]

-2.25 dBm

2.42819238 GHz

1.16 dB


17.61523046 MHz

IN1 IMA


Center 2.437 GHz 3 MHz/ Span 30 MHz

Date: 2.JUL.2020 14:43:07

802.11n-HT20 Mode High Channel

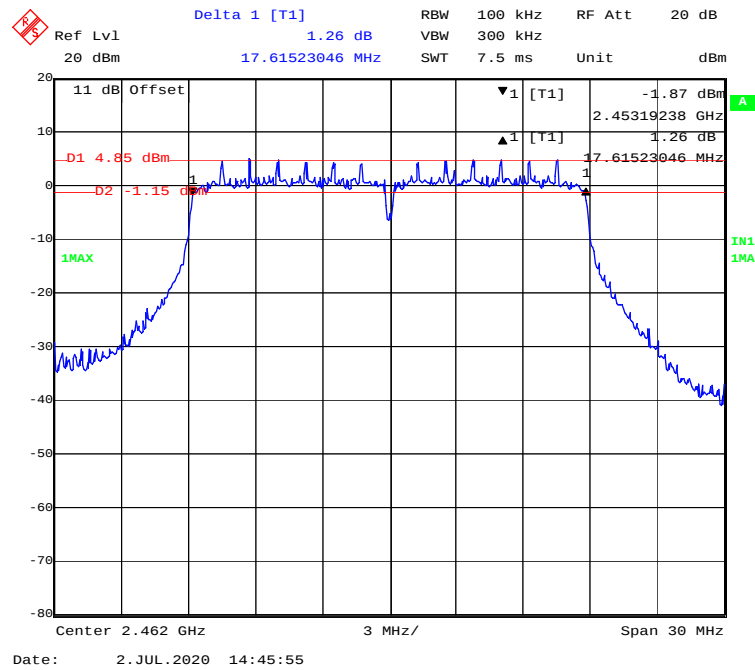

802.11n-HT40 Mode Low Channel

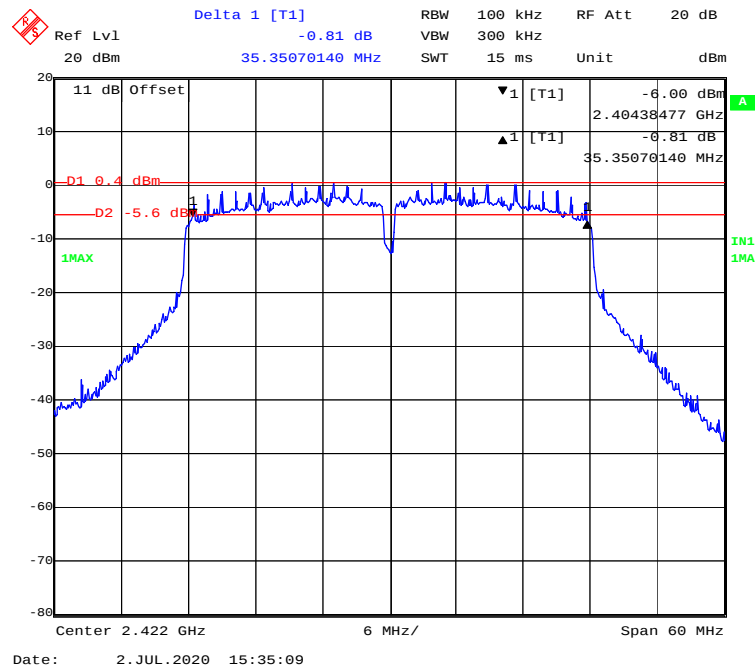

Delta 1 [T1] -1.16 dB
 Ref Lvl 20 dBm
 35.35070140 MHz
 RBW 100 kHz RF Att 20 dB
 SWT 300 kHz
 15 ms Unit dBm

11 dB Offset
 -6.12 dBm
 2.41938477 GHz
 -1.16 dB
 35.35070140 MHz

D1 0.25 dBm
 D2 -5.75 dBm
 1MAX
 IN1 1MA

Center 2.437 GHz
 6 MHz/
 Span 60 MHz

Date: 2.JUL.2020 14:09:40

Delta 1 [T1] -1.09 dB
 RBW 100 kHz RF Att 20 dB
 20 dBm 35.35070140 MHz SWT 15 ms Unit dBm


11 dB Offset
 -5.61 dBm
 2.43438477 GHz
 -1.09 dB
 35.35070140 MHz

D1 0.4 dBm
 D2 -5.6 dBm
 1MAX
 IN1 1MA


Center 2.452 GHz 6 MHz/ Span 60 MHz

Date: 2.JUL.2020 14:03:14


BLE(1Mbps) Mode Low Channel

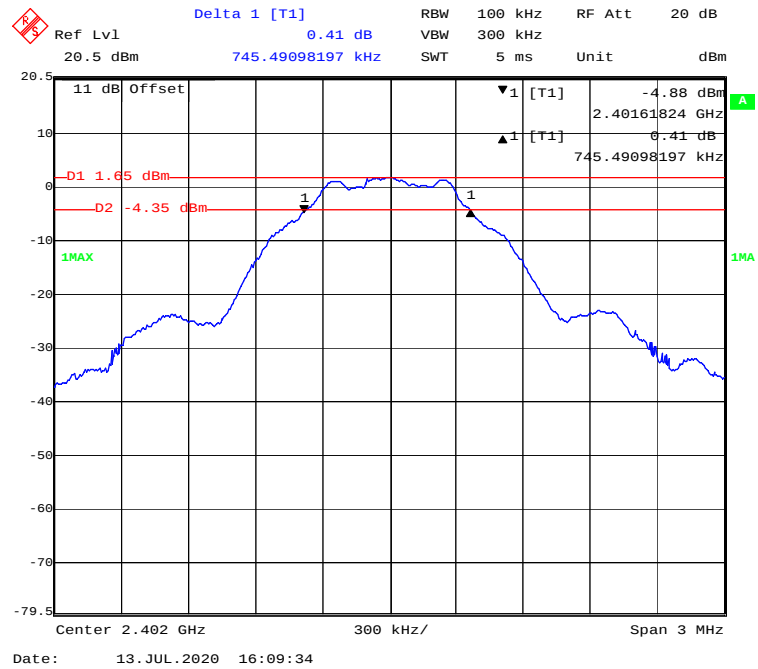


BLE(1Mbps) Mode Middle Channel

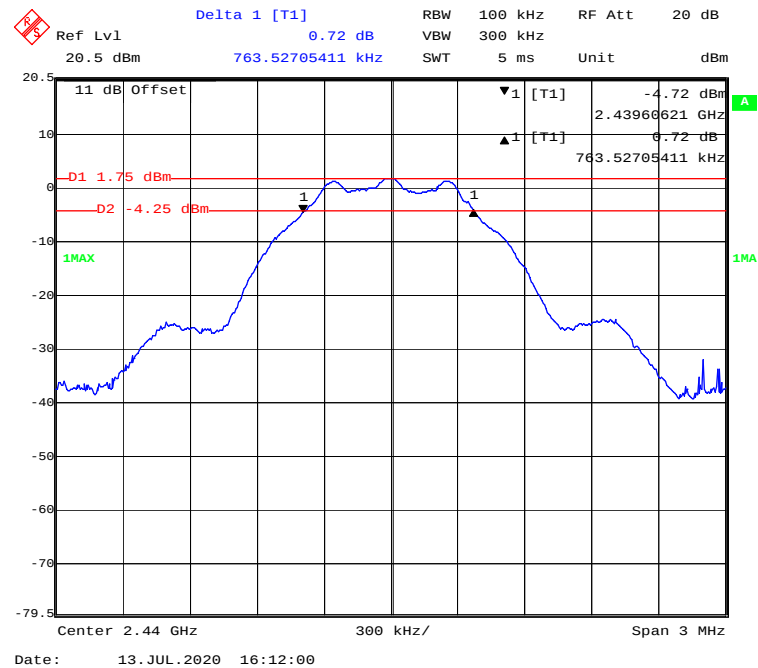


BLE(1Mbps) Mode High Channel

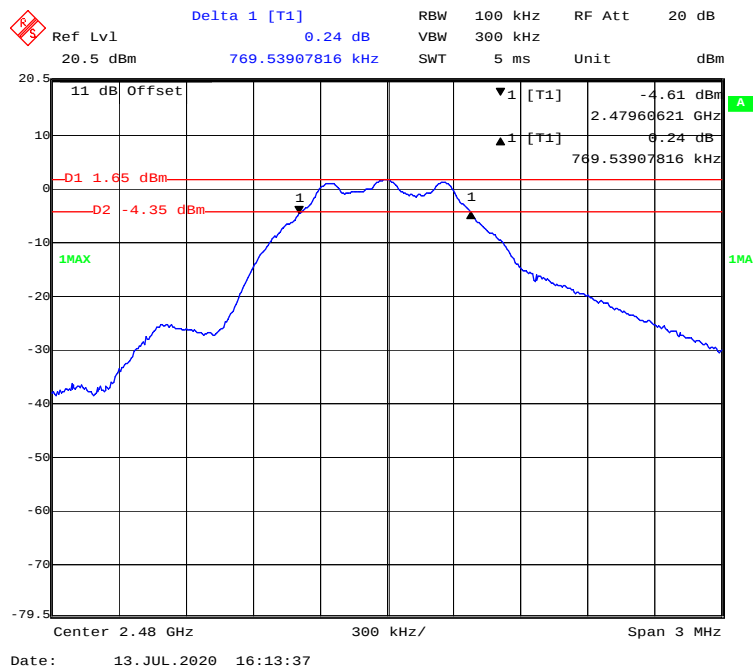

BLE(2Mbps) Mode Low Channel

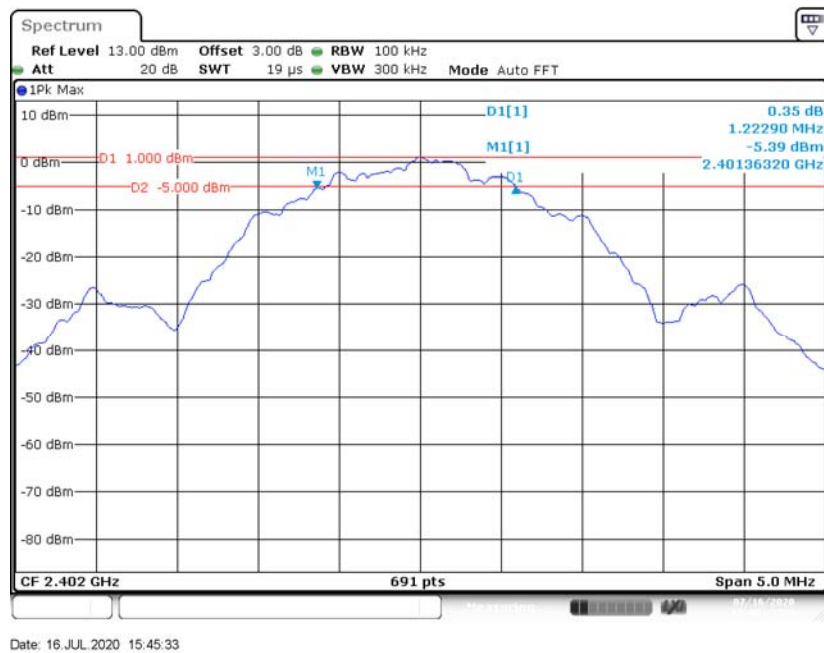


BLE(2Mbps) Mode Middle Channel

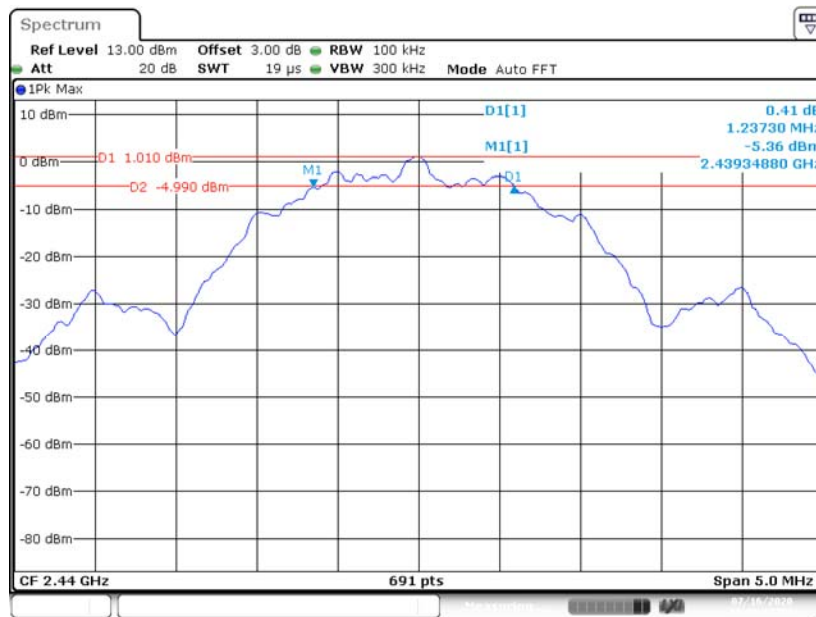

Date: 16 JUL 2020 15:33:14

BLE(2Mbps) Mode High Channel

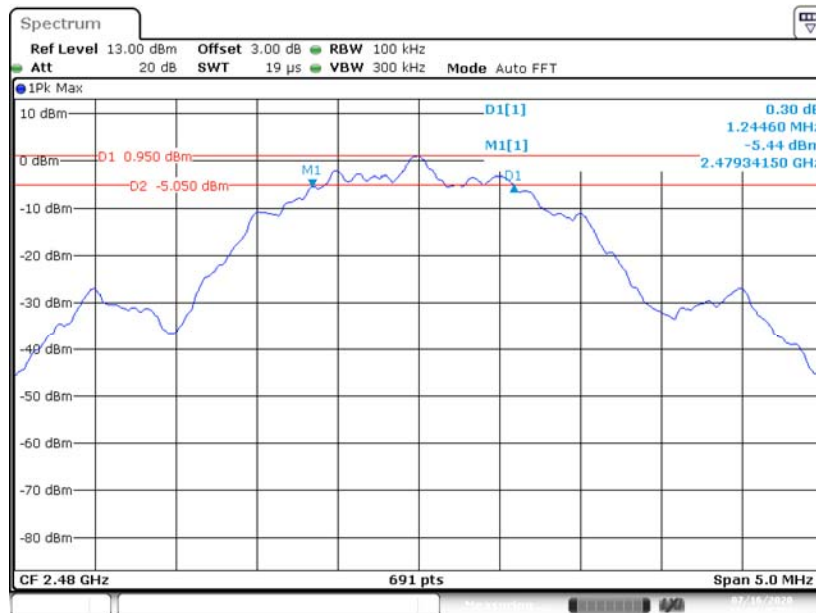

Date: 16 JUL 2020 15:43:45

FCC §15.247(b) (3) - Maximum CONDUCTED Output Power


Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, Compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure**For Wi-Fi:**

According to ANSI C63.10-2013 sub-clause 11.9.1.3

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

**For BLE:**

According to ANSI C63.10-2013 sub-clause 11.9.1.1

1. Set the RBW $\geq$ DTS bandwidth.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 3 \times$ RBW
4. Sweep time = auto couple.
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use peak marker function to determine the peak amplitude level.



Test Data**Environmental Conditions**

Temperature:	24.8-26.3℃
Relative Humidity:	53-71 %
ATM Pressure:	101.1-102.5 kPa

The testing was performed by Winnie Yang from 2020-07-13 to 2020-07-16.


Test Result: Compliant.

EUT operation mode: Transmitting


Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Limit (dBm)	Result
802.11b Mode				
Low	2412	21.91	30	Pass
Middle	2437	21.38	30	Pass
High	2462	22.88	30	Pass
802.11g Mode				
Low	2412	23.36	30	Pass
Middle	2437	23.63	30	Pass
High	2462	23.61	30	Pass
802.11n-HT20 Mode				
Low	2412	23.12	30	Pass
Middle	2437	23.27	30	Pass
High	2462	23.43	30	Pass
802.11n-HT40 Mode				
Low	2422	21.30	30	Pass
Middle	2437	21.48	30	Pass
High	2452	21.72	30	Pass

Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Limit (dBm)	Result
BLE(1Mbps) Mode				
Low	2402	2.04	30	Pass
Middle	2440	2.14	30	Pass
High	2480	2.04	30	Pass
BLE(2Mbps) Mode				
Low	2402	1.08	30	Pass
Middle	2440	1.10	30	Pass
High	2480	1.11	30	Pass


BLE(1Mbps) Mode Low Channel

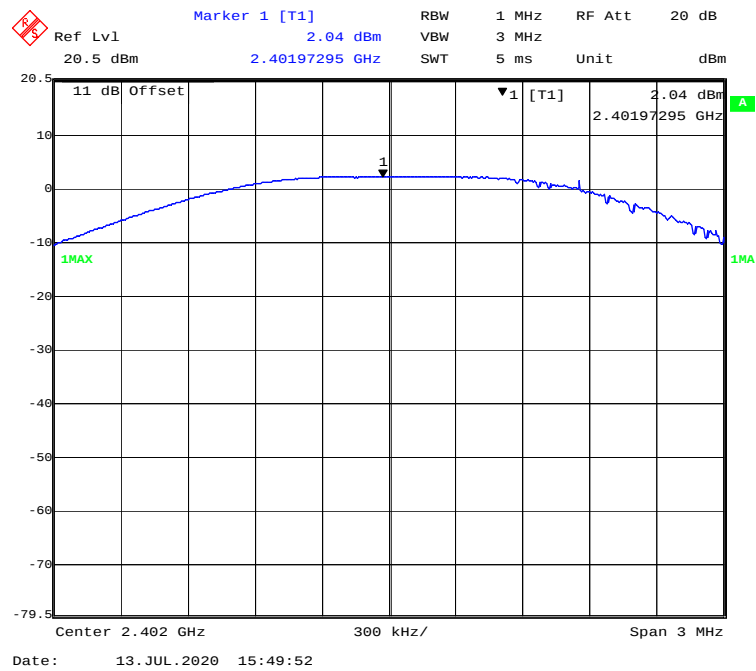


BLE(1Mbps) Mode Middle Channel

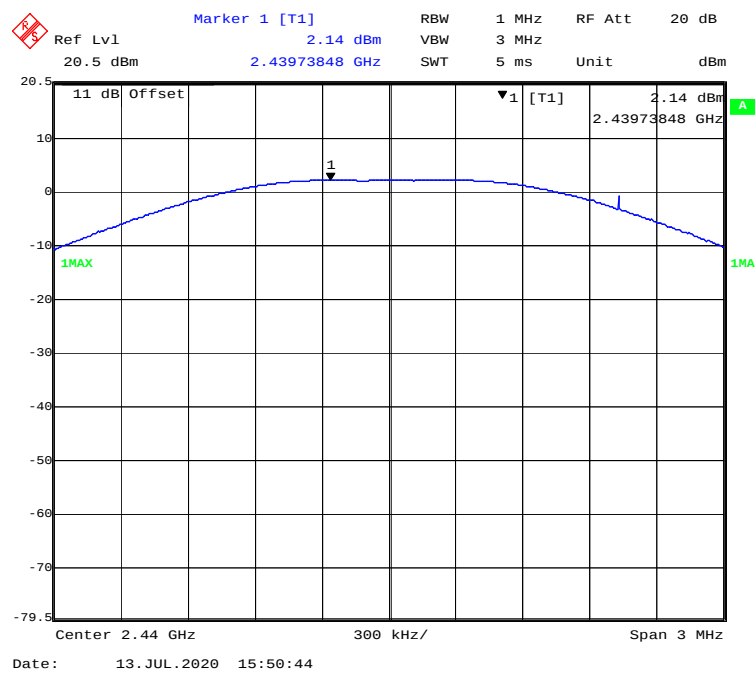


BLE(1Mbps) Mode High Channel

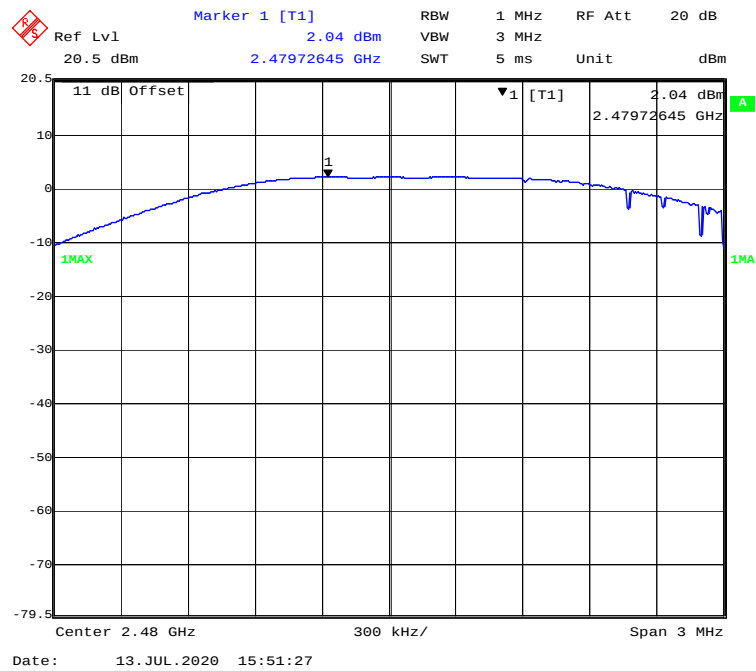

BLE(2Mbps) Mode Low Channel

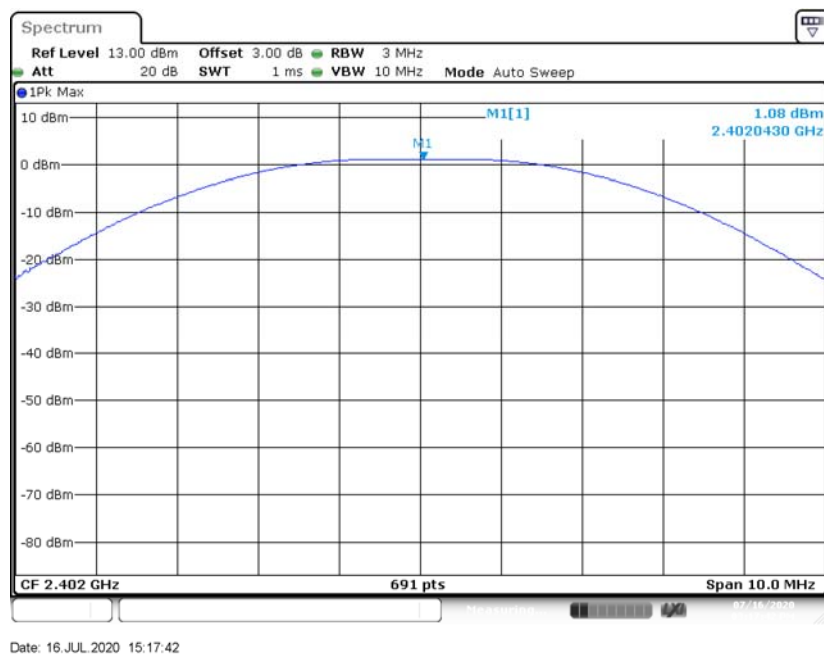


BLE(2Mbps) Mode Middle Channel

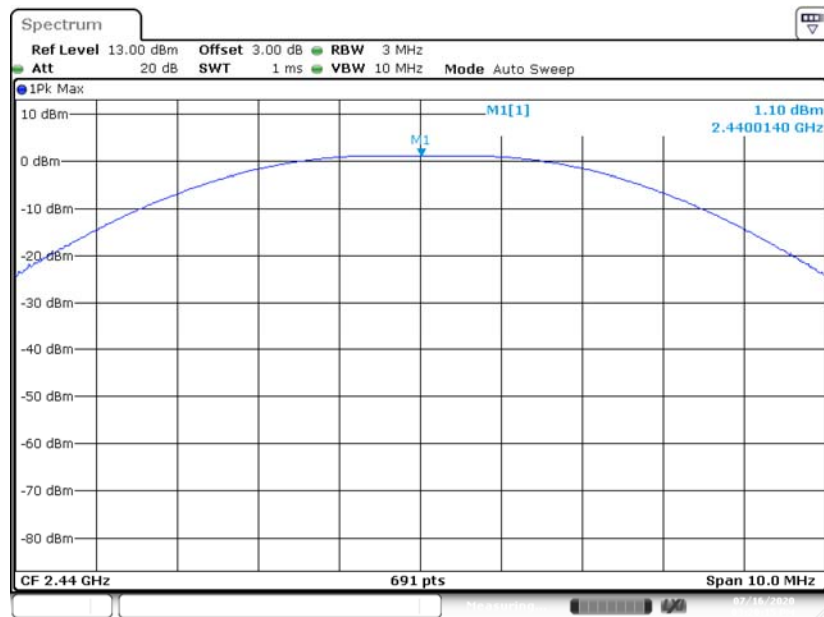

Date: 16 JUL 2020 15:20:16

BLE(2Mbps) Mode High Channel

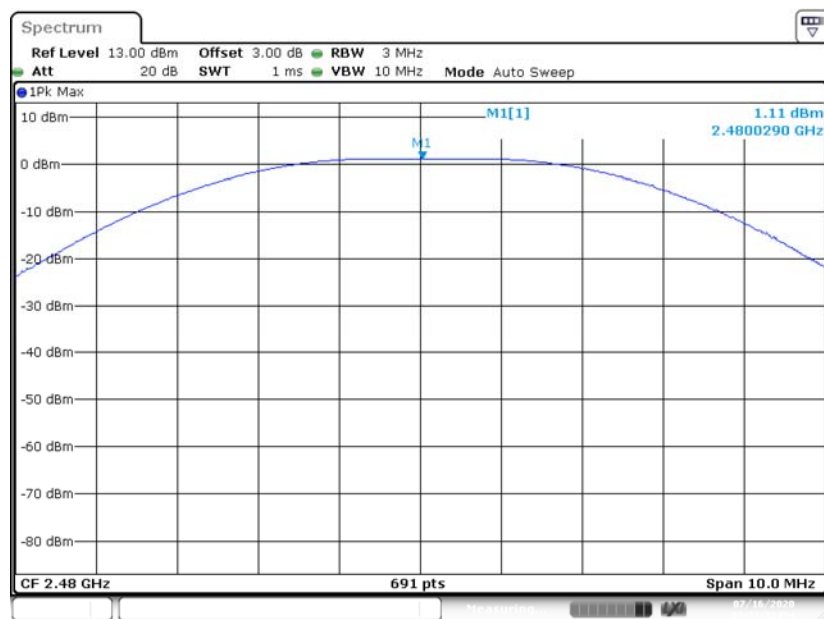

Date: 16 JUL 2020 15:21:32

FCC §15.247(d) – BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates Compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

According to ANSI C63.10-2013 sub-clause 6.10.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



Test Data

Environmental Conditions


Temperature:	24.8-26.4℃
Relative Humidity:	53-75 %
ATM Pressure:	101.1-102.3 kPa

The testing was performed by Winnie Yang from 2020-07-02 to 2020-07-16.


Test Result: Compliant.

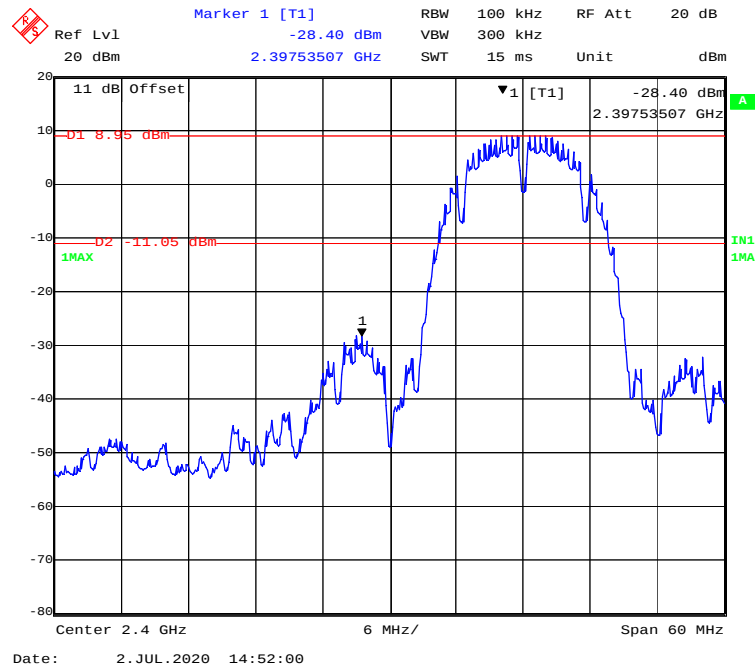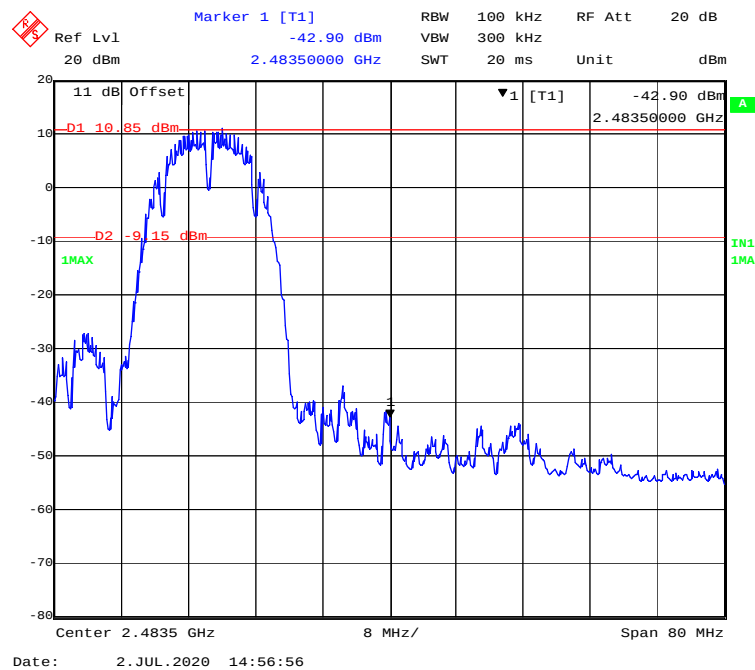*EUT operation mode: Transmitting***802.11b Mode Left Side****802.11b Mode Right Side**


802.11g Mode Left Side

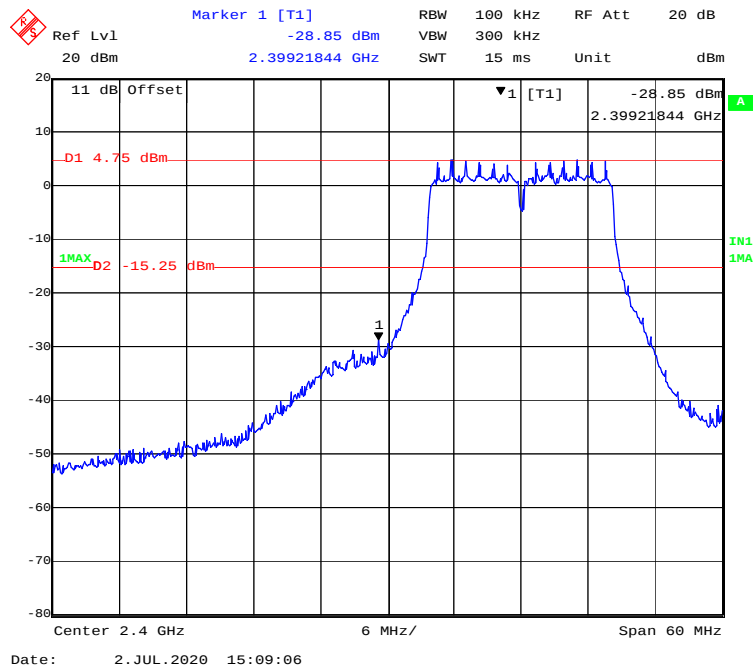


802.11g Mode Right Side

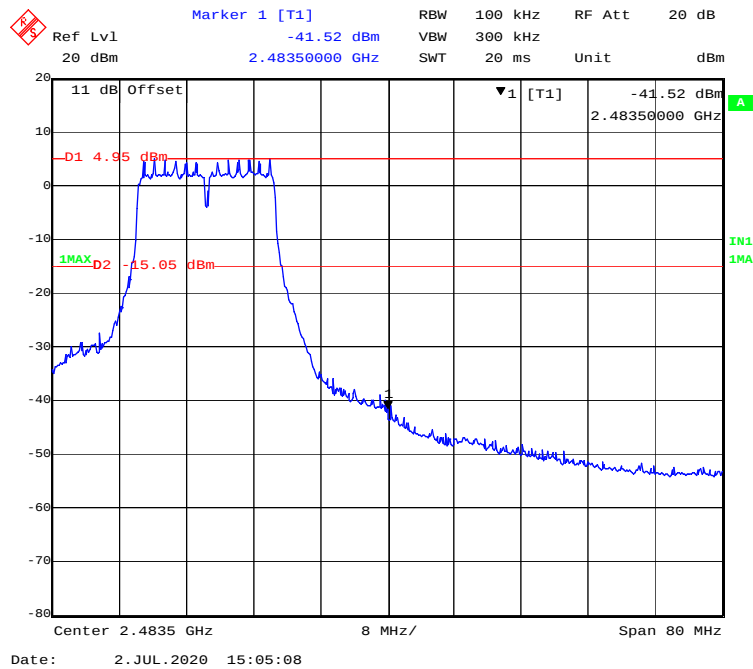


802.11n-HT20 Mode Left Side

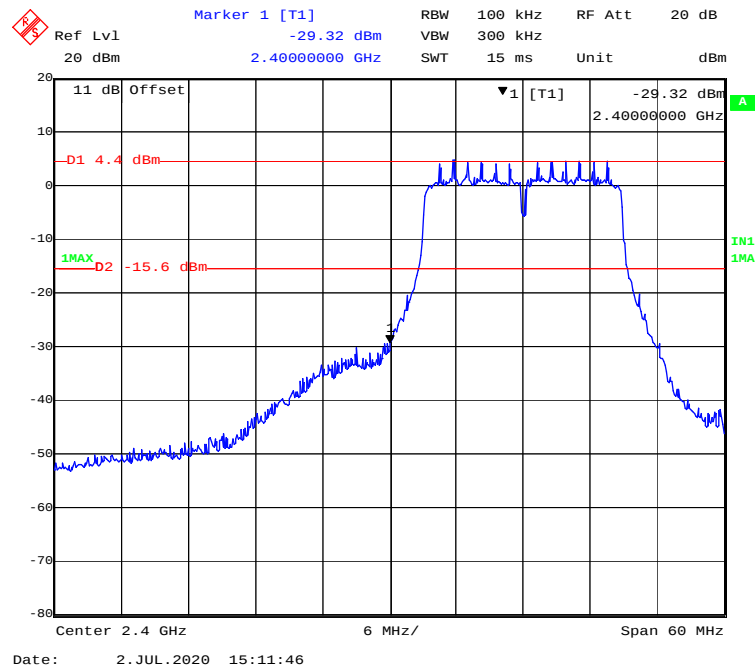


802.11n-HT20 Mode Right Side

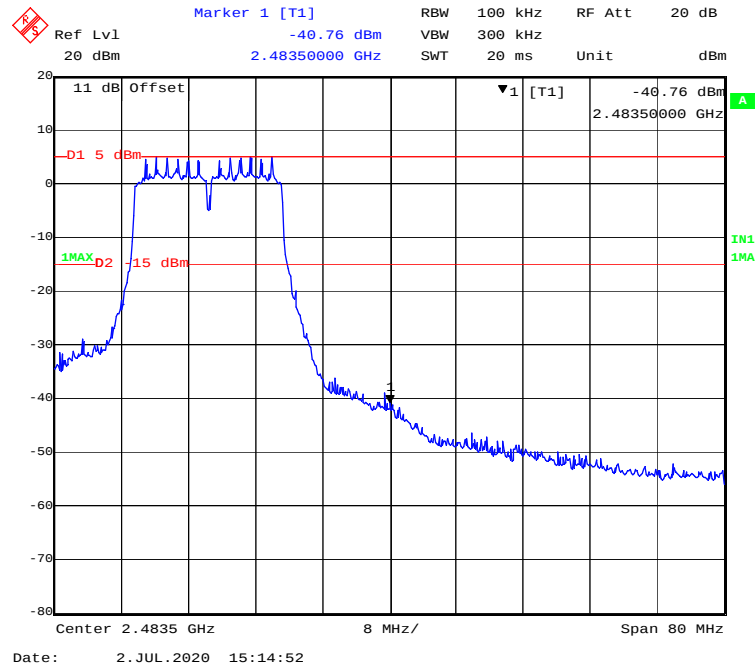


802.11n-HT40 Mode Left Side

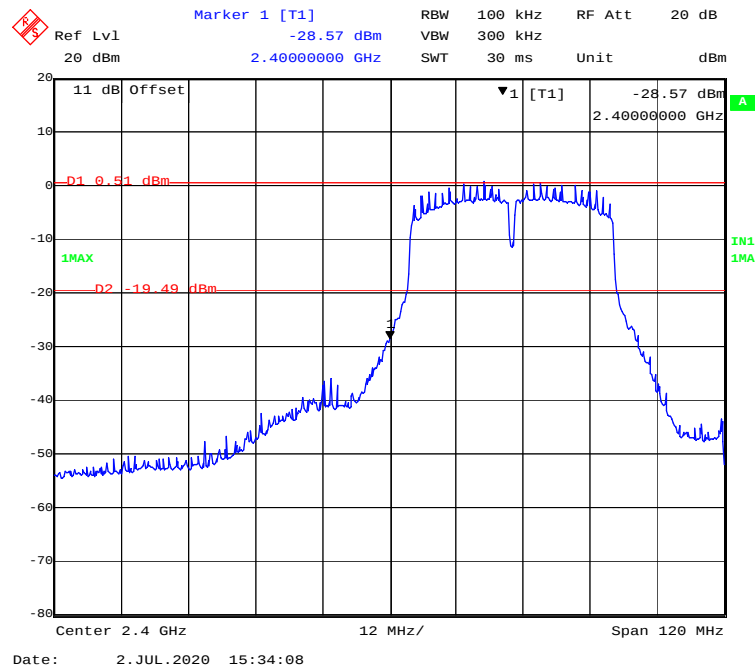


802.11n-HT40 Mode Right Side

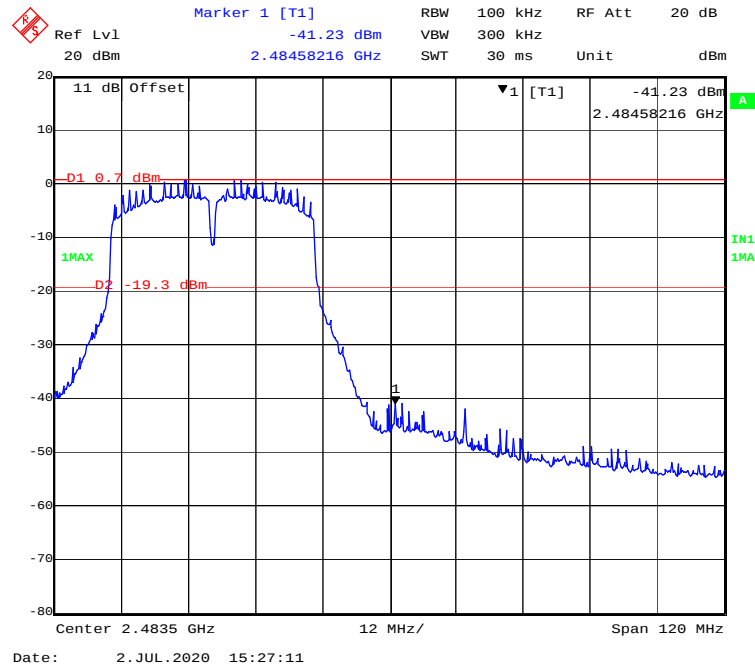

BLE(1Mbps) Mode Left Side

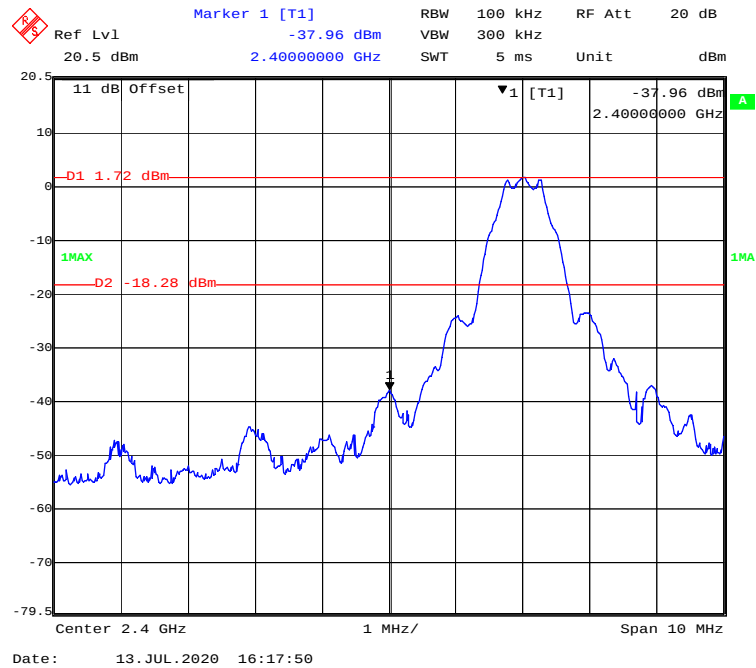


BLE(1Mbps) Mode Right Side

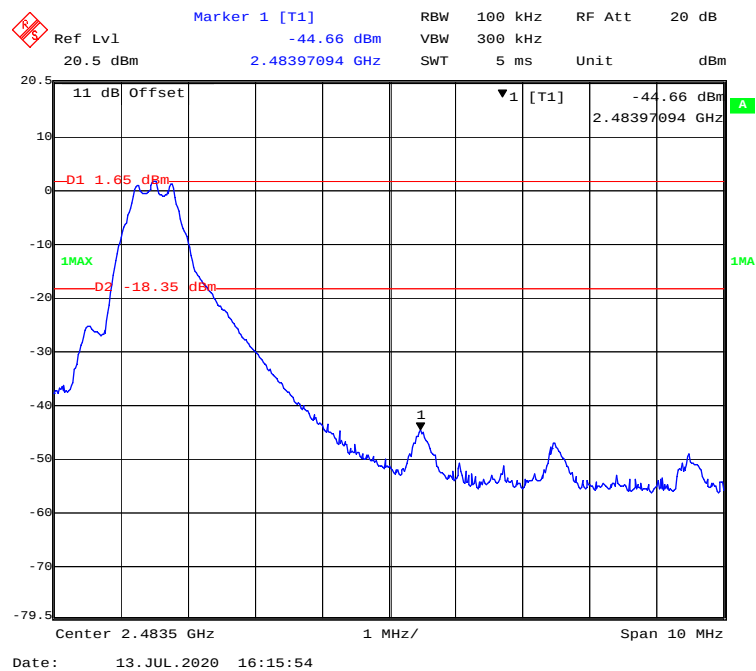

BLE(2Mbps) Mode Left Side

Date: 16.JUL.2020 15:47:50

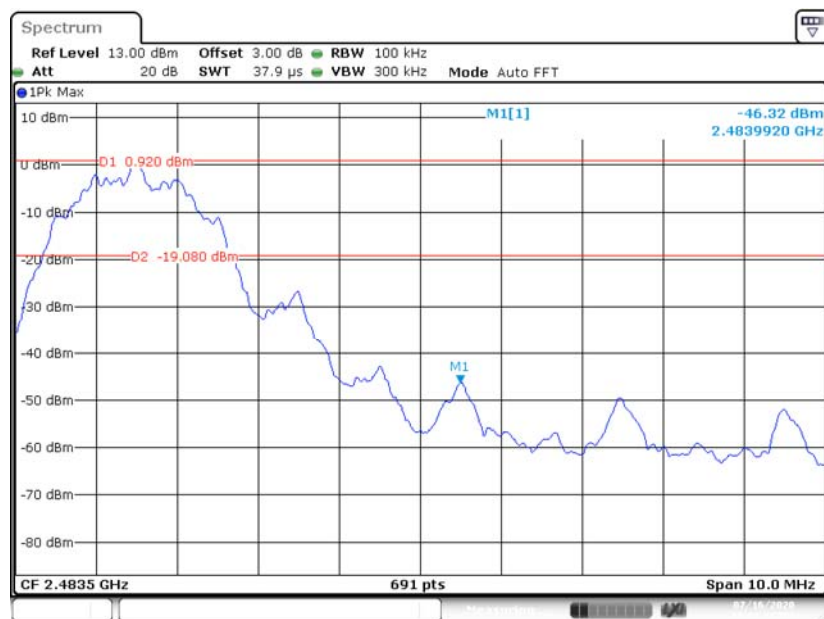BLE(2Mbps) Mode Right Side

Date: 16.JUL.2020 15:51:16

FCC §15.247(e) - Power Spectral Density

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.10.2

The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:

1. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
2. Set the VBW $\geq 3 \times \text{RBW}$.
3. Set the span to 1.5 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level within the RBW.
9. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Data

Environmental Conditions

Temperature:	24.8-26.4°C
Relative Humidity:	53-75 %
ATM Pressure:	101.1-102.3 kPa

The testing was performed by Winnie Yang from 2020-07-03 to 2020-07-16.


Test Result: Compliant.

EUT operation mode: Transmitting


Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
802.11b Mode			
Low	2412	-5.00	≤8
Middle	2437	-4.52	≤8
High	2462	-3.87	≤8
802.11g Mode			
Low	2412	-9.84	≤8
Middle	2437	-9.29	≤8
High	2462	-10.63	≤8
802.11n-HT20 mode			
Low	2412	-10.21	≤8
Middle	2437	-10.60	≤8
High	2462	-10.02	≤8
802.11n-HT40 mode			
Low	2422	-13.87	≤8
Middle	2437	-14.88	≤8
High	2452	-14.85	≤8

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
BLE(1Mbps) Mode			
Low	2402	-13.66	≤8
Middle	2440	-10.69	≤8
High	2480	-12.66	≤8
BLE(2Mbps) Mode			
Low	2402	-14.66	≤8
Middle	2440	-11.90	≤8
High	2480	-14.05	≤8


802.11b Mode Low Channel

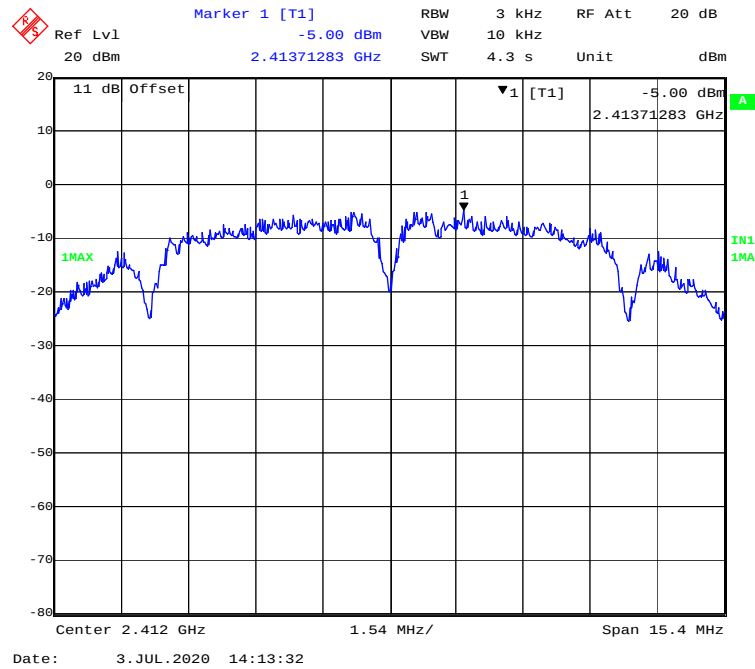


802.11b Mode Middle Channel

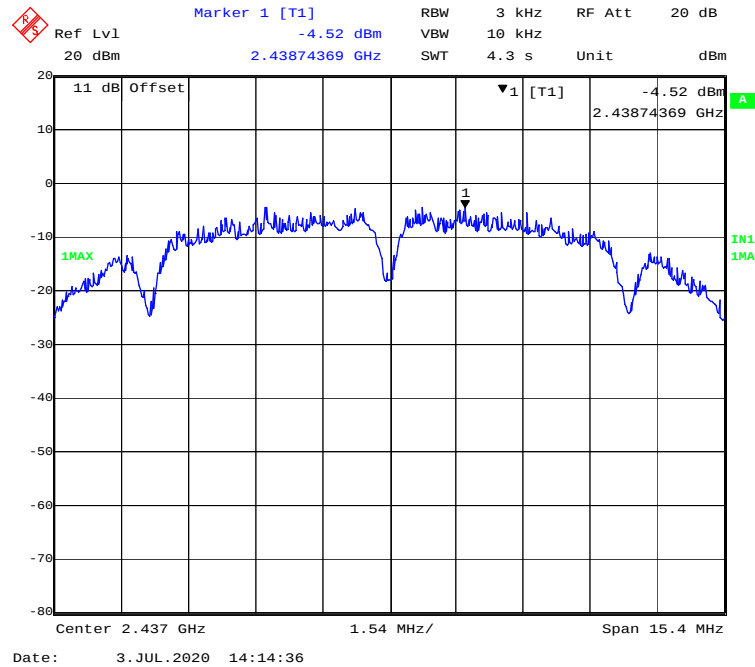


802.11b Mode High Channel

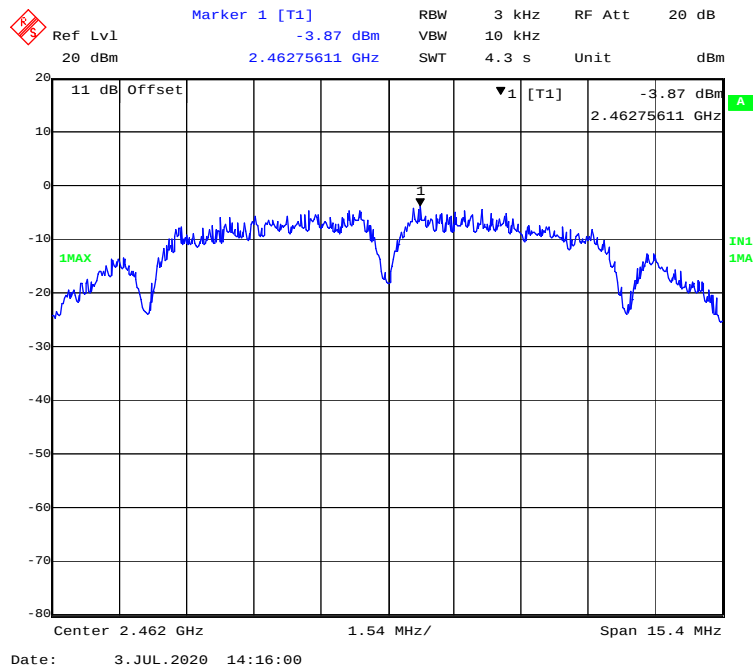


802.11g Mode Low Channel

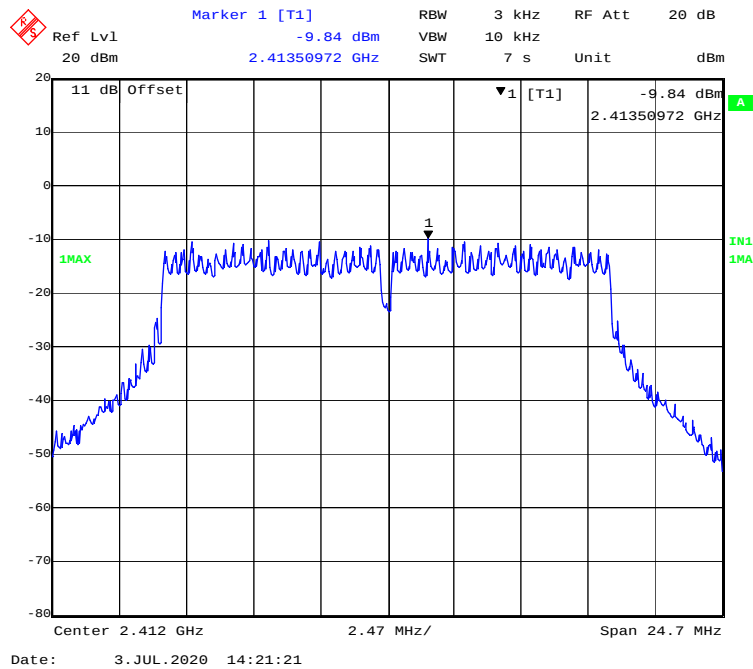


802.11g Mode Middle Channel

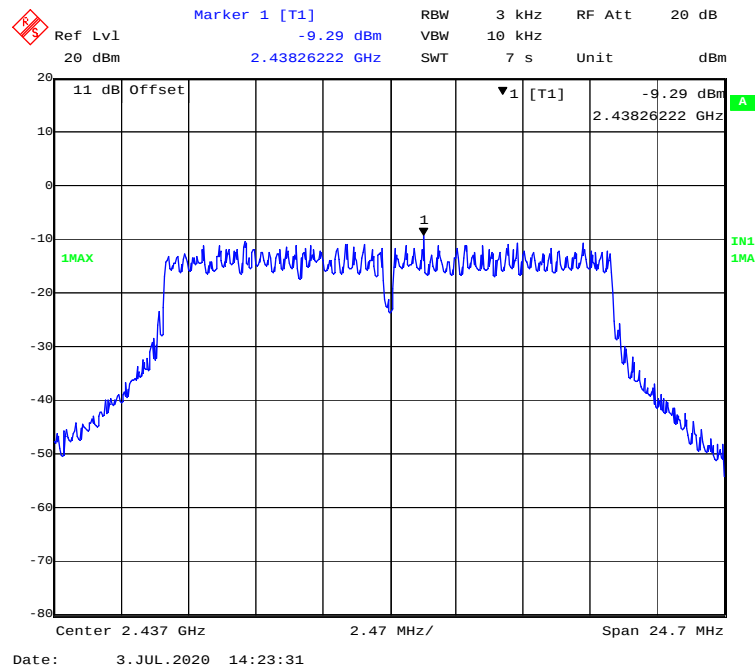


802.11g Mode High Channel

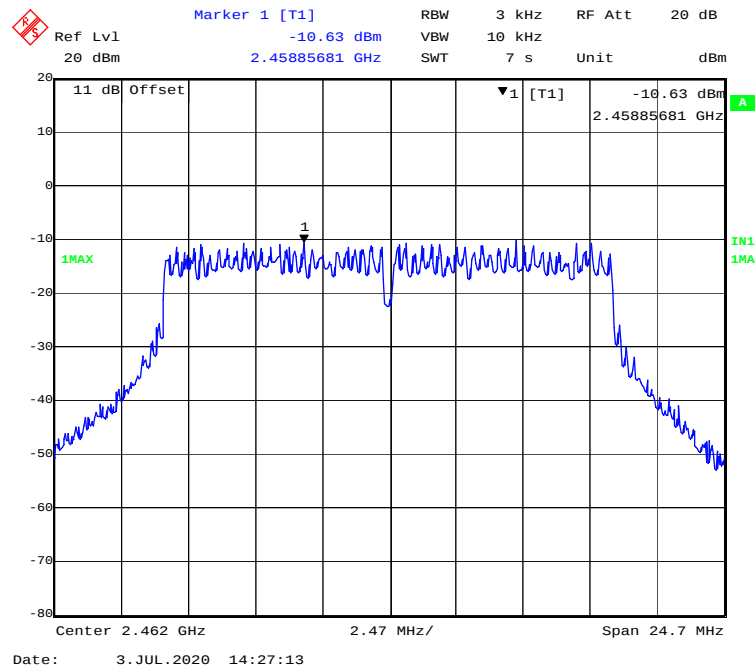


802.11n-HT20 Mode Low Channel

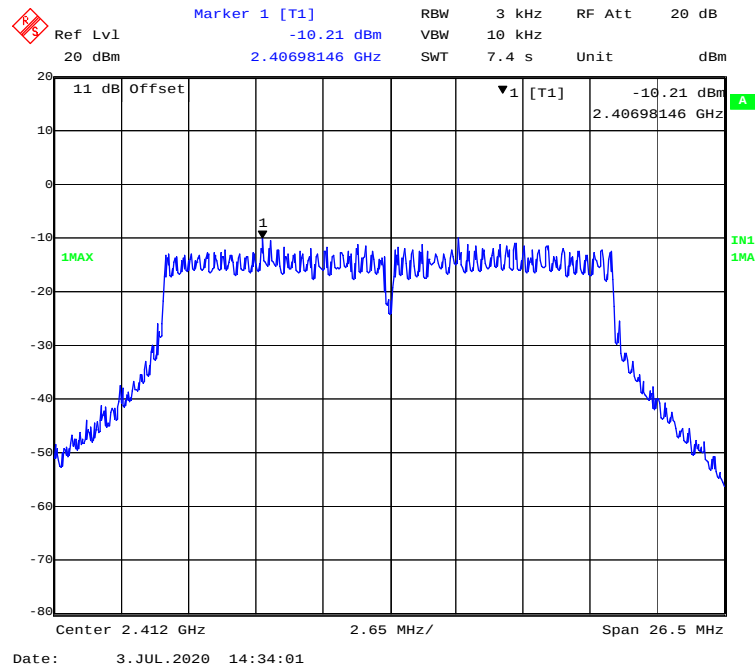


802.11n-HT20 Mode Middle Channel

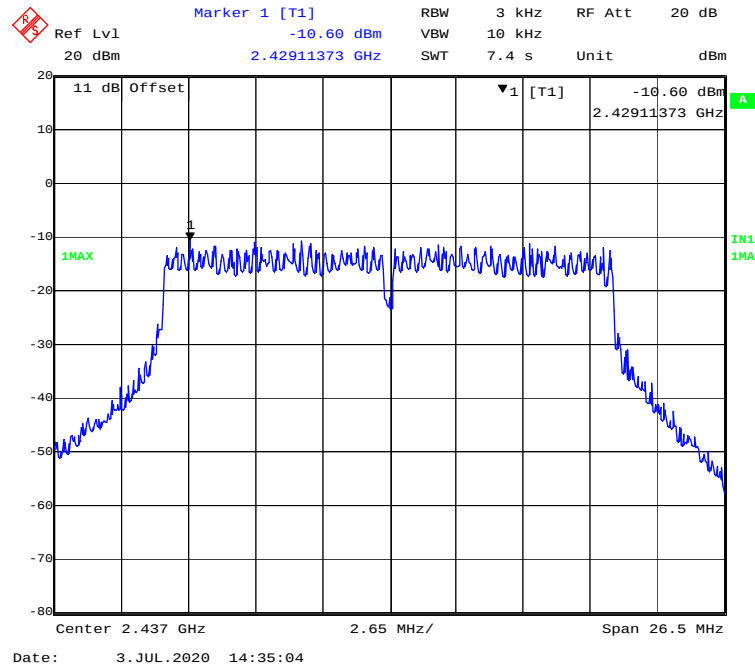


802.11n-HT20 Mode High Channel

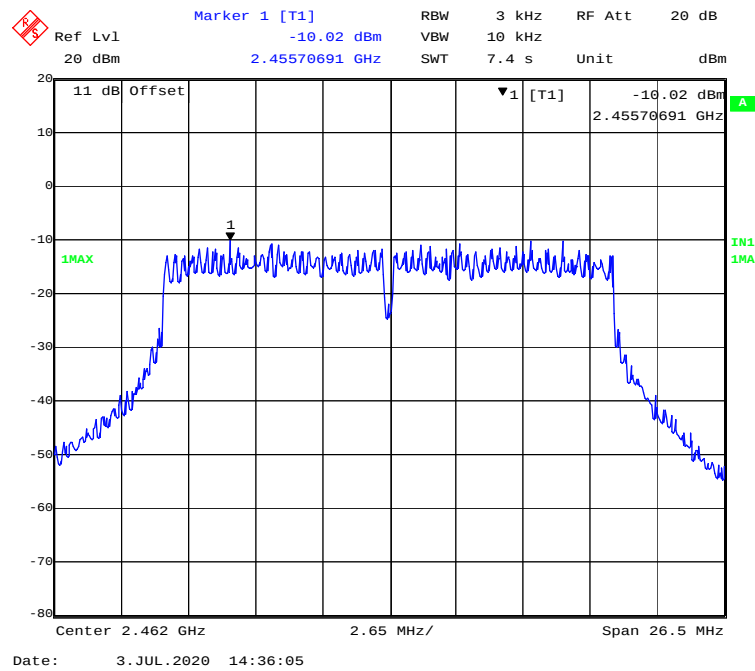


802.11n-HT40 Mode Low Channel

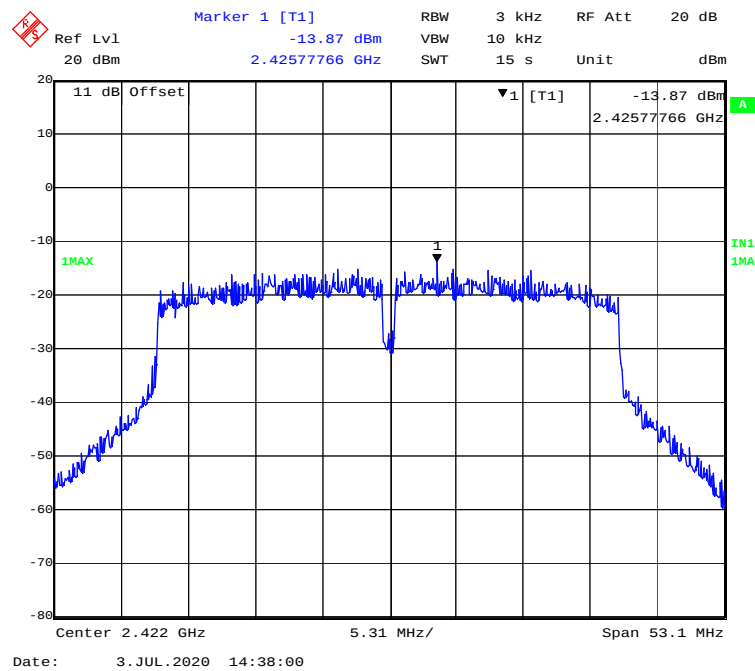


802.11n-HT40 Mode Middle Channel

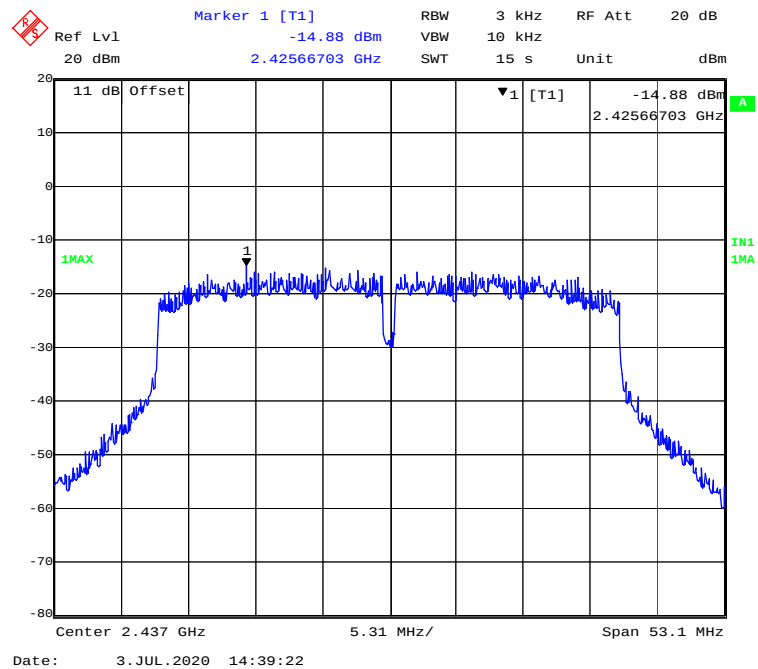


802.11n-HT40 Mode High Channel

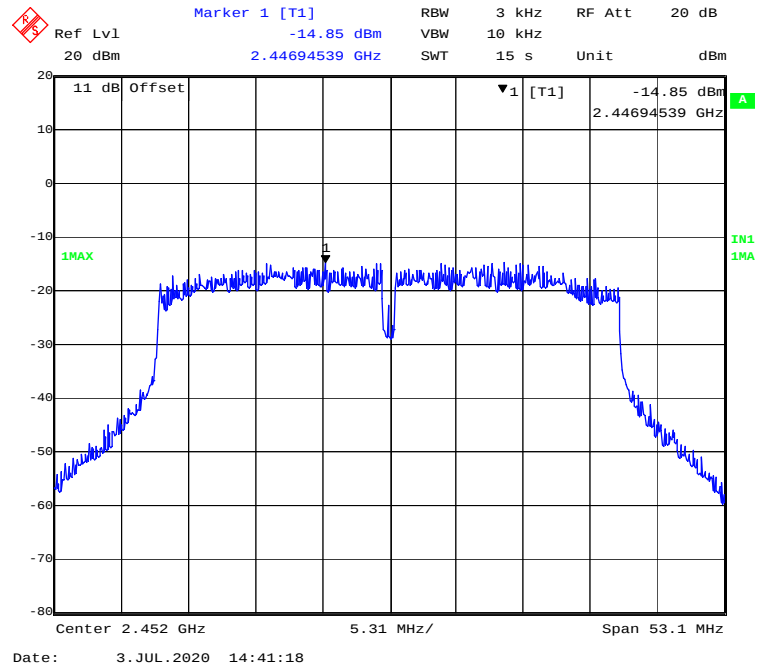


BLE(1Mbps) Mode Low Channel

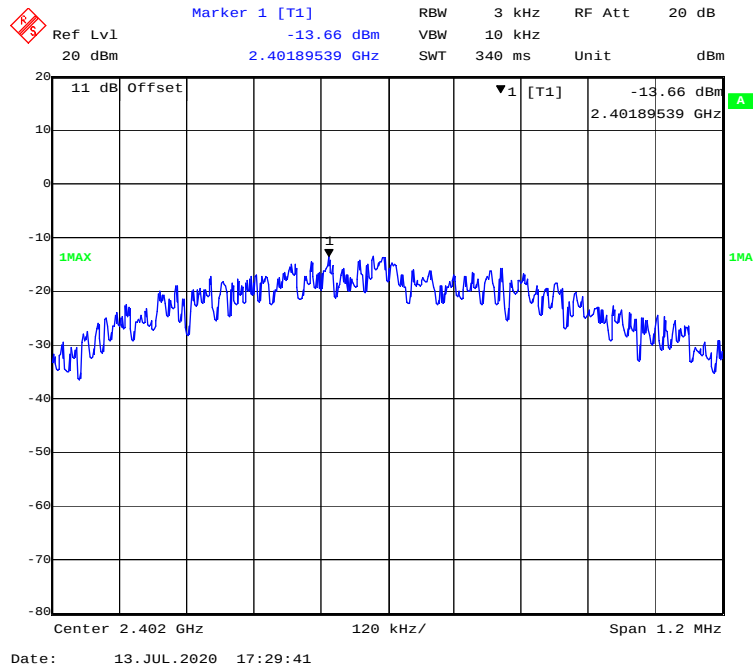


BLE(1Mbps) Mode Middle Channel

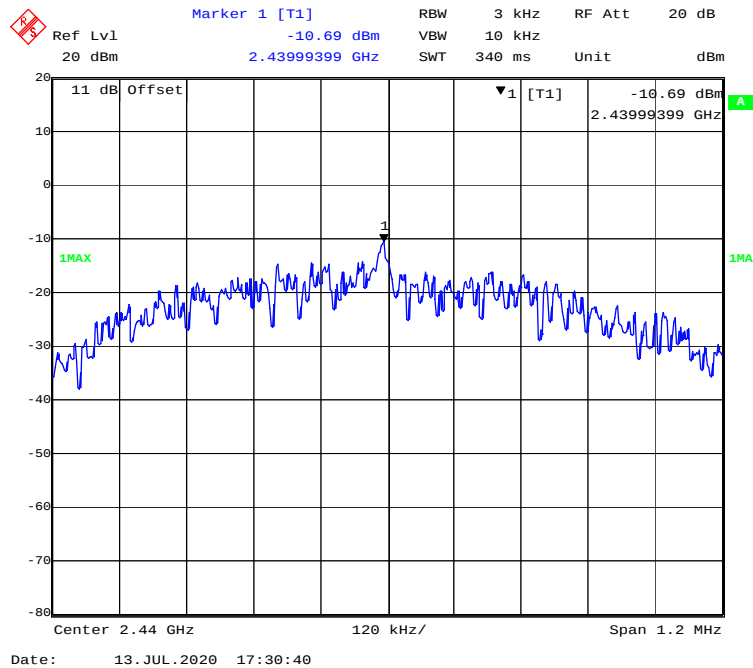


BLE(1Mbps) Mode High Channel

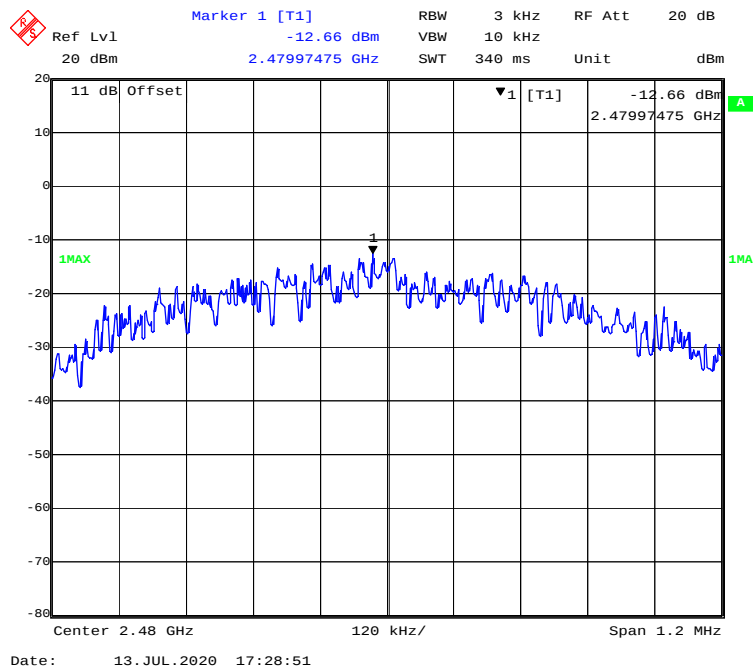


BLE(2Mbps) Mode Low Channel

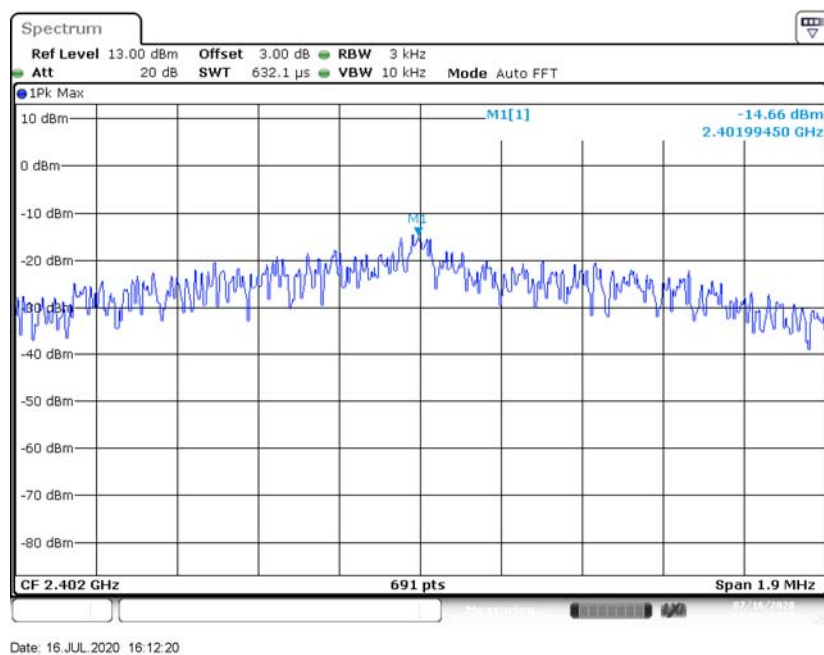

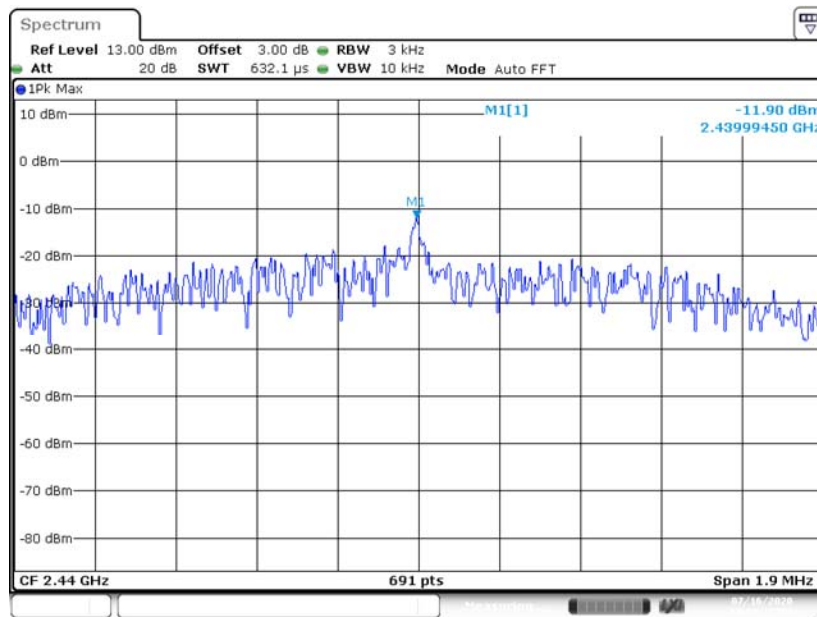BLE(2Mbps) Mode Middle Channel

Date: 16 JUL 2020 16:13:22

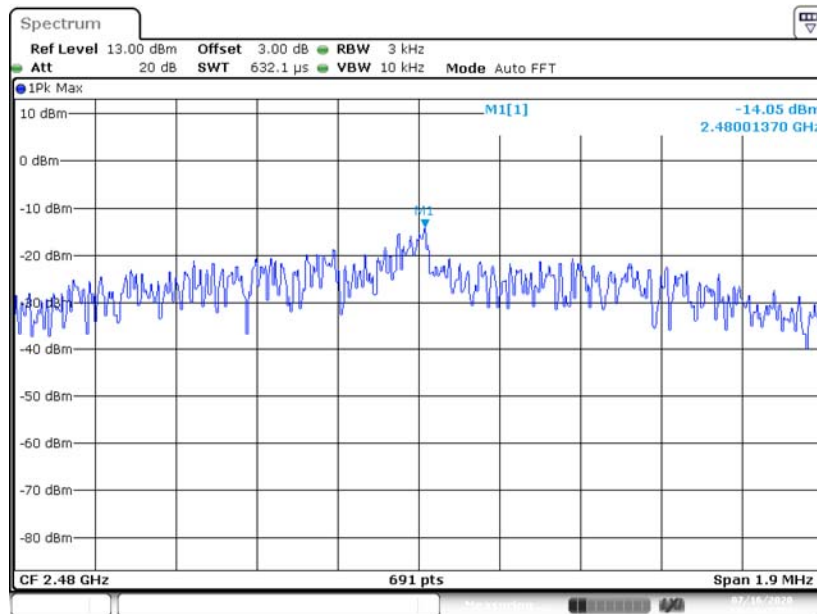BLE(2Mbps) Mode High Channel

Date: 16 JUL 2020 16:14:12

Declarations

1: BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.

2: Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

3: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

4: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

5: This report cannot be reproduced except in full, without prior written approval of the Company.

6: This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

***** END OF REPORT *****