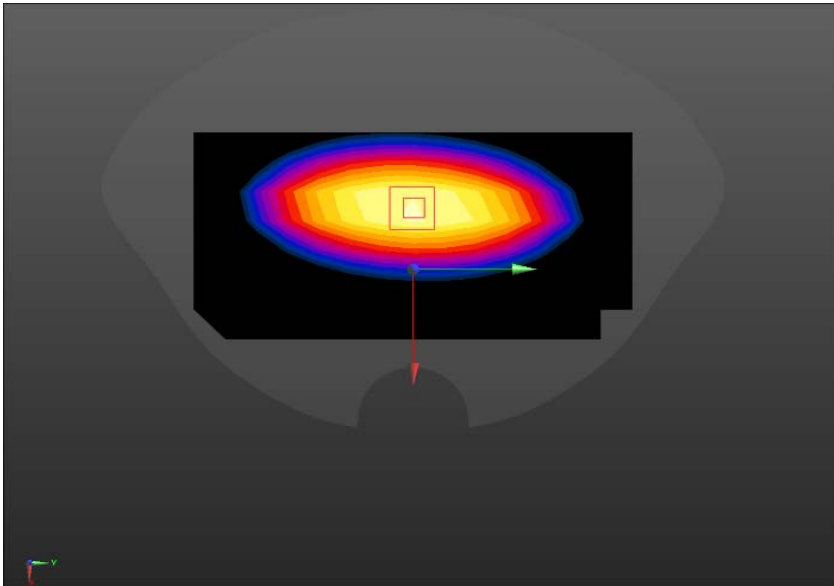
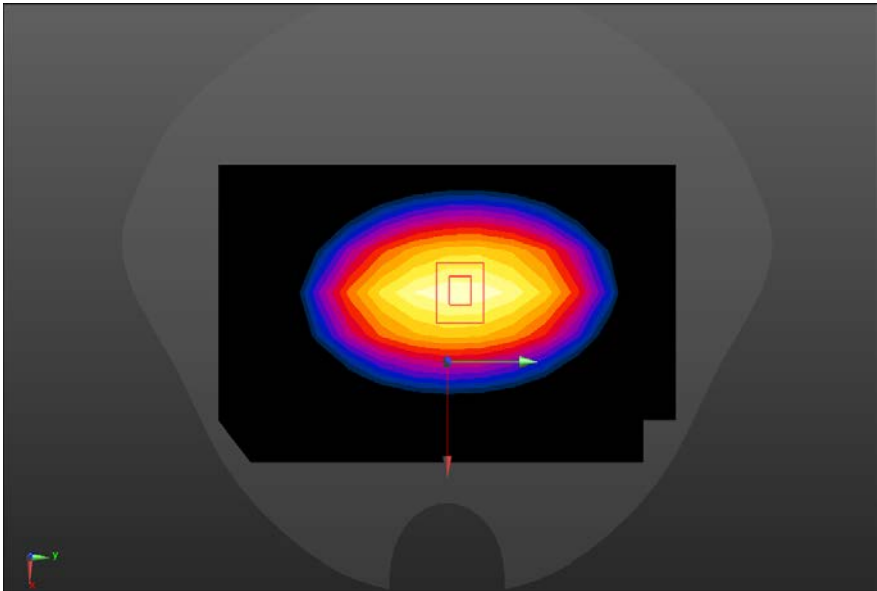
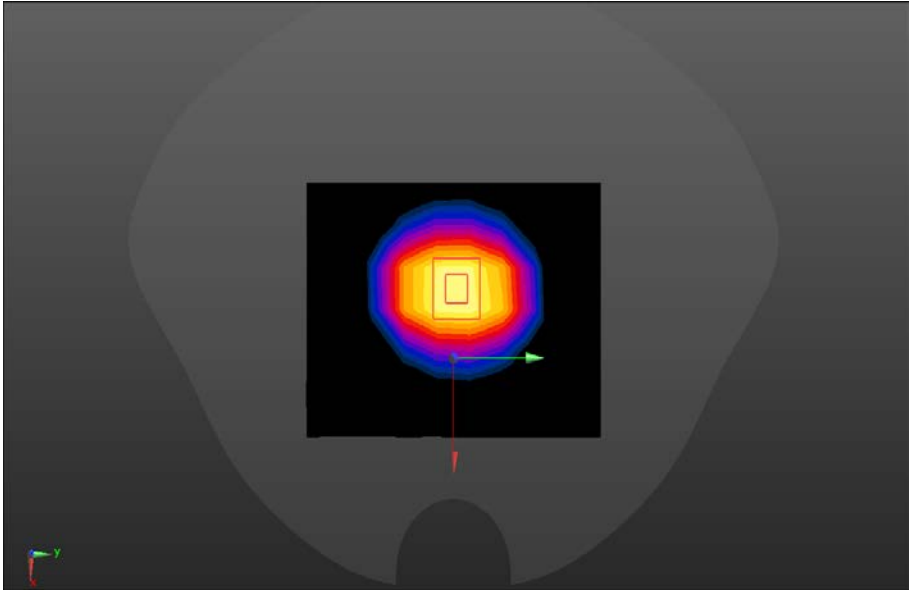
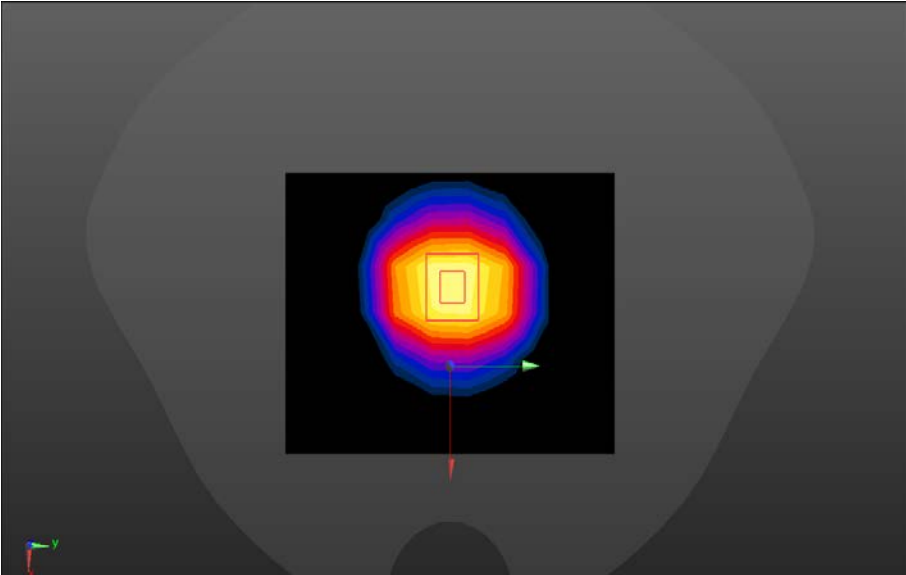


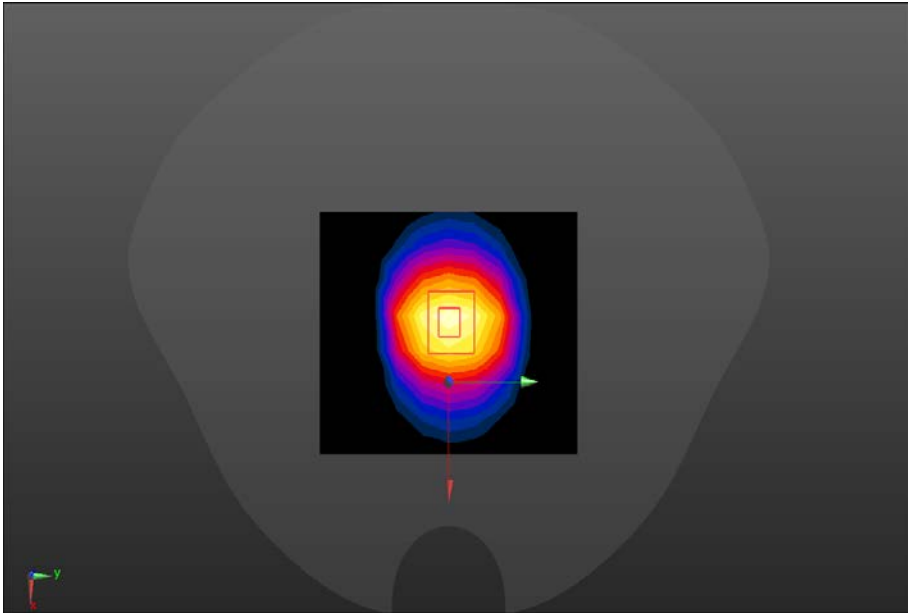
ANNEX A – TEST PLOTS

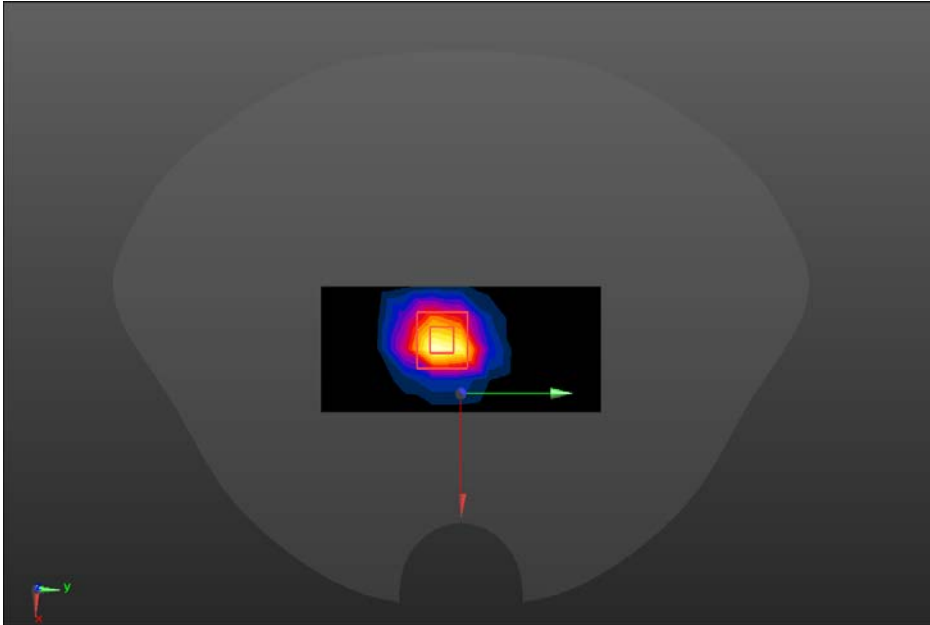
System check	750MHz
Communication System: UID 0, CW (0) Frequency: 750 MHz; Duty cycle:1:1 Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.87 \text{ S/m}$; $\epsilon_r = 41.52$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY Configuration: - Probe: ES3DV3 - SN3127; ConvF(6.32, 6.32, 6.32); Calibrated: 2020/9/1 - Sensor-Surface: 1.4mm (Mechanical Surface Detection), - Electronics: DAE4 Sn720; Calibrated: 2020/9/30 - Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) System Performance Check at Frequencies 750MHz/d=15mm, Pin=250 mW, dist=3.0mm/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 2.15 W/kg System Performance Check at Frequencies 750MHz/d=15mm, Pin=250 mW, dist=3.0mm/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 42.00 V/m; Power Drift = 0.12 dB Peak SAR (extrapolated) = 3.21 W/kg SAR(1 g) = 2.08 W/kg; SAR(10 g) = 1.42 W/kg Maximum value of SAR (measured) = 2.38 W/kg 	

System check	835MHz
Communication System: UID 0, CW (0); Frequency: 835 MHz Duty cycle:1:1 Medium parameters used (interpolated): $f = 835 \text{ MHz}$; $\sigma = 0.87 \text{ S/m}$; $\epsilon_r = 40.25$ $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(6.16, 6.16, 6.16); Calibrated: 2020/9/1 - Sensor-Surface: 1.4mm (Mechanical Surface Detection), - Electronics: DAE4 Sn720; Calibrated: 2020/9/30 - Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Configuration 835/835/Area Scan (8x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 2.71 W/kg Configuration 835/835/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 51.33 V/m; Power Drift = 0.03 dB Peak SAR (extrapolated) = 3.51 W/kg SAR(1 g) = 2.30 W/kg; SAR(10 g) = 1.53 W/kg Maximum value of SAR (measured) = 2.76 W/kg 	

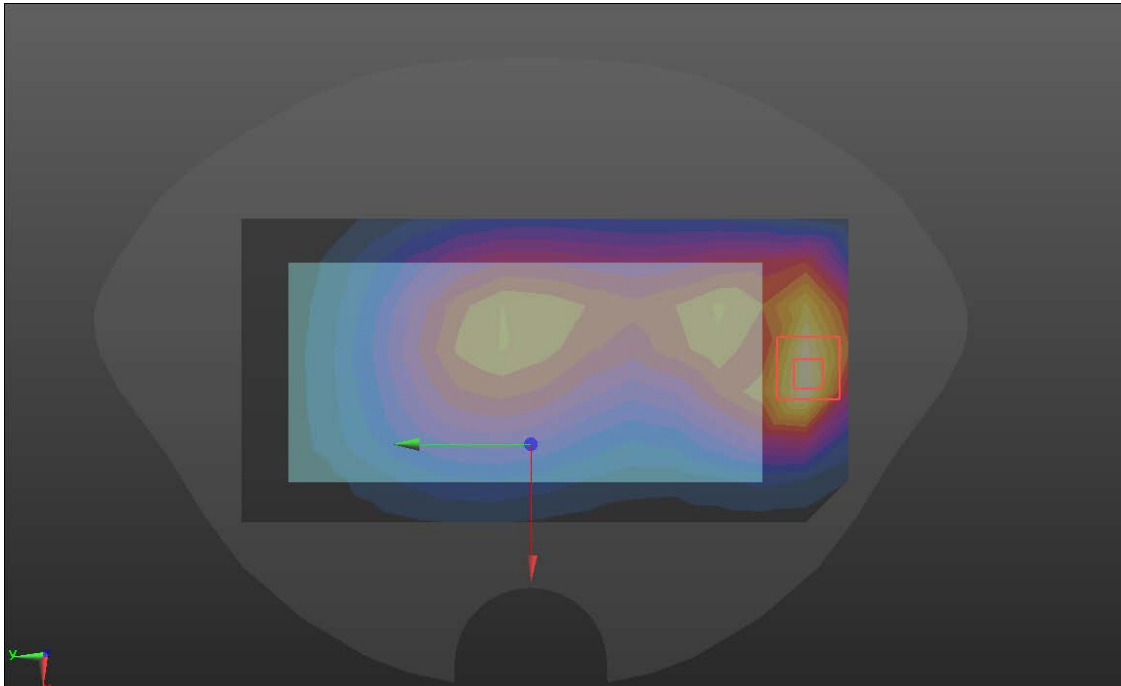
System check	1800MHz
Communication System: UID 0, CW (0); Frequency: 1800 MHz; Duty cycle:1:1 Medium parameters used: $f = 1800 \text{ MHz}$; $\sigma = 1.35 \text{ S/m}$; $\epsilon_r = 38.82$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(5.12, 5.12, 5.12); Calibrated: 2020/9/1 - Sensor-Surface: 1.4mm (Mechanical Surface Detection), - Electronics: DAE4 Sn720; Calibrated: 2020/9/30 - Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Configuration 1800/1800/Area Scan (7x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 8.21 W/kg Configuration 1800/1800/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 76.76 V/m; Power Drift = 0.12 dB Peak SAR (extrapolated) = 17.6 W/kg SAR(1 g) = 9.88 W/kg; SAR(10 g) = 5.20 W/kg Maximum value of SAR (measured) = 12.1 W/kg 	

System check	2000MHz
Communication System: UID 0, CW (0); Frequency: 2000 MHz; Duty cycle:1:1 Medium parameters used: $f = 2000 \text{ MHz}$; $\sigma = 1.38 \text{ S/m}$; $\epsilon_r = 38.95$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(5.03, 5.03, 5.03); Calibrated: 2020/9/1 - Sensor-Surface: 1.4mm (Mechanical Surface Detection), - Electronics: DAE4 Sn720; Calibrated: 2020/9/30 - Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Configuration 2000/2000/Area Scan (7x10x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 8.40 W/kg Configuration 2000/2000/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 76.22 V/m; Power Drift = 0.14 dB Peak SAR (extrapolated) = 18.7 W/kg SAR(1 g) = 10.53 W/kg; SAR(10 g) = 5.20 W/kg Maximum value of SAR (measured) = 13.1 W/kg 	

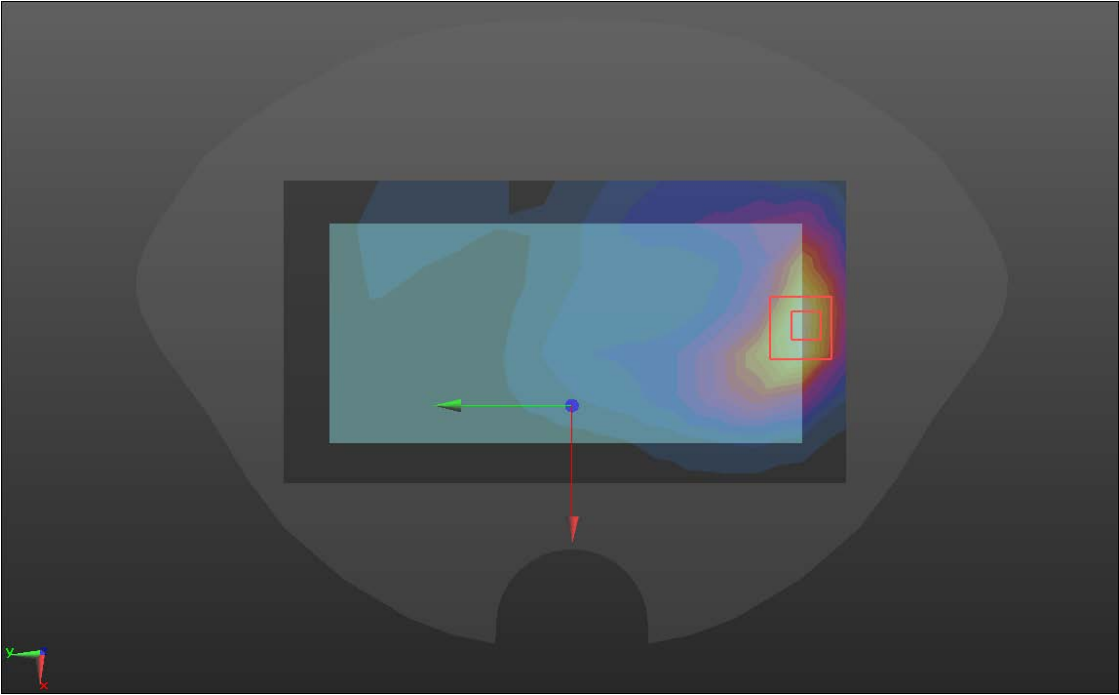
System check	2450MHz
Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty cycle:1:1 Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.86 \text{ S/m}$; $\epsilon_r = 40.22$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.58, 4.58, 4.58); Calibrated: 2020/9/1 - Sensor-Surface: 1.4mm (Mechanical Surface Detection), - Electronics: DAE4 Sn720; Calibrated: 2020/9/30 - Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) System Performance Check at Frequencies 2450 MHz/2450/Area Scan (8x11x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 21.5 W/kg System Performance Check at Frequencies 2450 MHz/2450/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 105.2 V/m; Power Drift = 0.18 dB Peak SAR (extrapolated) = 28.3 W/kg SAR(1 g) = 13.55 W/kg; SAR(10 g) = 6.28 W/kg Maximum value of SAR (measured) = 22.1 W/kg 	

System check	2600MHz
Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 2600 \text{ MHz}$; $\sigma = 2.01 \text{ S/m}$; $\epsilon_r = 39.71$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.37, 4.37, 4.37); Calibrated: 2020/9/1 - Sensor-Surface: 1.4mm (Mechanical Surface Detection), - Electronics: DAE4 Sn720; Calibrated: 2020/9/30 - Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) SYSTEM CHECK 2600/Area Scan (5x11x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 22.2 W/kg SYSTEM CHECK 2600/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 101.3 V/m; Power Drift = 0.01 dB Peak SAR (extrapolated) = 33.2 W/kg SAR(1 g) = 14.58 W/kg; SAR(10 g) = 6.58 W/kg Maximum value of SAR (measured) = 26.8 W/kg 	

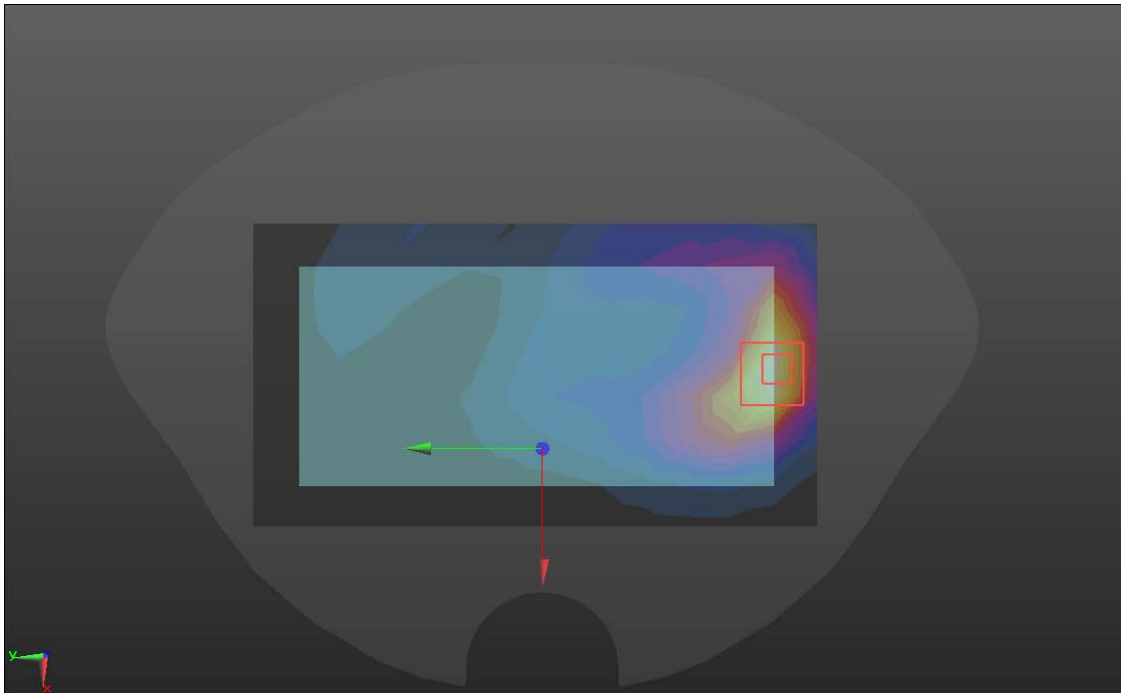
GSM850

Hotspot	Back
Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:4 Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.87 \text{ S/m}$; $\epsilon_r = 40.25$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(6.16, 6.16, 6.16); Calibrated: 2020/9/1; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2020/9/30 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) BACK/GSM 850/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.613 W/kg BACK/GSM 850/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 20.84 V/m; Power Drift = -0.04 dB Peak SAR (extrapolated) = 0.976 W/kg SAR(1 g) = 0.529 W/kg; SAR(10 g) = 0.304 W/kg Maximum value of SAR (measured) = 0.642 W/kg 	

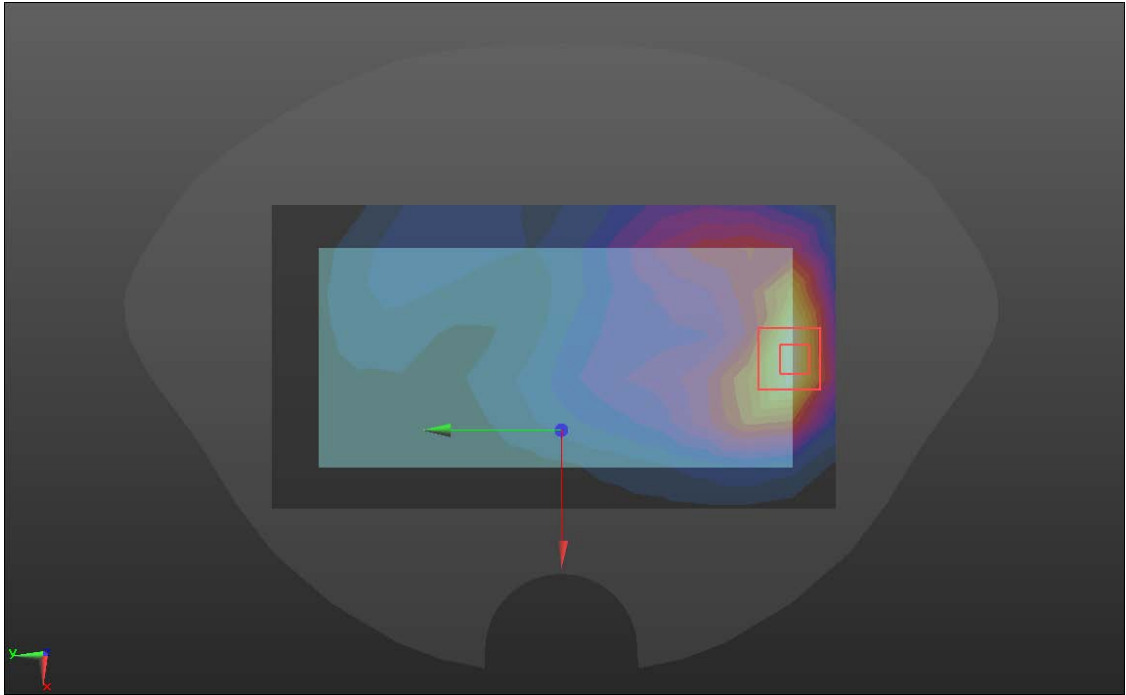
PCS 1900

Hotspot	Back
Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 3:8 Medium parameters used (interpolated): $f = 1880 \text{ MHz}$; $\sigma = 1.36 \text{ S/m}$; $\epsilon_r = 38.87$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(5.12, 5.12, 5.12); Calibrated: 2020/9/1; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2020/9/30 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) BACK/PCS 1900/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.507 W/kg BACK/PCS 1900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 8.430 V/m; Power Drift = -0.16 dB Peak SAR (extrapolated) = 0.729 W/kg SAR(1 g) = 0.448 W/kg; SAR(10 g) = 0.240 W/kg Maximum value of SAR (measured) = 0.494 W/kg 	

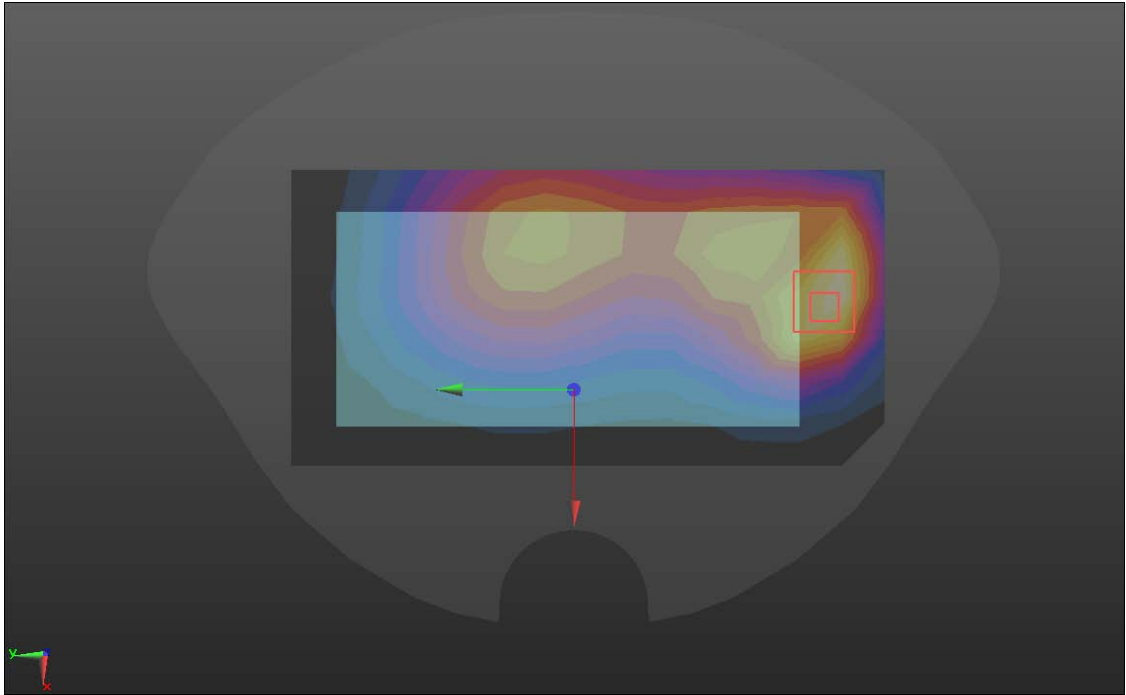
WCDMA Band2

Hotspot	Back
Communication System: UID 0, WCDMA BAND2 (0); Frequency: 1880 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1880 \text{ MHz}$; $\sigma = 1.36 \text{ S/m}$; $\epsilon_r = 38.87$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(5.12, 5.12, 5.12); Calibrated: 2020/9/1; - Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2020/9/30 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) BACK/WCDMA B2/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.976 W/kg BACK/WCDMA B2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 11.98 V/m; Power Drift = -0.15 dB Peak SAR (extrapolated) = 1.39 W/kg SAR(1 g) = 0.842 W/kg; SAR(10 g) = 0.481 W/kg Maximum value of SAR (measured) = 1.02 W/kg 	

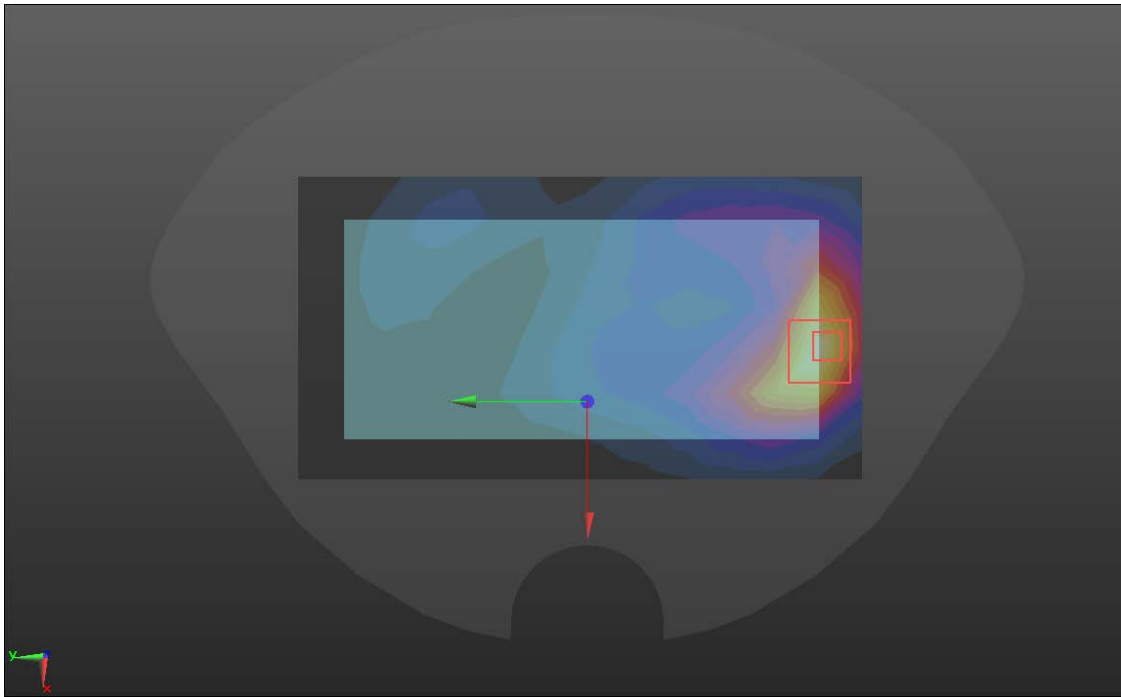
WCDMA Band 4

Hotspot	Back
Communication System: UID 0, WCDMA BAND4 (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 40.07$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(5.12, 5.12, 5.12); Calibrated: 2020/9/1; - Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2020/9/30 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) BACK/WCDMA B4/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.902 W/kg BACK/WCDMA B4/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 12.61 V/m; Power Drift = -0.17 dB Peak SAR (extrapolated) = 1.26 W/kg SAR(1 g) = 0.851 W/kg; SAR(10 g) = 0.457 W/kg Maximum value of SAR (measured) = 0.952 W/kg 	

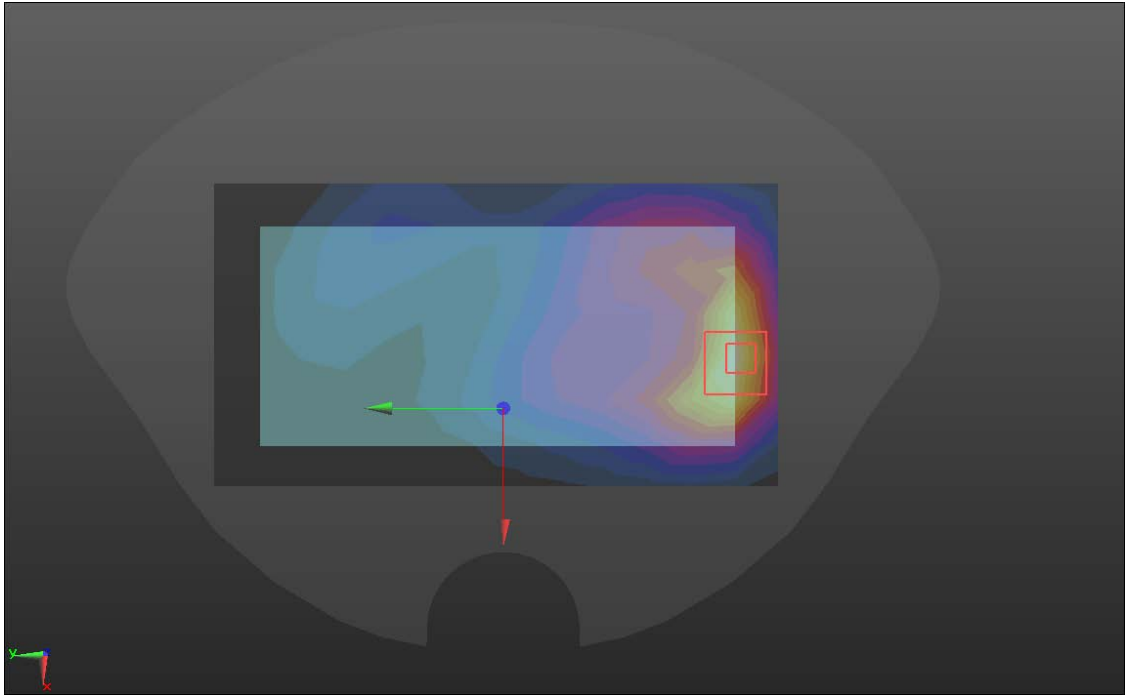
WCDMA Band 5

Hotspot	Back
Communication System: UID 0, WCDMA BAND 5 (0); Frequency: 836.6 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.87 \text{ S/m}$; $\epsilon_r = 40.25$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(6.16, 6.16, 6.16); Calibrated: 2020/9/1; - Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2020/9/30 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) BACK/WCDMA B5/Area Scan (8x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.634 W/kg BACK/WCDMA B5/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 19.02 V/m; Power Drift = -0.10 dB Peak SAR (extrapolated) = 1.00 W/kg SAR(1 g) = 0.593 W/kg; SAR(10 g) = 0.354 W/kg Maximum value of SAR (measured) = 0.709 W/kg 	

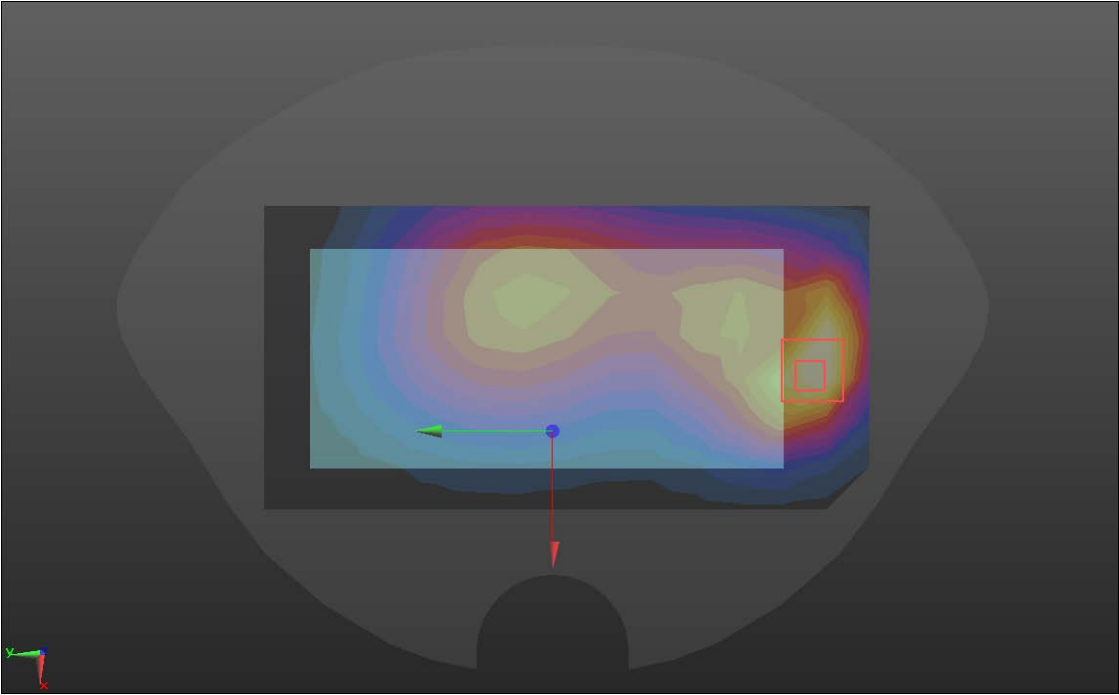
LTE Band 2

Hotspot	Back
Communication System: UID 0, LTE band 02 (0); Frequency: 1880 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 38.87$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(5.12, 5.12, 5.12); Calibrated: 2020/9/1; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2020/9/30 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) BACK/LTE B2/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.831 W/kg BACK/LTE B2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 10.91 V/m; Power Drift = -0.16 dB Peak SAR (extrapolated) = 1.22 W/kg SAR(1 g) = 0.768 W/kg; SAR(10 g) = 0.384 W/kg Maximum value of SAR (measured) = 0.864 W/kg 	

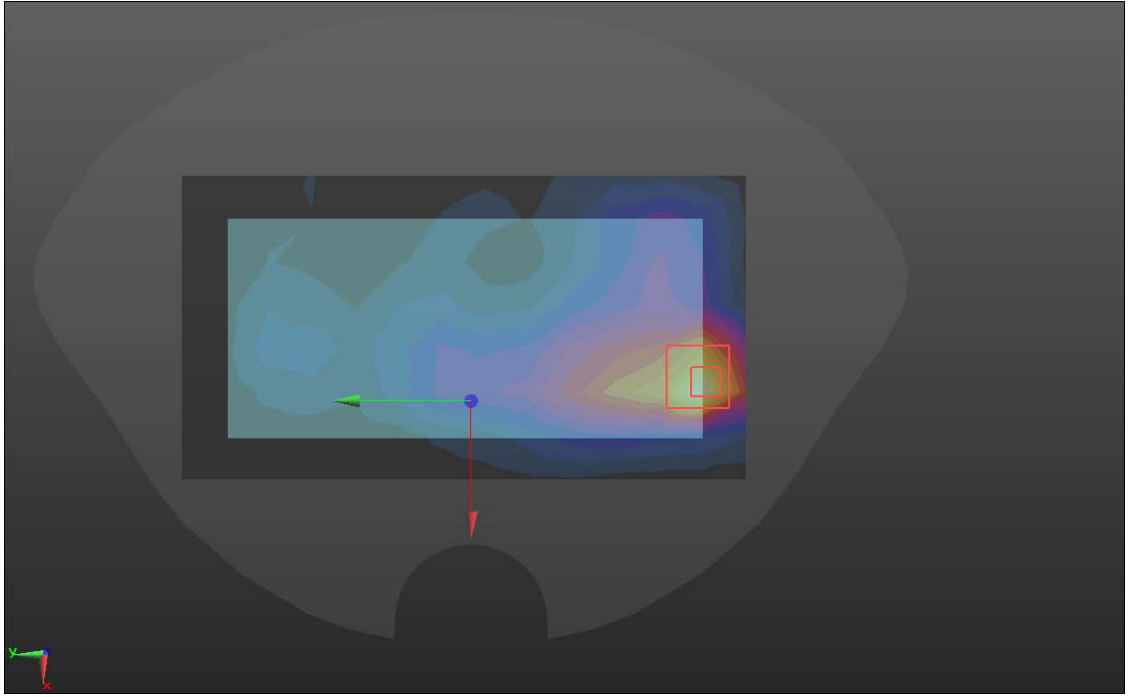
LTE Band 4

Hotspot	Back
Communication System: UID 0, LTE band 4 (0); Frequency: 1745 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1745 \text{ MHz}$; $\sigma = 1.383 \text{ S/m}$; $\epsilon_r = 40.047$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(5.12, 5.12, 5.12); Calibrated: 2020/9/1; - Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2020/9/30 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) BACK/LTE B4/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.769 W/kg BACK/LTE B4/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 10.60 V/m; Power Drift = -0.15 dB Peak SAR (extrapolated) = 1.15 W/kg SAR(1 g) = 0.806 W/kg; SAR(10 g) = 0.375 W/kg Maximum value of SAR (measured) = 0.833 W/kg 	

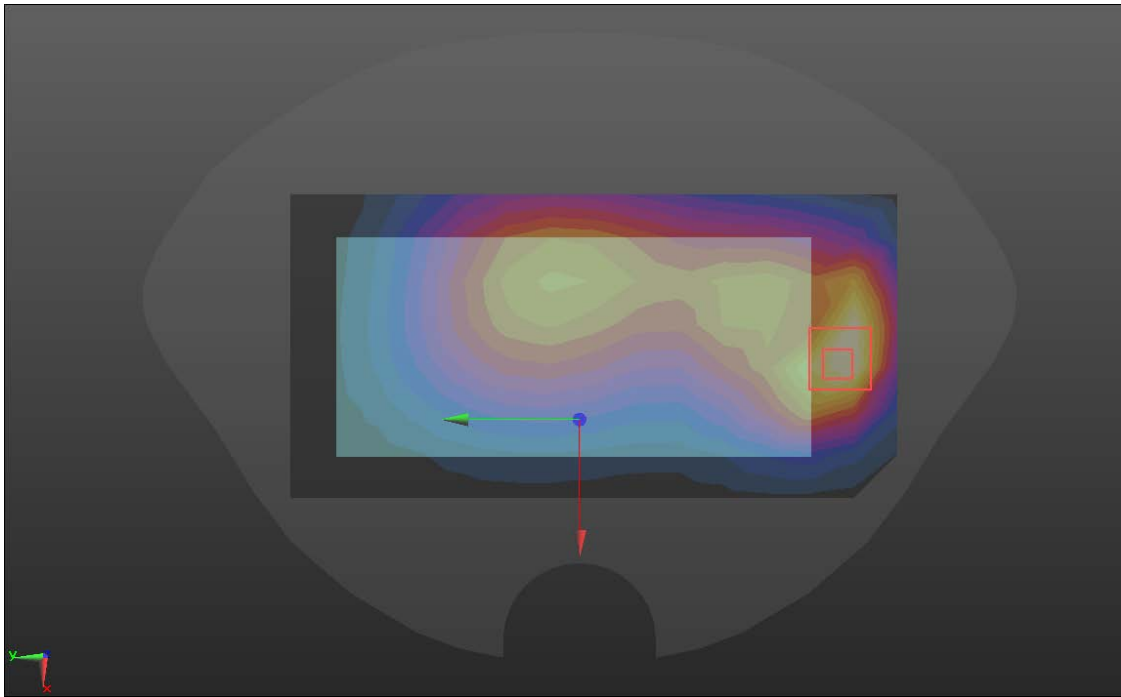
LTE Band 5

Hotspot	Back
Communication System: UID 0, LTE Band 5 (0); Frequency: 836.5 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 836.5 \text{ MHz}$; $\sigma = 0.87 \text{ S/m}$; $\epsilon_r = 40.25$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(6.16, 6.16, 6.16); Calibrated: 2020/9/1; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2020/9/30 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) BACK/LTE B5/Area Scan (8x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.484 W/kg BACK/LTE B5/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 17.51 V/m; Power Drift = 0.12 dB Peak SAR (extrapolated) = 0.783 W/kg SAR(1 g) = 0.444 W/kg; SAR(10 g) = 0.253 W/kg Maximum value of SAR (measured) = 0.543 W/kg 	

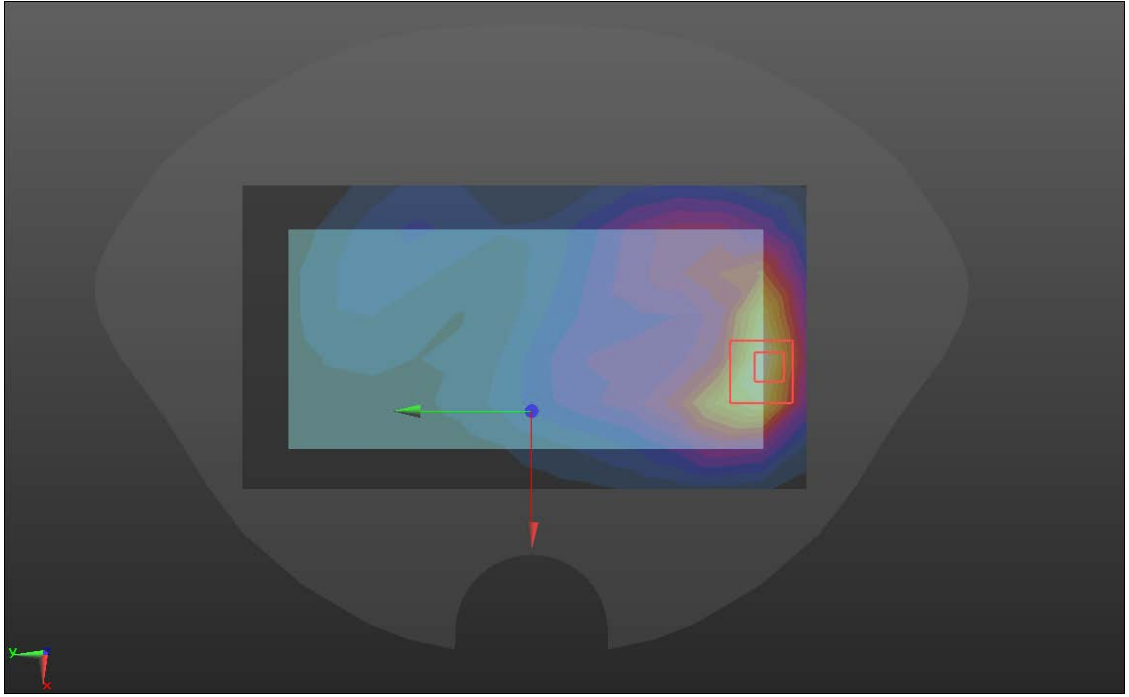
LTE Band 7

Hotspot	Back
Communication System: UID 0, LTE Band 7 (0); Frequency: 2535 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.888$ S/m; $\epsilon_r = 39.084$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.58, 4.58, 4.58); Calibrated: 2020/9/1; - Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2020/9/30 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) BACK/LTE B7/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.640 W/kg BACK/LTE B7/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 8.209 V/m; Power Drift = -0.13 dB Peak SAR (extrapolated) = 1.13 W/kg SAR(1 g) = 0.546 W/kg; SAR(10 g) = 0.267 W/kg Maximum value of SAR (measured) = 0.693 W/kg 	

LTE Band 26

Hotspot	Back
Communication System: UID 0, LTE Band 26 (0); Frequency: 831.5 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 831.5 \text{ MHz}$; $\sigma = 0.87 \text{ S/m}$; $\epsilon_r = 40.25$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(6.16, 6.16, 6.16); Calibrated: 2020/9/1; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2020/9/30 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) BACK/LTE B26/Area Scan (8x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.470 W/kg BACK/LTE B26/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 17.87 V/m; Power Drift = 0.05 dB Peak SAR (extrapolated) = 0.778 W/kg SAR(1 g) = 0.438 W/kg; SAR(10 g) = 0.250 W/kg Maximum value of SAR (measured) = 0.532 W/kg	
	

LTE Band 66

Hotspot	Back
Communication System: UID 0, LTE band 66 (0); Frequency: 1745 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1745 \text{ MHz}$; $\sigma = 1.383 \text{ S/m}$; $\epsilon_r = 40.047$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(5.12, 5.12, 5.12); Calibrated: 2020/9/1; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2020/9/30 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) BACK/LTE B66/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.880 W/kg BACK/LTE B66/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 11.54 V/m; Power Drift = -0.05 dB Peak SAR (extrapolated) = 1.28 W/kg SAR(1 g) = 0.921 W/kg; SAR(10 g) = 0.419 W/kg Maximum value of SAR (measured) = 0.913 W/kg 	

WLAN 2.4G

Head	Left Cheek
Communication System: UID 10012 - CAB, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps); Frequency: 2437 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 2437 \text{ MHz}$; $\sigma = 1.85 \text{ S/m}$; $\epsilon_r = 40.10$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Left Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.58, 4.58, 4.58); Calibrated: 2020/9/1; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2020/9/30 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) LC/WLAN 2.4G 2/Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 1.69 W/kg LC/WLAN 2.4G 2/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 21.66 V/m; Power Drift = -0.19 dB Peak SAR (extrapolated) = 2.77 W/kg SAR(1 g) = 1.18 W/kg; SAR(10 g) = 0.560 W/kg Maximum value of SAR (measured) = 1.30 W/kg 