

FCC Test Report

Report No.: AGC16557241001FR01

FCC ID 2BKCLET538

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: Two Way Radio

BRAND NAME : ETMY

MODEL NAME : ET-538, ET-538M2, ET-538M3, ET-638M2,

ET-638M3, ET-638M4

APPLICANT: Guangzhou ETMY Technology Co., Ltd.

DATE OF ISSUE : Oct. 29, 2024

STANDARD(S) : FCC Part 15 Subpart B

REPORT VERSION: V1.0

Attestation of Global Conce (Shenzhen) Co., Ltd



Page 2 of 26


Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Oct. 29, 2024	Valid	Initial Release



Table of Contents

1. General Information	4
2. Product Information	5
2.1 Product Technical Description	5
2.2 Auxiliary Surrounding Description	5
2.2 Test Methodology	6
2.3 Description of Test Modes	6
3. Test Environment	7
3.1 Address of The Test Laboratory	7
3.2 Test Facility	7
3.3 Environmental Conditions	8
3.4 Measurement Uncertainty	8
3.5 List of Equipment Used	9
4. Summary of Test Results	10
5. Radiated Emission Measurements	11
5.1 Provisions Applicable	11
5.2 Measurement Setup	11
5.3 Measurement Procedure	12
5.4 Measurement Resul	13
6. Conducted Emission Measurements	17
6.1 Provisions Applicable	17
6.2 Measurement Setup	17
6.3 Measurement Procedure	18
6.4 Measurement Result	19
7. Antenna Conducted Power for Receivers	21
7.1 Provisions Applicable	21
7.2 Measurement Setup	21
7.3 Measurement Procedure	21
7.4 Measurement Result	22
8. Scanning Receivers and Frequency Converters Used with Scanning Receivers	24
8.1 Provisions Applicable	24
8.2 Measurement Setup	24
8.3 Measurement Procedure	24
8.4 Measurement Result	25
Appendix I: Photographs of Test Setup	26
Appendix II: Photographs of Test EUT	26





1. General Information

	,		
Applicant	Guangzhou ETMY Technology Co., Ltd.		
Address	13th Floor Dong Cheng Building NO.421 Yan Jiang East Road Yuexiu District, GuangZhou 51000 China		
Manufacturer	Guangzhou ETMY Technology Co., Ltd.		
Address	13th Floor Dong Cheng Building NO.421 Yan Jiang East Road Yuexiu District, GuangZhou 51000 China		
Factory	Guangzhou ETMY Technology Co., Ltd.		
Address	13th Floor Dong Cheng Building NO.421 Yan Jiang East Road Yuexiu District, GuangZhou 51000 China		
Product Designation Two Way Radio			
Brand Name ETMY			
Test Model	t Model ET-538		
Series Model(s) ET-538M2, ET-538M3, ET-638, ET-638M2, ET-638M3, ET-638M4			
Difference Description Only the cover line design and model name are different.			
Date of receipt of test item	Oct. 16, 2024		
Date of Test Oct. 16, 2024 - Oct. 29, 2024			
Deviation from Standard No any deviation from the test method			
Condition of Test Sample Normal			
Test Result	Result Pass		
est Report Form No AGCTR-ER-FCC-CSR-V1.0			

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By	Bibo zhang	
	Bibo Zhang (Project Engineer)	Oct. 29, 2024
Reviewed By	Calin Lin	
_	Calvin Liu (Reviewer)	Oct. 29, 2024
Approved By	Max Zhang	
_	Max Zhang Authorized Officer	Oct. 29, 2024



Page 5 of 26

2. Product Information

2.1 Product Technical Description

Housing Type	Plastic and metal
Receive Frequency Range	400-520MHz (Scanning Receiver)
Highest Operating Frequency	Greater than 108MHz
Equipment Type	Table-Top
Hardware Version	Ver 1.0
Software Version	Ver 1.02
Power Supply	DC 12V, 0.5A by Adapter or DC 7.4V by Battery

I/O Port Information (⊠Applicable □Not Applicable)

I/O Port of EUT				
I/O Port Type	Q'TY	Cable	Tested with	
Antenna Port	1	0	1	
Type-C	1	0	1	
AUX	1	0	1	

2.2 Auxiliary Surrounding Description

The Following Peripheral Devices and Interface Cables Were Connected During the Measurement:

☐ Test Accessories Come from The Laboratory

Equipment	Manufacturer	Model Name	Specification	Data Cable	Power Cable
Adapter	Huawei	HW-200440C00			0.6m Unshielded

☐ Test Accessories Come from The Manufacturer

Equipment	Manufacturer	Model Name	Specification	Data Cable	Power Cable
		1	-	-	-



Page 6 of 26

2.2 Test Methodology

The tests were performed according to following standards:

	No.	Identity	Document Title
ſ	1	FCC 47 CFR Part 15	Radio Frequency Devices
	2	ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

2.3 Description of Test Modes

No.	Test Mode	Remark
1	Scanning mode	Worst
2	Scanning stopped/Receiving at low channel of 400 MHz to 520 MHz	
3	Scanning stopped/Receiving at middle channel of 400 MHz to 520 MHz	
4	Scanning stopped/Receiving at high channel of 400 MHz to 520 MHz	

Note: Only the result of the worst case was recorded in the report.



Page 7 of 26

3. Test Environment

3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 8 of 26

3.3 Environmental Conditions

	Normal Conditions	
Temperature range (°C)	15 - 35	
Relative humidity range	20 % - 75 %	
Pressure range (kPa)	86 - 106	

3.4 Measurement Uncertainty

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission	$U_c = \pm 2.9 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$





3.5 List of Equipment Used

•	Radiated Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
\boxtimes	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31	
\boxtimes	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2024-05-24	2025-05-23	
\boxtimes	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27	
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10	
\boxtimes	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2024-03-31	2025-03-30	
\boxtimes	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2024-07-24	2026-07-23	

•	AC Power Line Conducted Emission						
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
\boxtimes	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2024-05-28	2025-05-27
	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2024-05-28	2025-05-27

• Te	Test Software								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information				
	AGC-EM-S004	RE Test System	Tonscend	TS ⁺ Ver2.1(JS32-RE)	4.0.0.0				
	AGC-EM-S003	RE Test System	FARA	EZ-EMC	V.RA-03A				
	AGC-EM-S011	RSE Test System	Tonscend	TS ⁺ Ver2.1(JS36-RSE)	4.0.0.0				
	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71				



Page 10 of 26

4. Summary of Test Results

Item	FCC Rules	Description Of Test	Class/Severity	Result
1	Section 15.107	Radiated Emission	Class B	Pass
2	Section 15.109	Conducted Emission	Class B	Pass
3	§15.111	Antenna Conducted Power for Receivers	/	Pass
4	§15.121(b)	Scanning receivers and frequency converters used with scanning receivers	/	Pass




5. Radiated Emission Measurements

5.1 Provisions Applicable


FCC CFR Title 47 Part 15 Subpart B Section 15.109:

1 00 01 K Title 47 Tall 13 00			
Frequency Range	Class B Limit (dBuV/m @3m)	Class A Limit (dBuV/m @3m)	Value
30MHz-88MHz	30MHz-88MHz 40.00		Quasi-peak
88MHz-216MHz	43.50	53.50	Quasi-peak
216MHz-960MHz	46.00	56.00	Quasi-peak
960MHz-1GHz	54.00	64.00	Quasi-peak
Above 1GHz	54.00	60.00	Average
Above IGHZ	74.00	80.00	Peak

5.2 Measurement Setup

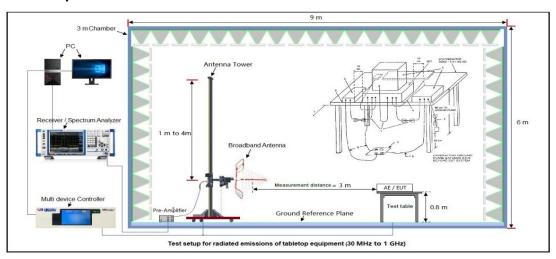

Radiated Emission Measurements Test Setup for 30MHz to 1GHz

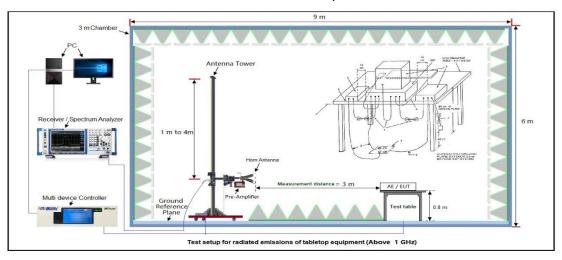

Radiated Emission Measurements Test Setup for above 1GHz



Page 12 of 26

5.3 Measurement Procedure

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.4.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4. The EUT received power by AC 120V/60Hz.
- 5. The antenna was placed at 3 meter away from the EUT as stated in FCC Part 15. The antenna connected to the Analyzer via a cable and at times a pre-amplifier would be used.
- 6. The Analyzer / Receiver quickly scanned from 30MHz to 1000MHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- 7. The test mode(s) were scanned during the test:
- 8. Recorded at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and Q.P./Peak reading is presented. For emissions below 1GHz, use 120KHz RBW and VBW>=3RBW for QP reading.
- 9. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
- 10. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 11. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 12. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 13. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.
- 14. The test data of the worst case condition (mode 1) was reported on the following Data page.


EMI Test Receiver Setup:

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
Above 1 GHz	1MHz	10 Hz	/	Ave.




5.4 Measurement Resul

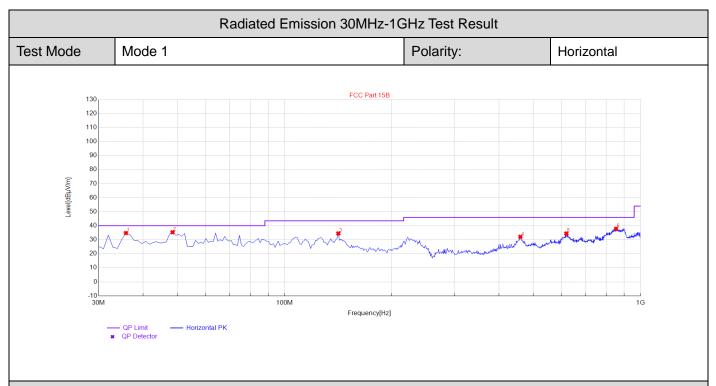

Final [Data List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	35.82	34.77	11.52	40.00	5.23	100	11	Horizontal
2	48.43	35.31	14.44	40.00	4.69	100	64	Horizontal
3	141.55	34.54	16.13	43.50	8.96	100	159	Horizontal
4	459.71	32.11	24.69	46.00	13.89	100	358	Horizontal
5	618.79	34.46	25.79	46.00	11.54	100	349	Horizontal
6	853.53	37.84	29.80	46.00	8.16	100	138	Horizontal


RESULT: PASS



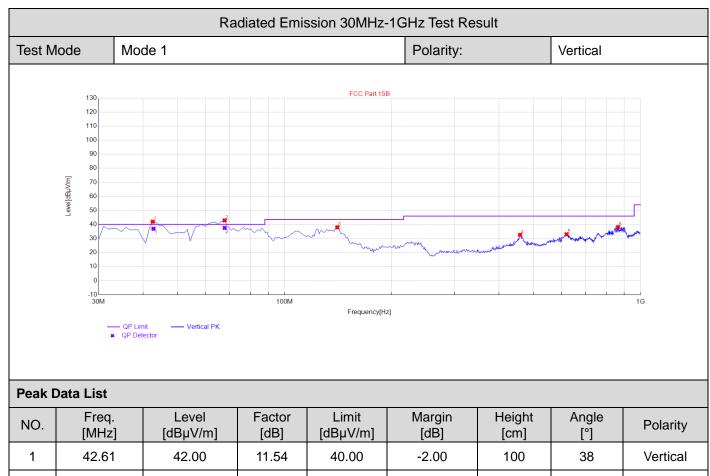


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	42.61	42.00	11.54	40.00	-2.00	100	38	Vertical
2	67.83	42.90	15.35	40.00	-2.90	100	30	Vertical
3	140.58	37.97	16.01	43.50	5.53	100	17	Vertical
4	458.74	32.61	24.41	46.00	13.39	100	146	Vertical
5	619.76	32.99	25.90	46.00	13.01	100	46	Vertical
6	864.2	38.09	29.87	46.00	7.91	100	330	Vertical
Final	Data List							
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBµV/m]	QP Limit [dBµV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	42.8	11.54	36.95	40.00	3.05	100	38	Vertical
2	67.85	15.35	37.57	40.00	2.43	100	30	Vertical



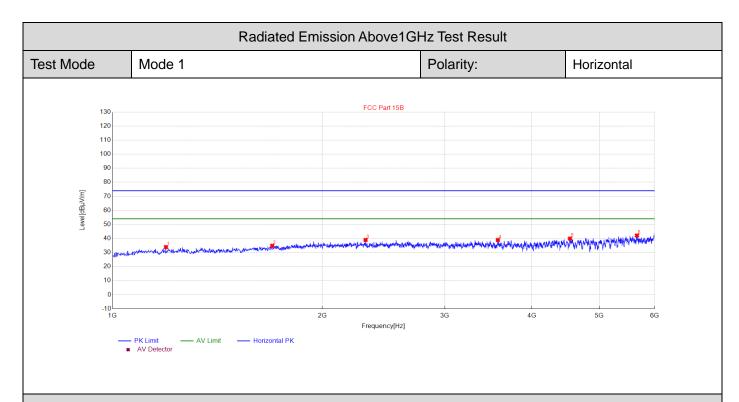

Final I	Final Data List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1193.038608	33.91	-18.03	74.00	40.09	100	220	Horizontal
2	1695.139028	34.81	-15.93	74.00	39.19	100	130	Horizontal
3	2308.261652	38.93	-12.67	74.00	35.07	100	320	Horizontal
4	3574.514903	38.91	-10.54	74.00	35.09	100	360	Horizontal
5	4536.707342	39.92	-7.87	74.00	34.08	100	280	Horizontal
6	5660.932186	42.13	-6.40	74.00	31.87	100	110	Horizontal



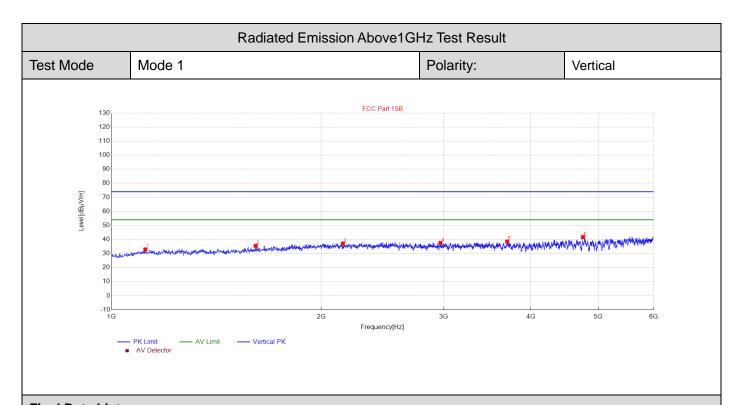

Final I	Data List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1118.023605	32.94	-18.15	74.00	41.06	100	150	Vertical
2	1610.122024	35.49	-16.63	74.00	38.51	100	120	Vertical
3	2148.229646	37.11	-13.05	74.00	36.89	100	150	Vertical
4	2966.393279	37.58	-11.98	74.00	36.42	100	30	Vertical
5	3698.539708	38.55	-10.37	74.00	35.45	100	180	Vertical
6	4751.75035	41.74	-7.82	74.00	32.26	100	110	Vertical

Note:

- 1. Factor=Antenna Factor + Cable loss Amplifier gain, Margin= Measurement-Limit.
- 2. The "Factor" value can be calculated automatically by software of measurement system.



6. Conducted Emission Measurements

6.1 Provisions Applicable

FCC CFR Title 47 Part 15 Subpart B Section 15.107:


For Class B Limits:

. or older B Limite.							
Fraguenay	Maximum RF Line Voltage						
Frequency	Q.P. (dBµV)	Average (dBμV)					
150kHz~500kHz	66-56	56-46					
500kHz~5MHz	56	46					
5MHz~30MHz	60	50					

For Class A Limits:

Frequency	Maximum RF	Line Voltage
	Q.P. (dBµV)	Average (dBµV)
150kHz~500kHz	79	66
500kHz~30MHz	73	60

6.2 Measurement Setup

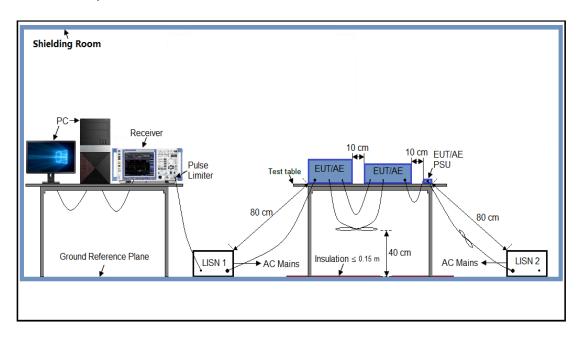



Report No.: AGC16557241001FR01 Page 18 of 26

6.3 Measurement Procedure

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.4.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4. The EUT received AC 120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5. All support equipment received AC power from a second LISN, if any.
- 6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test data of the worst case condition (Mode 1) was reported on the following Data page.



6.4 Measurement Result

		Ac Power I	Line Cond	dolog Ell			
Mode	Mode 1			LI	SN Line	Ho	ot Side
Leve	el [dBµ∨]			•		•	
80						-,,-,	
70				¦;			
60				<u></u>		1 1 1 1	
50						1 1 1 1	
40 -7	My 1				A DESCRIPTION OF THE PERSON NAMED IN	ويرقع فالعظم أمرار المالية	*****
30	· // / / / / / / / / / / / / / / / / /	Mary Company	والمتعادم والمامع واللهم والمام ويهالما			This is a law are a sur-	
20	~~~ · \	/// <u>/// // /</u> /	***************************************				
10				 			
0							
-10	2001- 4001-	COOL 0001- 414	2	M 3M	4M 5M 6M	004 4004	2014 2014
15	60k 300k 400k	600k 800k 1M		M 3M ency [Hz]	4M 5M 6M	8M 10M	20M 30M
+ + +W	ES agc_fin		<u> </u>				
	MEASUREMENT 2024/10/21 19 Frequency	:47 Level	Transd	Limit		Detector	Line
	2024/10/21 19 Frequency MHz 0.434000 3.974000 4.450000	:47 Level dBμV 44.00	Transd dB 6.1 6.3	Limit dBµV	Margin dB 13.2 20.2 18.4 18.6 18.9 22.6	QP QP QP QP QP	Line L1 L1 L1 L1 L1
	2024/10/21 19 Frequency MHz 0.434000 3.974000 4.450000 4.762000 4.902000 5.022000 MEASUREMENT 2024/10/21 19	:47 Level dBµV 44.00 35.80 37.60 37.40 37.40 37.40	Transd dB 6.1 6.3 6.3 6.3 6.4 "agc_	Limit dBµV 57 56 56 56 60	dB 13.2 20.2 18.4 18.6 18.9 22.6	QP QP QP QP QP QP	L1 L1 L1 L1 L1 L1
	2024/10/21 19 Frequency MHz 0.434000 3.974000 4.450000 4.762000 4.902000 5.022000	:47 Level dBµV 44.00 35.80 37.60 37.40 37.40 37.40	Transd dB 6.1 6.3 6.3 6.3 6.4 "agc_	Limit dBµV 57 56 56 56 60	dB 13.2 20.2 18.4 18.6 18.9 22.6	QP QP QP QP QP QP	L1 L1 L1 L1 L1 L1
	2024/10/21 19 Frequency MHz 0.434000 3.974000 4.450000 4.762000 4.902000 5.022000 MEASUREMENT 2024/10/21 19 Frequency MHz 0.362000	:47 Level dBµV 44.00 35.80 37.60 37.40 37.40 37.40 **RESULT:* :47 Level dBµV 31.00	Transd dB 6.1 6.3 6.3 6.3 6.4 "agc_	Limit dBµV 57 56 56 56 60 fin2" Limit dBµV	dB 13.2 20.2 18.4 18.6 18.9 22.6 Margin dB	QP QP QP QP QP QP	L1 L1 L1 L1 L1 L1 L1
	2024/10/21 19 Frequency MHz 0.434000 3.974000 4.450000 4.762000 4.902000 5.022000 MEASUREMENT 2024/10/21 19 Frequency MHz 0.362000 0.430000	:47 Level dBµV 44.00 35.80 37.60 37.40 37.40 **RESULT:* :47 Level dBµV 31.00 39.30	Transd dB 6.1 6.3 6.3 6.4 "agc_	Limit dBµV 57 56 56 56 56 60 fin2" Limit dBµV 49 47	dB 13.2 20.2 18.4 18.6 18.9 22.6 Margin dB	QP QP QP QP QP QP Detector	L1 L1 L1 L1 L1 L1 L1 L1 L1
	2024/10/21 19 Frequency MHz 0.434000 3.974000 4.450000 4.762000 5.022000 MEASUREMENT 2024/10/21 19 Frequency MHz 0.362000 0.430000 0.682000	:47 Level dBµV 44.00 35.80 37.60 37.40 37.40 37.40 **RESULT:* :47 Level dBµV 31.00 39.30 27.90	Transd dB 6.1 6.3 6.3 6.4 "agc_ Transd dB 6.1 6.1 6.2	Limit dBµV 57 56 56 56 60 fin2" Limit dBµV 49 47 46	dB 13.2 20.2 18.4 18.6 18.9 22.6 Margin dB 17.7 8.0 18.1	QP QP QP QP QP QP QP AV	L1 L
	2024/10/21 19 Frequency MHz 0.434000 3.974000 4.450000 4.762000 5.022000 MEASUREMENT 2024/10/21 19 Frequency MHz 0.362000 0.430000 0.682000	:47 Level dBµV 44.00 35.80 37.60 37.40 37.40 **RESULT:* :47 Level dBµV 31.00 39.30 27.90 24.30	Transd dB 6.1 6.3 6.3 6.4 "agc_	Limit dBµV 57 56 56 56 56 60 fin2" Limit dBµV 49 47	dB 13.2 20.2 18.4 18.6 18.9 22.6 Margin dB	QP QP QP QP QP QP AV AV AV	L1 L1 L1 L1 L1 L1 L1 L1 L1

RESULT: PASS



Ac Power Line Conducted Emission Test							
Test Mode	Mode 1			LI	SN Line	N	leutral Side
Leve	el [dBµV]						
80 _F -							
70			<u></u>				
60		<u> </u>	<u></u>			1 1 1 1	- i
50							-
40	~ 		Property and Aug. A.	Name of Street	e de la companya de La companya de la co	And the part of the first of	Marandan da
30		\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\		and the second second			فاحتث وموانته
20		+	r I	i-			
10		-	L				
0	· 		i				
-10 L 15	0k 300k 400k	600k 800k 1	M	2M 3M	4M 5M 6N	8M 10M	20M 30M
			Freq	uency [Hz]			
+ + + M	ES agc_fin						
	MEASUREMENT	RESULT	: "agc	fin"			
	2024/10/21 20		m	T	Managia.	D-++	
	Frequency MHz	dBµV	dB	dBµV	Margin dB	Detector	Line
	1112	αДμν	Q.D	αυμν	Q.D		
	0.414000	47.30		58	10.3	QP	N
	4.458000	39.50	6.3	56	16.5	QP	N
	4.606000	39.80	6.3	56	16.2	QP	N
	4.734000 4.814000	39.50 39.40	6.3 6.3	56 56	16.5 16.6	QP QP	N N
	4.962000	39.40	6.3	56	16.4	QP QP	N
	1.502000	33.00	0.5	50	10.1	Ψ.	24
	MEASUREMENT	RESULT	: "agc_	fin2"			
		0.12					
	2024/10/21 20	0:12 Level	Transd	Limit	Margin	Detector	r Line
			Transd dB	Limit dBµV	Margin dB	Detector	r Line
	2024/10/21 20 Frequency MHz	Level dBµV	dB	dΒμV	dB		
	2024/10/21 20 Frequency MHz 0.354000	Level dBµV 30.50	dB 6.1	dBµV 49	dB 18.4	AV	И
	2024/10/21 20 Frequency MHz 0.354000 0.414000	Level dBµV 30.50 41.10	dB 6.1 6.1	dΒμV 49 48	dB 18.4 6.5	AV AV	N N
	2024/10/21 20 Frequency MHz 0.354000 0.414000 0.670000	Level dBµV 30.50 41.10 28.70	dB 6.1 6.2	dBµV 49 48 46	dB 18.4 6.5 17.3	AV AV AV	N N N
	2024/10/21 20 Frequency MHz 0.354000 0.414000	Level dBµV 30.50 41.10	dB 6.1 6.1	dΒμV 49 48	dB 18.4 6.5	AV AV AV	N N



Page 21 of 26


7. Antenna Conducted Power for Receivers

7.1 Provisions Applicable

The antenna conducted power of the receiver as defined in §15.111 shall not exceed the values given in the following tables

Frequency Range	9 KHz to 2GHz		
Limit	2.0 nW (-57 dBm)		

7.2 Measurement Setup

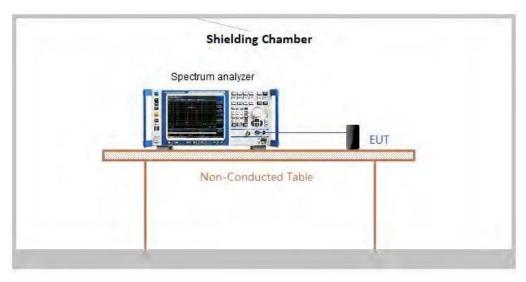


7.3 Measurement Procedure

1. The receiver antenna terminal connected to a spectrum analyzer.

2. Receiver set as follow:

Frequency range	RBW (kHz)	VBW (kHz)
9 kHz ~ 150 kHz	1	3
150 kHz ~ 30 MHz	10	30
30 MHz ~ 1000 MHz	100	300
1000 MHz ~ 3000 MHz	1000	3000


3. The test data of the worst case condition (mode 1) was reported on the following Data page.






7.4 Measurement Result



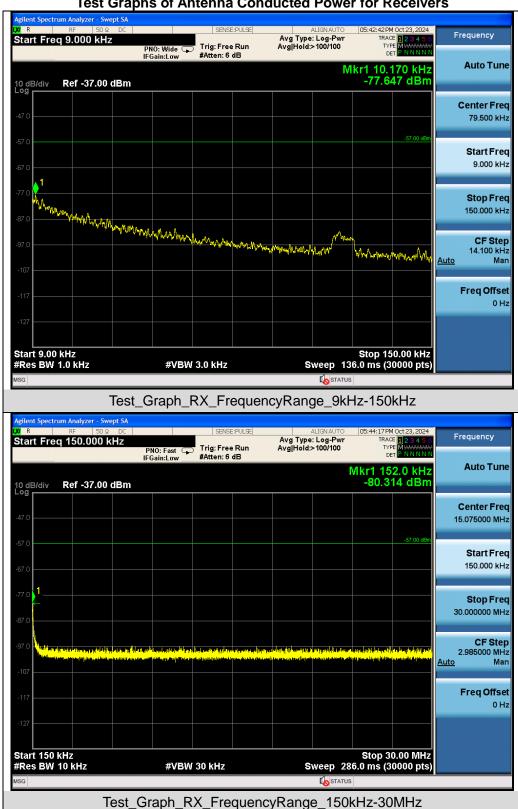



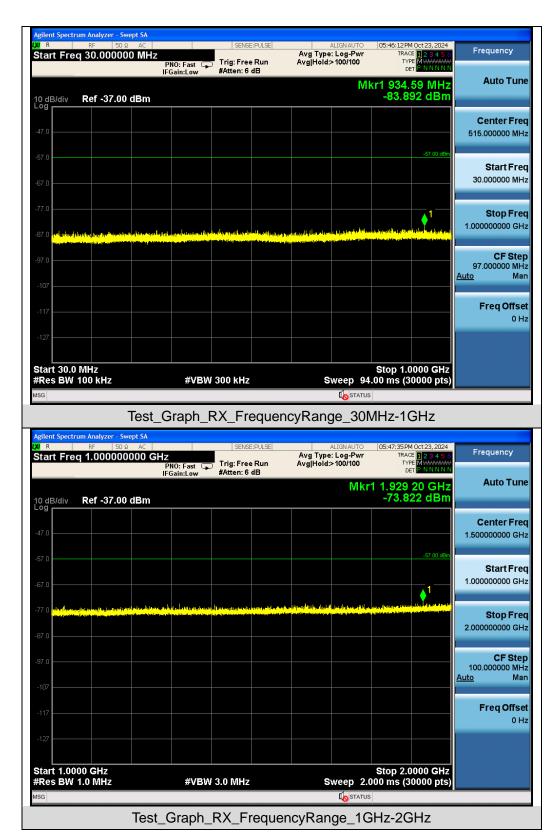

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/




Page 24 of 26

8. Scanning Receivers and Frequency Converters Used with Scanning Receivers

8.1 Provisions Applicable

Except as provided in paragraph (c) of this section, scanning receivers shall reject any signals from the Cellular Radiotelephone Service frequency bands that are 38 dB or lower based upon a 12 dB SINAD measurement, which is considered the threshold where a signal can be clearly discerned from any interference that may be present.

8.2 Measurement Setup

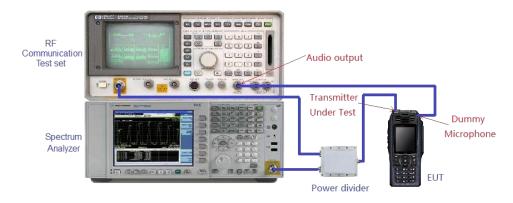

8.3 Measurement Procedure

- 1) Connected the EUT as shown in the above block diagram.
- 2) Apply a RF signal to the receiver input port at lowest, middle and highest channel frequencies of receiver operation band.
- 3) Adjust the audio output level of the receiver to it's rated value with the distortion less than 10%.
- 4) Adjust the RF Signal Generator Output Power to produce 12 dB SINAD without the audio output power dropping by more than 3 dB. This output level of the RF SG at each channel frequency is the sensitivity of the receiver.
- 5) Select the lowest or worse-case sensitivity level for all of the bands as the reference sensitivity.
- 6) Adjust the RF Signal Generator output to a level of +60 dB above the reference sensitivity obtained in step 5) and its frequency to the frequency points in the cellular band.
- 7) Set the Receiver squelch to threshold, the signal required to open the squelch must be lower than the reference sensitivity level.
- 8) Set the receiver in a scanning mode and allow it to scan through it's complete receiving range.
- 9) If the receiver unsquelched or stopped on any frequency, receiving at this frequency, then adjust the signal generator output level until 12 dB SINAD is produced, this level is the spurious value and the difference between the reference sensitivity and the spurious value is the rejection ratio and must be at least 38dB.
- 10) Repeat above procedure at the frequencies 824.5, 836.0, and 848.5 MHz for the mobile band, and 869.1, 881.5, and 893.5MHz for the cellular base band.



Page 25 of 26

8.4 Measurement Result

Scanning Frequency Band (MHz)	Test Frequency of Cellular Band (MHz)	Spurious Value of Cellular Frequency (dBm)	Reference Sensitivity (dBm)	Measurement Result (dB)	Limit (dB)
400-520	824.5/836.0/848.5	>-45	-107	<-62	<-38
400-520	869.1/881.5/893.5	>-45	-107	<-62	<-38

Note:

- 1. Measurement Result = Rejection Ratio
- 2. Reference Sensitivity is the recorded value when the signal-to-noise ratio is 12dB.
- 3. Measurement Result = Reference Sensitivity- Spurious Value.



Page 26 of 26

Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC16557241001AP01 **Appendix II: Photographs of Test EUT**

Refer to the Report No.: AGC16557241001AP02

----End of Report----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.