

TEST REPORT

Reference No..... : WTX24X11265506W001
FCC ID..... : 2A3NS-LF01
Applicant..... : Sveaverken Svea Agri AB
Address..... : Högmossevägen 11, SE-641 39 Katrineholm Sweden
Manufacturer..... : The same as Applicant
Address..... : The same as Applicant
Product Name..... : RoboPusher Nimbo Plus
Model No..... : LF01
Standards..... : FCC Part 15.407
Date of Receipt sample..... : 2024-11-13
Date of Test..... : 2024-11-13 to 2024-12-04
Date of Issue..... : 2024-12-04
Test Report Form No..... : WTX_Part 15_407W
Test Result..... : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

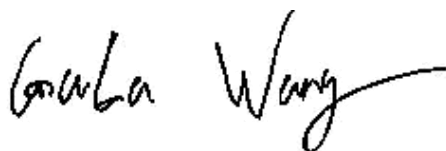
Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:



Gala Wang

Approved by:



Jason Su

TABLE OF CONTENTS

1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2 TEST STANDARDS	6
1.3 TEST METHODOLOGY	6
1.4 TABLE FOR PARAMETERS OF TEST SOFTWARE SETTING	6
1.5 EUT OPERATING DURING TEST	8
1.6 TEST FACILITY	8
1.7 EUT SETUP AND TEST MODE	9
1.8 MEASUREMENT UNCERTAINTY	11
1.9 TEST EQUIPMENT LIST AND DETAILS	12
2. SUMMARY OF TEST RESULTS	16
3. ANTENNA REQUIREMENT	17
3.1 STANDARD APPLICABLE	17
3.2 EVALUATION INFORMATION	17
4. AUTOMATICALLY DISCONTINUE TRANSMISSION	18
4.1 STANDARD APPLICABLE	18
4.2 SUMMARY OF TEST RESULTS	18
5. POWER SPECTRAL DENSITY	19
5.1 STANDARD APPLICABLE	19
5.2 TEST PROCEDURE	19
5.3 SUMMARY OF TEST RESULTS/PLOTS	20
6. EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH	21
6.1 STANDARD APPLICABLE	21
6.2 TEST PROCEDURE	21
6.3 SUMMARY OF TEST RESULTS/PLOTS	23
7. MAXIMUM CONDUCTED OUTPUT POWER	24
7.1 STANDARD APPLICABLE	24
7.2 TEST PROCEDURE	24
7.3 SUMMARY OF TEST RESULTS/PLOTS	25
8. RADIATED SPURIOUS EMISSIONS	26
8.1 STANDARD APPLICABLE	26
8.2 TEST PROCEDURE	26
8.3 TEST RECEIVER SETUP	28
8.4 CORRECTED AMPLITUDE & MARGIN CALCULATION	28
8.5 SUMMARY OF TEST RESULTS/PLOTS	29
9. FREQUENCY STABILITY	100
9.1 STANDARD APPLICABLE	100
9.2 TEST PROCEDURE	100
9.3 SUMMARY OF TEST RESULTS/PLOTS	100
10 CONDUCTED EMISSIONS	101
10.1 TEST PROCEDURE	101
10.2 BASIC TEST SETUP BLOCK DIAGRAM	101
10.3 TEST RECEIVER SETUP	101
10.4 SUMMARY OF TEST RESULTS/PLOTS	101
APPENDIX SUMMARY	104
APPENDIX A	105
APPENDIX B	135
APPENDIX C	193
APPENDIX D	223

APPENDIX PHOTOGRAPHS224

Report version

Version No.	Date of issue	Description
Rev.00	2024-12-04	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	RoboPusher Nimbo Plus
Trade Name:	Sveaverken
Model No.:	LF01
Adding Model(s):	/
Rated Voltage:	AC 120V for Adapter power DC: 58.8V
Battery Capacity:	40000mAh
Power Adapter:	Model: H82-48V10A Input: 110-245VAC 45/65Hz Battery: Ternary lithium battery 14celles Output voltage : 58.8VDC
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11a, 802.11n(HT20) , 802.11n-HT40, 802.11ac-VHT20/40/80, 802.11ax-HE20/40/80
Frequency Range:	5180-5240MHz, 5745-5825MHz
Max. RF Output Power:	5180-5240MHz: Antenna 0: 16.23dBm (Conducted) Antenna 1:15.65dBm (Conducted) 5745-5825MHz: Antenna 0: 14.88dBm (Conducted) Antenna 1:15.07dBm (Conducted)
Type of Modulation:	QPSK, 16QAM, 64QAM, 256QAM, 1024QAM
Type of Antenna:	Glue stick antenna
Antenna Gain:	5180-5240MHz:2.64dBi 5745-5825MHz:3.20dBi
<i>Note The Antenna Gain is provided by the customer and can affect the validity of results.</i>	

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.407: General technical requirements.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

KDB789033 D02 v02r01: Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-Nii) Devices Part 15, Subparte.

KDB662911 D01 Multiple Transmitter Output v02r01: Emissions Testing of Transmitters with Multiple Outputs in the Same Band.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB789033 D02 v02r01. The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Table for parameters of Test Software setting

Run commands and follow the instructions given by the manufacturer, you can start to test. During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Mode	Ant.	Test Frequency (MHz)												
		NCB: 20MHz												
		5180	5200	5240	5260	5280	5320	5500	5580	5700	5720	5745	5785	5825
802.11a 6Mbps	ANT 0	16	16	16	/	/	/	/	/	/	/	16	16	16
	ANT 1	16	16	16	/	/	/	/	/	/	/	16	16	16
802.11n-HT20 MCS0	ANT 0	14	14	14	/	/	/	/	/	/	/	14	14	14
	ANT 1	14	14	14	/	/	/	/	/	/	/	14	14	14
802.11ac-VHT20 MCS0	ANT 0	14	14	14	/	/	/	/	/	/	/	14	14	14
	ANT 1	14	14	14	/	/	/	/	/	/	/	14	14	14
802.11ax-HE20 MCS0	ANT 0	13	13	13	/	/	/	/	/	/	/	13	13	13

	ANT 1	13	13	13	/	/	/	/	/	/	/	13	13	13
Mode	Ant.	NCB: 40MHz												
		5190	5230	5270	5310	5510	5550	5670	5710	5755	5795			
802.11n-HT40 MCS0	ANT 0	13	13	/	/	/	/	/	/	13	13			
	ANT 1	13	13	/	/	/	/	/	/	13	13			
802.11ac-VHT40 MCS0	ANT 0	13	13	/	/	/	/	/	/	13	13			
	ANT 1	13	13	/	/	/	/	/	/	13	13			
802.11ax-HE40 MCS0	ANT 0	13	13	/	/	/	/	/	/	13	13			
	ANT 1	13	13	/	/	/	/	/	/	13	13			
Mode	Ant.	NCB: 80MHz												
		5210	5290	5530	5610	/		5775						
802.11ac-VHT80 MCS0	ANT 0	12	/	/	/	/		12						
	ANT 1	12	/	/	/	/		12						
802.11ax-HE80 MCS0	ANT 0	12	/	/	/	/		12						
	ANT 1	12	/	/	/	/		12						

1.5 EUT Operating during test

EUT was programmed to be in continuously transmitting mode. During the test, EUT operation to normal function and programs under Android were executed.

1.6 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101)

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A and the CAB identifier is CN0057.

1.7 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11a	5180MHz,5200MHz,5240MHz, ,5745MHz, 5785MHz,5825MHz
TM2	802.11n-HT20	5180MHz,5200MHz,5240MHz,5745MHz, 5785MHz,5825MHz
TM3	802.11n-HT40	5190MHz,5230MHz,5755MHz,5795MHz
TM4	802.11ac-VHT20	5180MHz,5200MHz,5240MHz,5745MHz, 5785MHz,5825MHz
TM5	802.11ac-VHT40	5190MHz,5230MHz,5755MHz,5795MHz
TM6	802.11ac-VHT80	5210MHz ,5775 MHz
TM7	802.11ax-HE20	5180MHz,5200MHz,5240MHz,5745MHz, 5785MHz,5825MHz
TM8	802.11ax-HE40	5190MHz,5230MHz,5755MHz,5795MHz
TM9	802.11ax-HE80	5210MHz ,5775 MHz
Note1 : All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report; Note 2: The 5GHz WIFI has two antennas and support Multiple Outputs for 802.11n/ac/ax mode for this report; For 5150-5250MHz: Antenna 0 Gain is 2.64dBi; Antenna 1 Gain is 2.64dBi; For 5725-5850MHz: Antenna 0 Gain is 3.20dBi; Antenna 1 Gain is 3.20dBi; According to KDB 662911, for same directional gain: For 5150-5250MHz: Directional gain = $G_{ANT} + 10 \log(N_{ANT})$ dBi = $2.64 + 10\log(2)$ dBi = 5.65dBi For 5725-5850MHz: Directional gain = $G_{ANT} + 10 \log(N_{ANT})$ dBi = $3.20 + 10\log(2)$ dBi = 6.21dBi		

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	45~75 %
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
AC Cable	1.4	Unshielded	Without Ferrite
DC Cable	0.9	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.8 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.9 Test Equipment List and Details

Fixed asset Number	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
WTXE1041A 1001	Communication Tester	Rohde & Schwarz	CMW500	148650	2024-02-24	2025-02-23
WTXE1005A 1005	Spectrum Analyzer	Agilent	N9020A	US471401 02	2024-03-19	2025-03-18
WTXE1084A 1001	Spectrum Analyzer	Agilent	N9020A	MY543205 48	2024-02-24	2025-02-23
WTXE1004A 1-001	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2024-02-27	2025-02-26
WTXE1103A 1003	Attenuator	Pasternack	PE4007-4	/	2024-02-24	2025-02-23
WTXE1003A 1-005	Coaxial Cable	/	0M4RFC	/	2024-07-03	2025-01-03
☒ Chamber A: Below 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2024-02-24	2025-02-23
WTXE1001A 1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2024-03-19	2025-03-18
WTXE1007A 1001	Amplifier	HP	8447F	2805A034 75	2024-02-24	2025-02-23
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2024-02-26	2025-02-25
WTXE1010A 1006	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2024-02-24	2025-02-23
WTXE1104A 1032-1	Coaxial Cable	/	RC_6G-N-M	/	2024-03-15	2025-03-14
WTXE1104A 1032-2	Coaxial Cable	/	RC_6G-N-M	/	2024-03-15	2025-03-14
WTXE1104A 1032-3	Coaxial Cable	/	RC_6G-N-M	/	2024-03-15	2025-03-14
☒ Chamber A: Above 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2024-02-24	2025-02-23
WTXE1001A 1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2024-03-19	2025-03-18
WTXE1065A 1001	Amplifier	C&D	PAP-1G18	2002	2024-02-27	2025-02-26
WTXE1010A 1005	Horn Antenna	ETS	3117	00086197	2024-02-26	2025-02-25

WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2024-03-17	2025-03-16
WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2024-02-29	2025-02-28
WTXE1104A 1033-1	Coaxial Cable	/	C16-07-07	/	2024-03-15	2025-03-14
WTXE1104A 1033-2	Coaxial Cable	/	C16-07-07	/	2024-03-15	2025-03-14
WTXE1104A 1033-3	Coaxial Cable	/	C16-07-07	/	2024-03-15	2025-03-14
☐ Chamber B:Below 1GHz						
WTXE1010A 1006	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2024-03-17	2027-03-16
WTXE1038A 1001	Amplifier	Agilent	8447D	2944A104 57	2024-02-24	2025-02-23
WTXE1001A 1002	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2024-02-24	2025-02-23
WTXE1104A 1031-1	Coaxial Cable	/	1.5MRFC-LWB3	/	2024-07-03	2025-07-02
WTXE1104A 1031-2	Coaxial Cable	/	RG 316	/	2024-07-03	2025-07-02
WTXE1104A 1031-3	Coaxial Cable	/	RG 316	/	2024-07-03	2025-07-02
☐ Chamber C:Below 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2024-02-27	2025-02-26
WTXE1010A 1013-1	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2024-04-18	2027-04-17
WTXE1007A 1002	Amplifier	HP	8447F	2944A038 69	2024-02-24	2025-02-23
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2024-02-26	2025-02-25
WTXE1104A 1034-1	Coaxial Cable	/	RC_6G-N-M	/	2024-07-03	2025-07-02
WTXE1104A 1034-2	Coaxial Cable	/	RC_6G-N-M	/	2024-07-03	2025-07-02
WTXE1104A 1034-3	Coaxial Cable	/	RC_6G-N-M	/	2024-07-03	2025-07-02
☐ Chamber C: Above 1GHz						
WTXE1093A	EMI Test	Rohde &	ESIB 26	100401	2024-02-27	2025-02-26

1001	Receiver	Schwarz				
WTXE1103A 1005	Horn Antenna	POAM	RTF-118A	1820	2023-03-10	2026-03-09
WTXE1103A 1006	Amplifier	Tonscend	TAP01018050	AP22E806 235	2024-02-27	2025-02-26
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2024-03-17	2025-03-16
WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2024-02-29	2025-02-28
WTXE1104A 1035-1	Coaxial Cable	/	RC-18G-N-M	/	2024-07-03	2025-07-02
WTXE1104A 1035-2	Coaxial Cable	/	RC-18G-N-M	/	2024-07-03	2025-07-02
WTXE1104A 1035-3	Coaxial Cable	/	RC-18G-N-M	/	2024-07-03	2025-07-02
☒ Conducted Room 1#						
WTXE1104A 1029	EMI Test Receiver	Rohde & Schwarz	ESCI	100525	2023-12-12	2024-12-11
WTXE1002A 1001	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2024-02-24	2025-02-23
WTXE1003A 1001	AC LISN	Schwarz beck	NSLK8126	8126-279	2024-02-24	2025-02-23
WTXE1104A 1036	Coaxial Cable	/	RG 316	/	2024-07-03	2025-07-02
WTXE1104A 1038	Coaxial Cable	/	6MRFC-DP	/	2024-07-03	2025-07-02
☐ Conducted Room 2#						
WTXE1001A 1004	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2024-02-24	2025-02-23
WTXE1003A 1003	LISN	Rohde & Schwarz	ENV 216	100097	2024-02-24	2025-02-23
WTXE1104A 1037	Coaxial Cable	/	RG 316	/	2024-07-03	2025-07-02

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission A)	Farad	EZ-EMC	RA-03A1 (1.1.4.2)
EMI Test Software (Radiated Emission B)	Farad	EZ-EMC	RA-03A1 (1.1.4.2)
EMI Test Software (Radiated Emission C)	Farad	EZ-EMC	RA-03A1-2 (1.1.4.2)
EMI Test Software (Conducted Emission Room 1#)	Farad	EZ-EMC	3A1*CE-RE 1.1.4.3
EMI Test Software (Conducted Emission Room 2#)	Farad	EZ-EMC	3A1*CE-RE 1.1.4.3

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203; §15.405	Antenna Requirement	Compliant
15.407 (c)	Automatically Discontinue Transmission	Compliant
§15.207; §15.407(b)(6)	Conducted Emission	Compliant
§15.407(a)(1),(2)	Power Spectral Density	Compliant
§15.407(e)	Emission Bandwidth and Occupied Bandwidth	Compliant
§15.407(a)(1),(2)	Maximum Conducted Output Power	Compliant
§15.407(b)(1),(2),(3),(4)	Undesirable emission	Compliant
§15.205; §15.407(b)(1),(2),(3)	Radiated Emission	Compliant
§15.407(g)	Frequency Stability	Compliant
§15.407(h)	Dynamic Frequency Selection (DFS)	Compliant

N/A: Not applicable.

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Evaluation Information

This product has two Glue stick antennas, fulfill the requirement of this section.

4. Automatically Discontinue Transmission

4.1 Standard Applicable

According to FCC Part 15.407(c), the device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

4.2 Summary of Test Results

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

5. Power Spectral Density

5.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

5.2 Test Procedure

According to 789033 D02 v02r01 General UNII Test Procedures New Rules v02, the following is the measurement procedure.

For devices operating in the bands 5.15-5.25GHz, 5.25-5.35GHz, and 5.47-5.725GHz, the above procedures make use of 1MHz RBW to satisfy directly the 1MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85GHz, the rules specify a measurement bandwidth of 500kHz. Many spectrum analyzers do not have 500kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1MHz, or 500kHz, "provided that the measured power is integrated over the full

reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1MHz, or 500kHz). If measurements are performed using a reduced resolution bandwidth ($< 1\text{ MHz}$, or $< 500\text{kHz}$) and integrated over 1 MHz, or 500kHz bandwidth, the following adjustments to the procedures apply:

- a) Set $\text{RBW} \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $\text{VBW} \geq 3\text{ RBW}$.
- c) If measurement bandwidth of Maximum PSD is specified in 500kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas $\text{RBW} (< 500\text{kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1MHz, add $10\log(1\text{MHz}/\text{RBW})$ to the measured result, whereas $\text{RBW} (< 1\text{MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100kHz for the sections 5.c) and 5.d) above, since $\text{RBW}=100\text{kHz}$ is available on nearly all spectrum analyzers.

5.3 Summary of Test Results/Plots

Please refer to Appendix A

6. Emission Bandwidth and Occupied Bandwidth

6.1 Standard Applicable

According to 15.407(a) and (e):

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(e) Within the 5.725-5.85GHz band, the minimum 6dB bandwidth of U-NII devices shall be at least 500kHz.

6.2 Test Procedure

According to 789033 D02 v02r0r section C&D, the following is the measurement procedure.

1. Emission Bandwidth (EBW)

a) Set RBW = approximately 1% of the emission bandwidth.

b) Set the VBW > RBW.

- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85GHz

Section 15.407(e) specifies the minimum 6dB emission bandwidth of at least 500kHz for the band 5.715-5.85GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

D. 99 Percent Occupied Bandwidth

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to 789033 D02 v02r01 General UNII Test Procedures New Rules v01 define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

The following procedure shall be used for measuring (99 %) power bandwidth:

- 1. Set center frequency to the nominal EUT channel center frequency.
- 2. Set span = 1.5 times to 5.0 times the OBW.
- 3. Set RBW = 1 % to 5 % of the OBW
- 4. Set VBW $\geq 3 \times$ RBW
- 5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- 6. Use the 99 % power bandwidth function of the instrument (if available).
- 7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency.

Reference No.: WTX24X11265506W001

The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

6.3 Summary of Test Results/Plots

Please refer to Appendix B

7. Maximum Conducted Output Power

7.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

7.2 Test Procedure

According to KDB789033 D02 v02r01 section E, the following is the measurement procedure.

- (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set RBW = 1MHz.
- (iii) Set VBW $\geq$ 3MHz.
- (iv) Number of points in sweep $\geq$ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that

narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

7.3 Summary of Test Results/Plots

Please refer to Appendix C

8. Radiated Spurious Emissions

8.1 Standard Applicable

According to §15.407(b), undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25GHz band: All emissions outside of the 5.15-5.35GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35GHz band: All emissions outside of the 5.15-5.35GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725GHz band: All emissions outside of the 5.47-5.725GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85GHz band:
 - (i) All emissions shall be limited to a level of -27dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10dBm/MHz at 25MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6dBm/MHz at 5MHz above or below the band edge, and from 5MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

According to §15.407(b)(6), Unwanted emissions below 1GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

According to §15.407(b)(7), The provisions of §15.205 apply to intentional radiators operating under this section.

789033 D02 v02r01 General UNII Test Procedures New Rules v01

If radiated measurements are performed, field strength is then converted to EIRP as follows:

$$\text{EIRP} = ((E \cdot d)^2) / 30$$

where:

- E is the field strength in V/m;
- d is the measurement distance in meters;
- EIRP is the equivalent isotropically radiated power in watts.

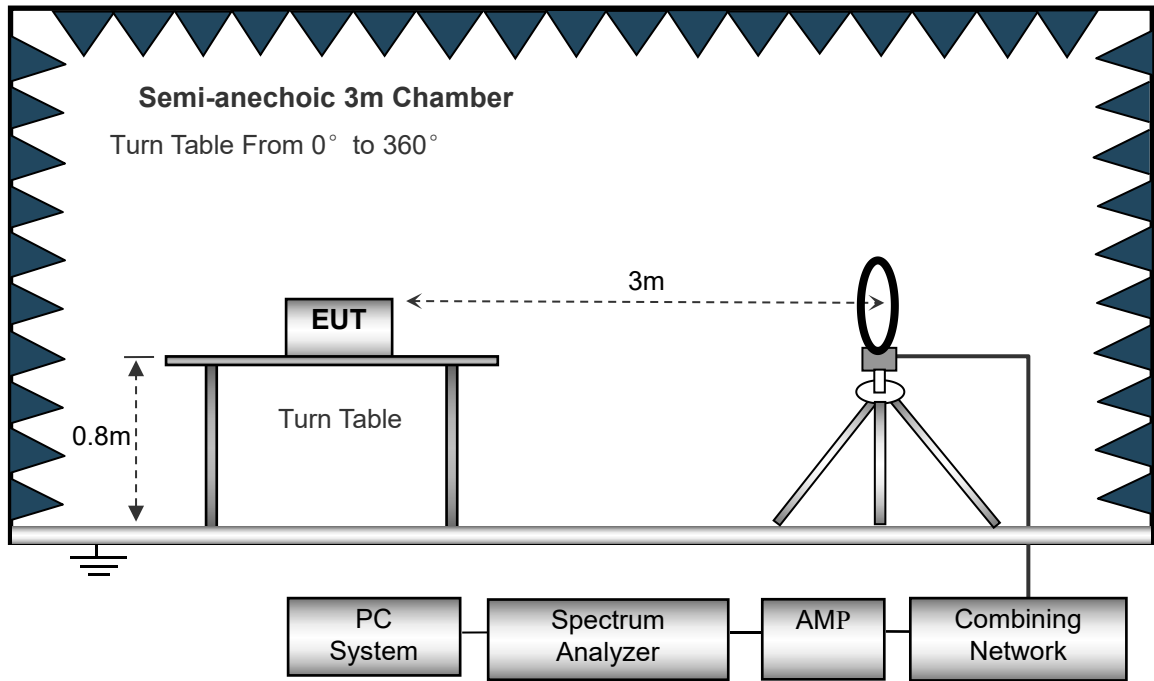
8.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.407(b)(6) and FCC Part 15.209 Limit..


The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

The spacing between the peripherals was 10cm.


The test setup for emission measurement below 30MHz.



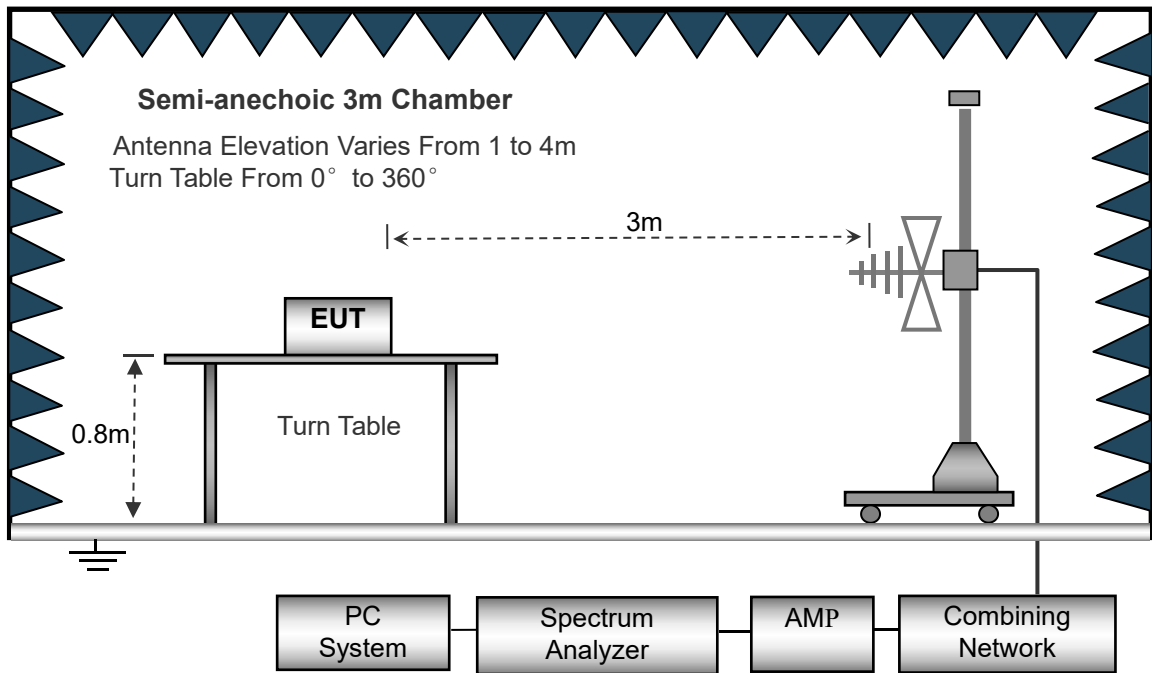The test setup for emission measurement from 30 MHz to 1 GHz.



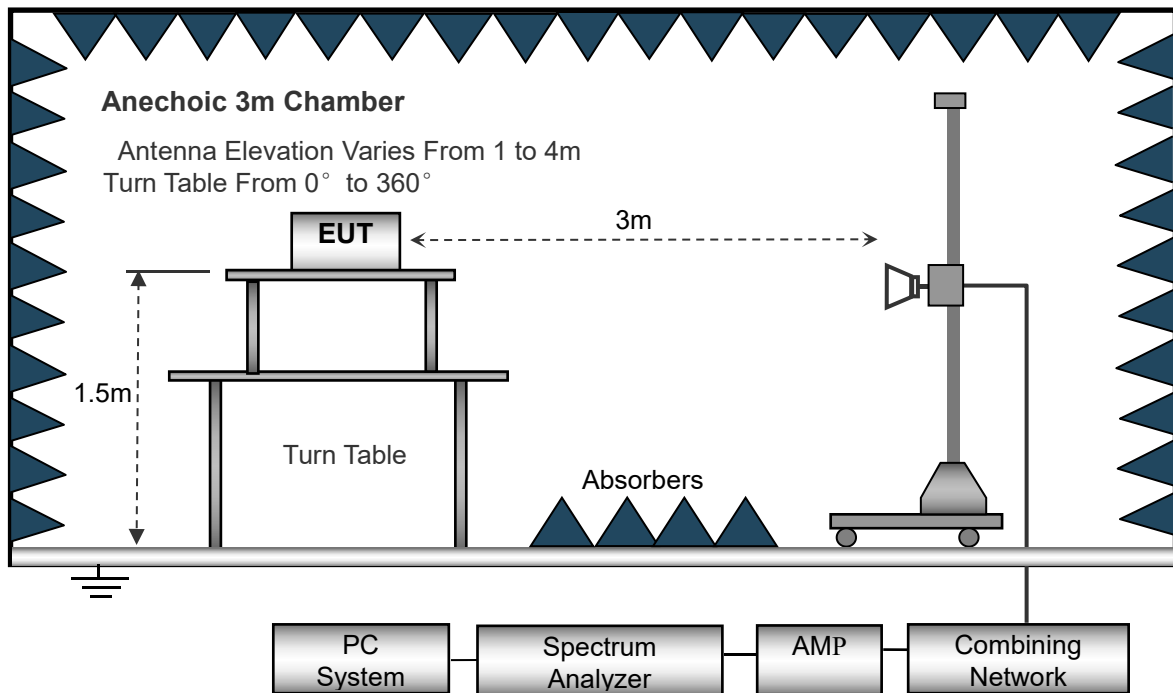The test setup for emission measurement above 1GHz.



8.3 Test Receiver Setup

During the radiated emission test for above 1GHz, the test receiver was set with the following configurations:

For peak detector:

RBW = 1000kHz, VBW = 3000kHz, Sweep Time = Auto

For average detector:

RBW = 1000kHz, VBW = 10Hz, Sweep Time = Auto

8.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dBμV means the emission is 6dBμV below the maximum limit for Class B. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

8.5 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.


- Spurious Emission From 30MHz to 1GHz
- Antenna 0(Worst case)
- 5150-5250MHz

802.11a			
Test Channel	5180MHz(Worst case)	Polarity:	Horizontal

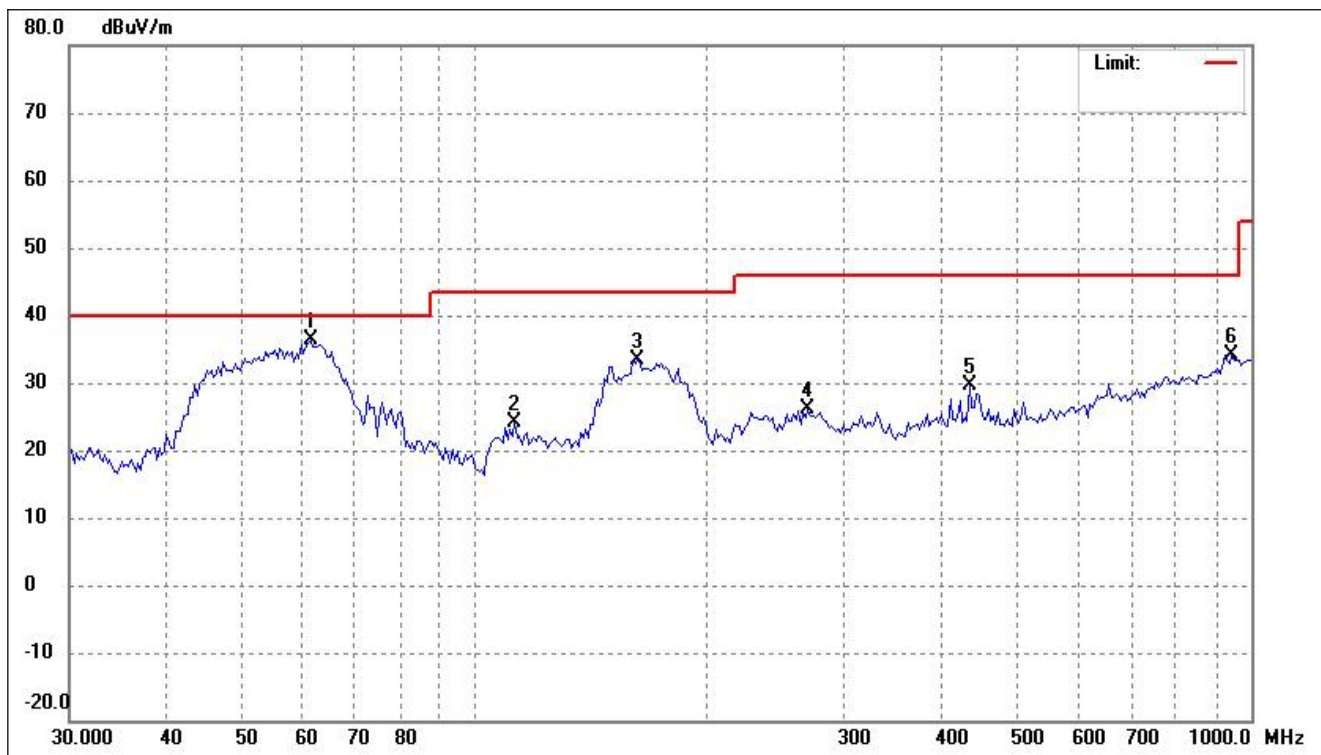


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	61.4343	45.19	-8.69	36.50	40.00	-3.50	-	-	peak
2	112.4271	34.93	-10.81	24.12	43.50	-19.38	-	-	peak
3	162.0197	41.49	-8.10	33.39	43.50	-10.11	-	-	peak
4	268.7212	35.00	-8.92	26.08	46.00	-19.92	-	-	peak
5	433.3397	35.06	-5.55	29.51	46.00	-16.49	-	-	peak
6	945.3336	31.02	3.19	34.21	46.00	-11.79	-	-	peak

802.11a			
Test Channel	5180MHz(Worst case)	Polarity:	Vertical

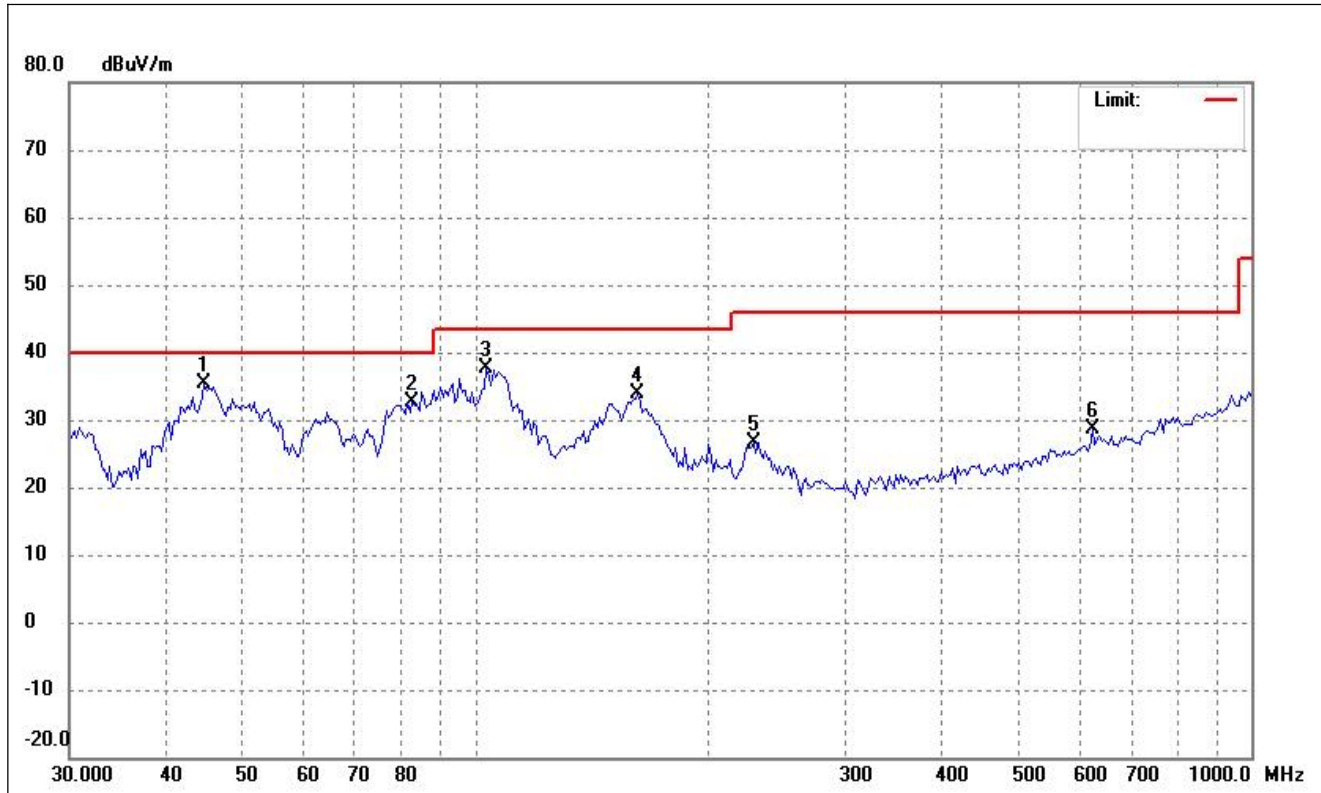


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	44.7793	43.29	-7.96	35.33	40.00	-4.67	-	-	peak
2	83.1077	45.22	-12.49	32.73	40.00	-7.27	-	-	peak
3	103.3353	49.39	-11.68	37.71	43.50	-5.79	-	-	peak
4	162.0197	41.94	-8.10	33.84	43.50	-9.66	-	-	peak
5	228.6173	37.78	-11.15	26.63	46.00	-19.37	-	-	peak
6	624.4897	30.38	-1.78	28.60	46.00	-17.40	-	-	peak

802.11n-HT20			
Test Channel	5180MHz(worst case)	Polarity:	Horizontal

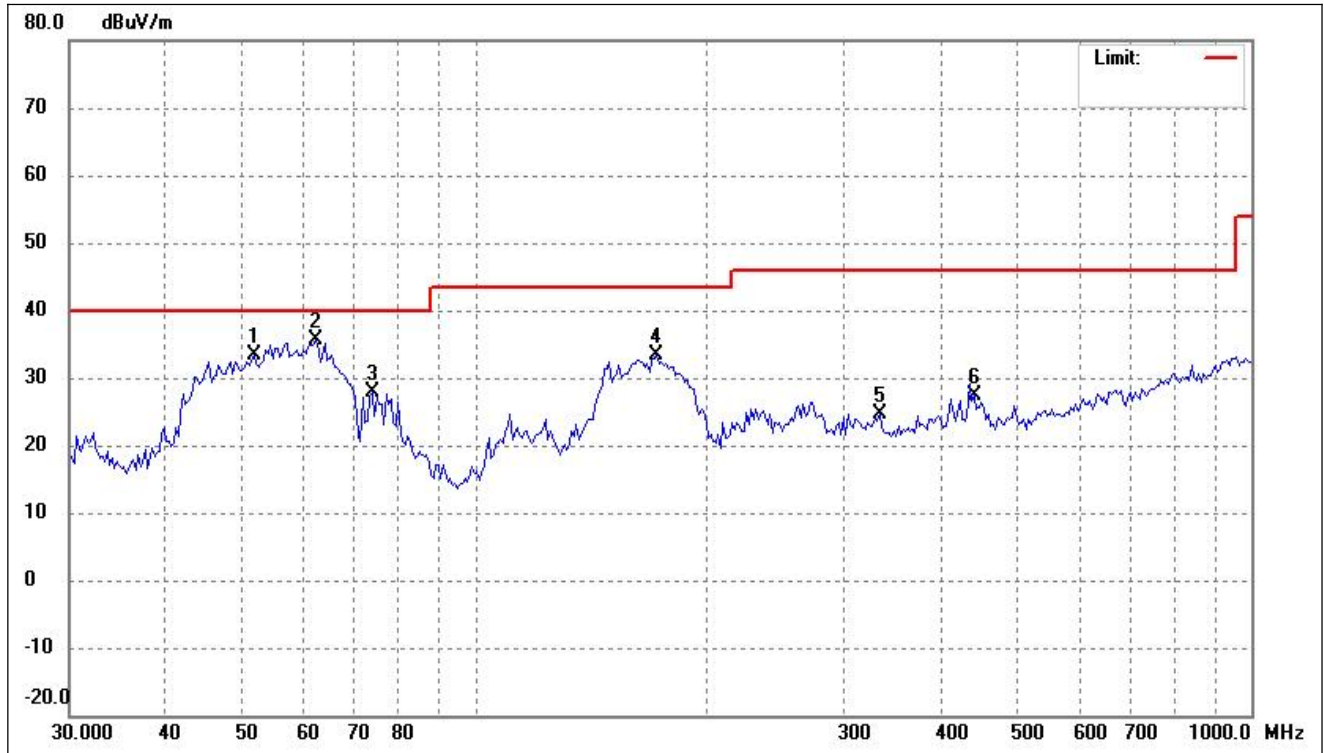


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	51.8999	41.10	-7.79	33.31	40.00	-6.69	-	-	peak
2	62.3038	44.45	-8.84	35.61	40.00	-4.39	-	-	peak
3	73.7496	38.86	-11.08	27.78	40.00	-12.22	-	-	peak
4	171.3890	41.84	-8.51	33.33	43.50	-10.17	-	-	peak
5	331.7858	31.82	-7.25	24.57	46.00	-21.43	-	-	peak
6	439.4730	32.83	-5.42	27.41	46.00	-18.59	-	-	peak

802.11n-HT20			
Test Channel	5180MHz(worst case)	Polarity:	Vertical

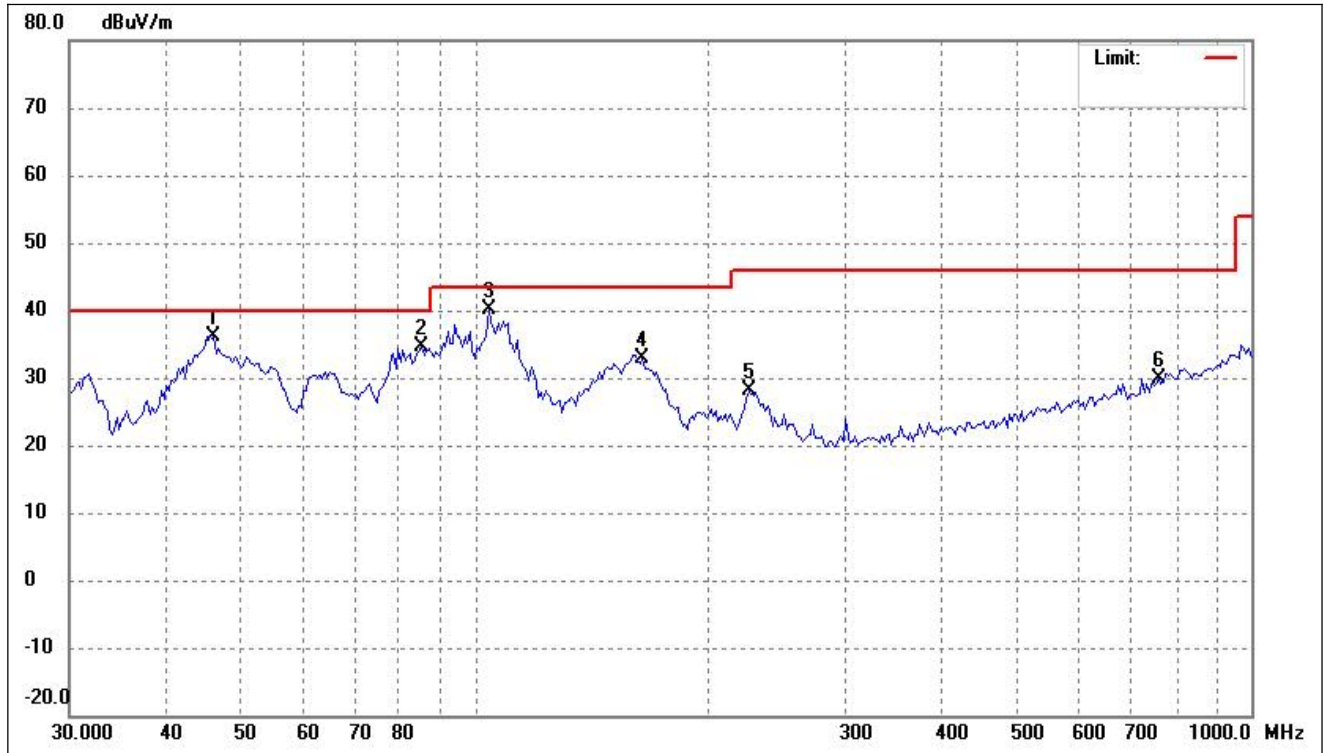

No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	46.0558	44.02	-7.87	36.15	40.00	-3.85	-	-	peak
2	85.4769	47.10	-12.53	34.57	40.00	-5.43	-	-	peak
3	104.0640	51.85	-11.62	40.23	43.50	-3.27	-	-	peak
4	164.3129	40.95	-8.16	32.79	43.50	-10.71	-	-	peak
5	225.4267	39.45	-11.28	28.17	46.00	-17.83	-	-	peak
6	760.2867	29.65	0.35	30.00	46.00	-16.00	-	-	peak

802.11ac-VHT20			
Test Channel	5180MHz(worst case)	Polarity:	Horizontal

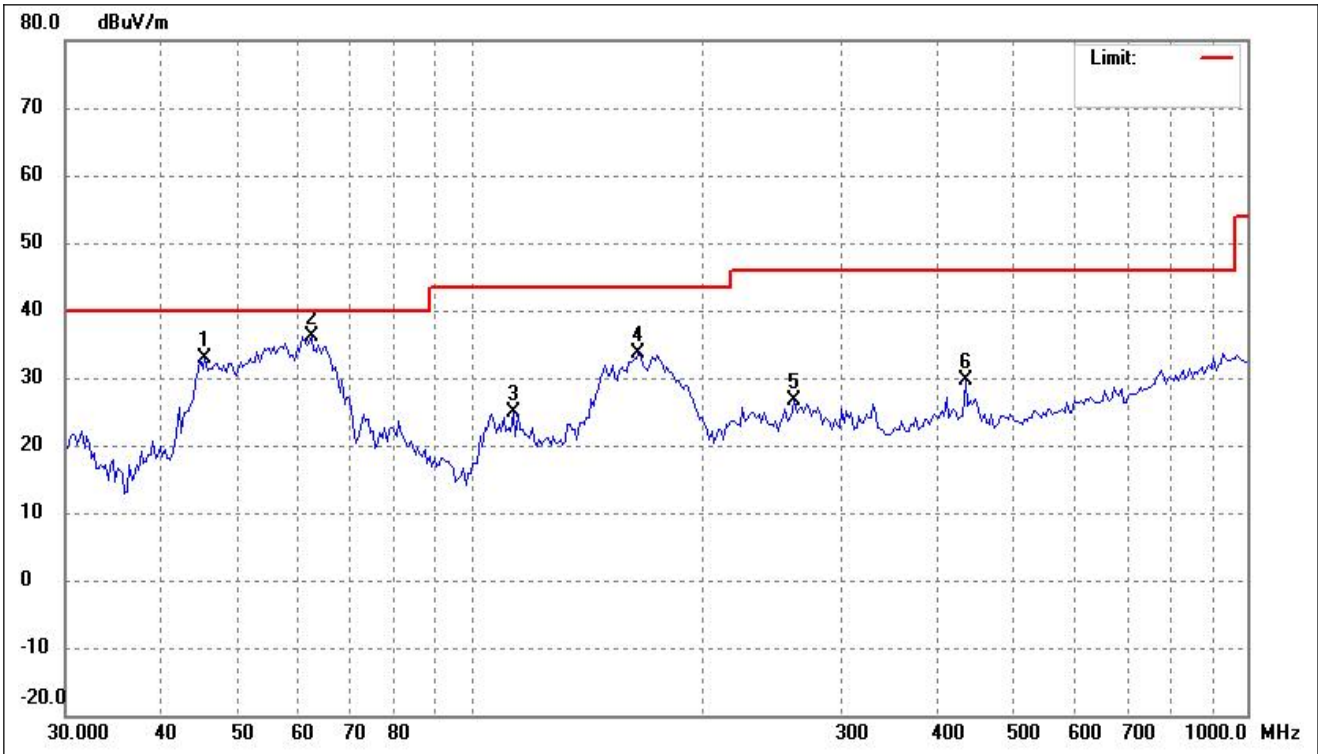


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	45.4131	40.76	-7.92	32.84	40.00	-7.16	-	-	peak
2	62.3038	44.93	-8.84	36.09	40.00	-3.91	-	-	peak
3	113.2200	35.52	-10.72	24.80	43.50	-18.70	-	-	peak
4	164.3129	41.74	-8.16	33.58	43.50	-9.92	-	-	peak
5	261.2730	35.79	-9.24	26.55	46.00	-19.45	-	-	peak
6	433.3397	35.27	-5.55	29.72	46.00	-16.28	-	-	peak

802.11ac-VHT20			
Test Channel	5180MHz(worst case)	Polarity:	Vertical




No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	46.0558	43.44	-7.87	35.57	40.00	-4.43	-	-	peak
2	79.1185	46.02	-12.25	33.77	40.00	-6.23	-	-	peak
3	94.3137	49.37	-12.33	37.04	43.50	-6.46	-	-	peak
4	106.2812	49.64	-11.41	38.23	43.50	-5.27	-	-	peak
5	160.8852	41.67	-8.08	33.59	43.50	-9.91	-	-	peak
6	225.4267	38.96	-11.28	27.68	46.00	-18.32	-	-	peak

802.11ax-HE20			
Test Channel	5180MHz(worst case)	Polarity:	Horizontal

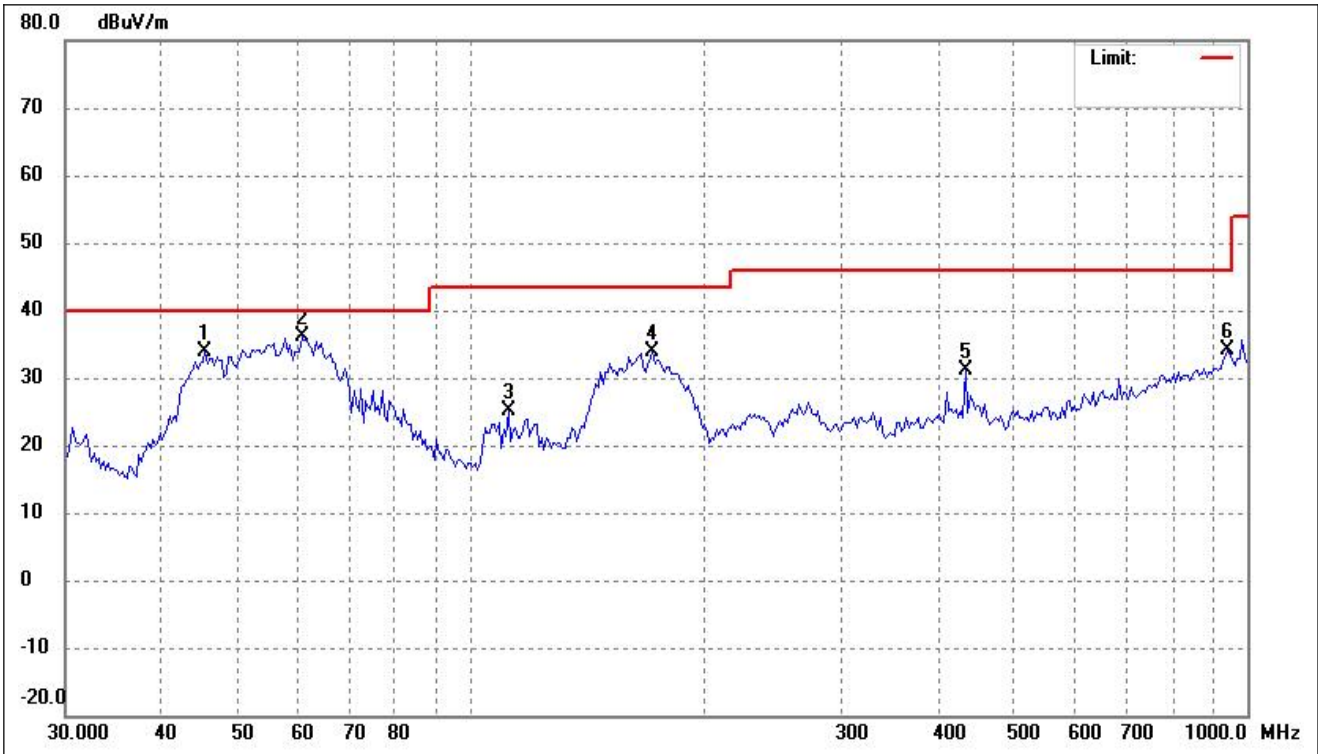


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	45.4131	41.74	-7.92	33.82	40.00	-6.18	-	-	peak
2	60.5769	44.59	-8.54	36.05	40.00	-3.95	-	-	peak
3	111.6399	36.00	-10.89	25.11	43.50	-18.39	-	-	peak
4	171.3890	42.29	-8.51	33.78	43.50	-9.72	-	-	peak
5	433.3397	36.56	-5.55	31.01	46.00	-14.99	-	-	peak
6	945.3336	30.87	3.19	34.06	46.00	-11.94	-	-	peak

802.11ax-HE20			
Test Channel	5180MHz(worst case)	Polarity:	Vertical

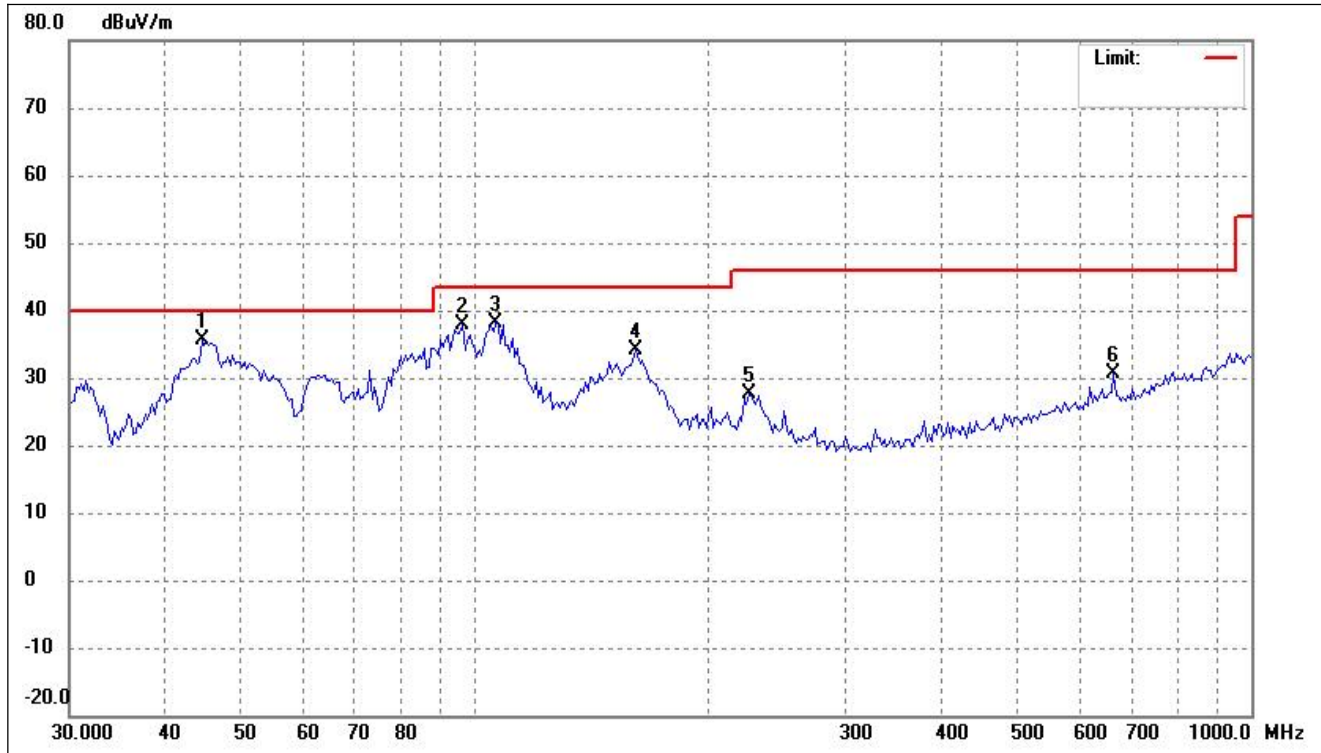


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	44.4657	43.71	-7.96	35.75	40.00	-4.25	-	-	peak
2	96.3230	50.03	-12.21	37.82	43.50	-5.68	-	-	peak
3	106.2812	49.52	-11.41	38.11	43.50	-5.39	-	-	peak
4	160.8852	42.33	-8.08	34.25	43.50	-9.25	-	-	peak
5	225.4267	38.80	-11.28	27.52	46.00	-18.48	-	-	peak
6	665.2610	32.06	-1.45	30.61	46.00	-15.39	-	-	peak

802.11n-HT40			
Test Channel	5190MHz(worst case)	Polarity:	Horizontal

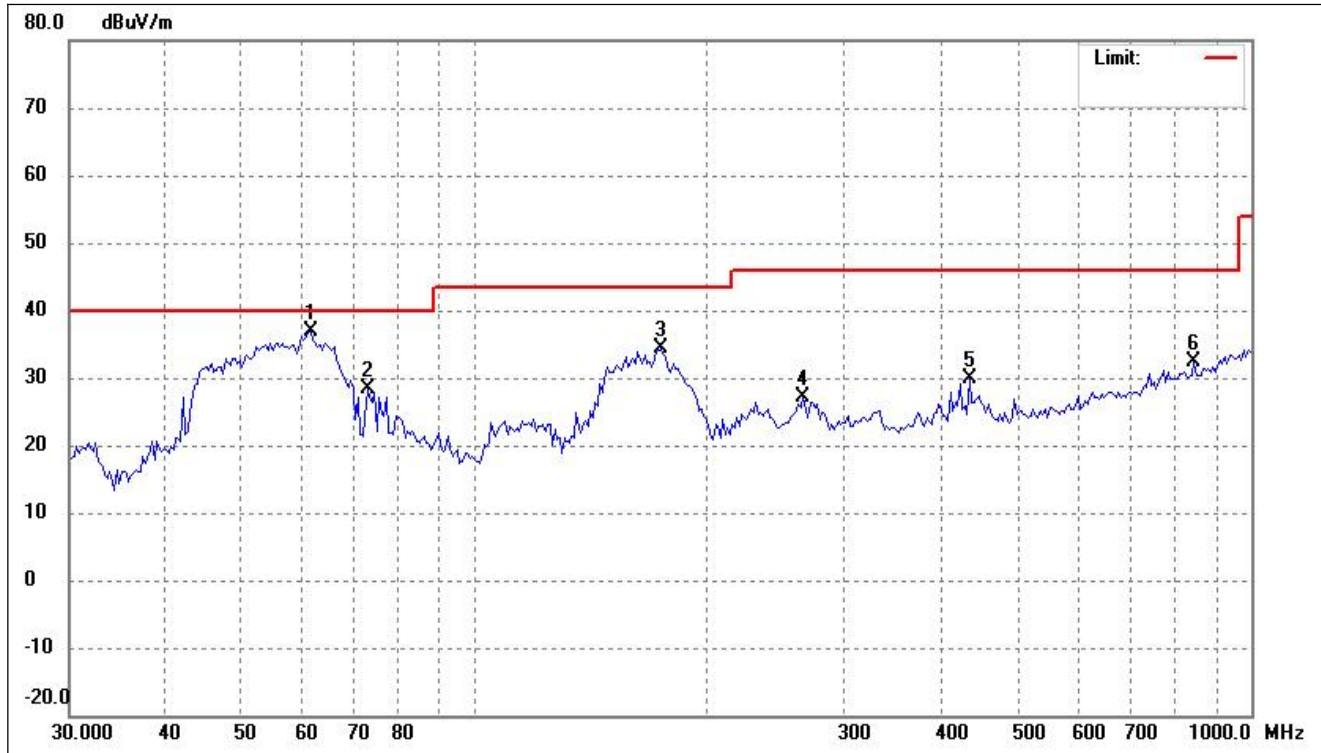


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	61.4343	45.60	-8.69	36.91	40.00	-3.09	-	-	peak
2	72.7203	39.24	-10.85	28.39	40.00	-11.61	-	-	peak
3	173.8147	43.17	-8.85	34.32	43.50	-9.18	-	-	peak
4	264.9709	36.20	-9.08	27.12	46.00	-18.88	-	-	peak
5	433.3397	35.46	-5.55	29.91	46.00	-16.09	-	-	peak
6	844.8028	30.85	1.48	32.33	46.00	-13.67	-	-	peak

802.11n-HT40			
Test Channel	5190MHz(worst case)	Polarity:	Vertical

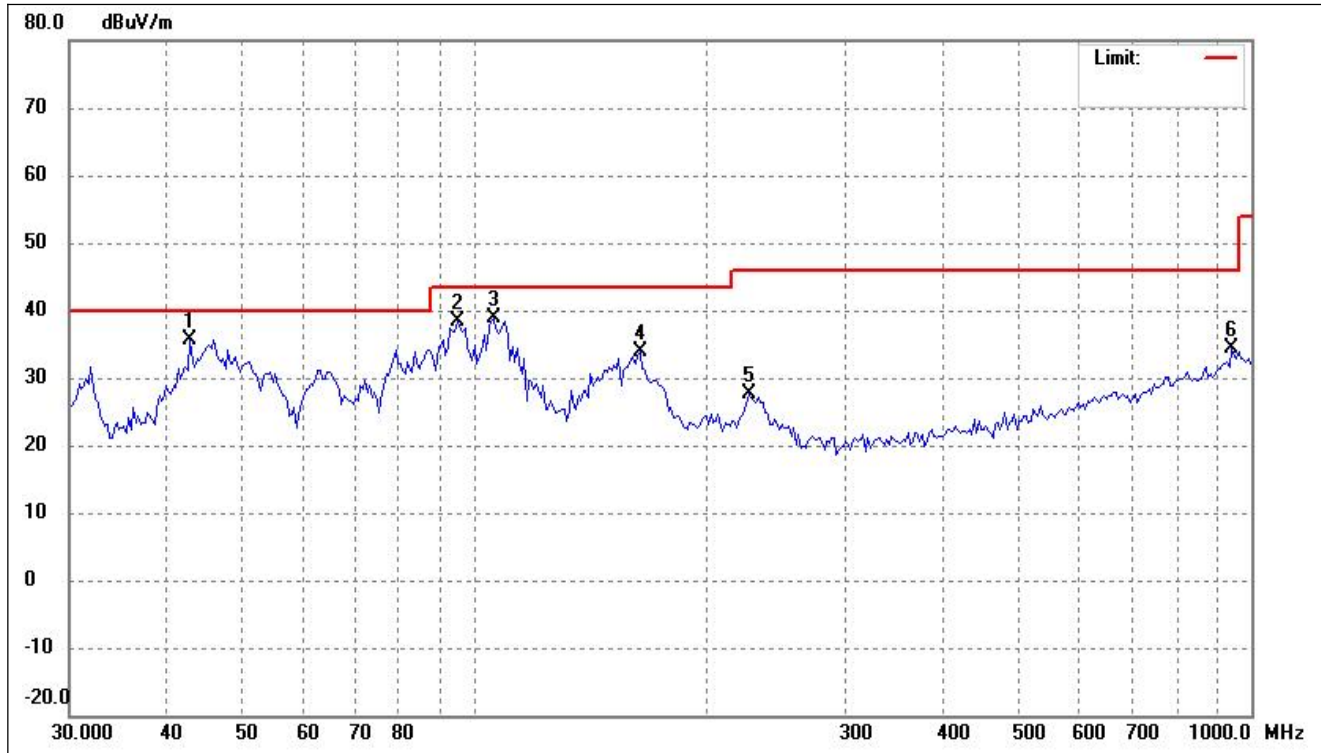


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	42.9305	43.51	-7.96	35.55	40.00	-4.45	-	-	peak
2	94.9788	50.65	-12.30	38.35	43.50	-5.15	-	-	peak
3	105.5369	50.47	-11.48	38.99	43.50	-4.51	-	-	peak
4	163.1623	42.00	-8.13	33.87	43.50	-9.63	-	-	peak
5	225.4267	38.85	-11.28	27.57	46.00	-18.43	-	-	peak
6	945.3336	31.08	3.19	34.27	46.00	-11.73	-	-	peak

802.11ac-VHT40			
Test Channel	5190MHz(worst case)	Polarity:	Horizontal

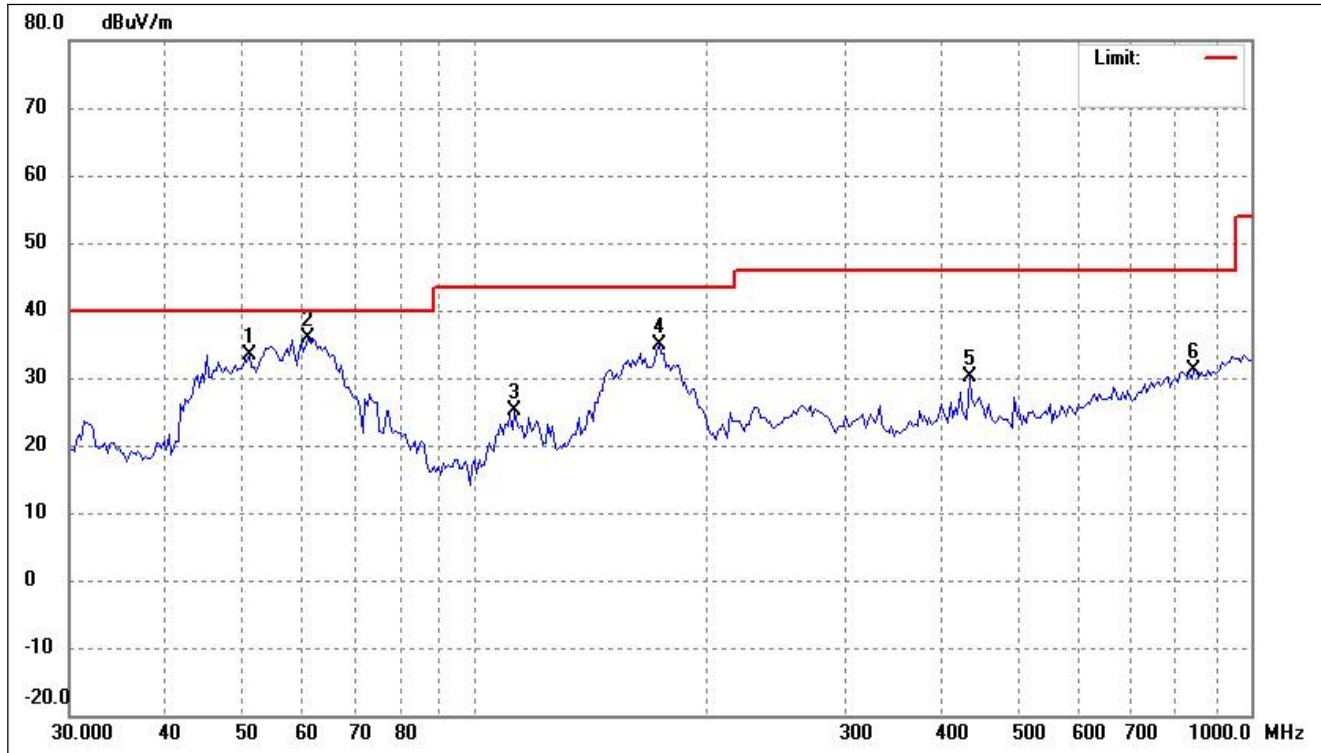


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	51.1756	41.02	-7.72	33.30	40.00	-6.70	-	-	peak
2	61.0041	44.59	-8.61	35.98	40.00	-4.02	-	-	peak
3	112.4271	35.86	-10.81	25.05	43.50	-18.45	-	-	peak
4	172.5976	43.47	-8.68	34.79	43.50	-8.71	-	-	peak
5	433.3397	35.60	-5.55	30.05	46.00	-15.95	-	-	peak
6	844.8028	29.54	1.48	31.02	46.00	-14.98	-	-	peak

802.11ac-VHT40			
Test Channel	5190MHz(worst case)	Polarity:	Vertical

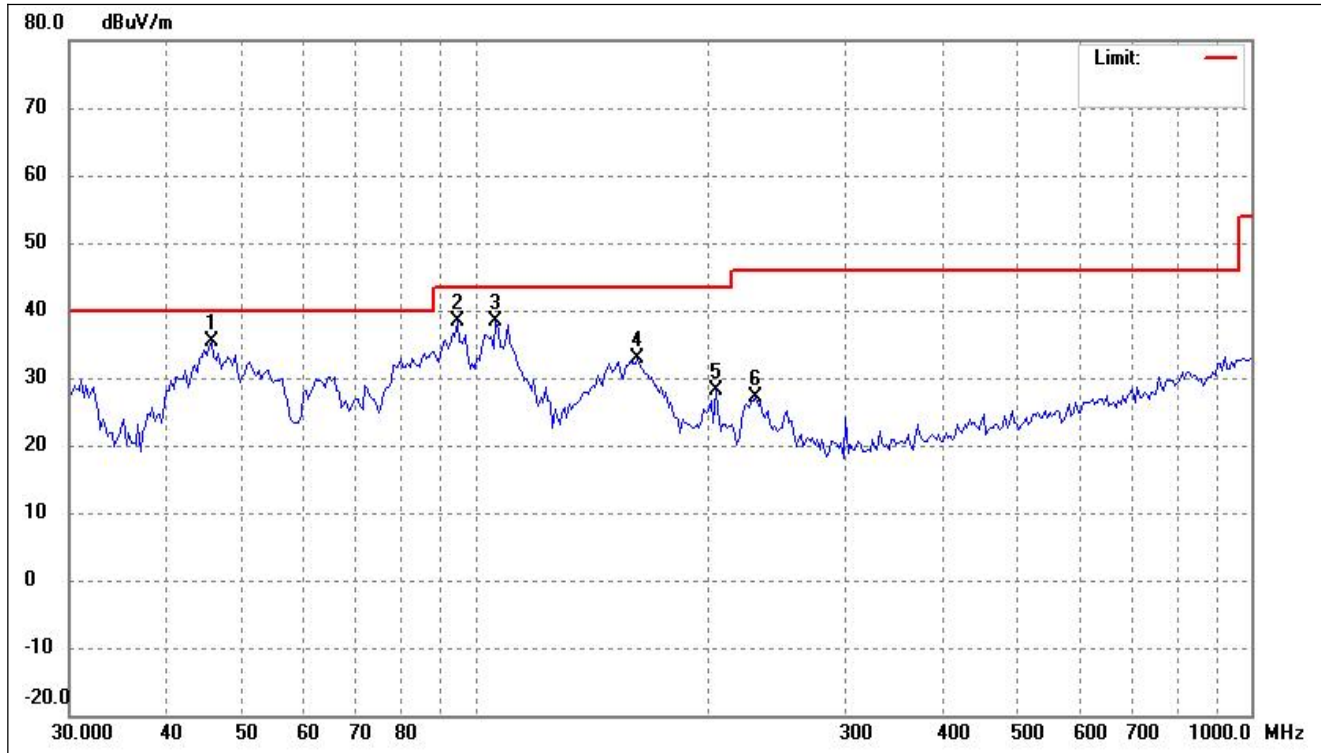


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	45.7333	43.37	-7.90	35.47	40.00	-4.53	-	-	peak
2	94.9788	50.64	-12.30	38.34	43.50	-5.16	-	-	peak
3	106.2812	49.69	-11.41	38.28	43.50	-5.22	-	-	peak
4	162.0197	41.03	-8.10	32.93	43.50	-10.57	-	-	peak
5	204.3052	39.68	-11.47	28.21	43.50	-15.29	-	-	peak
6	230.2295	38.10	-11.07	27.03	46.00	-18.97	-	-	peak

802.11ax-HE40			
Test Channel	5190MHz(worst case)	Polarity:	Horizontal

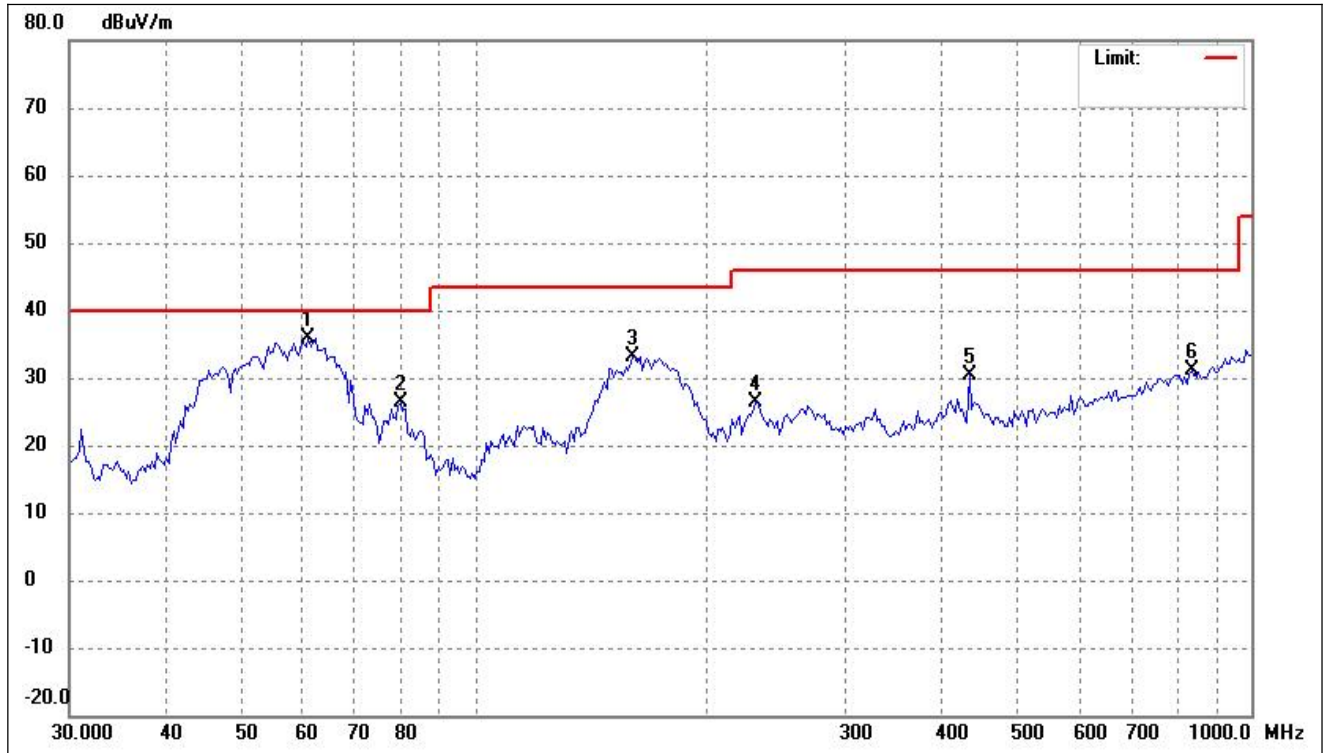

No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	61.0041	44.52	-8.61	35.91	40.00	-4.09	-	-	peak
2	80.2383	38.84	-12.44	26.40	40.00	-13.60	-	-	peak
3	159.7586	41.17	-8.05	33.12	43.50	-10.38	-	-	peak
4	230.2295	37.52	-11.07	26.45	46.00	-19.55	-	-	peak
5	433.3397	35.87	-5.55	30.32	46.00	-15.68	-	-	peak
6	838.8870	29.60	1.42	31.02	46.00	-14.98	-	-	peak

802.11ax-HE40			
Test Channel	5190MHz(worst case)	Polarity:	Vertical

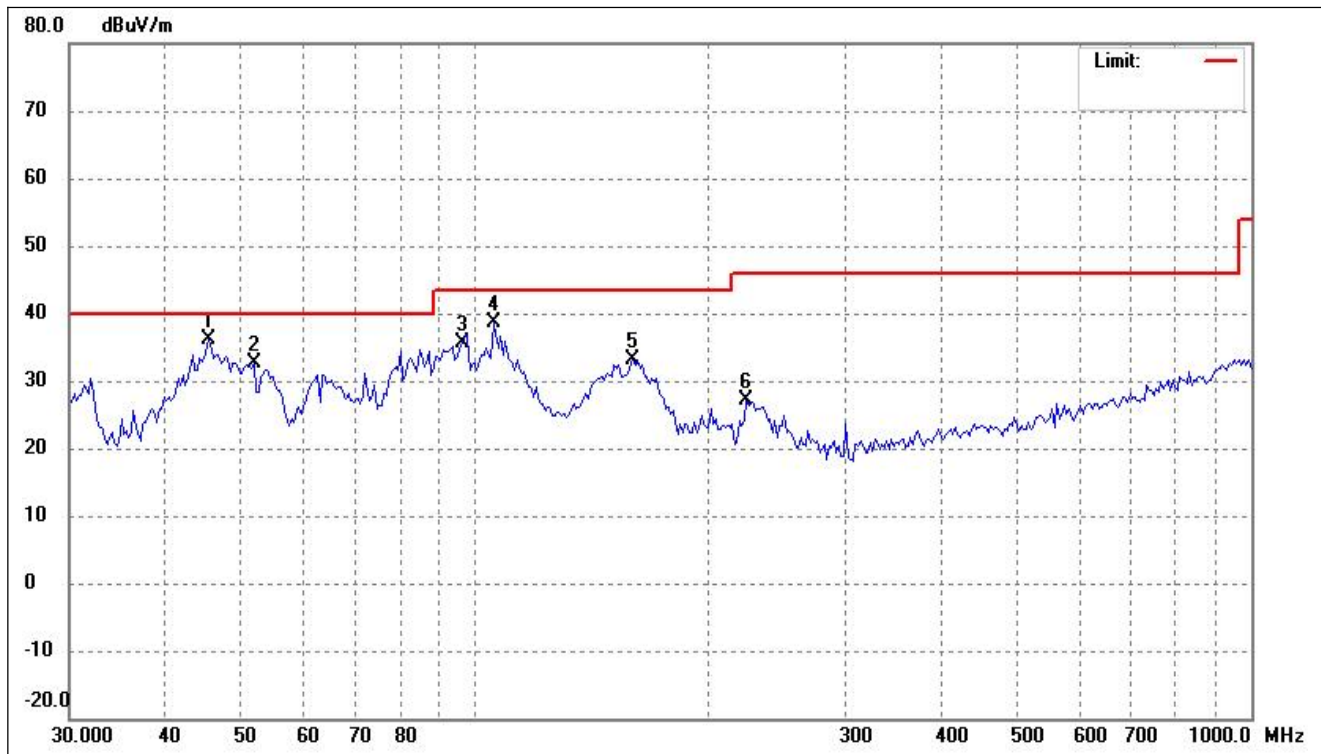

No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	45.4131	44.13	-7.92	36.21	40.00	-3.79	-	-	peak
2	51.8999	40.53	-7.79	32.74	40.00	-7.26	-	-	peak
3	96.3230	47.94	-12.21	35.73	43.50	-7.77	-	-	peak
4	105.5369	50.07	-11.48	38.59	43.50	-4.91	-	-	peak
5	159.7586	41.29	-8.05	33.24	43.50	-10.26	-	-	peak
6	223.8482	38.59	-11.34	27.25	46.00	-18.75	-	-	peak

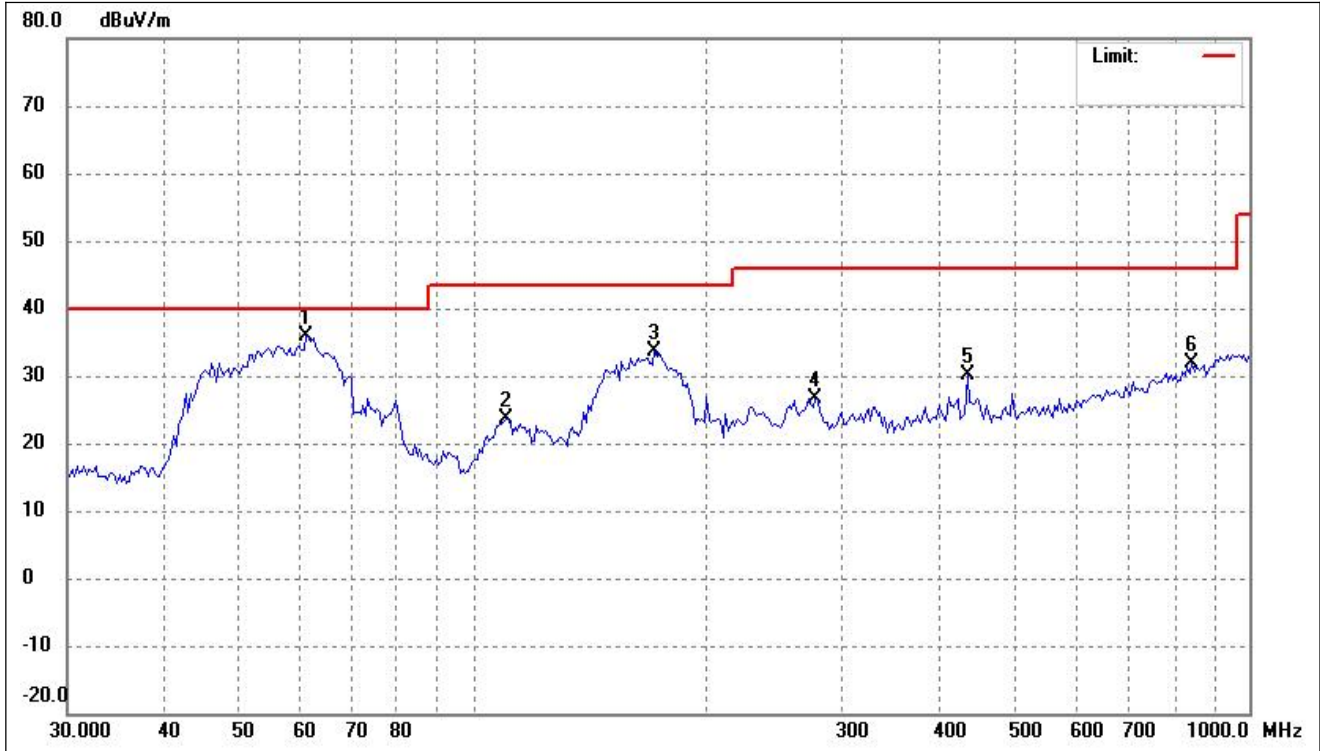
802.11ac-VHT80

Test Channel

5210MHz(worst case)


Polarity:

Horizontal




No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	61.0041	44.56	-8.61	35.95	40.00	-4.05	-	-	peak
2	110.0818	34.80	-11.06	23.74	43.50	-19.76	-	-	peak
3	171.3890	42.21	-8.51	33.70	43.50	-9.80	-	-	peak
4	276.3818	35.34	-8.62	26.72	46.00	-19.28	-	-	peak
5	433.3397	35.75	-5.55	30.20	46.00	-15.80	-	-	peak
6	844.8028	30.36	1.48	31.84	46.00	-14.16	-	-	peak

802.11ac-VHT80			
Test Channel	5210MHz(worst case)	Polarity:	Vertical

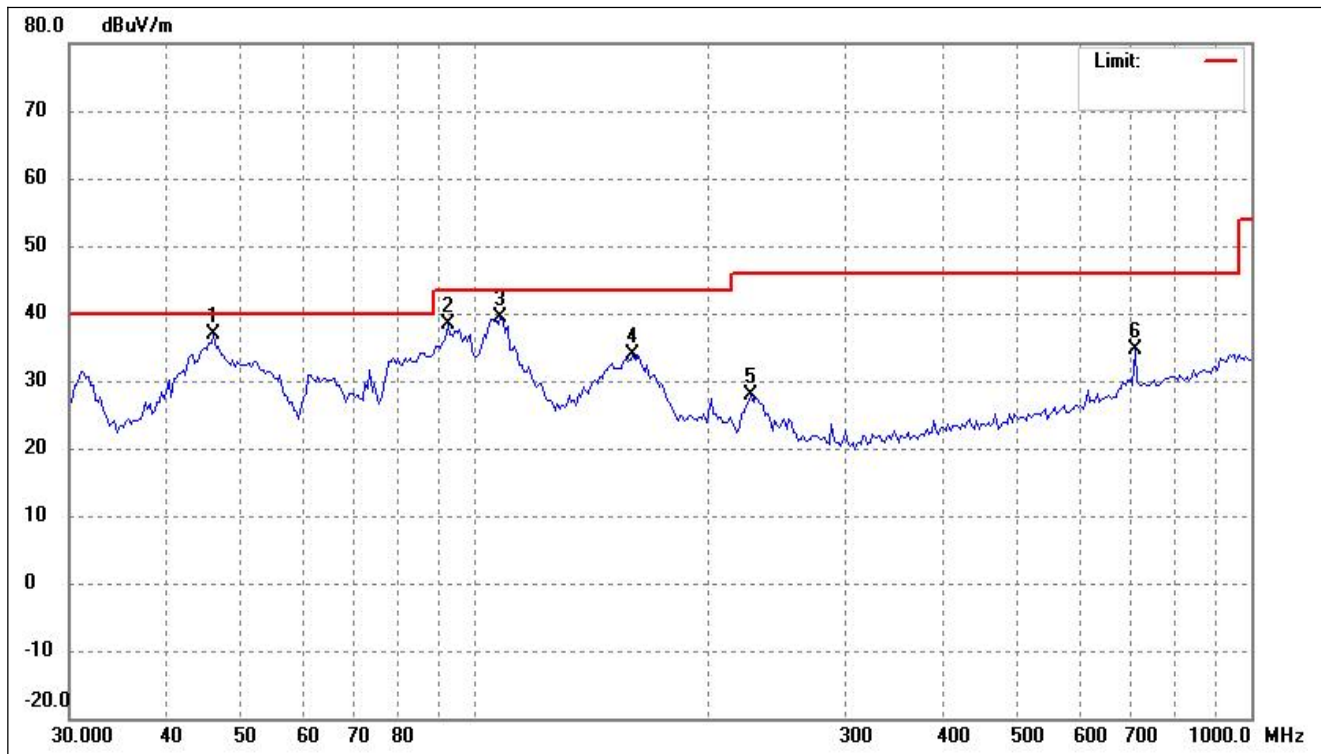

No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	46.0558	44.69	-7.87	36.82	40.00	-3.18	-	-	peak
2	92.3462	50.79	-12.45	38.34	43.50	-5.16	-	-	peak
3	107.7854	50.62	-11.27	39.35	43.50	-4.15	-	-	peak
4	159.7586	41.91	-8.05	33.86	43.50	-9.64	-	-	peak
5	227.0164	39.14	-11.22	27.92	46.00	-18.08	-	-	peak
6	708.6941	35.56	-0.88	34.68	46.00	-11.32	-	-	peak

802.11av-HE80			
Test Channel	5210MHz(worst case)	Polarity:	Horizontal

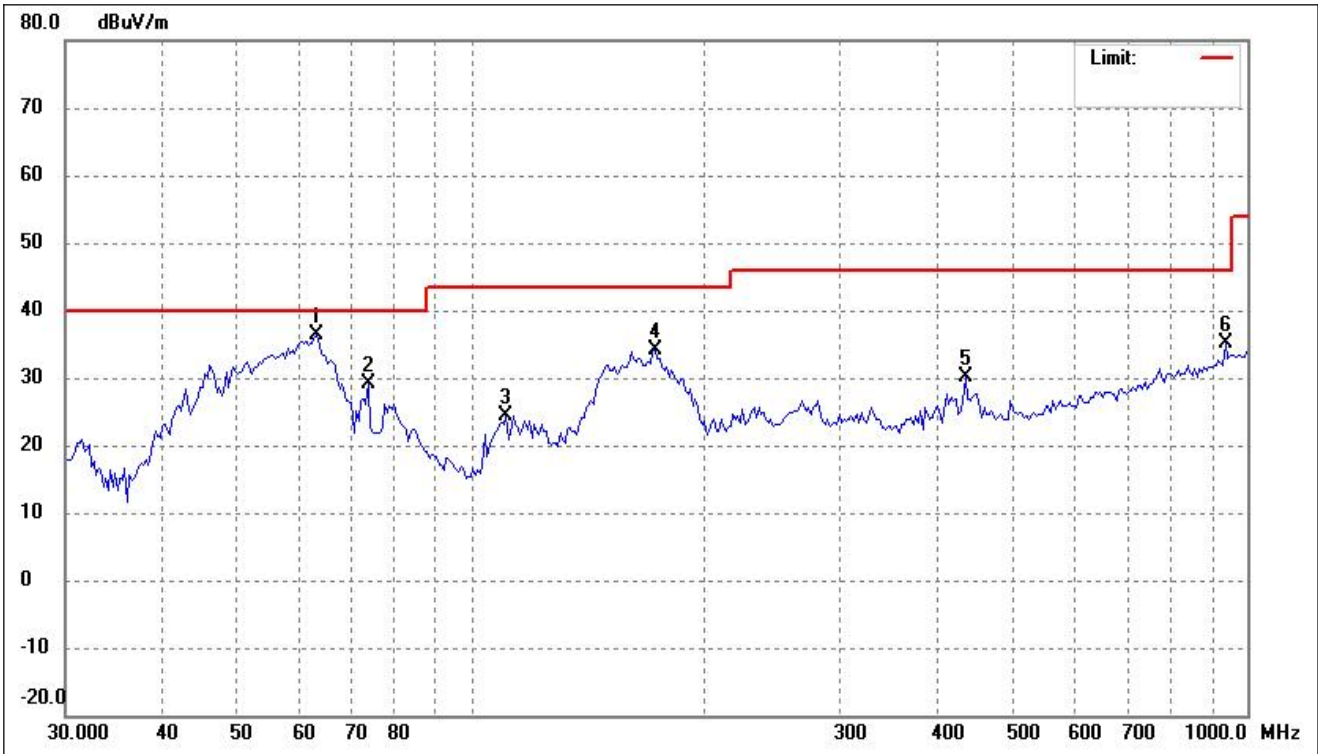

No.	Frequency (MHz)	Reading (dBuV/m)	Corr. (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	63.1857	45.27	-9.01	36.26	40.00	-3.74	-	-	peak
2	73.7496	40.33	-11.08	29.25	40.00	-10.75	-	-	peak
3	110.8581	35.36	-10.98	24.38	43.50	-19.12	-	-	peak
4	172.5976	42.92	-8.68	34.24	43.50	-9.26	-	-	peak
5	433.3397	35.77	-5.55	30.22	46.00	-15.78	-	-	peak
6	938.7139	32.13	3.03	35.16	46.00	-10.84	-	-	peak


802.11av-HE80			
Test Channel	5210MHz(worst case)	Polarity:	Vertical



No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	45.4131	42.62	-7.92	34.70	40.00	-5.30	-	-	peak
2	91.0574	49.06	-12.54	36.52	43.50	-6.98	-	-	peak
3	104.0640	49.67	-11.62	38.05	43.50	-5.45	-	-	peak
4	157.5290	40.92	-8.05	32.87	43.50	-10.63	-	-	peak
5	228.6173	38.50	-11.15	27.35	46.00	-18.65	-	-	peak
6	615.7743	28.60	-1.96	26.64	46.00	-19.36	-	-	peak


➤ 5725-5850MHz

802.11a			
Test Channel	5745MHz(worst case)	Polarity:	Horizontal

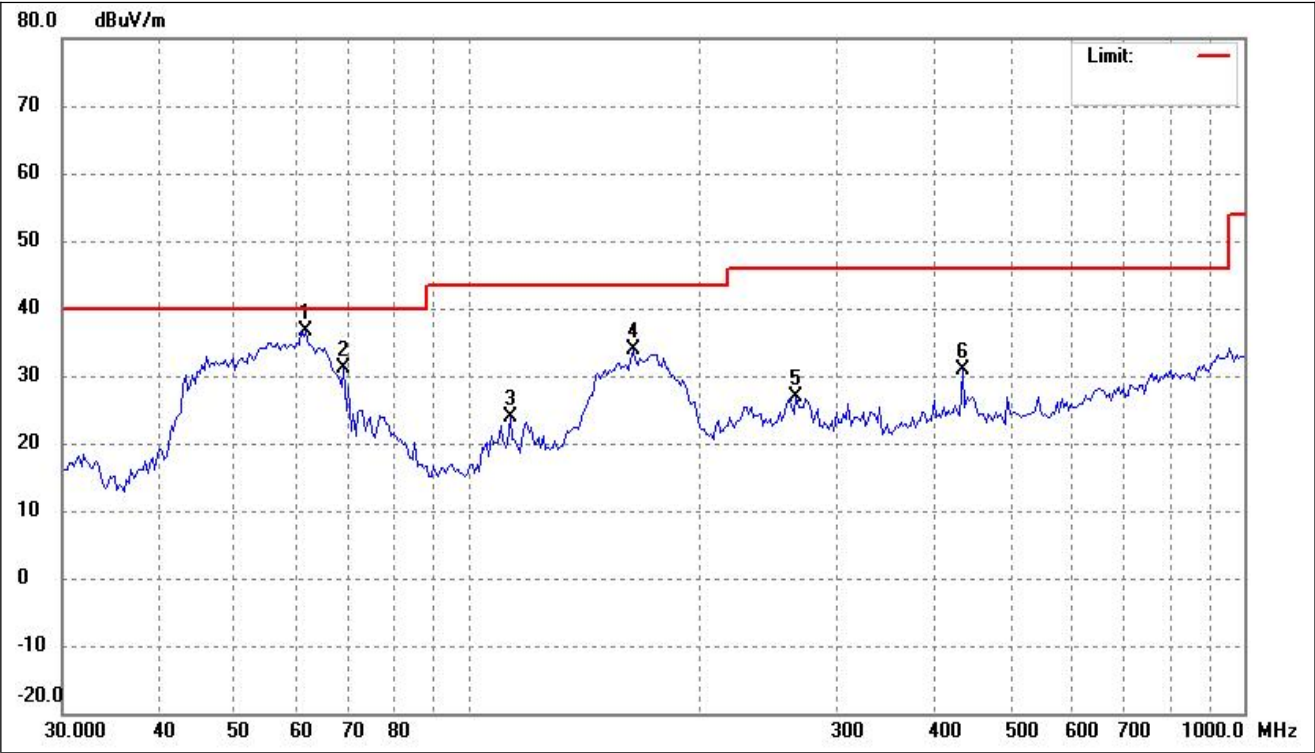


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	61.8676	45.50	-8.77	36.73	40.00	-3.27	-	-	peak
2	69.2297	41.29	-10.11	31.18	40.00	-8.82	-	-	peak
3	113.2200	34.51	-10.72	23.79	43.50	-19.71	-	-	peak
4	163.1623	42.13	-8.13	34.00	43.50	-9.50	-	-	peak
5	264.9709	35.89	-9.08	26.81	46.00	-19.19	-	-	peak
6	433.3397	36.32	-5.55	30.77	46.00	-15.23	-	-	peak

802.11a			
Test Channel	5745MHz(worst case)	Polarity:	Vertical

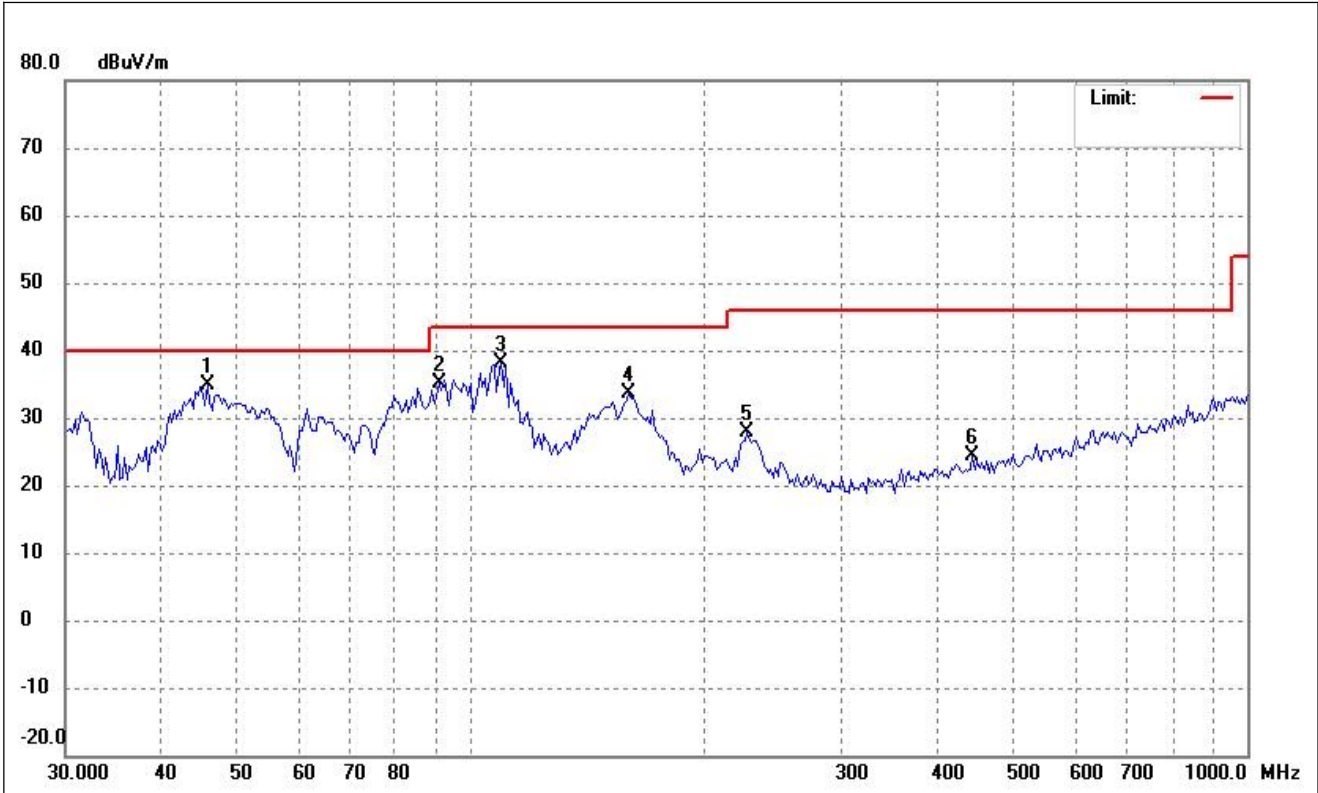

No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	45.7333	42.82	-7.90	34.92	40.00	-5.08	-	-	peak
2	91.0574	47.57	-12.54	35.03	43.50	-8.47	-	-	peak
3	109.3110	49.19	-11.13	38.06	43.50	-5.44	-	-	peak
4	159.7586	41.56	-8.05	33.51	43.50	-9.99	-	-	peak
5	227.0164	39.00	-11.22	27.78	46.00	-18.22	-	-	peak
6	442.5722	29.79	-5.35	24.44	46.00	-21.56	-	-	peak

802.11n-HT20			
Test Channel	5745MHz(worst case)	Polarity:	Horizontal

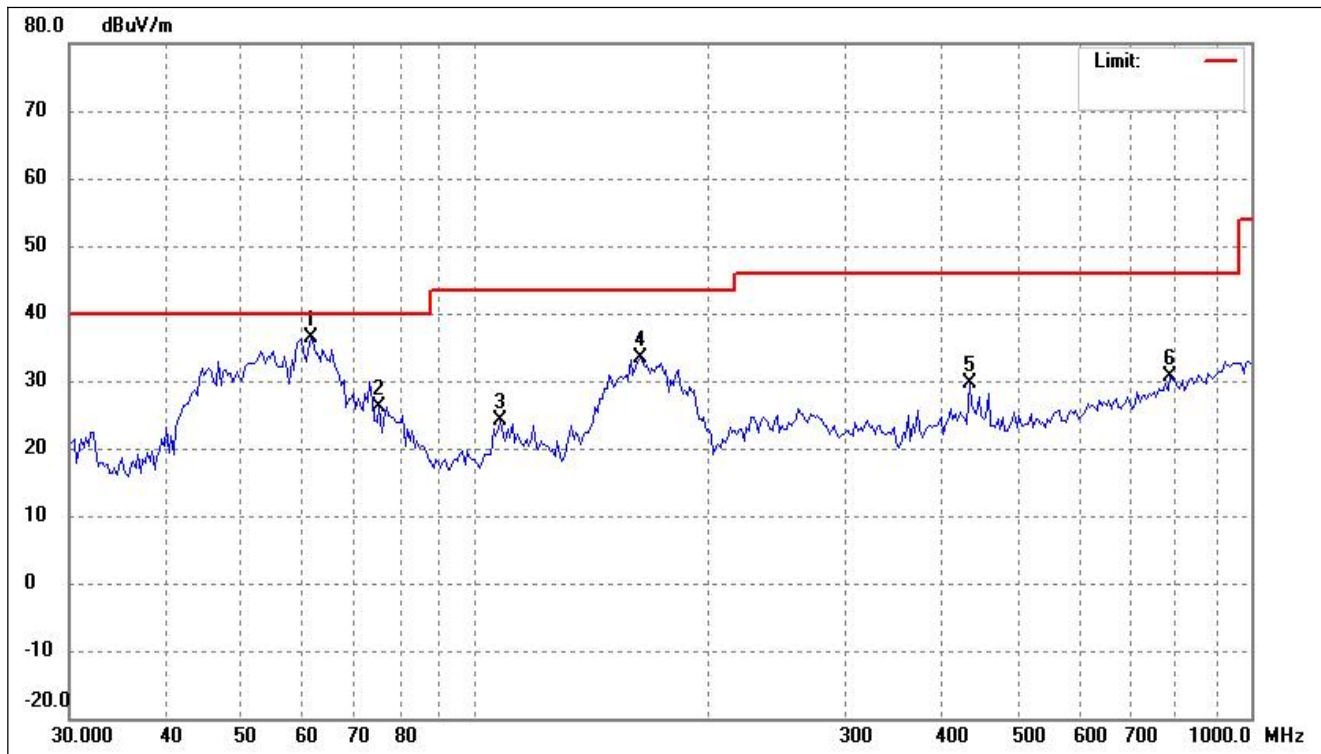


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	61.4343	45.06	-8.69	36.37	40.00	-3.63	-	-	peak
2	75.3208	37.53	-11.42	26.11	40.00	-13.89	-	-	peak
3	107.7854	35.28	-11.27	24.01	43.50	-19.49	-	-	peak
4	163.1623	41.45	-8.13	33.32	43.50	-10.18	-	-	peak
5	433.3397	35.24	-5.55	29.69	46.00	-16.31	-	-	peak
6	787.4749	29.74	0.80	30.54	46.00	-15.46	-	-	peak

802.11n-HT20			
Test Channel	5745MHz(worst case)	Polarity:	Vertical



No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	45.4131	43.19	-7.92	35.27	40.00	-4.73	-	-	peak
2	92.3462	49.17	-12.45	36.72	43.50	-6.78	-	-	peak
3	106.2812	50.33	-11.41	38.92	43.50	-4.58	-	-	peak
4	157.5290	41.09	-8.05	33.04	43.50	-10.46	-	-	peak
5	227.0164	38.73	-11.22	27.51	46.00	-18.49	-	-	peak
6	728.8971	28.69	-0.36	28.33	46.00	-17.67	-	-	peak

802.11ac-VHT20			
Test Channel	5745MHz(worst case)	Polarity:	Horizontal

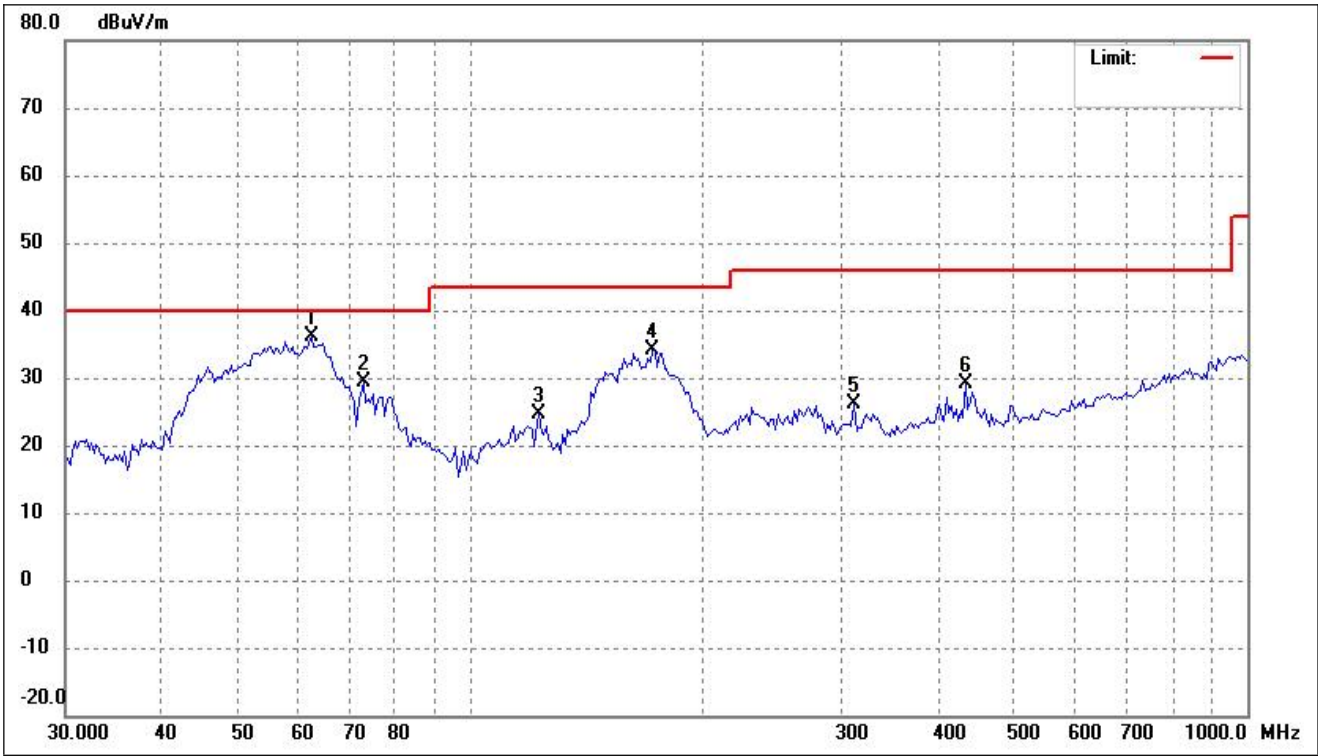

No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	62.3038	45.06	-8.84	36.22	40.00	-3.78	-	-	peak
2	72.7203	40.21	-10.85	29.36	40.00	-10.64	-	-	peak
3	122.3189	34.55	-9.85	24.70	43.50	-18.80	-	-	peak
4	171.3890	42.56	-8.51	34.05	43.50	-9.45	-	-	peak
5	311.4519	33.75	-7.61	26.14	46.00	-19.86	-	-	peak
6	433.3397	34.72	-5.55	29.17	46.00	-16.83	-	-	peak

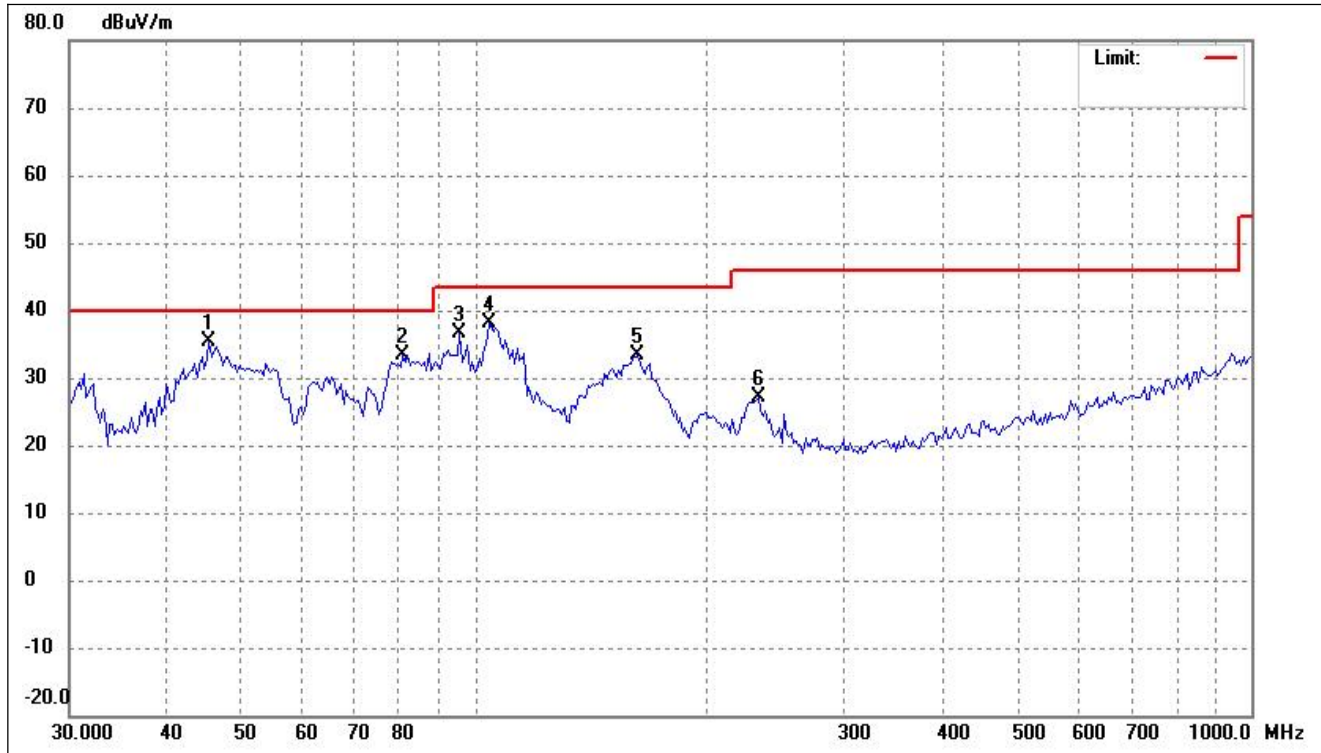
802.11ac-VHT20

Test Channel

5745MHz(worst case)


Polarity:

Vertical




No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	45.4131	43.25	-7.92	35.33	40.00	-4.67	-	-	peak
2	80.8042	45.86	-12.46	33.40	40.00	-6.60	-	-	peak
3	95.6485	48.94	-12.25	36.69	43.50	-6.81	-	-	peak
4	104.0640	49.85	-11.62	38.23	43.50	-5.27	-	-	peak
5	162.0197	41.40	-8.10	33.30	43.50	-10.20	-	-	peak
6	231.8531	38.15	-10.90	27.25	46.00	-18.75	-	-	peak

802.11ax-HE20			
Test Channel	5745MHz(worst case)	Polarity:	Horizontal

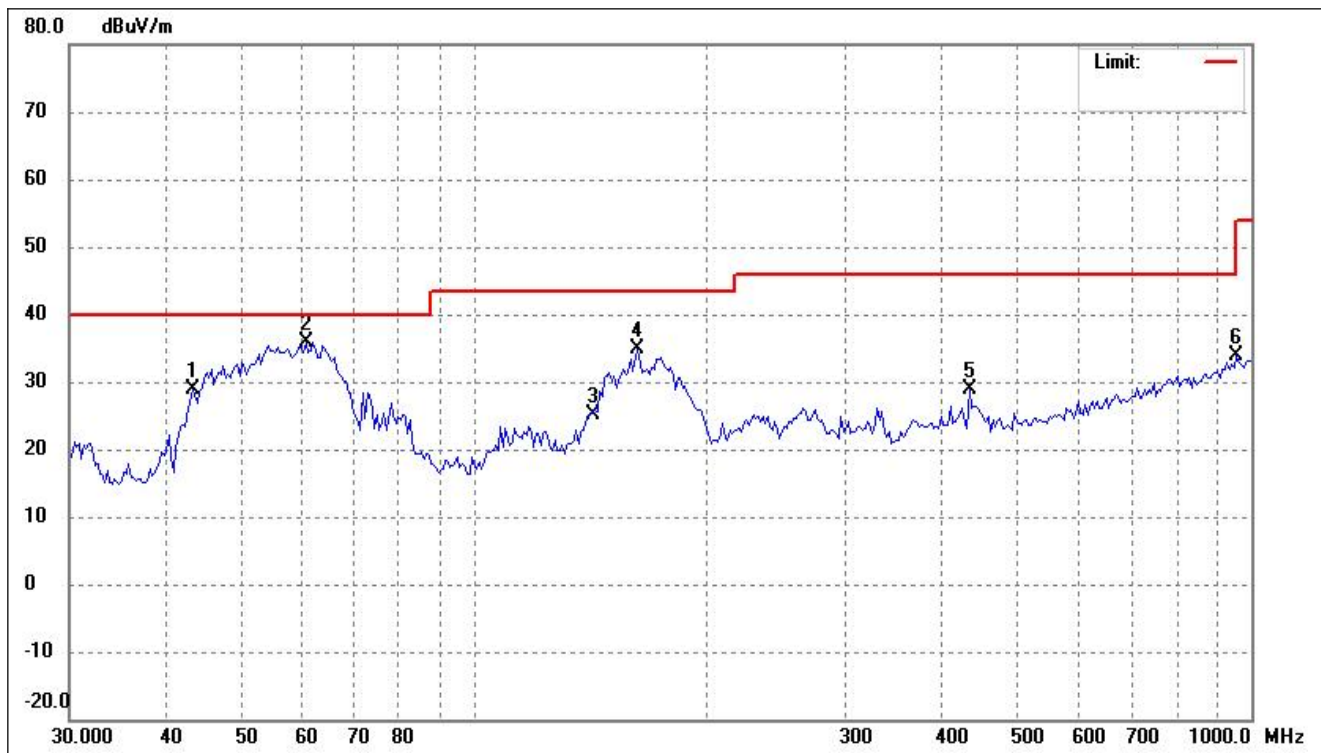


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	43.2333	36.84	-7.95	28.89	40.00	-11.11	-	-	peak
2	60.5769	44.52	-8.54	35.98	40.00	-4.02	-	-	peak
3	140.7767	33.98	-8.83	25.15	43.50	-18.35	-	-	peak
4	162.0197	42.99	-8.10	34.89	43.50	-8.61	-	-	peak
5	433.3397	34.42	-5.55	28.87	46.00	-17.13	-	-	peak
6	958.7135	30.42	3.34	33.76	46.00	-12.24	-	-	peak

802.11ax-HE20			
Test Channel	5745MHz(worst case)	Polarity:	Vertical

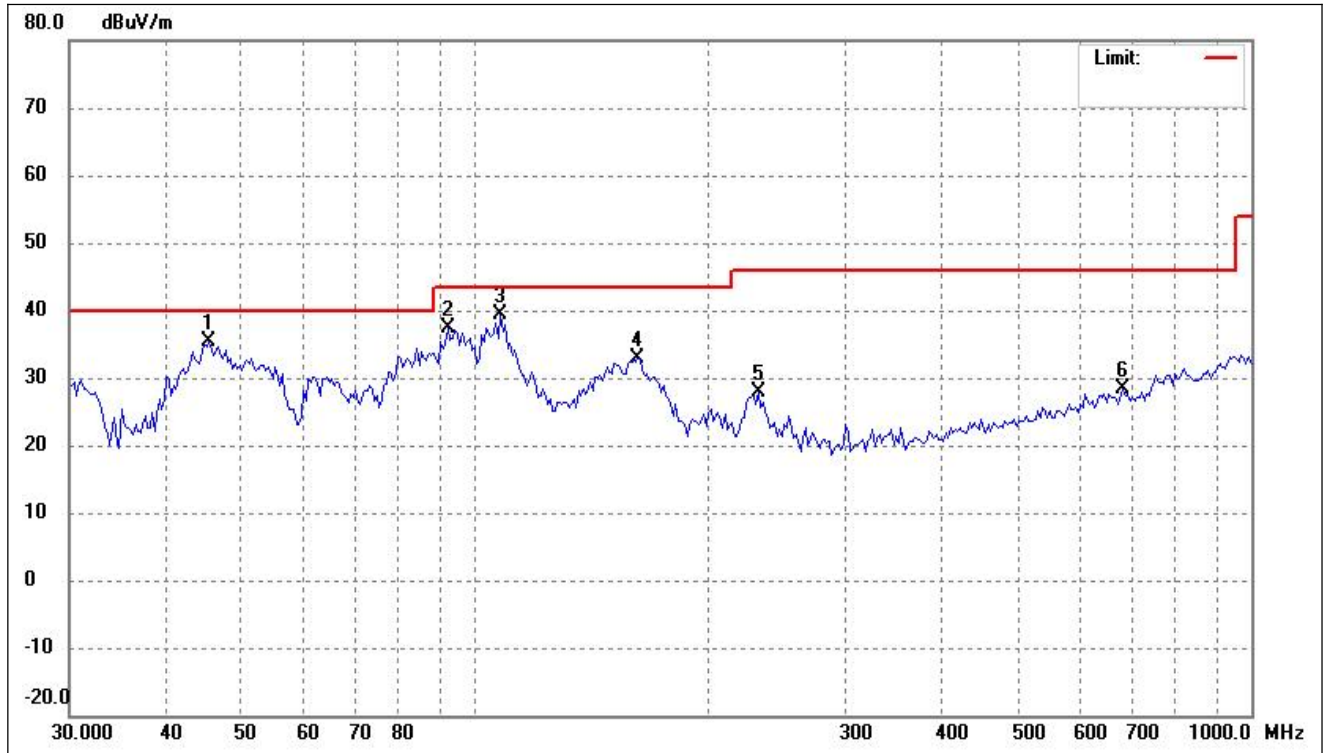

No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	45.4131	43.25	-7.92	35.33	40.00	-4.67	-	-	peak
2	92.3462	49.85	-12.45	37.40	43.50	-6.10	-	-	peak
3	107.7854	50.68	-11.27	39.41	43.50	-4.09	-	-	peak
4	162.0197	40.91	-8.10	32.81	43.50	-10.69	-	-	peak
5	231.8531	38.90	-10.90	28.00	46.00	-18.00	-	-	peak
6	684.2259	29.70	-1.27	28.43	46.00	-17.57	-	-	peak

802.11n-HT40			
Test Channel	5755MHz(worst case)	Polarity:	Horizontal

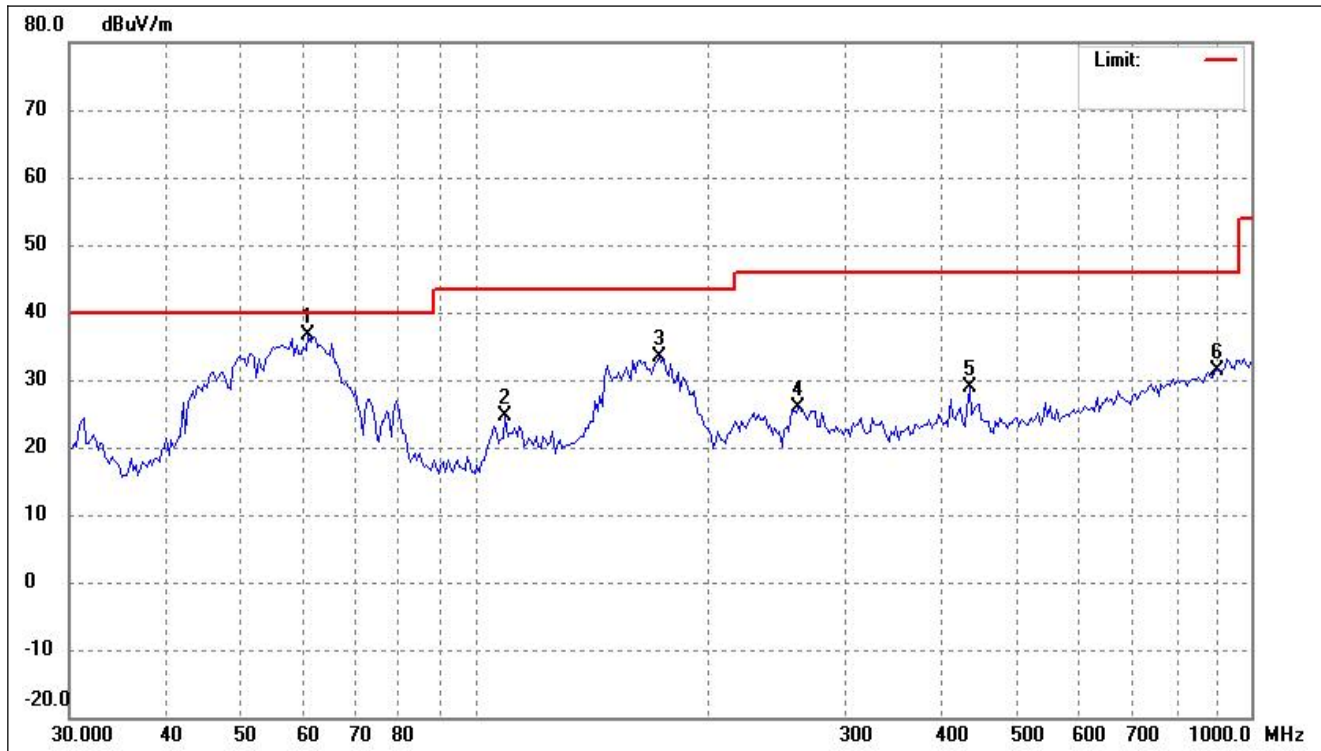


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	61.0041	45.21	-8.61	36.60	40.00	-3.40	-	-	peak
2	109.3110	35.83	-11.13	24.70	43.50	-18.80	-	-	peak
3	172.5976	41.95	-8.68	33.27	43.50	-10.23	-	-	peak
4	261.2730	35.04	-9.24	25.80	46.00	-20.20	-	-	peak
5	433.3397	34.38	-5.55	28.83	46.00	-17.17	-	-	peak
6	899.9577	29.28	2.09	31.37	46.00	-14.63	-	-	peak

802.11n-HT40			
Test Channel	5755MHz(worst case)	Polarity:	Vertical




No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	45.4131	42.76	-7.92	34.84	40.00	-5.16	-	-	peak
2	91.6995	49.64	-12.49	37.15	43.50	-6.35	-	-	peak
3	104.7979	49.34	-11.55	37.79	43.50	-5.71	-	-	peak
4	162.0197	41.37	-8.10	33.27	43.50	-10.23	-	-	peak
5	227.0164	39.20	-11.22	27.98	46.00	-18.02	-	-	peak
6	689.0510	29.53	-1.22	28.31	46.00	-17.69	-	-	peak

802.11ac-VHT40			
Test Channel	5755MHz(worst case)	Polarity:	Horizontal

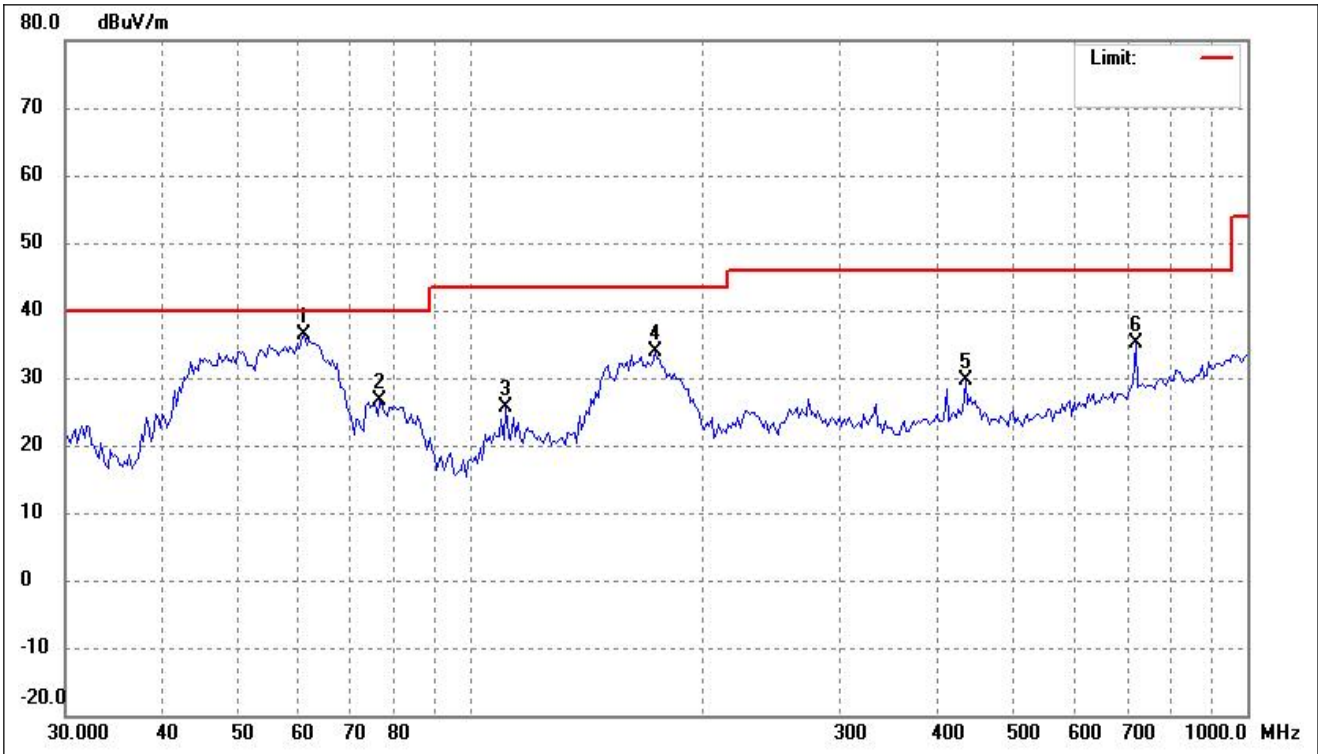


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	61.0041	45.03	-8.61	36.42	40.00	-3.58	-	-	peak
2	76.3869	38.26	-11.64	26.62	40.00	-13.38	-	-	peak
3	110.8581	36.60	-10.98	25.62	43.50	-17.88	-	-	peak
4	172.5976	42.53	-8.68	33.85	43.50	-9.65	-	-	peak
5	433.3397	35.12	-5.55	29.57	46.00	-16.43	-	-	peak
6	718.7246	35.87	-0.62	35.25	46.00	-10.75	-	-	peak

802.11ac-VHT40			
Test Channel	5755MHz(worst case)	Polarity:	Vertical

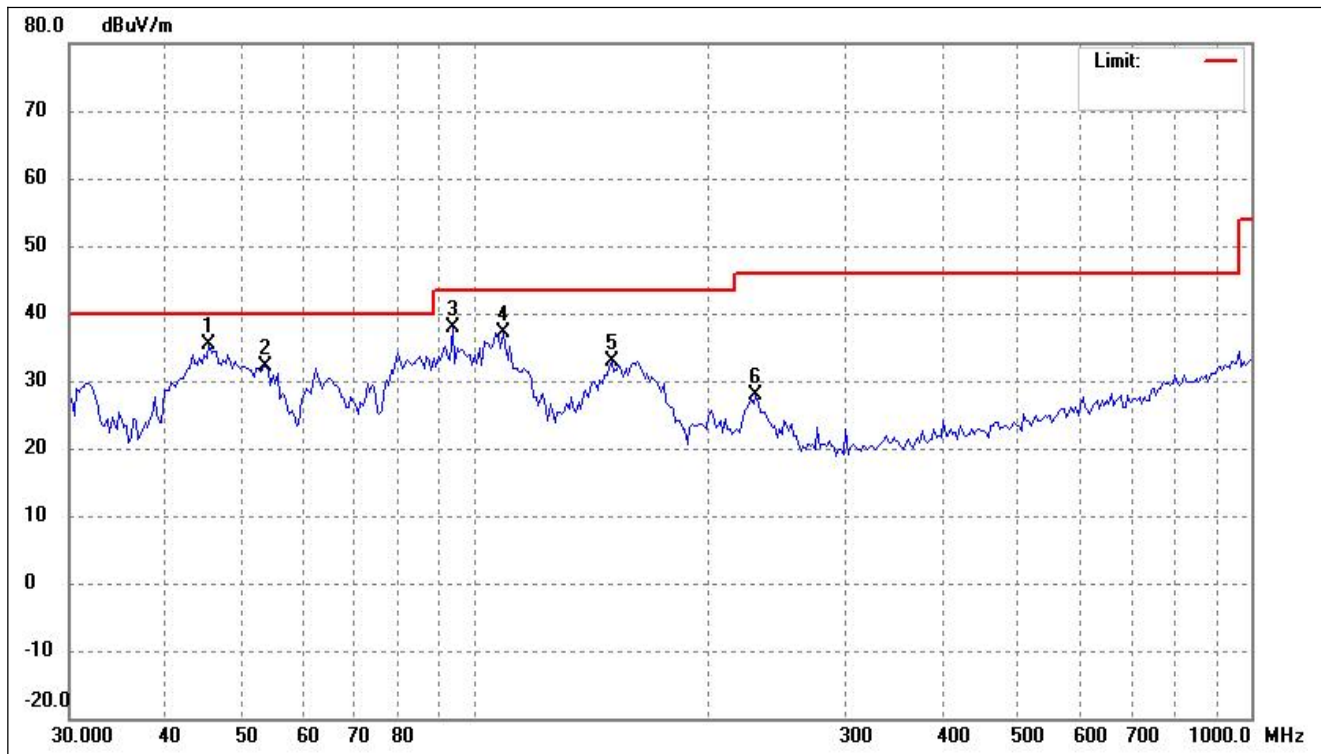

No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	45.4131	43.36	-7.92	35.44	40.00	-4.56	-	-	peak
2	53.7559	40.13	-7.99	32.14	40.00	-7.86	-	-	peak
3	93.6532	50.32	-12.38	37.94	43.50	-5.56	-	-	peak
4	108.5455	48.34	-11.21	37.13	43.50	-6.37	-	-	peak
5	149.9676	40.97	-8.04	32.93	43.50	-10.57	-	-	peak
6	230.2295	39.02	-11.07	27.95	46.00	-18.05	-	-	peak

802.11ax-HE40			
Test Channel	5755MHz(worst case)	Polarity:	Horizontal

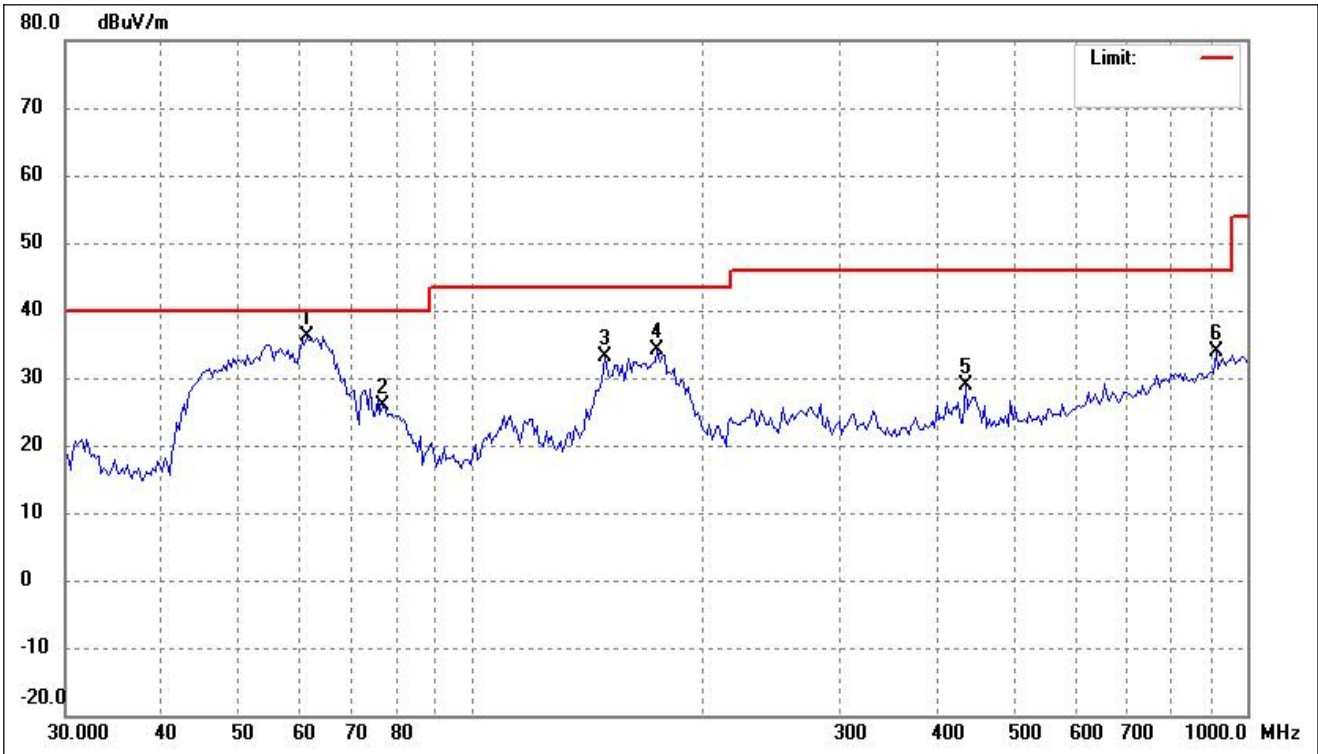

No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	61.4343	44.84	-8.69	36.15	40.00	-3.85	-	-	peak
2	76.9256	37.63	-11.76	25.87	40.00	-14.13	-	-	peak
3	148.9175	41.24	-8.14	33.10	43.50	-10.40	-	-	peak
4	173.8147	43.05	-8.85	34.20	43.50	-9.30	-	-	peak
5	433.3397	34.49	-5.55	28.94	46.00	-17.06	-	-	peak
6	912.6953	31.56	2.40	33.96	46.00	-12.04	-	-	peak

802.11ax-HE40

Test Channel

5755MHz(worst case)


Polarity:

Vertical



No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	45.0951	43.20	-7.95	35.25	40.00	-4.75	-	-	peak
2	92.3462	48.74	-12.45	36.29	43.50	-7.21	-	-	peak
3	104.7979	49.60	-11.55	38.05	43.50	-5.45	-	-	peak
4	160.8852	41.56	-8.08	33.48	43.50	-10.02	-	-	peak
5	228.6173	38.47	-11.15	27.32	46.00	-18.68	-	-	peak
6	833.0127	29.33	1.36	30.69	46.00	-15.31	-	-	peak

802.11ac-VHT80			
Test Channel	5775MHz(worst case)	Polarity:	Horizontal

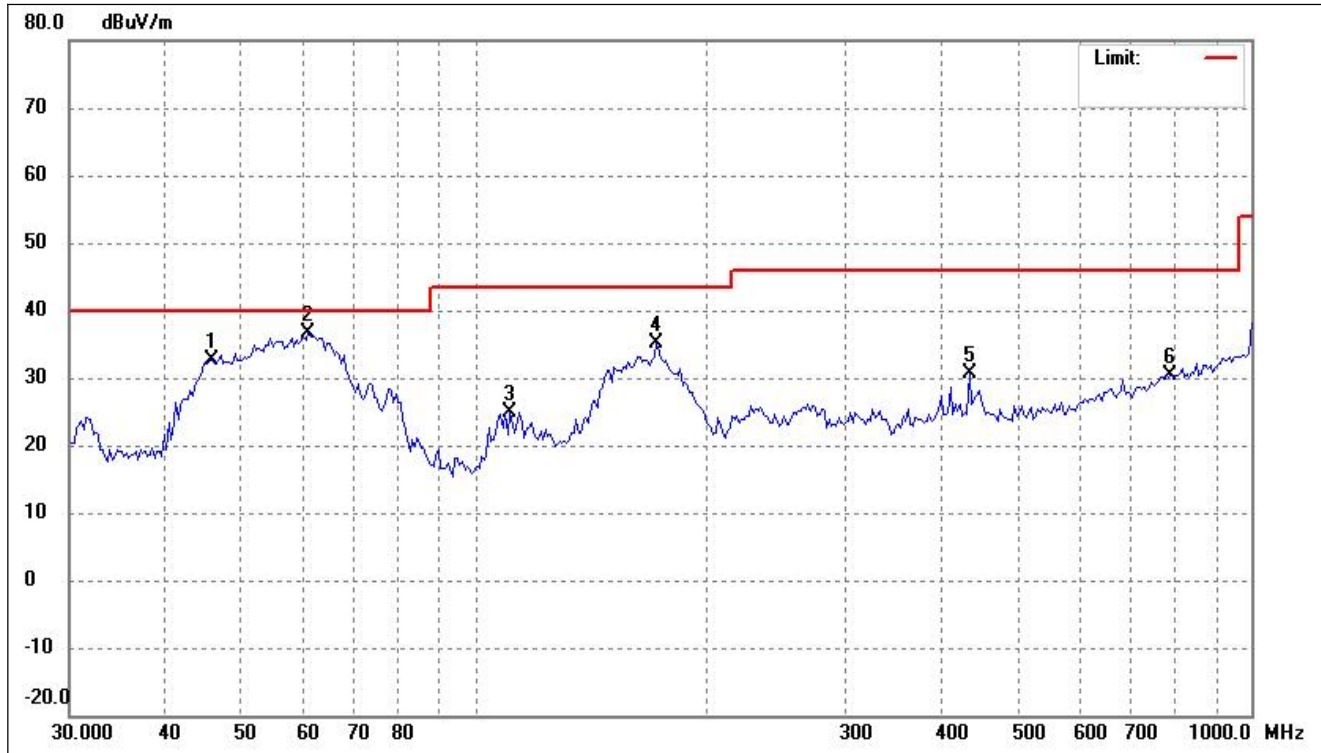

No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	45.7333	40.54	-7.90	32.64	40.00	-7.36	-	-	peak
2	61.0041	45.23	-8.61	36.62	40.00	-3.38	-	-	peak
3	110.8581	35.84	-10.98	24.86	43.50	-18.64	-	-	peak
4	171.3890	43.54	-8.51	35.03	43.50	-8.47	-	-	peak
5	433.3397	36.12	-5.55	30.57	46.00	-15.43	-	-	peak
6	787.4749	29.62	0.80	30.42	46.00	-15.58	-	-	peak

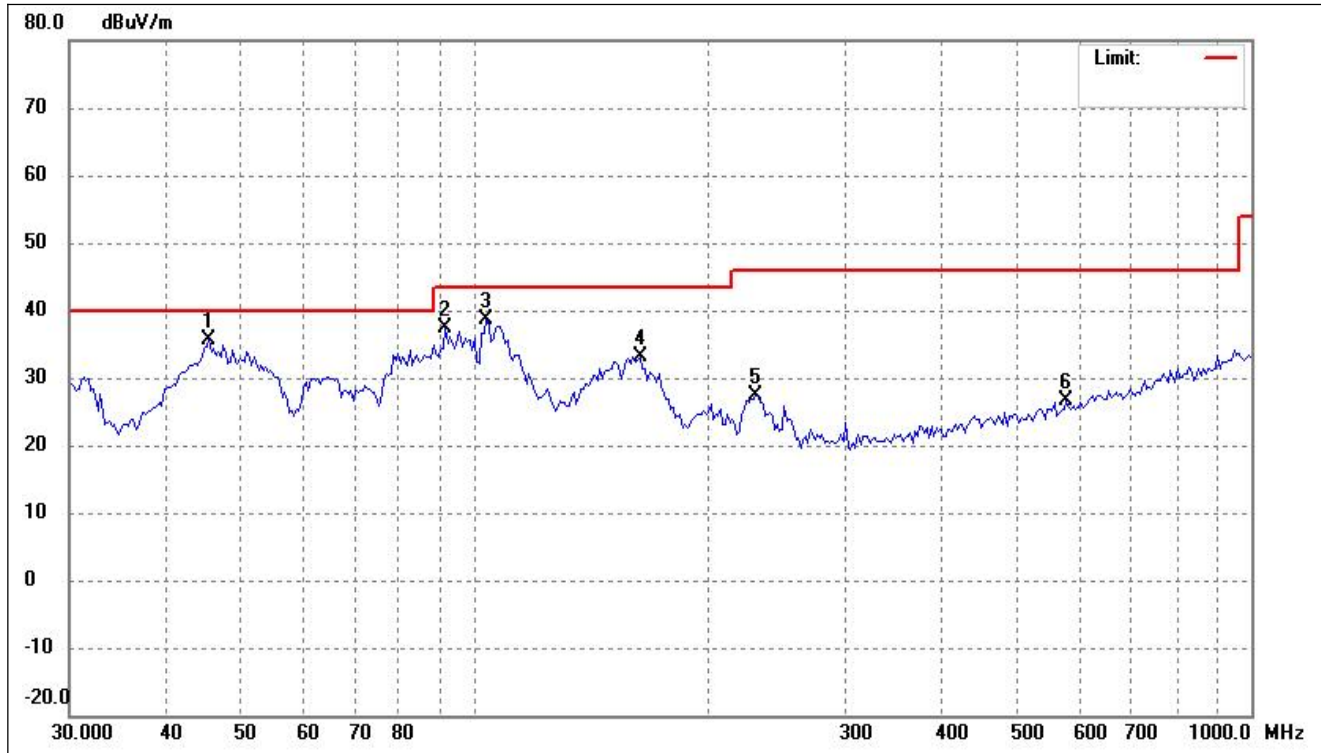
802.11ac-VHT80

Test Channel

5775MHz(worst case)


Polarity:

Vertical



No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	45.4131	43.48	-7.92	35.56	40.00	-4.44	-	-	peak
2	91.6995	49.83	-12.49	37.34	43.50	-6.16	-	-	peak
3	103.3353	50.40	-11.68	38.72	43.50	-4.78	-	-	peak
4	163.1623	41.34	-8.13	33.21	43.50	-10.29	-	-	peak
5	230.2295	38.42	-11.07	27.35	46.00	-18.65	-	-	peak
6	578.0359	29.37	-2.78	26.59	46.00	-19.41	-	-	peak

802.11ax-HE80			
Test Channel	5775MHz(worst case)	Polarity:	Horizontal

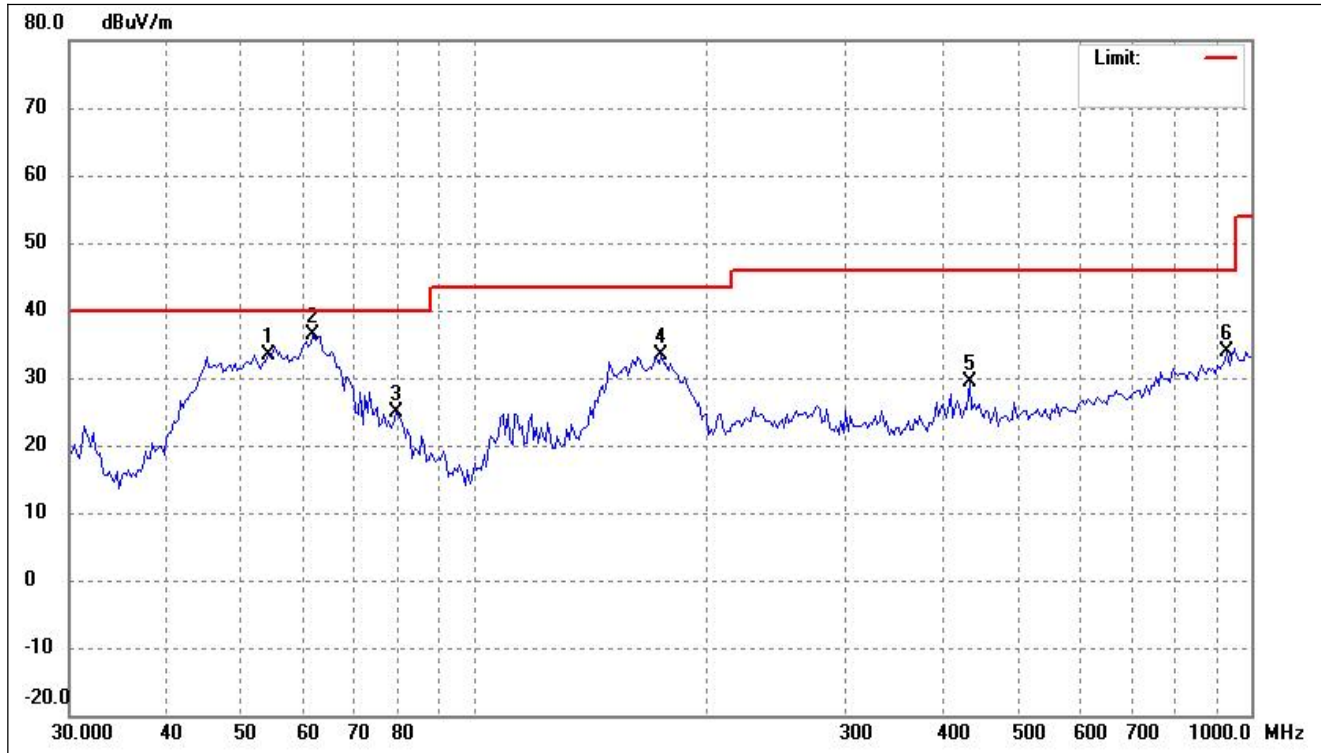

No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	54.1349	41.41	-8.03	33.38	40.00	-6.62	-	-	peak
2	61.8676	45.21	-8.77	36.44	40.00	-3.56	-	-	peak
3	79.1185	37.13	-12.25	24.88	40.00	-15.12	-	-	peak
4	173.8147	42.13	-8.85	33.28	43.50	-10.22	-	-	peak
5	433.3397	34.86	-5.55	29.31	46.00	-16.69	-	-	peak
6	932.1405	30.98	2.87	33.85	46.00	-12.15	-	-	peak

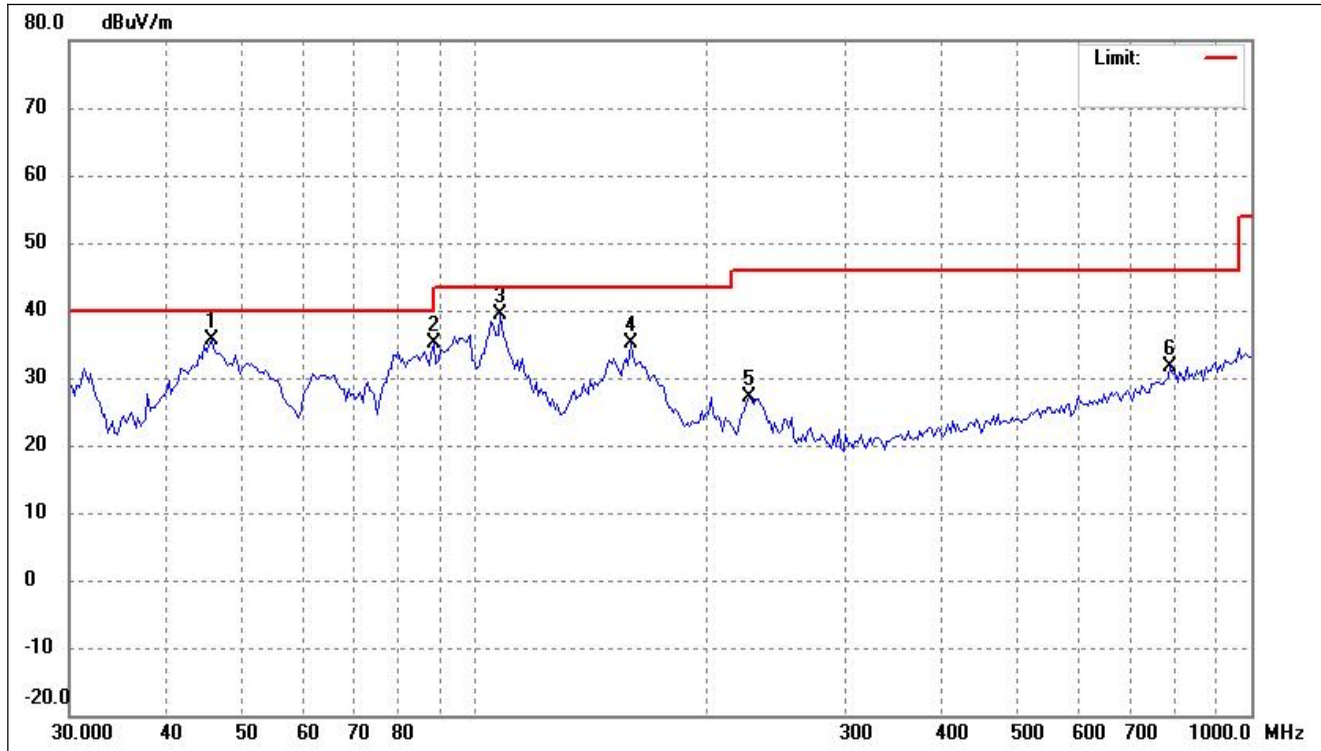
802.11ax-HE80

Test Channel

5775MHz(worst case)

Polarity:

Vertical



No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	45.7333	43.46	-7.90	35.56	40.00	-4.44	-	-	peak
2	88.5336	47.76	-12.58	35.18	43.50	-8.32	-	-	peak
3	107.7854	50.67	-11.27	39.40	43.50	-4.10	-	-	peak
4	158.6399	43.08	-8.05	35.03	43.50	-8.47	-	-	peak
5	225.4267	38.35	-11.28	27.07	46.00	-18.93	-	-	peak
6	787.4749	30.95	0.80	31.75	46.00	-14.25	-	-	peak

Remark: '-' Means' the test Degree and Height are not recorded by the test software and only show the worst case in the test report.


- Spurious Emission above 1GHz
- Antenna 0(worst case)

802.11a- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)




No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	5150.000	82.04	-12.53	69.51	74.00	-4.49	-	-	peak

802.11a- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

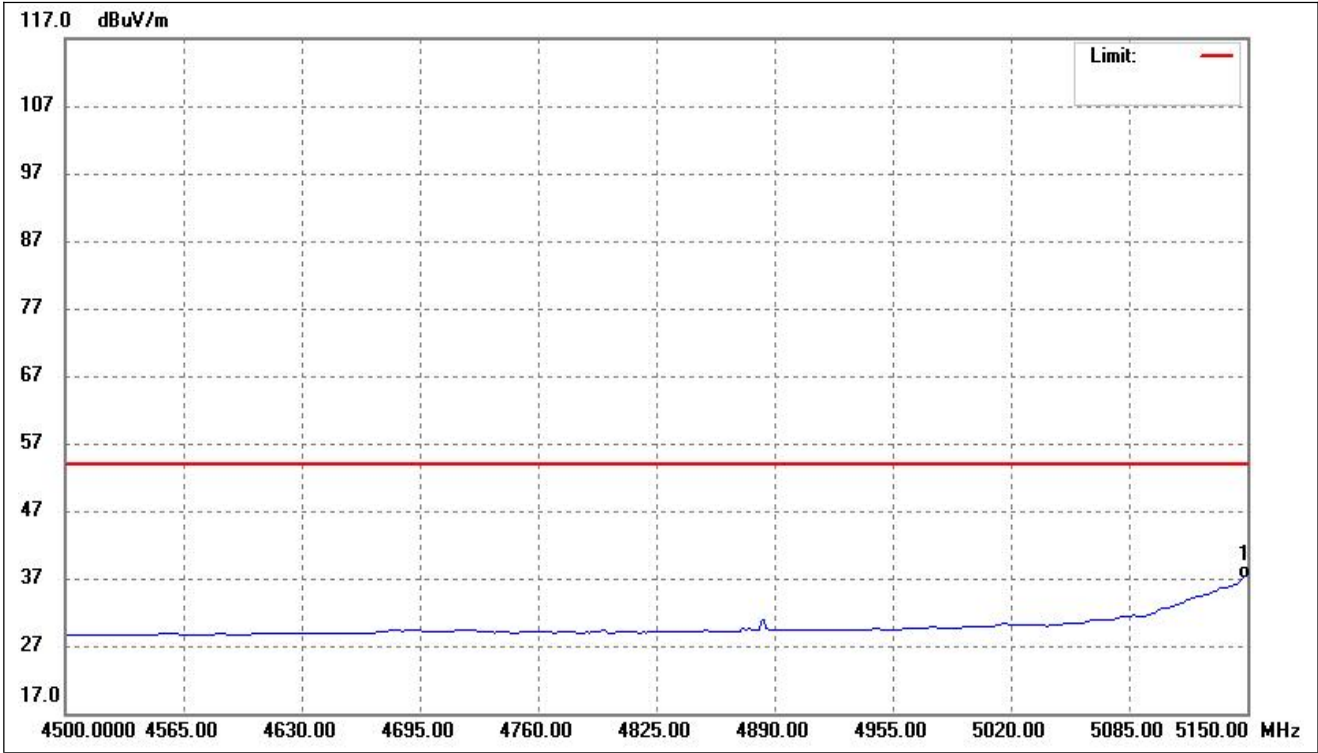


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5150.000	50.52	-12.53	37.99	54.00	-16.01	-	-	AVG

802.11n-HT20- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

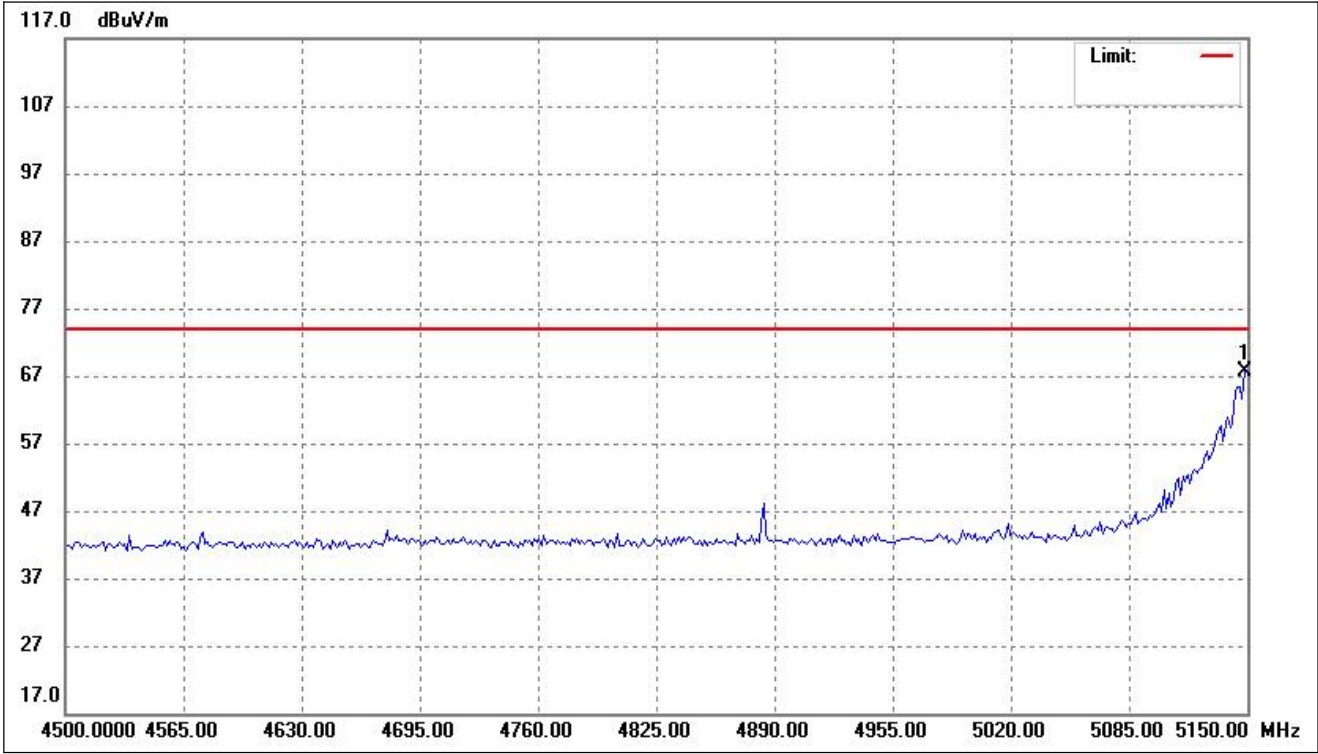


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5148.697	80.14	-12.53	67.61	74.00	-6.39	-	-	peak

802.11n-HT20- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

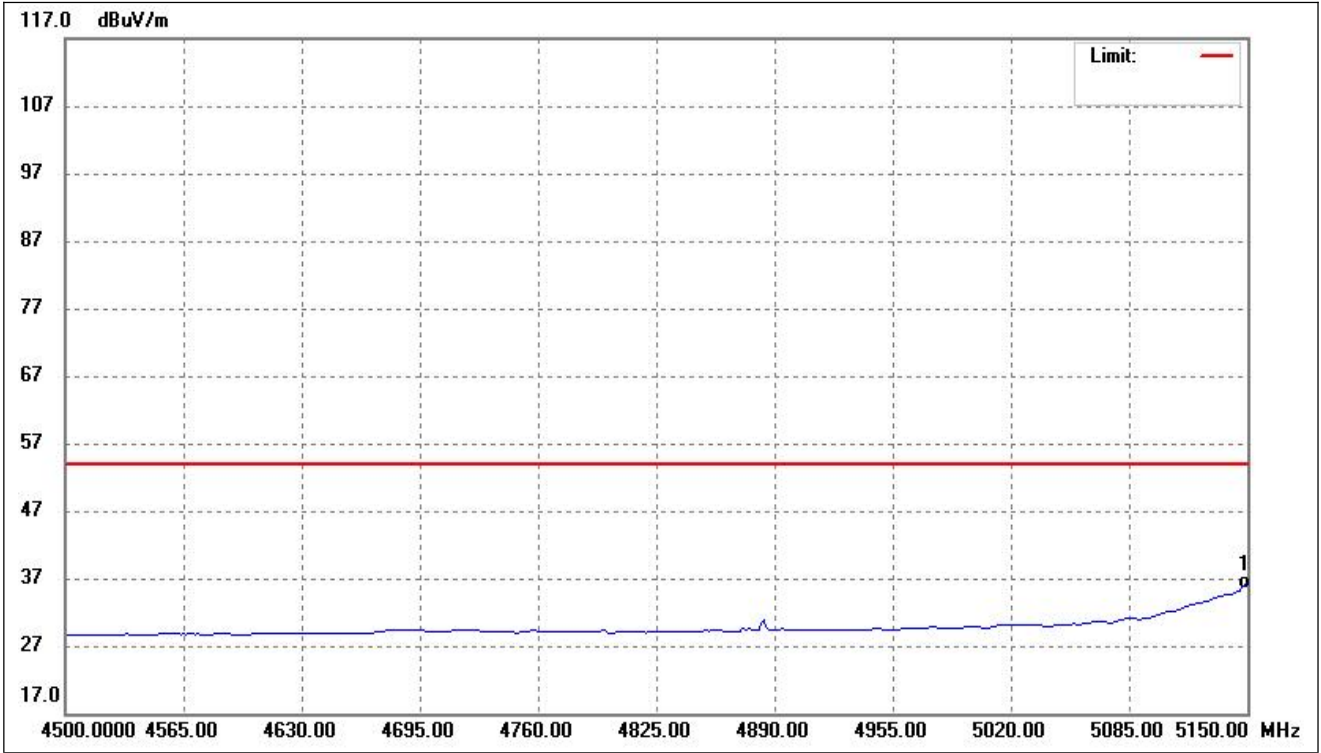


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5150.000	48.97	-12.53	36.44	54.00	-17.56	-	-	AVG

802.11ac-VHT20- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

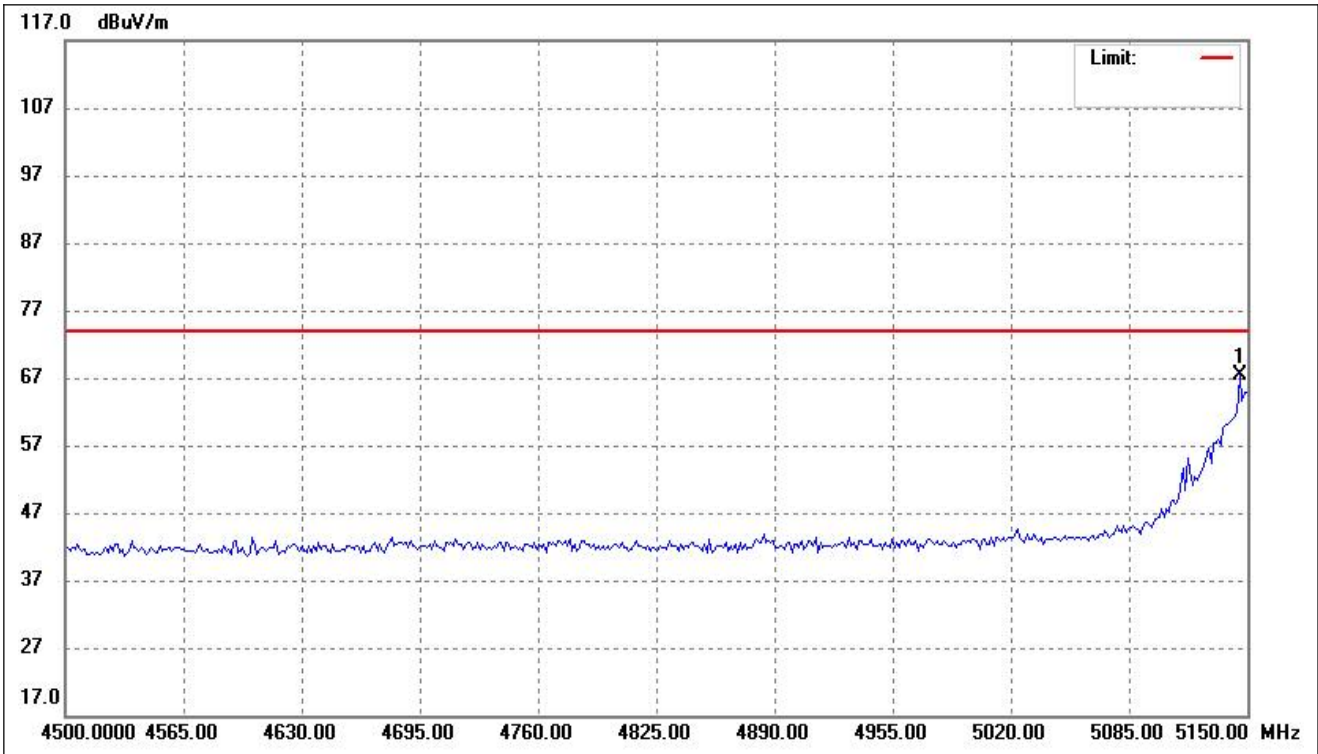


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5146.092	79.85	-12.55	67.30	74.00	-6.70	-	-	peak

802.11ac-VHT20- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

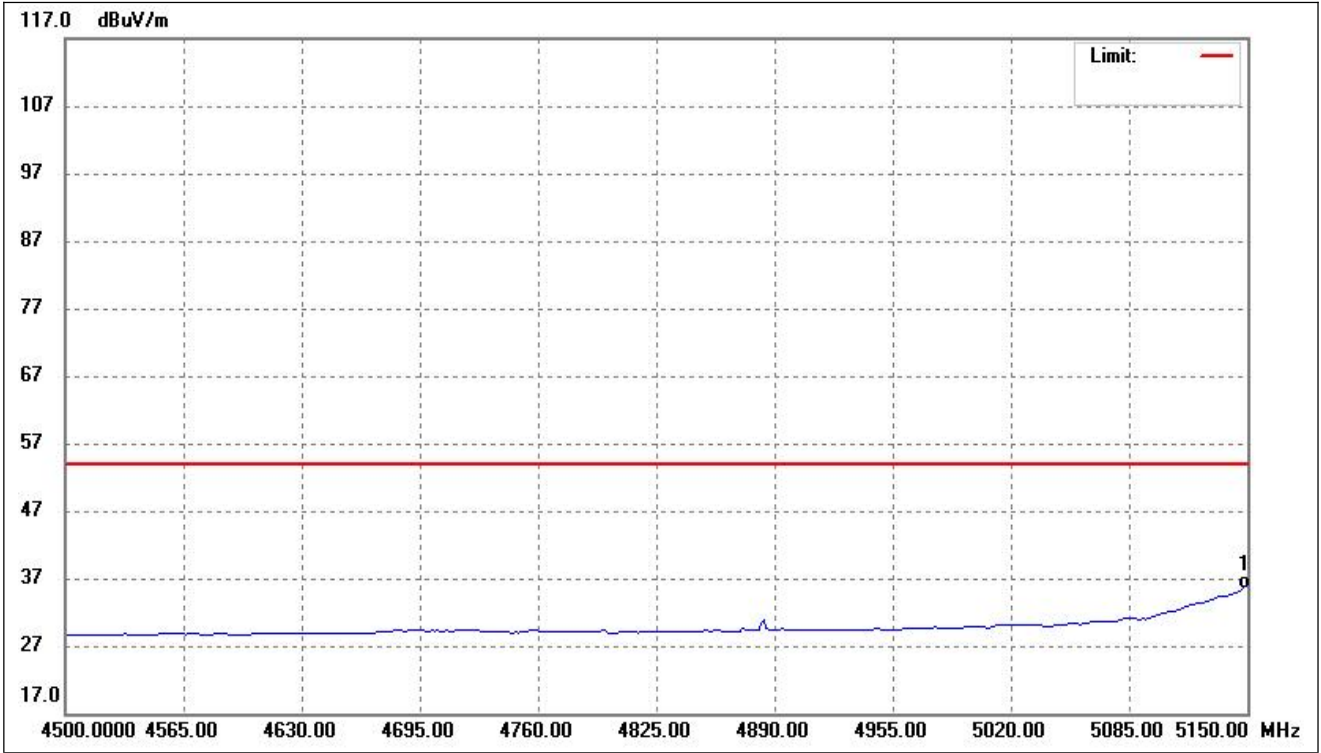


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5150.000	48.81	-12.53	36.28	54.00	-17.72	-	-	AVG

802.11ax-HE20- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

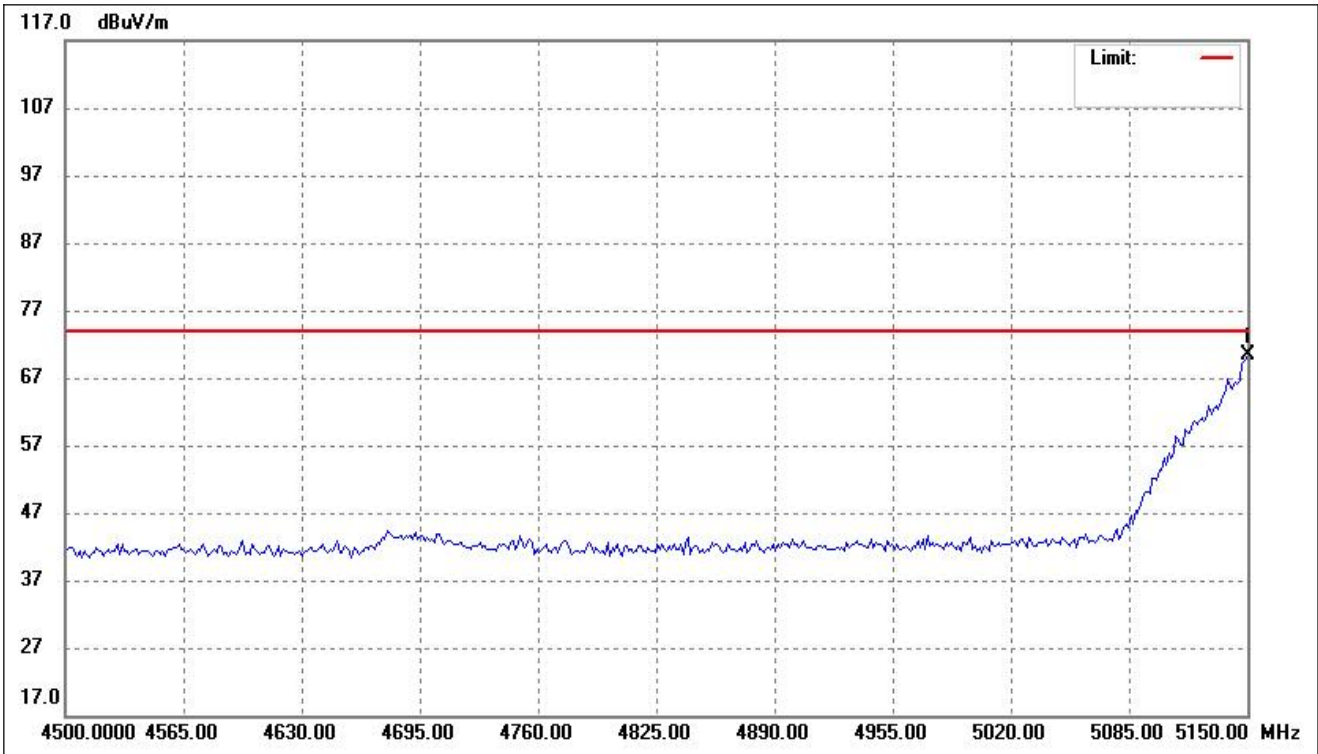


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5150.000	83.01	-12.53	70.48	74.00	-3.52	-	-	peak

802.11ax-HE20- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

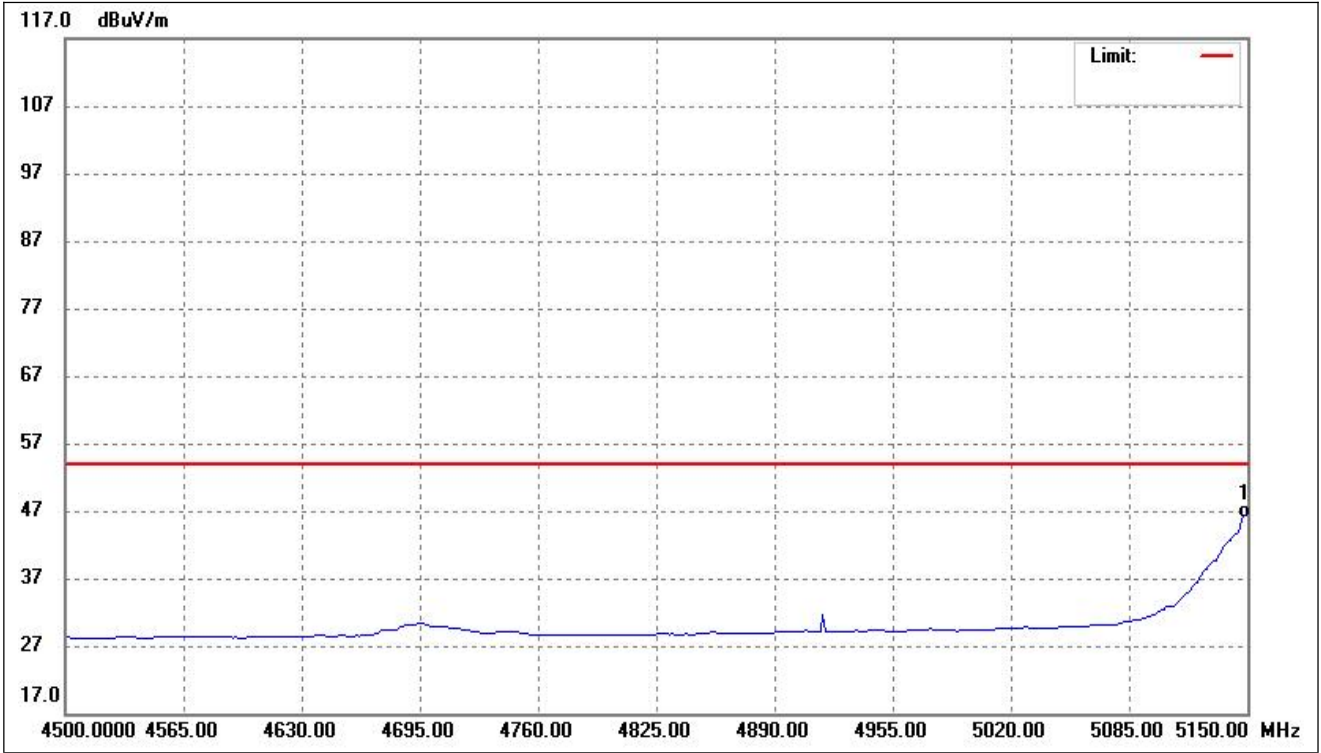


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5150.000	59.38	-12.53	46.85	54.00	-7.15	-	-	AVG

802.11n-HT40- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

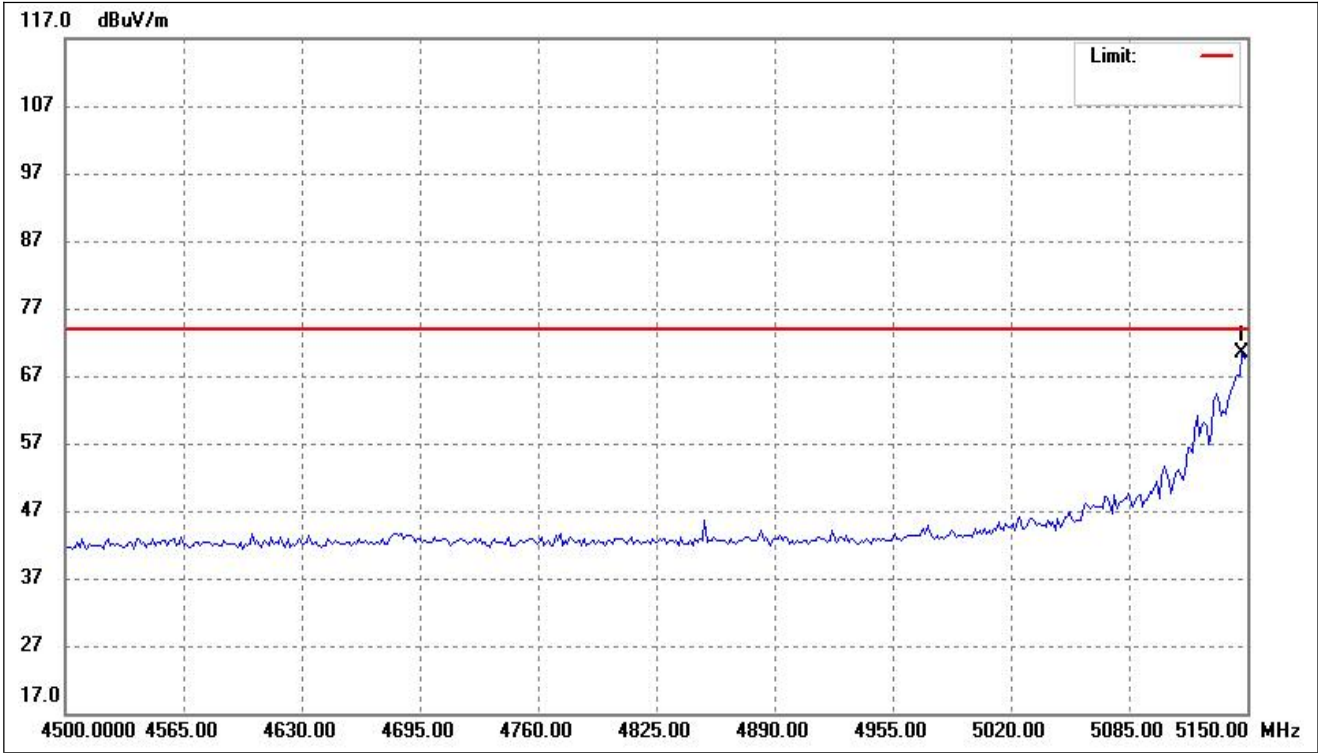


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5147.395	82.99	-12.54	70.45	74.00	-3.55	-	-	peak

802.11n-HT40- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

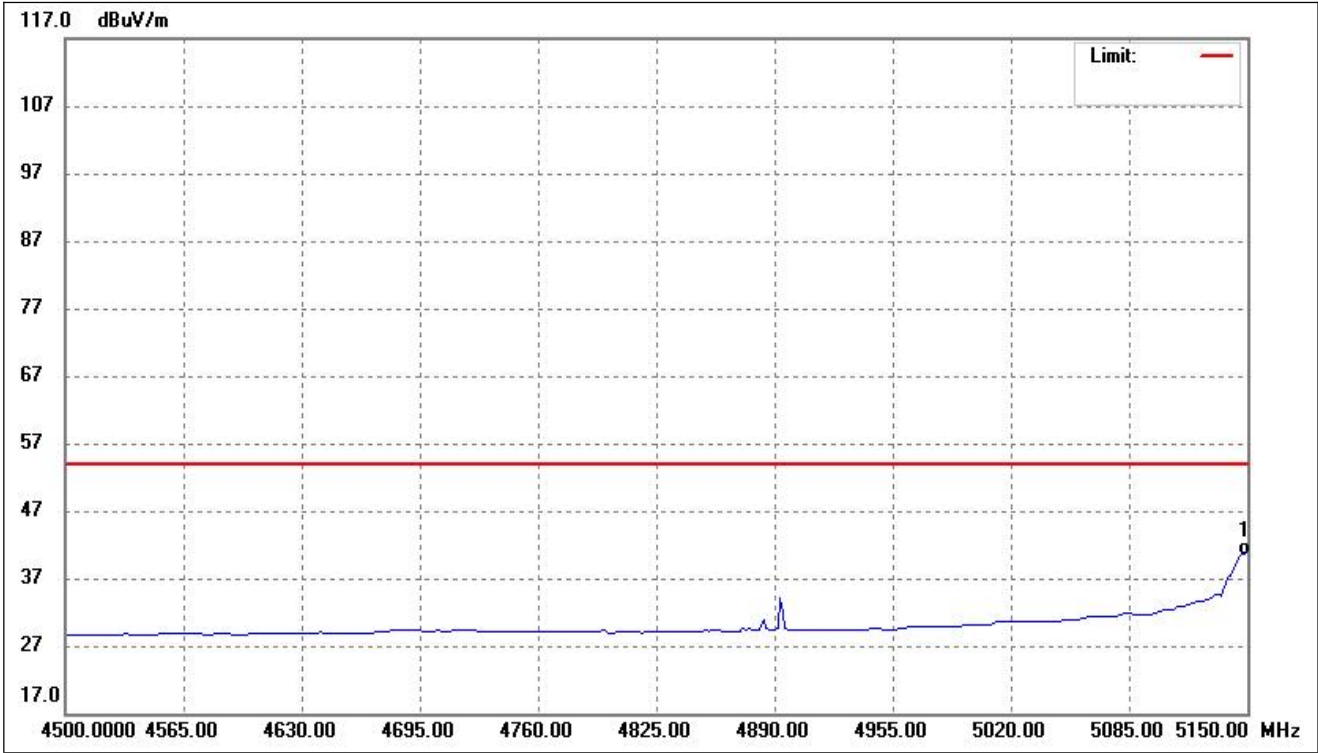


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5150.000	53.84	-12.53	41.31	54.00	-12.69	-	-	AVG

802.11ac-VHT40- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

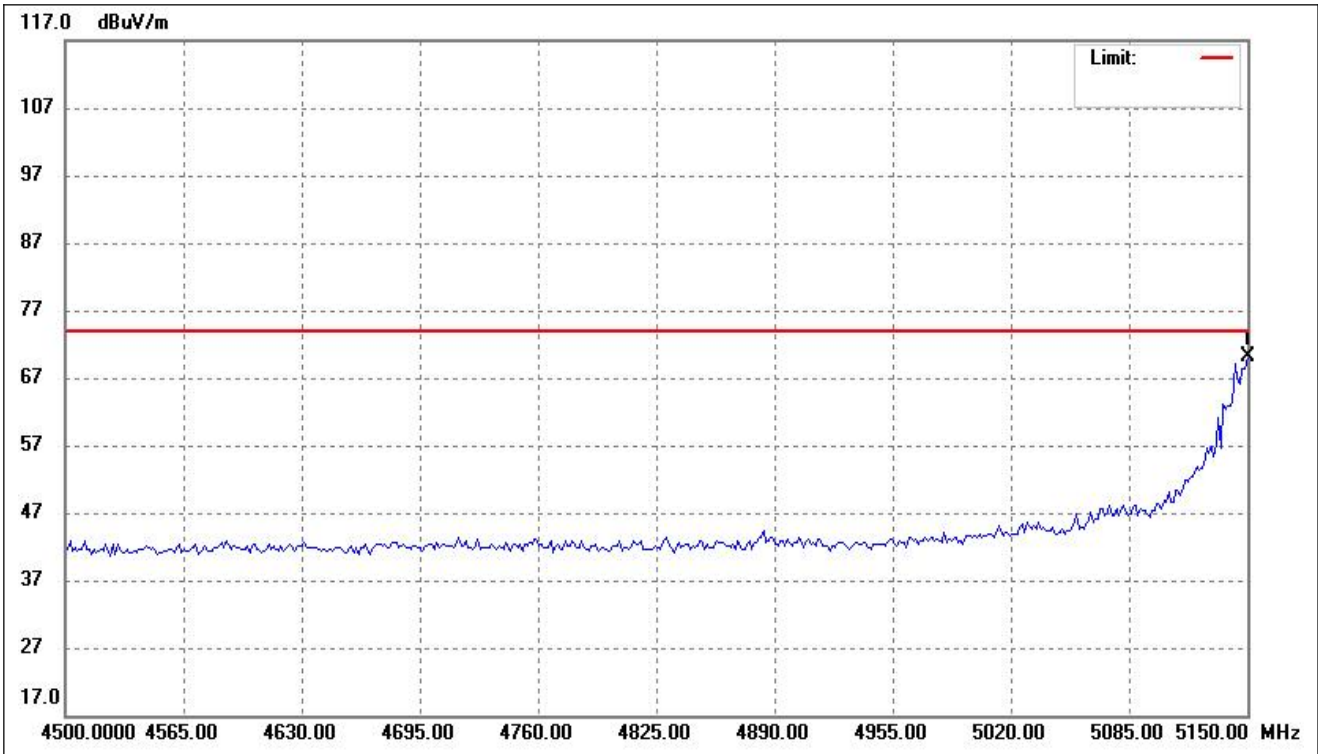


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5150.000	82.57	-12.53	70.04	74.00	-3.96	-	-	peak

802.11ac-VHT40- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

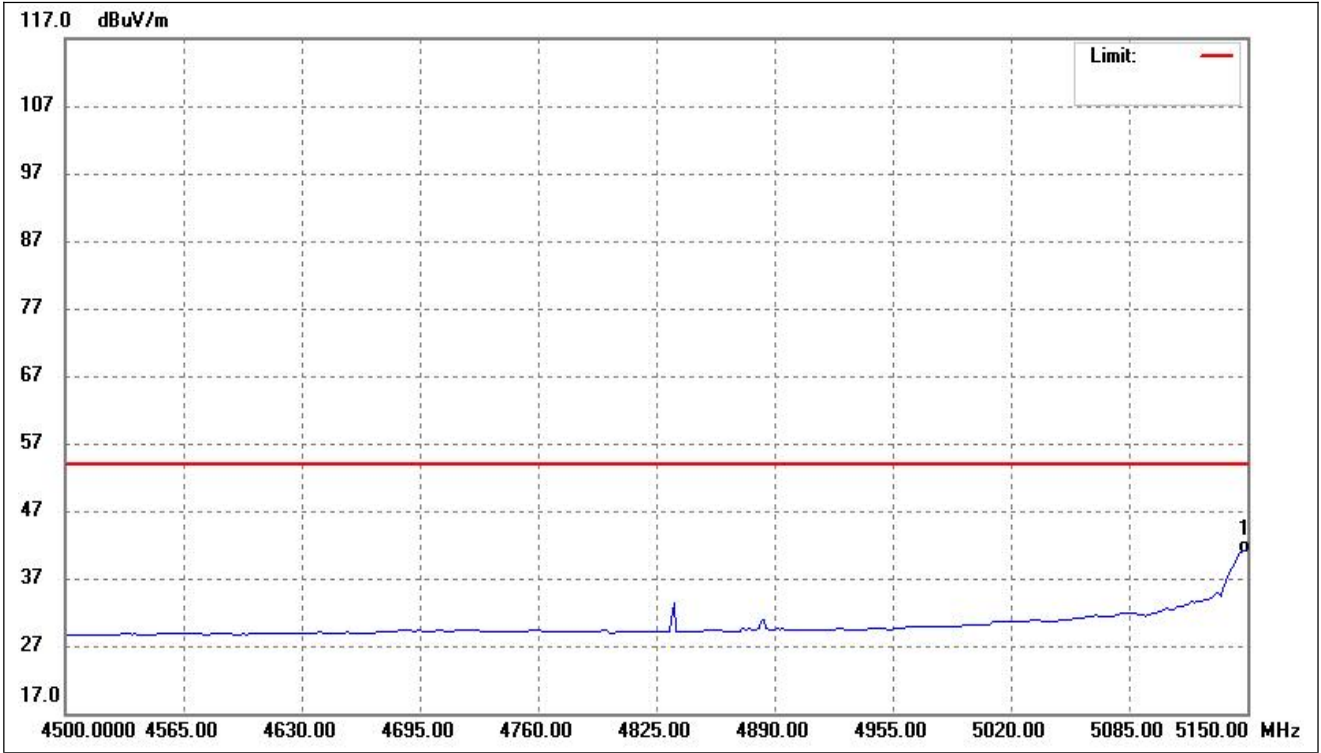


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5150.000	54.27	-12.53	41.74	54.00	-12.26	-	-	AVG

802.11ax-HE40- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

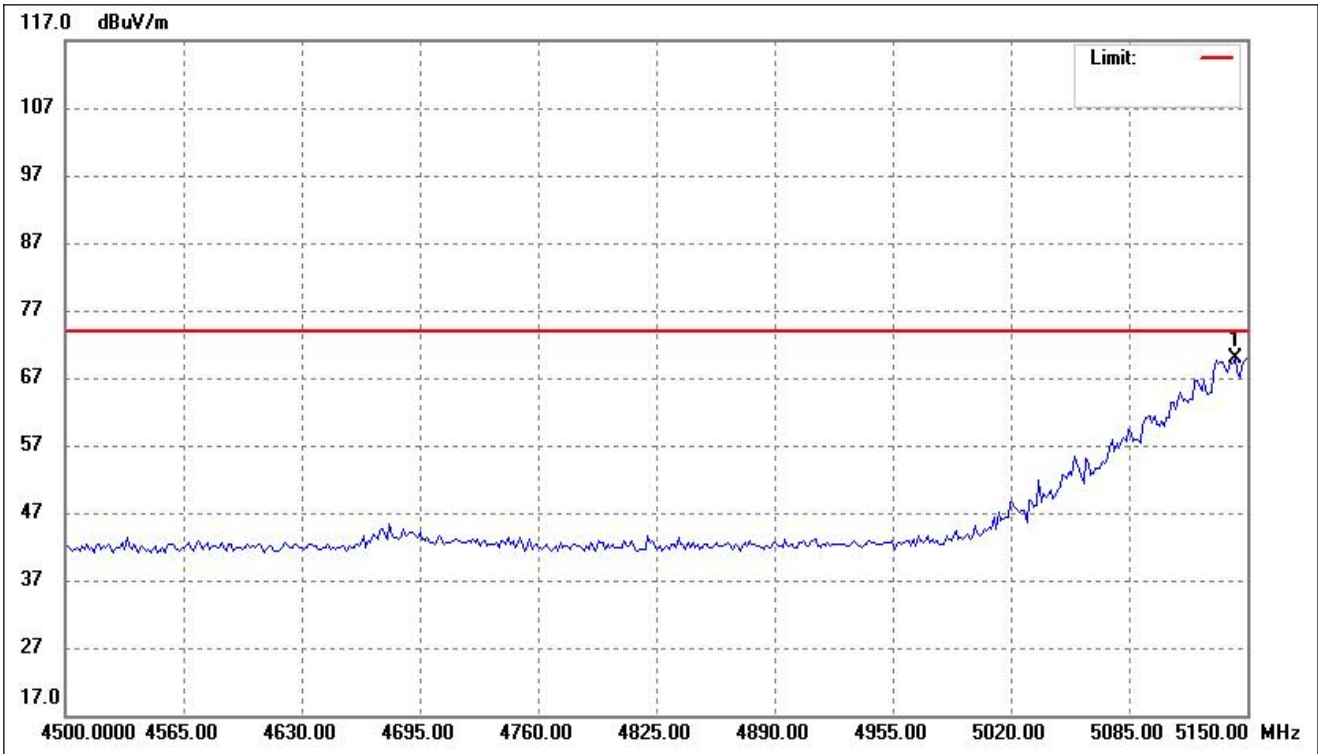


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5143.487	82.55	-12.57	69.98	74.00	-4.02	-	-	peak

802.11ax-HE40- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

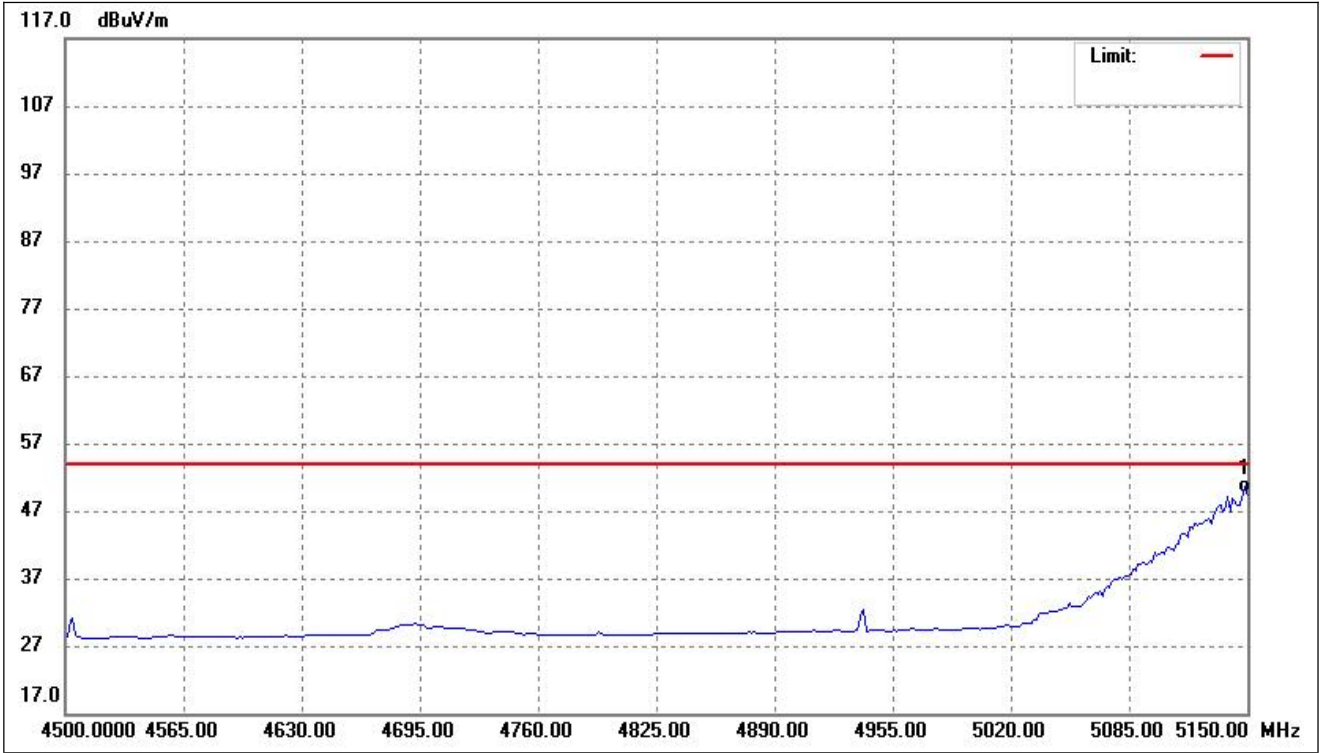


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5148.697	63.17	-12.53	50.64	54.00	-3.36	-	-	AVG

802.11ac-VHT80- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

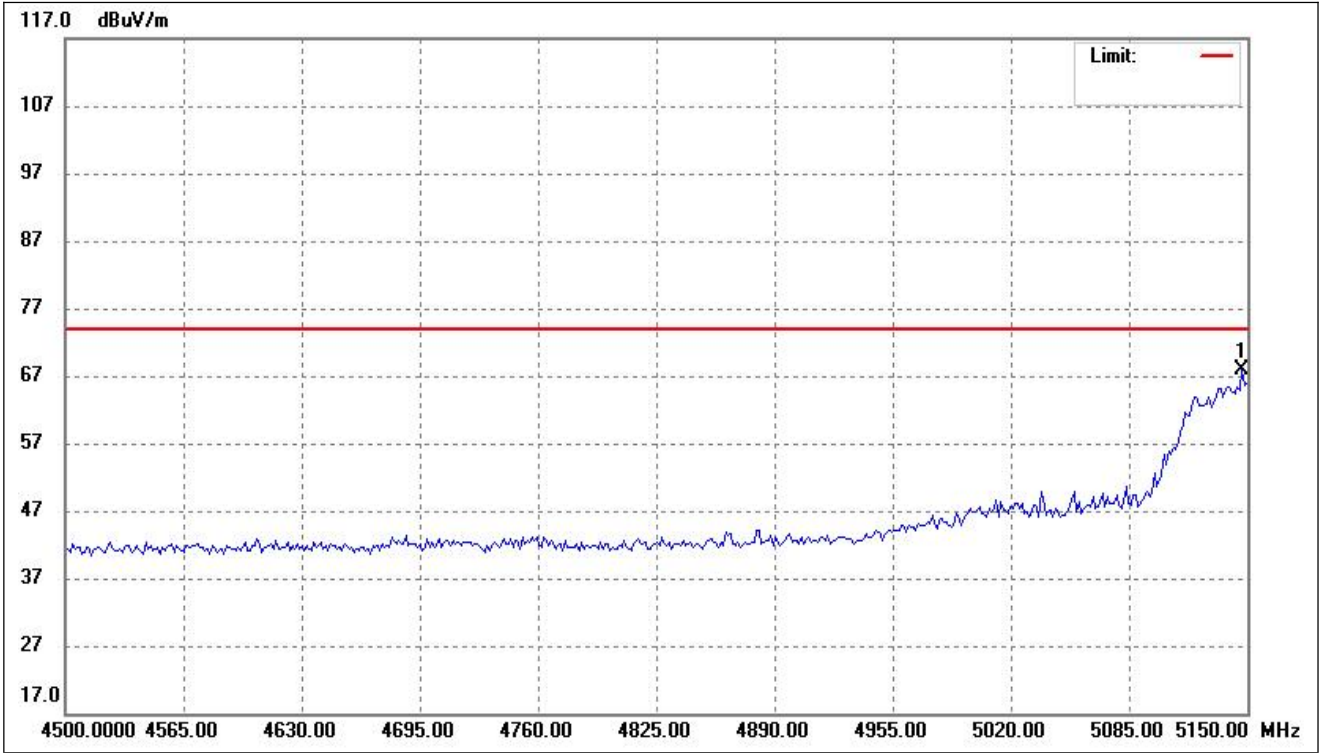


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5147.395	80.34	-12.54	67.80	74.00	-6.20	-	-	peak

802.11ac-VHT80- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

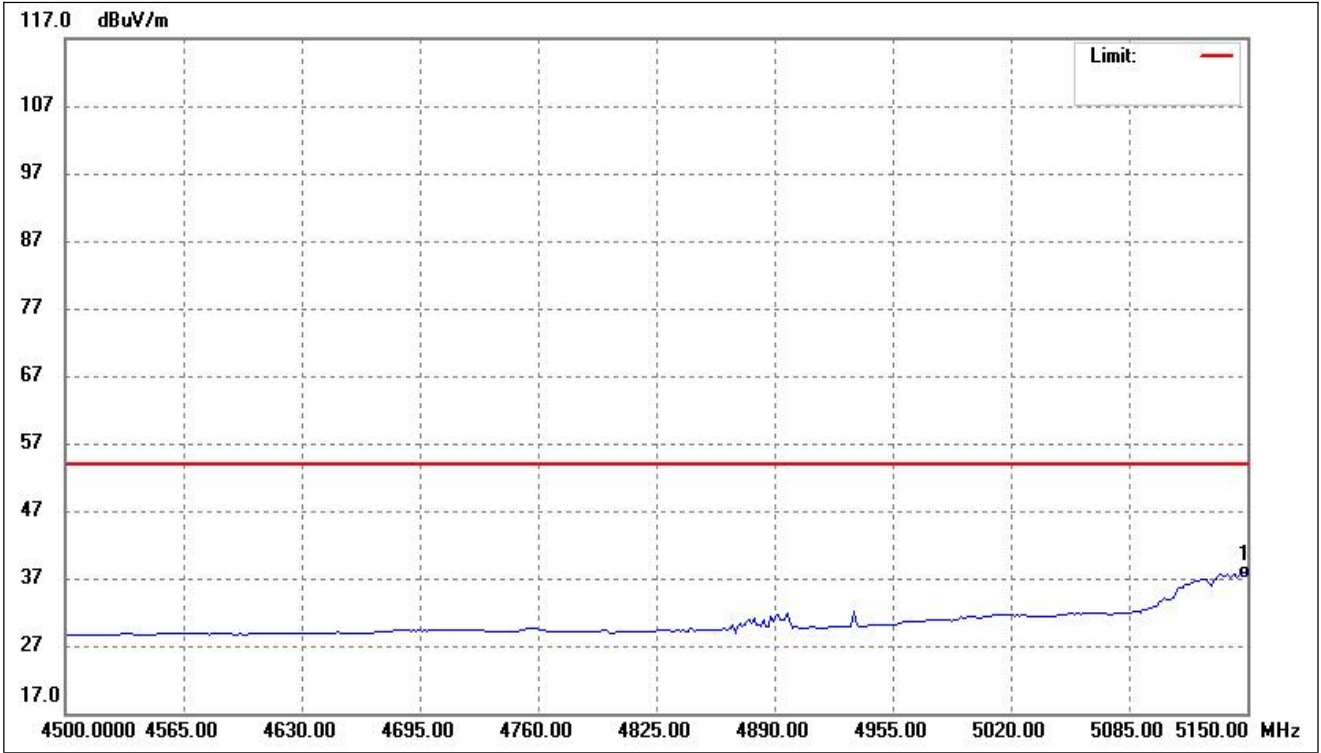


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5148.697	50.30	-12.53	37.77	54.00	-16.23	-	-	AVG

802.11ax-HE80- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

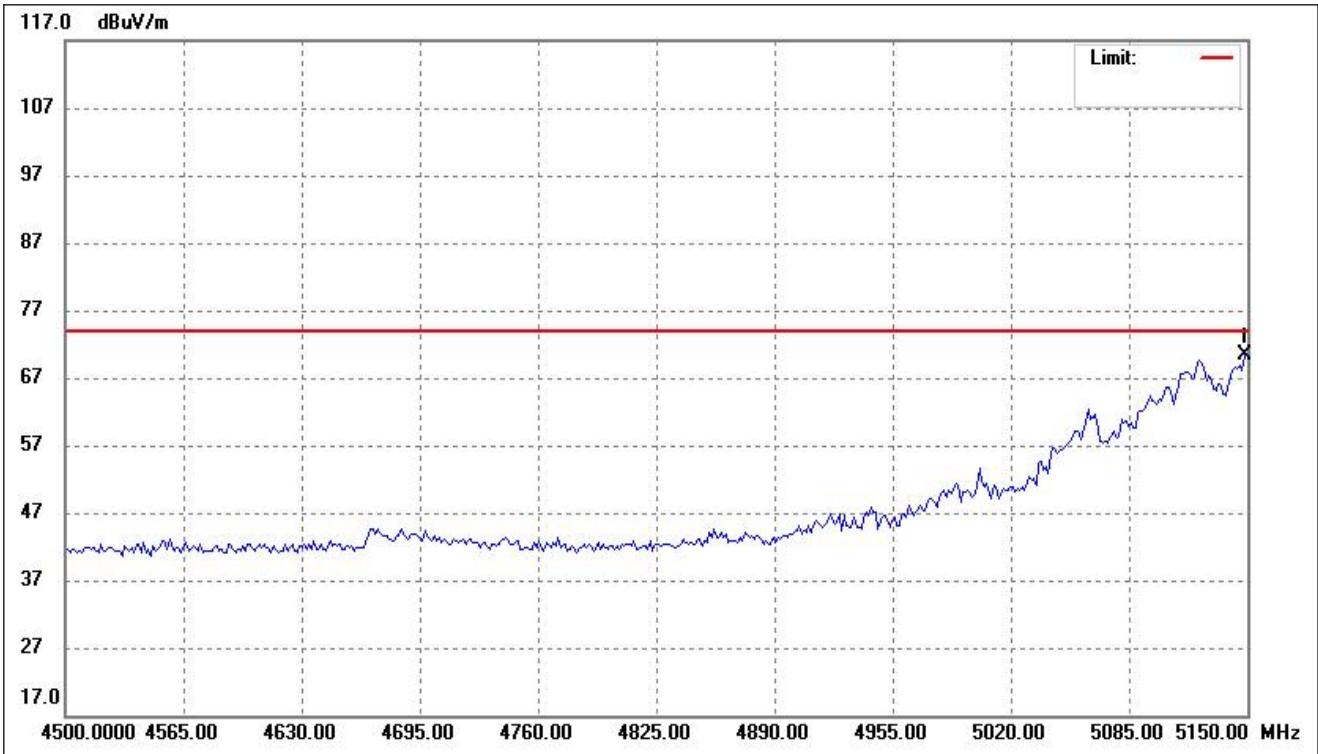

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5148.697	82.91	-12.53	70.38	74.00	-3.62	-	-	peak

802.11ax-HE80- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

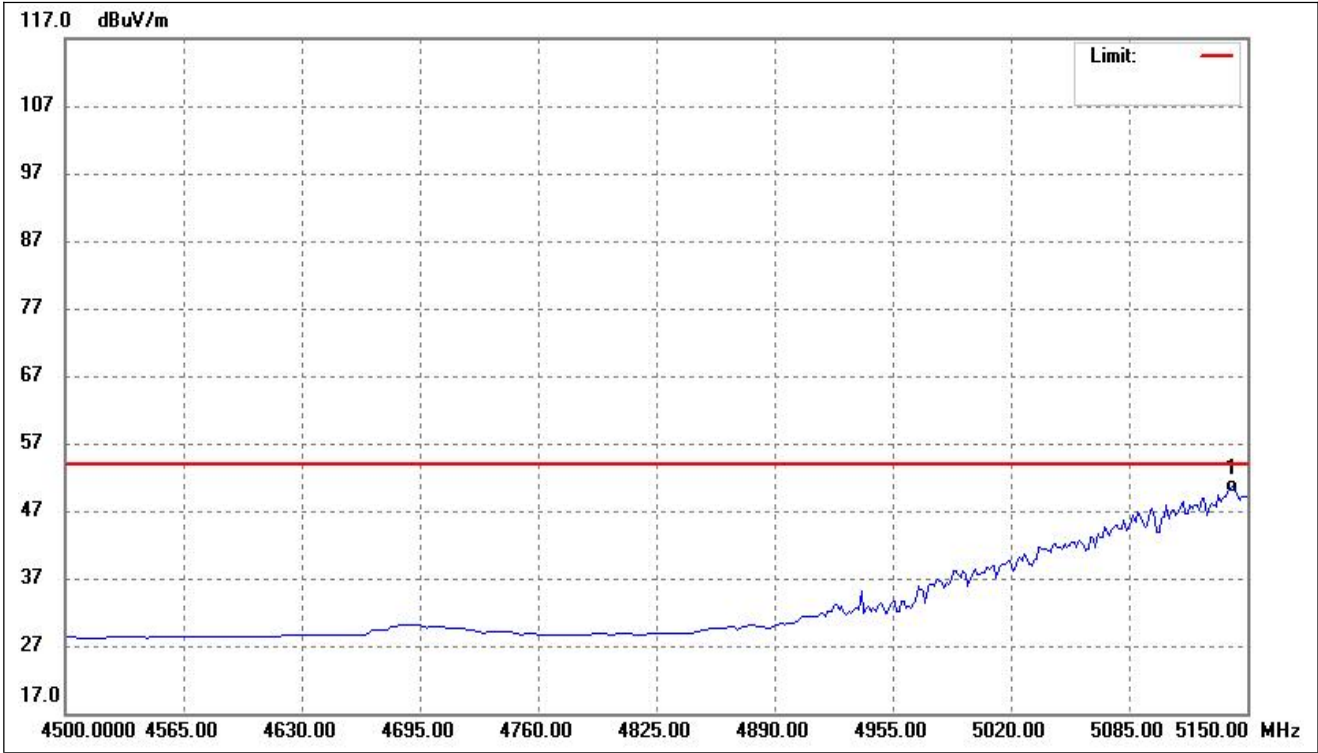

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5142.184	63.29	-12.58	50.71	54.00	-3.29	-	-	AVG

Note: The Restricted Bandedge was tested in Horizontal /Vertical and the worst case position data was reported.

Remark: ‘-’Means’ the test Degree and Height is not recorded by the test software and only show the worst case in the test report.

- Antenna 0(worst case)
- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11a)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	58.16	-6.13	52.03	74	-21.97	H	PK
10360	43.47	-6.13	37.34	54	-16.66	H	AV
15540	57.26	-1.64	55.62	74	-18.38	H	PK
15540	40.38	-1.64	38.74	54	-15.26	H	AV
10360	58.96	-6.13	52.83	74	-21.17	V	PK
10360	40.84	-6.13	34.71	54	-19.29	V	AV
15540	58.52	-1.64	56.88	74	-17.12	V	PK
15540	41.25	-1.64	39.61	54	-14.39	V	AV
Middle Channel (5200MHz)							
10400	58.8	-5.93	52.87	74	-21.13	H	PK
10400	40.15	-5.93	34.22	54	-19.78	H	AV
15600	60.31	-1.58	58.73	74	-15.27	H	PK
15600	38.35	-1.58	36.77	54	-17.23	H	AV
10400	58.82	-5.93	52.89	74	-21.11	V	PK
10400	40.02	-5.93	34.09	54	-19.91	V	AV
15600	59.13	-1.58	57.55	74	-16.45	V	PK
15600	41.44	-1.58	39.86	54	-14.14	V	AV
High Channel (5240MHz)							
10480	60.04	-5.71	54.33	74	-19.67	H	PK
10480	39.93	-5.71	34.22	54	-19.78	H	AV
15720	61.82	-1.52	60.3	74	-13.7	H	PK
15720	40.51	-1.52	38.99	54	-15.01	H	AV
10480	58.04	-5.71	52.33	74	-21.67	V	PK
10480	41.14	-5.71	35.43	54	-18.57	V	AV
15720	59.98	-1.52	58.46	74	-15.54	V	PK
15720	39.99	-1.52	38.47	54	-15.53	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	60.68	-6.13	54.55	74	-19.45	H	PK
11490	42.3	-6.13	36.17	54	-17.83	H	AV
17235	57.74	-1.64	56.1	74	-17.9	H	PK
17235	39.75	-1.64	38.11	54	-15.89	H	AV
11490	58.03	-6.13	51.9	74	-22.1	V	PK
11490	41.37	-6.13	35.24	54	-18.76	V	AV
17235	57.94	-1.64	56.3	74	-17.7	V	PK
17235	41.31	-1.64	39.67	54	-14.33	V	AV
Middle Channel (5785MHz)							
11570	58.16	-5.93	52.23	74	-21.77	H	PK
11570	39.28	-5.93	33.35	54	-20.65	H	AV
17355	60.99	-1.58	59.41	74	-14.59	H	PK
17355	39.99	-1.58	38.41	54	-15.59	H	AV
11570	58.83	-5.93	52.9	74	-21.1	V	PK
11570	38.85	-5.93	32.92	54	-21.08	V	AV
17355	59.53	-1.58	57.95	74	-16.05	V	PK
17355	40.56	-1.58	38.98	54	-15.02	V	AV
High Channel (5825MHz)							
11650	60.11	-5.71	54.4	74	-19.6	H	PK
11650	39.43	-5.71	33.72	54	-20.28	H	AV
17475	60.39	-1.52	58.87	74	-15.13	H	PK
17475	40.42	-1.52	38.9	54	-15.1	H	AV
11650	60.66	-5.71	54.95	74	-19.05	V	PK
11650	40.14	-5.71	34.43	54	-19.57	V	AV
17475	59.7	-1.52	58.18	74	-15.82	V	PK
17475	39.26	-1.52	37.74	54	-16.26	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-35.23	-27
Highest	Above 5350	-34.13	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-38.21	-27
	5715 to 5725	-36.54	-17
Highest	5850 to 5860	-22.18	-17
	Above 5860	-33.33	-27
Note: the data just list the worst cases			

- For the frequency band 5.150-5.250GHz, 5.725-5.850GHz (802.11n HT20)
- Harmonics And Spurious Emissions

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel (5180MHz)							
10360	60.28	-6.07	54.21	74	-19.79	H	PK
10360	43.02	-6.07	36.95	54	-17.05	H	AV
10360	61.57	-6.07	55.5	74	-18.5	V	PK
10360	42.61	-6.07	36.54	54	-17.46	V	AV
Middle Channel (5200MHz)							
10400	54.86	-1.59	53.27	74	54.86	H	PK
10400	40.14	-1.59	38.55	54	40.14	H	AV
10400	58.31	-5.94	52.37	74	58.31	V	PK
10400	42.32	-5.94	36.38	54	42.32	V	AV
High Channel (5240MHz)							
10480	55.76	-1.59	54.17	74	-19.83	H	PK
10480	40.83	-1.59	39.24	54	-14.76	H	AV
10480	60.73	-5.94	54.79	74	-19.21	V	PK
10480	41.89	-5.94	35.95	54	-18.05	V	AV

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel (5745MHz)							
11490	61.4	-6.13	55.27	74	-18.73	H	PK
11490	40.52	-6.13	34.39	54	-19.61	H	AV
11490	55.51	-1.64	53.87	74	-20.13	V	PK
11490	38.05	-1.64	36.41	54	-17.59	V	AV
Middle Channel (5785MHz)							
11570	56.43	-6.13	50.3	74	-23.7	H	PK
11570	41.02	-6.13	34.89	54	-19.11	H	AV
11570	56.58	-1.64	54.94	74	-19.06	V	PK
11570	41.4	-1.64	39.76	54	-14.24	V	AV
High Channel (5825MHz)							
11650	58.22	-5.93	52.29	74	-21.71	H	PK
11650	41.19	-5.93	35.26	54	-18.74	H	AV
11650	59.26	-1.58	57.68	74	-16.32	V	PK
11650	41.13	-1.58	39.55	54	-14.45	V	AV

➤ Out of Band edge 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-37.48	-27
Highest	Above 5350	-43.87	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-35.22	-27
	5715 to 5725	-33.61	-17
Highest	5850 to 5860	-32.22	-17
	Above 5860	-38.41	-27
Note: the data just list the worst cases			

Note: this EUT was tested in the low, high channel and the worst case position data was reported.

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11n HT40)
- Harmonics And Spurious Emissions

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel (5190MHz)							
10380	58.54	-6.13	52.41	74	-21.59	H	PK
10380	40.88	-6.13	34.75	54	-19.25	H	AV
10380	57.18	-1.64	55.54	74	-18.46	V	PK
10380	39.52	-1.64	37.88	54	-16.12	V	AV
High Channel (5230MHz)							
10460	55.15	-6.13	49.02	74	-24.98	H	PK
10460	41.32	-6.13	35.19	54	-18.81	H	AV
10460	56.43	-1.64	54.79	74	-19.21	V	PK
10460	39.71	-1.64	38.07	54	-15.93	V	AV

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel (5755MHz)							
11510	59.2	-5.93	53.27	74	-20.73	H	PK
11510	40.95	-5.93	35.02	54	-18.98	H	AV
11510	61.29	-1.58	59.71	74	-14.29	V	PK
11510	39.55	-1.58	37.97	54	-16.03	V	AV
High Channel (5795MHz)							
11590	61.49	-5.93	55.56	74	-18.44	H	PK
11590	39.22	-5.93	33.29	54	-20.71	H	AV
11590	61.35	-1.58	59.77	74	-14.23	V	PK
11590	40.21	-1.58	38.63	54	-15.37	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-37.22	-27
Highest	Above 5350	-36.12	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-38.42	-27
	5715 to 5725	-38.11	-17
Highest	5850 to 5860	-35.36	-17
	Above 5860	-35.26	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11ac-VHT20)
- Harmonics And Spurious Emissions

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel (5180MHz)							
10360	59.58	-6.13	53.45	74	-20.55	H	PK
10360	41.23	-6.13	35.1	54	-18.9	H	AV
10360	55.53	-1.64	53.89	74	-20.11	V	PK
10360	38.88	-1.64	37.24	54	-16.76	V	AV
Middle Channel (5200MHz)							
10400	59.47	-6.13	53.34	74	-20.66	H	PK
10400	40.36	-6.13	34.23	54	-19.77	H	AV
10400	57.72	-1.64	56.08	74	-17.92	V	PK
10400	39.03	-1.64	37.39	54	-16.61	V	AV
High Channel (5240MHz)							
10480	61.49	-5.93	55.56	74	-18.44	H	PK
10480	38.24	-5.93	32.31	54	-21.69	H	AV
10480	60.81	-1.58	59.23	74	-14.77	V	PK
10480	40.39	-1.58	38.81	54	-15.19	V	AV

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel (5745MHz)							
11490	60.14	-5.93	54.21	74	-19.79	H	PK
11490	41.83	-5.93	35.9	54	-18.1	H	AV
11490	59.37	-1.58	57.79	74	-16.21	V	PK
11490	41.69	-1.58	40.11	54	-13.89	V	AV
Middle Channel (5785MHz)							
11570	59.42	-5.71	53.71	74	-20.29	H	PK
11570	41.69	-5.71	35.98	54	-18.02	H	AV
11570	61.41	-1.52	59.89	74	-14.11	V	PK
11570	41.54	-1.52	40.02	54	-13.98	V	AV
High Channel (5825MHz)							
11650	59.33	-5.71	53.62	74	-20.38	H	PK
11650	38.25	-5.71	32.54	54	-21.46	H	AV
11650	59.25	-1.52	57.73	74	-16.27	V	PK
11650	38.41	-1.52	36.89	54	-17.11	V	AV

➤ Out of Band edge 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-37.22	-27
Highest	Above 5350	-41.25	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-36.98	-27
	5715 to 5725	-31.21	-17
Highest	5850 to 5860	-34.36	-17
	Above 5860	-36.35	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11ac-VHT40)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5190MHz)							
10380	61.26	-6.13	55.13	74	-18.87	H	PK
10380	43.83	-6.13	37.7	54	-16.3	H	AV
10380	57.83	-1.64	56.19	74	-17.81	V	PK
10380	38.54	-1.64	36.9	54	-17.1	V	AV
High Channel (5230MHz)							
10460	58.45	-6.13	52.32	74	-21.68	H	PK
10460	39.29	-6.13	33.16	54	-20.84	H	AV
10460	58.65	-1.64	57.01	74	-16.99	V	PK
10460	40.39	-1.64	38.75	54	-15.25	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5755MHz)							
11510	60.36	-5.93	54.43	74	-19.57	H	PK
11510	40.12	-5.93	34.19	54	-19.81	H	AV
11510	60.6	-1.58	59.02	74	-14.98	V	PK
11510	38.31	-1.58	36.73	54	-17.27	V	AV
High Channel (5795MHz)							
11590	61.92	-5.93	55.99	74	-18.01	H	PK
11590	39.11	-5.93	33.18	54	-20.82	H	AV
11590	59.76	-1.58	58.18	74	-15.82	V	PK
11590	41.71	-1.58	40.13	54	-13.87	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-36.60	-27
Highest	Above 5350	-36.21	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-38.26	-27
	5715 to 5725	-32.44	-17
Highest	5850 to 5860	-36.19	-17
	Above 5860	-37.54	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11ac-VHT80)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5210MHz							
10420	58.08	-6.07	52.01	74	-21.99	H	PK
10420	41.88	-6.07	35.81	54	-18.19	H	AV
10420	52.94	-1.63	51.31	74	-22.69	H	PK
10420	39.93	-1.63	38.3	54	-15.7	H	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5775MHz							
11550	59.32	-5.94	53.38	74	-20.62	H	PK
11550	41.55	-5.94	35.61	54	-18.39	H	AV
11550	55.72	-1.59	54.13	74	-19.87	V	PK
11550	40.2	-1.59	38.61	54	-15.39	V	AV

- Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-38.52	-27
Highest	Above 5350	-36.32	-27
Note: the data just list the worst cases			

- Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-39.21	-27
	5715 to 5725	-33.18	-17
Highest	5850 to 5860	-30.56	-17
	Above 5860	-38.35	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11ax VHE20)
- Harmonics And Spurious Emissions

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel (5180MHz)							
10360	59.35	-6.13	53.22	74	-20.78	H	PK
10360	42.2	-6.13	36.07	54	-17.93	H	AV
10360	57.77	-1.64	56.13	74	-17.87	V	PK
10360	38.01	-1.64	36.37	54	-17.63	V	AV
Middle Channel (5200MHz)							
10400	56.61	-6.13	50.48	74	-23.52	H	PK
10400	39.1	-6.13	32.97	54	-21.03	H	AV
10400	55.52	-1.64	53.88	74	-20.12	V	PK
10400	39.02	-1.64	37.38	54	-16.62	V	AV
High Channel (5240MHz)							
10480	60.23	-5.93	54.3	74	-19.7	H	PK
10480	41.68	-5.93	35.75	54	-18.25	H	AV
10480	60.44	-1.58	58.86	74	-15.14	V	PK
10480	41.15	-1.58	39.57	54	-14.43	V	AV

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel (5745MHz)							
11490	61.99	-5.93	56.06	74	-17.94	H	PK
11490	40.07	-5.93	34.14	54	-19.86	H	AV
11490	60.76	-1.58	59.18	74	-14.82	V	PK
11490	39.24	-1.58	37.66	54	-16.34	V	AV
Middle Channel (5785MHz)							
11570	58.73	-6.13	52.6	74	-21.4	H	PK
11570	41.23	-6.13	35.1	54	-18.9	H	AV
11570	55.82	-1.64	54.18	74	-19.82	V	PK
11570	40.33	-1.64	38.69	54	-15.31	V	AV
High Channel (5825MHz)							
11650	57.08	-6.13	50.95	74	-23.05	H	PK
11650	38.12	-6.13	31.99	54	-22.01	H	AV
11650	57.03	-1.64	55.39	74	-18.61	V	PK
11650	39.31	-1.64	37.67	54	-16.33	V	AV

➤ Out of Band edge 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-35.21	-27
Highest	Above 5350	-46.32	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-29.39	-27
	5715 to 5725	-32.36	-17
Highest	5850 to 5860	-34.70	-17
	Above 5860	-34.21	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11ax VHE40)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5190MHz)							
10380	60.77	-6.13	54.64	74	-19.36	H	PK
10380	42.89	-6.13	36.76	54	-17.24	H	AV
10380	57.76	-1.64	56.12	74	-17.88	V	PK
10380	39.63	-1.64	37.99	54	-16.01	V	AV
High Channel (5230MHz)							
10460	58.15	-6.13	52.02	74	-21.98	H	PK
10460	41.37	-6.13	35.24	54	-18.76	H	AV
10460	57.88	-1.64	56.24	74	-17.76	V	PK
10460	40.49	-1.64	38.85	54	-15.15	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5755MHz)							
11510	60.14	-5.93	54.21	74	-19.79	H	PK
11510	39.45	-5.93	33.52	54	-20.48	H	AV
11510	60.67	-1.58	59.09	74	-14.91	V	PK
11510	41.41	-1.58	39.83	54	-14.17	V	AV
High Channel (5795MHz)							
11590	58.86	-5.93	52.93	74	-21.07	H	PK
11590	38.95	-5.93	33.02	54	-20.98	H	AV
11590	61.08	-1.58	59.5	74	-14.5	V	PK
11590	38.79	-1.58	37.21	54	-16.79	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-37.21	-27
Highest	Above 5350	-35.18	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-33.36	-27
	5715 to 5725	-31.25	-17
Highest	5850 to 5860	-33.36	-17
	Above 5860	-34.52	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11ax VHE80)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5210MHz							
10420	61.91	-6.13	55.78	74	-18.22	H	PK
10420	40.14	-6.13	34.01	54	-19.99	H	AV
10420	58.72	-1.64	57.08	74	-16.92	H	PK
10420	41.16	-1.64	39.52	54	-14.48	H	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5775MHz							
11550	55.16	-6.13	49.03	74	-24.97	H	PK
11550	41.4	-6.13	35.27	54	-18.73	H	AV
11550	55.4	-1.64	53.76	74	-20.24	V	PK
11550	41.71	-1.64	40.07	54	-13.93	V	AV

- Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-31.23	-27
Highest	Above 5350	-34.35	-27
Note: the data just list the worst cases			

- Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-37.21	-27
	5715 to 5725	-36.36	-17
Highest	5850 to 5860	-31.38	-17
	Above 5860	-32.69	-27
Note: the data just list the worst cases			

Note: Testing is carried out with frequency rang 9kHz to 40GHz, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

9. Frequency Stability

9.1 Standard Applicable

According to §15.407(g), manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

9.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode.

9.3 Summary of Test Results/Plots

Please refer to Appendix D

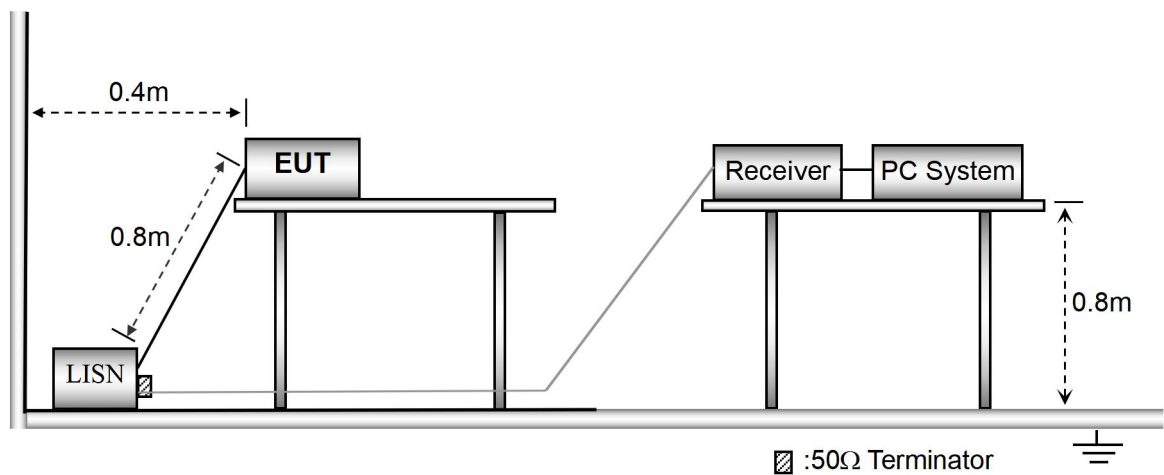
10 Conducted Emissions

10.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.

10.2 Basic Test Setup Block Diagram




10.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency..... 150kHz
Stop Frequency..... 30MHz
Sweep Speed..... Auto
IF Bandwidth..... 10kHz
Quasi-Peak Adapter Bandwidth..... 9kHz
Quasi-Peak Adapter Mode..... Normal


10.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

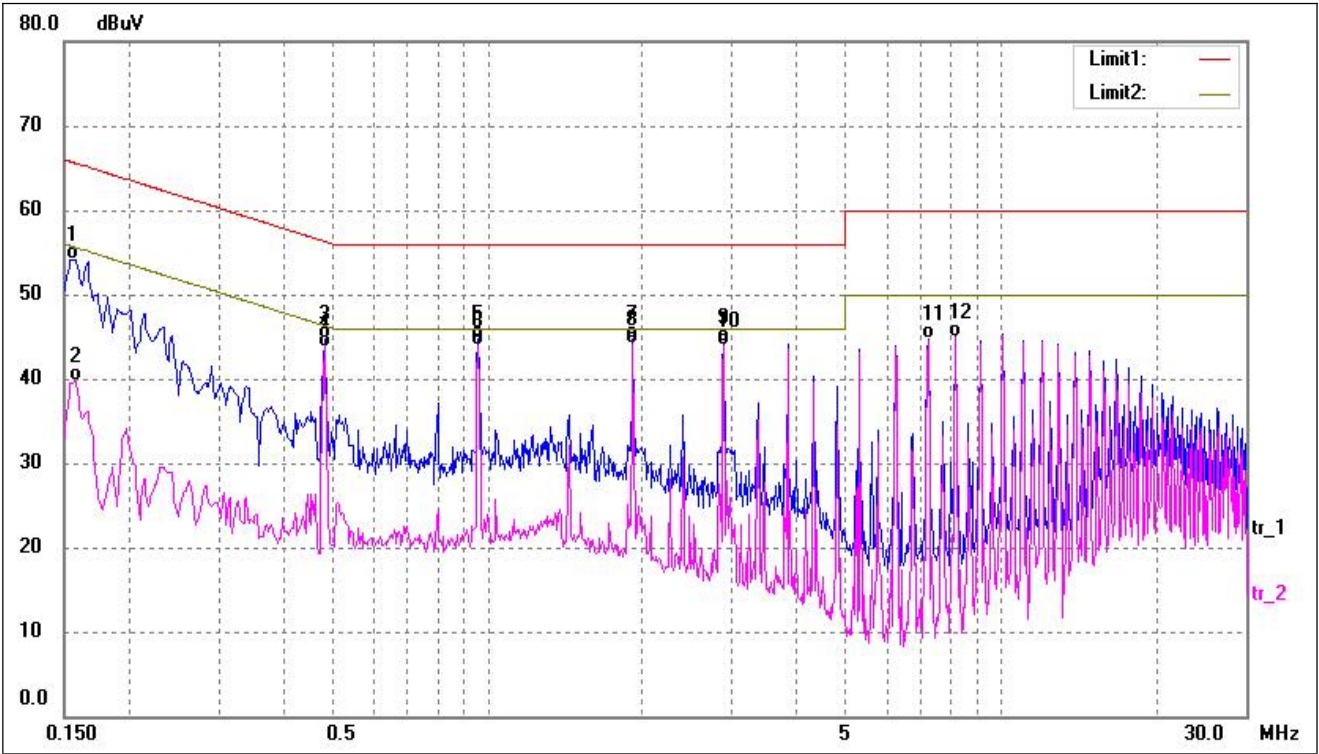

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1539	44.12	9.97	54.09	65.78	-11.69	QP
2	0.1582	29.69	9.97	39.66	55.55	-15.89	AVG
3	0.4812	34.85	9.95	44.80	56.32	-11.52	QP
4	0.4812	33.85	9.95	43.80	46.32	-2.52	AVG
5	0.9582	34.73	9.97	44.70	56.00	-11.30	QP
6	0.9582	33.99	9.97	43.96	46.00	-2.04	AVG
7	1.9181	34.62	10.00	44.62	56.00	-11.38	QP
8*	1.9181	34.14	10.00	44.14	46.00	-1.86	AVG
9	2.8845	34.35	10.04	44.39	56.00	-11.61	QP
10	2.8845	33.83	10.04	43.87	46.00	-2.13	AVG
11	7.2134	34.53	10.21	44.74	60.00	-15.26	QP
12	8.1483	34.66	10.26	44.92	50.00	-5.08	AVG

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

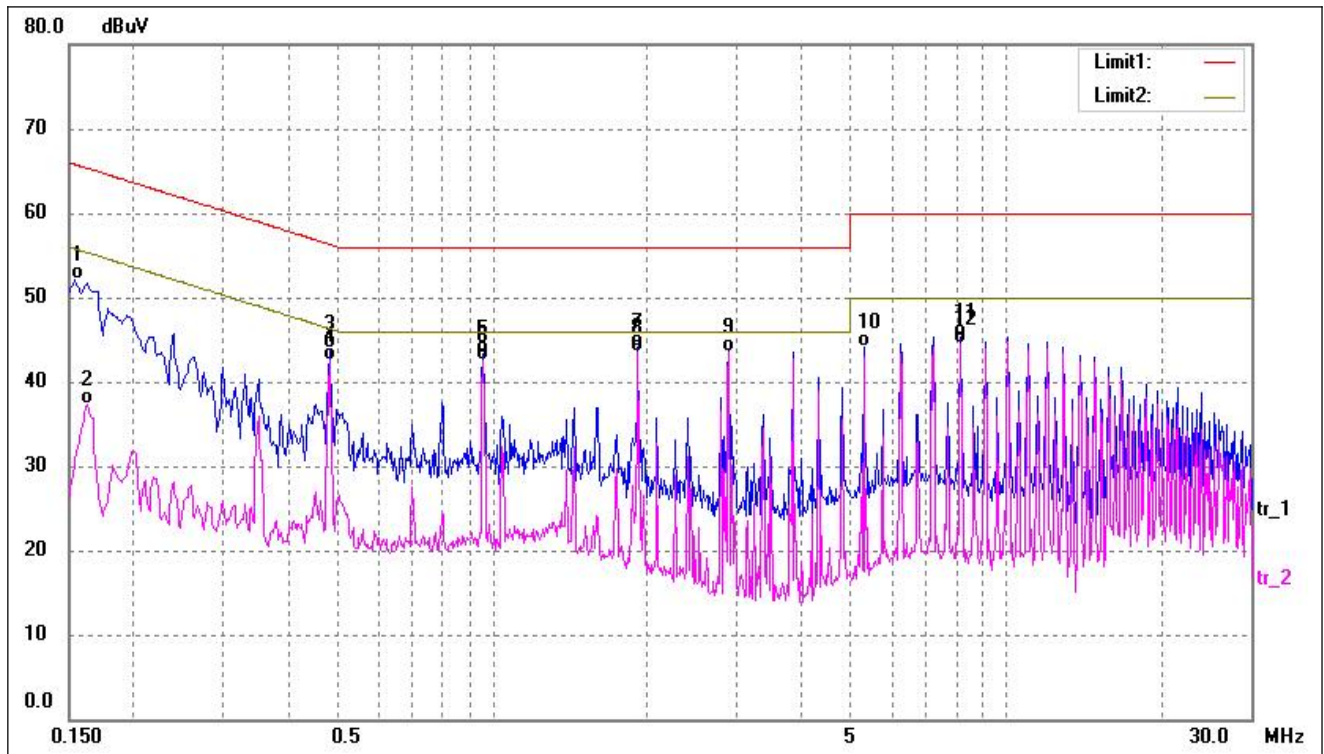

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1539	42.13	9.97	52.10	65.78	-13.68	QP
2	0.1621	27.38	9.97	37.35	55.35	-18.00	AVG
3	0.4812	33.89	9.95	43.84	56.32	-12.48	QP
4	0.4812	32.61	9.95	42.56	46.32	-3.76	AVG
5	0.9582	33.36	9.97	43.33	56.00	-12.67	QP
6	0.9582	32.61	9.97	42.58	46.00	-3.42	AVG
7	1.9180	34.01	10.00	44.01	56.00	-11.99	QP
8*	1.9180	33.50	10.00	43.50	46.00	-2.50	AVG
9	2.8845	33.41	10.04	43.45	46.00	-2.55	AVG
10	5.2770	33.99	10.11	44.10	60.00	-15.90	QP
11	8.1483	35.04	10.26	45.30	60.00	-14.70	QP
12	8.1483	34.33	10.26	44.59	50.00	-5.41	AVG

APPENDIX SUMMARY

Project No.	WTX24X11265506W	Test Engineer	Timi Huang
Start date	2024/11/20	Finish date	2024/11/23
Temperature	23℃	Humidity	46%
RF specifications	U-NII		

APPENDIX	Description of Test Item	Result
A	Power Spectral Density	Compliant
B	Emission Bandwidth and Occupied Bandwidth	Compliant
C	Maximum Conducted Output Power	Compliant
D	Frequency Stability	Compliant

APPENDIX A

Power Spectral Density					
U-NII-1:5150-5250MHz					
Operating mode	Test Channel	ANT 0 dBm/MHz	ANT 1 dBm/MHz	Total dBm/MHz	Limit (dBm/MHz)
802.11a	5180	1.23	-4.81	/	11
	5200	1.84	-4.63	/	11
	5240	2.25	-4.42	/	11
802.11n-HT20	5180	-0.80	-5.66	0.43	11
	5200	-0.58	-5.49	0.64	11
	5240	0.04	-5.17	1.18	11
802.11n-HT40	5190	-5.23	-9.77	-3.92	11
	5230	-4.27	-9.19	-3.06	11
802.11ac-VHT20	5180	1.41	-3.66	2.59	11
	5200	1.88	-4.20	2.84	11
	5240	1.49	-4.23	2.52	11
802.11ac-VHT40	5190	-3.06	-7.79	-1.80	11
	5230	-3.39	-8.18	-2.15	11
802.11ac-VHT80	5210	-7.21	-11.85	-5.93	11
802.11ax-HE20	5180	1.37	-3.98	2.48	11
	5200	1.49	-4.64	2.44	11
	5240	1.79	-4.71	2.67	11
802.11ax-HE40	5190	-2.58	-5.25	-0.70	11
	5230	-2.15	-5.83	-0.60	11
802.11ax-HE80	5210	-2.48	-7.69	-1.34	11




Power Spectral Density							
U-NII-4: 5725-5850MHz							
Operating mode	Test Channel	ANT 0 dBm/300kHz	ANT 1 dBm/300kHz	Factor	ANT 0 dBm/500kHz*	ANT 1 dBm/500kHz*	Limit dBm/500kHz
802.11a	5745	1.42	-3.92	2.22	3.64	-1.7	30
	5785	1.73	-3.91	2.22	3.95	-1.69	30
	5825	1.76	-4.21	2.22	3.98	-1.99	30
*Note: Maximum PSD=PSD(dBm/300kHz)+10log(500kHz/300kHz)=2.22							




Power Spectral Density						
U-NII-3: 5725-5850MHz						
Operating mode	Test Channel I	ANT 0 dBm/300kHz	ANT 1 dBm/300kHz	Factor	Total dBm/500kHz*	Limit dBm/500kHz
802.11n-HT20	5745	0.15	-4.95	2.22	3.54	30
	5785	0.32	-4.95	2.22	3.67	30
	5825	0.45	-5.05	2.22	3.75	30
802.11n-HT40	5755	-4.14	-9.10	2.22	-0.72	30
	5795	-4.07	-9.09	2.22	-0.66	30
802.11ac-VHT 20	5745	0.17	-4.98	2.22	3.55	30
	5785	0.33	-5.01	2.22	3.66	30
	5825	0.32	-5.19	2.22	3.62	30
802.11ac-VHT 40	5755	-4.12	-9.13	2.22	-0.71	30
	5795	-3.83	-9.01	2.22	-0.46	30
802.11ac-VHT 80	5775	-9.17	-13.20	2.22	-5.5	30
802.11ax-HE2 0	5745	0.20	-4.60	2.22	3.66	30
	5785	0.66	-3.30	2.22	4.35	30
	5825	1.20	-3.79	2.22	4.62	30
802.11ax-HE4 0	5755	-1.56	-6.16	2.22	1.95	30
	5795	-1.39	-6.23	2.22	2.06	30
802.11ax-HE8 0	5775	-3.57	-6.92	2.22	0.3	30
*Note: Maximum PSD=PSD(dBm/300kHz)+10log(500kHz/300kHz)=2.22						




ANT 0
5150-5250MHz




802.11a-Low	Date: 23.NOV.2024 14:28:51
802.11a-Middle	Date: 23.NOV.2024 14:28:28
802.11a-High	Date: 23.NOV.2024 14:28:07

Channel	Frequency (GHz)	Power (dBm)	Bandwidth (MHz)	Span (MHz)	Resolution (MHz)	Marker 1 [T1]
802.11n-HT20-Low	5.18	-0.80	3	40	1	5.183520000
802.11n-HT20-Middle	5.203680000	-0.58	3	40	1	5.203680000
802.11n-HT20-High	5.243840000	0.04	3	40	1	5.243840000

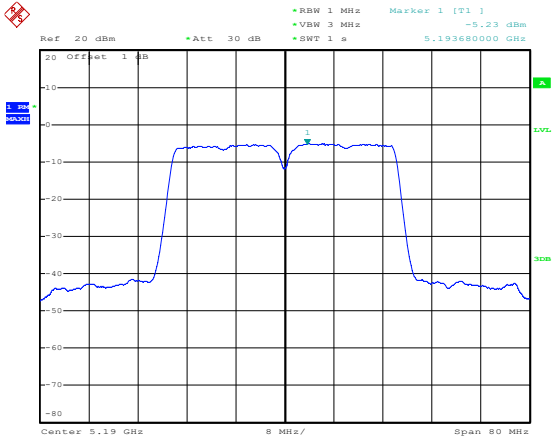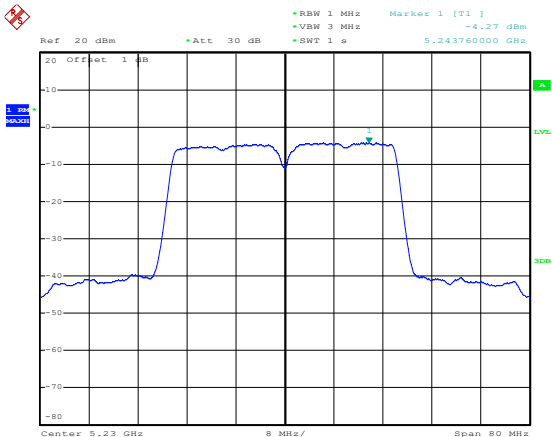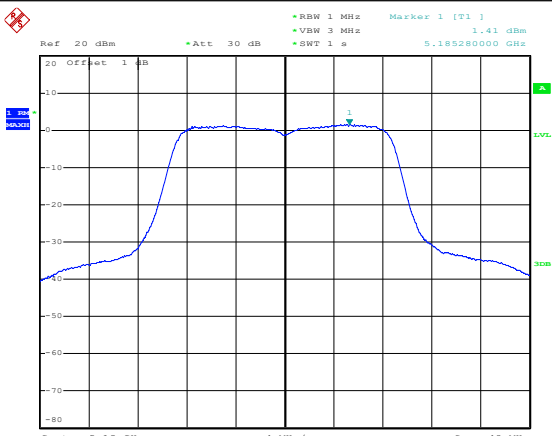802.11n-HT40-Low	 Ref 20 dBm *Att 30 dB *RBW 1 MHz Marker 1 [T1] -5.23 dBm *VBW 3 MHz *SWT 1 s 5.193680000 GHz Center 5.19 GHz 8 MHz/ Span 80 MHz Date: 23.NOV.2024 14:26:15
802.11n-HT40-High	 Ref 20 dBm *Att 30 dB *RBW 1 MHz Marker 1 [T1] -4.27 dBm *VBW 3 MHz *SWT 1 s 5.243760000 GHz Center 5.23 GHz 8 MHz/ Span 80 MHz Date: 23.NOV.2024 14:25:51
802.11ac-VHT20-Low	 Ref 20 dBm *Att 30 dB *RBW 1 MHz Marker 1 [T1] 1.41 dBm *VBW 3 MHz *SWT 1 s 5.185280000 GHz Center 5.18 GHz 4 MHz/ Span 40 MHz Date: 20.NOV.2024 17:09:58

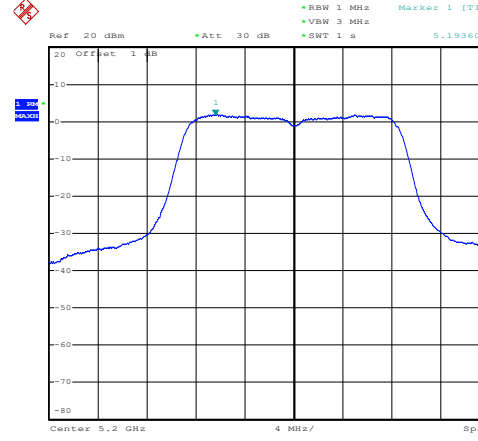
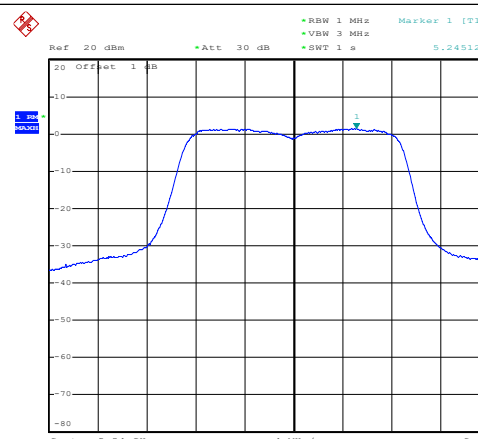
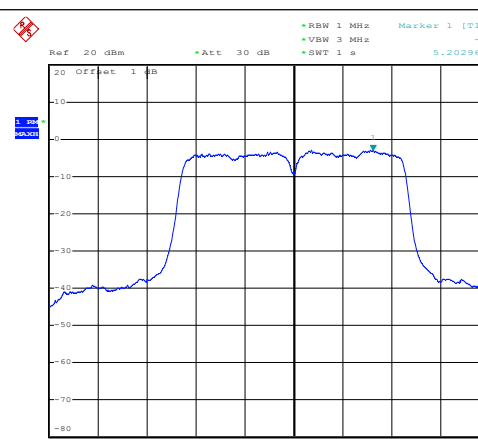
802.11ac-VHT20-Middle	 Date: 20.NOV.2024 17:09:33
802.11ac-VHT20-High	 Date: 20.NOV.2024 17:09:06
802.11ac-VHT40-Low	 Date: 20.NOV.2024 17:06:47

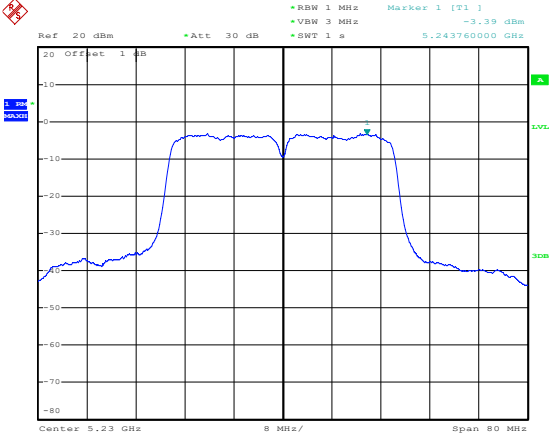
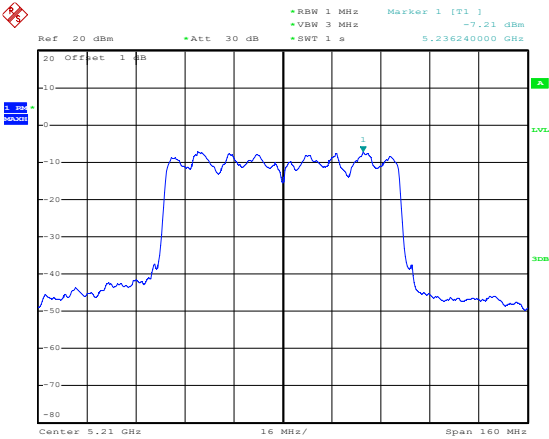
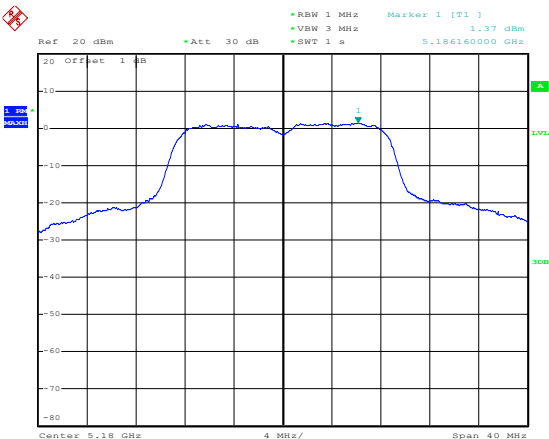
802.11ac-VHT40-High	 Ref 20 dBm *Att 30 dB *RBW 1 MHz Marker 1 [T1] -3.39 dBm *VBW 3 MHz *SWT 1 s 5.243760000 GHz 20 Offset 1 dB Center 5.23 GHz 8 MHz/ Span 80 MHz Date: 20.NOV.2024 17:06:15
802.11ac-VHT80	 Ref 20 dBm *Att 30 dB *RBW 1 MHz Marker 1 [T1] -7.21 dBm *VBW 3 MHz *SWT 1 s 5.236240000 GHz 20 Offset 1 dB Center 5.21 GHz 16 MHz/ Span 160 MHz Date: 20.NOV.2024 17:05:38
802.11ax-HE20-Low	 Ref 20 dBm *Att 30 dB *RBW 1 MHz Marker 1 [T1] 1.37 dBm *VBW 3 MHz *SWT 1 s 5.186160000 GHz 20 Offset 1 dB Center 5.18 GHz 4 MHz/ Span 40 MHz Date: 21.NOV.2024 11:13:25

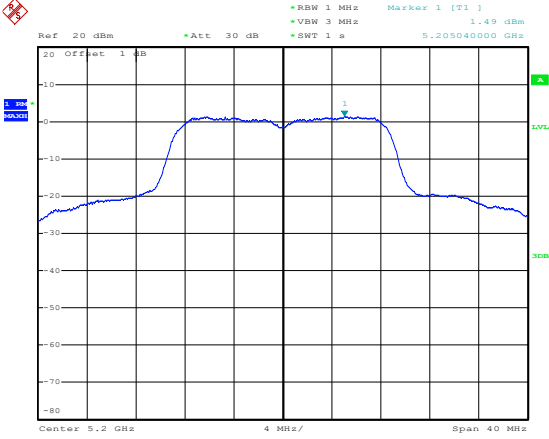
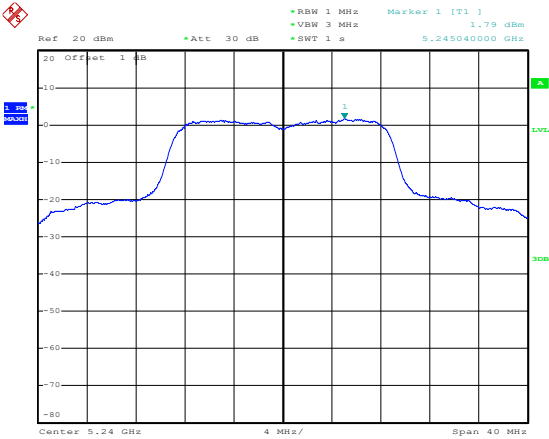
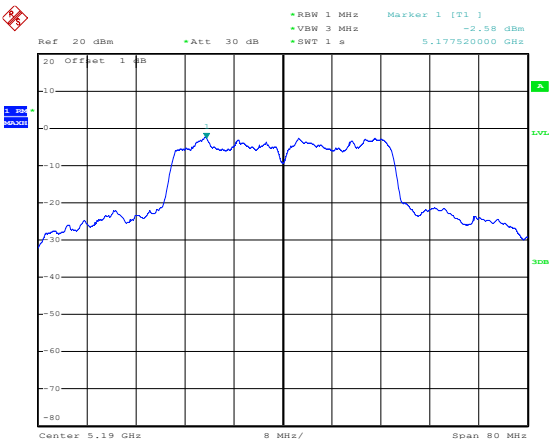
802.11ax-HE20-Middle	 Date: 21.NOV.2024 11:12:59
802.11ax-HE20-High	 Date: 21.NOV.2024 11:12:33
802.11ax-HE40-Low	 Date: 21.NOV.2024 11:11:22




802.11ax-HE40-High	Date: 21.NOV.2024 11:11:50
802.11ax-HE80	Date: 21.NOV.2024 11:10:41

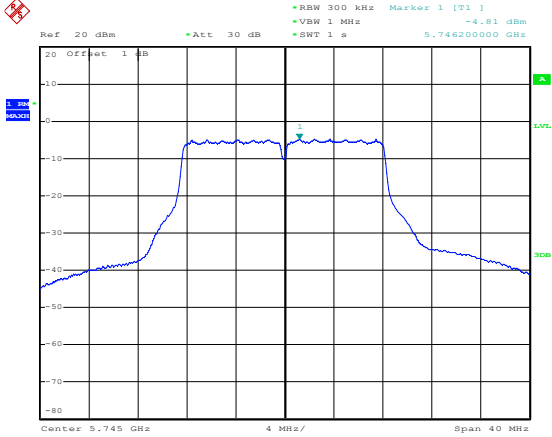
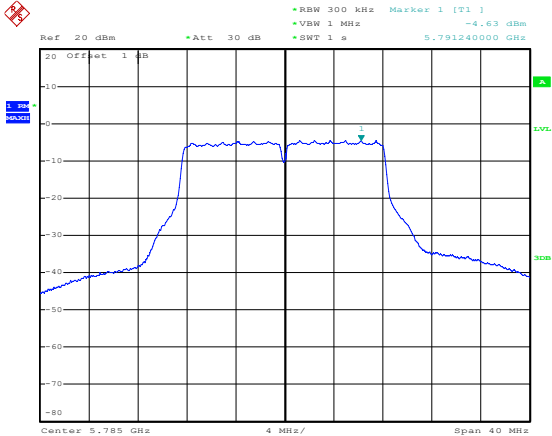
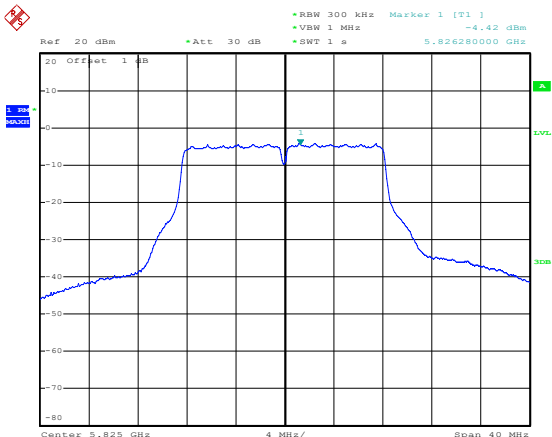
5725-5850MHz




802.11a-Low	 Ref: 20 dBm *Att: 30 dB *RBW: 300 kHz Marker 1 [T1] -4.81 dBm *VBW: 1 MHz *SWT: 1 s 5.74620000 GHz Center: 5.745 GHz 4 MHz/ Span: 40 MHz Date: 23.NOV.2024 11:35:11
802.11a-Middle	 Ref: 20 dBm *Att: 30 dB *RBW: 300 kHz Marker 1 [T1] -4.63 dBm *VBW: 1 MHz *SWT: 1 s 5.78124000 GHz Center: 5.785 GHz 4 MHz/ Span: 40 MHz Date: 23.NOV.2024 11:34:47
802.11a-High	 Ref: 20 dBm *Att: 30 dB *RBW: 300 kHz Marker 1 [T1] -4.42 dBm *VBW: 1 MHz *SWT: 1 s 5.82628000 GHz Center: 5.825 GHz 4 MHz/ Span: 40 MHz Date: 23.NOV.2024 11:34:23

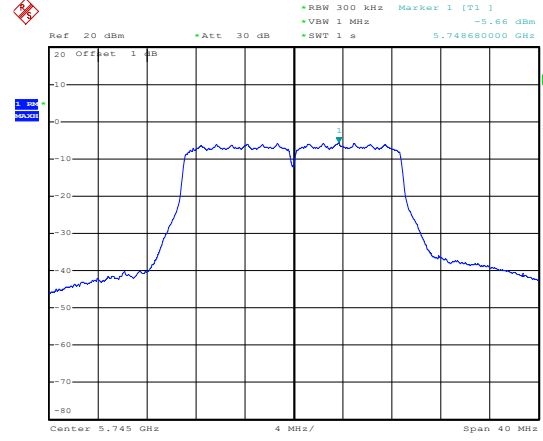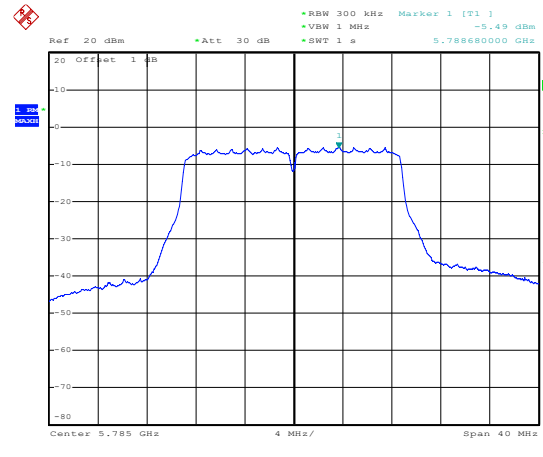
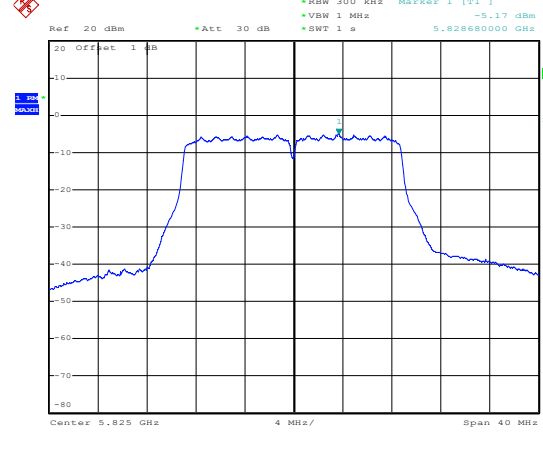
Channel	Plot	Ref	Att	RBW	VBW	SWT	Marker	Value
802.11n-HT20-Low		20 dBm	30 dB	300 kHz	1 MHz	1 s	Marker 1 [T1]	-5.66 dBm
802.11n-HT20-Middle		20 dBm	30 dB	300 kHz	1 MHz	1 s	Marker 1 [T1]	-5.49 dBm
802.11n-HT20-High		20 dBm	30 dB	300 kHz	1 MHz	1 s	Marker 1 [T1]	-5.17 dBm

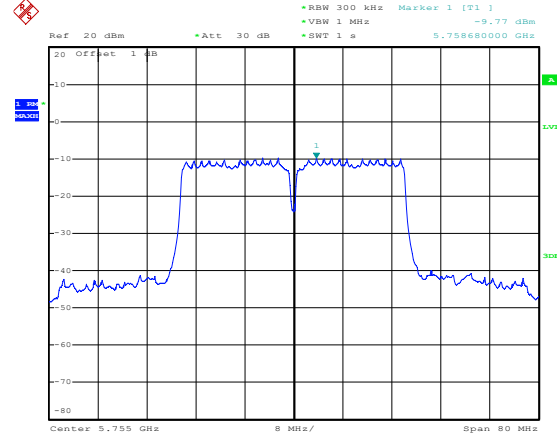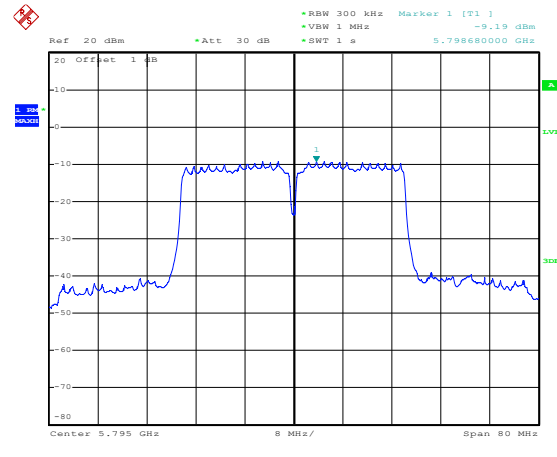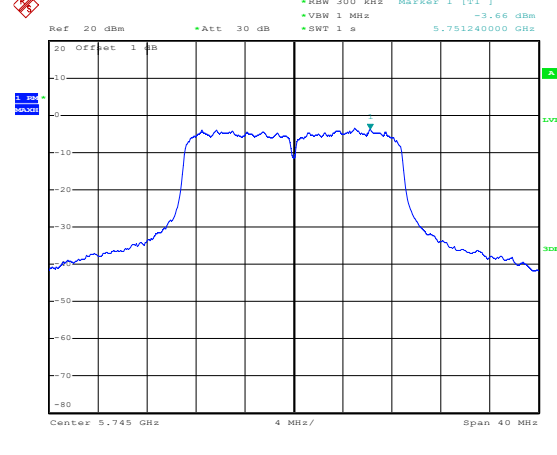Configuration	Plot Description	Date
802.11n-HT40-Low		23.NOV.2024 11:32:40
802.11n-HT40-High		23.NOV.2024 11:32:16
802.11ac-VHT20-Low		20.NOV.2024 18:50:35

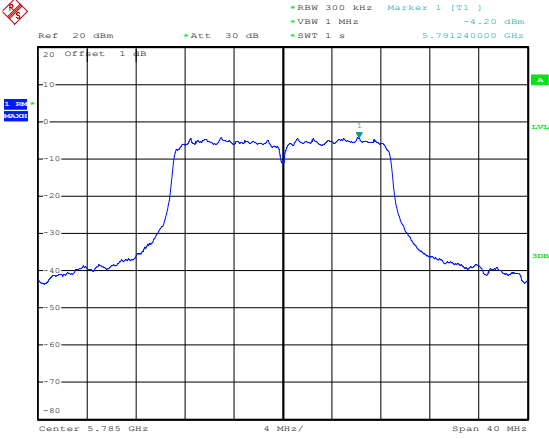
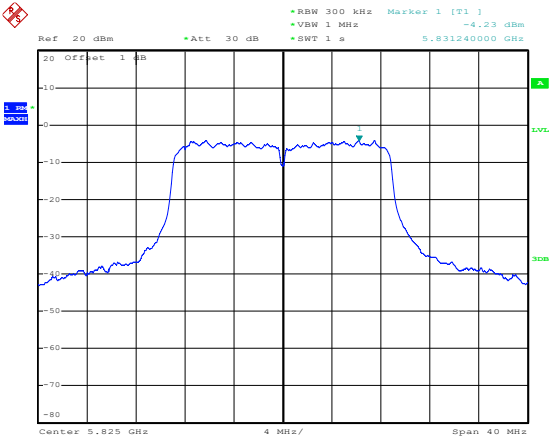
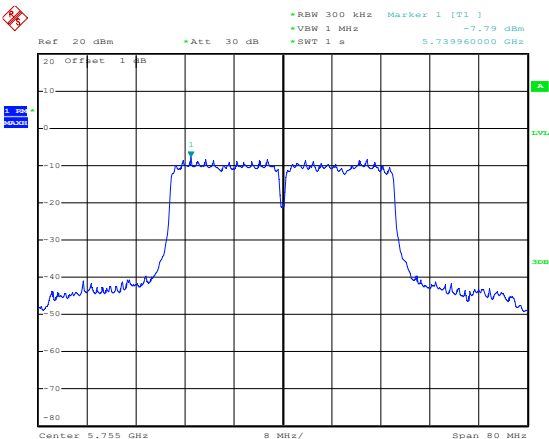
802.11ac-VHT20-Middle	 Ref: 20 dBm, Att: 30 dB, RBW: 300 kHz, VSW: 1 MHz, SWT: 1 s, Marker 1 [T1]: -4.20 dBm, 5.791240000 GHz Center: 5.785 GHz, Span: 40 MHz Date: 20.NOV.2024 18:50:09
802.11ac-VHT20-High	 Ref: 20 dBm, Att: 30 dB, RBW: 300 kHz, VSW: 1 MHz, SWT: 1 s, Marker 1 [T1]: -4.23 dBm, 5.831240000 GHz Center: 5.825 GHz, Span: 40 MHz Date: 20.NOV.2024 18:49:45
802.11ac-VHT40-Low	 Ref: 20 dBm, Att: 30 dB, RBW: 300 kHz, VSW: 1 MHz, SWT: 1 s, Marker 1 [T1]: -7.79 dBm, 5.739960000 GHz Center: 5.755 GHz, Span: 80 MHz Date: 20.NOV.2024 18:48:01

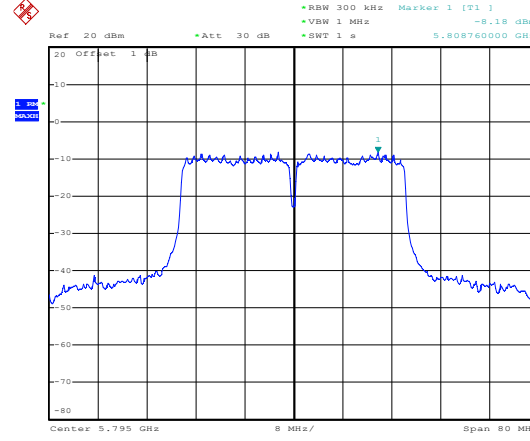
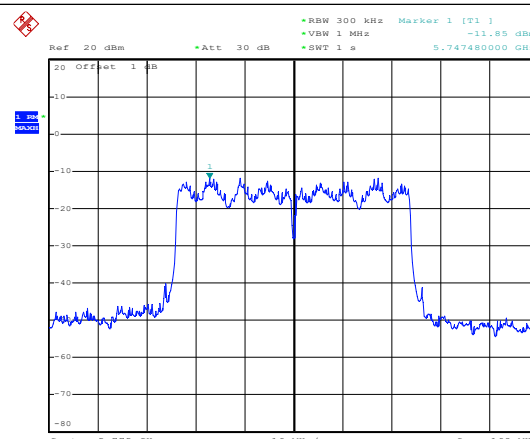
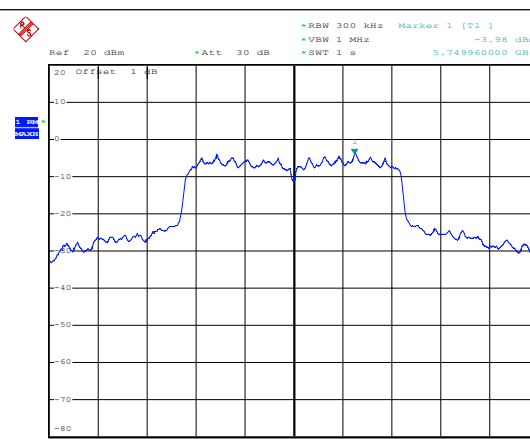
802.11ac-VHT40-High	 Date: 20.NOV.2024 18:47:32
802.11ac-VHT80	 Date: 20.NOV.2024 18:45:39
802.11ax-HE20-Low	 Date: 21.NOV.2024 13:57:38

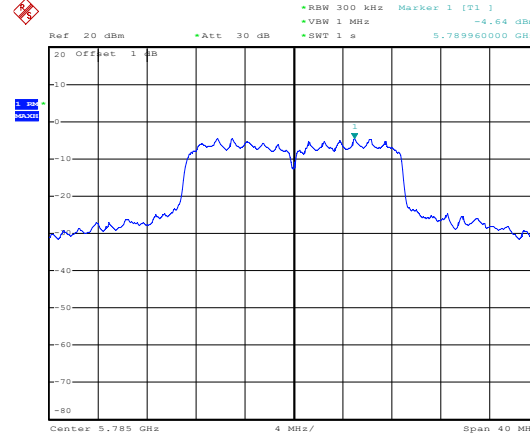
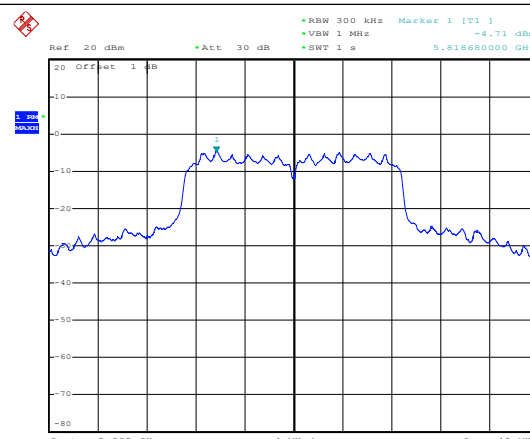
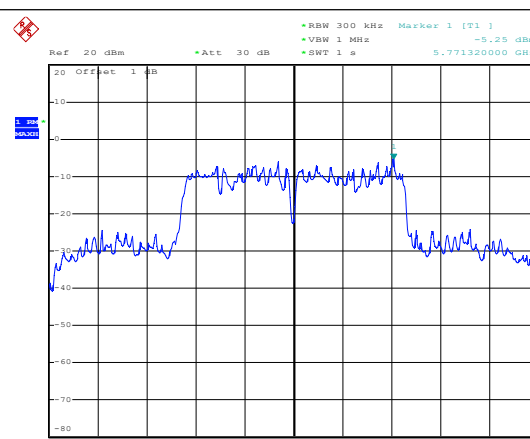
802.11ax-HE20-Middle	 Ref: 20 dBm, Att: 30 dB, RBW: 300 kHz, VBW: 1 MHz, SWT: 1 s, Marker 1 [T1]: -4.64 dBm, 5.78560000 GHz Center: 5.785 GHz, Span: 40 MHz, 4 MHz/div Date: 21.NOV.2024 13:57:11
802.11ax-HE20-High	 Ref: 20 dBm, Att: 30 dB, RBW: 300 kHz, VBW: 1 MHz, SWT: 1 s, Marker 1 [T1]: -4.71 dBm, 5.82560000 GHz Center: 5.825 GHz, Span: 40 MHz, 4 MHz/div Date: 21.NOV.2024 13:56:44
802.11ax-HE40-Low	 Ref: 20 dBm, Att: 30 dB, RBW: 300 kHz, VBW: 1 MHz, SWT: 1 s, Marker 1 [T1]: -5.25 dBm, 5.791320000 GHz Center: 5.795 GHz, Span: 80 MHz, 8 MHz/div Date: 21.NOV.2024 13:55:37

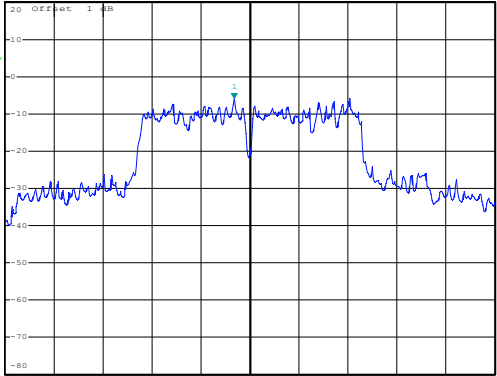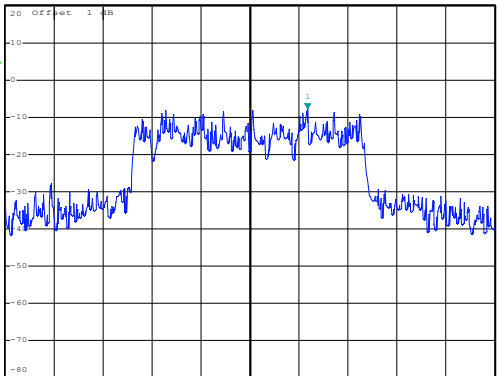802.11ax-HE40-High	Ref 20 dBm Offset 1 dB Att 30 dB RBW 300 kHz VBW 1 MHz SWT 1 s Marker 1 [T1] -5.93 dBm 5.792440000 GHz  Center 5.795 GHz 8 MHz/ Span 80 MHz Date: 21.NOV.2024 13:56:05
802.11ax-HE80	Ref 20 dBm Offset 1 dB Att 30 dB RBW 300 kHz VBW 1 MHz SWT 1 s Marker 1 [T1] -7.69 dBm 5.793880000 GHz  Center 5.775 GHz 16 MHz/ Span 160 MHz Date: 21.NOV.2024 13:53:50

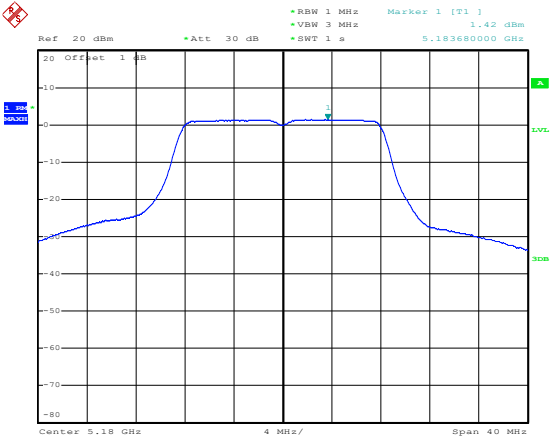
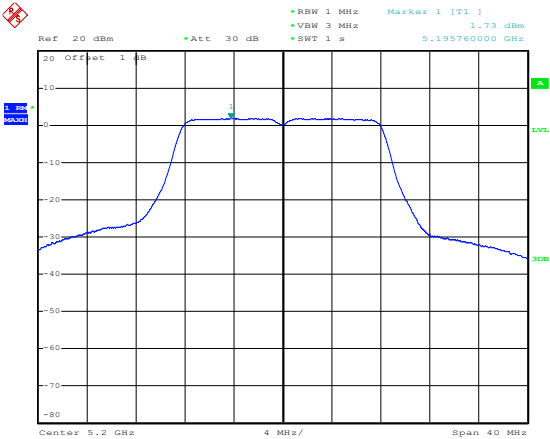
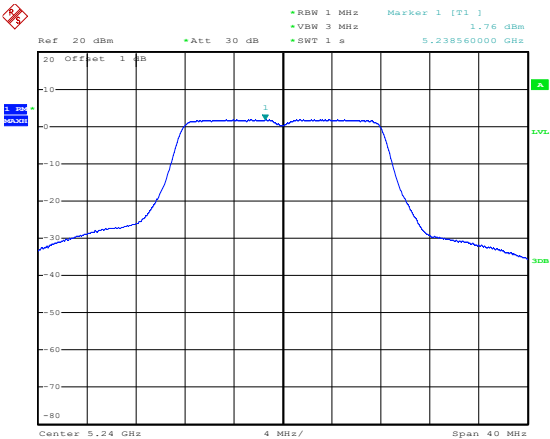
ANT 1
5150-5250MHz

802.11a-Low	 Date: 22.NOV.2024 17:33:45
802.11a-Middle	 Date: 22.NOV.2024 17:34:18
802.11a-High	 Date: 22.NOV.2024 17:34:46

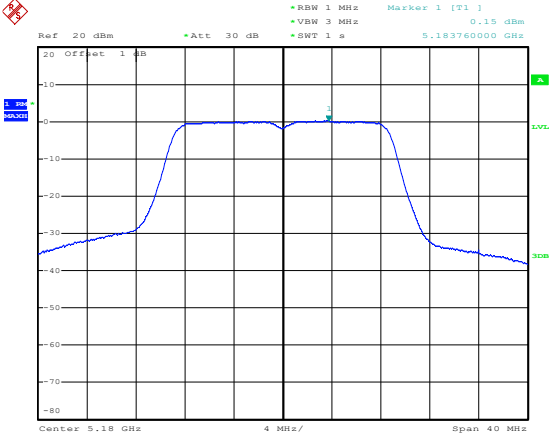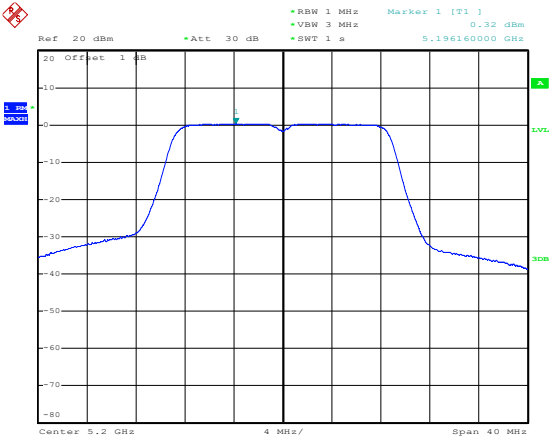
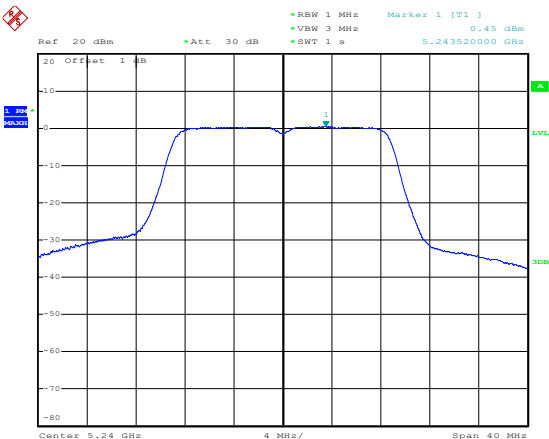
802.11n-HT20-Low	 Date: 22.NOV.2024 17:36:42
802.11n-HT20-Middle	 Date: 22.NOV.2024 17:36:15
802.11n-HT20-High	 Date: 22.NOV.2024 17:35:48

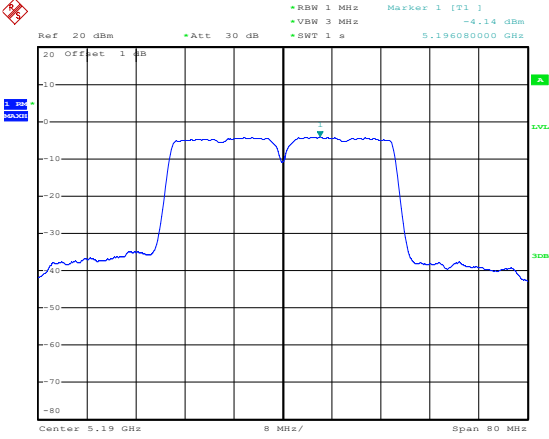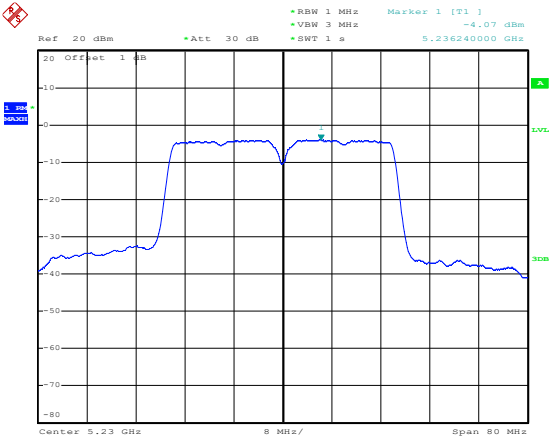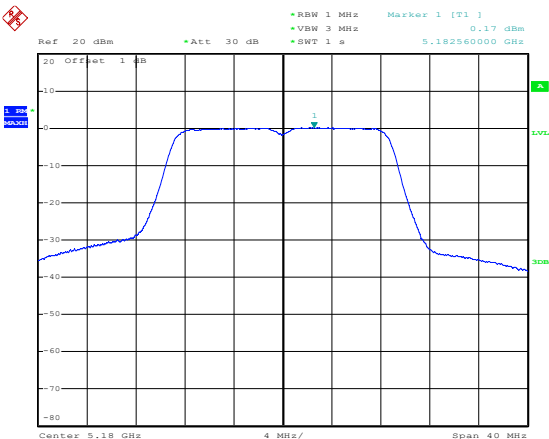802.11n-HT40-Low	 Ref 20 dBm *Att 30 dB *RBW 1 MHz Marker 1 [T1] -4.14 dBm *VBW 3 MHz *SWT 1 s 5.196980000 GHz 20 Offset 1 dB Center 5.19 GHz 8 MHz/ Span 80 MHz Date: 22.NOV.2024 17:39:08
802.11n-HT40-High	 Ref 20 dBm *Att 30 dB *RBW 1 MHz Marker 1 [T1] -4.07 dBm *VBW 3 MHz *SWT 1 s 5.236240000 GHz 20 Offset 1 dB Center 5.23 GHz 8 MHz/ Span 80 MHz Date: 22.NOV.2024 17:39:40
802.11ac-VHT20-Low	 Ref 20 dBm *Att 30 dB *RBW 1 MHz Marker 1 [T1] 0.17 dBm *VBW 3 MHz *SWT 1 s 5.182560000 GHz 20 Offset 1 dB Center 5.18 GHz 4 MHz/ Span 40 MHz Date: 22.NOV.2024 17:37:21

802.11ac-VHT20-Middle	Date: 22.NOV.2024 17:37:48
802.11ac-VHT20-High	Date: 22.NOV.2024 17:38:12
802.11ac-VHT40-Low	Date: 22.NOV.2024 17:40:41

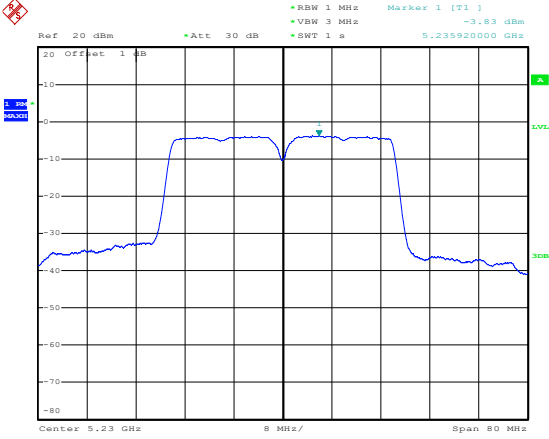
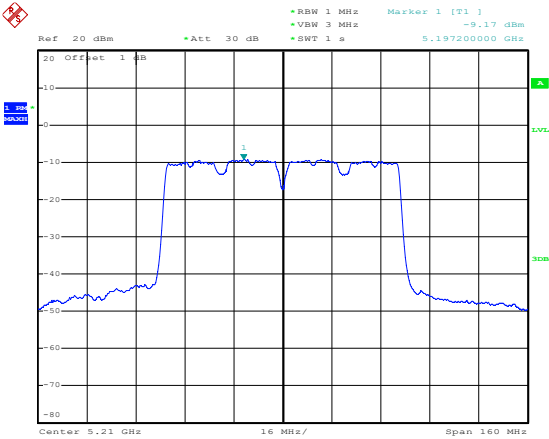
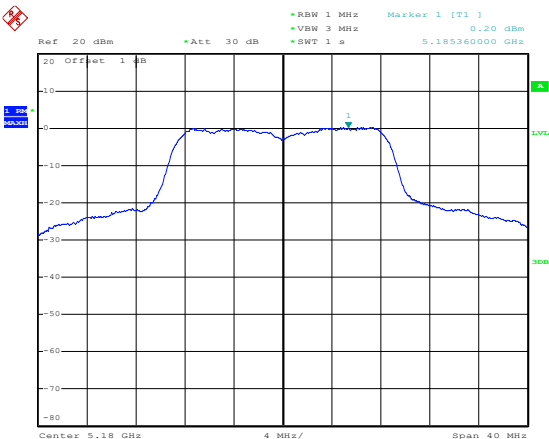
802.11ac-VHT40-High	 Date: 22.NOV.2024 17:40:10
802.11ac-VHT80	 Date: 22.NOV.2024 17:42:04
802.11ax-HE20-Low	 Date: 23.NOV.2024 10:17:36




Antenna	Frequency (GHz)	Power (dBm)	Span (MHz)	Resolution (MHz)	Bandwidth (MHz)	SWT	Date
802.11ax-HE20-Middle	5.20	0.66	40	1	3	1	23.NOV.2024 10:17:13
802.11ax-HE20-High	5.24	1.20	40	1	3	1	23.NOV.2024 10:16:51
802.11ax-HE40-Low	5.19	-1.56	80	1	3	1	23.NOV.2024 10:16:20


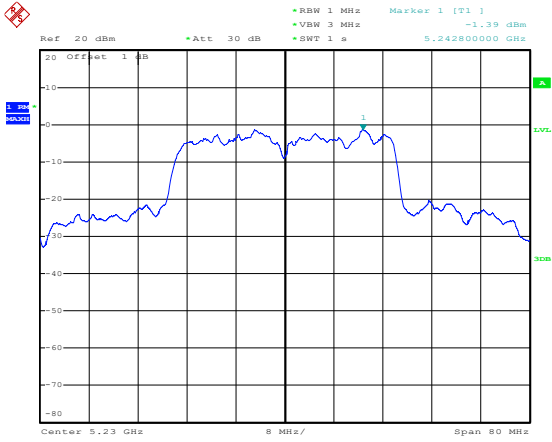
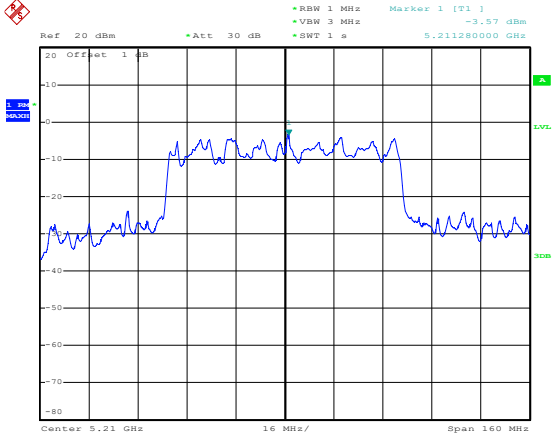
802.11ax-HE40-High	 Date: 23.NOV.2024 10:15:42
802.11ax-HE80	 Date: 23.NOV.2024 10:15:13




5725-5850MHz




802.11a-Low	Date: 23.NOV.2024 09:22:05
802.11a-Middle	Date: 23.NOV.2024 09:21:41
802.11a-High	Date: 23.NOV.2024 09:21:14

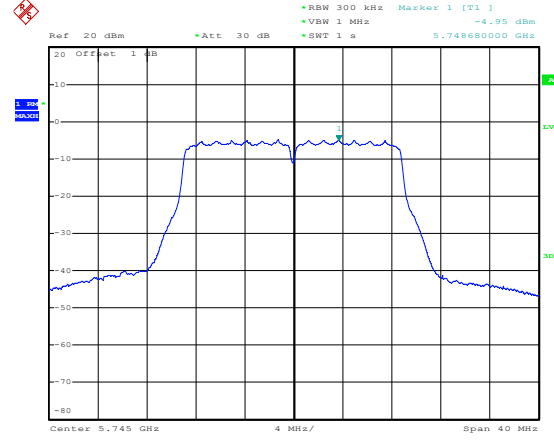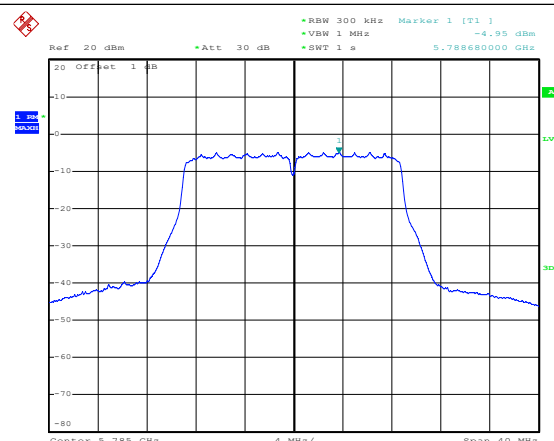
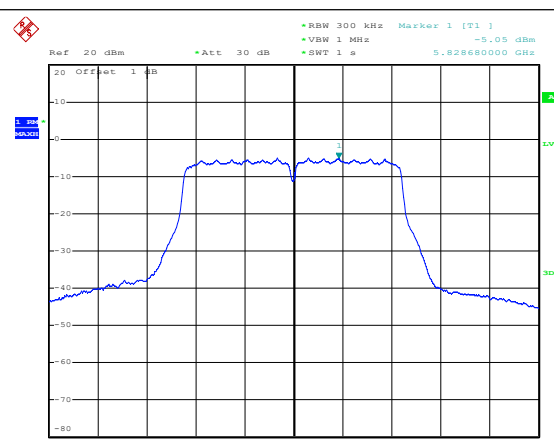
802.11n-HT20-Low	 Date: 23.NOV.2024 09:20:03
802.11n-HT20-Middle	 Date: 23.NOV.2024 09:20:29
802.11n-HT20-High	 Date: 23.NOV.2024 09:20:56

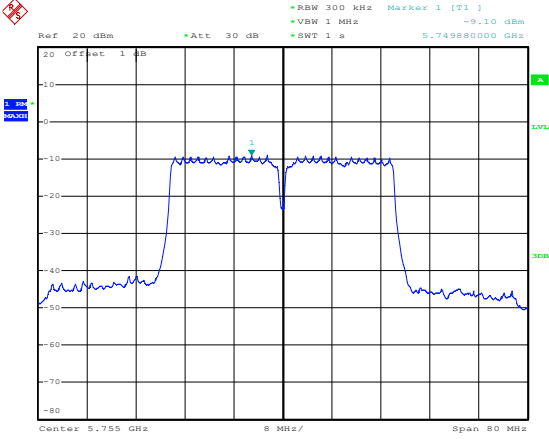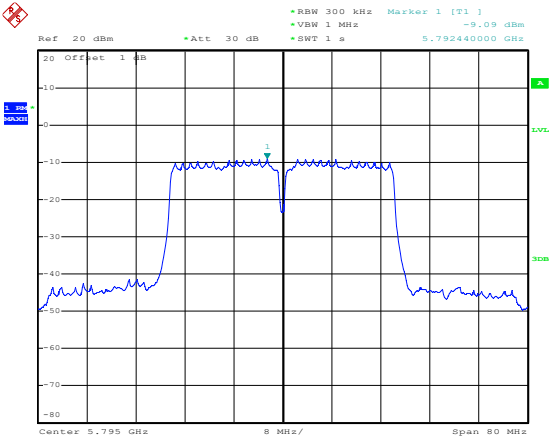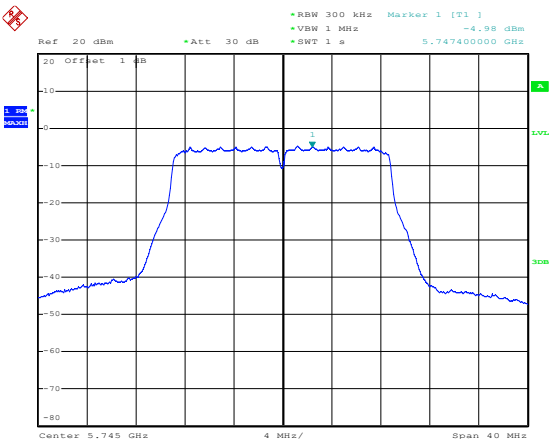802.11n-HT40-Low	 Date: 23.NOV.2024 09:17:40
802.11n-HT40-High	 Date: 23.NOV.2024 09:18:07
802.11ac-VHT20-Low	 Date: 23.NOV.2024 09:19:40

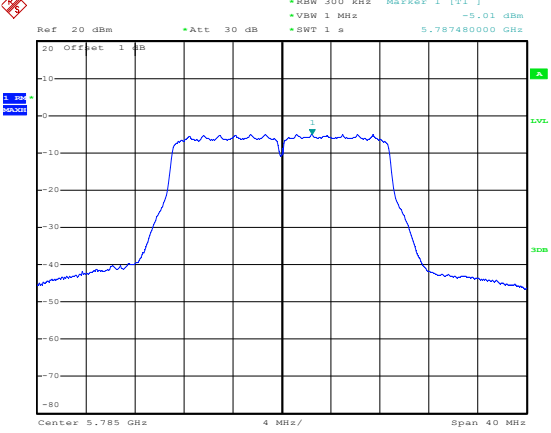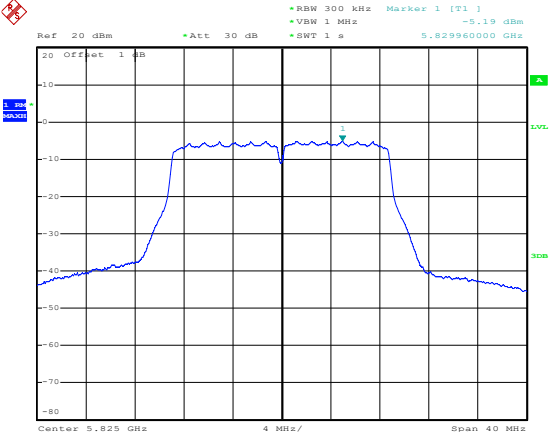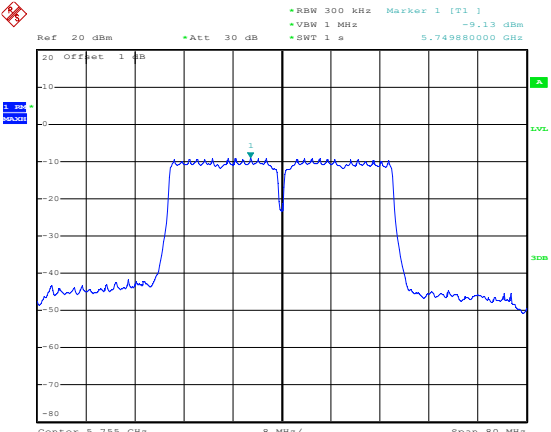802.11ac-VHT20-Middle	 Date: 23.NOV.2024 09:19:13
802.11ac-VHT20-High	 Date: 23.NOV.2024 09:18:48
802.11ac-VHT40-Low	 Date: 23.NOV.2024 09:17:08

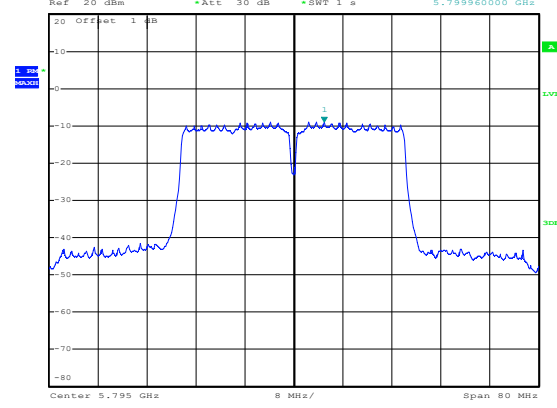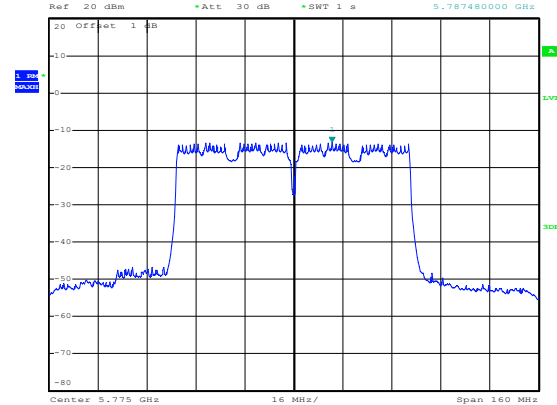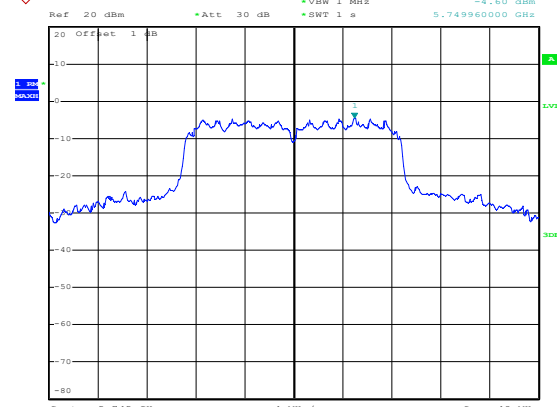Channel	Plot	Ref	Att	RBW	VBW	SWT	Marker 1 [T1]	Date
802.11ac-VHT40-High		20 dBm	30 dB	300 kHz	1 MHz	1 s	-9.01 dBm	23.NOV.2024 09:16:40
802.11ac-VHT80		20 dBm	30 dB	300 kHz	1 MHz	1 s	-13.20 dBm	23.NOV.2024 09:16:03
802.11ax-HE20-Low		20 dBm	30 dB	300 kHz	1 MHz	1 s	-4.60 dBm	23.NOV.2024 10:39:55

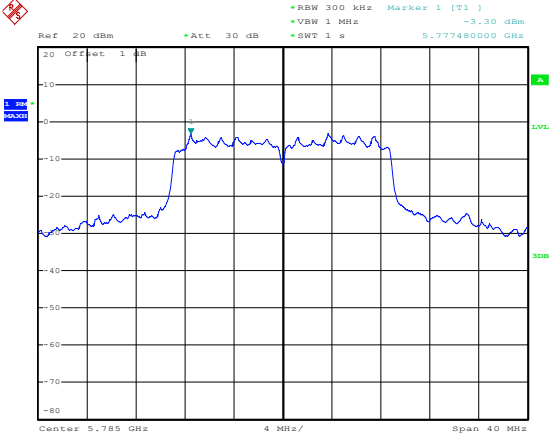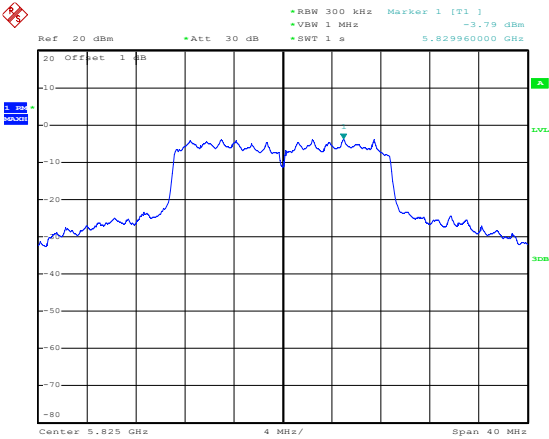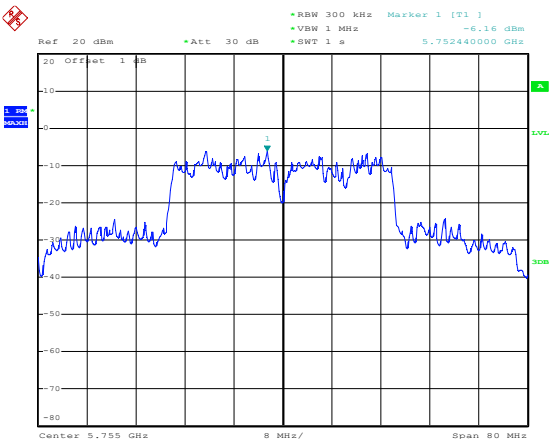802.11ax-HE20-Middle	 Date: 23.NOV.2024 10:39:15
802.11ax-HE20-High	 Date: 23.NOV.2024 10:38:52
802.11ax-HE40-Low	 Date: 23.NOV.2024 10:38:25

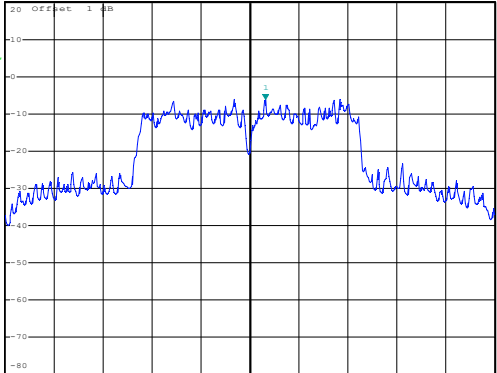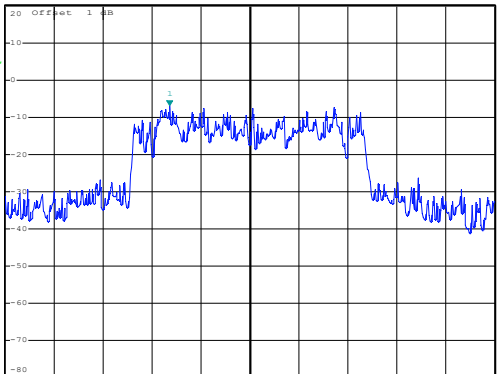802.11ax-HE40-High	Ref 20 dBm Offset 1 dB Att 30 dB RBW 300 kHz Marker 1 [T1] VBW 1 MHz -6.33 dBm SWT 1 s 5.797560000 GHz  Center 5.795 GHz 8 MHz/ Span 80 MHz Date: 23.NOV.2024 10:38:01
802.11ax-HE80	Ref 20 dBm Offset 1 dB Att 30 dB RBW 300 kHz Marker 1 [T1] VBW 1 MHz -6.92 dBm SWT 1 s 5.748760000 GHz  Center 5.775 GHz 16 MHz/ Span 160 MHz Date: 23.NOV.2024 10:37:40

APPENDIX B

Emission Bandwidth and Occupied Bandwidth



U-NII-1:5150-5250MHz						
Test Mode	Test Channel MHz	ANT 0		ANT 1		Result
		26 dB Bandwidth MHz	99% Bandwidth MHz	26 dB Bandwidth MHz	99% Bandwidth MHz	
802.11a	5180	21.80	17.28	22.20	17.36	Pass
	5200	22.00	17.36	22.30	17.36	Pass
	5240	21.90	17.36	22.20	17.28	Pass
802.11n-HT20	5180	21.80	18.16	22.20	18.32	Pass
	5200	21.70	18.16	22.10	18.24	Pass
	5240	21.80	18.24	22.10	18.32	Pass
802.11n-HT40	5190	39.68	37.12	40.00	37.12	Pass
	5230	39.68	36.96	40.00	37.28	Pass
802.11ac-VHT20	5180	21.50	17.92	22.30	18.40	Pass
	5200	21.60	18.00	22.30	18.40	Pass
	5240	21.70	17.84	22.30	18.40	Pass
802.11ac-VHT40	5190	40.40	37.12	40.40	37.12	Pass
	5230	40.60	36.80	40.00	37.28	Pass
802.11ac-VHT80	5210	83.16	76.16	82.80	76.48	Pass
802.11ax-HE20	5180	40.60	24.50	32.80	23.00	Pass
	5200	38.24	24.40	38.72	23.90	Pass
	5240	39.20	26.16	34.88	26.76	Pass
802.11ax-HE40	5190	77.76	54.24	77.12	51.84	Pass
	5230	79.04	58.32	77.44	54.72	Pass
802.11ax-HE80	5210	128.40	105.16	132.60	106.92	Pass

U-NII-4: 5725-5850MHz						
Test Mode	Test Channel MHz	ANT 0		ANT 1		Limit kHz
		6 dB Bandwidth MHz	99% Bandwidth MHz	6 dB Bandwidth MHz	99% Bandwidth MHz	
802.11a	5745	16.64	17.44	16.64	17.36	≥500
	5785	16.64	17.28	16.72	17.28	≥500
	5825	16.72	17.36	16.72	17.36	≥500
802.11n-HT20	5745	17.92	18.24	17.92	18.24	≥500
	5785	17.92	18.24	17.92	18.16	≥500
	5825	17.92	18.16	17.92	18.16	≥500
802.11n-HT40	5755	36.96	37.44	36.80	36.96	≥500
	5795	36.80	37.28	36.80	37.12	≥500
802.11ac-VHT20	5745	17.36	18.08	17.92	18.24	≥500
	5785	17.52	17.92	17.92	18.24	≥500
	5825	16.96	17.92	17.92	18.24	≥500
802.11ac-VHT40	5755	36.48	37.44	36.96	36.96	≥500
	5795	35.52	37.28	36.64	36.96	≥500
802.11ac-VHT80	5775	76.16	76.16	77.44	76.48	≥500
802.11ax-HE20	5745	17.44	28.32	17.20	28.80	≥500
	5785	17.60	29.28	17.84	27.60	≥500
	5825	17.60	28.92	17.52	26.28	≥500
802.11ax-HE40	5755	35.68	59.52	36.00	58.56	≥500
	5795	35.68	56.88	35.84	55.68	≥500
802.11ax-HE80	5775	76.16	117.00	76.16	133.80	≥500



ANT 0

26 dB Bandwidth

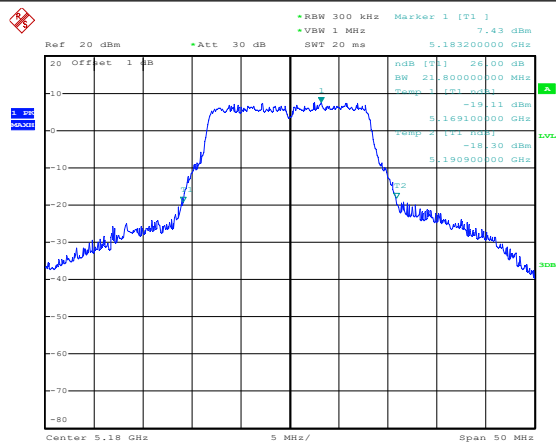

5150-5250MHz






Date: 23.NOV.2024 14:37:16

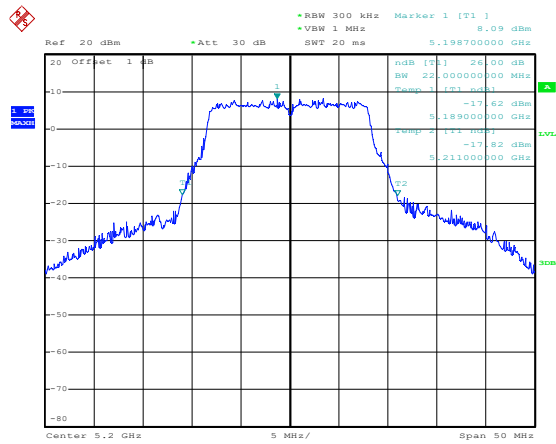

Date: 23.NOV.2024 14:36:50

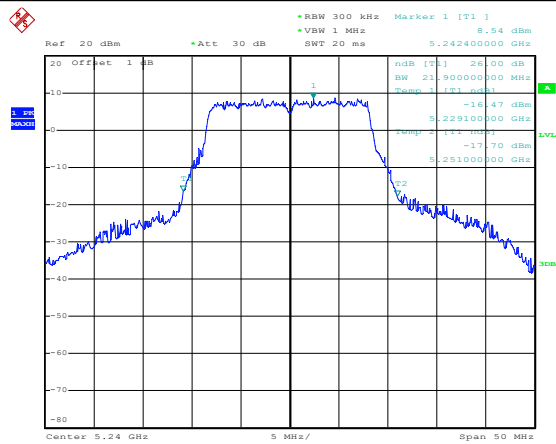

Date: 23.NOV.2024 14:36:24

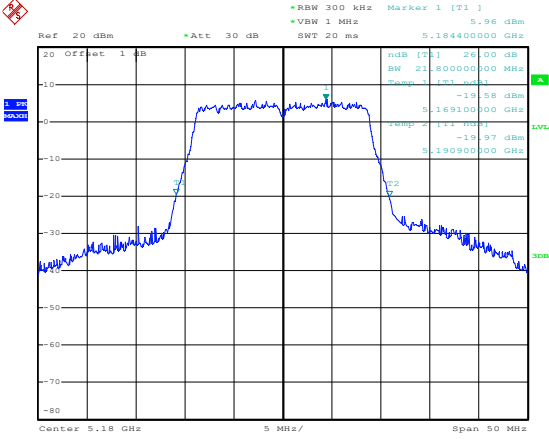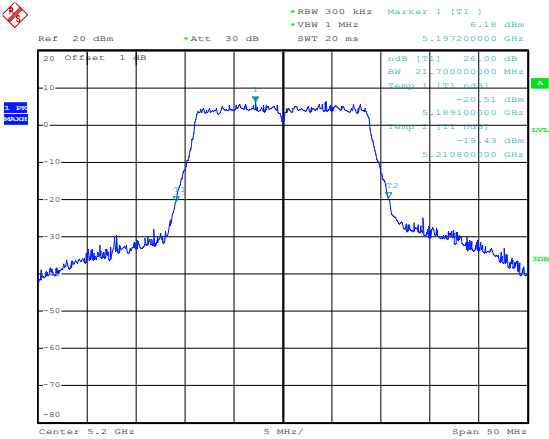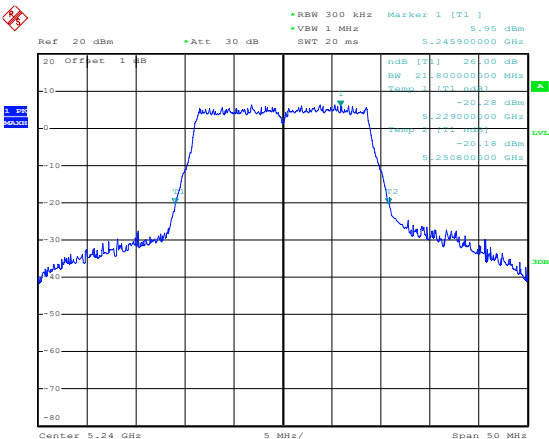802.11n-HT20-Low	 Ref 20 dBm *Att 30 dB SWT 20 ms Marker 1 [T1] 5.96 dBm 5.184400000 GHz 20 Offset 1 dB dB [T1] 20.00 dB SW 21.800000000 MHz Temp 1 [T1] 0.00 -19.58 dBm 5.169100000 GHz -19.97 dBm 5.190900000 GHz Center 5.18 GHz 5 MHz/ Span 50 MHz Date: 23.NOV.2024 14:34:55
802.11n-HT20-Middle	 Ref 20 dBm *Att 30 dB SWT 20 ms Marker 1 [T1] 6.18 dBm 5.197200000 GHz 20 Offset 1 dB dB [T1] 20.00 dB SW 21.700000000 MHz Temp 1 [T1] 0.00 -20.51 dBm 5.189100000 GHz -19.43 dBm 5.210800000 GHz Center 5.2 GHz 5 MHz/ Span 50 MHz Date: 23.NOV.2024 14:35:28
802.11n-HT20-High	 Ref 20 dBm *Att 30 dB SWT 20 ms Marker 1 [T1] 5.95 dBm 5.245900000 GHz 20 Offset 1 dB dB [T1] 20.00 dB SW 21.800000000 MHz Temp 1 [T1] 0.00 -20.28 dBm 5.229000000 GHz -20.18 dBm 5.250800000 GHz Center 5.24 GHz 5 MHz/ Span 50 MHz Date: 23.NOV.2024 14:36:01

802.11n-HT40-Low

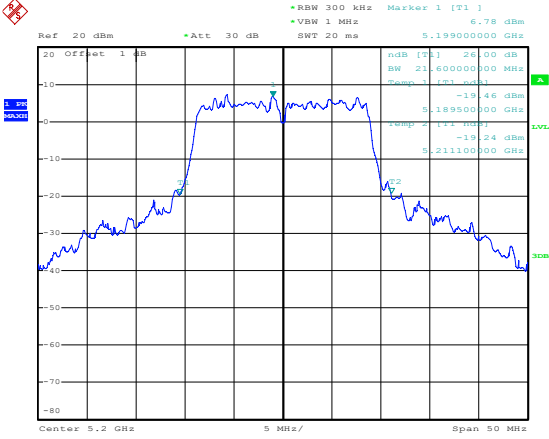
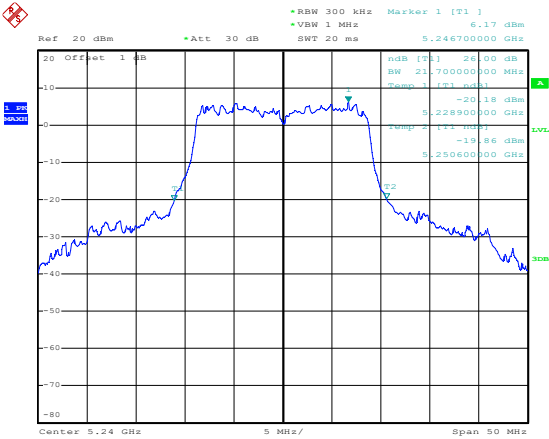
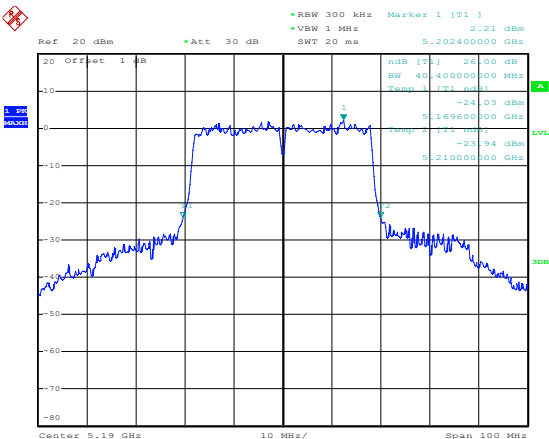
Ref: 20 dBm, Att: 30 dB, VBW: 1 MHz, RBW: 300 kHz, Span: 80 MHz, Center: 5.19 GHz. Marker 1 (T1) is at 5.193840000 GHz, 2.36 dBm. The plot shows a flat signal level around -23.51 dBm across the frequency range.




802.11n-HT40-High




Ref: 20 dBm, Att: 30 dB, VBW: 1 MHz, RBW: 300 kHz, Span: 80 MHz, Center: 5.23 GHz. Marker 1 (T1) is at 5.234160000 GHz, 3.38 dBm. The plot shows a flat signal level around -23.11 dBm across the frequency range.

802.11ac-VHT20-Low



Ref: 20 dBm, Att: 30 dB, VBW: 1 MHz, RBW: 300 kHz, Span: 50 MHz, Center: 5.18 GHz. Marker 1 (T1) is at 5.175600000 GHz, 6.53 dBm. The plot shows a signal level around -19.57 dBm across the frequency range.

802.11ac-VHT20-Middle	 Date: 20.NOV.2024 17:25:36
802.11ac-VHT20-High	 Date: 20.NOV.2024 17:25:12
802.11ac-VHT40-Low	 Date: 20.NOV.2024 17:23:49

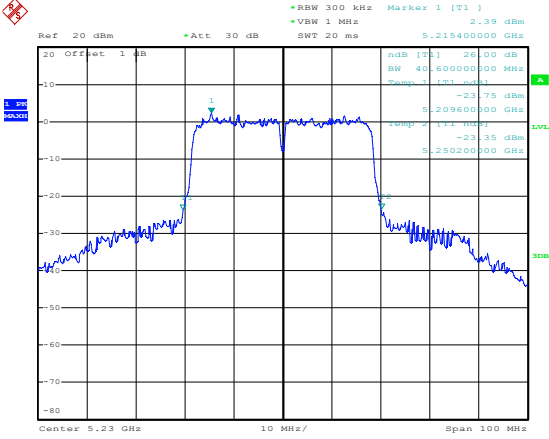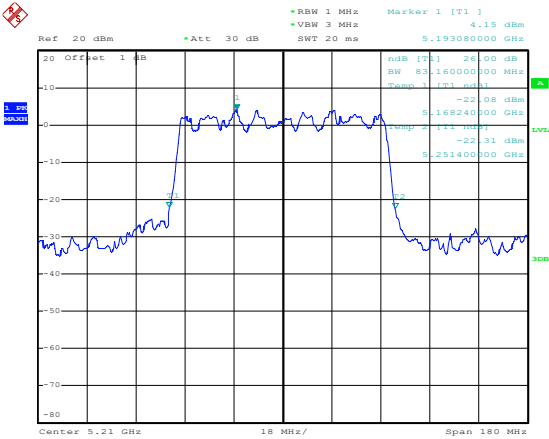
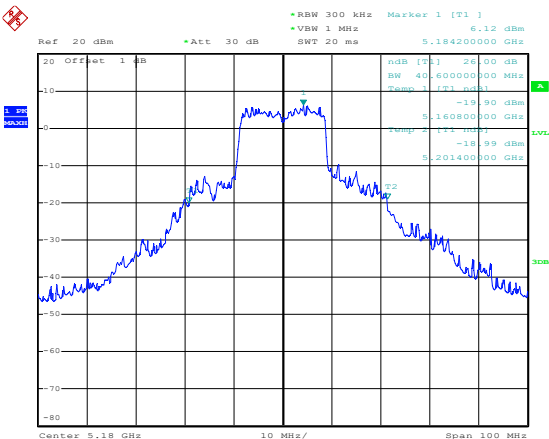
802.11ac-VHT40-High	 Ref 20 dBm *Att 30 dB SWT 20 ms Marker 1 [T1] 2.39 dBm 5.215400000 GHz ndB [T1] 26.00 dB BW 40.60000000 MHz Temp 1 [T1] ndB -23.75 dBm 5.209600000 GHz -23.35 dBm 5.250200000 GHz Center 5.23 GHz 10 MHz/ Span 100 MHz Date: 20.NOV.2024 17:23:22
802.11ac-VHT80	 Ref 20 dBm *Att 30 dB SWT 20 ms Marker 1 [T1] 4.15 dBm 5.193080000 GHz ndB [T1] 26.00 dB BW 83.16000000 MHz Temp 1 [T1] ndB -22.08 dBm 5.168240000 GHz -22.31 dBm 5.251400000 GHz Center 5.21 GHz 18 MHz/ Span 180 MHz Date: 20.NOV.2024 17:22:35
802.11ax-HE20-Low	 Ref 20 dBm *Att 30 dB SWT 20 ms Marker 1 [T1] 6.12 dBm 5.184200000 GHz ndB [T1] 26.00 dB BW 40.60000000 MHz Temp 1 [T1] ndB -19.90 dBm 5.160800000 GHz -18.99 dBm 5.201400000 GHz Center 5.18 GHz 10 MHz/ Span 100 MHz Date: 21.NOV.2024 11:28:01

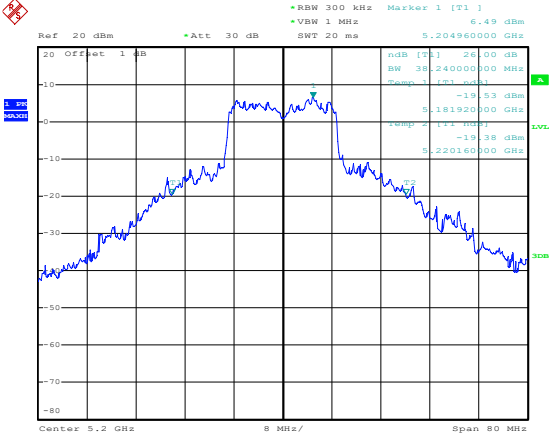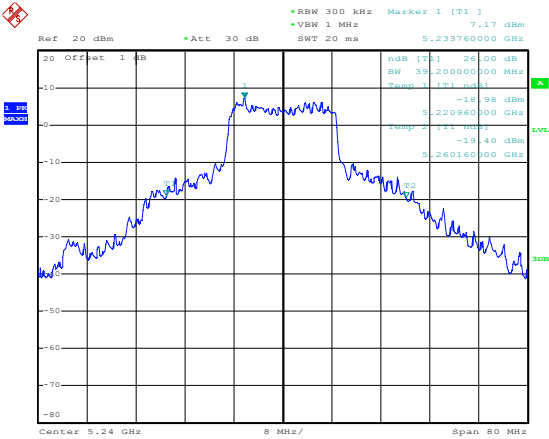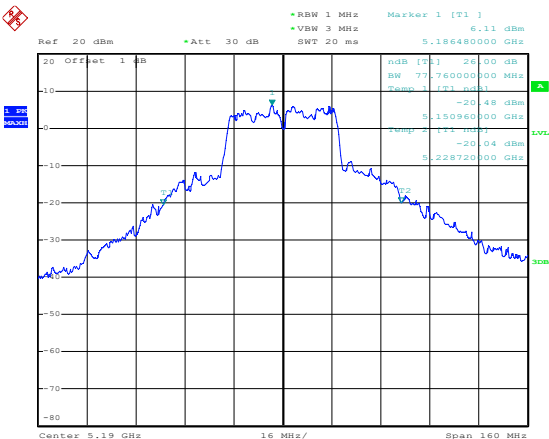802.11ax-HE20-Middle	 Date: 21.NOV.2024 11:27:04
802.11ax-HE20-High	 Date: 21.NOV.2024 11:26:38
802.11ax-HE40-Low	 Date: 21.NOV.2024 11:22:27





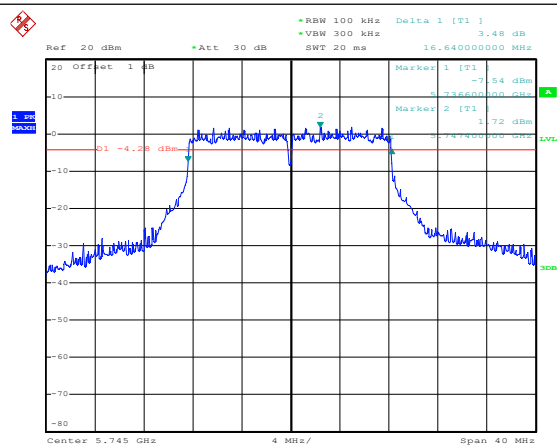




Date: 23.NOV.2024 14:01:50


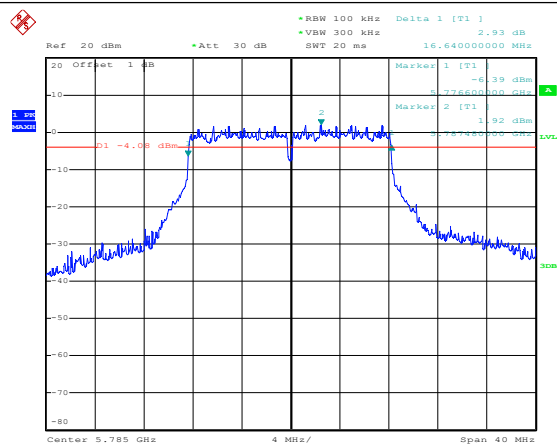






Date: 23.NOV.2024 14:00:57


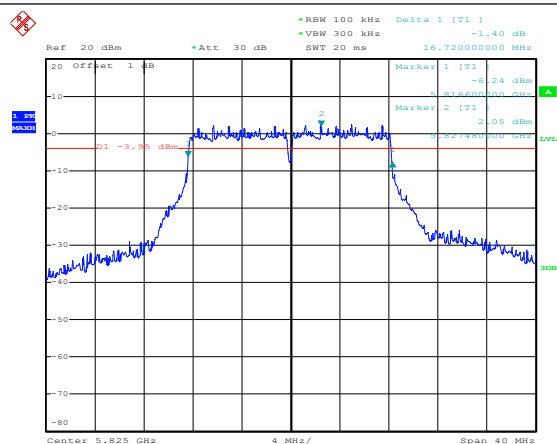






Date: 23.NOV.2024 14:00:10

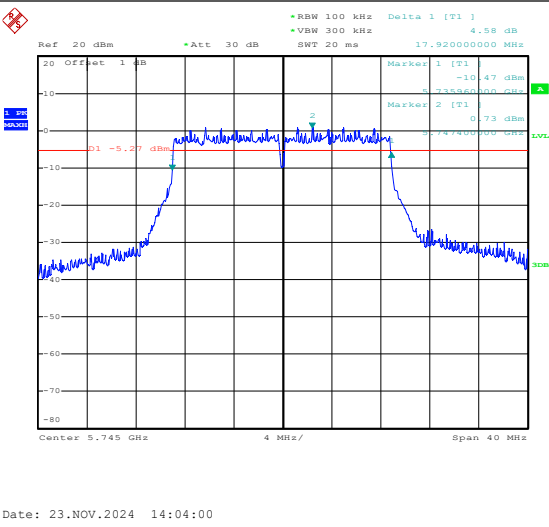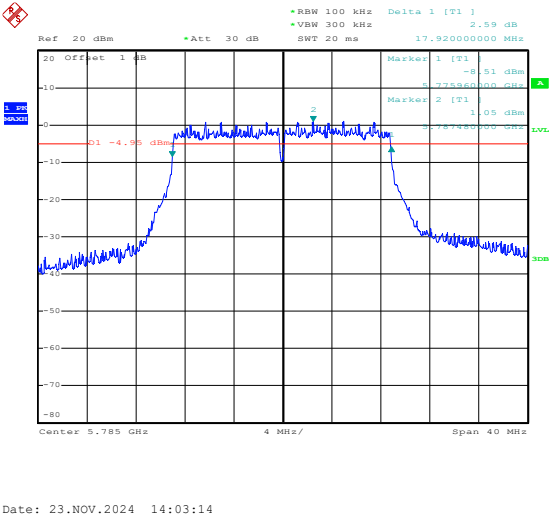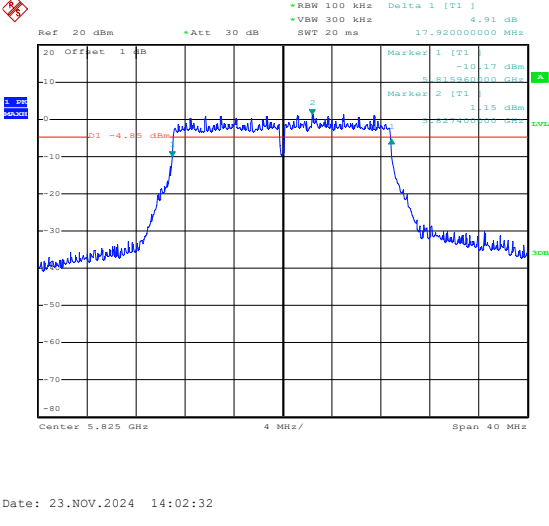802.11n-HT20-Low	 Ref 20 dBm *Att 30 dB RBW 100 kHz Delta 1 [T1] 4.58 dB VSW 300 kHz SWT 20 ms 17.920000000 MHz Marker 1 [T1] -10.47 dBm Marker 2 [T1] -10.73 dBm D1 -5.27 dBm Center 5.745 GHz 4 MHz/ Span 40 MHz Date: 23.NOV.2024 14:04:00
802.11n-HT20-Middle	 Ref 20 dBm *Att 30 dB RBW 100 kHz Delta 1 [T1] 2.59 dB VSW 300 kHz SWT 20 ms 17.920000000 MHz Marker 1 [T1] -8.51 dBm Marker 2 [T1] -11.05 dBm D1 -4.95 dBm Center 5.785 GHz 4 MHz/ Span 40 MHz Date: 23.NOV.2024 14:03:14
802.11n-HT20-High	 Ref 20 dBm *Att 30 dB RBW 100 kHz Delta 1 [T1] 4.91 dB VSW 300 kHz SWT 20 ms 17.920000000 MHz Marker 1 [T1] -10.17 dBm Marker 2 [T1] -11.15 dBm D1 -4.85 dBm Center 5.825 GHz 4 MHz/ Span 40 MHz Date: 23.NOV.2024 14:02:32

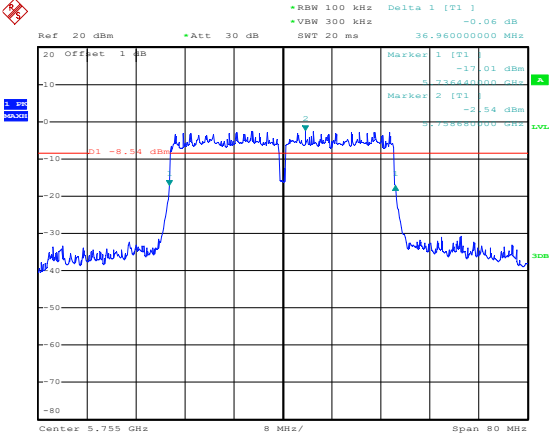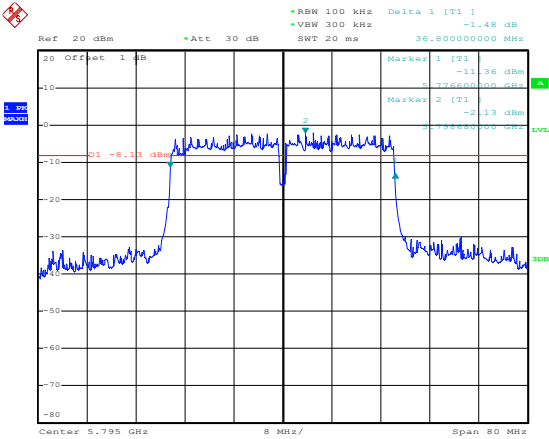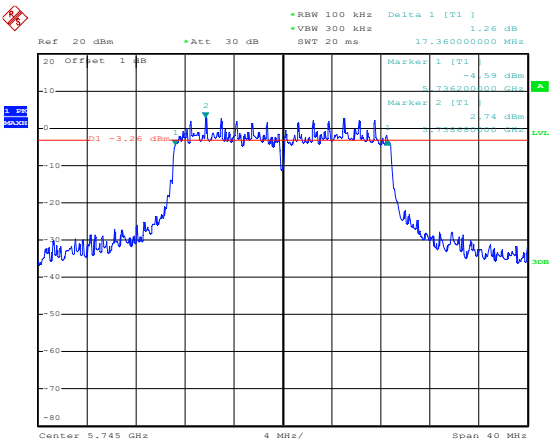802.11n-HT40-Low	 Date: 23.NOV.2024 14:04:46
802.11n-HT40-High	 Date: 23.NOV.2024 14:05:29
802.11ac-VHT20-Low	 Date: 20.NOV.2024 19:16:45

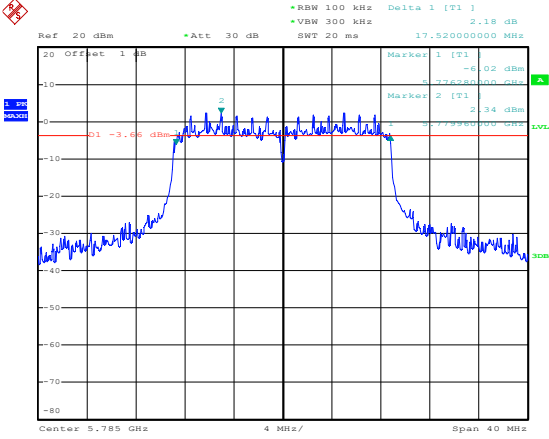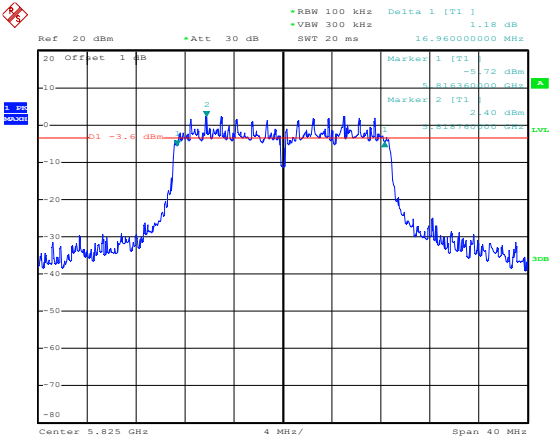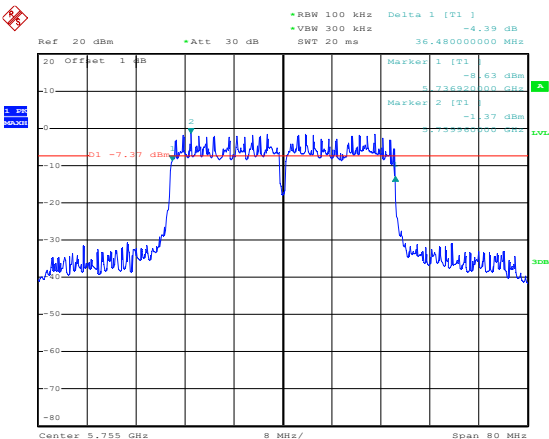802.11ac-VHT20-Middle	 Ref 20 dBm *Att 30 dB RBW 100 kHz Delta 1 [T1] 2.18 dB VSW 300 kHz SWT 20 ms 17.52000000 MHz Marker 1 [T1] -6.02 dBm 5.78500000 GHz Marker 2 [T1] 2.34 dBm 5.78500000 GHz Center 5.785 GHz 4 MHz/ Span 40 MHz Date: 20.NOV.2024 19:16:00
802.11ac-VHT20-High	 Ref 20 dBm *Att 30 dB RBW 100 kHz Delta 1 [T1] 1.18 dB VSW 300 kHz SWT 20 ms 16.96000000 MHz Marker 1 [T1] -5.72 dBm 5.81600000 GHz Marker 2 [T1] 2.40 dBm 5.81600000 GHz Center 5.825 GHz 4 MHz/ Span 40 MHz Date: 20.NOV.2024 19:15:15
802.11ac-VHT40-Low	 Ref 20 dBm *Att 30 dB RBW 100 kHz Delta 1 [T1] -4.39 dB VSW 300 kHz SWT 20 ms 36.48000000 MHz Marker 1 [T1] -8.63 dBm 5.73600000 GHz Marker 2 [T1] -1.27 dBm 5.73600000 GHz Center 5.755 GHz 8 MHz/ Span 80 MHz Date: 20.NOV.2024 19:12:03

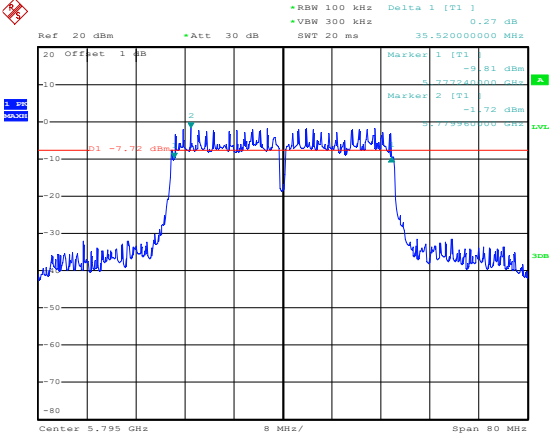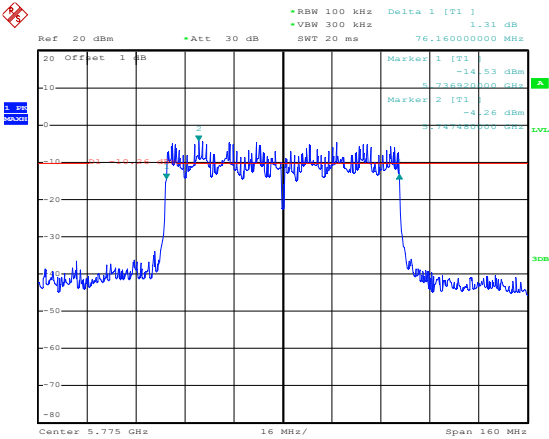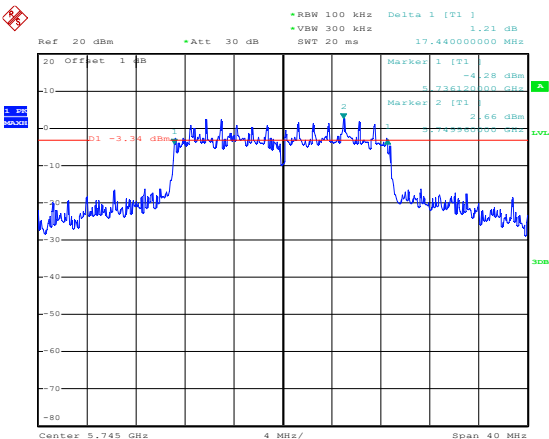802.11ac-VHT40-High	 Date: 20.NOV.2024 19:12:46
802.11ac-VHT80	 Date: 20.NOV.2024 19:10:54
802.11ax-HE20-Low	 Date: 21.NOV.2024 14:14:12

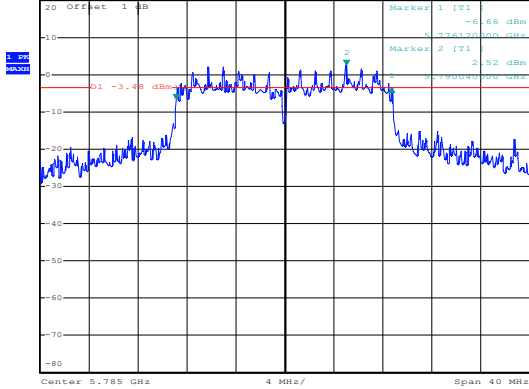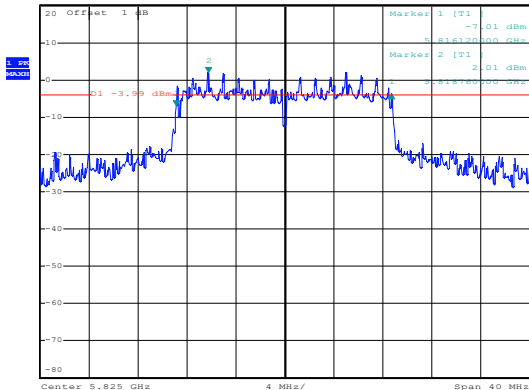
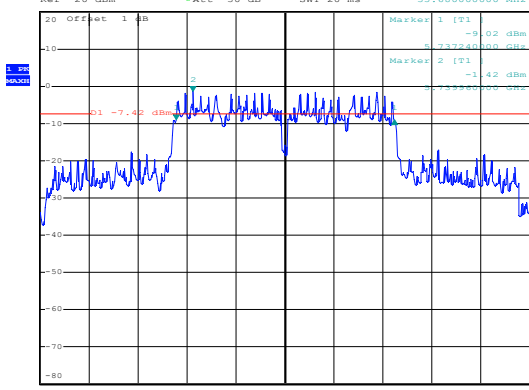
Channel	Plot	Ref	Att	VBW	SWT	Delta 1	Marker 1	Marker 2	Level	Span	Center	Date
802.11ax-HE20-Middle		20 dBm	30 dB	300 kHz	20 ms	3.26 dB	-6.66 dBm	-2.52 dBm	LVL	40 MHz	5.785 GHz	21.NOV.2024 14:12:39
802.11ax-HE20-High		20 dBm	30 dB	300 kHz	20 ms	3.12 dB	-7.01 dBm	-2.01 dBm	LVL	40 MHz	5.825 GHz	21.NOV.2024 14:11:30
802.11ax-HE40-Low		20 dBm	30 dB	300 kHz	20 ms	-0.11 dB	-9.02 dBm	-1.42 dBm	LVL	80 MHz	5.755 GHz	21.NOV.2024 14:09:35

[illegible]



ANT 1

26 dB Bandwidth

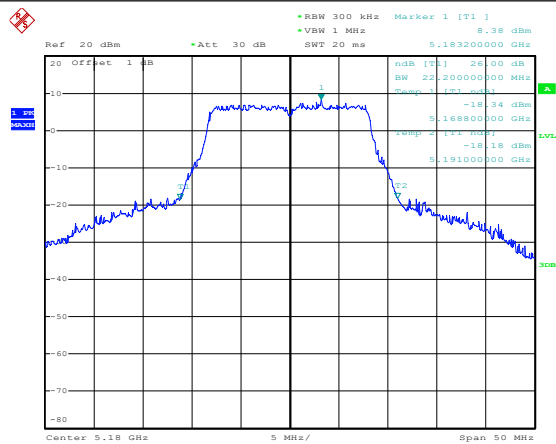

5150-5250MHz






Date: 22.NOV.2024 17:50:50

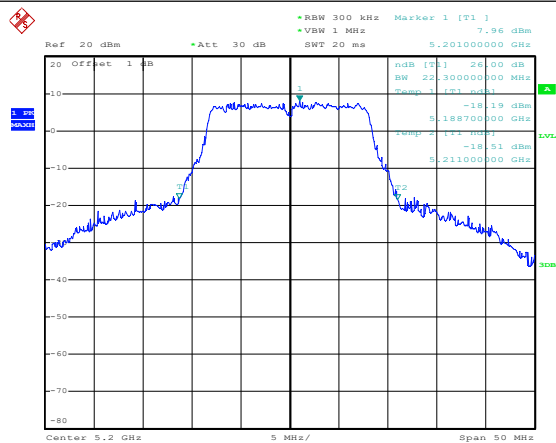

Date: 22.NOV.2024 17:51:20

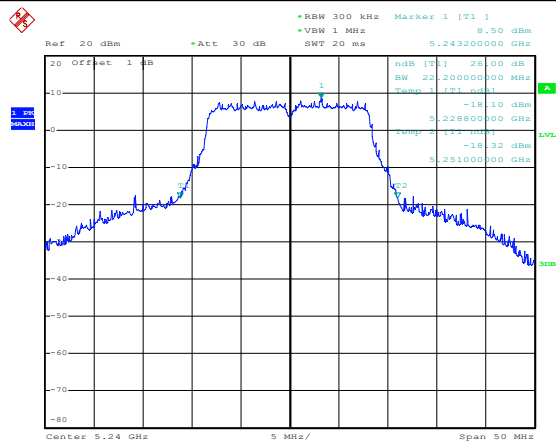

Date: 22.NOV.2024 17:51:44

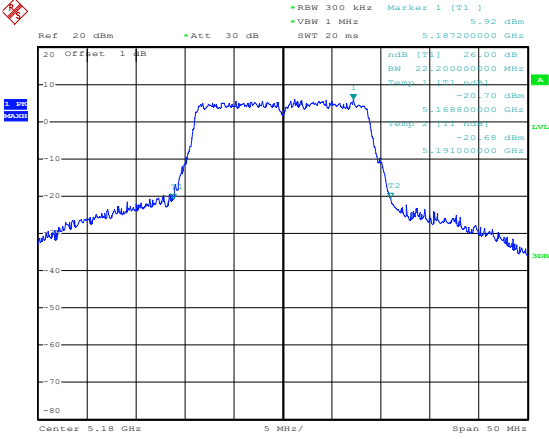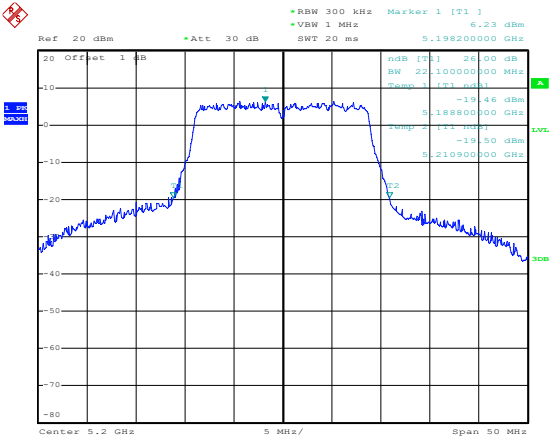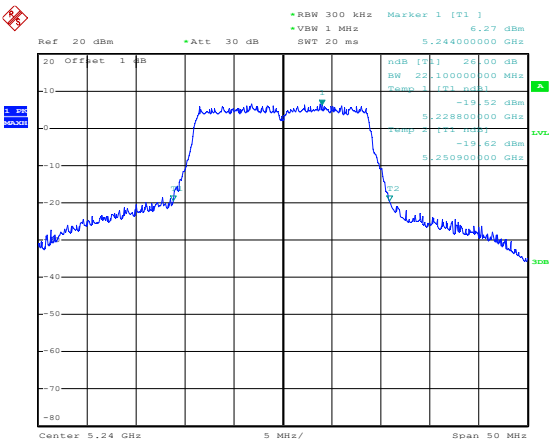802.11n-HT20-Low	 Ref 20 dBm *Att 30 dB SWT 20 ms Marker 1 [T1] 5.92 dBm 5.187200000 GHz 20 Offset 1 dB 20 dB (T1) 20.00 dB SW 20.00000000 MHz Temp 1 (T1) 0.00 -20.70 dBm 5.168800000 GHz -20.68 dBm 5.191000000 GHz Center 5.18 GHz 5 MHz/ Span 50 MHz Date: 22.NOV.2024 17:53:00
802.11n-HT20-Middle	 Ref 20 dBm *Att 30 dB SWT 20 ms Marker 1 [T1] 6.23 dBm 5.198200000 GHz 20 Offset 1 dB 20 dB (T1) 20.00 dB SW 22.10000000 MHz Temp 1 (T1) 0.00 -19.46 dBm 5.188800000 GHz -19.50 dBm 5.210900000 GHz Center 5.2 GHz 5 MHz/ Span 50 MHz Date: 22.NOV.2024 17:52:36
802.11n-HT20-High	 Ref 20 dBm *Att 30 dB SWT 20 ms Marker 1 [T1] 6.27 dBm 5.244000000 GHz 20 Offset 1 dB 20 dB (T1) 20.00 dB SW 22.10000000 MHz Temp 1 (T1) 0.00 -19.52 dBm 5.228800000 GHz -19.62 dBm 5.250900000 GHz Center 5.24 GHz 5 MHz/ Span 50 MHz Date: 22.NOV.2024 17:52:09

802.11n-HT40-Low

802.11n-HT40-High

802.11ac-VHT20-Low

The figure displays three spectral plots, each showing the power spectral density (PSD) of a signal. The plots are arranged vertically, corresponding to different signal types: 802.11n-HT40-Low, 802.11n-HT40-High, and 802.11ac-VHT20-Low. Each plot includes a title, a set of parameters, a graph, and a table of data.

802.11n-HT40-Low:

- Parameters: Ref 20 dBm, Att 30 dB, VSWR 1 MHz, SWR 20 ms, Center 5.19 GHz, Span 100 MHz.
- Graph: The graph shows a signal with a peak at 5.19 GHz. The y-axis is labeled "dBm" and ranges from -80 to 20. The x-axis is labeled "MHz" and ranges from 5.18 to 5.20.
- Table:

Marker	Frequency (GHz)	Power (dBm)
1	5.19000000	-23.21
2	5.16980000	-23.00
3	5.20980000	-23.00

802.11n-HT40-High:

- Parameters: Ref 20 dBm, Att 30 dB, VSWR 1 MHz, SWR 20 ms, Center 5.23 GHz, Span 100 MHz.
- Graph: The graph shows a signal with a peak at 5.23 GHz. The y-axis is labeled "dBm" and ranges from -80 to 20. The x-axis is labeled "MHz" and ranges from 5.22 to 5.24.
- Table:

Marker	Frequency (GHz)	Power (dBm)
1	5.23000000	-23.25
2	5.21000000	-25.30
3	5.25000000	-25.30

802.11ac-VHT20-Low:

- Parameters: Ref 20 dBm, Att 30 dB, VSWR 1 MHz, SWR 20 ms, Center 5.18 GHz, Span 50 MHz.
- Graph: The graph shows a signal with a peak at 5.18 GHz. The y-axis is labeled "dBm" and ranges from -80 to 20. The x-axis is labeled "MHz" and ranges from 5.17 to 5.19.
- Table:

Marker	Frequency (GHz)	Power (dBm)
1	5.18000000	-19.84
2	5.16860000	-20.16
3	5.19090000	-20.16