



Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:197.615MHz Emax:32.99dBµV/m RBW: 100 kHz

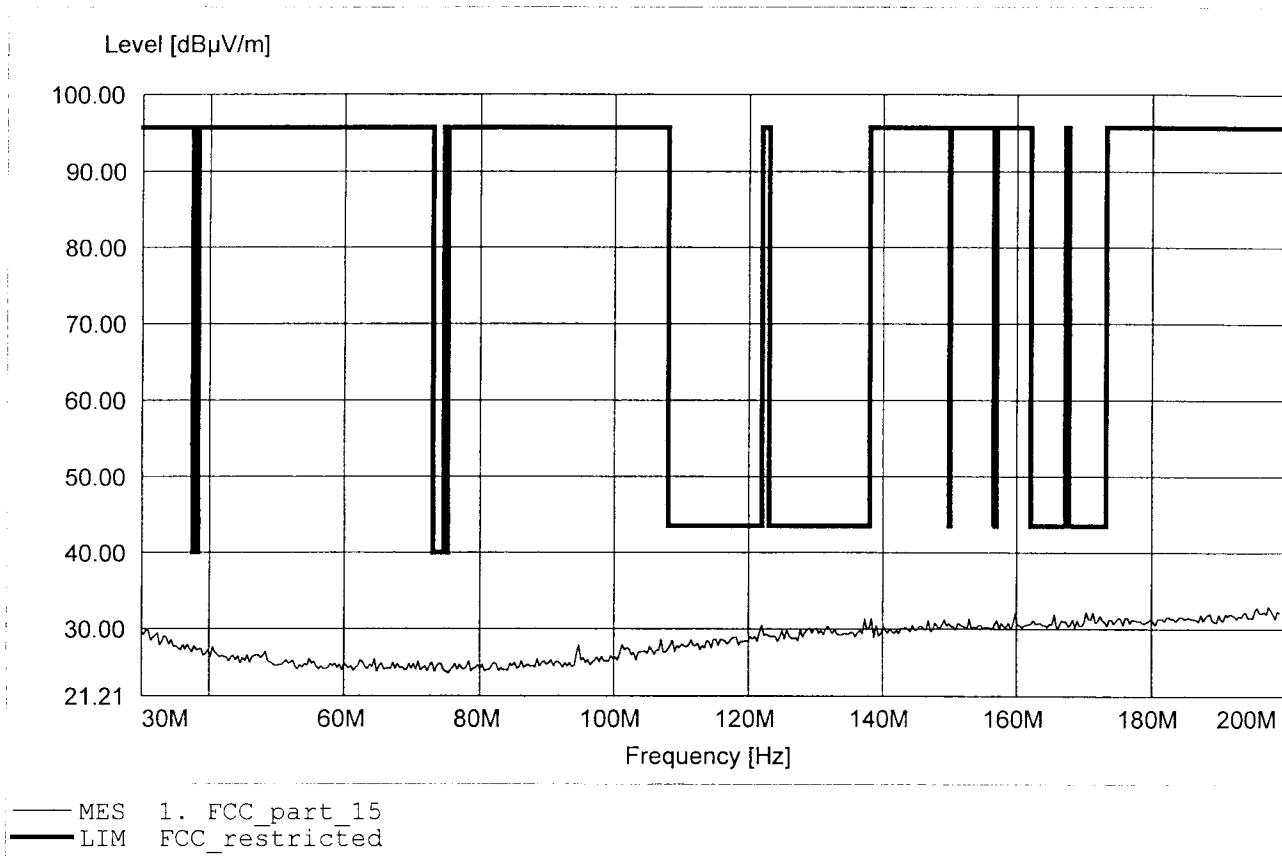


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:192.505MHz Emax:33.10dBµV/m RBW: 100 kHz

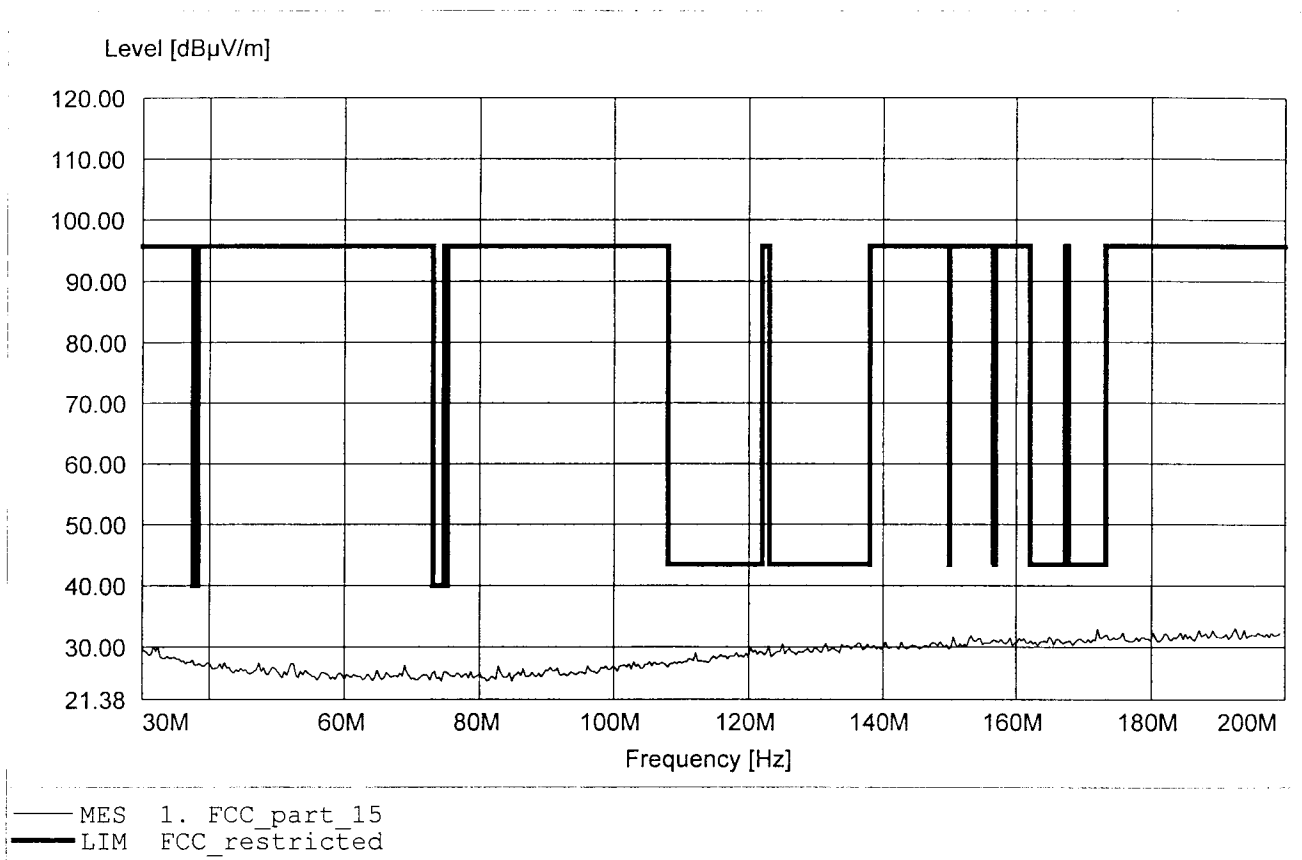


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to §15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq:688.978MHz Emax:26.97dBµV/m RBW: 100 kHz

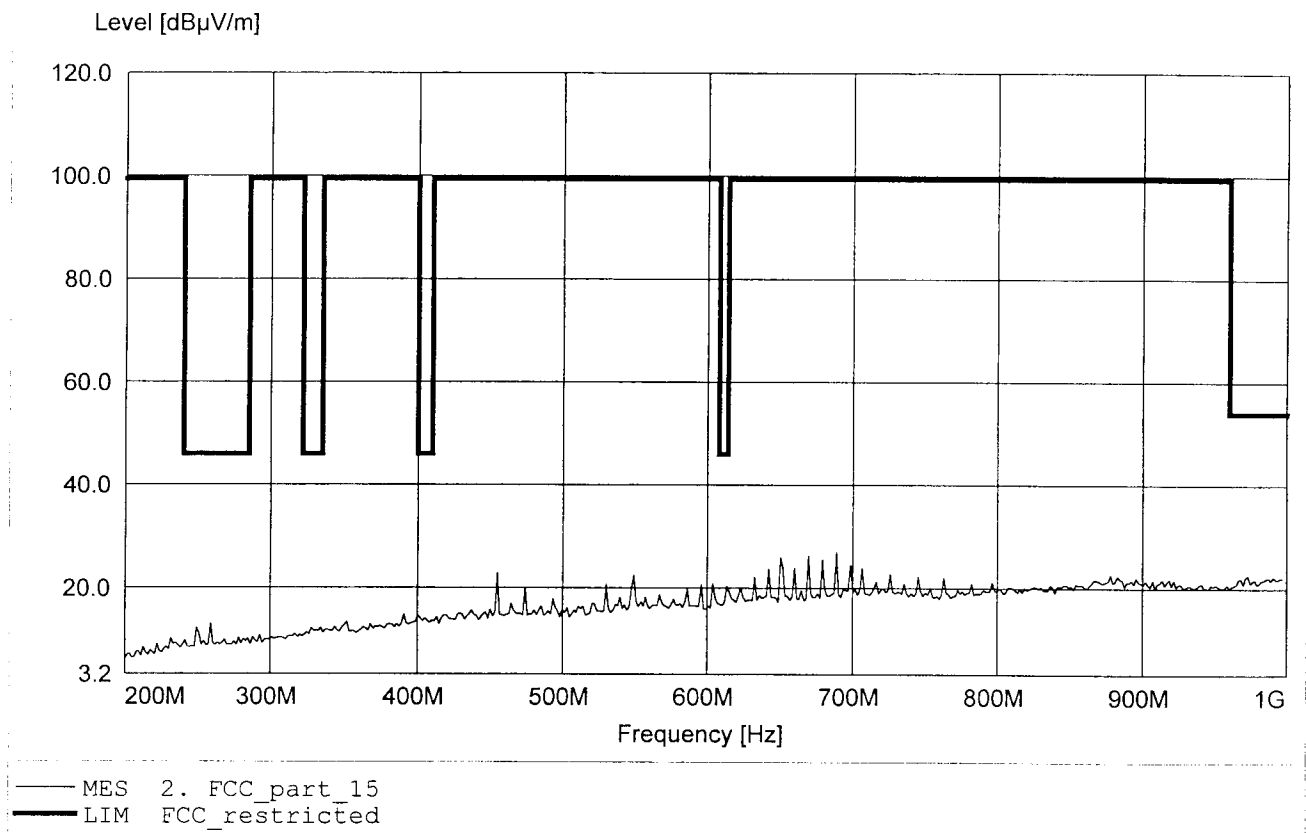


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq:669.739MHz Emax:26.85dBµV/m RBW: 100 kHz

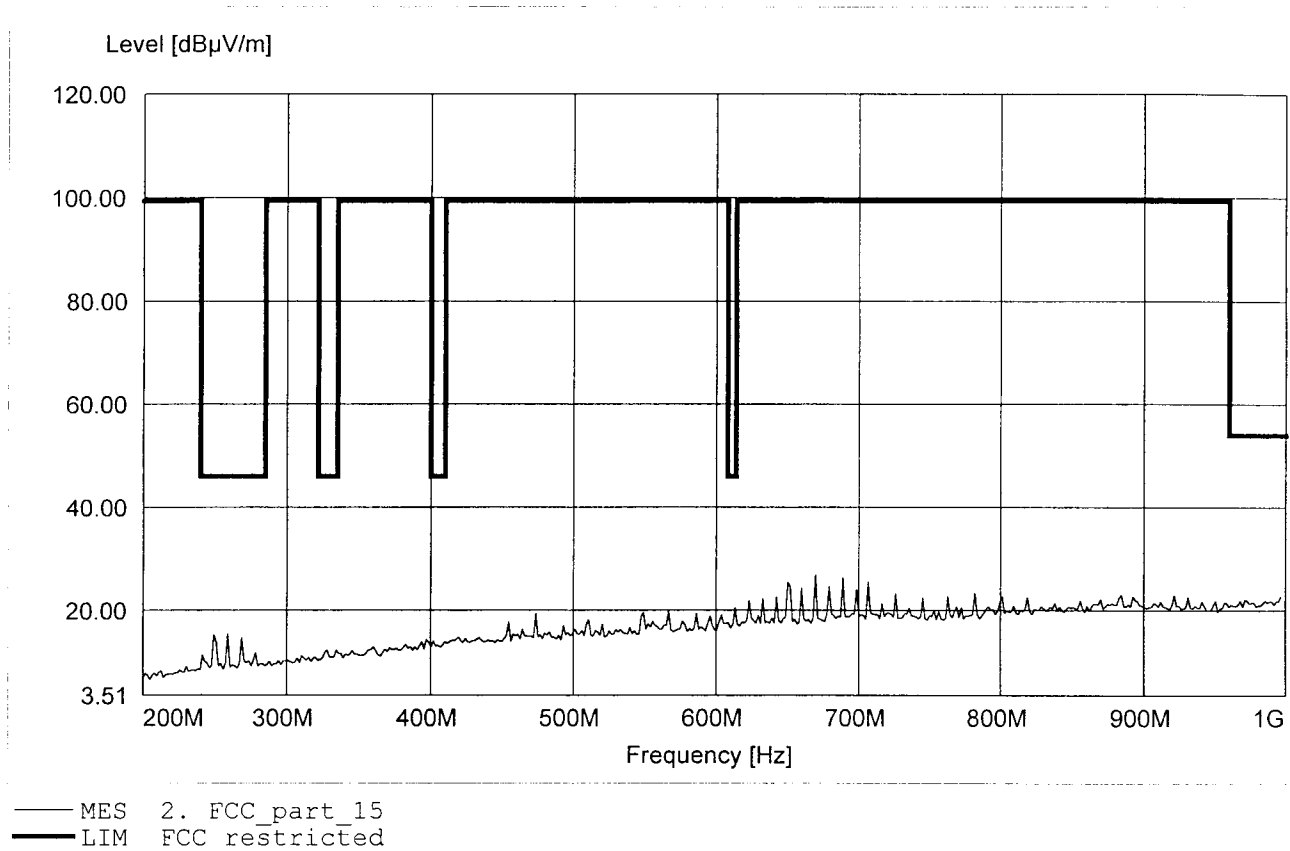


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq:2.483GHz Emax:62.25dBuV/m RBW: 1 MHz

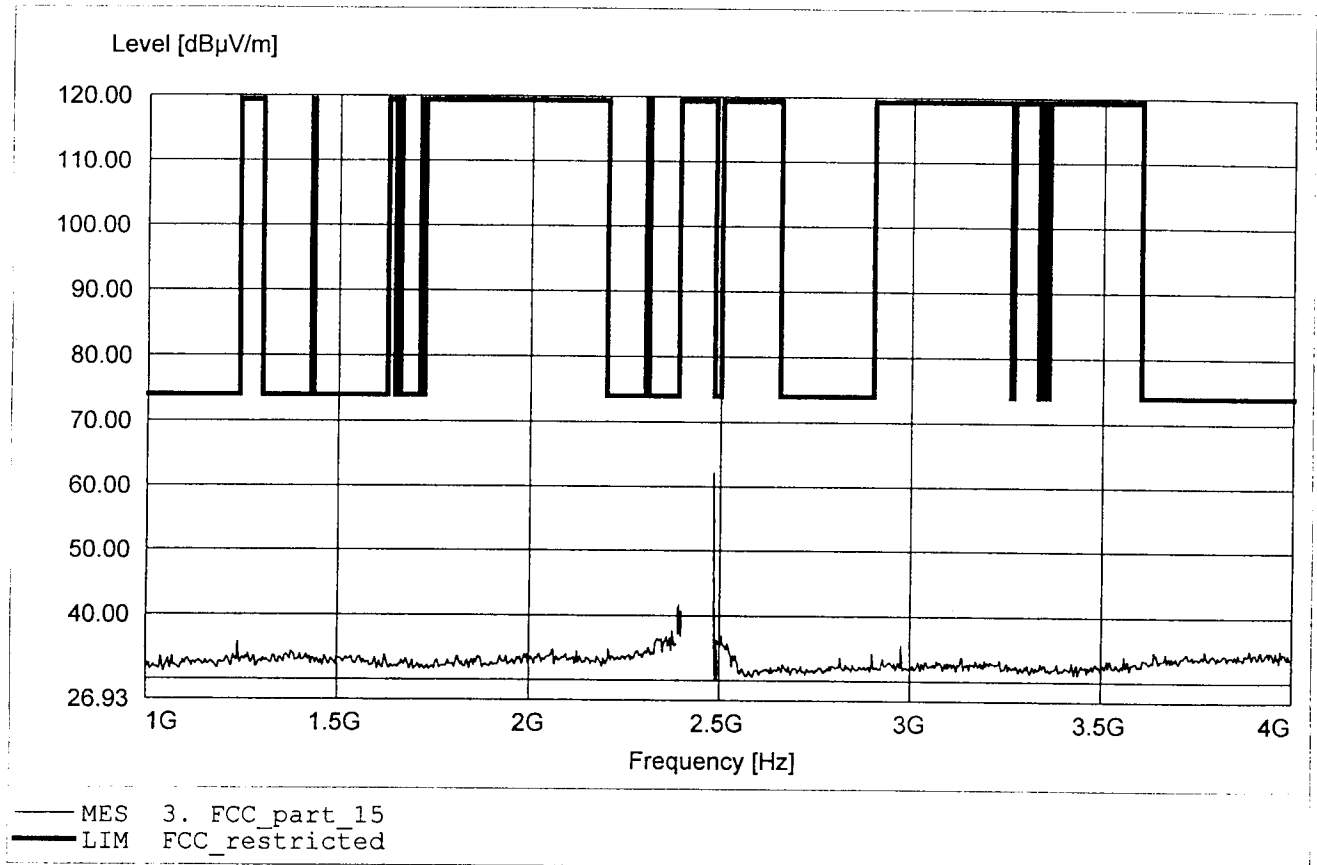


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq:2.483GHz Emax:73.11dBµV/m RBW: 1 MHz

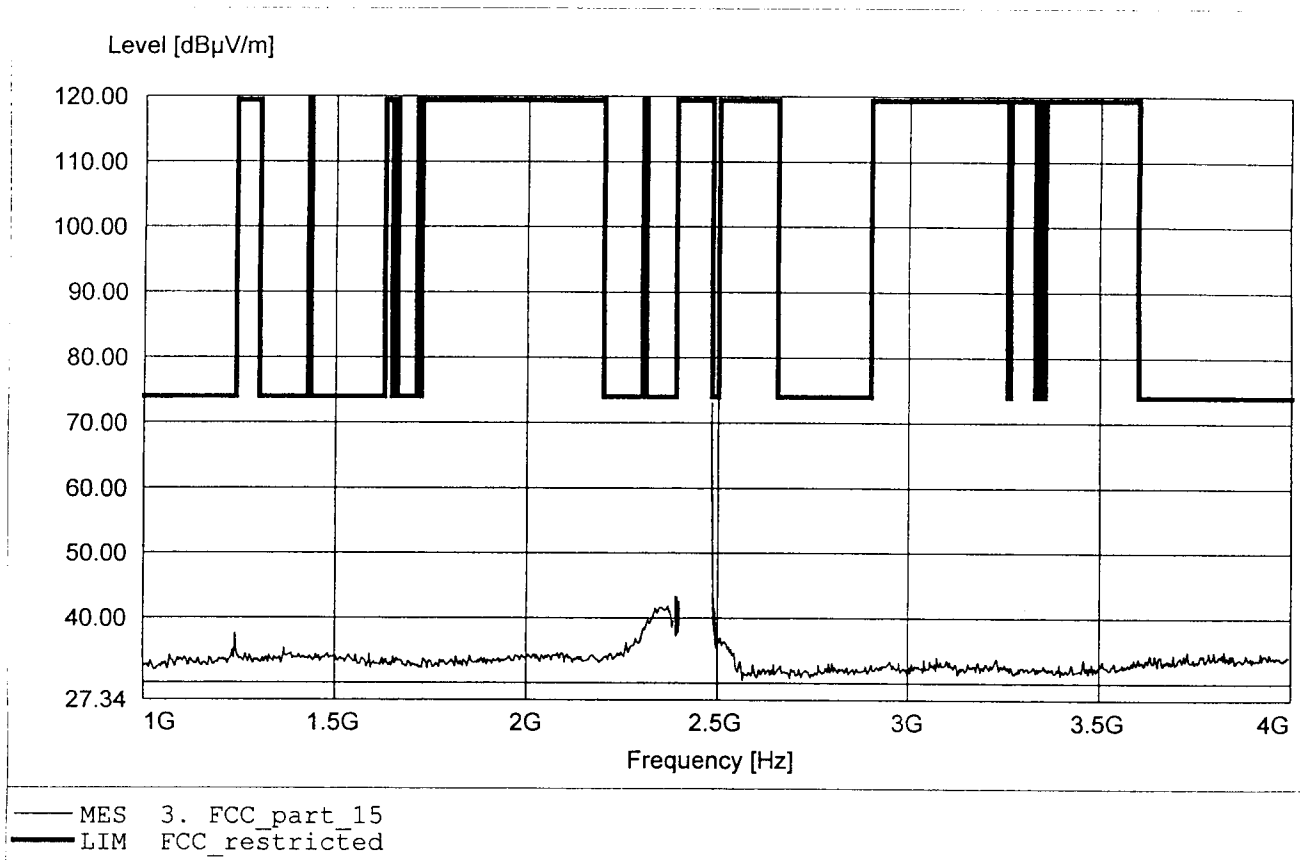


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 78
 Model: Gn 9050
 Manufacturer: GN Netcom
 Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
 Test Site / Operator: ETS / Mr. Treffke
 Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
 Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
 Comment 2: Freq:4.962GHz Emax:52.43dBμV/m RBW: 1 MHz

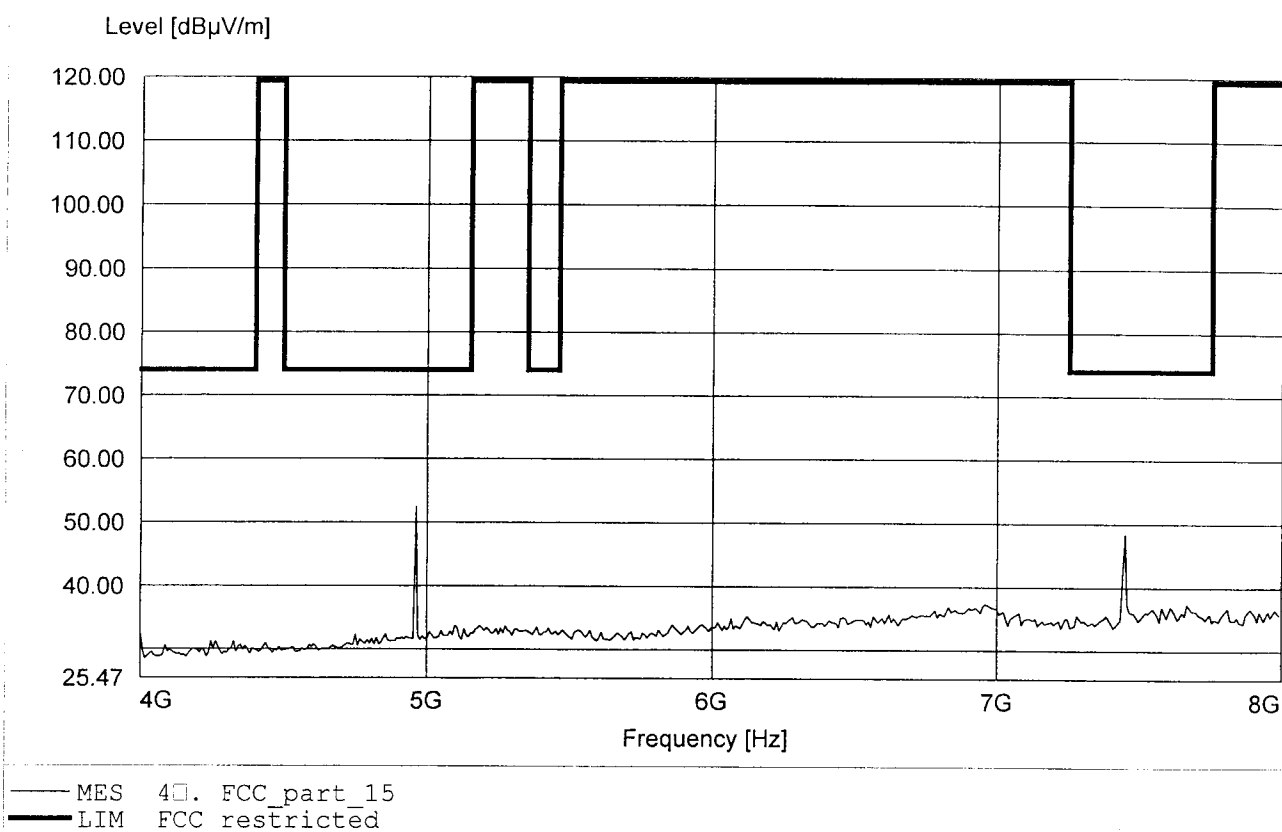


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq:4.962GHz Emax:64.42dBμV/m RBW: 1 MHz

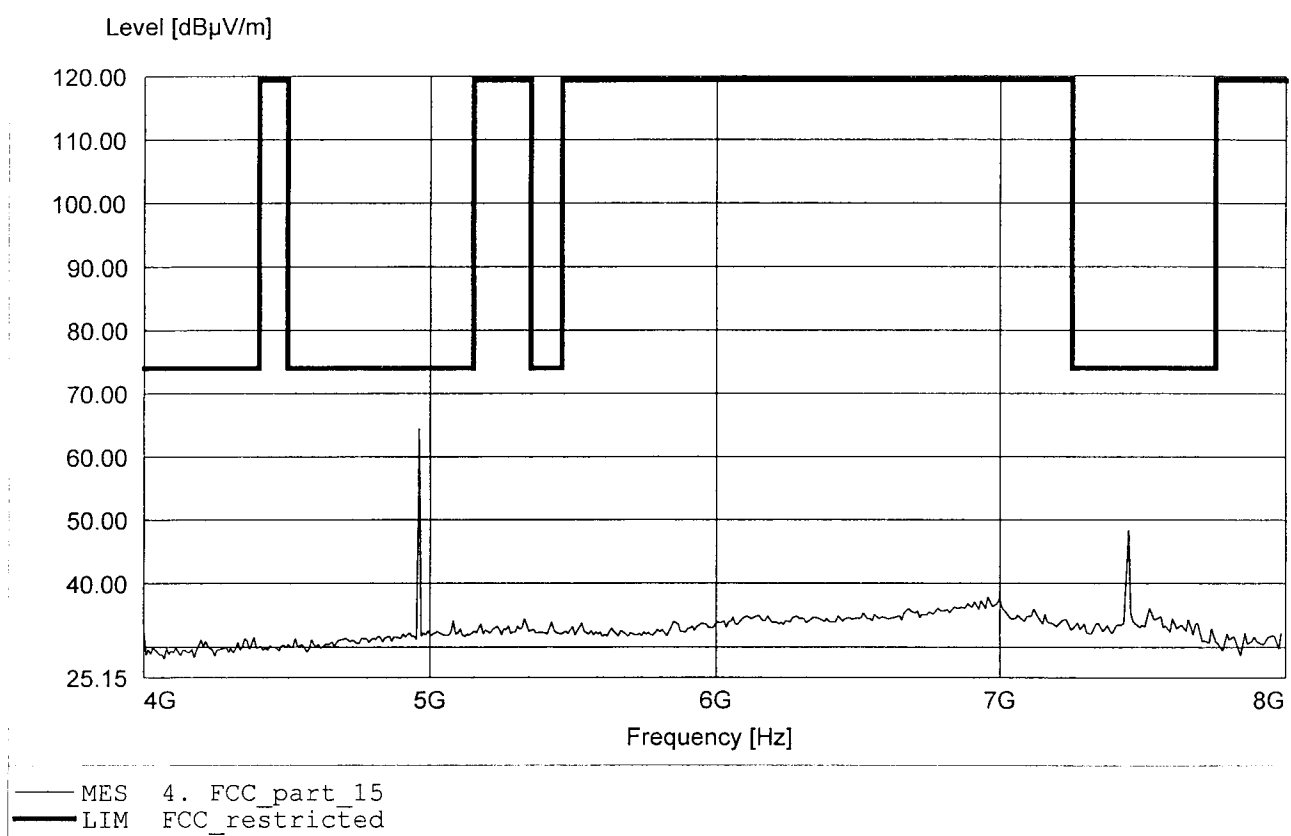


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq:11.126GHz Emax:43.09dBμV/m RBW: 1 MHz

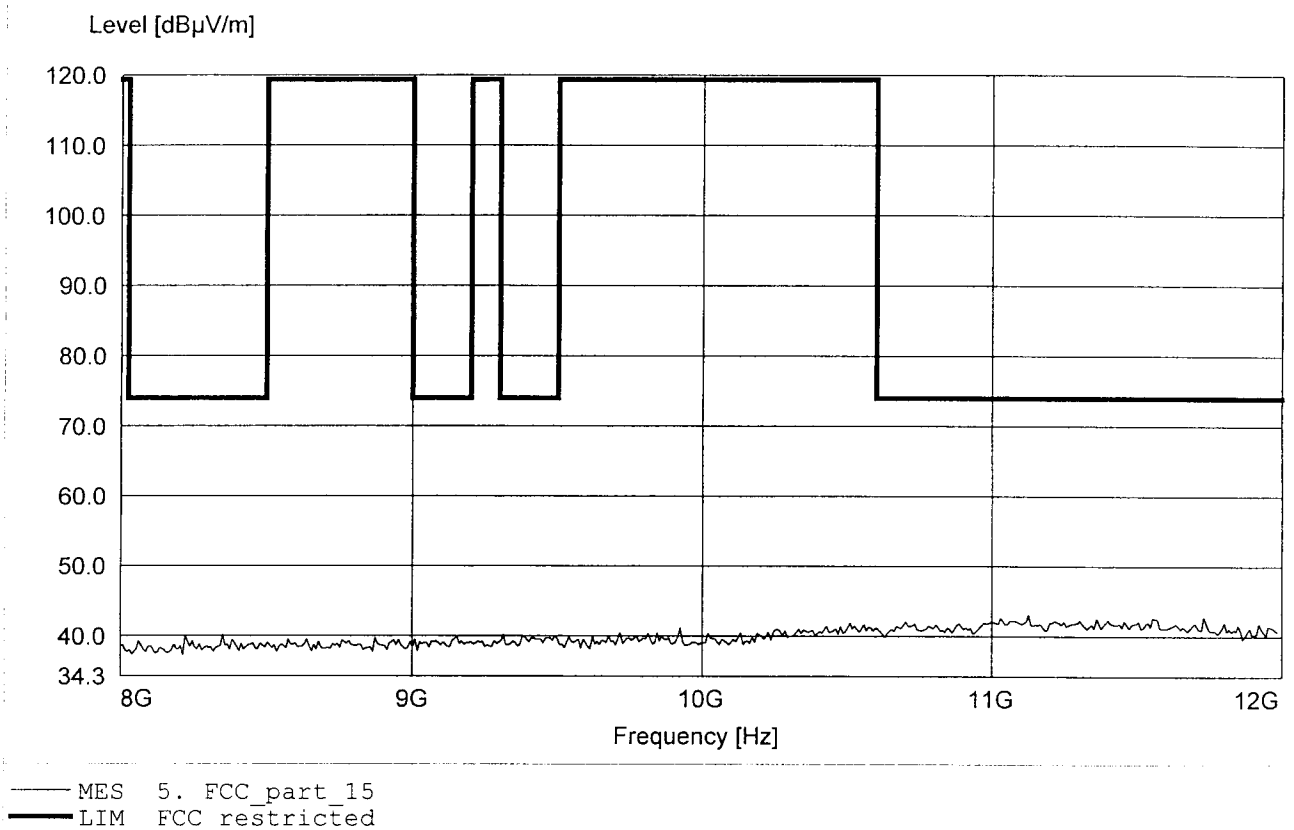

Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C


EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 78
 Model: Gn 9050
 Manufacturer: GN Netcom
 Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
 Test Site / Operator: ETS / Mr. Treffke
 Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
 Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
 Comment 2: Freq:11.735GHz Emax:42.83dBμV/m RBW: 1 MHz

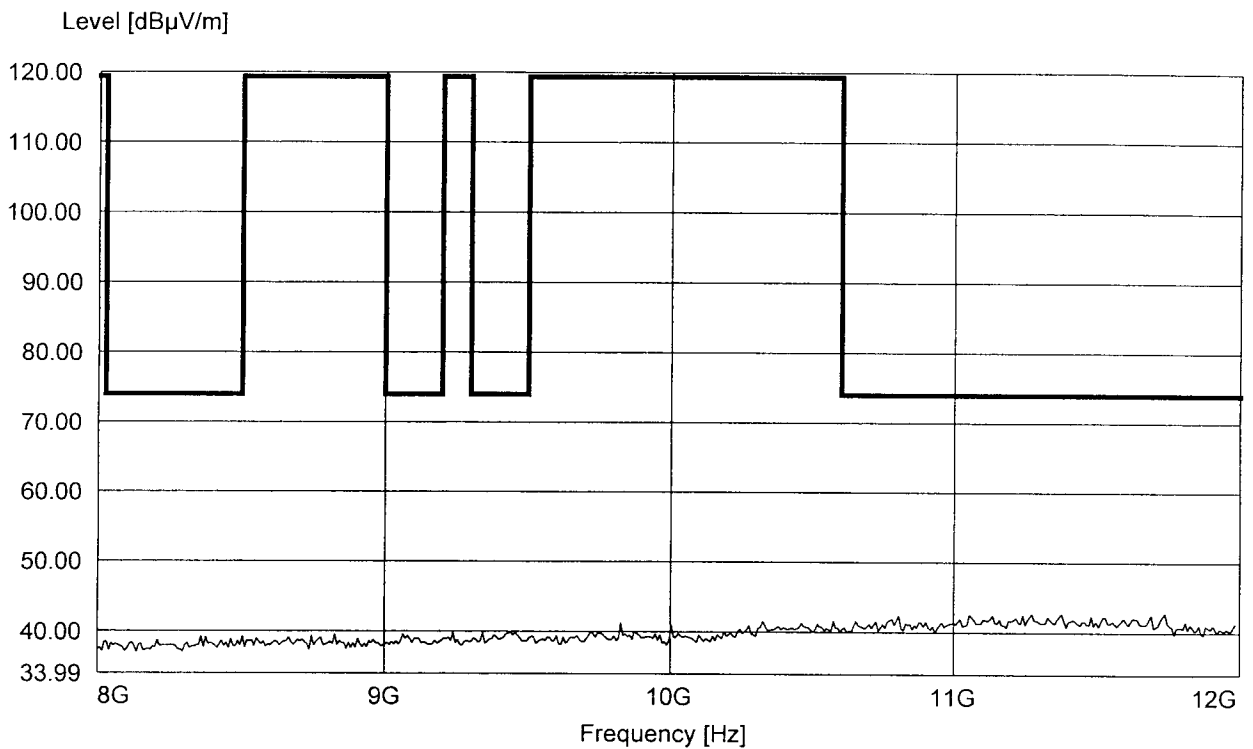

— MES 50. FCC_part_15
 — LIM FCC_restricted


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to §15.247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:14.575GHz Emax:45.39dBμV/m RBW: 1 MHz

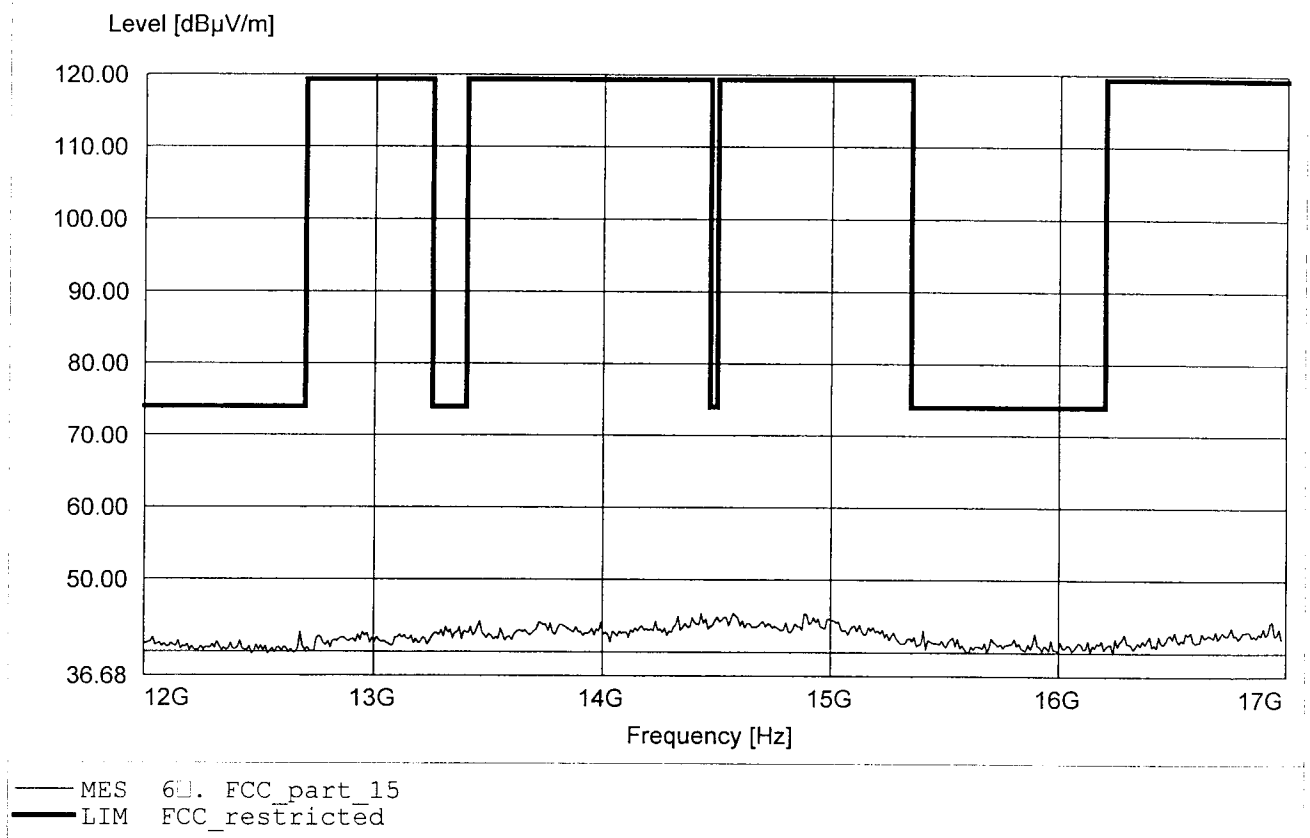


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:14.886GHz Emax:56.84dBµV/m RBW: 1 MHz

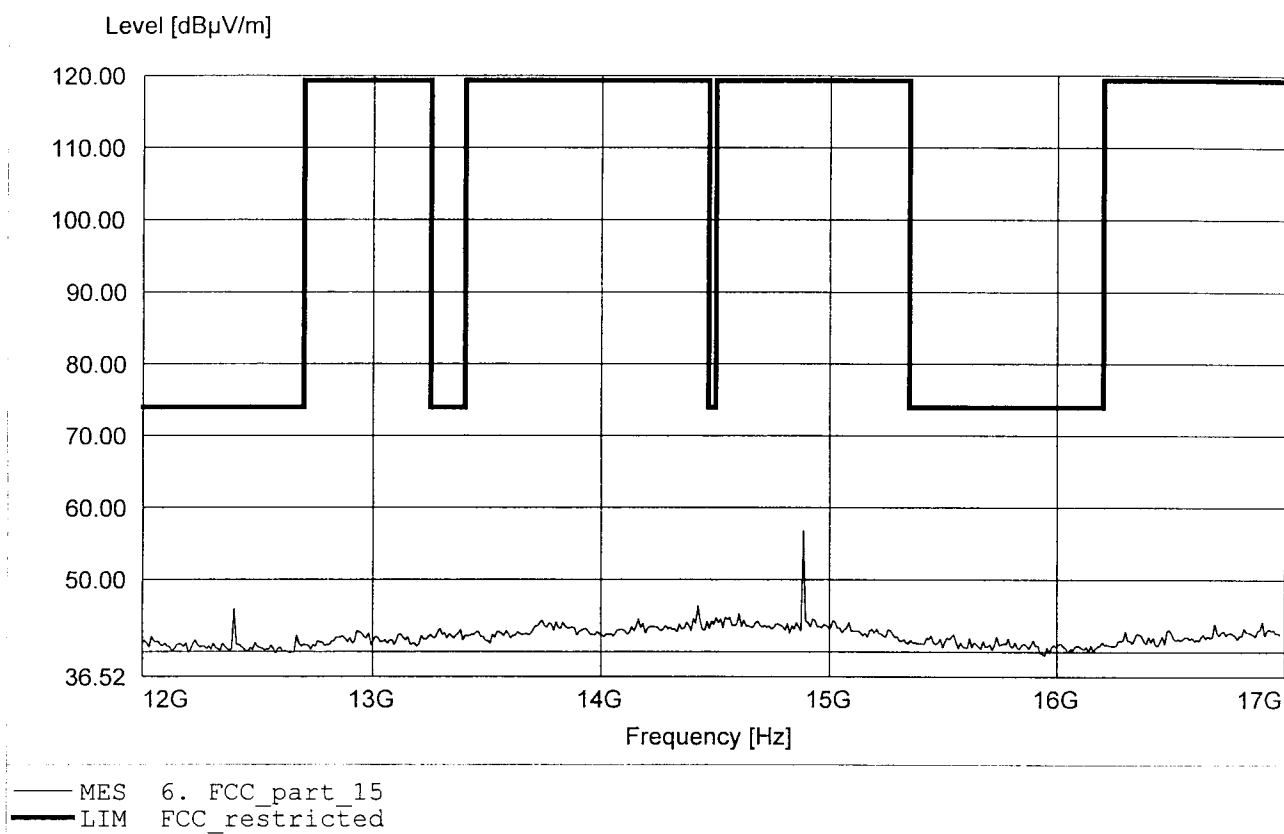


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:26.024GHz Emax:49.94dBuV/m RBW: 1 MHz

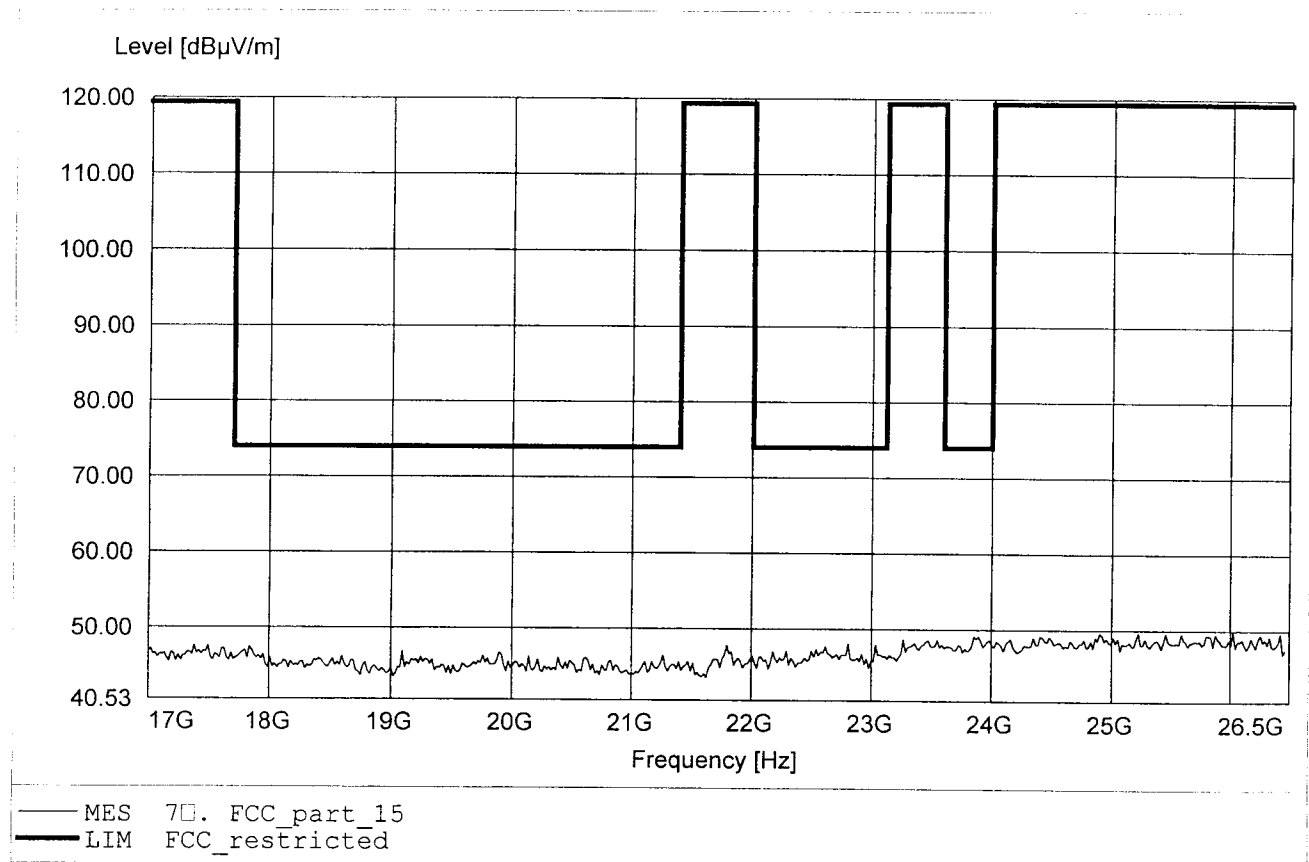


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:25.358GHz Emax:50.60dBμV/m RBW: 1 MHz

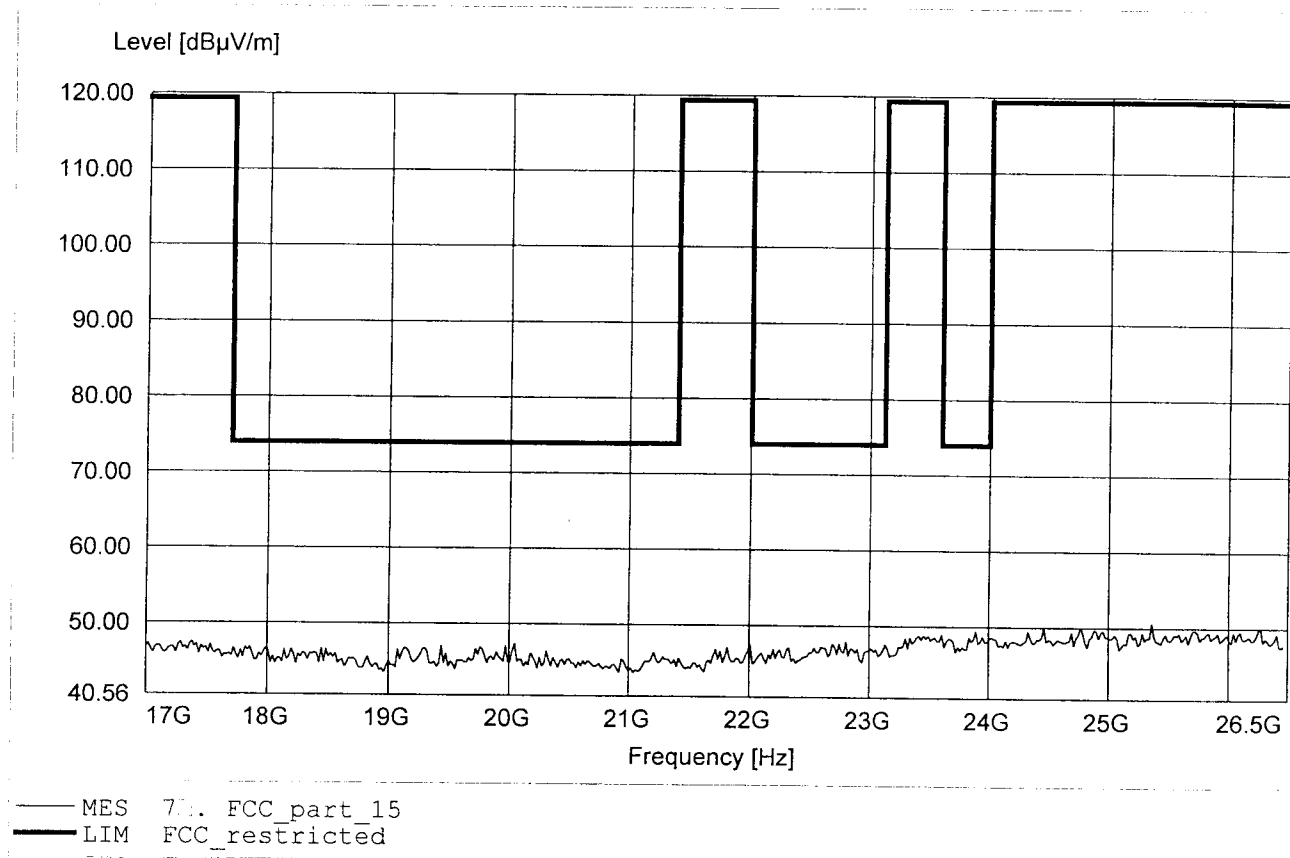


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:198.297MHz Emax:33.17dBµV/m RBW: 100 kHz

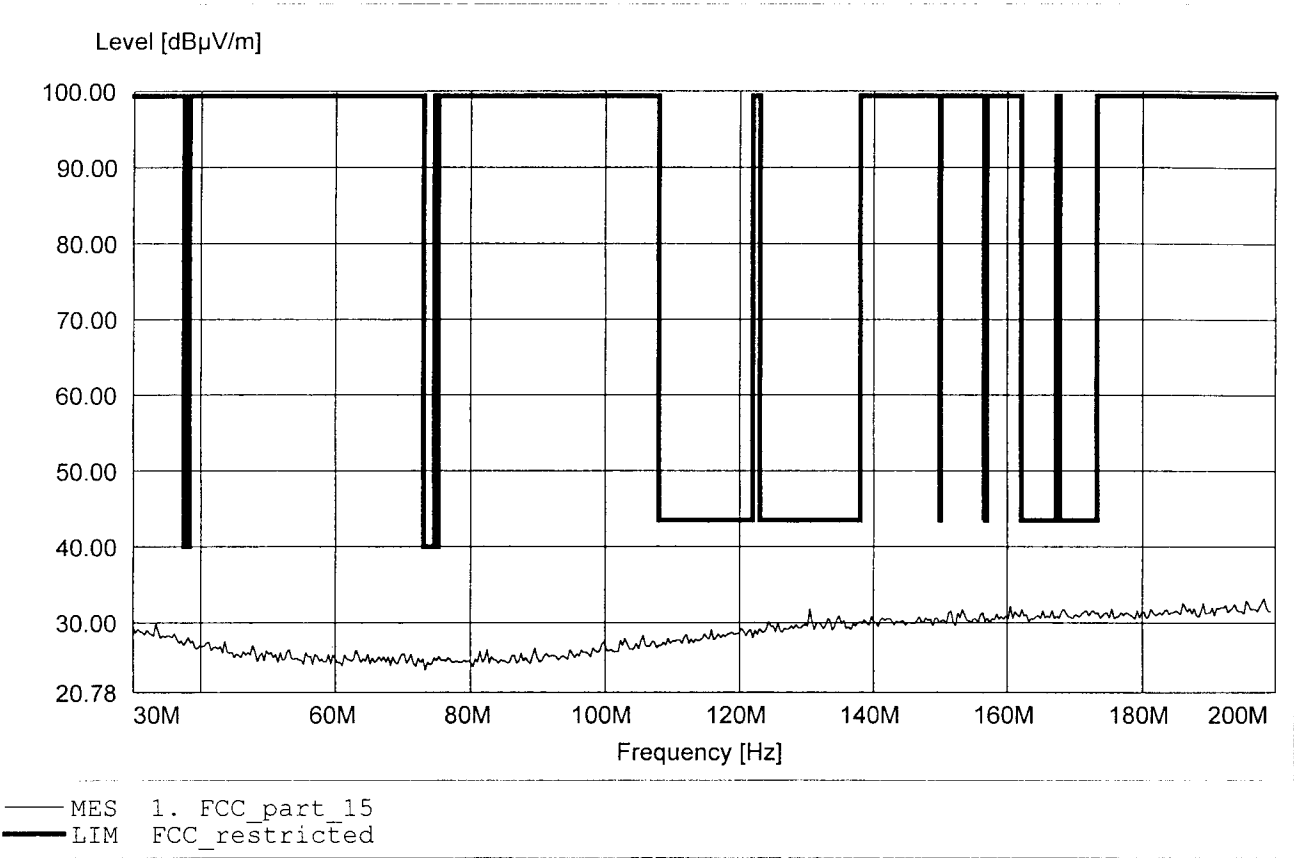


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:193.527MHz Emax:32.60dBμV/m RBW: 100 kHz

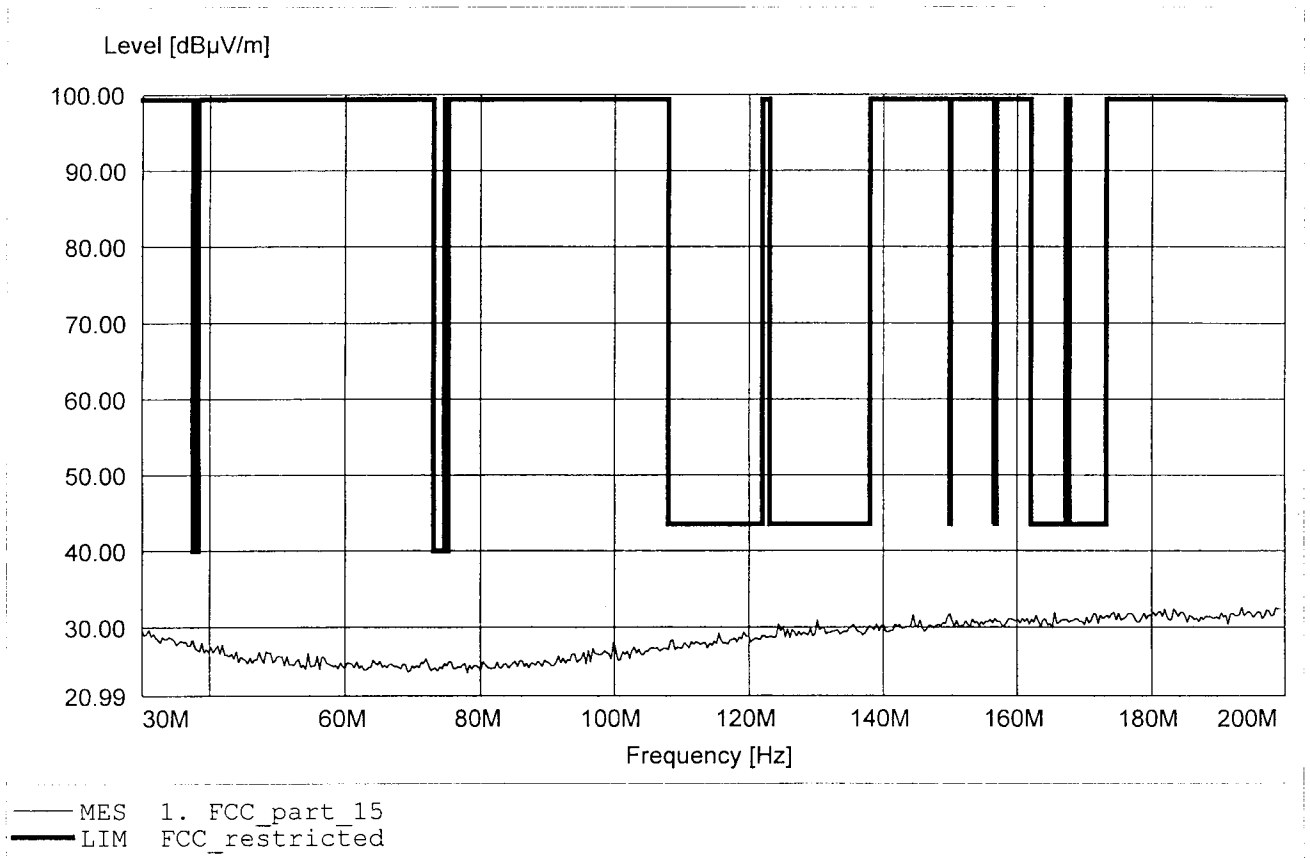


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq:688.978MHz Emax:27.26dBµV/m RBW: 100 kHz

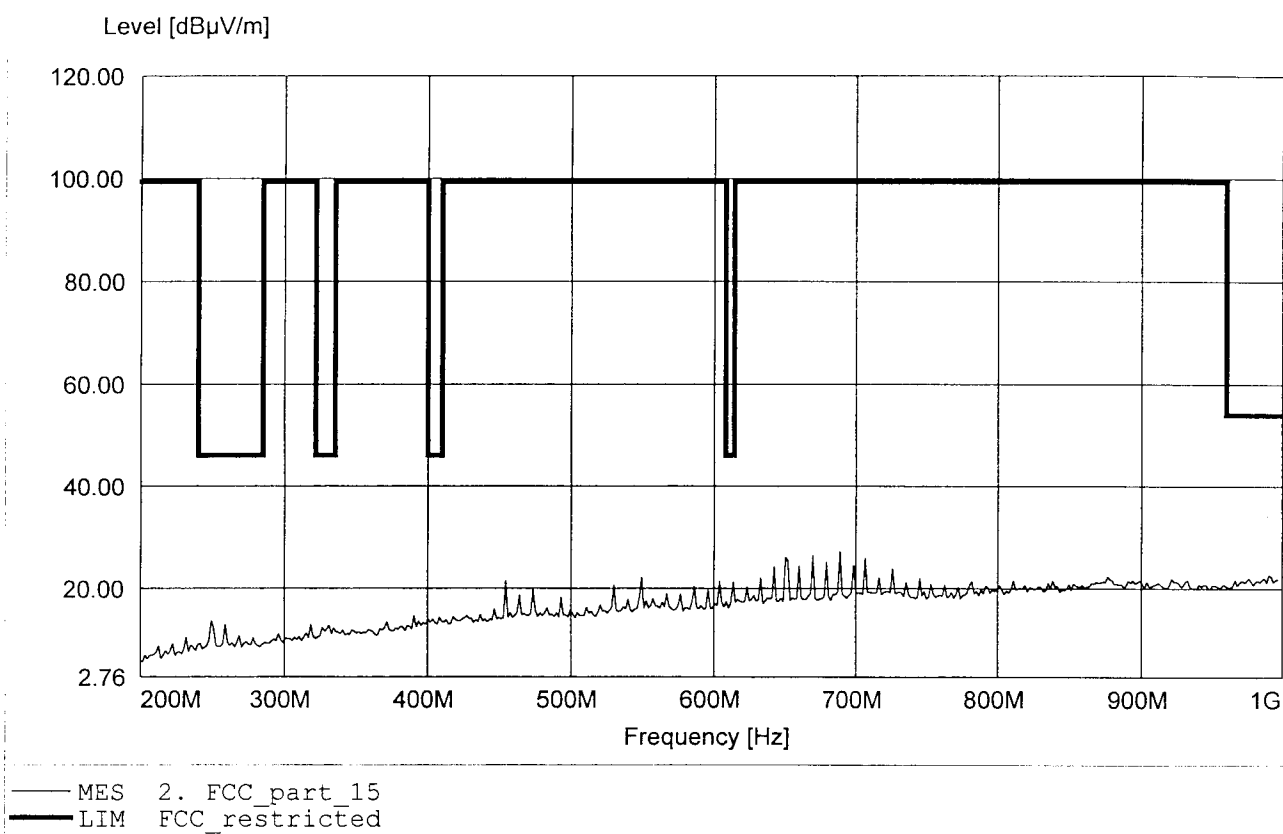


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Thom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq:669.739MHz Emax:27.38dBμV/m RBW: 100 kHz

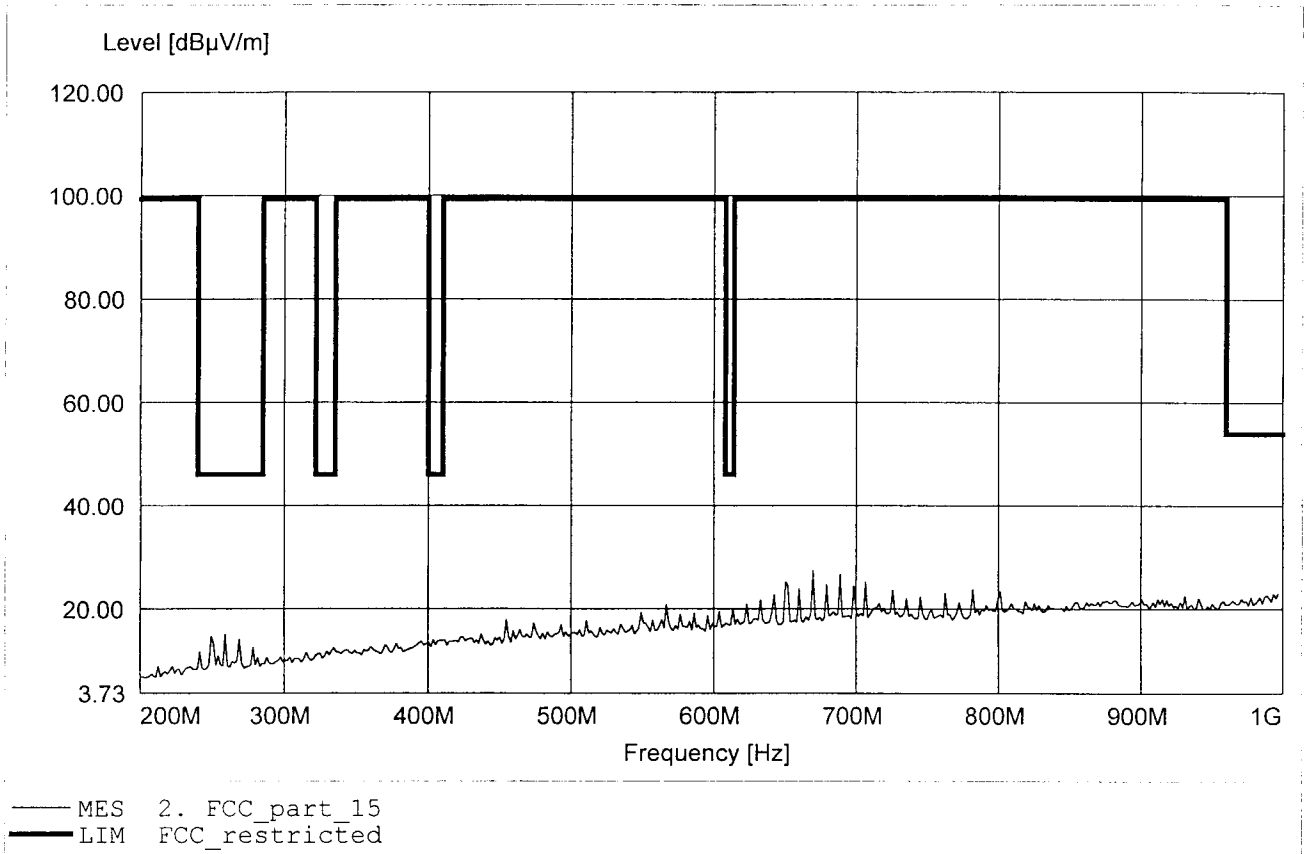


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq:2.400GHz Emax:65.08dBuV/m RBW: 1 MHz

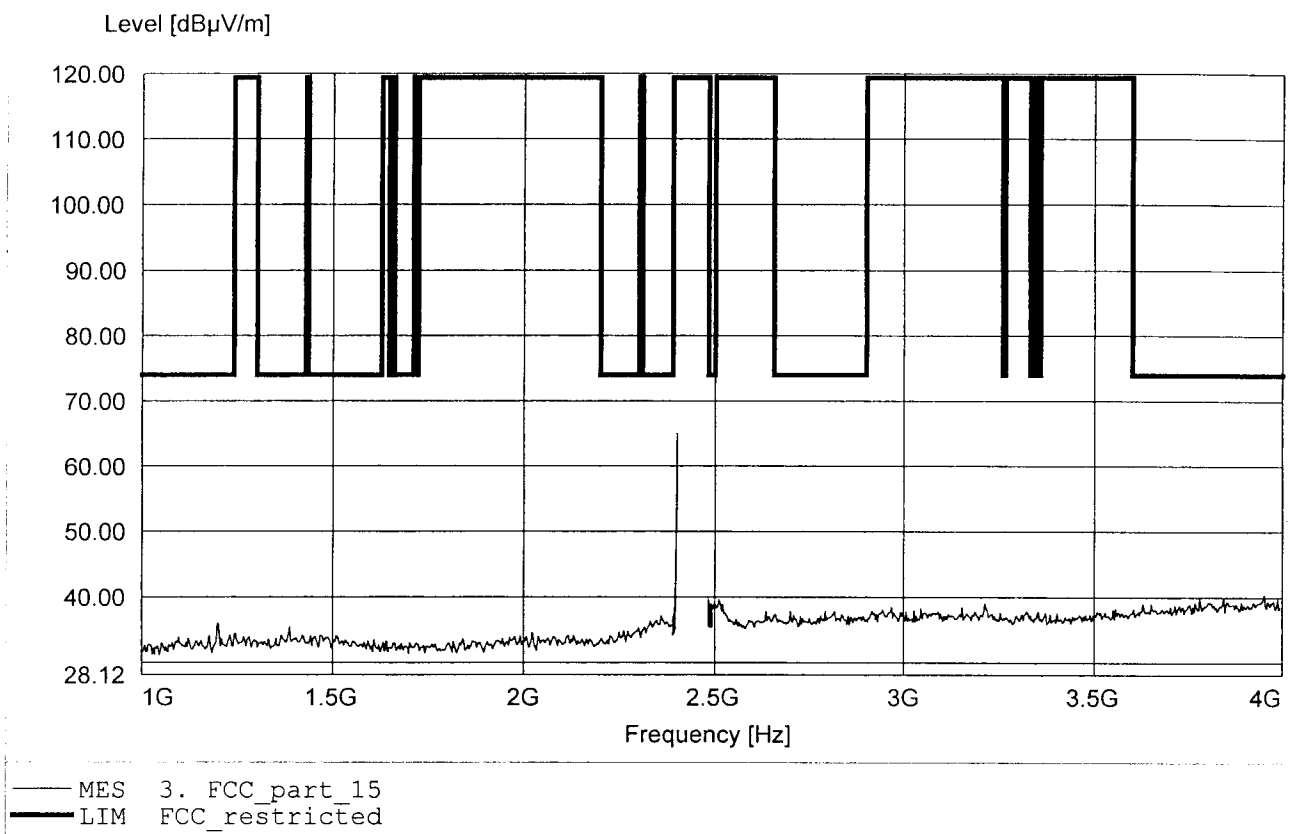


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Thom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq:2.400GHz Emax:61.71dBμV/m RBW: 1 MHz

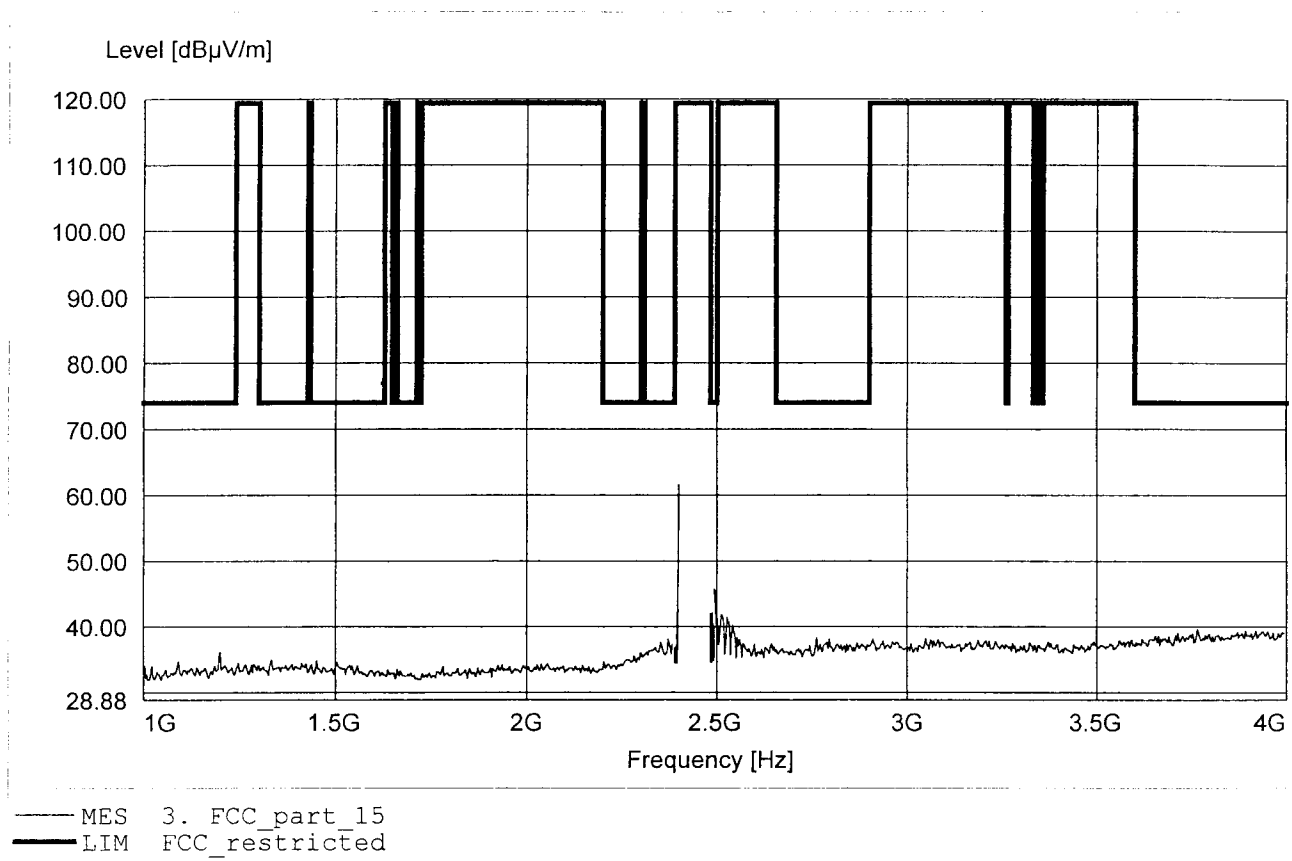


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq:7.206GHz Emax:48.29dBuV/m RBW: 1 MHz

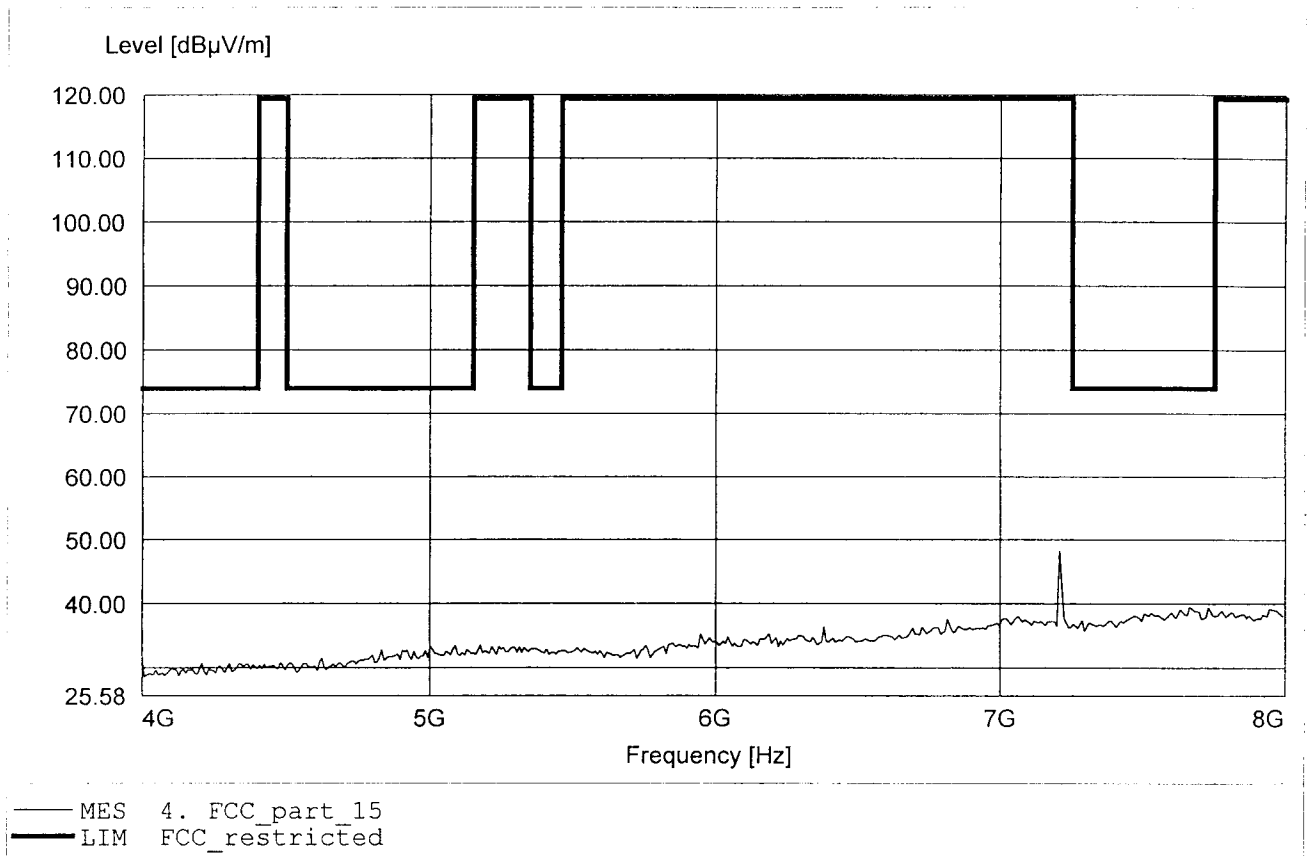


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq:7.206GHz Emax:62.12dBμV/m RBW: 1 MHz

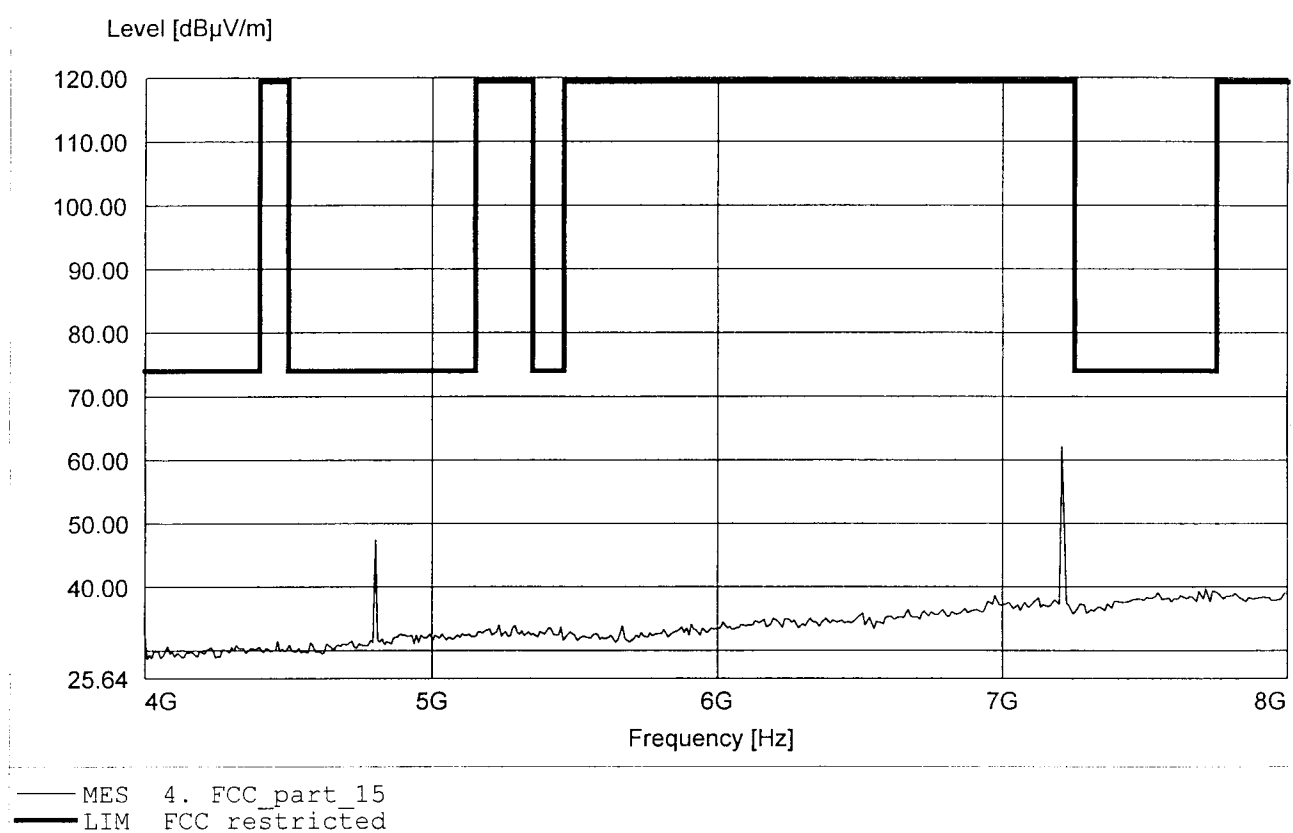


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq:11.727GHz Emax:42.78dBμV/m RBW: 1 MHz

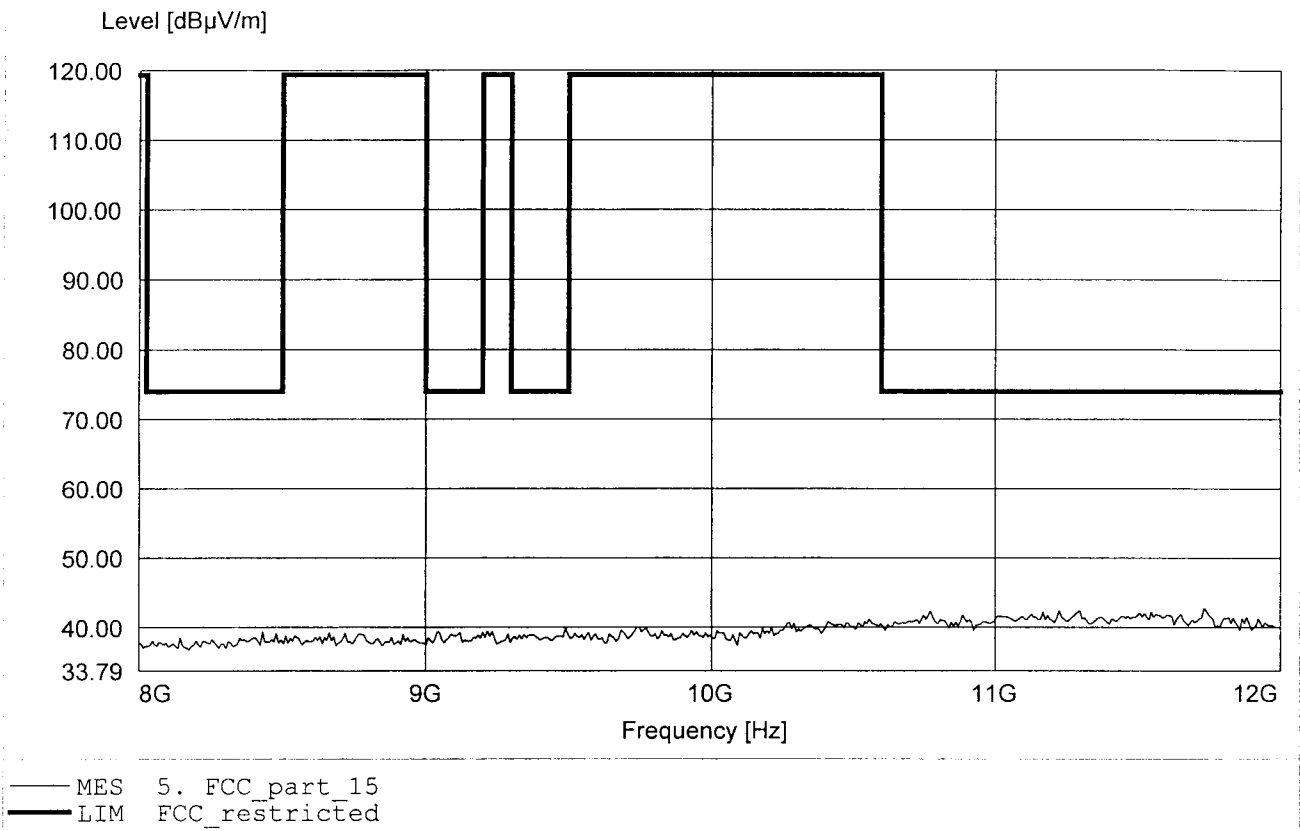


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq:11.567GHz Emax:43.57dBuV/m RBW: 1 MHz

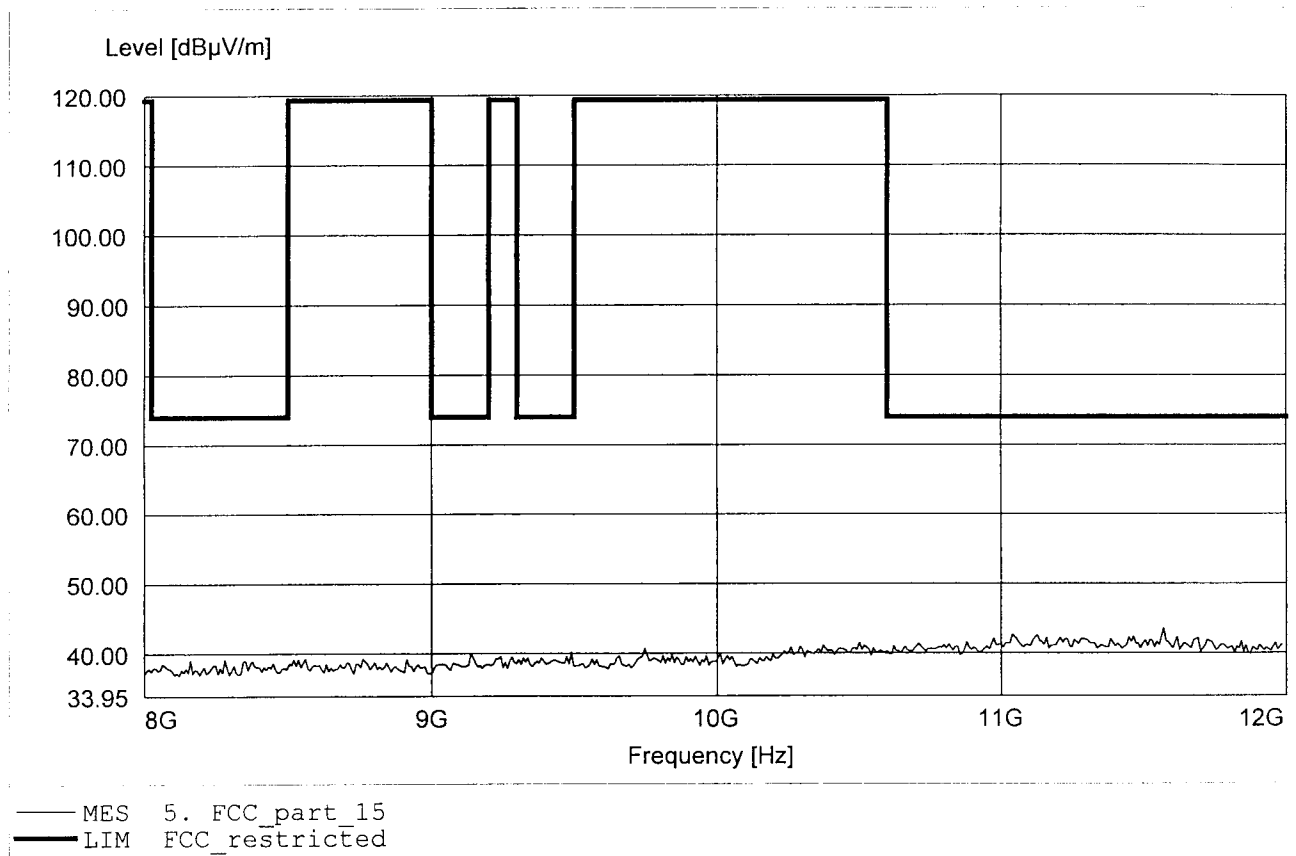


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:14.405GHz Emax:48.61dBμV/m RBW: 1 MHz

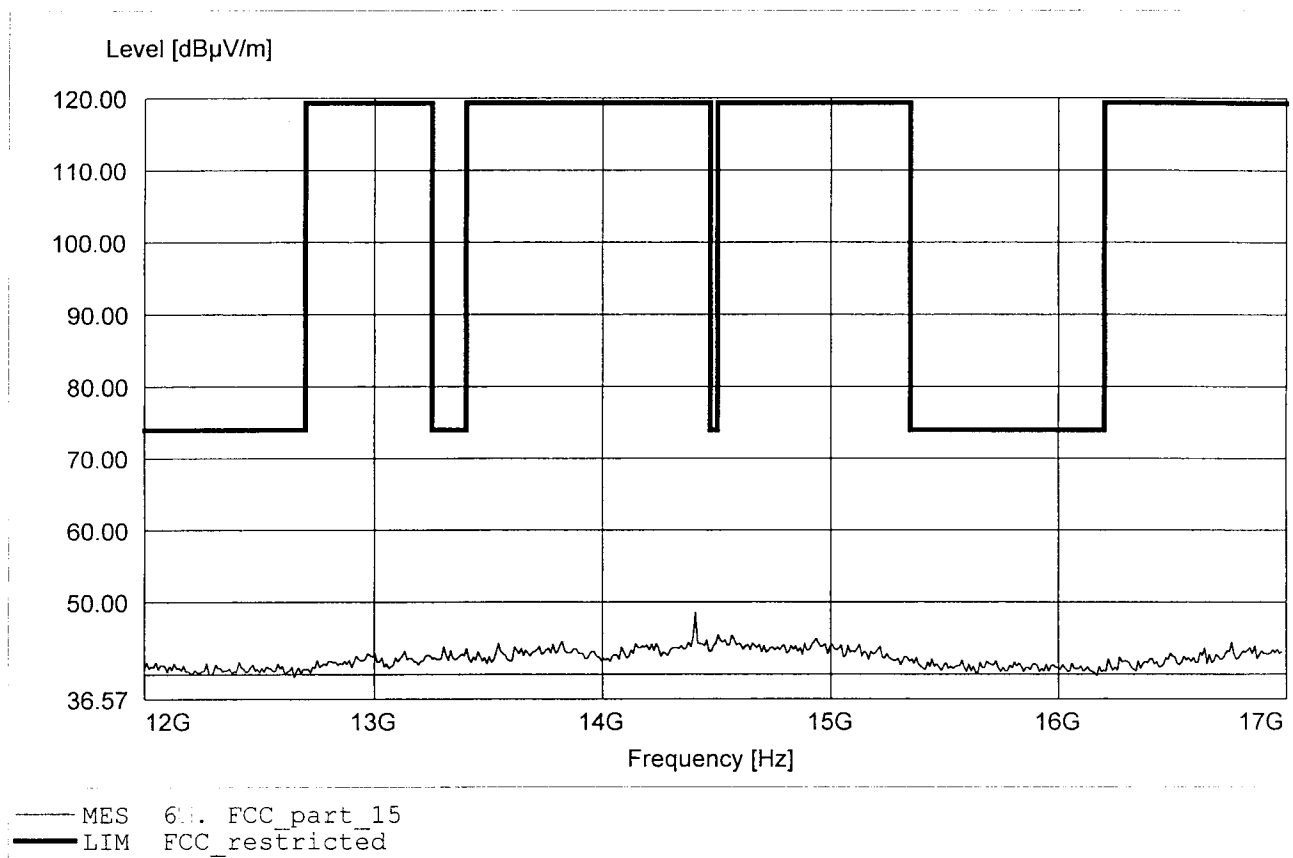


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to §15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:14.405GHz Emax:51.22dBμV/m RBW: 1 MHz

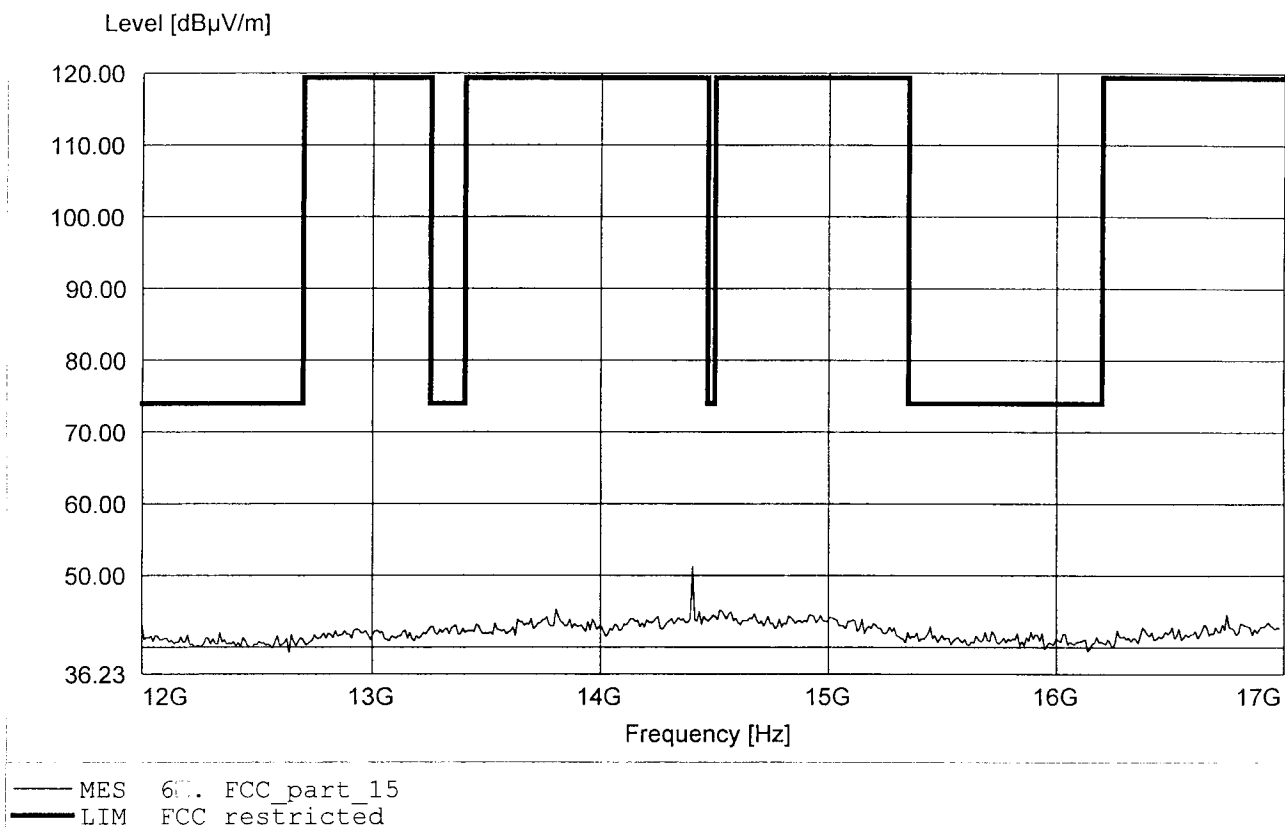


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:24.177GHz Emax:49.82dBμV/m RBW: 1 MHz

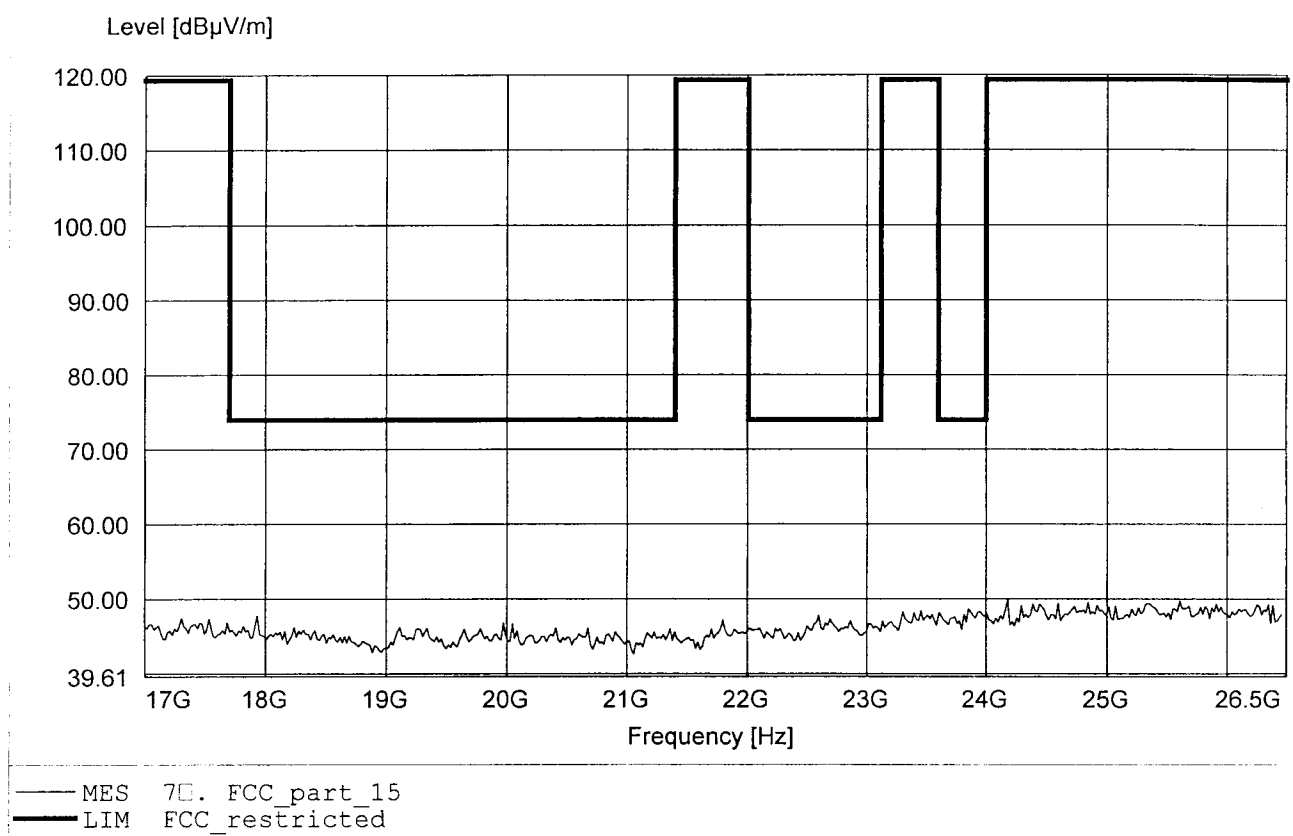


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:24.901GHz Emax:50.46dBuV/m RBW: 1 MHz

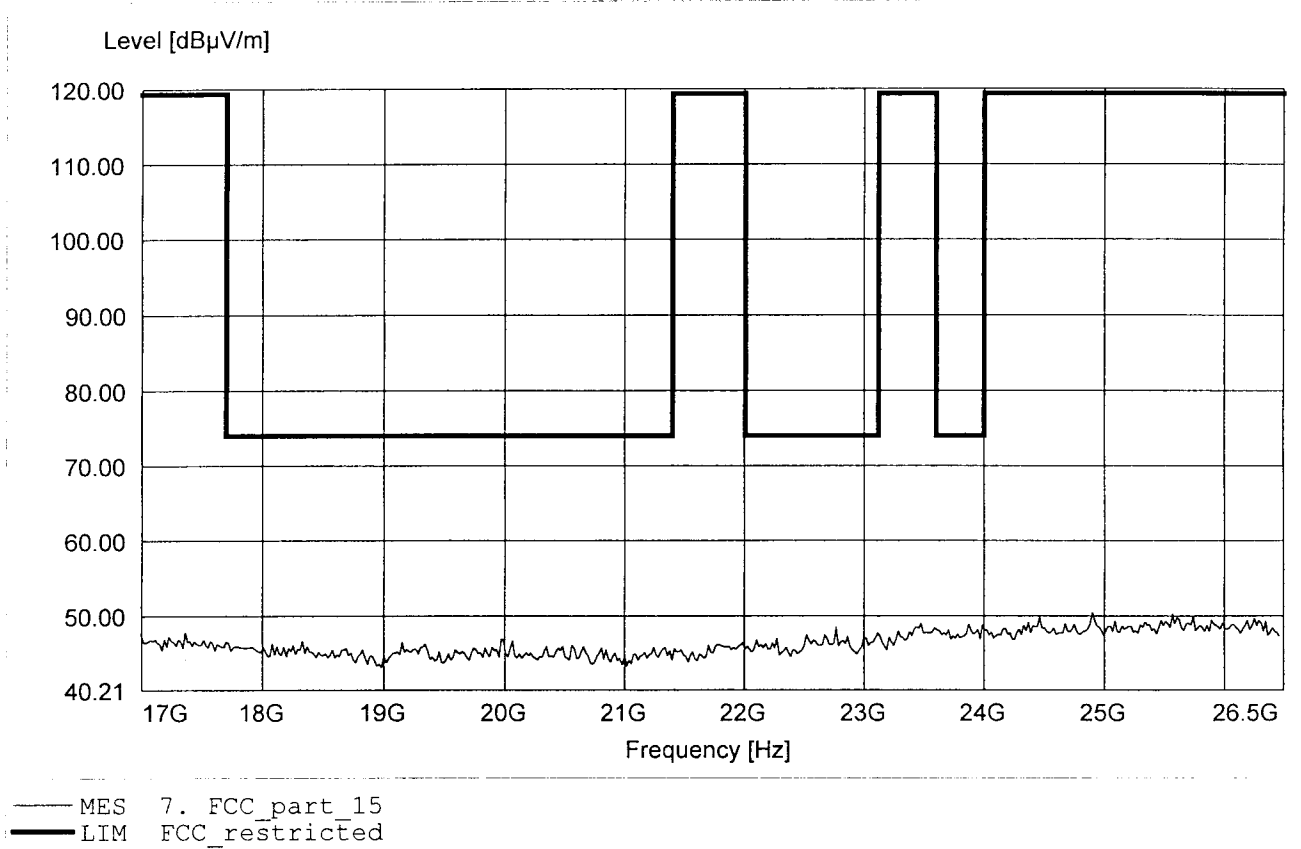


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:165.932MHz Emax:32.71dBμV/m RBW: 100 kHz

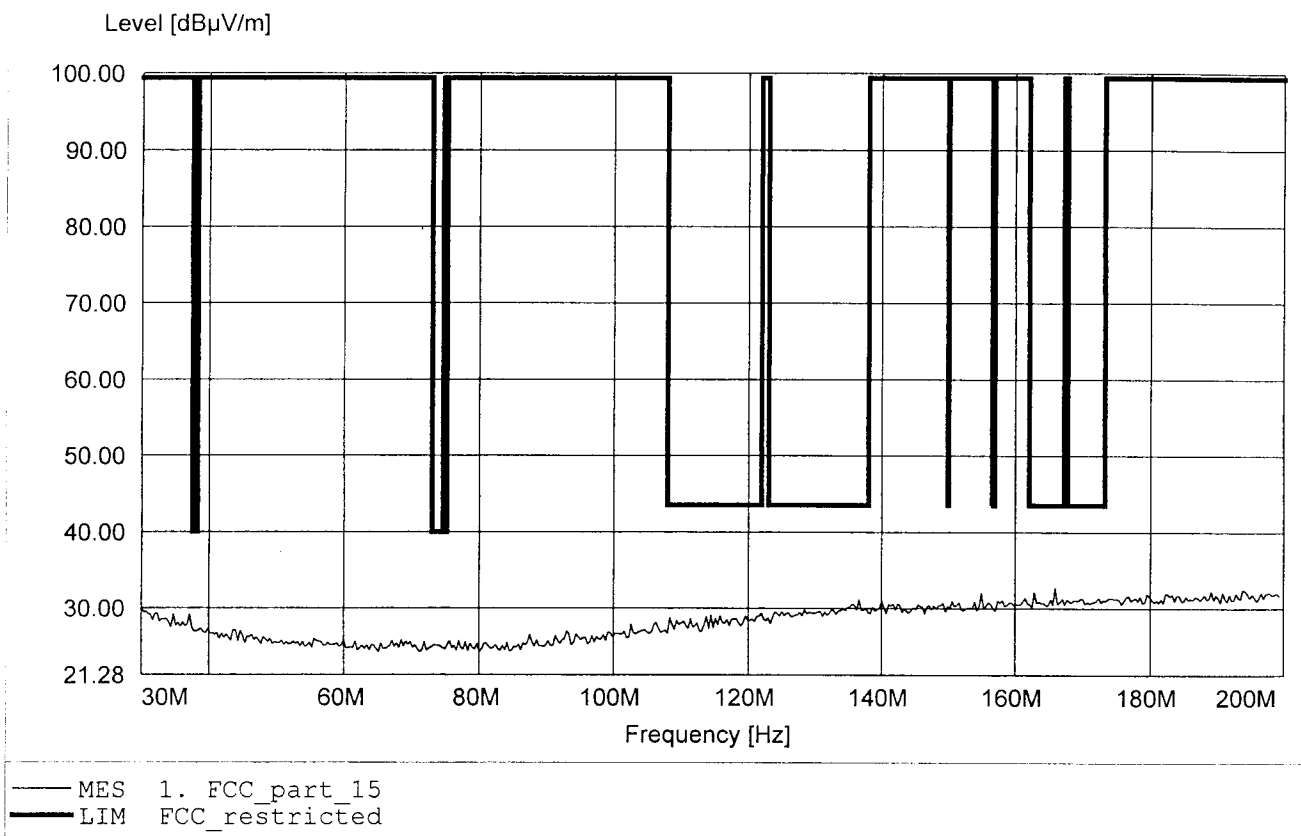


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:183.988MHz Emax:33.11dBuV/m RBW: 100 kHz

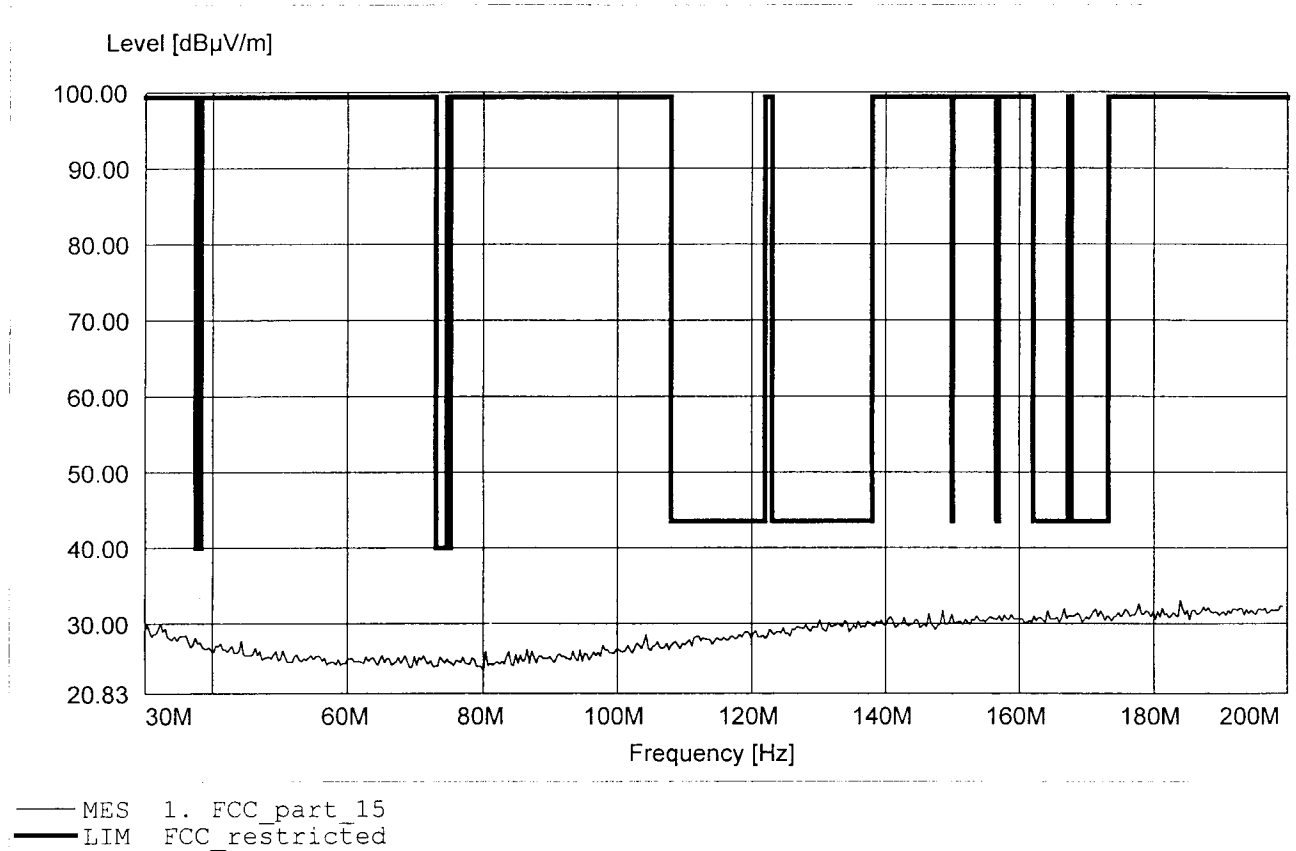


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to §15.247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq:669.739MHz Emax:26.28dBµV/m RBW: 100 kHz

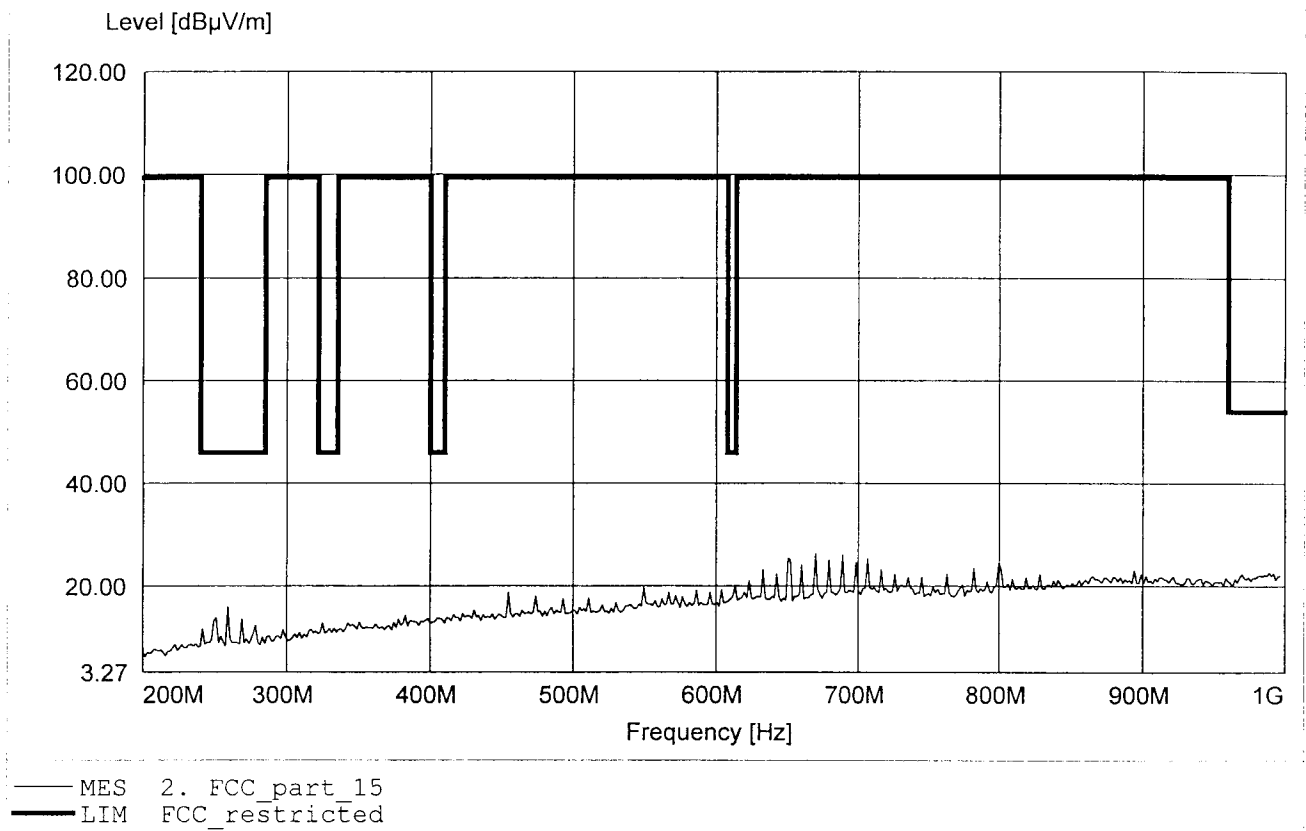


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to §15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq:688.978MHz Emax:27.19dBµV/m RBW: 100 kHz

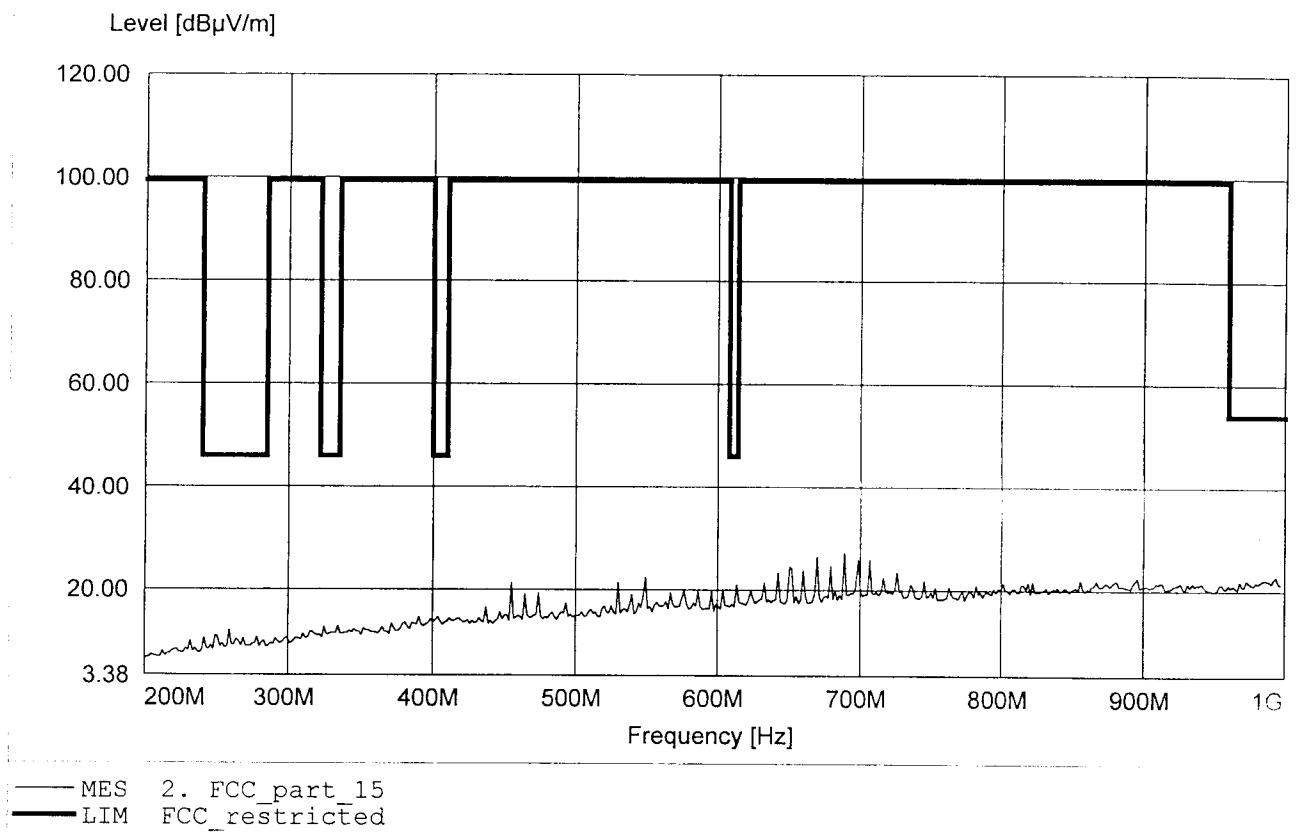


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq:2.503GHz Emax:42.75dBμV/m RBW: 1 MHz

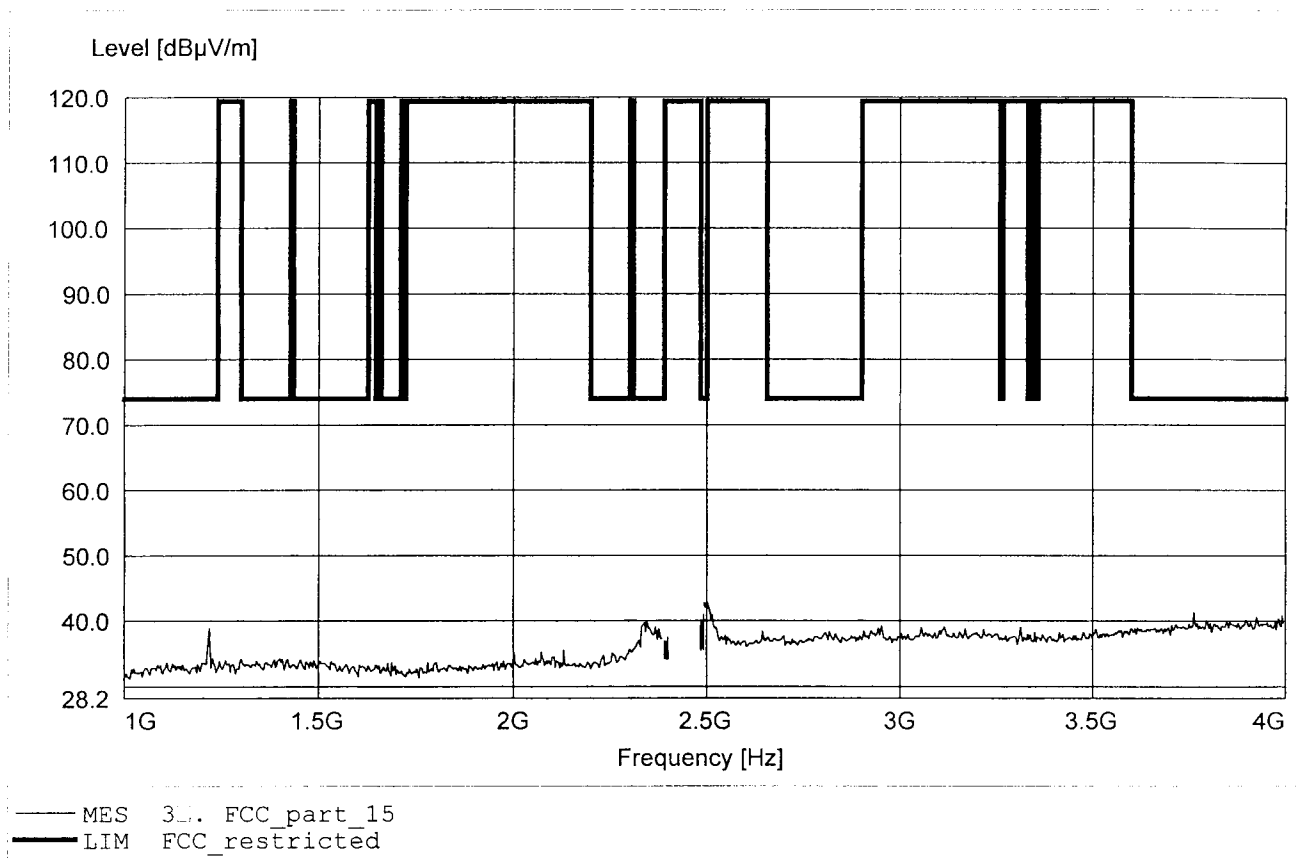


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to §15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq:2.506GHz Emax:45.25dBμV/m RBW: 1 MHz

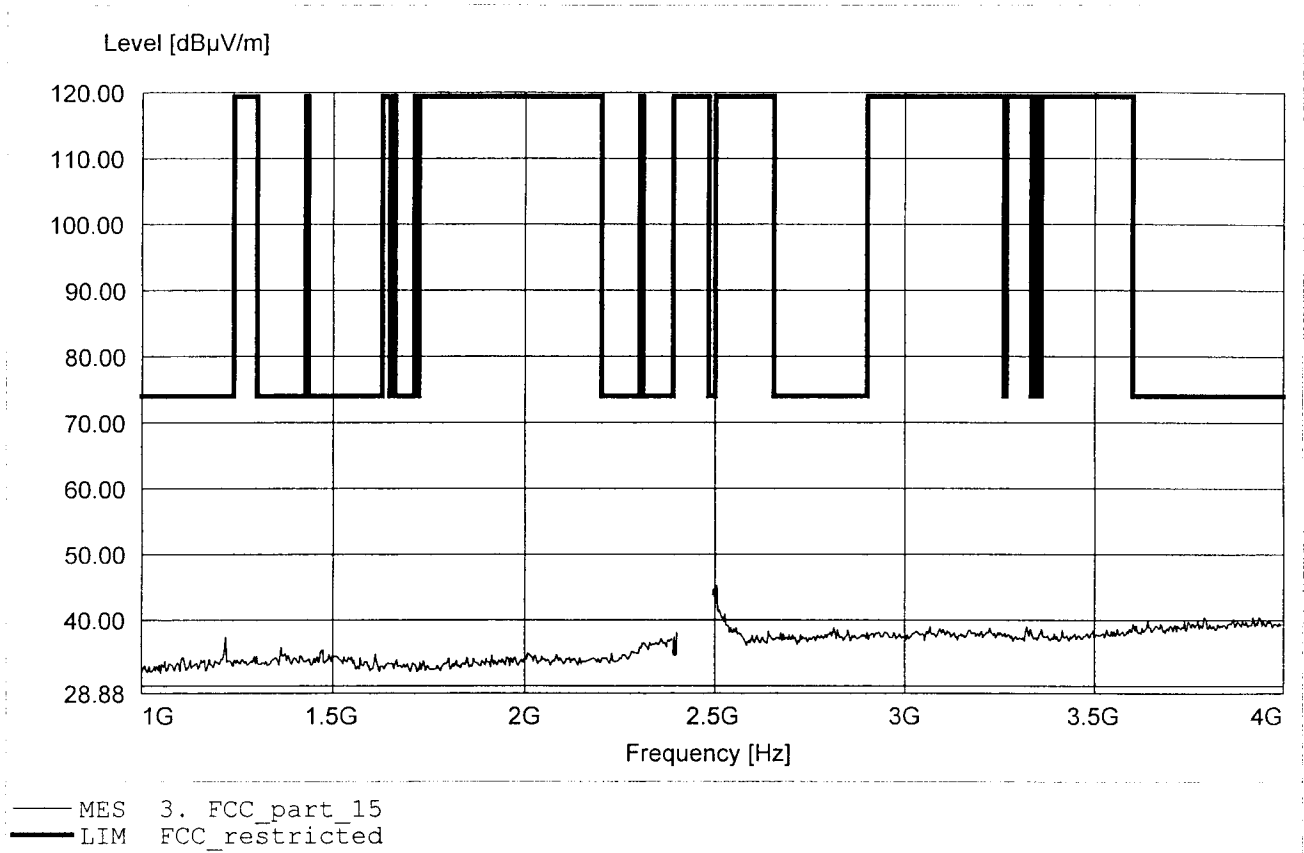


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to §15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq:4.882GHz Emax:52.56dBµV/m RBW: 1 MHz

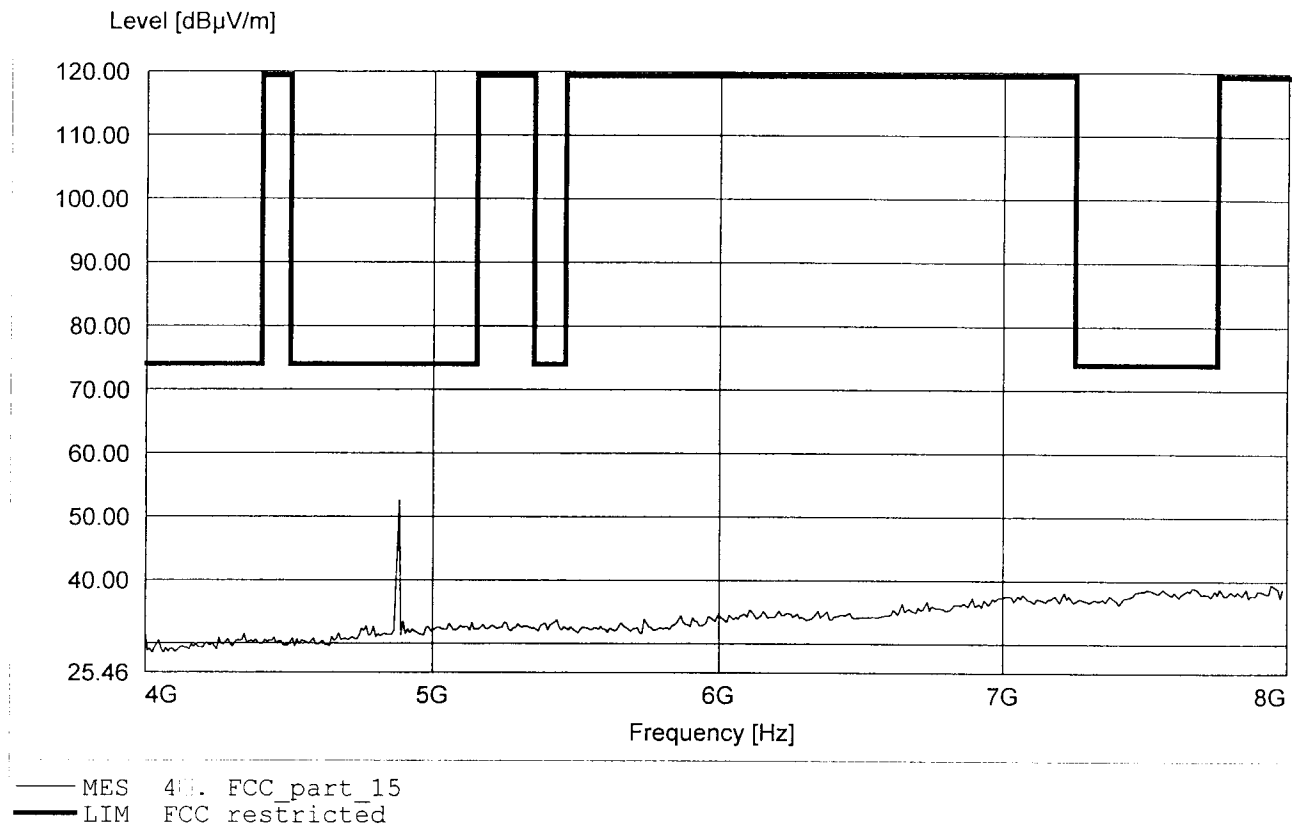


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq:4.882GHz Emax:56.27dBμV/m RBW: 1 MHz

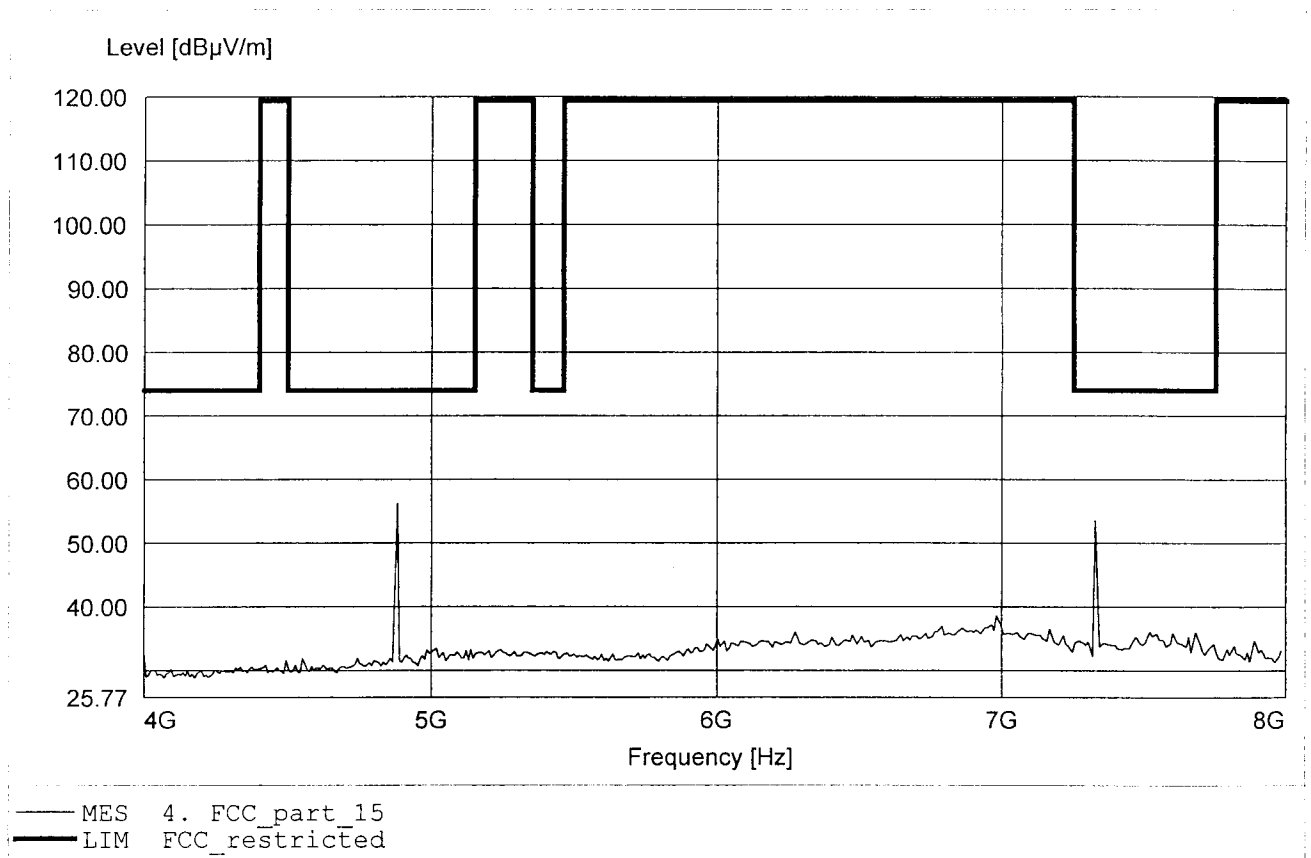


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq:11.703GHz Emax:42.82dBuV/m RBW: 1 MHz

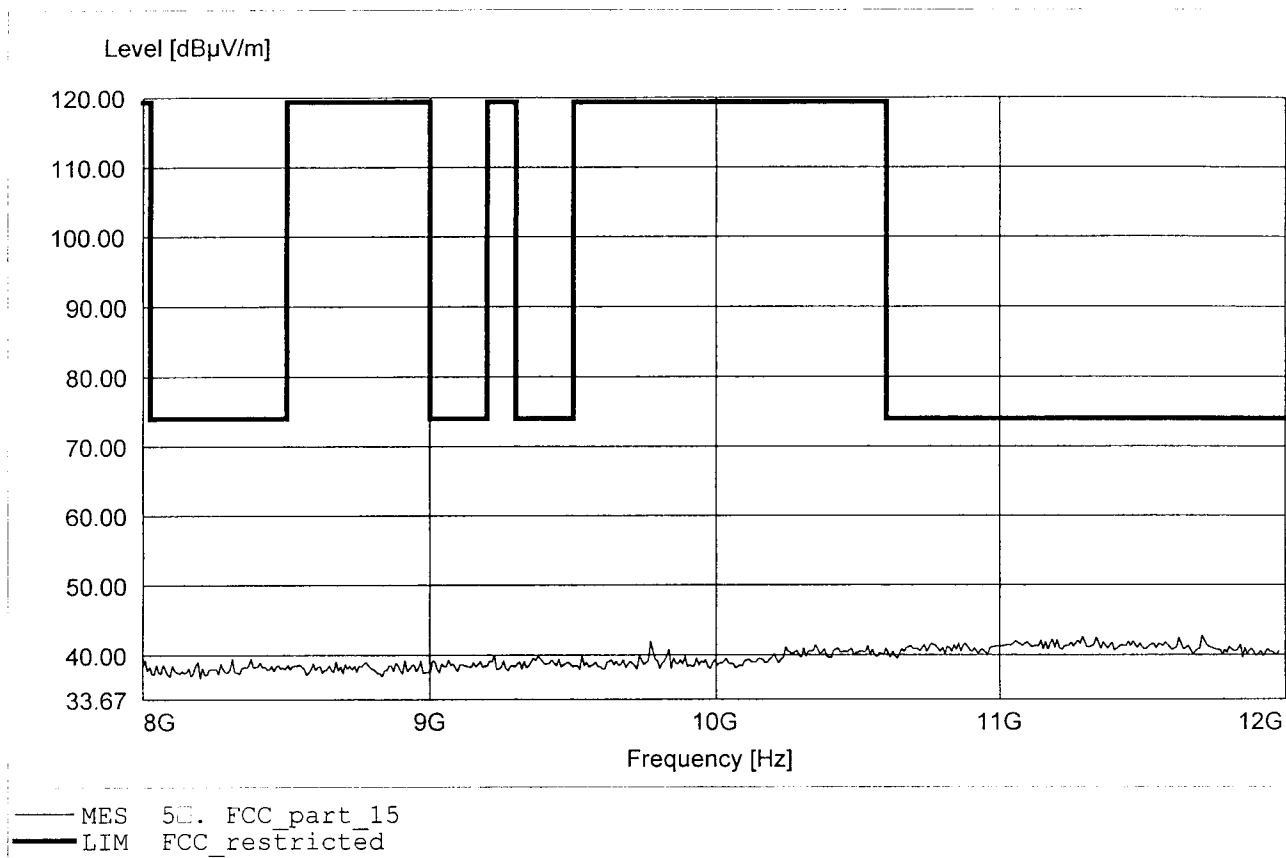


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq:9.772GHz Emax:45.34dBµV/m RBW: 1 MHz

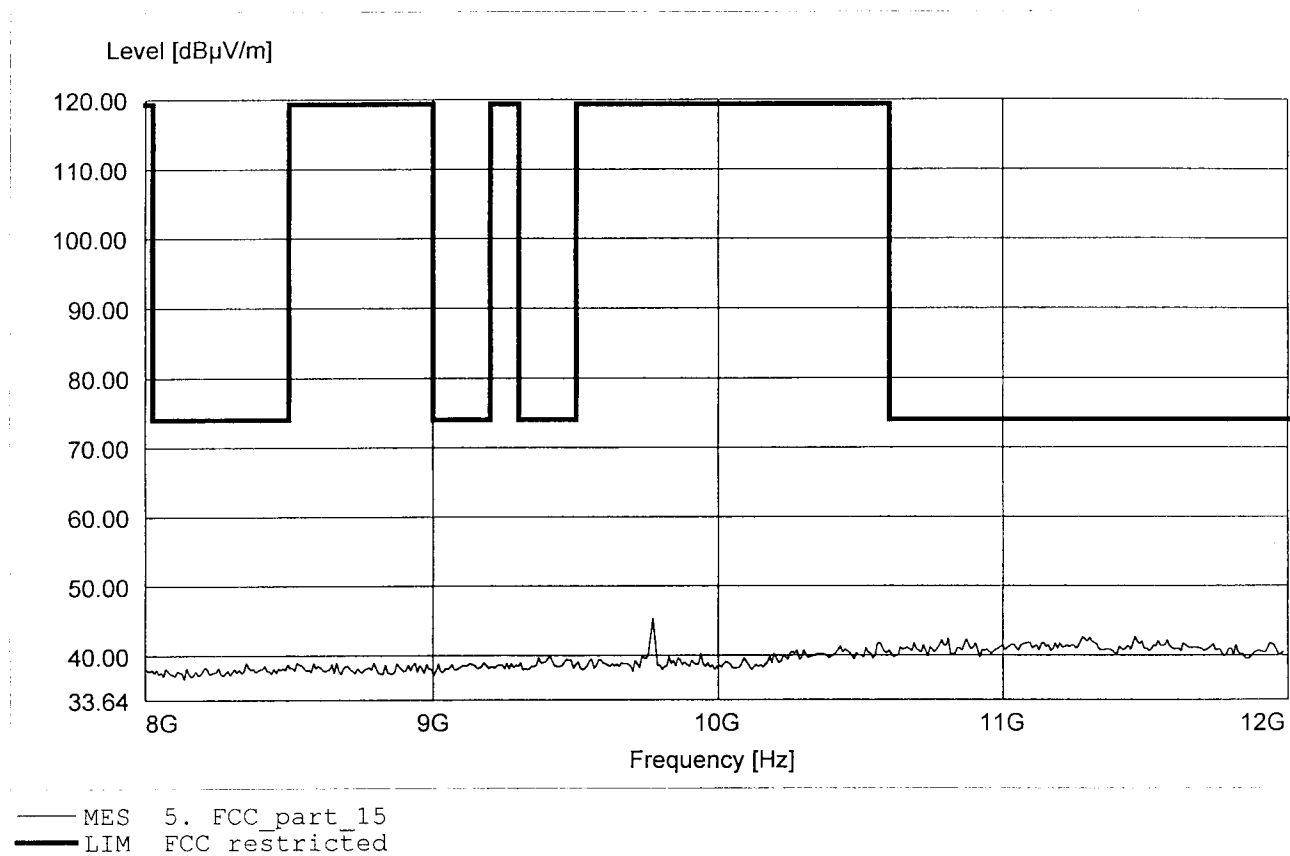


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:14.655GHz Emax:47.18dBμV/m RBW: 1 MHz

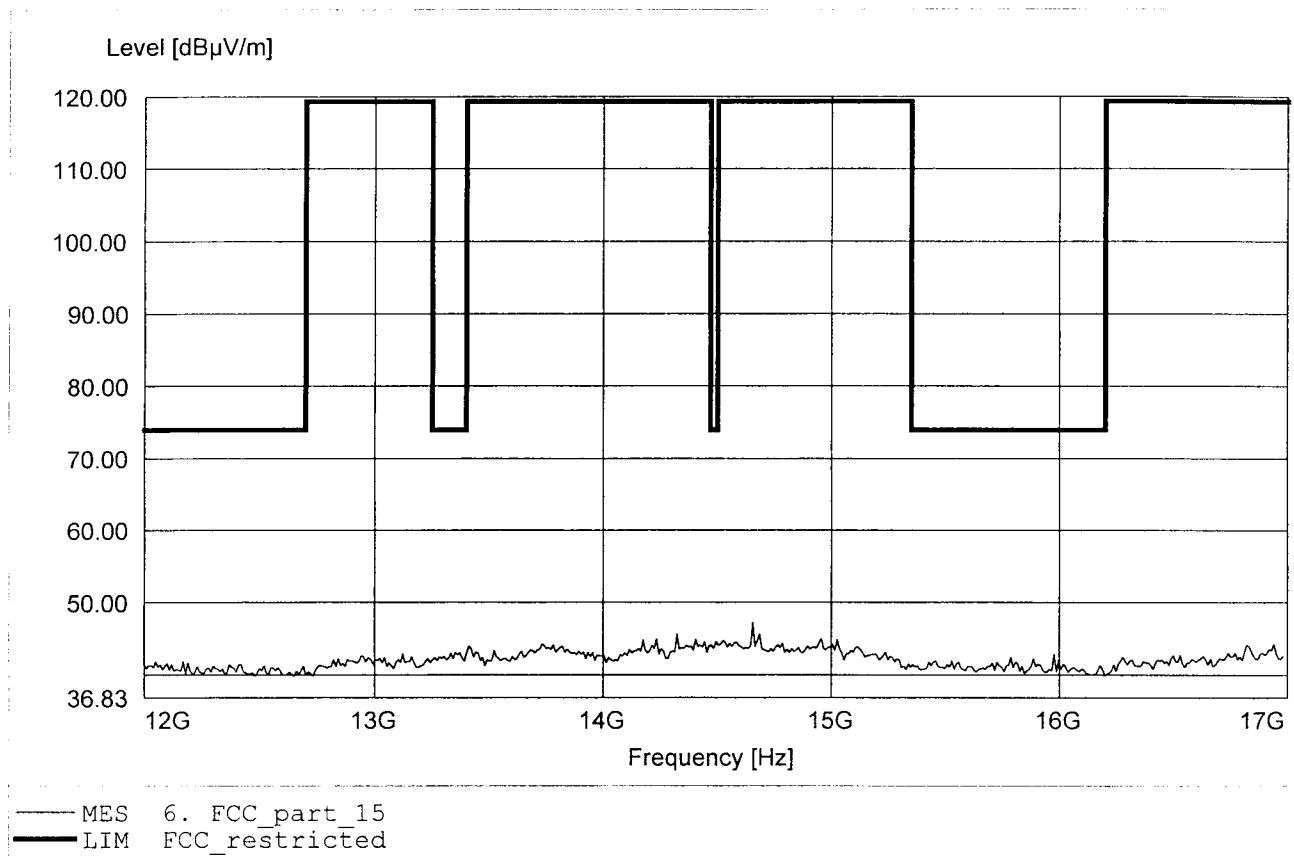


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:14.655GHz Emax:49.89dBμV/m RBW: 1 MHz

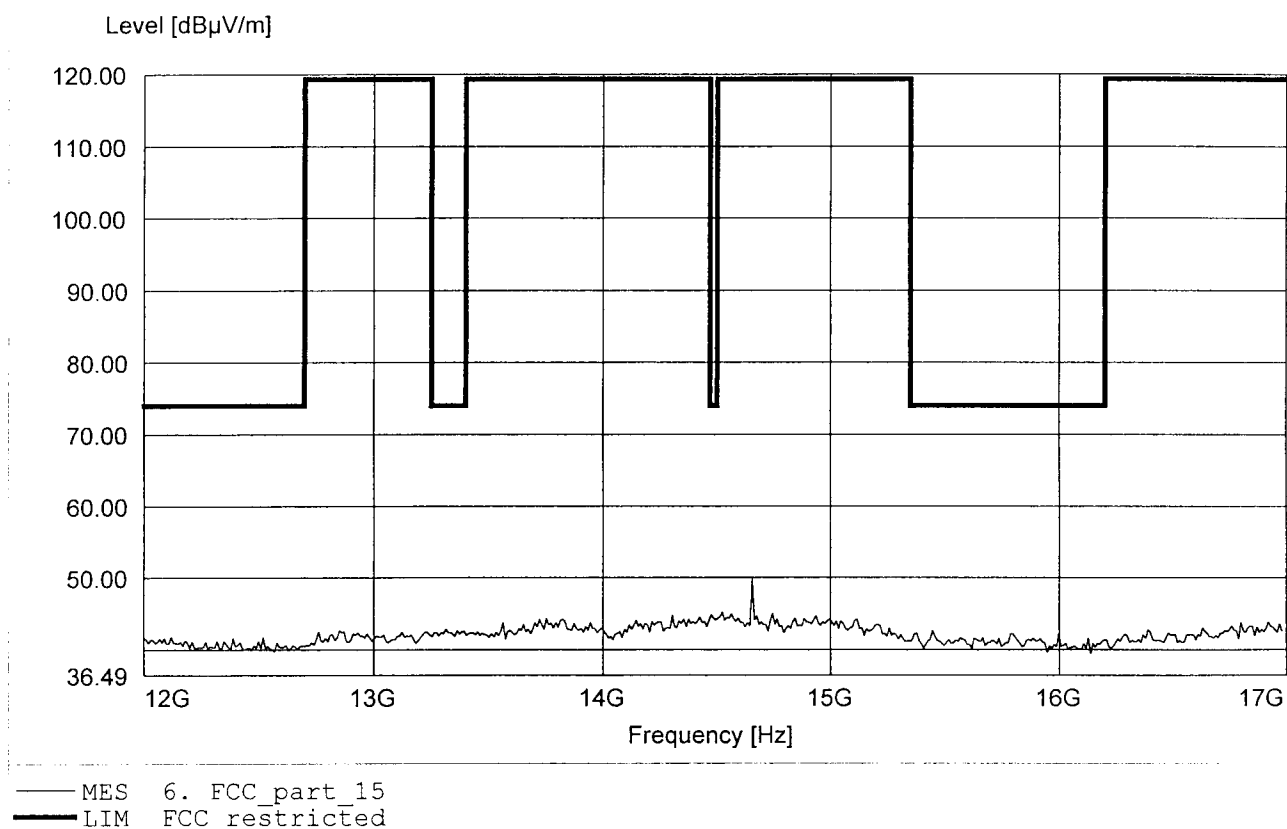


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:26.157GHz Emax:50.40dBμV/m RBW: 1 MHz

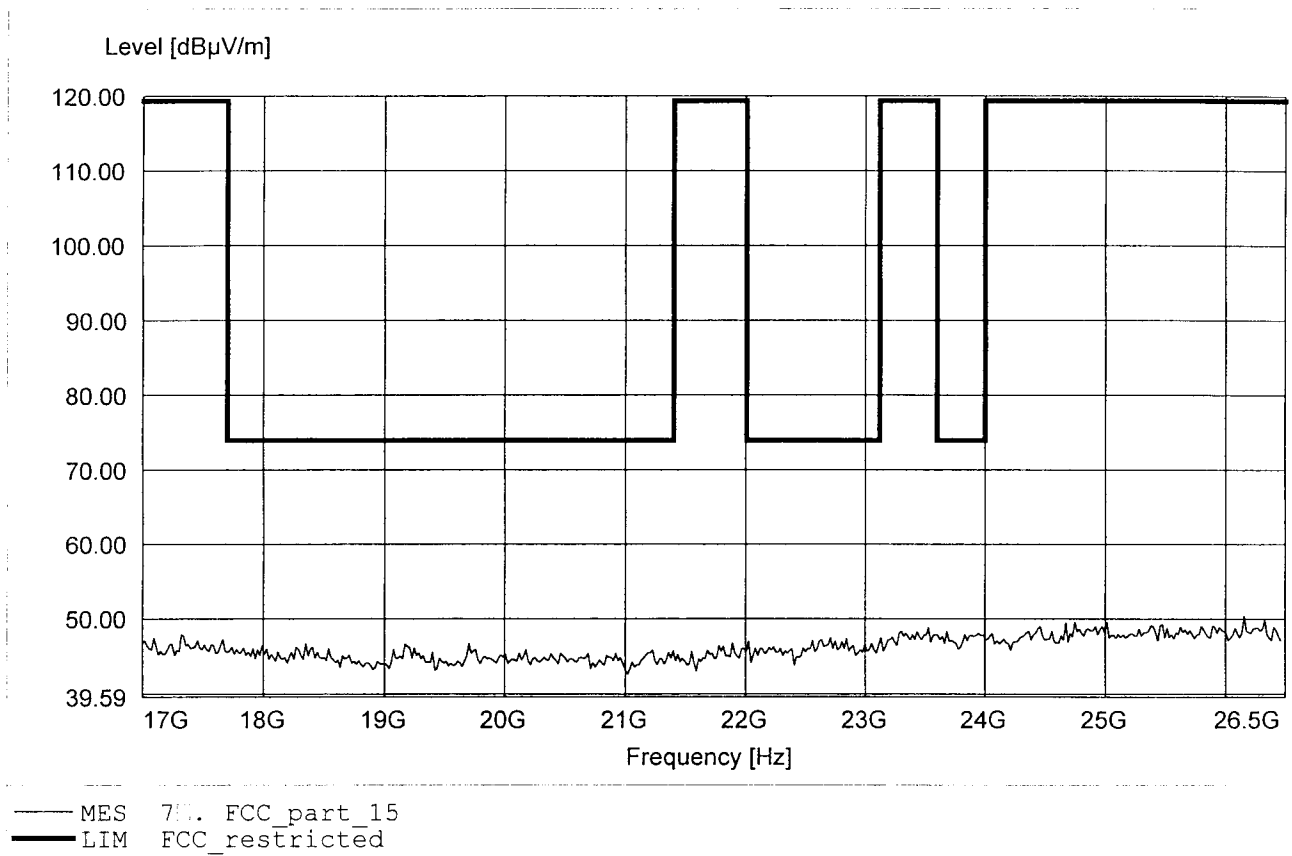

Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:26.024GHz Emax:49.64dBμV/m RBW: 1 MHz

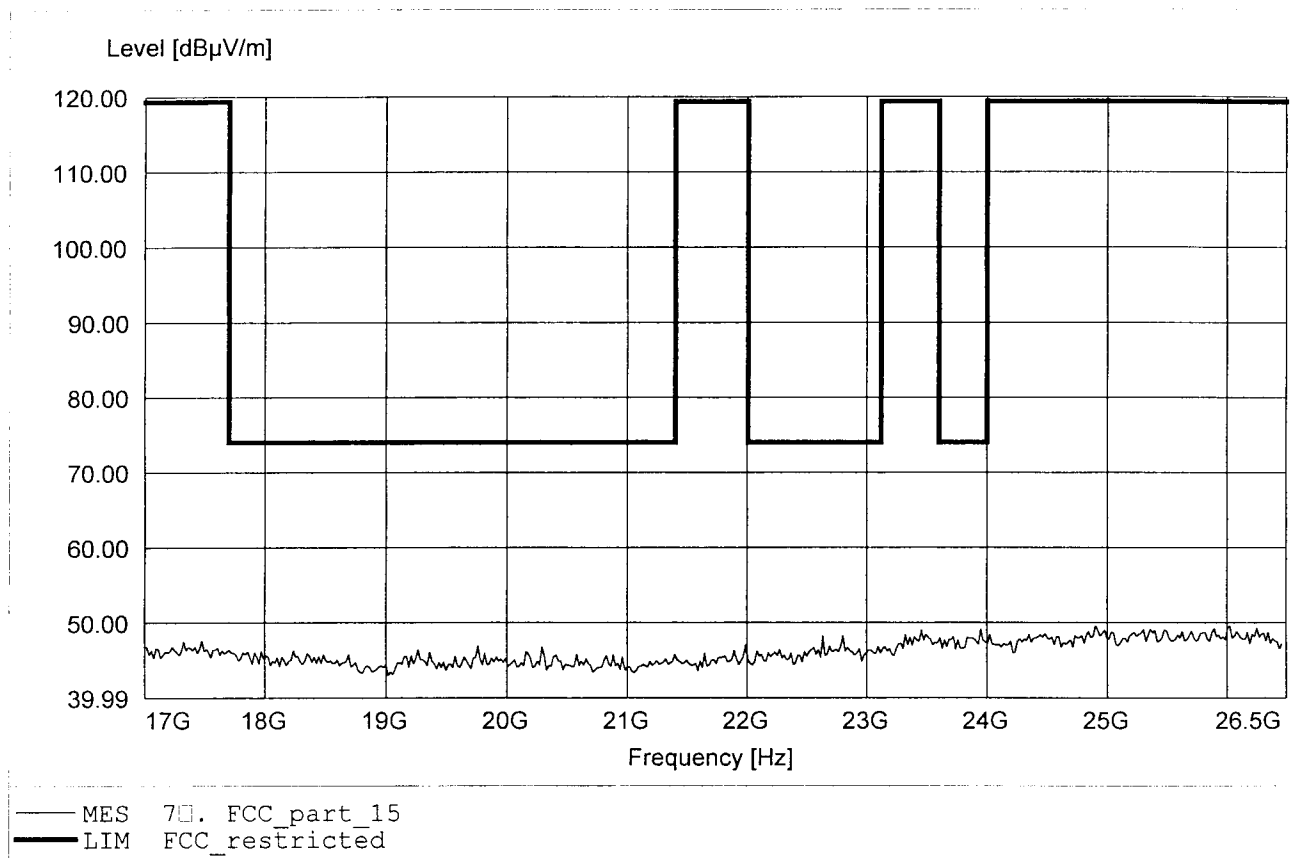


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

```


EUT :          Cordless Headset   /   Base   /   Ant.: 2   /   Ch.: 78
Model:         Gn 9050
Manufacturer:  GN Netcom
Operating Condition:  Unom: 120 V AC   (AC/DC adaptor),      Tnom:23°C
Test Site / Operator:  ETS / Mr. Hoppe
Test Specification:    according to §15247 / mode: Tx
Comment 1:             Dist.: 3m, Ant.: HK 116
Comment 2:             Freq:193.186MHz Emax:33.07dBuV/m RBW: 100 kHz

```

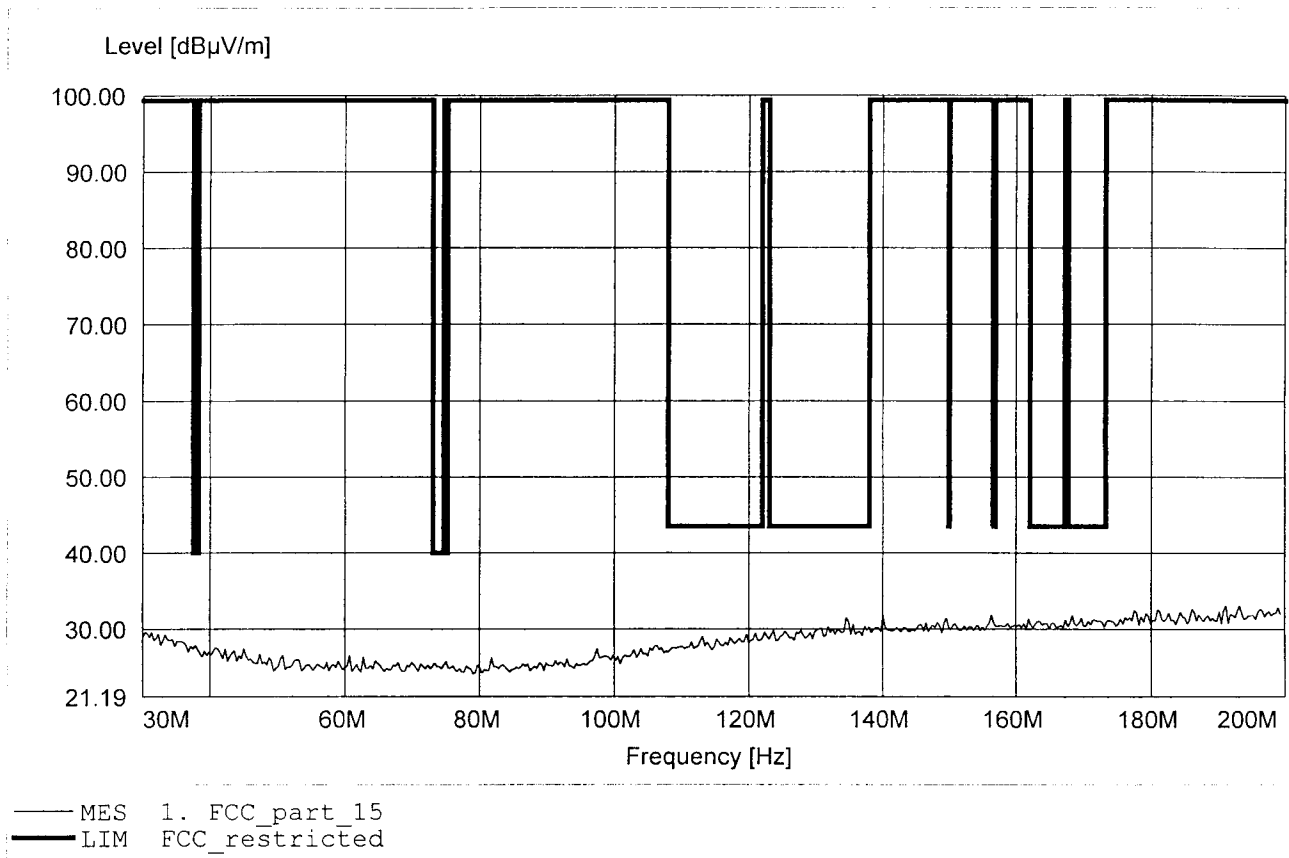


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:179.900MHz Emax:33.15dBµV/m RBW: 100 kHz

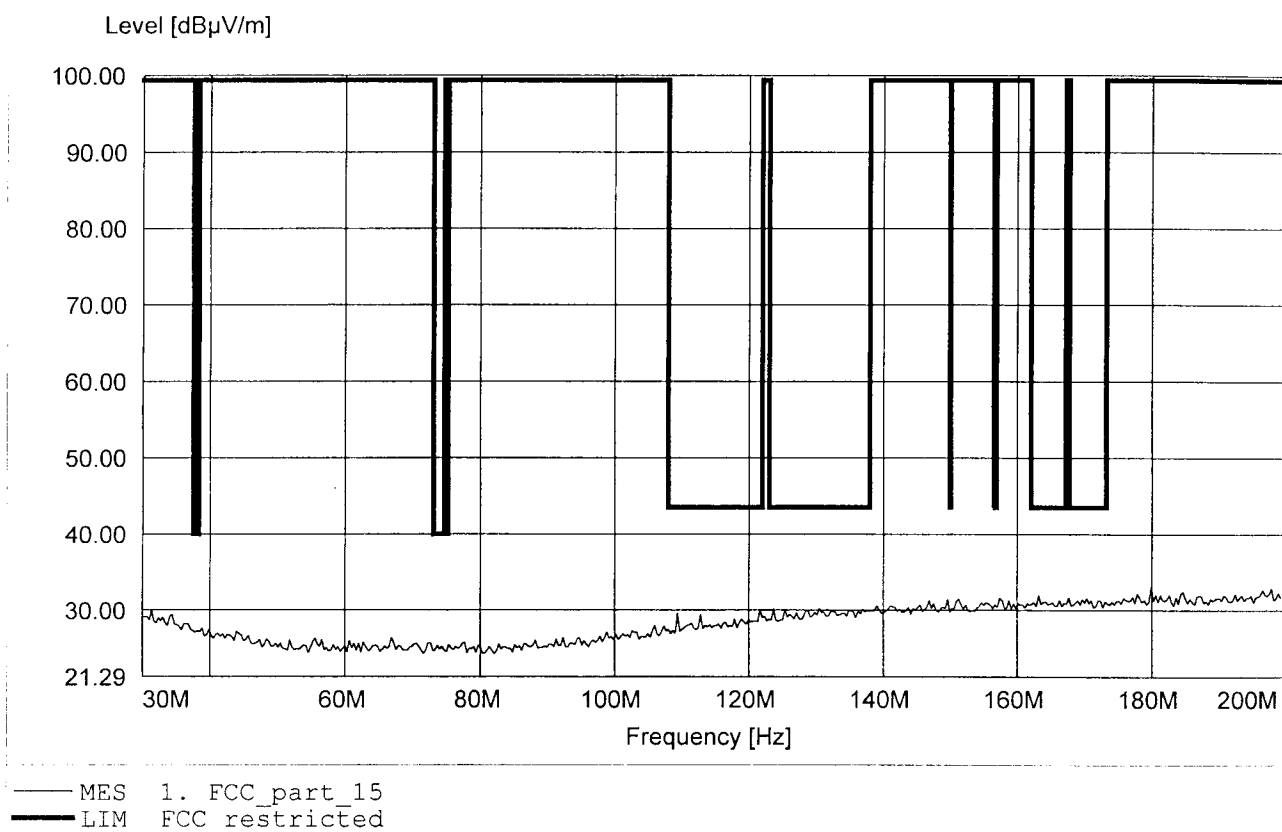


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq:706.613MHz Emax:27.39dBµV/m RBW: 100 kHz

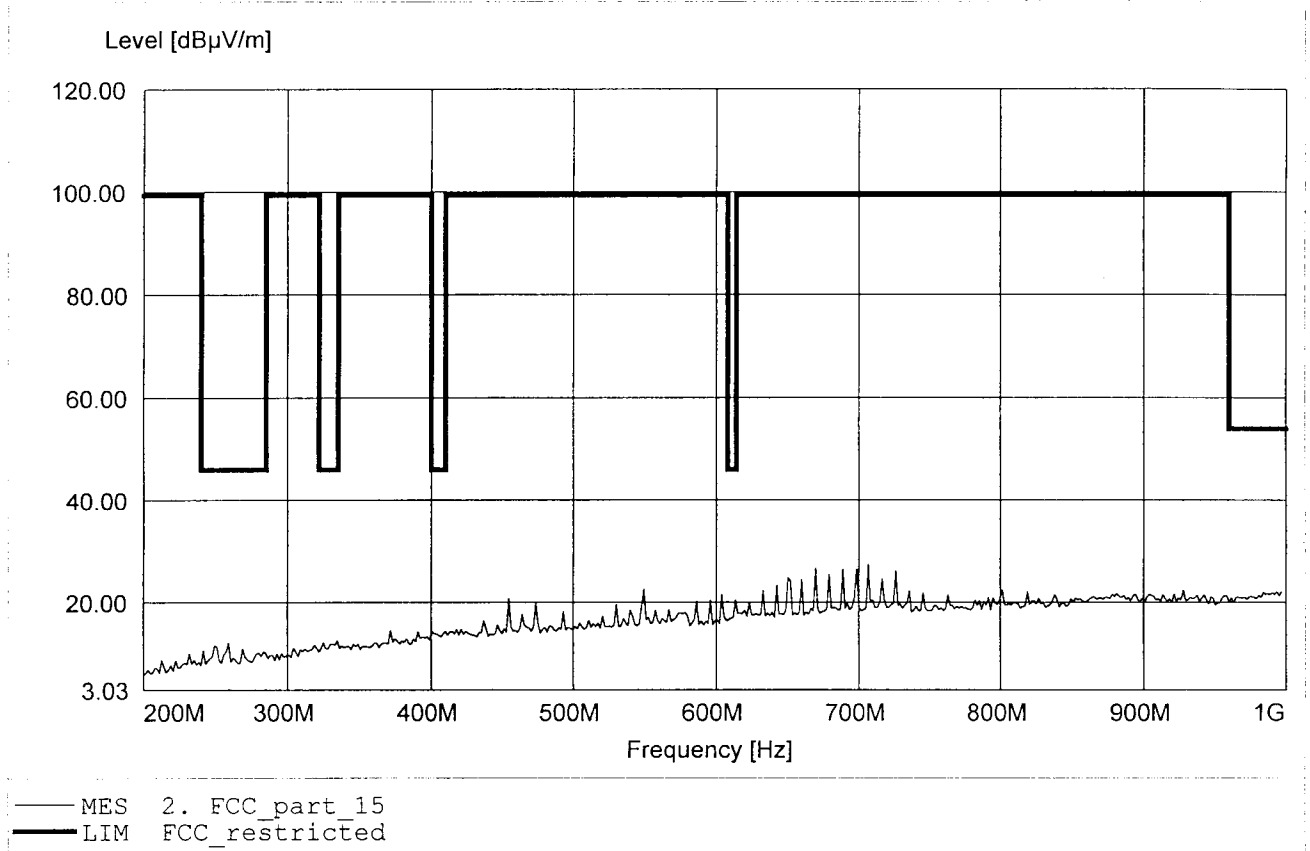


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq:669.739MHz Emax:26.33dBµV/m RBW: 100 kHz

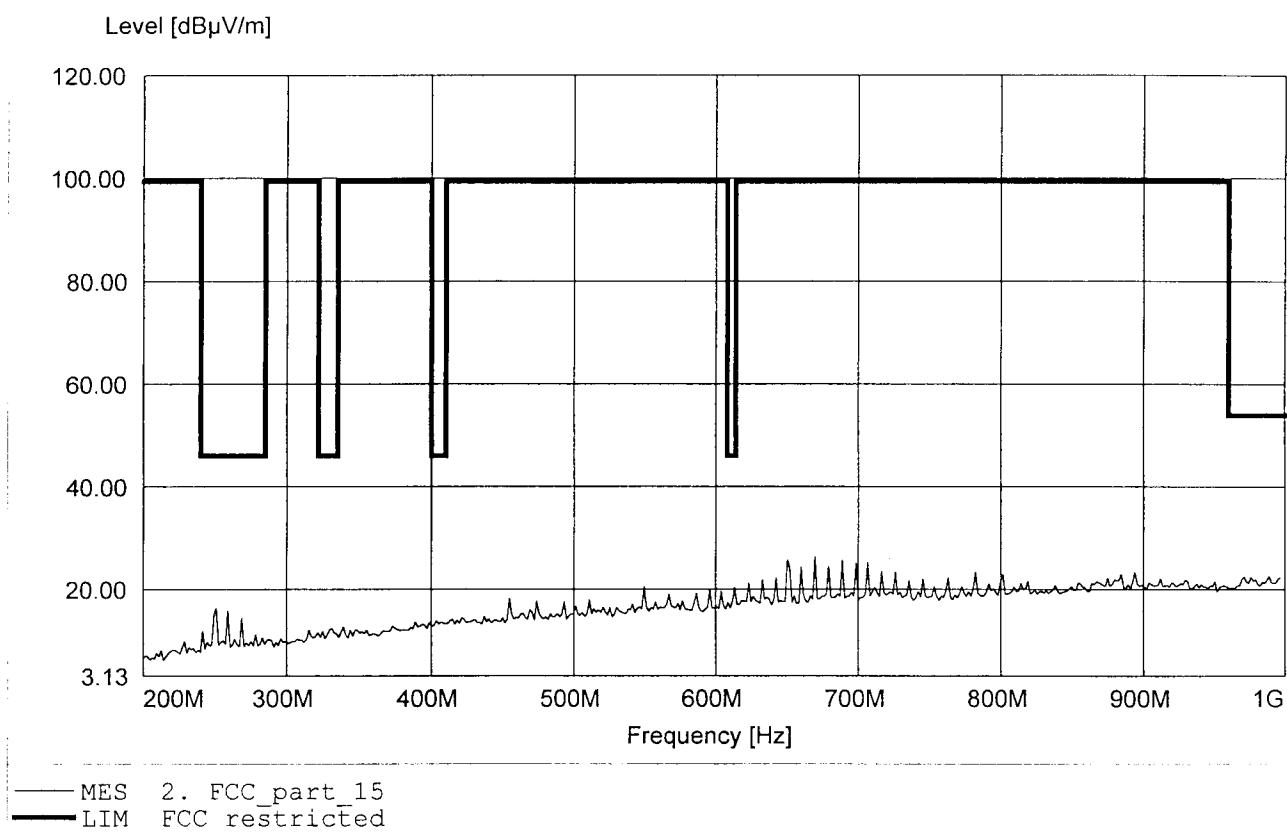


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq:2.483GHz Emax:62.53dBμV/m RBW: 1 MHz

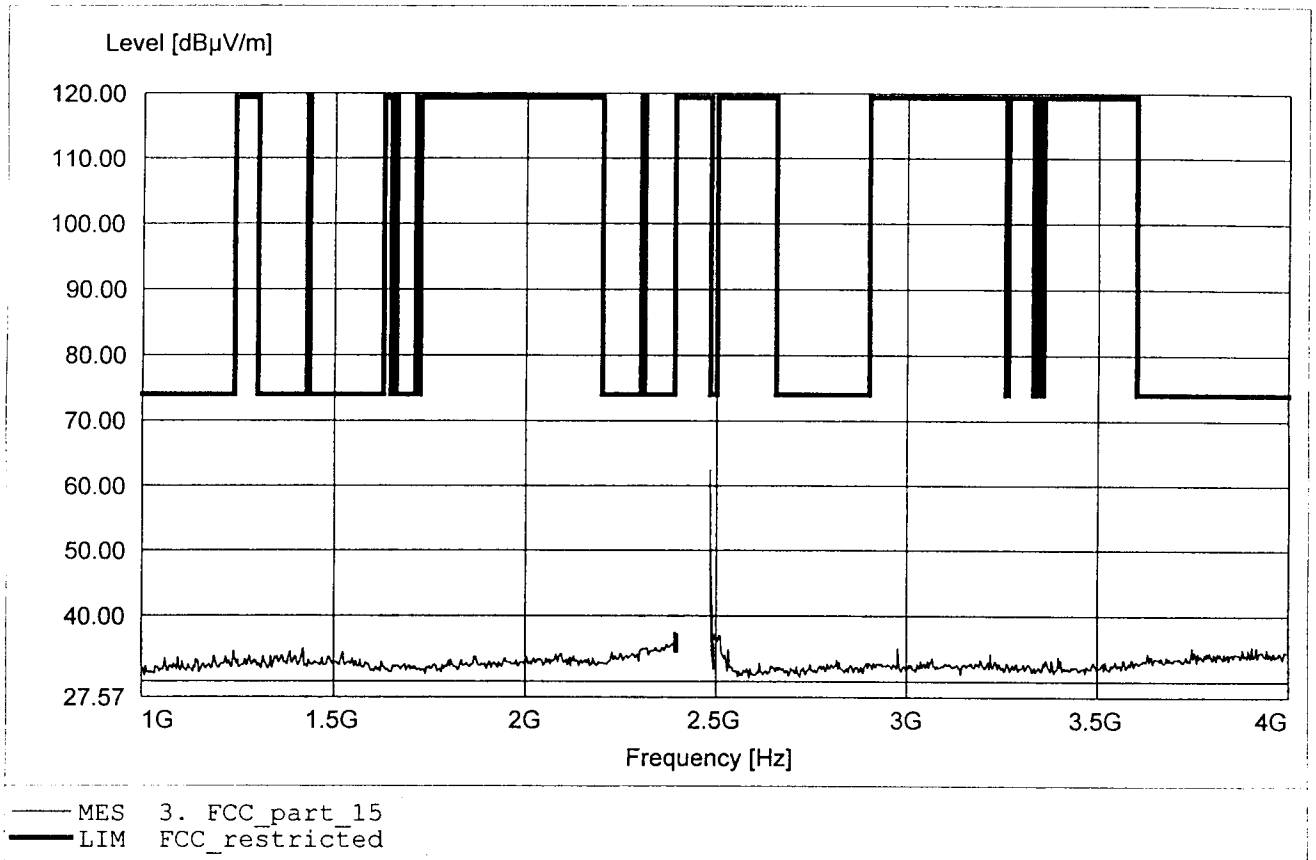


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to §15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq:2.483GHz Emax:64.70dBμV/m RBW: 1 MHz

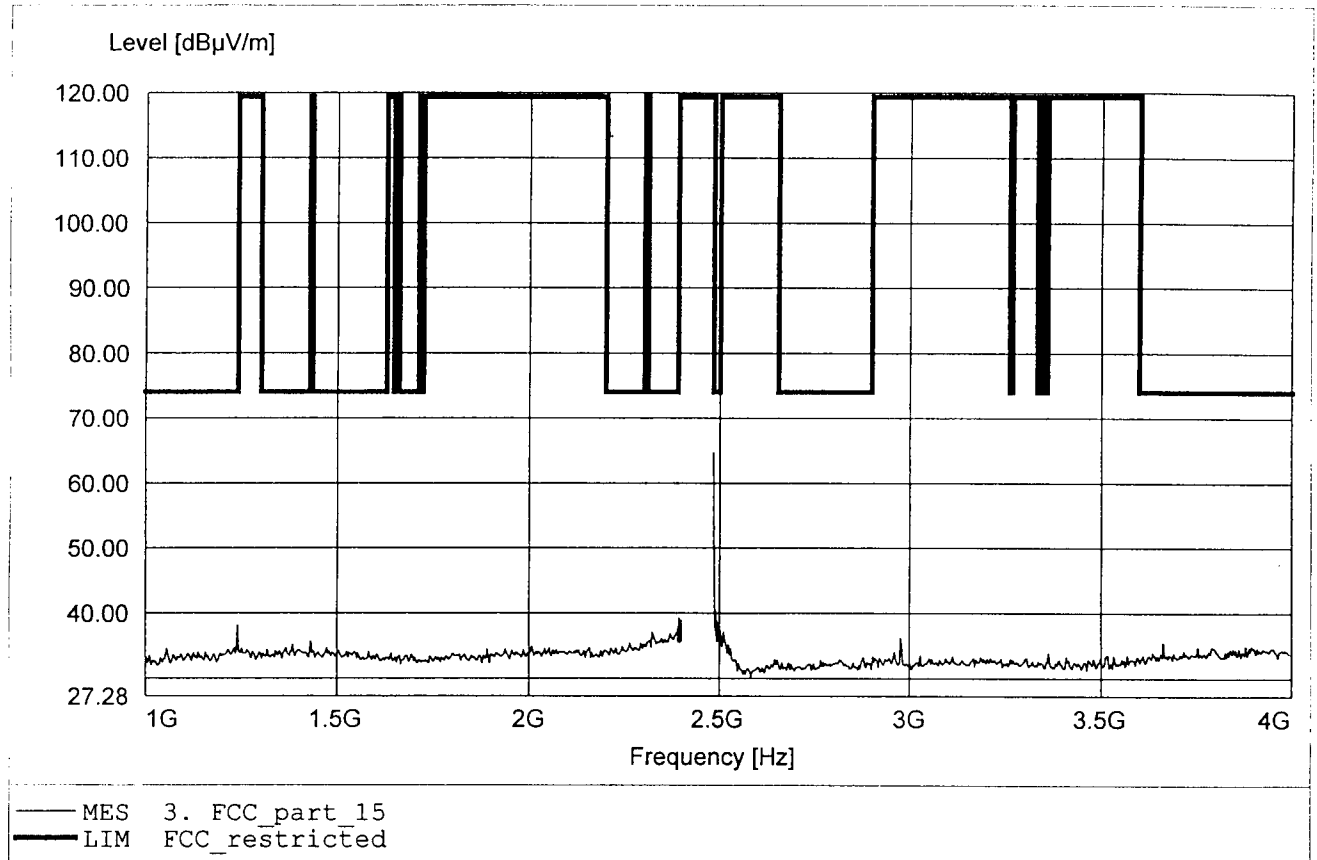


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq:4.962GHz Emax:55.26dBμV/m RBW: 1 MHz

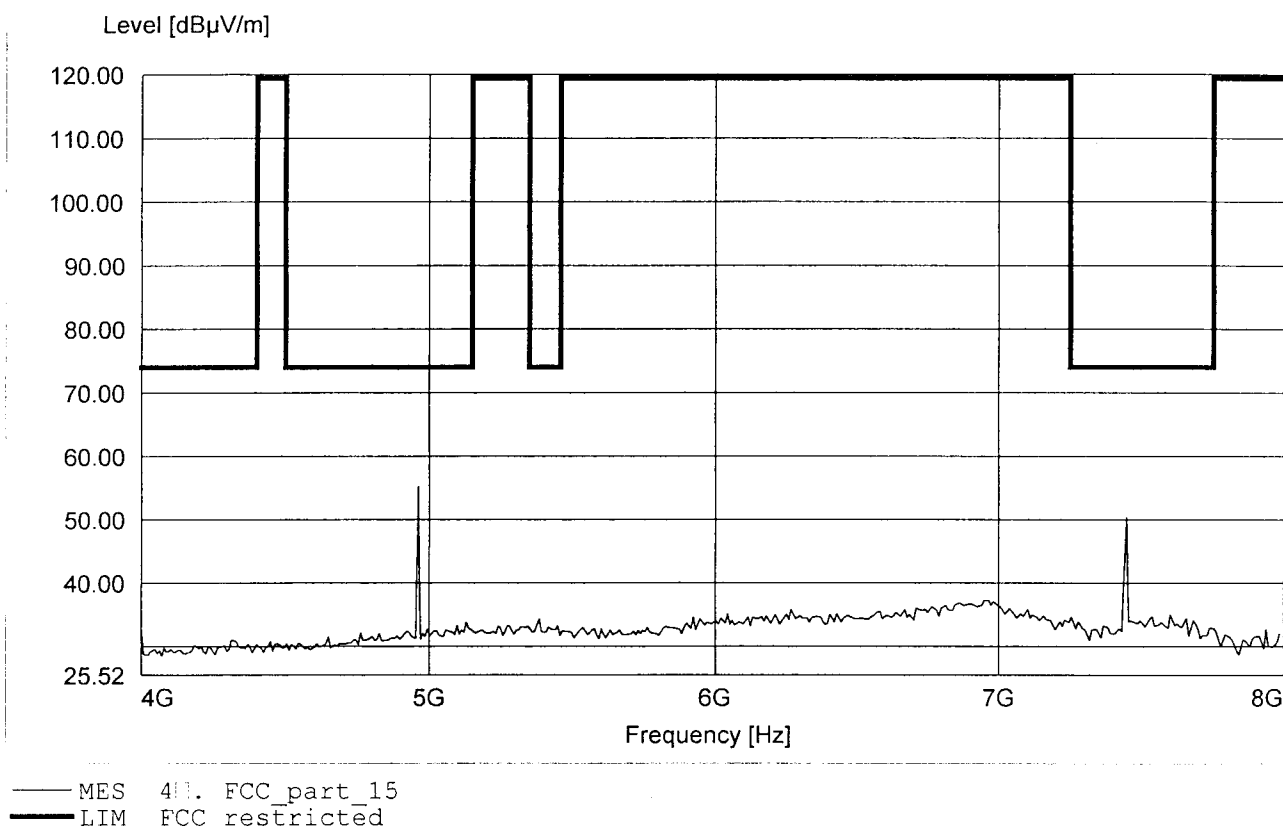


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq:4.962GHz Emax:62.54dBμV/m RBW: 1 MHz

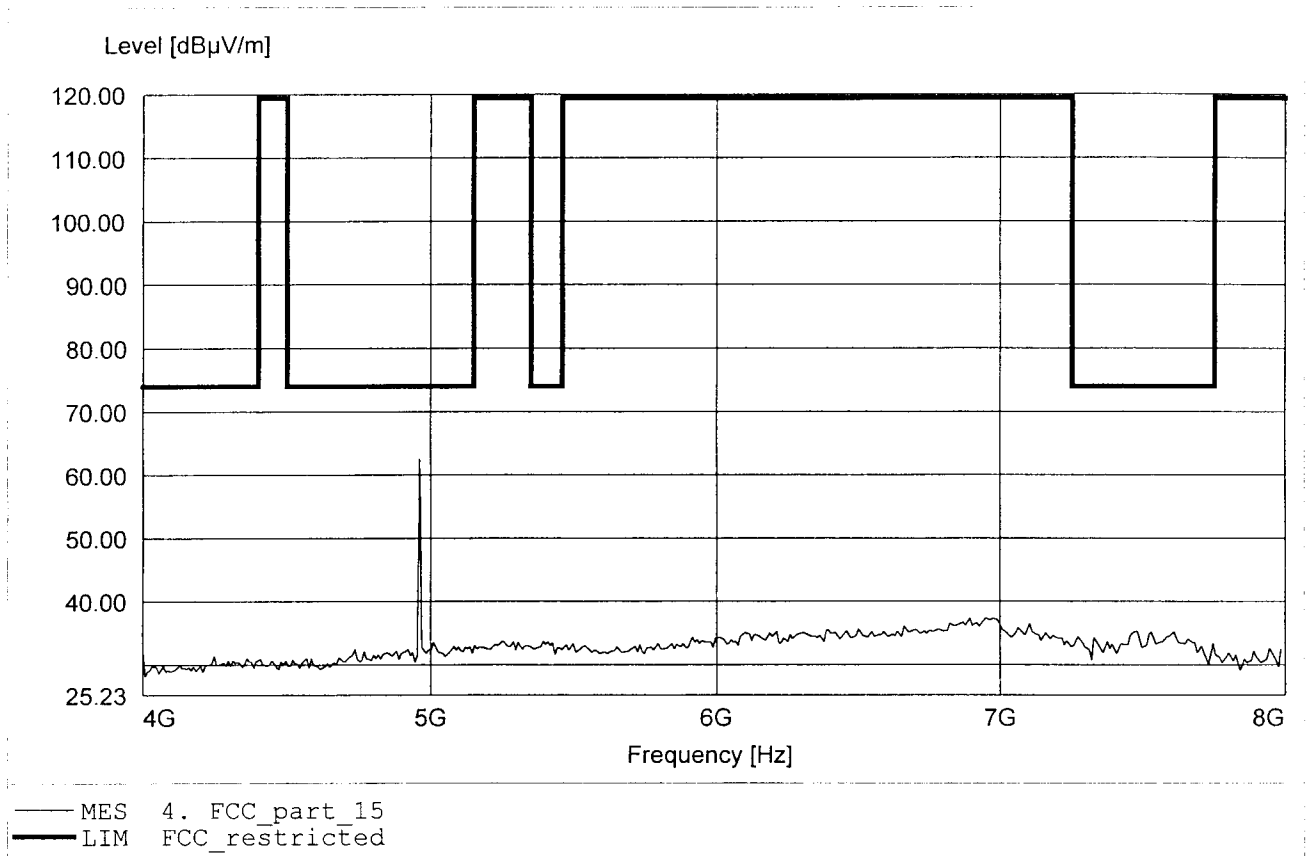


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq:10.790GHz Emax:42.07dBuV/m RBW: 1 MHz

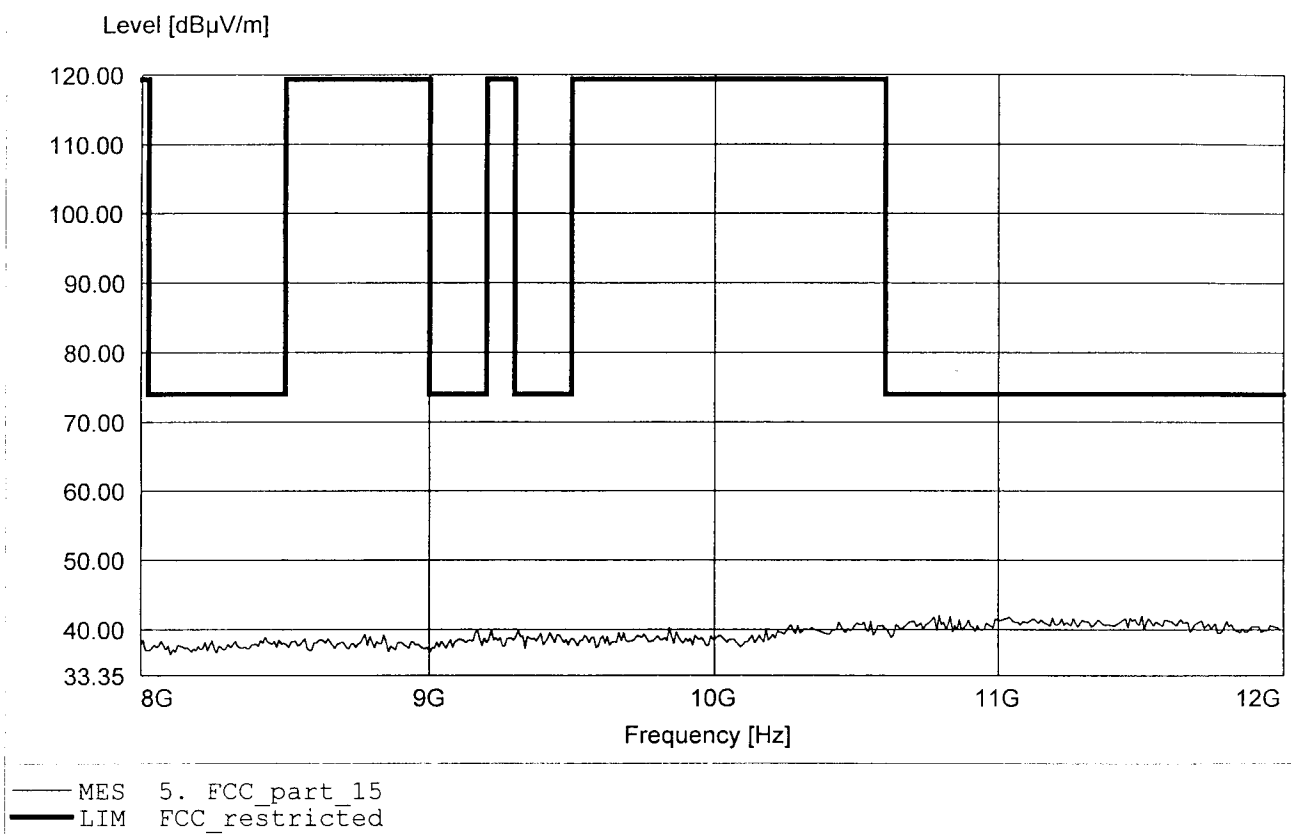


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq:11.479GHz Emax:43.00dBμV/m RBW: 1 MHz

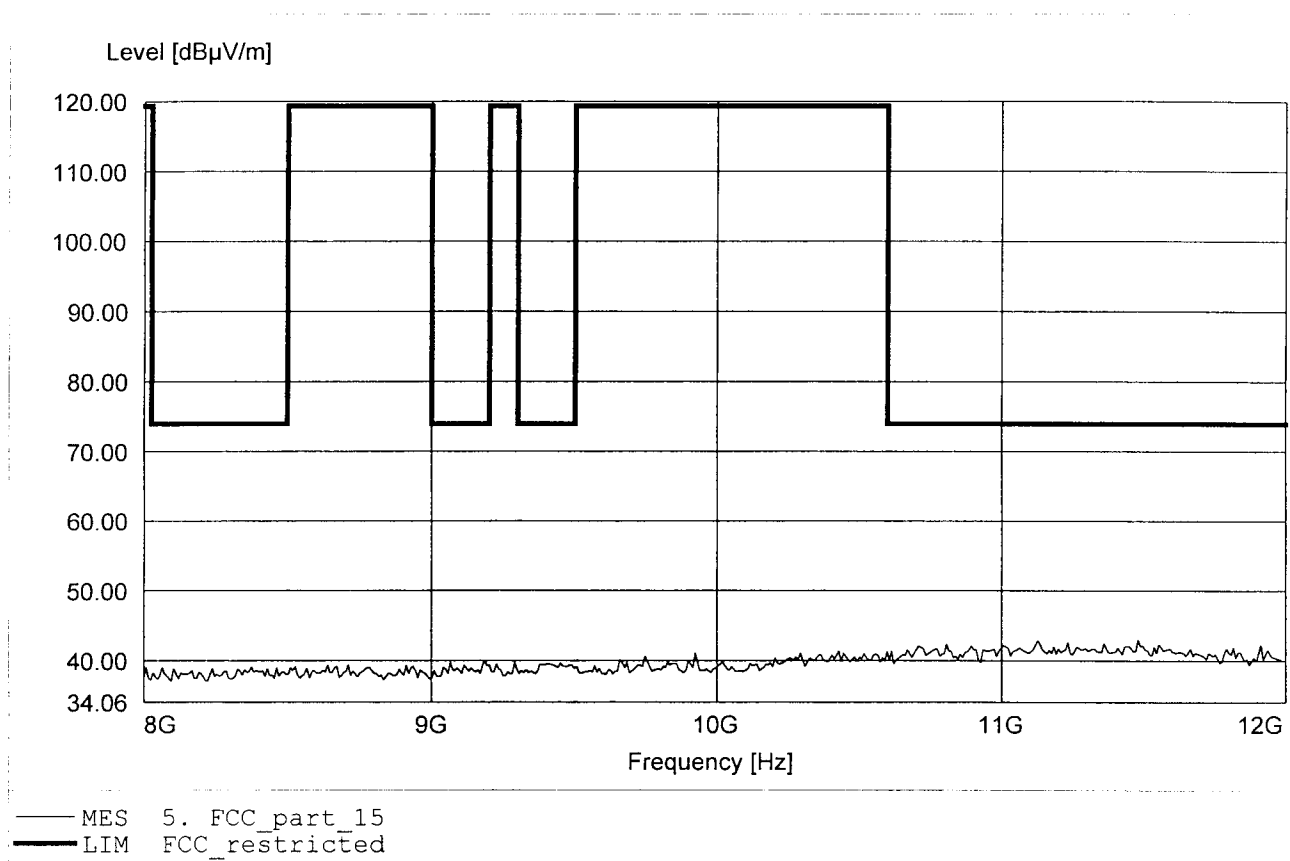


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:14.505GHz Emax:45.54dBμV/m RBW: 1 MHz

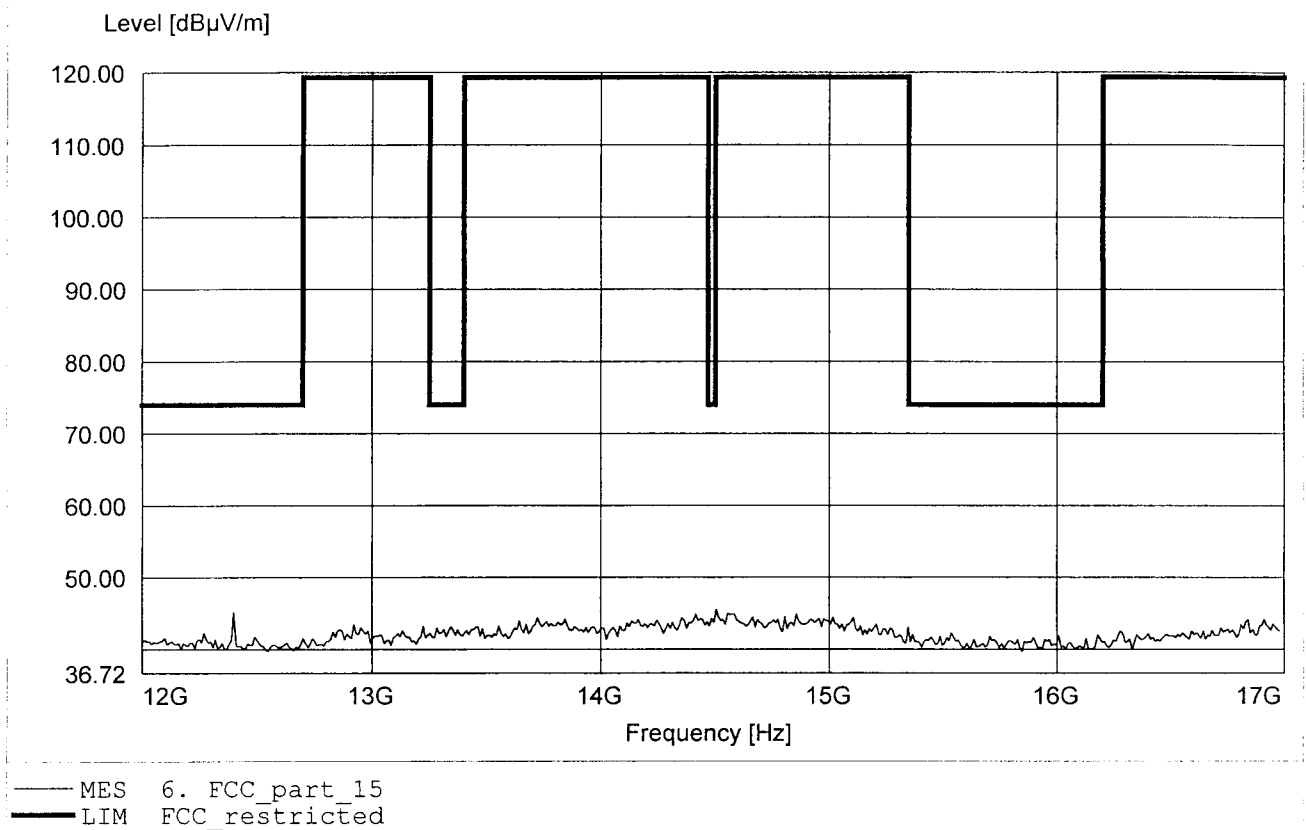


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:14.896GHz Emax:51.50dBμV/m RBW: 1 MHz

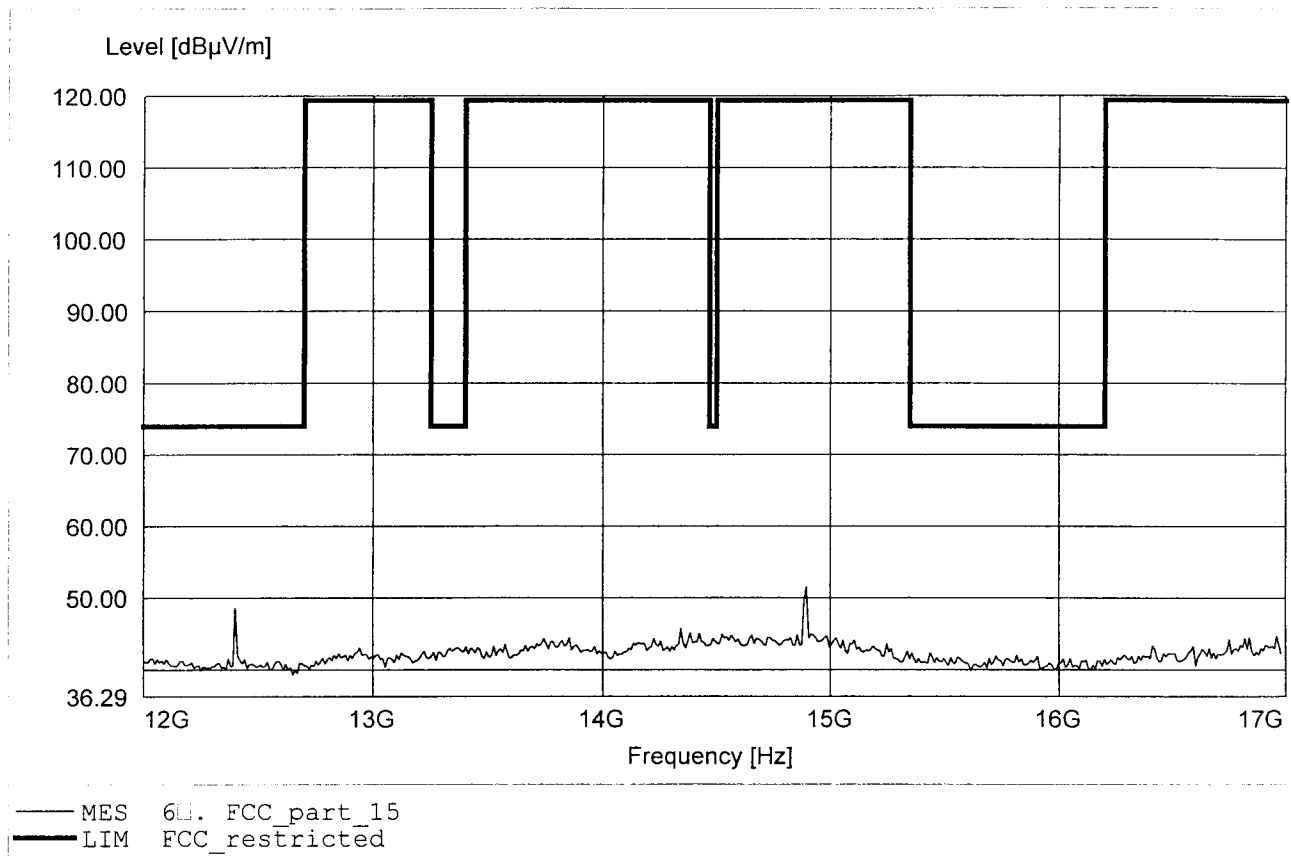


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:25.796GHz Emax:49.93dBμV/m RBW: 1 MHz

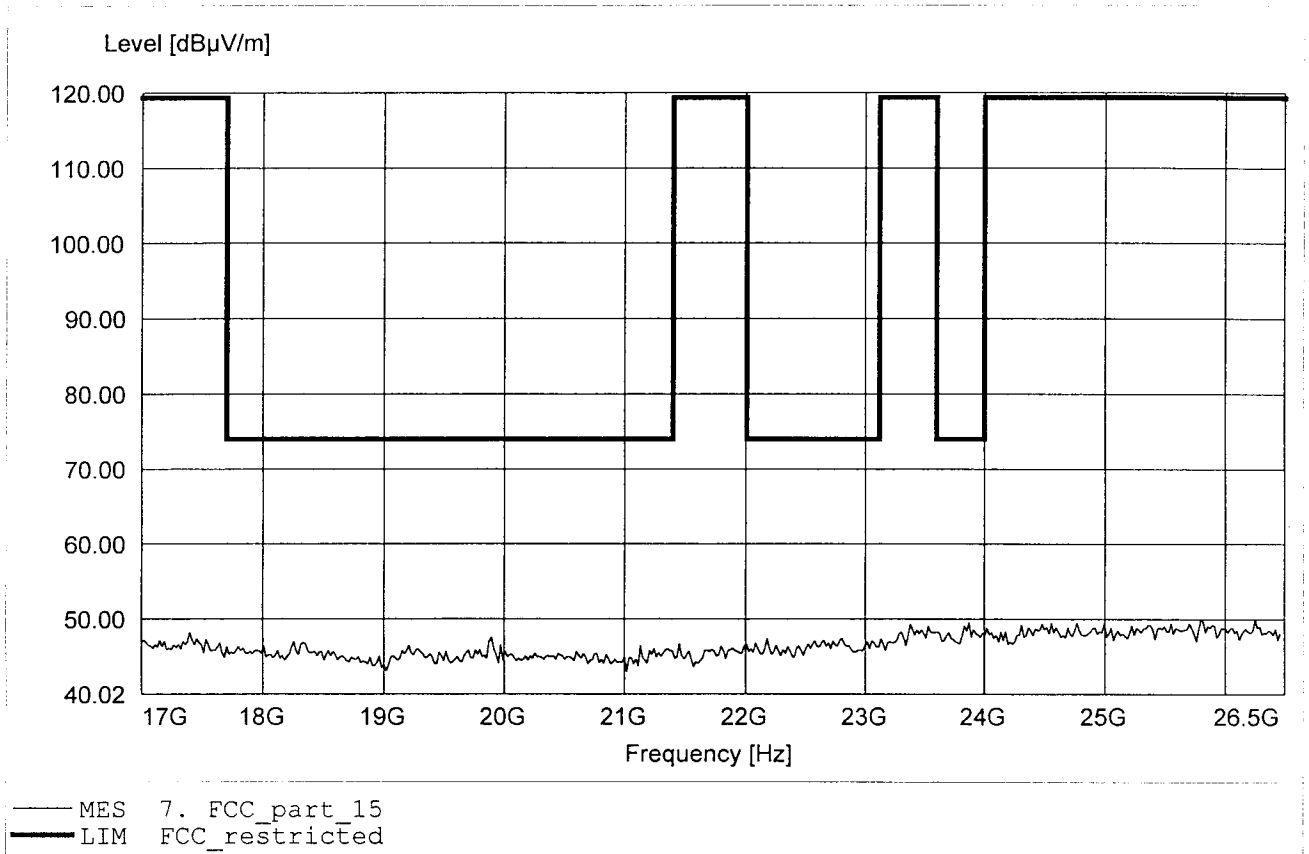

Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to §15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:26.062GHz Emax:50.23dBμV/m RBW: 1 MHz

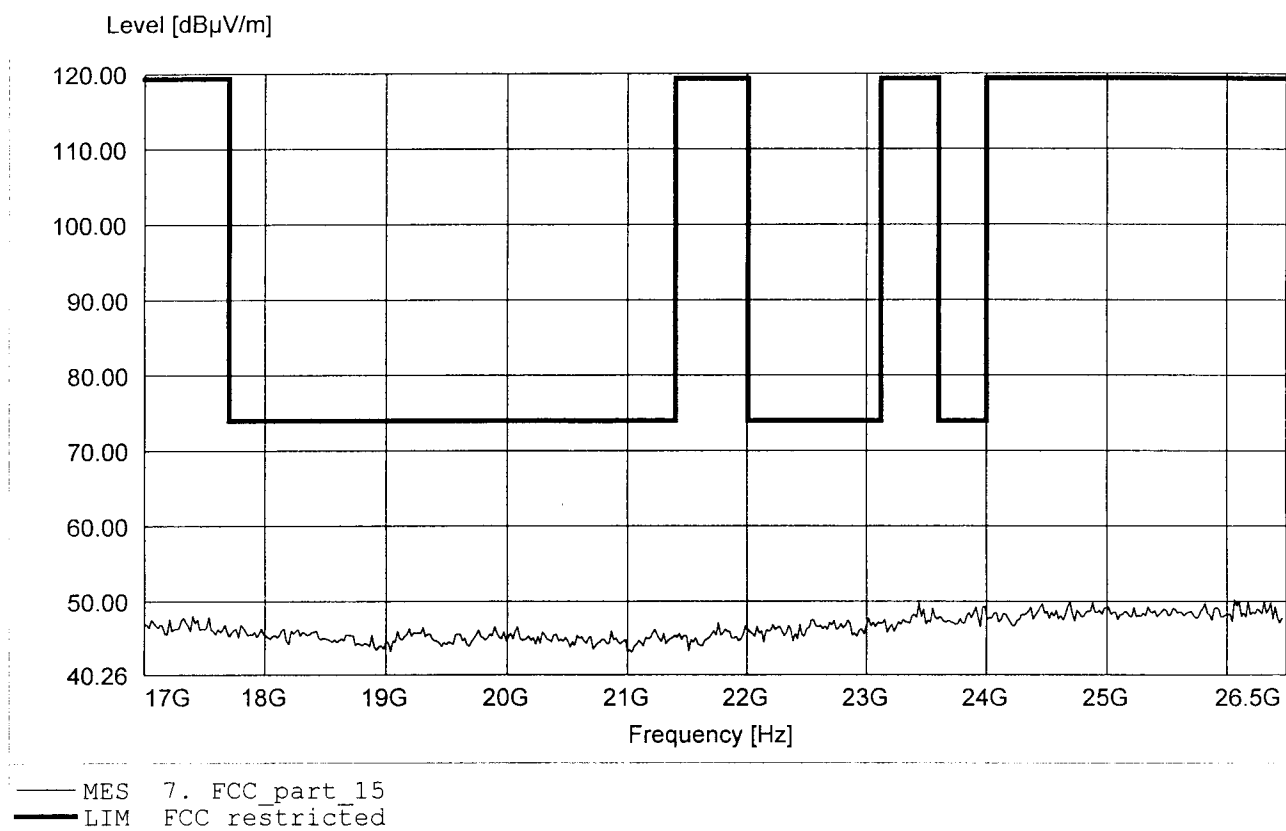

Appendix D


Spurious Emissions conducted - Transmitter operating

Appendix E

Carrier Frequency Separation



Delta 1 [T1] RBW 100 kHz RF Att 60 dB
Ref Lvl 0.05 dB VBW 100 kHz
35 dBm 1.04488978 MHz SWT 60 ms Unit dBm

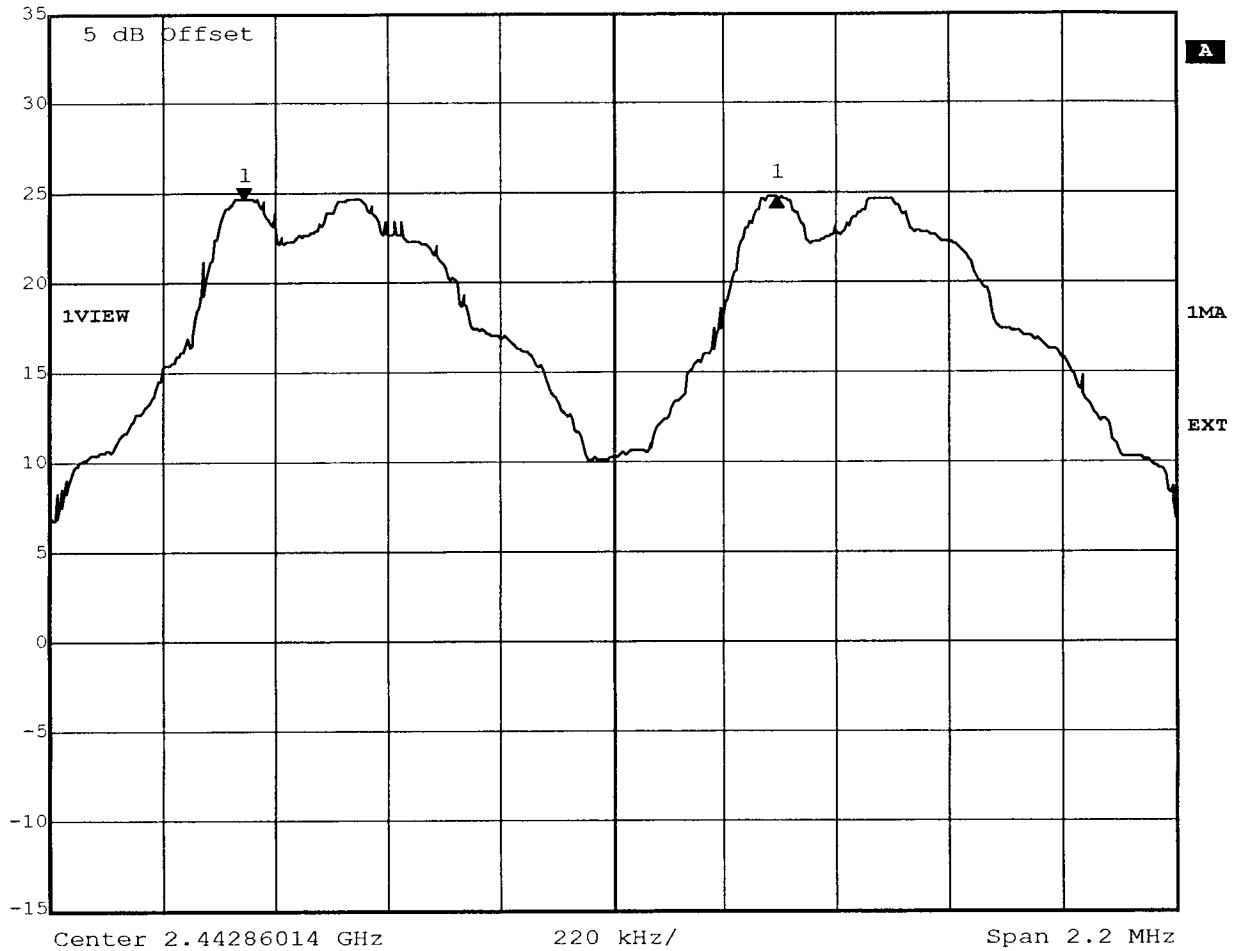


Title: Carrier Frequency Separation
Comment A: GN Netcom Cordless Headset Gn 9050 Base
Date: 24.OCT.2001 14:33:12

Appendix F

Number of Hopping Frequencies



Marker 1 [T1] RBW 50 kHz RF Att 60 dB
Ref Lvl 24.70 dBm VBW 50 kHz
35 dBm 2.41432265 GHz SWT 25 ms Unit dBm

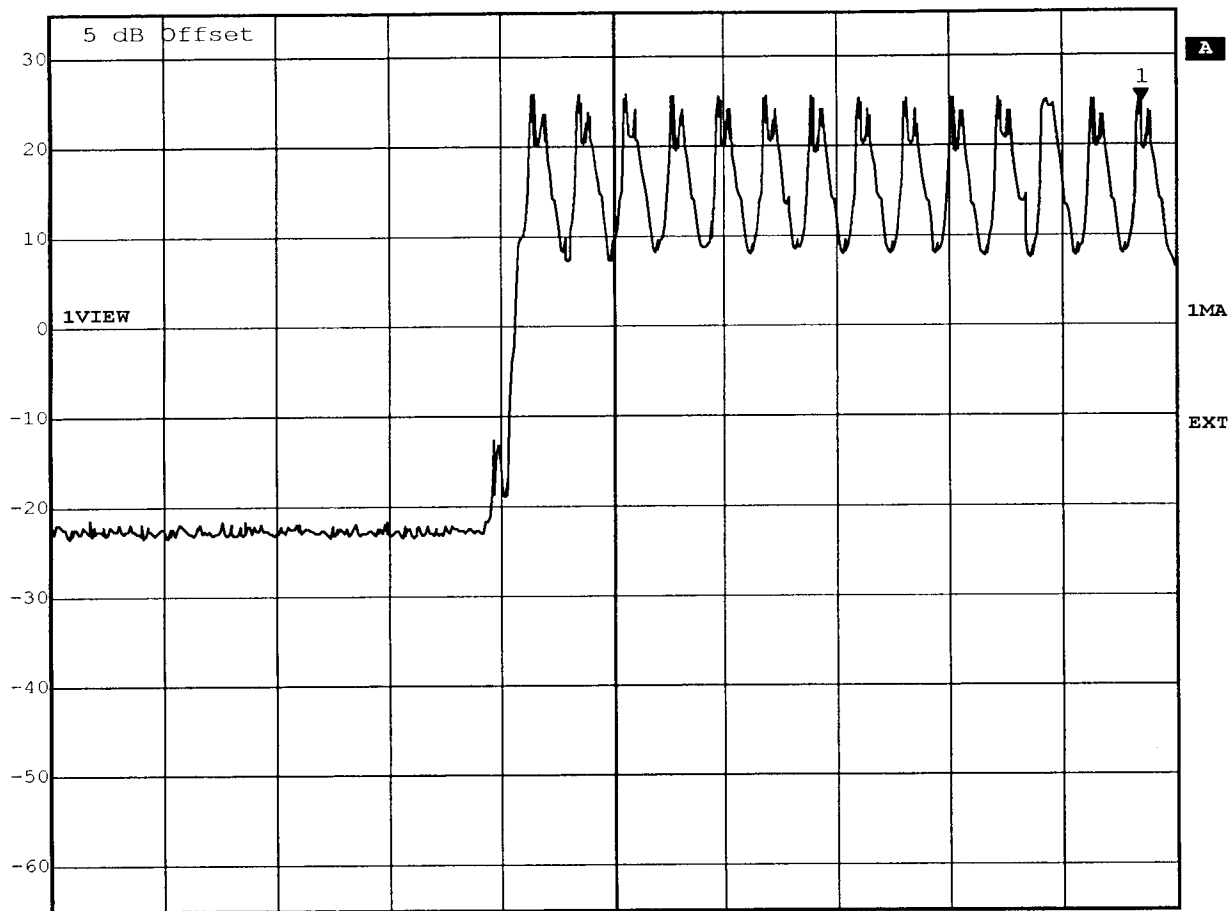


Center 2.402574148 GHz 2.5 MHz/ Span 25 MHz

Title: Number of Hopping Frequencies Ch.: 0-13
Comment A: GN Netcom Cordless Headset Gn 9050 Base
Date: 24.OCT.2001 14:50:26




Marker 1 [T1] RBW 50 kHz RF Att 60 dB
Ref Lvl 24.36 dBm VBW 50 kHz
35 dBm 2.43904860 GHz SWT 25 ms Unit dBm

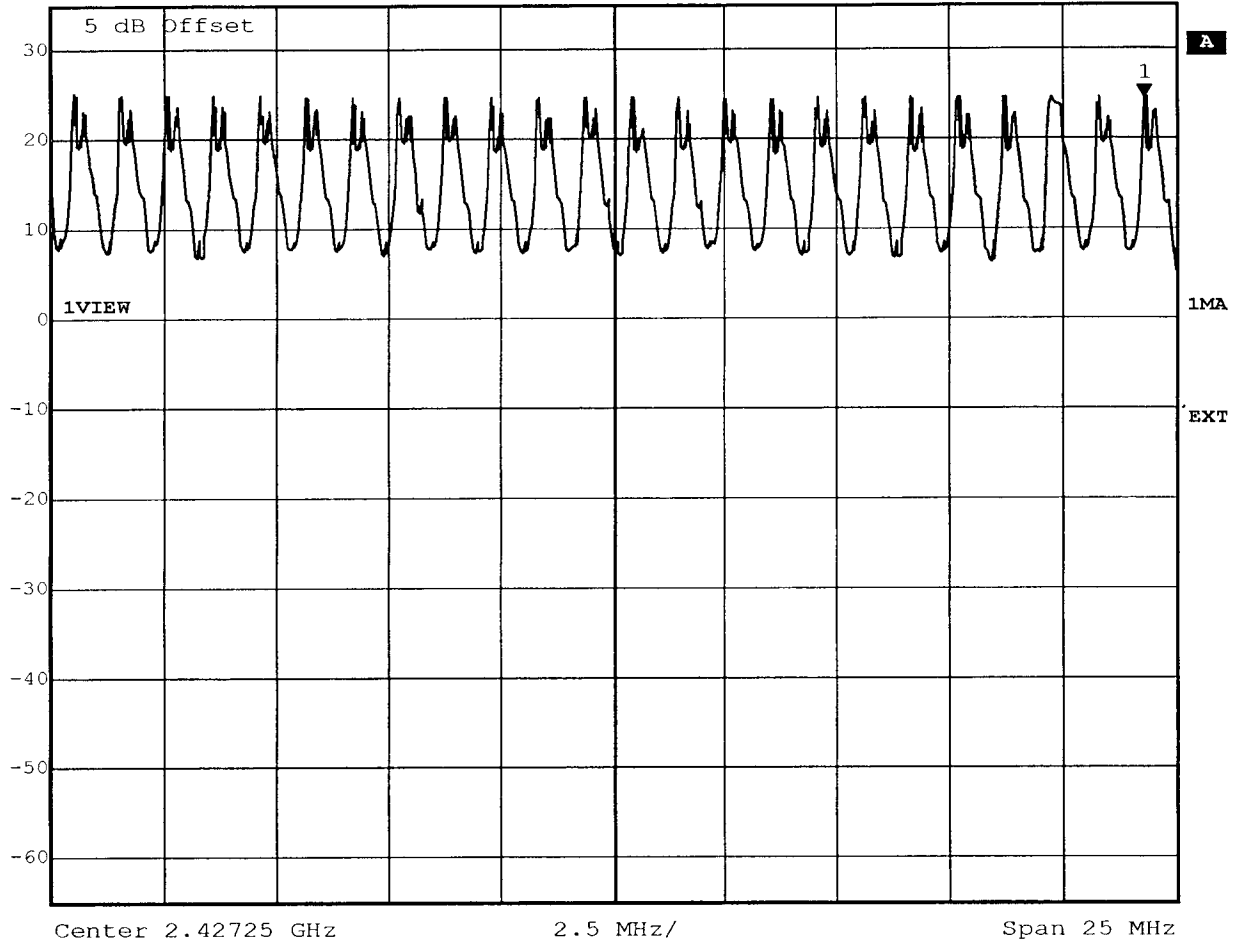

Title: Number of Hopping Frequencies Ch.: 14-37
Comment A: GN Netcom Cordless Headset Gn 9050 Base
Date: 24.OCT.2001 15:09:06



Marker 1 [T1] RBW 50 kHz RF Att 60 dB
Ref Lvl 24.72 dBm VBW 50 kHz
35 dBm 2.46389830 GHz SWT 25 ms Unit dBm

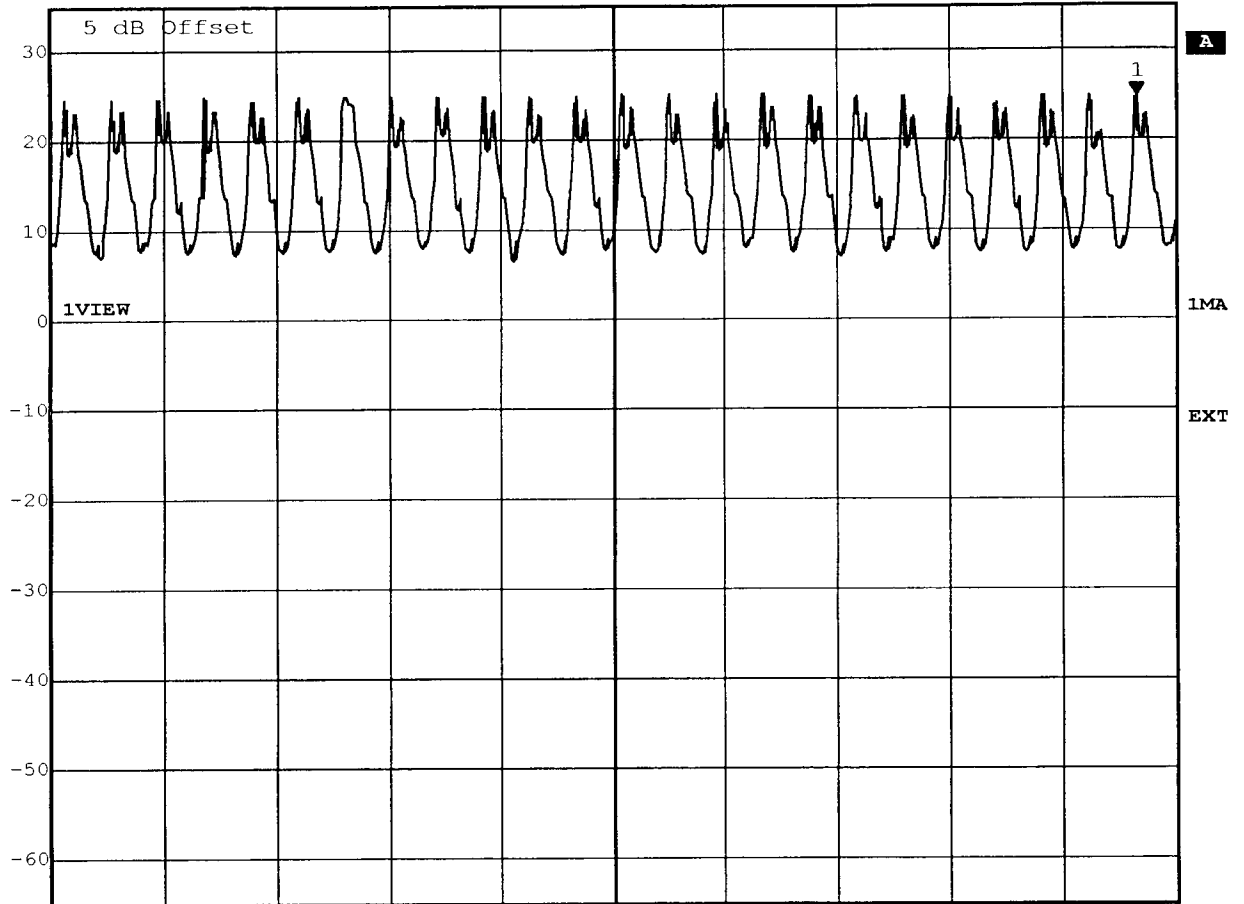

Center 2.45225 GHz


2.5 MHz/

Span 25 MHz

Title: Number of Hopping Frequencies Ch.: 38-61
Comment A: GN Netcom Cordless Headset Gn 9050 Base
Date: 24.OCT.2001 15:27:44



Marker 1 [T1] RBW 50 kHz RF Att 60 dB
Ref Lvl 24.79 dBm VBW 50 kHz
35 dBm 2.46490080 GHz SWT 25 ms Unit dBm

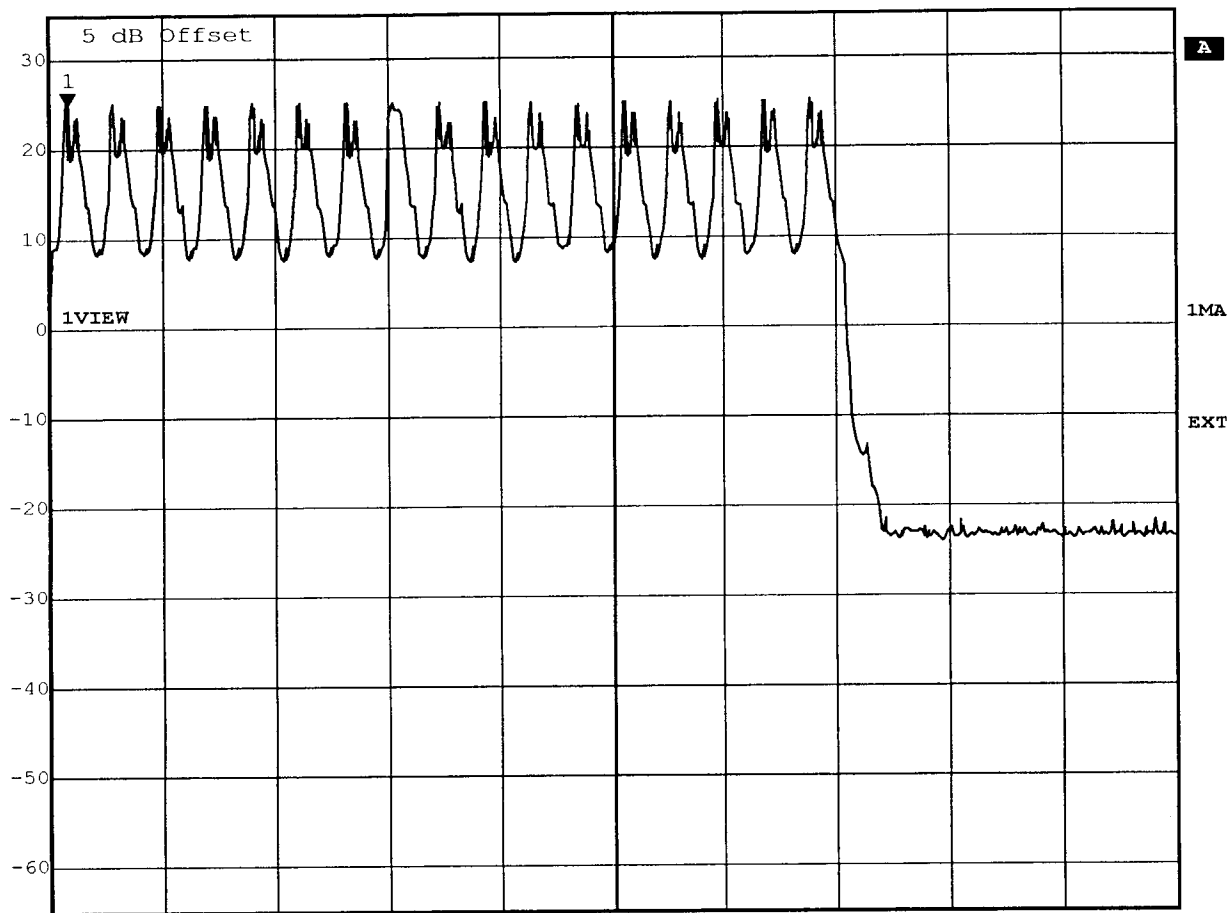


Title: Number of Hopping Frequencies Ch.: 62-78
Comment A: GN Netcom Cordless Headset Gn 9050 Base
Date: 24.OCT.2001 15:41:38

Appendix G

Time of Occupancy (Dwell Time)



Delta 2 [T1] RBW 1 MHz RF Att 30 dB
Ref Lvl 1.72 dB VBW 1 MHz
30 dBm 11.164128 ms SWT 19.5 ms Unit dBm

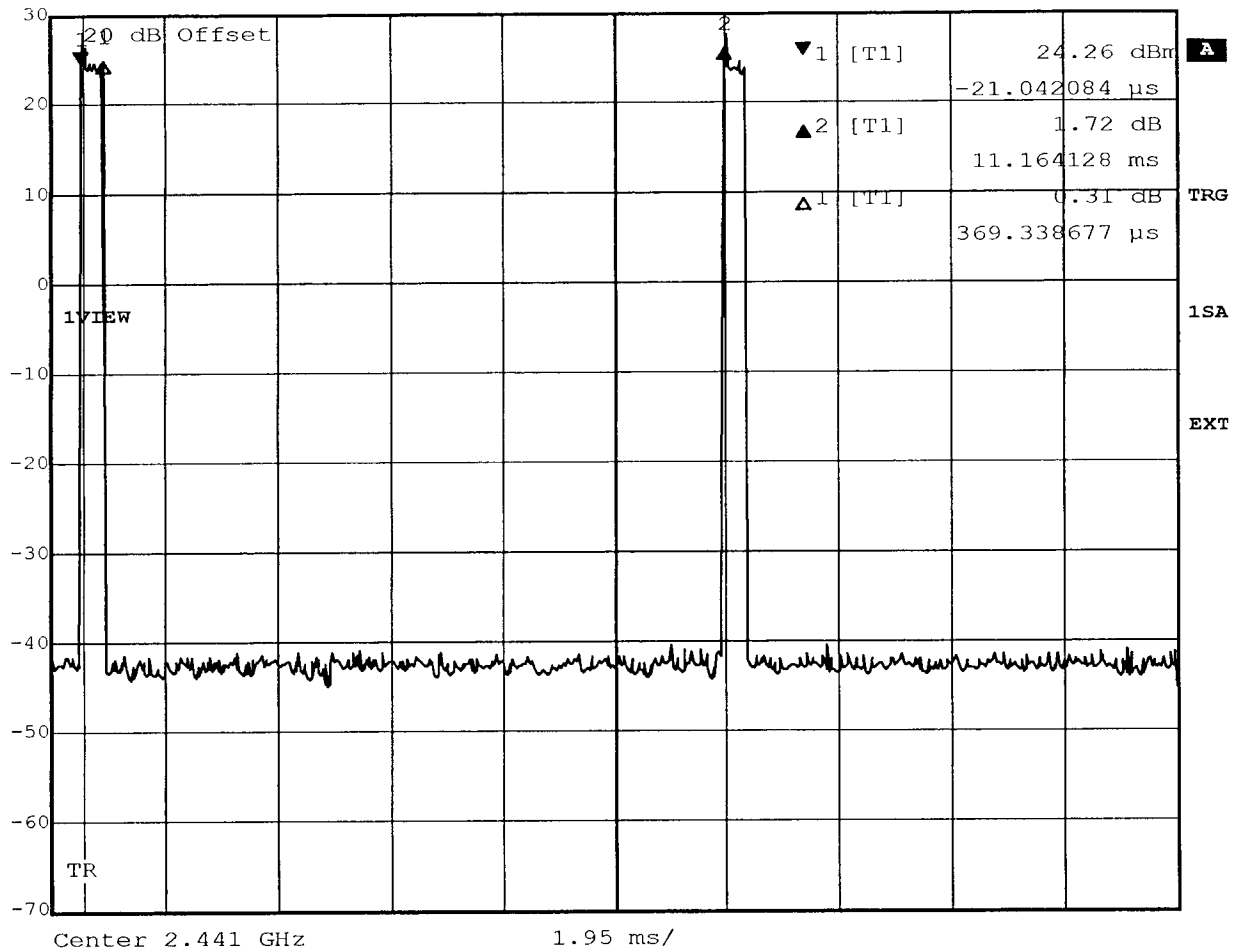


Title: Dwell Time
Comment A: GN Netcom Cordless Headset Gn 9050 Base
Date: 24.OCT.2001 13:50:51

Appendix H

20dB Bandwidth




Delta 1 [T1] RBW 10 kHz RF Att 60 dB
Ref Lvl -0.30 dB VBW 10 kHz
38 dBm 895.79158317 kHz SWT 76 ms Unit dBm

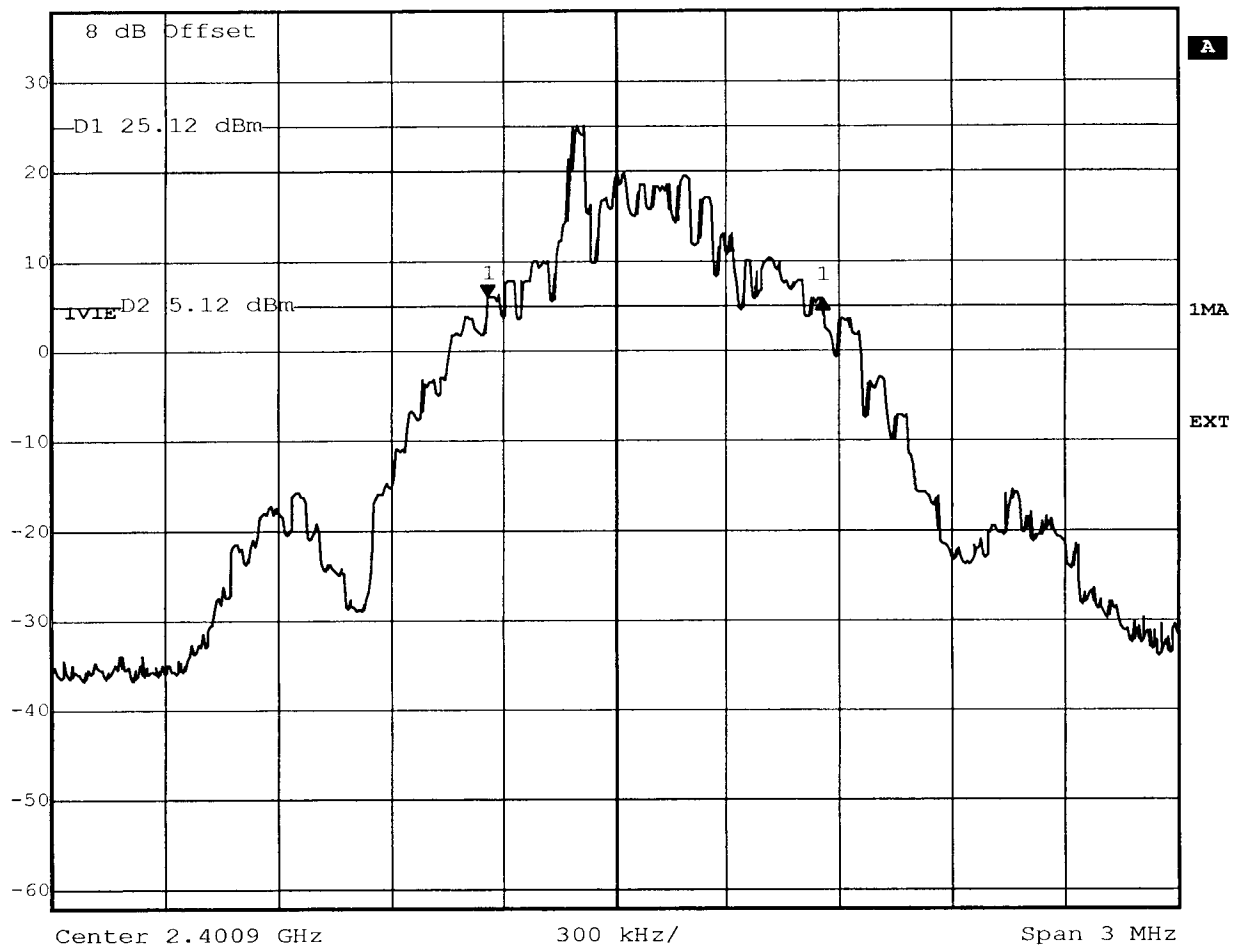

Title: 20 dB Bandwidth Ch.: 0
Comment A: GN Netcom Cordless Headset Gn 9050 Base
Date: 24.OCT.2001 13:18:07




Delta 1 [T1] RBW 10 kHz RF Att 60 dB
Ref Lvl 0.05 dB VBW 10 kHz
38 dBm 901.80360722 kHz SWT 76 ms Unit dBm

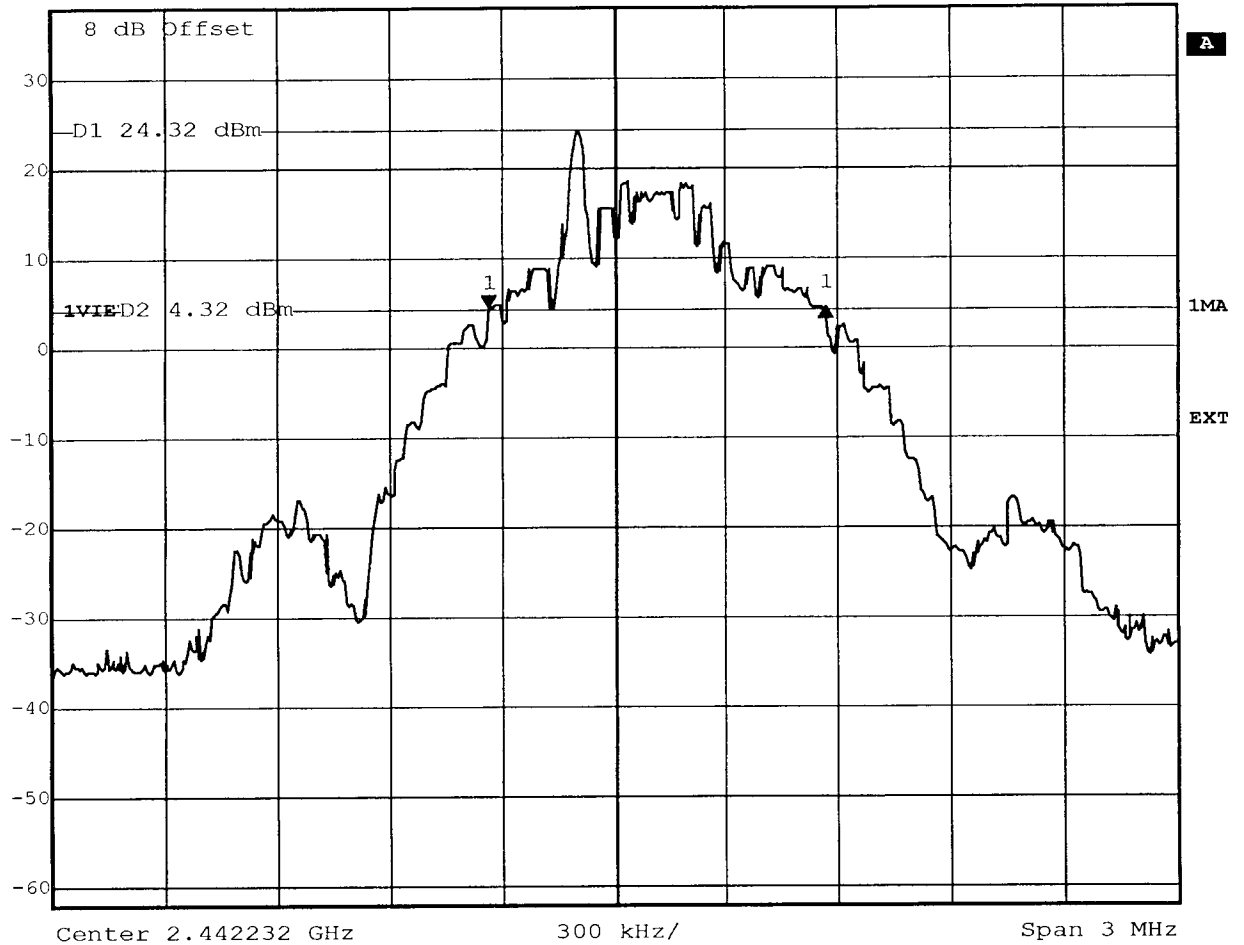

Title: 20 dB Bandwidth Ch.: 40
Comment A: GN Netcom Cordless Headset Gn 9050 Base
Date: 24.OCT.2001 13:15:01



Delta 1 [T1] RBW 10 kHz RF Att 60 dB
Ref Lvl -0.31 dB VBW 10 kHz
38 dBm 883.76753507 kHz SWT 76 ms Unit dBm

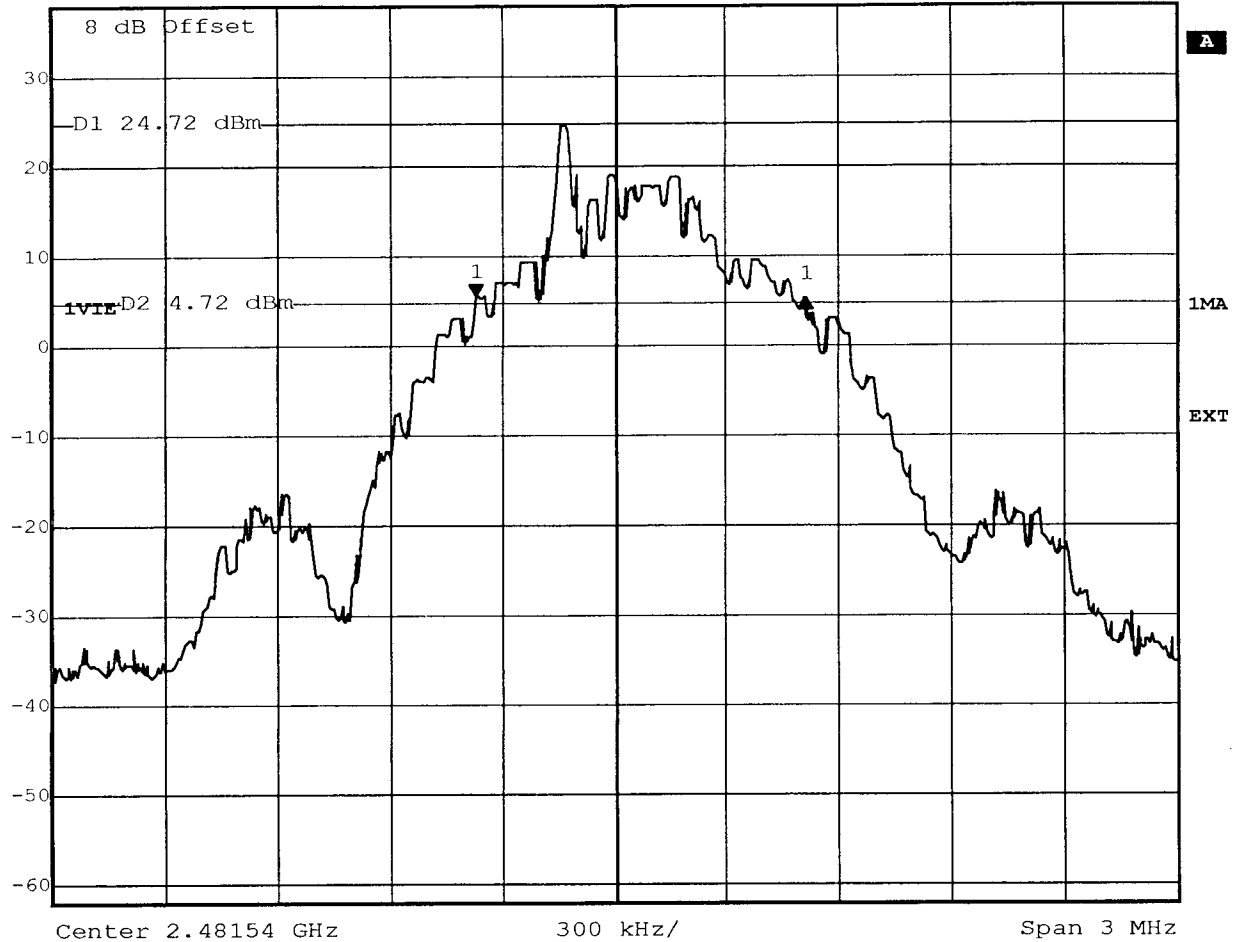


Title: 20 dB Bandwidth Ch.: 78
Comment A: GN Netcom Cordless Headset Gn 9050 Base
Date: 24.OCT.2001 13:25:57

Appendix I

Band-edge Compliance of RF Emissions



Marker 1 [T1] RBW 50 kHz RF Att 60 dB
Ref Lvl 5.61 dBm VBW 50 kHz
35 dBm 2.40048697 GHz SWT 5 ms Unit dBm

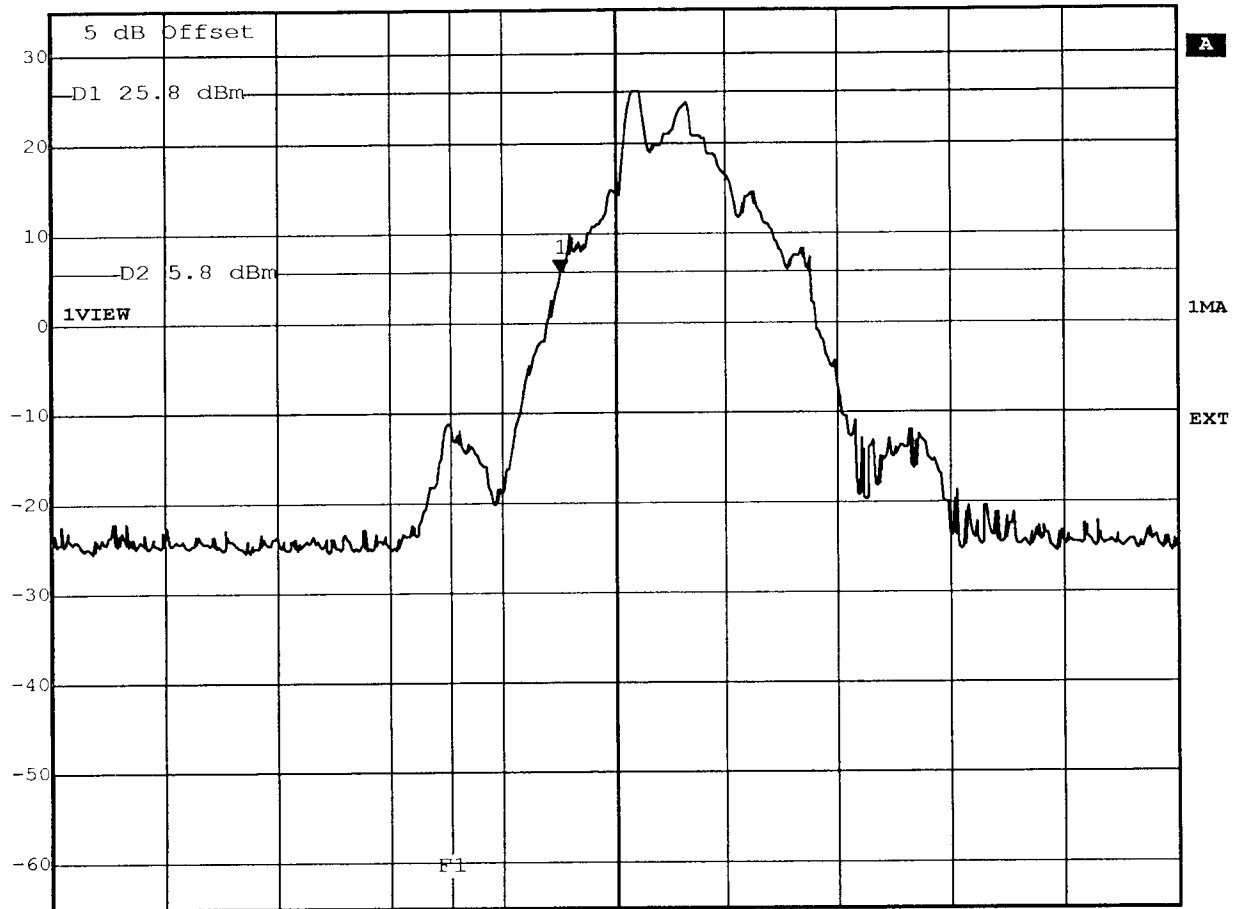


Center 2.400722445 GHz 500 kHz/ Span 5 MHz

Title: Band-edge Compliance of RF Conducted Emissions Ch.: 0
Comment A: GN Netcom Cordless Headset Gn 9050 Base
Date: 24.OCT.2001 13:42:14



Marker 1 [T1] RBW 50 kHz RF Att 60 dB
Ref Lvl 4.93 dBm VBW 50 kHz
35 dBm 2.48220849 GHz SWT 5 ms Unit dBm

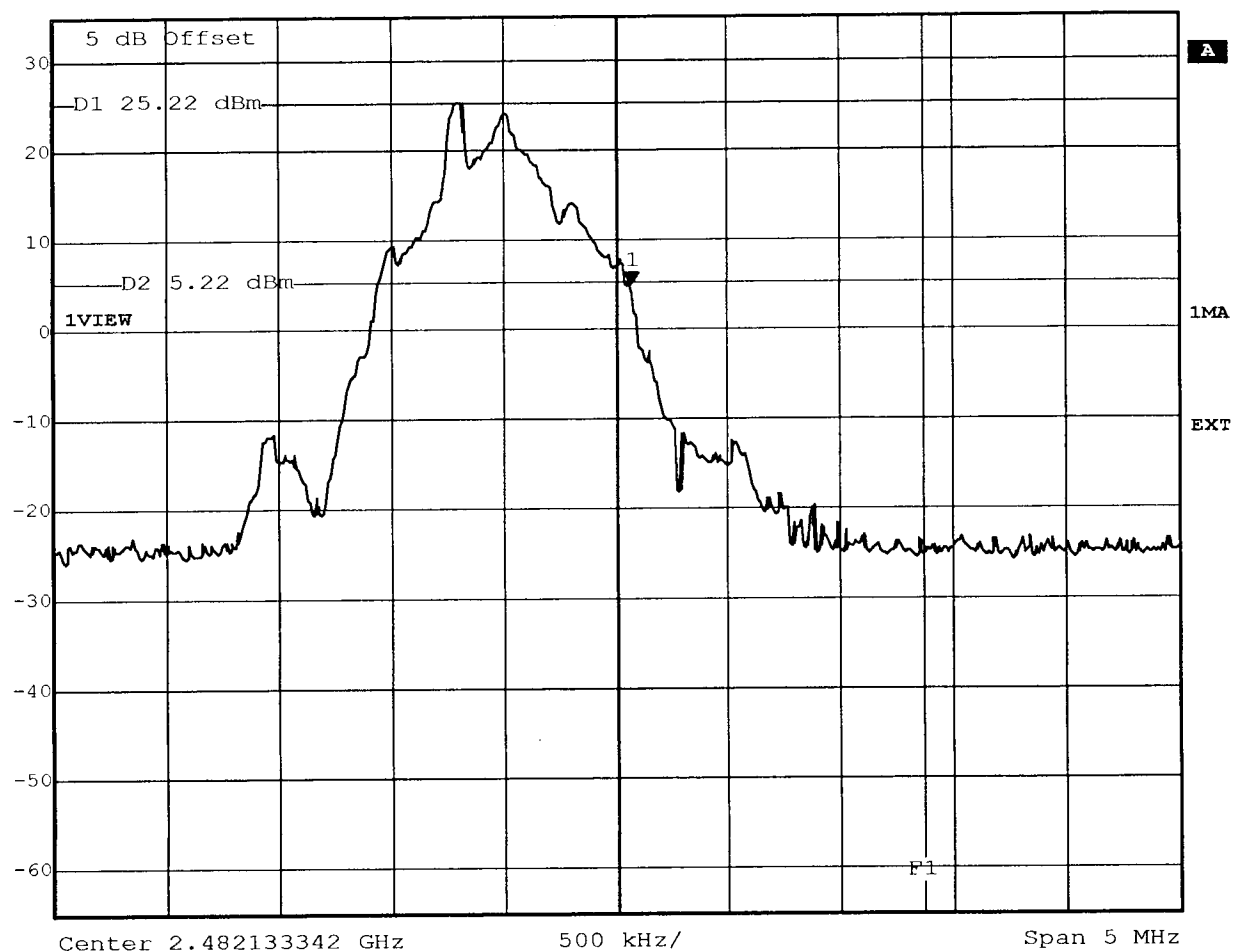

Title: Band-edge Compliance of RF Conducted Emissions Ch.: 78
Comment A: GN Netcom Cordless Headset Gn 9050 Base
Date: 24.OCT.2001 13:38:13

Appendix J

Conducted Measurement at (AC) Power Line

EMI voltage test in the ac-mains according to FCC part 15

EUT: CORDLESS HEADPHONE
Manufacturer: GN NETCOM .INC
Operating Condition: Unom: 110VAC(AC/DC adaptor), Tnom: 23°C
Test Site: ETS
Operator: Mr. Marquardt
Test Specification: V-Network: ESH3-Z5
Comment: model: GN 9050 mode: charging

