

DASY8 Module WPT Measurement Report

Device under test

Info:
1_Front_0mm

Tool info

DASY software version:
DASY8 Module WPT 2.6.0.5002

Probe model, serial no. and configuration date:
MAGPy-8H3D+E3Dv2, WP000211, 2024/05/16

Software version:
2.0.63, backend: 2.2.22

Scan info

Center location:
x: 118.93 mm, y: -51.21 mm, z: 27.80 mm

Dimensions:
x: 169.1 mm, y: 256.5 mm, z: 36.7 mm

Resolution:
x: 7.33 mm, y: 7.33 mm, z: 7.33 mm

Completed on:
2024/10/17

Measurement results

Maximum H-field [RMS]:
MAGNITUDE: 371.56 mA/m
x: 106.96 mA/m, y: 178.48 mA/m, z: 307.83 mA/m

Maximum H-field location relative to DUT:
x: -40.33 mm, y: -18.33 mm, z: 8.50 mm


Maximum E-field [RMS]:
MAGNITUDE: 30.80 V/m
x: 1.57 V/m, y: 626.09 mV/m, z: 30.76 V/m

Maximum E-field location relative to DUT:
x: 14.67 mm, y: -44.00 mm, z: 0.00 mm


Distance to -20.0 dB boundary:
49.19 mm

Offset relative to DUT:
x: 0.00 m, y: 0.00 m, z: 1.00 mm

H-field magnitude [RMS] at maximum location

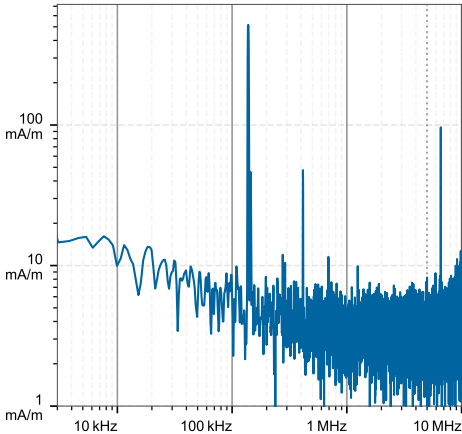

H-field magnitude [RMS] at lowest plane

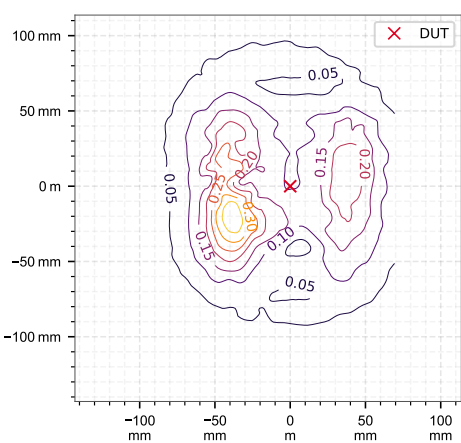

Incident fields and induced fields in the homogeneous phantom at the peak frequency

Distance [mm]	Peak incident fields [RMS]		Peak E _{ind} [V/m, RMS]			Peak J _{ind} [A/m ² , RMS]	psSAR [mW/kg]		H-field extent
	H _{inc} [A/m]	E _{inc} [V/m]	Cube avg.	Local	Line avg.	Surface avg.	1g avg.	10g avg.	-20 dB radius [mm]
0.00	0.847	30.8	6.21e-3	6.34e-3	6.33e-3	4.08e-3	1.66e-5	8.80e-6	78.9

Compliance evaluation (Field values at the peak frequency)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	ERL [RMS]	DRL [RMS]	MPE [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	PH _{inc} [A/m]	PE _{inc} [V/m]	PE _{ind} [V/m]	psSAR [mW/kg]	PH _{inc} [A/m]	PE _{inc} [V/m]	PE _{ind} [V/m]	psSAR [mW/kg]
0.00	0.847	30.8	0.0383	9.84e-6	0.847	30.8	4.96e-3	9.84e-6	0.847	30.8	0.0215	9.84e-6	0.847	30.8	N/A	1.77e-5	0.847	30.8	0.0547	1.77e-5

Coverage factors: $w_{E_{ind, cube avg.}} = [5.98]$, $w_{E_{ind, local}} = [8.45]$, $w_{E_{ind, line avg.}} = [3.21]$

Compliance evaluation (Exposure ratios) (with multi-frequency enhancement, total field evaluation, coverage evaluation)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL	BR	RL	BR	ERL	DRL	MPE	BR	RL	BR	RL	BR	PH _{inc}	PE _{inc}	PE _{ind}	psSAR	PH _{inc}	PE _{inc}	PE _{ind}	psSAR
0.00	0.04	0.02	0.37	0.01	<0.01	<0.01	0.17	0.35	0.02	<0.01	<0.01	<0.01	0.05	0.02	<0.01	<0.01	0.52	0.05	N/A	<0.01

Coverage factors: $w_{E_{ind, cube avg.}} = [5.98]$, $w_{E_{ind, local}} = [8.45]$, $w_{E_{ind, line avg.}} = [3.21]$

DASY8 Module WPT Measurement Report

Device under test

Info:
2_Left Edge_0mm

Tool info

DASY software version:
DASY8 Module WPT 2.6.0.5002

Probe model, serial no. and configuration date:
MAGPy-8H3D+E3Dv2, WP000211, 2024/05/16

Software version:
2.0.63, backend: 2.2.22

Scan info

Center location:
x: 82.33 mm, y: -95.01 mm, z: 77.66 mm

Dimensions:
x: 168.7 mm, y: 256.7 mm, z: 36.8 mm

Resolution:
x: 7.33 mm, y: 7.33 mm, z: 7.33 mm

Completed on:
2024/10/17

Measurement results

Maximum H-field [RMS]:
MAGNITUDE: 870.37 mA/m
x: 208.81 mA/m, y: 374.99 mA/m, z: 757.18 mA/m

Maximum H-field location relative to DUT:
x: 3.67 mm, y: 3.67 mm, z: 8.50 mm


Maximum E-field [RMS]:
MAGNITUDE: 9.28 V/m
x: 1.40 V/m, y: 103.89 mV/m, z: 9.18 V/m

Maximum E-field location relative to DUT:
x: 14.67 mm, y: 58.67 mm, z: 0.00 mm


Distance to -20.0 dB boundary:
37.39 mm

Offset relative to DUT:
x: 0.00 m, y: 0.00 m, z: 1.00 mm

H-field magnitude [RMS] at maximum location

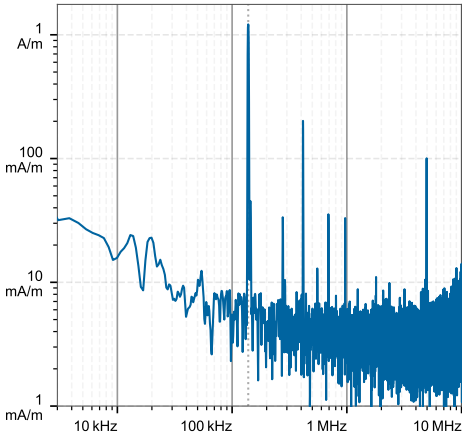

H-field magnitude [RMS] at lowest plane

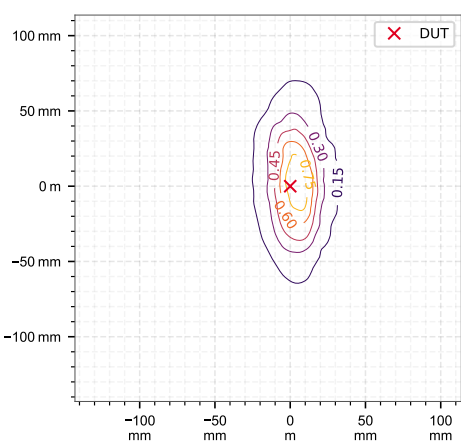

Incident fields and induced fields in the homogeneous phantom at the peak frequency

Distance [mm]	Peak incident fields [RMS]		Peak E _{ind} [V/m, RMS]			Peak J _{ind} [A/m ² , RMS]	psSAR [mW/kg]		H-field extent
	H _{inc} [A/m]	E _{inc} [V/m]	Cube avg.	Local	Line avg.	Surface avg.	1g avg.	10g avg.	-20 dB radius [mm]
0.00	2.26	9.28	9.22e-3	9.44e-3	9.34e-3	6.1e-3	3.82e-5	2.13e-5	42.2

Compliance evaluation (Field values at the peak frequency)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	ERL [RMS]	DRL [RMS]	MPE [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	PH _{inc} [A/m]	PE _{inc} [V/m]	PE _{ind} [V/m]	psSAR [mW/kg]	PH _{inc} [A/m]	PE _{inc} [V/m]	PE _{ind} [V/m]	psSAR [mW/kg]
0.00	2.26	9.28	0.0504	2.14e-5	2.26	9.28	6.37e-3	2.14e-5	2.26	9.28	0.0281	2.14e-5	2.26	9.28	N/A	3.83e-5	2.26	9.28	0.0728	3.83e-5

Coverage factors: $w_{E_{ind, cube avg.}} = [5.43]$, $w_{E_{ind, local}} = [7.67]$, $w_{E_{ind, line avg.}} = [2.97]$

Compliance evaluation (Exposure ratios) (with multi-frequency enhancement, total field evaluation, coverage evaluation)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL	BR	RL	BR	ERL	DRL	MPE	BR	RL	BR	RL	BR	PH _{inc}	PE _{inc}	PE _{ind}	psSAR	PH _{inc}	PE _{inc}	PE _{ind}	psSAR
0.00	0.11	0.06	1.84	0.75	<0.01	<0.01	0.45	1.77	0.04	<0.01	0.10	<0.01	0.25	0.15	<0.01	<0.01	1.38	0.25	N/A	<0.01

Coverage factors: $w_{E_{ind, cube avg.}} = [5.43]$, $w_{E_{ind, local}} = [7.67]$, $w_{E_{ind, line avg.}} = [2.97]$

DASY8 Module WPT Measurement Report

Device under test

Info:
3_Right Edge_0mm

Tool info

DASY software version:
DASY8 Module WPT 2.6.0.5002

Probe model, serial no. and configuration date:
MAGPy-8H3D+E3Dv2, WP000211, 2024/05/16

Software version:
2.0.63, backend: 2.2.22

Scan info

Center location:
x: 103.68 mm, y: -51.96 mm, z: 78.26 mm

Dimensions:
x: 168.3 mm, y: 256.7 mm, z: 36.2 mm

Resolution:
x: 7.33 mm, y: 7.33 mm, z: 7.33 mm

Completed on:
2024/10/17

Measurement results

Maximum H-field [RMS]:
MAGNITUDE: 829.35 mA/m
x: 232.53 mA/m, y: 299.88 mA/m, z: 737.45 mA/m

Maximum H-field location relative to DUT:
x: -3.67 mm, y: -18.33 mm, z: 8.50 mm


Maximum E-field [RMS]:
MAGNITUDE: 6.16 V/m
x: 660.26 mV/m, y: 309.54 mV/m, z: 6.11 V/m

Maximum E-field location relative to DUT:
x: -29.33 mm, y: -44.00 mm, z: 0.00 m


Distance to -20.0 dB boundary:
42.76 mm

Offset relative to DUT:
x: 0.00 m, y: 0.00 m, z: 1.00 mm

H-field magnitude [RMS] at maximum location

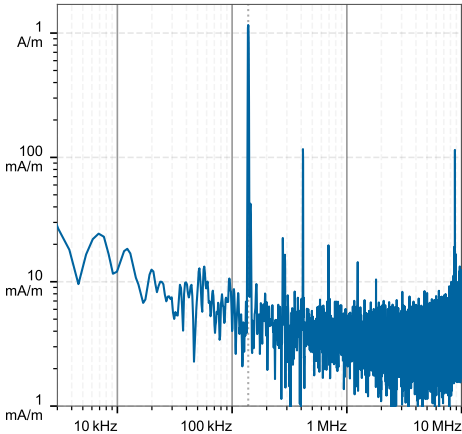

H-field magnitude [RMS] at lowest plane

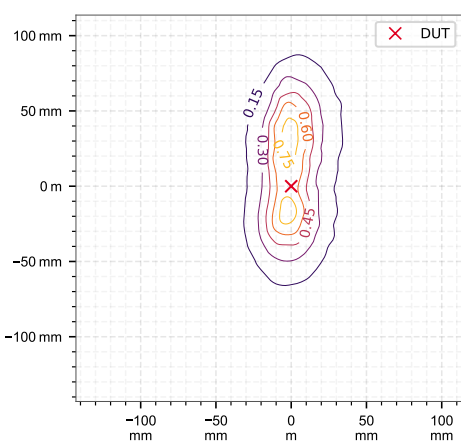

Incident fields and induced fields in the homogeneous phantom at the peak frequency

Distance [mm]	Peak incident fields [RMS]		Peak E _{ind} [V/m, RMS]			Peak J _{ind} [A/m ² , RMS]	psSAR [mW/kg]		H-field extent
	H _{inc} [A/m]	E _{inc} [V/m]	Cube avg.	Local	Line avg.	Surface avg.	1g avg.	10g avg.	-20 dB radius [mm]
0.00	1.71	6.16	0.0149	0.0153	0.0152	9.65e-3	9.18e-5	4.73e-5	52.4

Compliance evaluation (Field values at the peak frequency)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	ERL [RMS]	DRL [RMS]	MPE [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	PH _{inc} [A/m]	PE _{inc} [V/m]	PE _{ind} [V/m]	psSAR [mW/kg]	PH _{inc} [A/m]	PE _{inc} [V/m]	PE _{ind} [V/m]	psSAR [mW/kg]
0.00	1.71	6.16	0.0835	4.73e-5	1.71	6.16	9.83e-3	4.73e-5	1.71	6.16	0.0465	4.73e-5	1.71	6.16	N/A	9.18e-5	1.71	6.16	0.121	9.18e-5

Coverage factors: $w_{E_{ind}, cube\ avg.} = [5.59]$, $w_{E_{ind}, local} = [7.89]$, $w_{E_{ind}, line\ avg.} = [3.04]$

Compliance evaluation (Exposure ratios) (with multi-frequency enhancement, total field evaluation, coverage evaluation)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL	BR	RL	BR	ERL	DRL	MPE	BR	RL	BR	RL	BR	PH _{inc}	PE _{inc}	PE _{ind}	psSAR	PH _{inc}	PE _{inc}	PE _{ind}	psSAR
0.00	0.08	0.05	185.02	10.00	0.04	<0.01	0.34	87.0	1.65	<0.01	0.01	<0.01	25.0	501.00	0.02	<0.01	11.05	8.55	N/A	<0.01

Coverage factors: $w_{E_{ind}, cube\ avg.} = [5.59]$, $w_{E_{ind}, local} = [7.89]$, $w_{E_{ind}, line\ avg.} = [3.04]$