


Test Mode	IEEE 802.11n(HT40)	Test Date	2024/9/26
Test Frequency	5550MHz	Polarization	Vertical

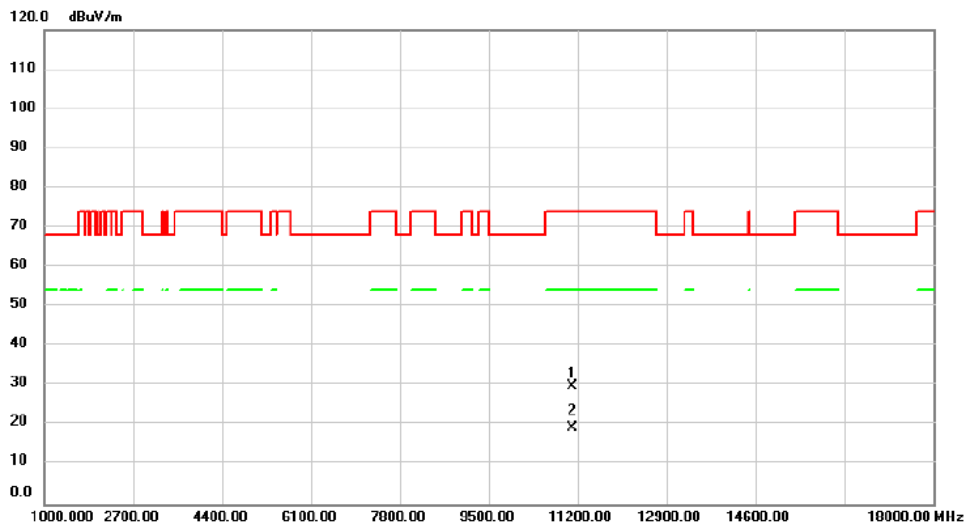


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11100.00	29.84	-0.04	29.80	74.00	-44.20	peak	
2	*	11100.00	19.32	-0.04	19.28	54.00	-34.72	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT40)	Test Date	2024/9/26
Test Frequency	5550MHz	Polarization	Horizontal

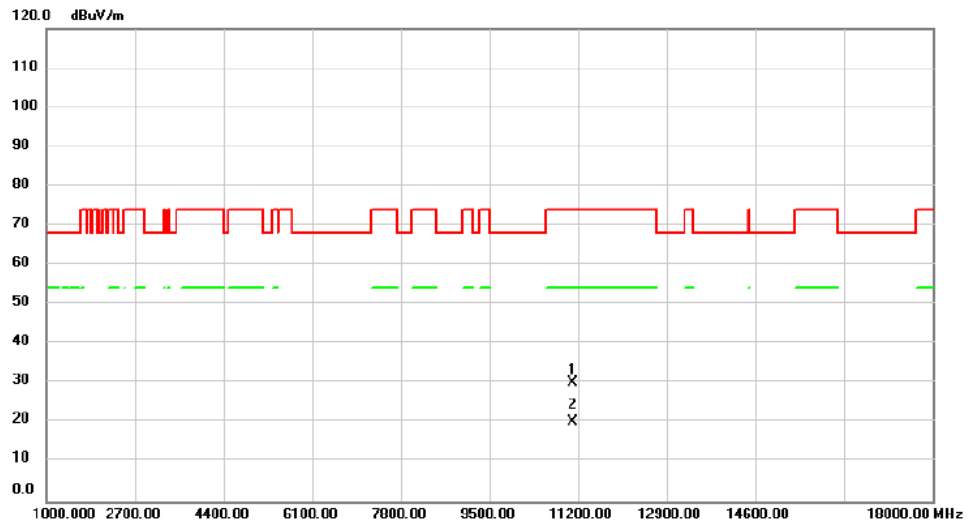


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	11100.00	30.26	-0.04	30.22	74.00	-43.78	peak	
2 *	11100.00	20.22	-0.04	20.18	54.00	-33.82	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT40)	Test Date	2024/9/26
Test Frequency	5670MHz	Polarization	Vertical

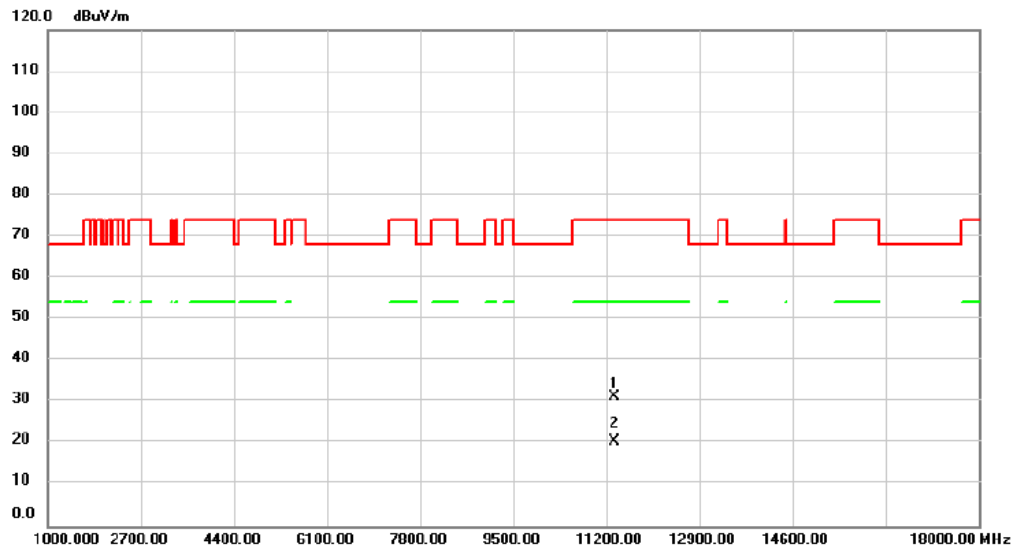


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11340.00	30.95	0.49	31.44	74.00	-42.56	peak	
2	*	11340.00	20.01	0.49	20.50	54.00	-33.50	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT40)	Test Date	2024/9/26
Test Frequency	5670MHz	Polarization	Horizontal

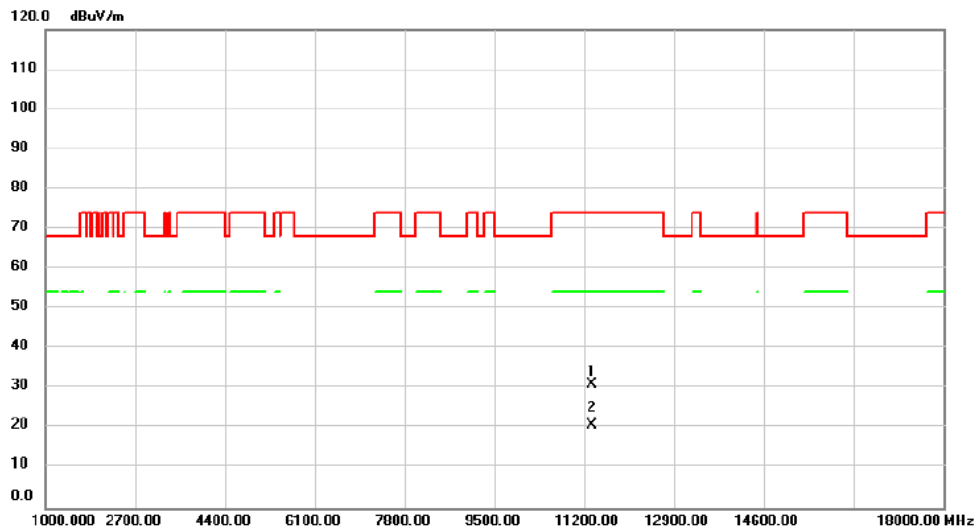


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11340.00	30.55	0.49	31.04	74.00	-42.96	peak	
2 *	11340.00	20.35	0.49	20.84	54.00	-33.16	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT40)	Test Date	2024/9/10
Test Frequency	5755MHz	Polarization	Vertical

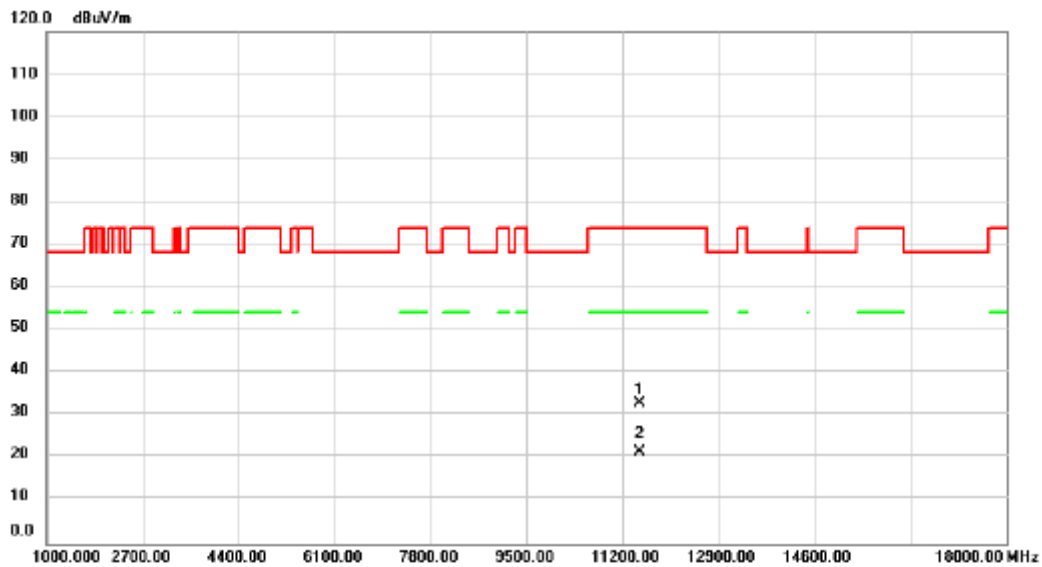


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11510.00	31.91	0.83	32.74	74.00	-41.26	peak	
2	*	11510.00	20.48	0.83	21.31	54.00	-32.69	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT40)	Test Date	2024/9/10
Test Frequency	5755MHz	Polarization	Horizontal

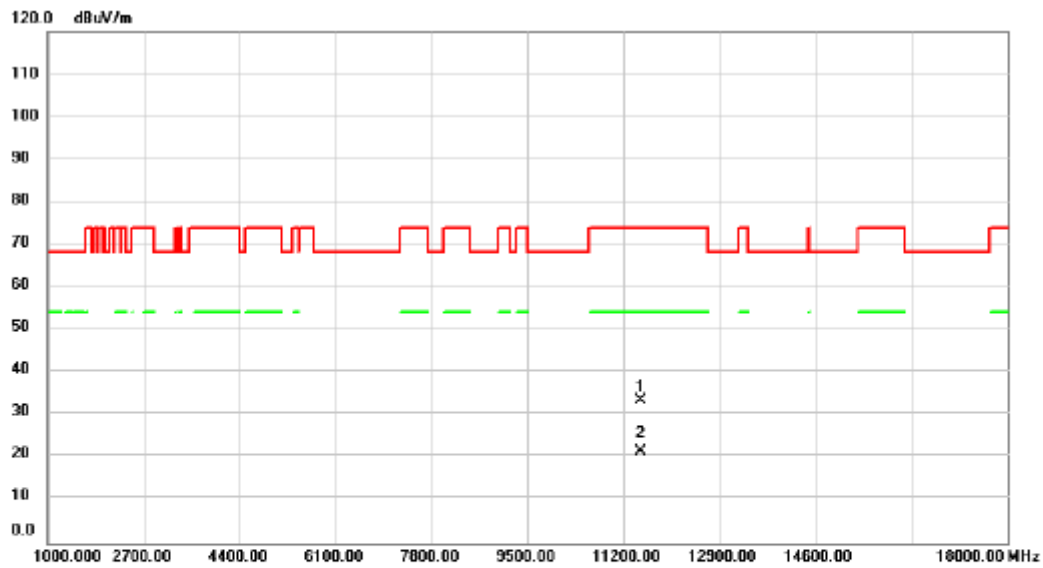


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11510.00	32.56	0.83	33.39	74.00	-40.61	peak	
2	*	11510.00	20.66	0.83	21.49	54.00	-32.51	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT40)	Test Date	2024/9/26
Test Frequency	5795MHz	Polarization	Vertical

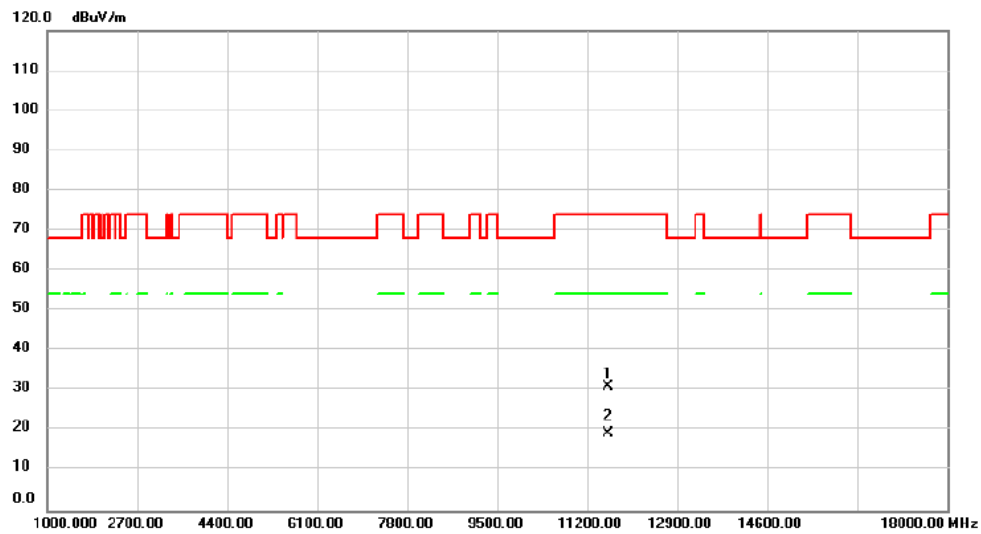


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11590.00	30.11	0.84	30.95	74.00	-43.05	peak	
2	*	11590.00	18.63	0.84	19.47	54.00	-34.53	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT40)	Test Date	2024/9/26
Test Frequency	5795MHz	Polarization	Horizontal

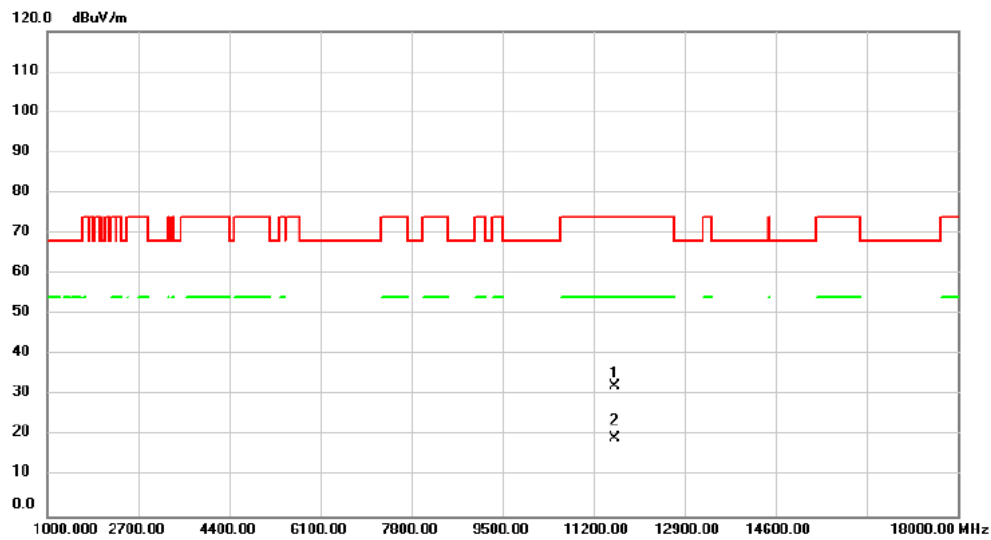


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11590.00	31.27	0.84	32.11	74.00	-41.89	peak	
2	*	11590.00	18.41	0.84	19.25	54.00	-34.75	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT80)	Test Date	2024/9/10
Test Frequency	5210MHz	Polarization	Vertical

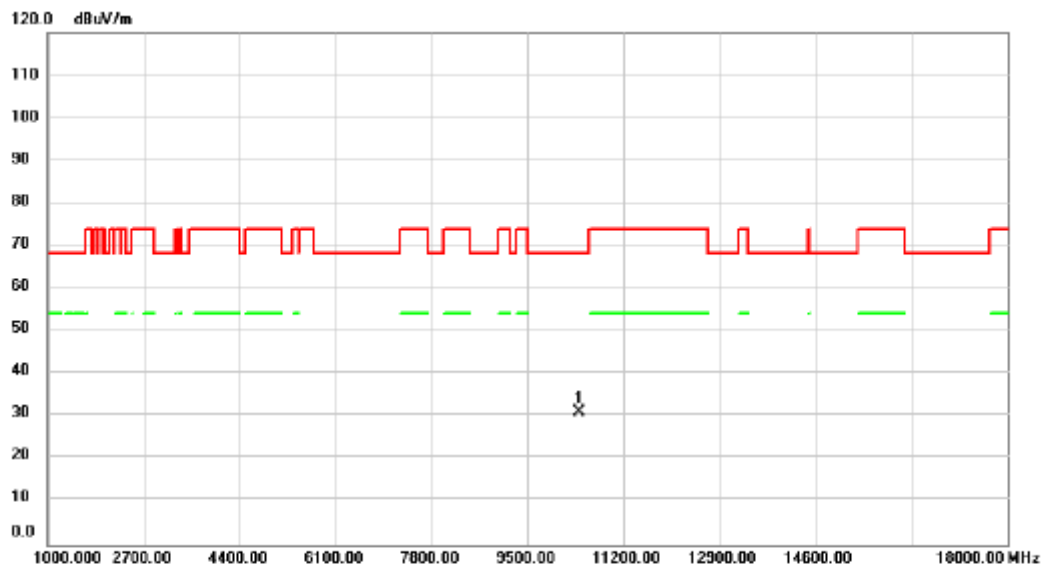


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	10420.00	31.73	-0.54	31.19	68.20	-37.01	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT80)	Test Date	2024/9/10
Test Frequency	5210MHz	Polarization	Horizontal

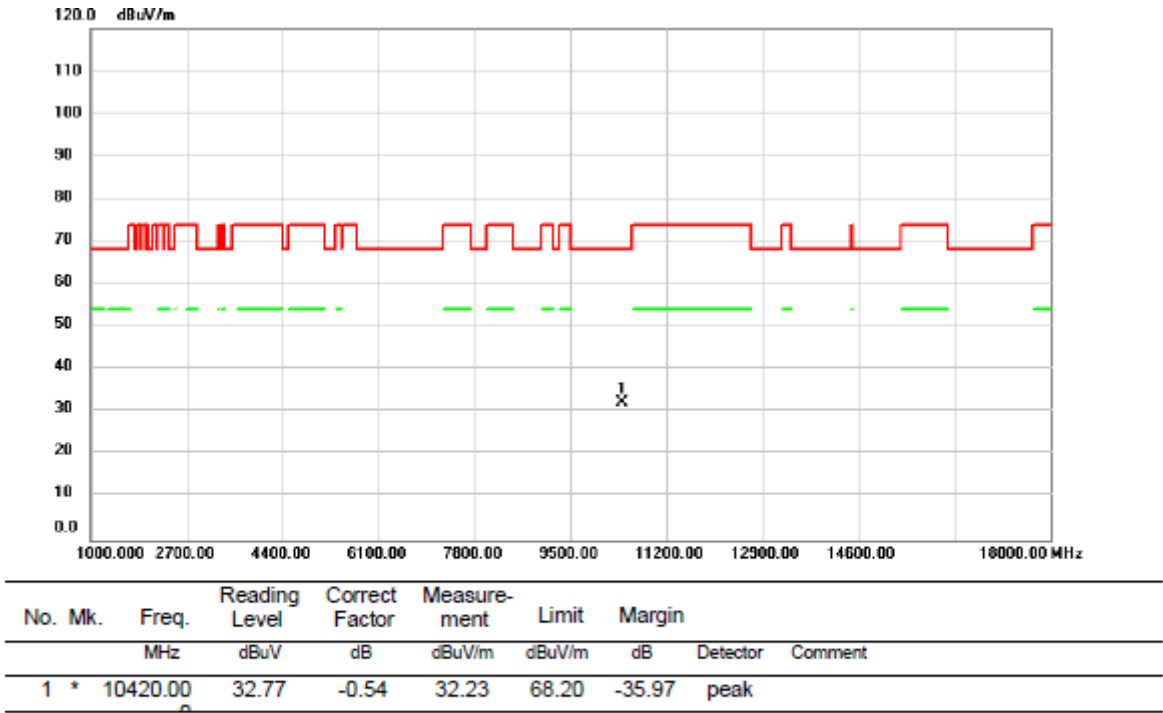


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT80)	Test Date	2024/9/26
Test Frequency	5290MHz	Polarization	Vertical

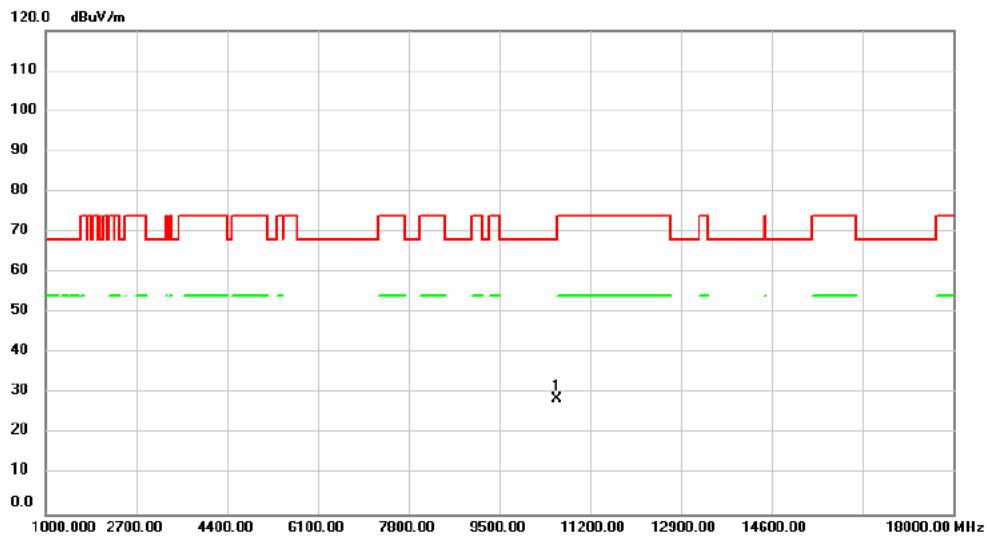


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10580.00	29.13	-0.42	28.71	68.20	-39.49	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT80)	Test Date	2024/9/26
Test Frequency	5290MHz	Polarization	Horizontal

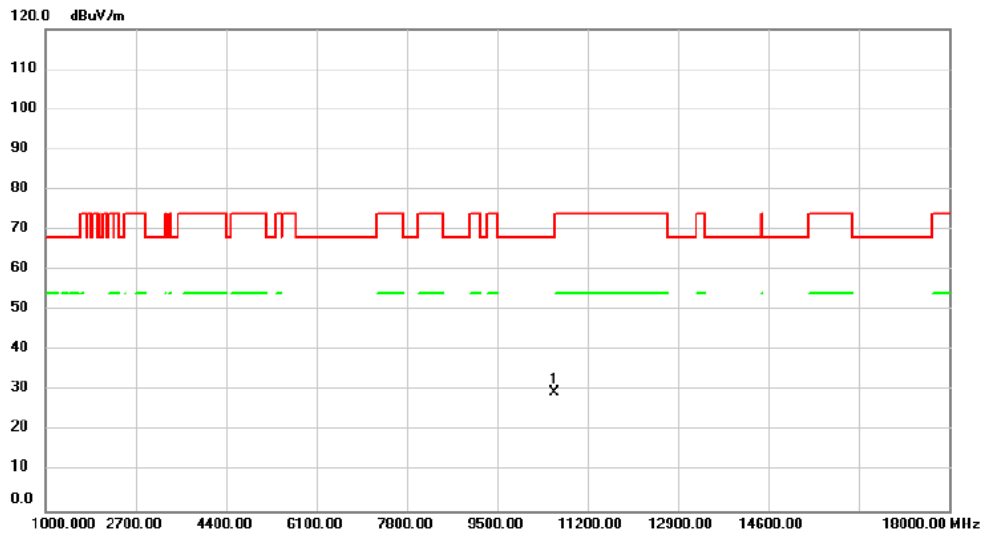


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10580.00	30.12	-0.42	29.70	68.20	-38.50	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT80)	Test Date	2024/9/26
Test Frequency	5530MHz	Polarization	Vertical

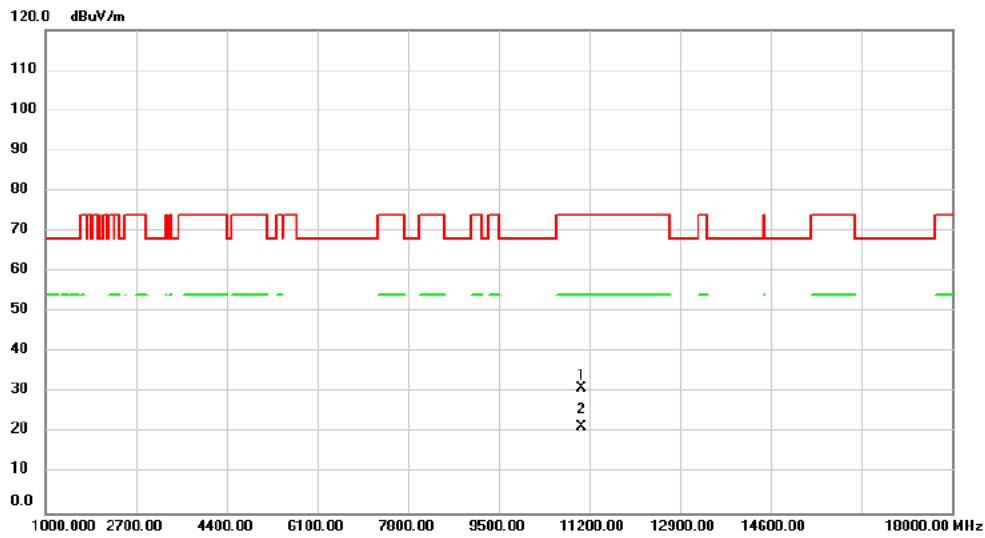


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11060.00	31.29	-0.13	31.16	74.00	-42.84	peak	
2	*	11060.00	21.55	-0.13	21.42	54.00	-32.58	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT80)	Test Date	2024/9/26
Test Frequency	5530MHz	Polarization	Horizontal

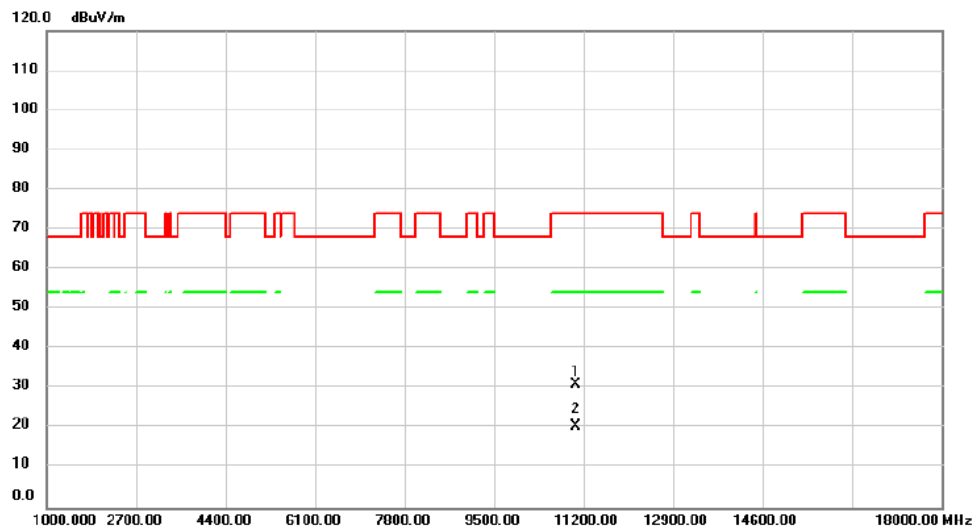


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11060.00	31.22	-0.13	31.09	74.00	-42.91	peak	
2 *	11060.00	20.71	-0.13	20.58	54.00	-33.42	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT80)	Test Date	2024/9/26
Test Frequency	5610MHz	Polarization	Vertical

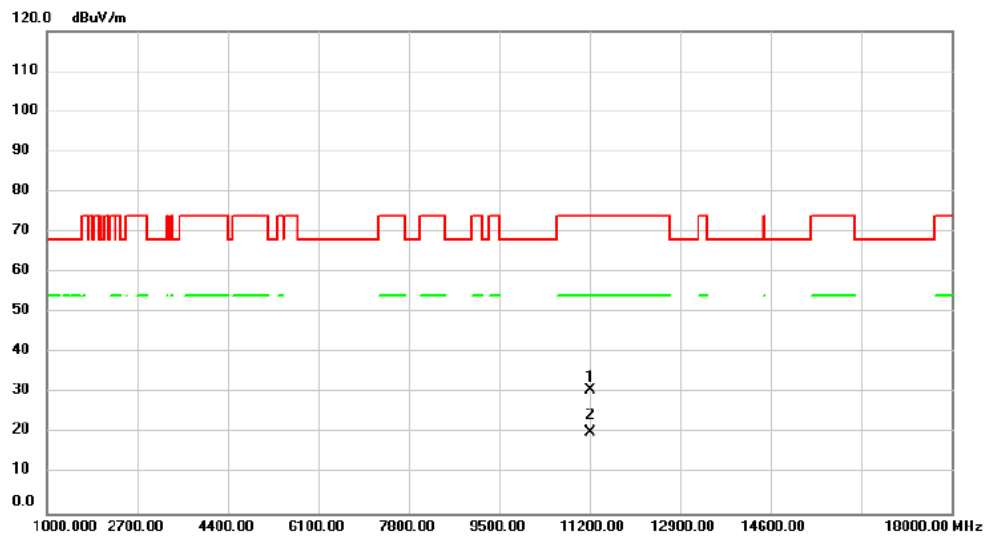


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11220.00	30.52	0.22	30.74	74.00	-43.26	peak	
2	*	11220.00	20.08	0.22	20.30	54.00	-33.70	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT80)	Test Date	2024/9/26
Test Frequency	5610MHz	Polarization	Horizontal

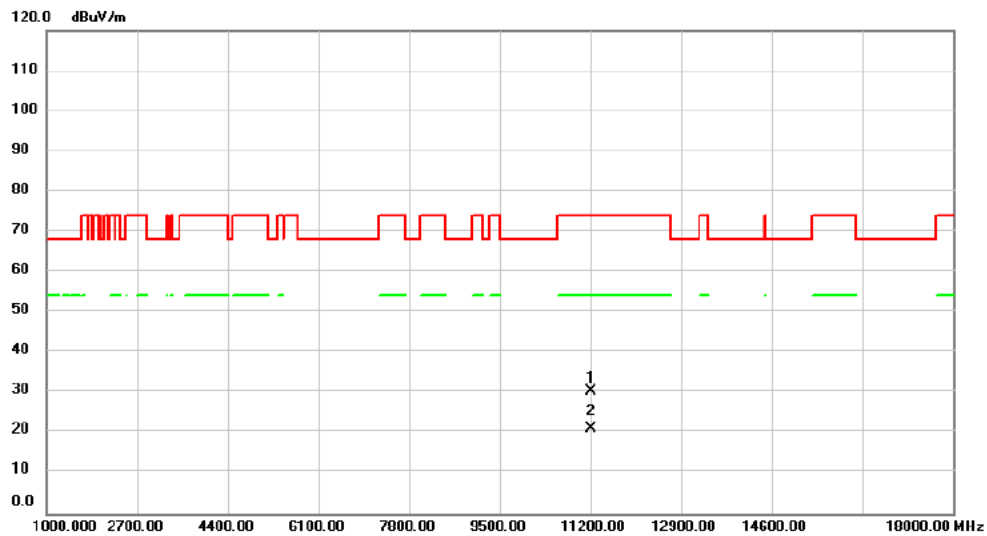


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11220.00	30.30	0.22	30.52	74.00	-43.48	peak	
2	*	11220.00	20.82	0.22	21.04	54.00	-32.96	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT80)	Test Date	2024/9/10
Test Frequency	5775MHz	Polarization	Vertical

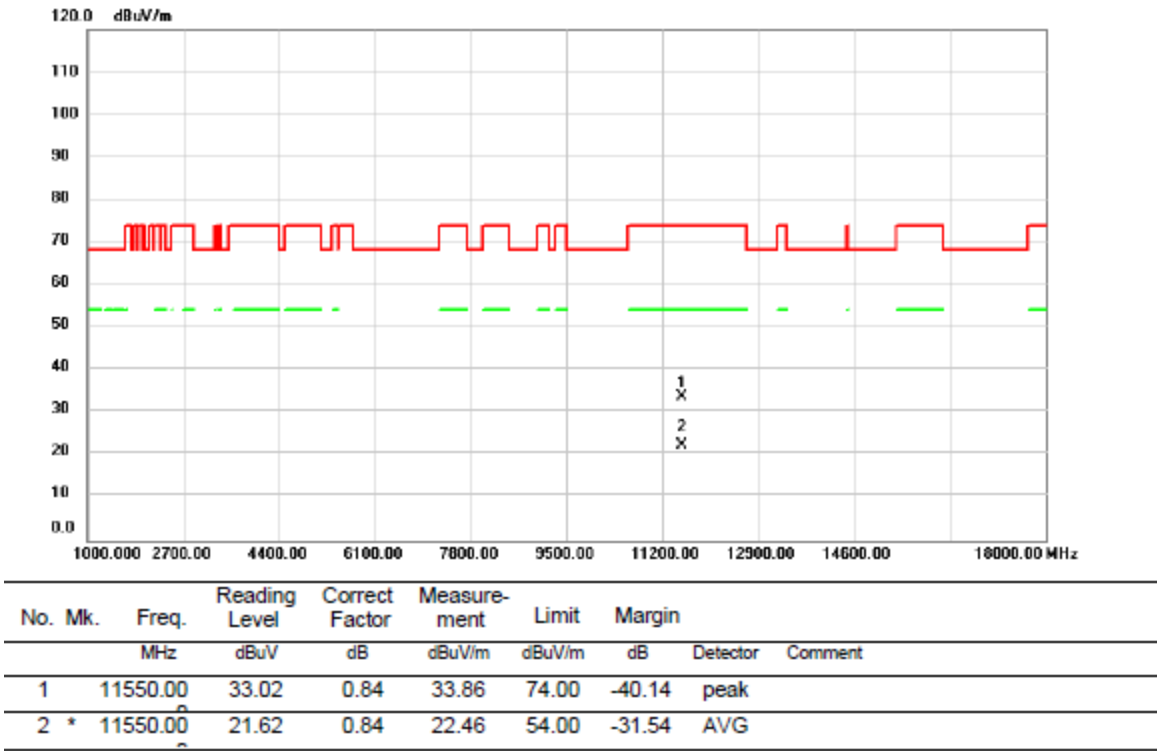


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT80)	Test Date	2024/9/10
Test Frequency	5775MHz	Polarization	Horizontal

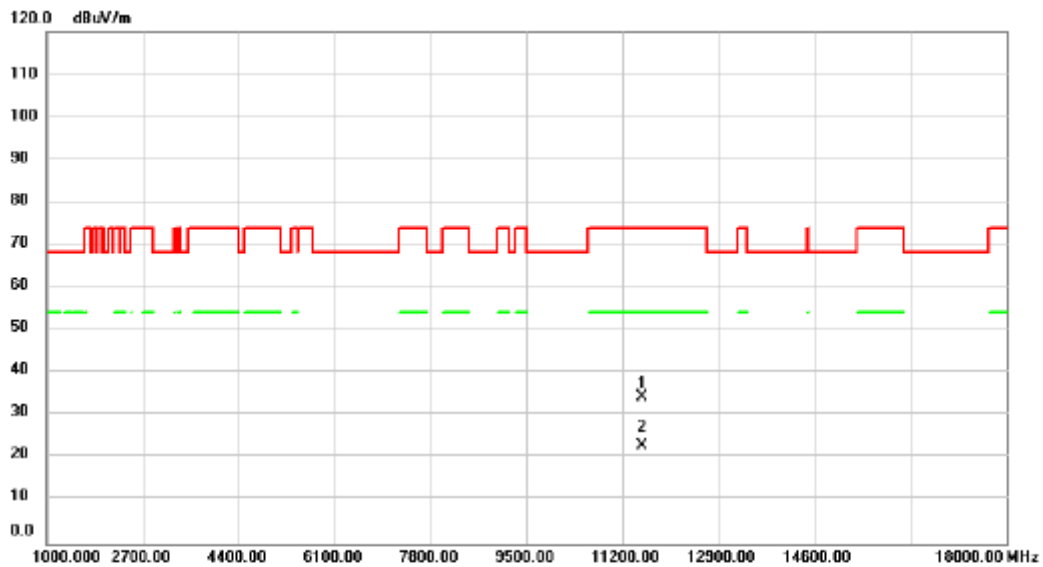


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11550.00	33.49	0.84	34.33	74.00	-39.67	peak	
2	*	11550.00	22.04	0.84	22.88	54.00	-31.12	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT160)	Test Date	2024/9/10
Test Frequency	5250MHz	Polarization	Vertical

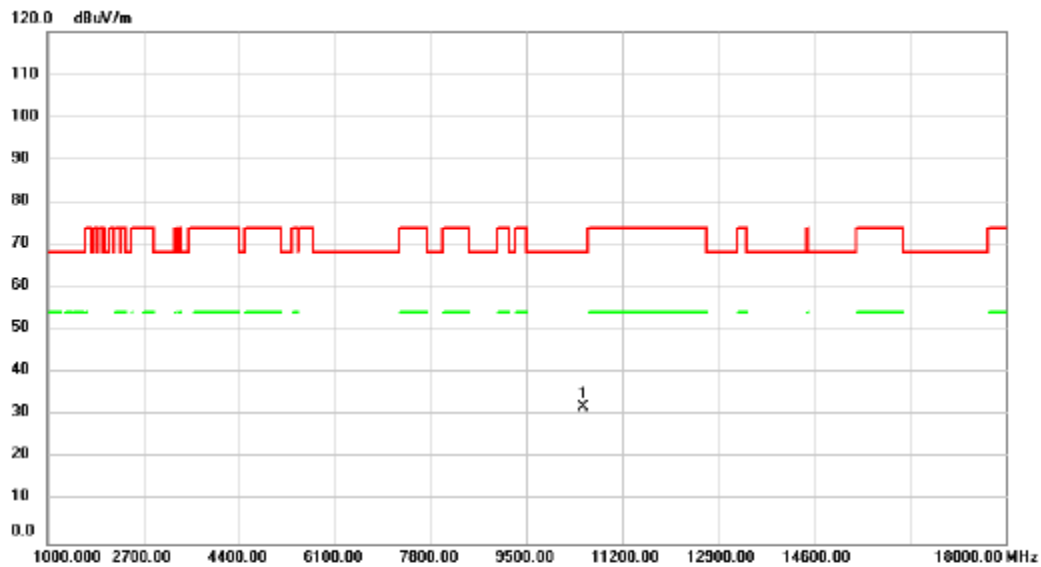


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10500.00	32.38	-0.45	31.93	68.20	-36.27	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT160)	Test Date	2024/9/10
Test Frequency	5250MHz	Polarization	Horizontal

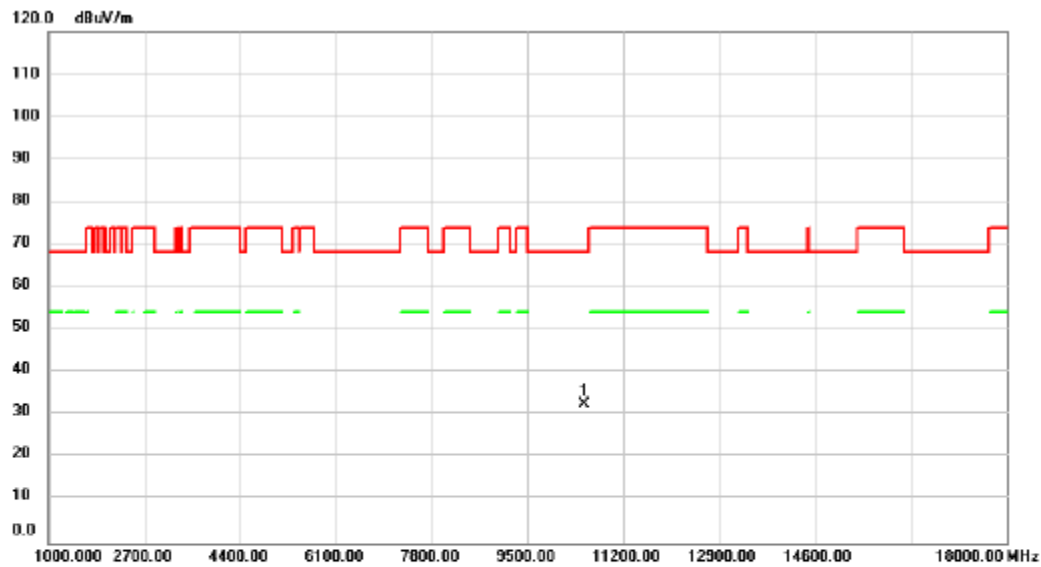


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10500.00	33.08	-0.45	32.63	68.20	-35.57	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT160)	Test Date	2024/9/26
Test Frequency	5570MHz	Polarization	Vertical

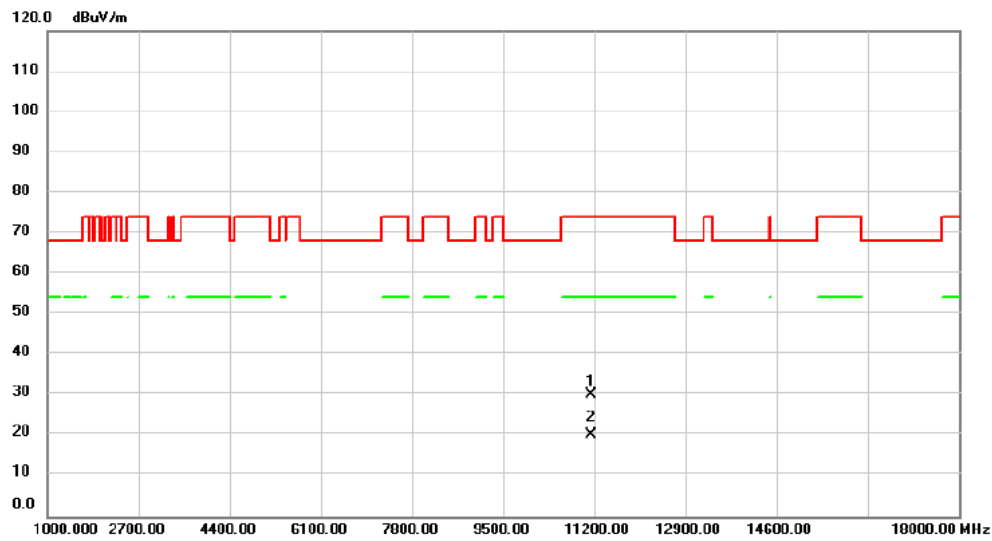


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11140.00	30.11	0.03	30.14	74.00	-43.86	peak	
2	*	11140.00	20.22	0.03	20.25	54.00	-33.75	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT160)	Test Date	2024/9/26
Test Frequency	5570MHz	Polarization	Horizontal

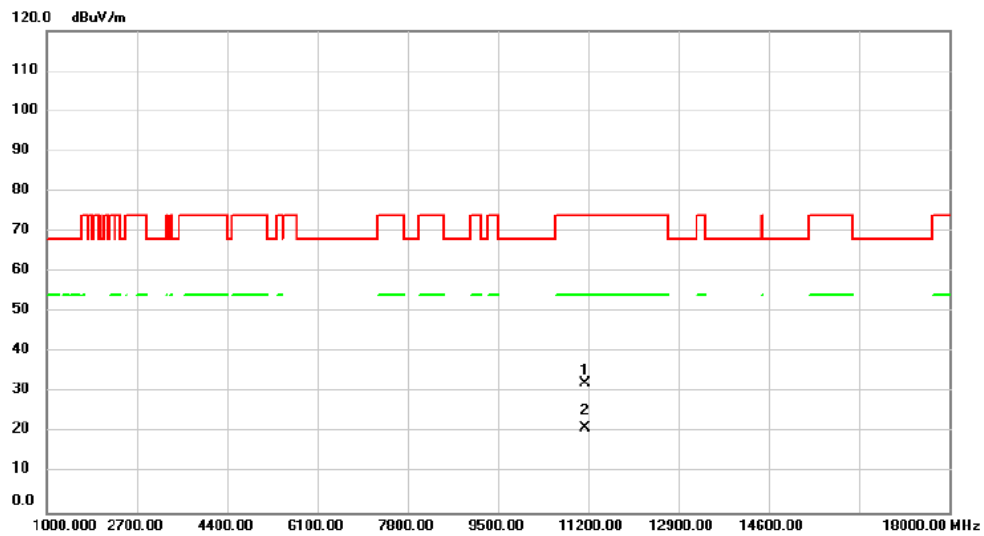


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11140.00	32.25	0.03	32.28	74.00	-41.72	peak	
2	*	11140.00	21.05	0.03	21.08	54.00	-32.92	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/9/10
Test Frequency	5180MHz	Polarization	Vertical

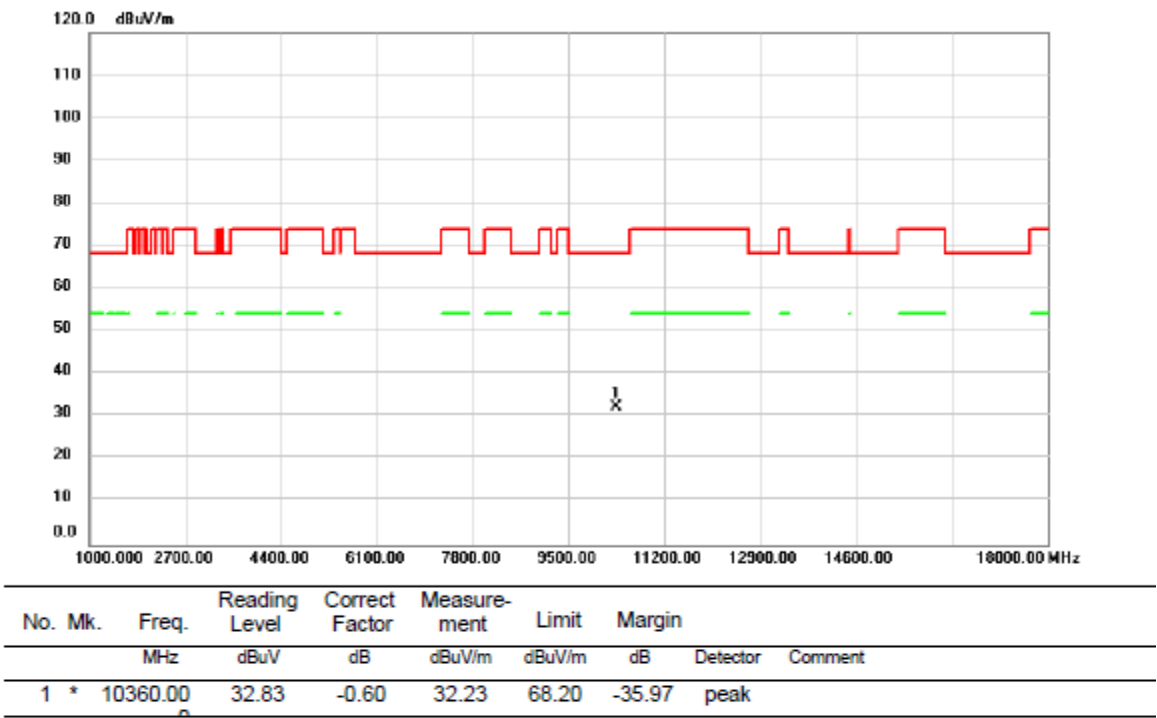


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/9/10
Test Frequency	5180MHz	Polarization	Horizontal

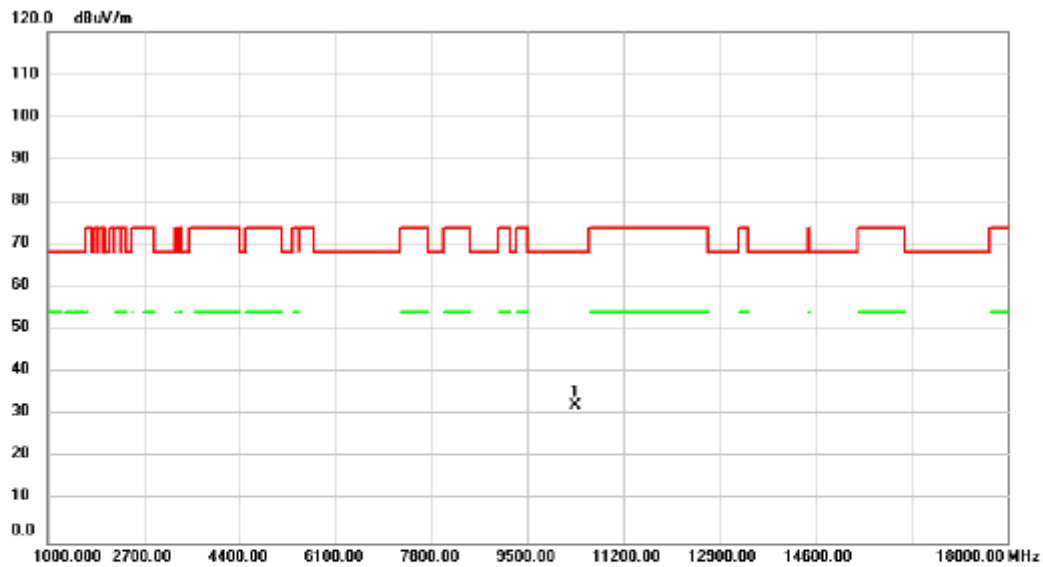


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	32.87	-0.60	32.27	68.20	-35.93	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/9/10
Test Frequency	5200MHz	Polarization	Vertical

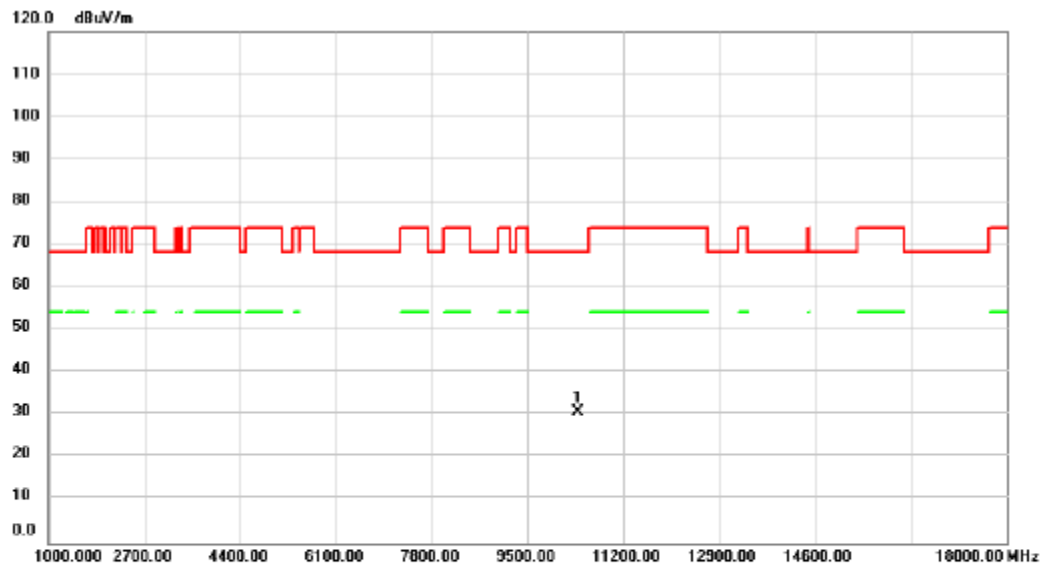


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10400.00	31.40	-0.55	30.85	68.20	-37.35	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/9/10
Test Frequency	5200MHz	Polarization	Horizontal

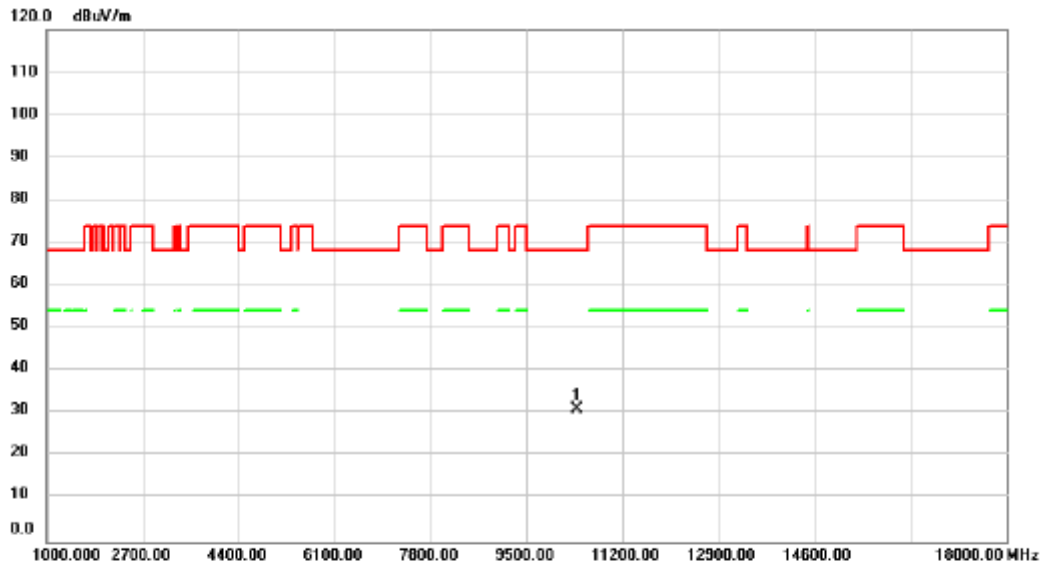


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10400.00	31.75	-0.55	31.20	68.20	-37.00	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/9/10
Test Frequency	5240MHz	Polarization	Vertical

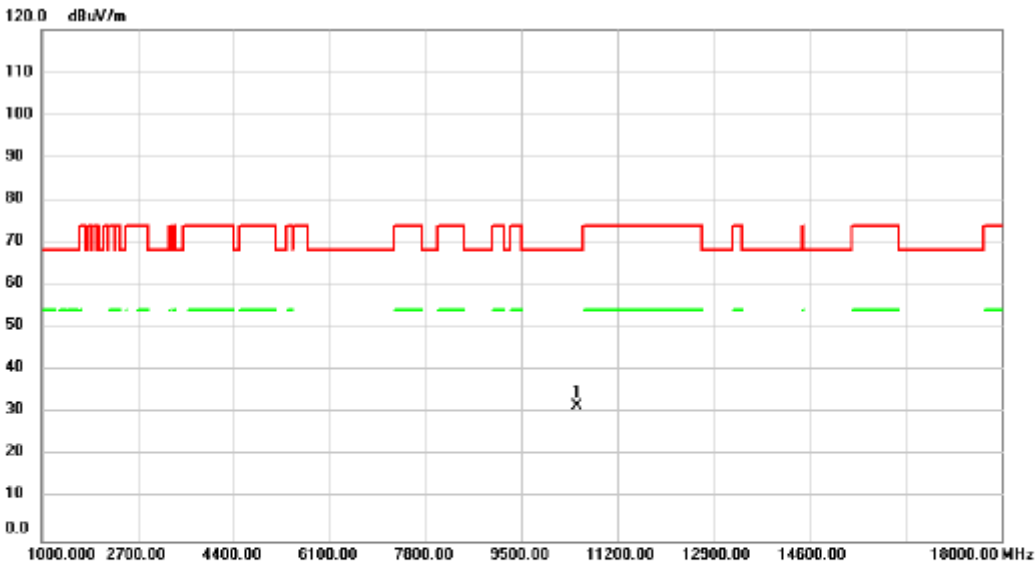


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10480.00	32.00	-0.47	31.53	68.20	-36.67	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/9/10
Test Frequency	5240MHz	Polarization	Horizontal

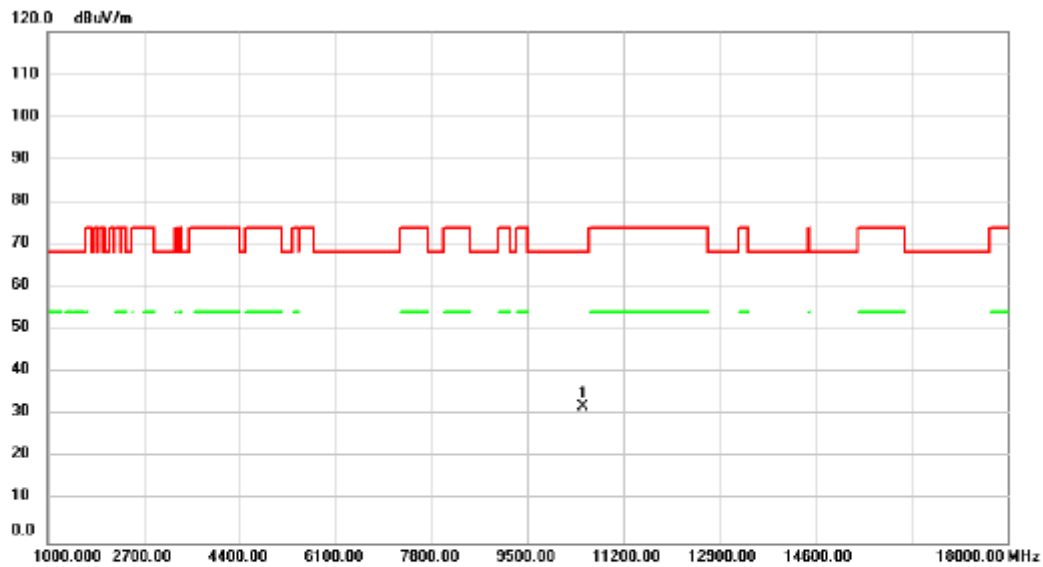


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10480.00	32.51	-0.47	32.04	68.20	-36.16	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/9/26
Test Frequency	5260MHz	Polarization	Vertical

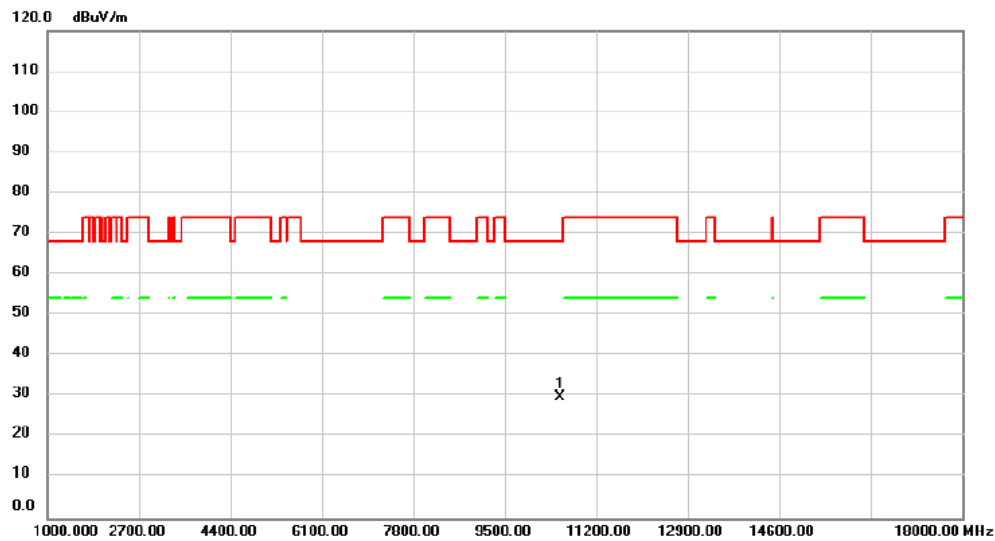


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10520.00	30.15	-0.44	29.71	68.20	-38.49	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/9/26
Test Frequency	5260MHz	Polarization	Horizontal

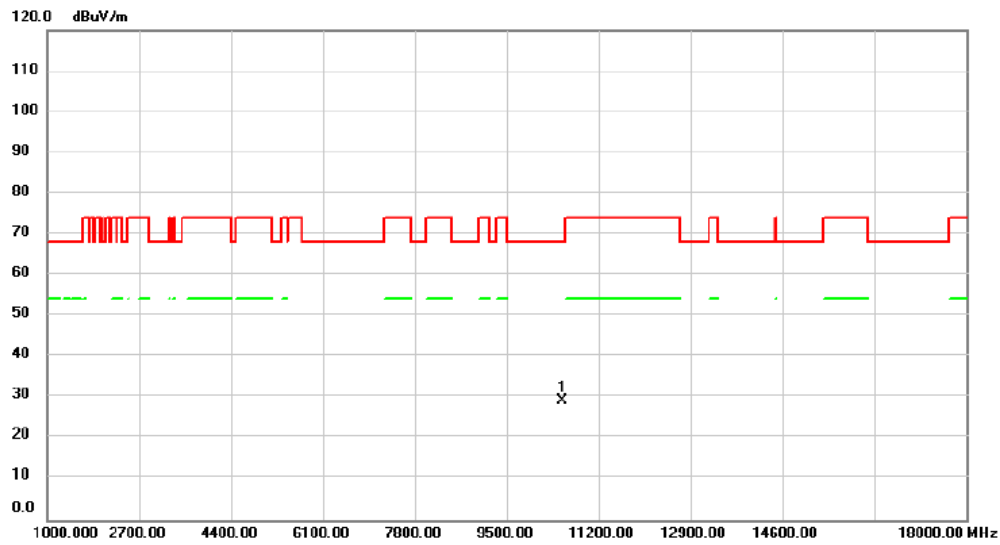


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10520.00	29.59	-0.44	29.15	68.20	-39.05	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/9/26
Test Frequency	5300MHz	Polarization	Vertical

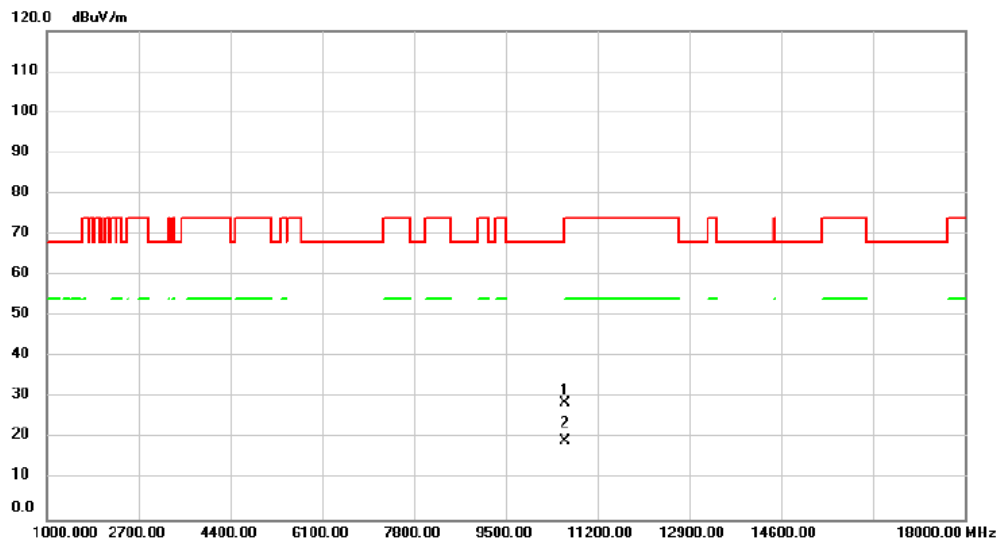


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10600.00	29.16	-0.41	28.75	68.20	-39.45	peak	
2	*	10600.00	19.66	-0.41	19.25	54.00	-34.75	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/9/26
Test Frequency	5300MHz	Polarization	Horizontal

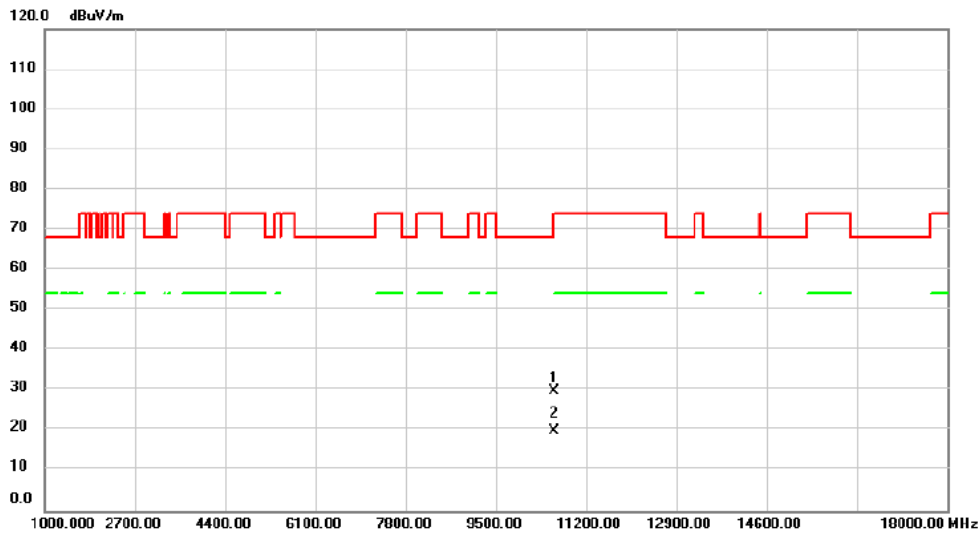


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10600.00	30.33	-0.41	29.92	68.20	-38.28	peak	
2	*	10600.00	20.23	-0.41	19.82	54.00	-34.18	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/9/26
Test Frequency	5320MHz	Polarization	Vertical

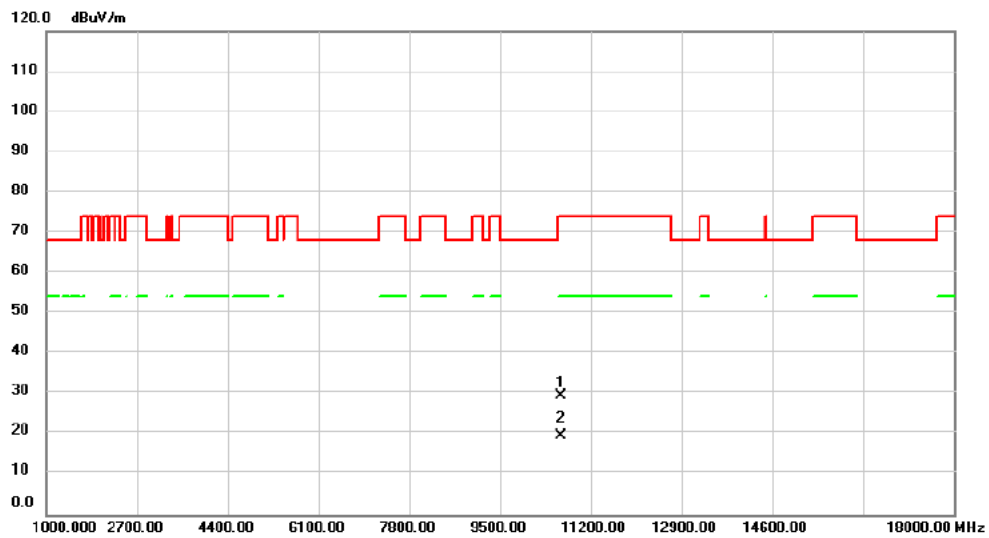


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10640.00	30.04	-0.41	29.63	74.00	-44.37	peak	
2	*	10640.00	20.11	-0.41	19.70	54.00	-34.30	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/9/26
Test Frequency	5320MHz	Polarization	Horizontal

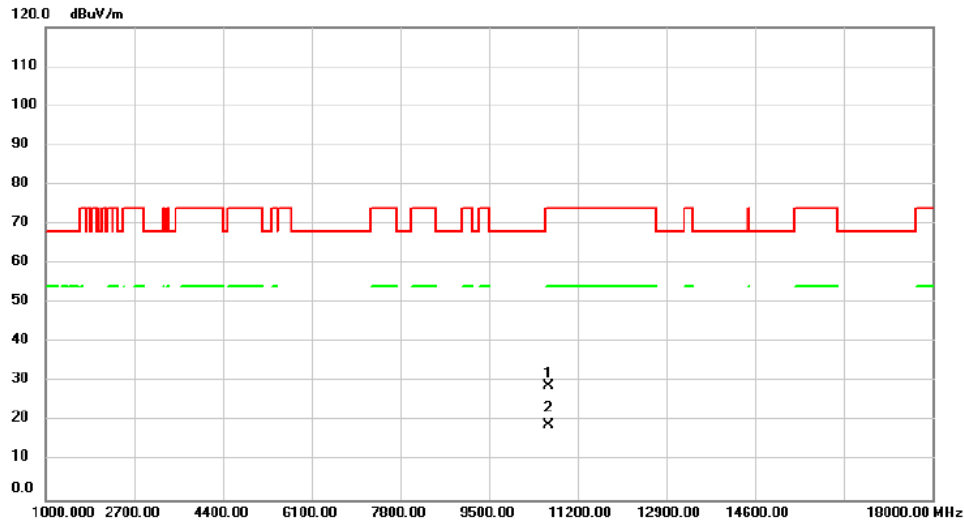


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10640.00	29.46	-0.41	29.05	74.00	-44.95	peak	
2 *	10640.00	19.33	-0.41	18.92	54.00	-35.08	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/9/26
Test Frequency	5500MHz	Polarization	Vertical

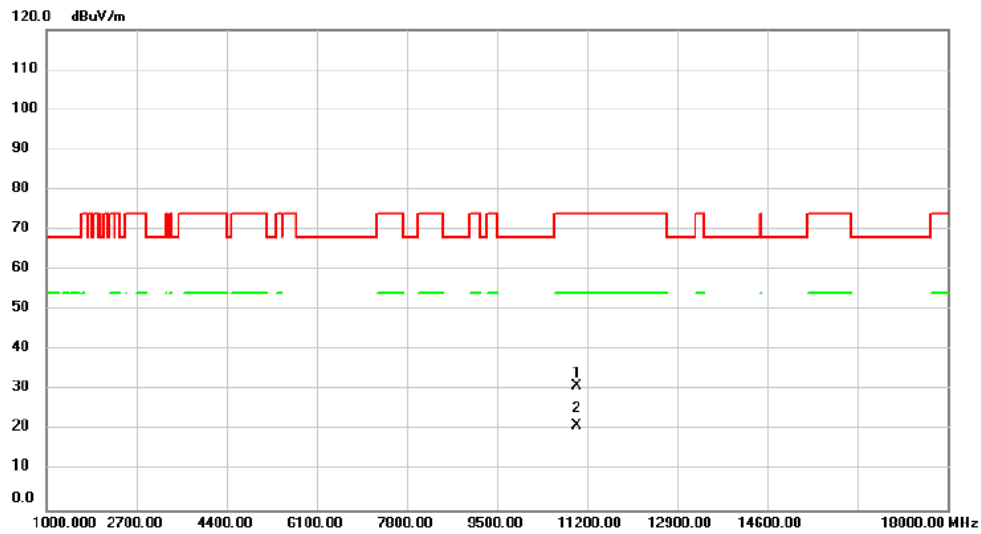


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11000.00	31.37	-0.27	31.10	74.00	-42.90	peak	
2	*	11000.00	21.56	-0.27	21.29	54.00	-32.71	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/9/26
Test Frequency	5500MHz	Polarization	Horizontal

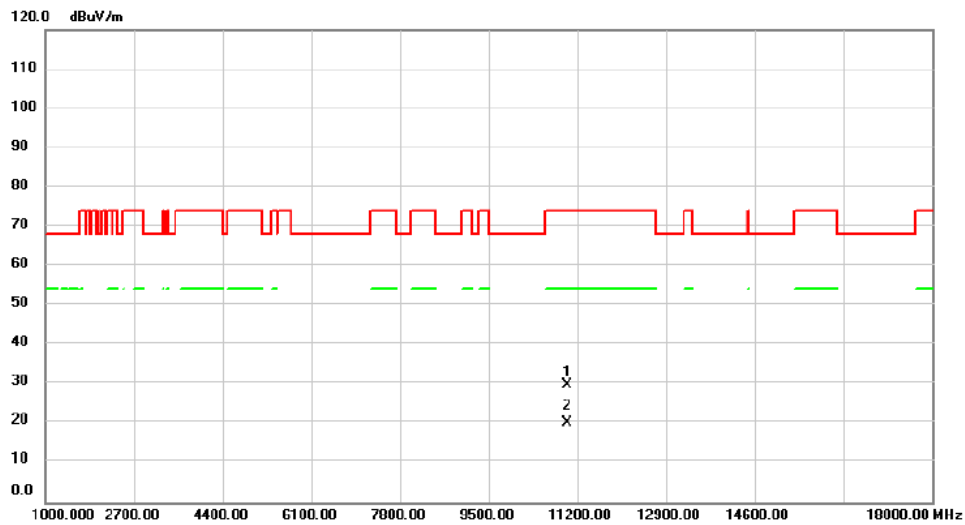


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11000.00	30.10	-0.27	29.83	74.00	-44.17	peak	
2	*	11000.00	20.42	-0.27	20.15	54.00	-33.85	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/9/26
Test Frequency	5580MHz	Polarization	Vertical

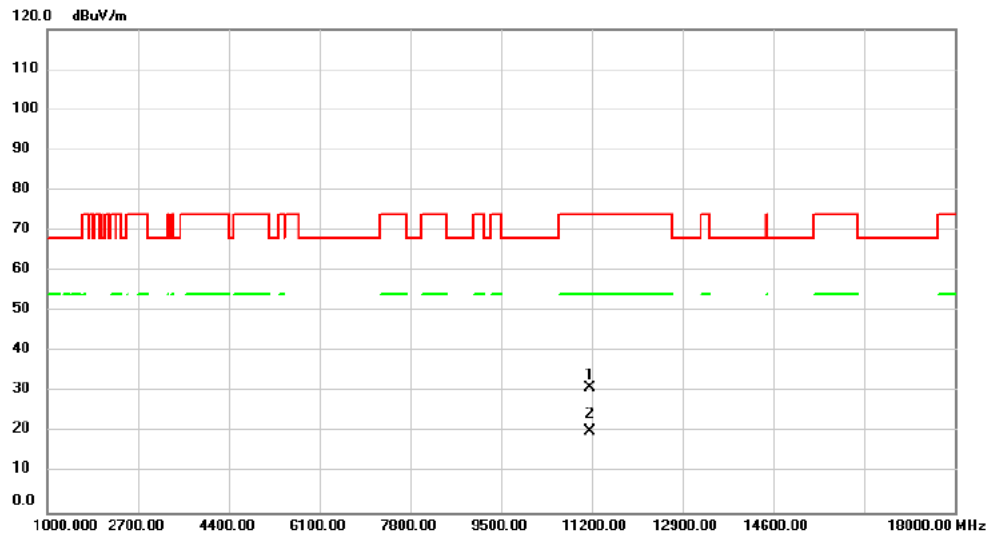


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11160.00	30.99	0.08	31.07	74.00	-42.93	peak	
2 *	11160.00	20.15	0.08	20.23	54.00	-33.77	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/9/26
Test Frequency	5580MHz	Polarization	Horizontal

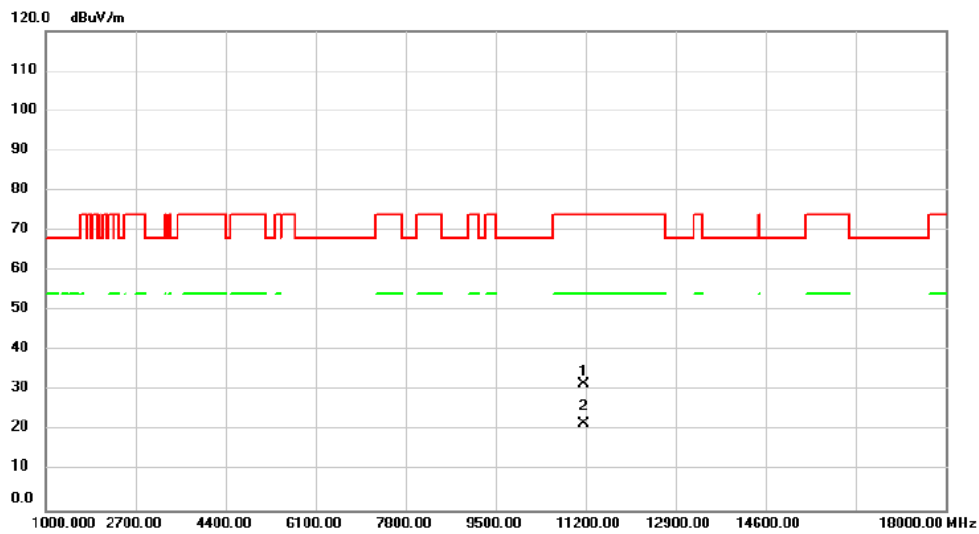


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11160.00	31.50	0.08	31.58	74.00	-42.42	peak	
2 *	11160.00	21.55	0.08	21.63	54.00	-32.37	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/9/26
Test Frequency	5700MHz	Polarization	Vertical

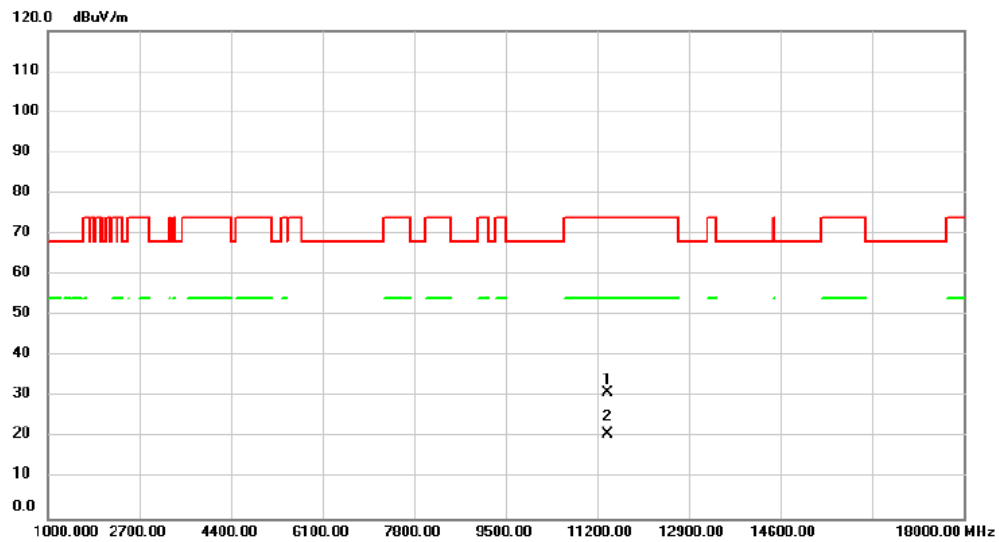


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11400.00	30.48	0.61	31.09	74.00	-42.91	peak	
2	*	11400.00	20.15	0.61	20.76	54.00	-33.24	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/9/26
Test Frequency	5700MHz	Polarization	Horizontal

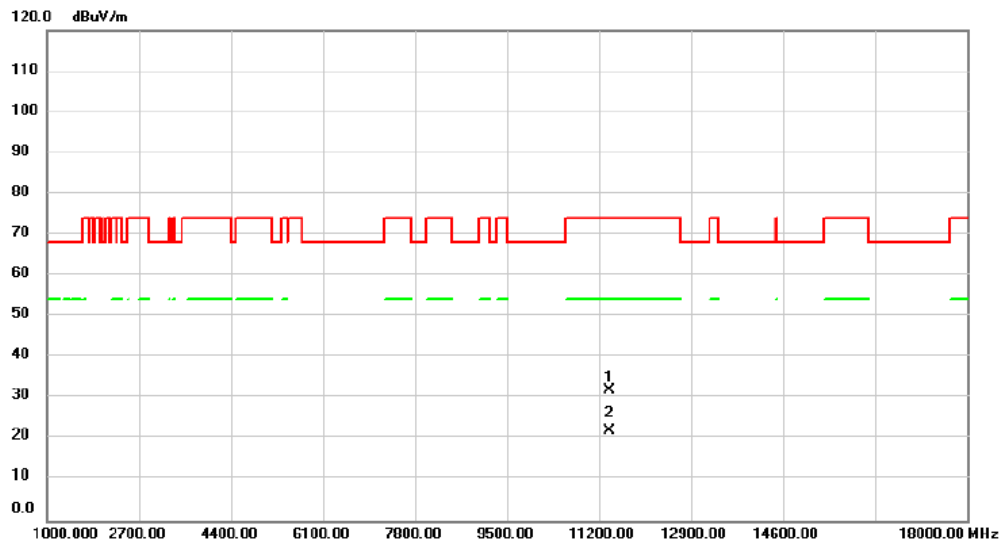


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11400.00	31.29	0.61	31.90	74.00	-42.10	peak	
2	*	11400.00	21.55	0.61	22.16	54.00	-31.84	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/9/10
Test Frequency	5745MHz	Polarization	Vertical

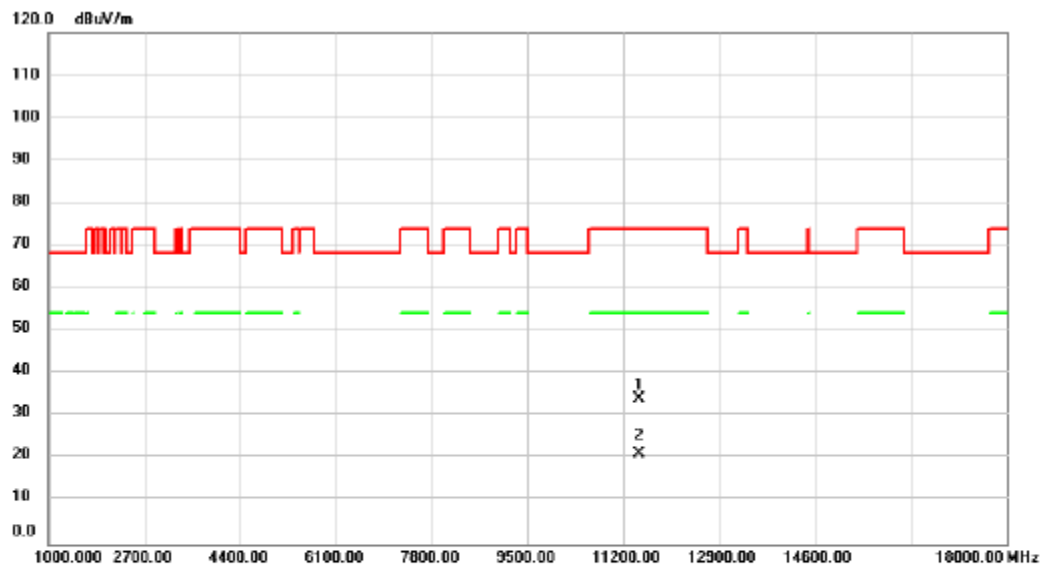


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.00	33.15	0.82	33.97	74.00	-40.03	peak	
2	*	11490.00	20.36	0.82	21.18	54.00	-32.82	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/9/10
Test Frequency	5745MHz	Polarization	Horizontal

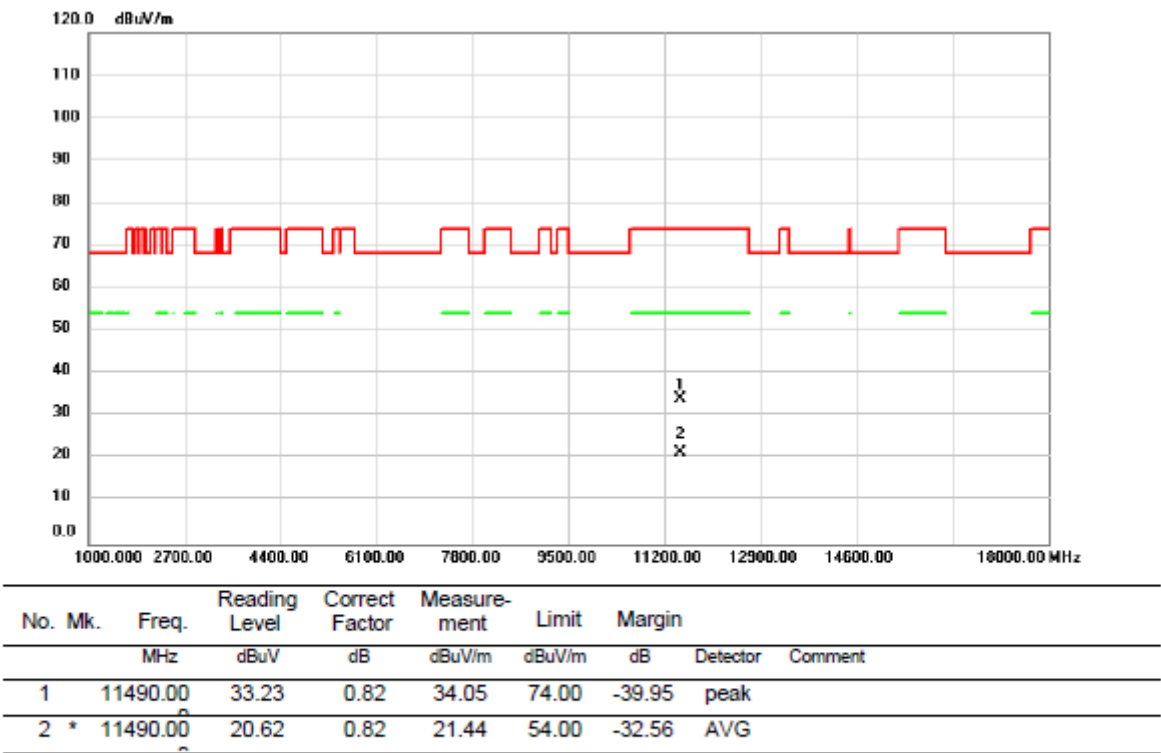


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/9/10
Test Frequency	5785MHz	Polarization	Vertical

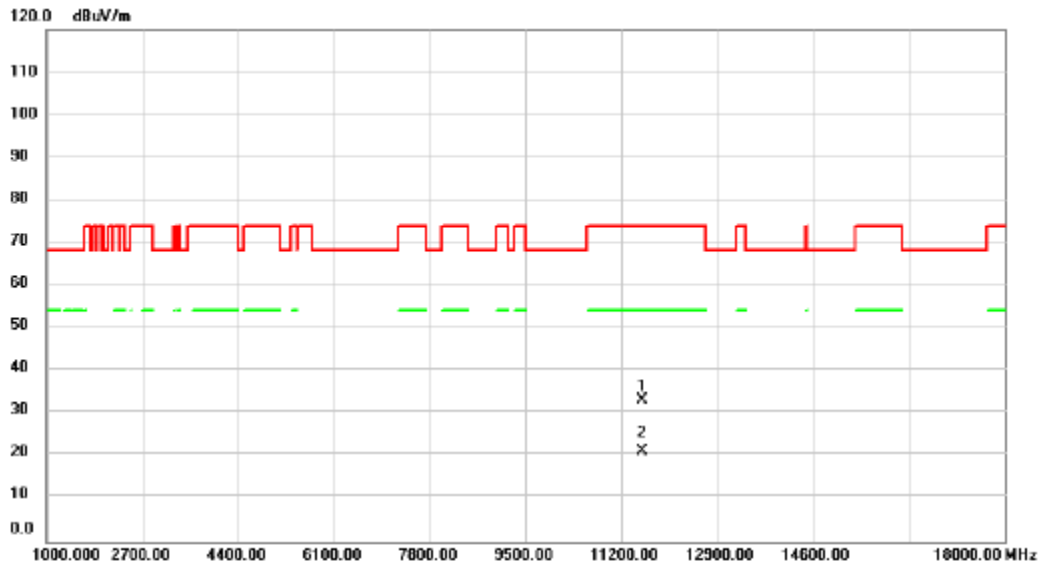


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11570.00	32.32	0.83	33.15	74.00	-40.85	peak	
2	*	11570.00	20.34	0.83	21.17	54.00	-32.83	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/9/10
Test Frequency	5785MHz	Polarization	Horizontal

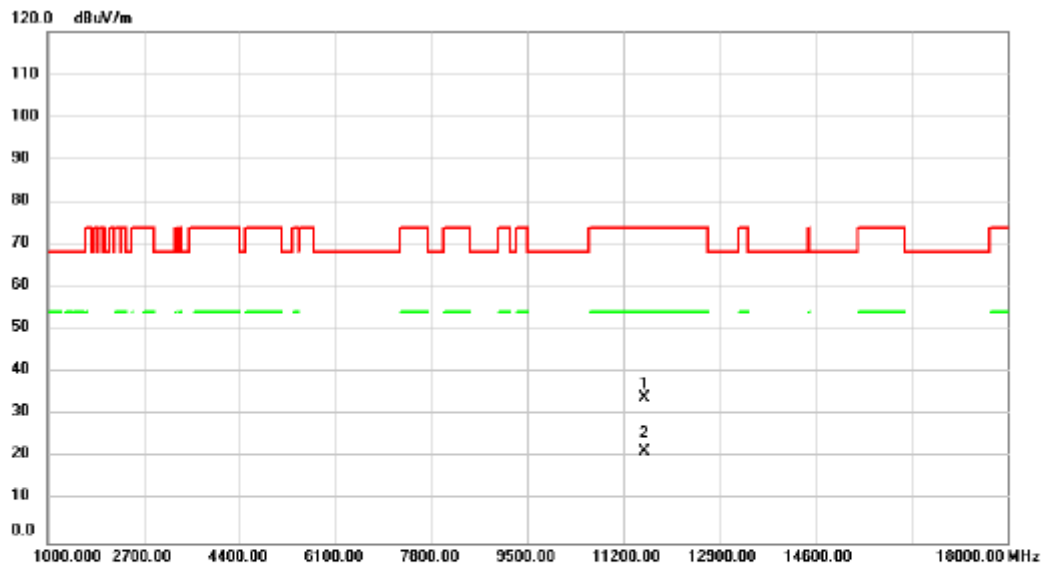


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11570.00	33.13	0.83	33.96	74.00	-40.04	peak	
2	*	11570.00	20.71	0.83	21.54	54.00	-32.46	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/9/10
Test Frequency	5825MHz	Polarization	Vertical

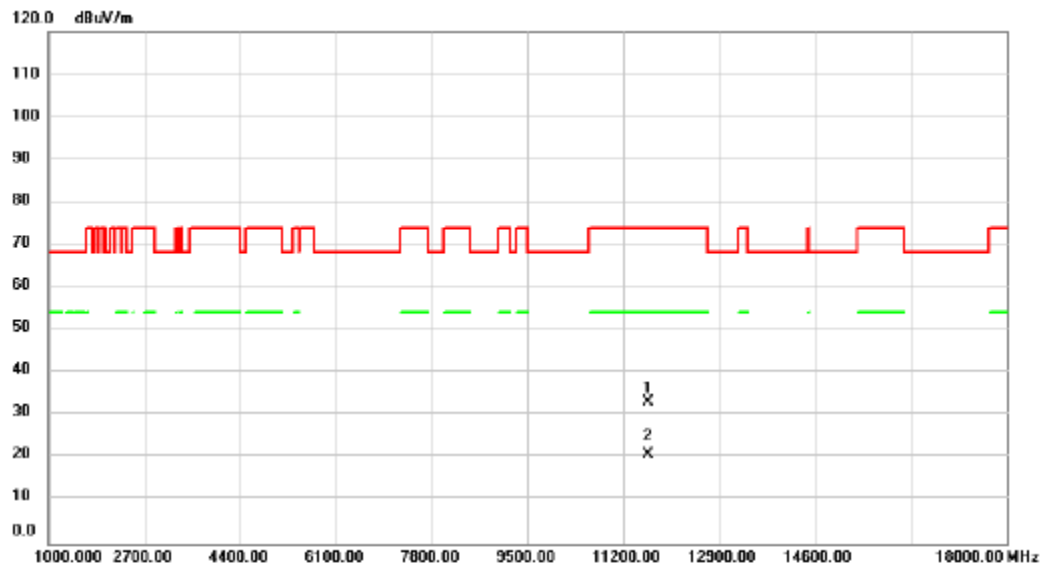


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.00	32.24	0.83	33.07	74.00	-40.93	peak	
2	*	11650.00	19.95	0.83	20.78	54.00	-33.22	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/9/10
Test Frequency	5825MHz	Polarization	Horizontal

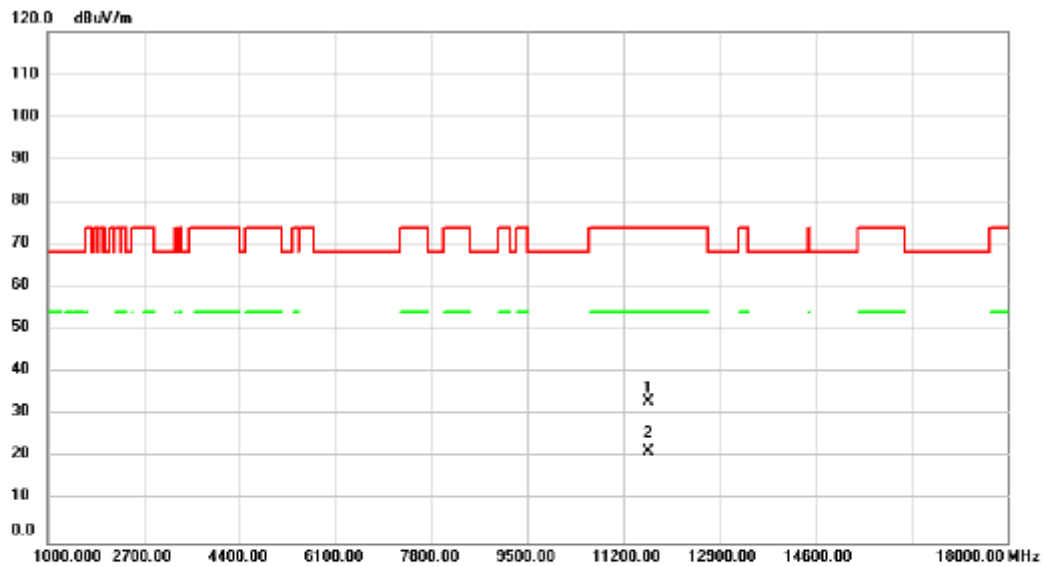


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.00	32.20	0.83	33.03	74.00	-40.97	peak	
2	*	11650.00	20.51	0.83	21.34	54.00	-32.66	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/9/10
Test Frequency	5190MHz	Polarization	Vertical

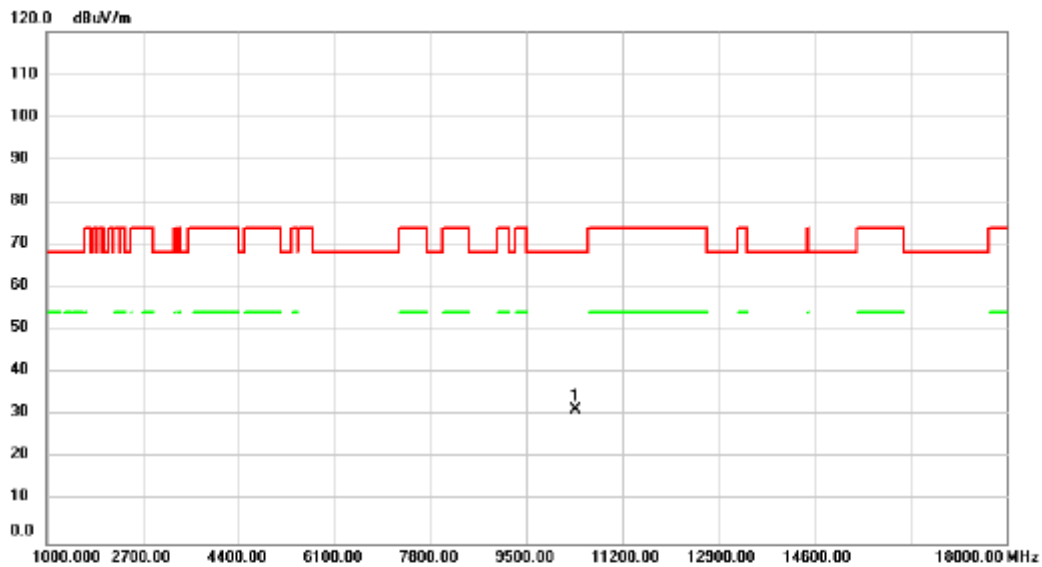


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10380.00	32.02	-0.57	31.45	68.20	-36.75	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/9/10
Test Frequency	5190MHz	Polarization	Horizontal

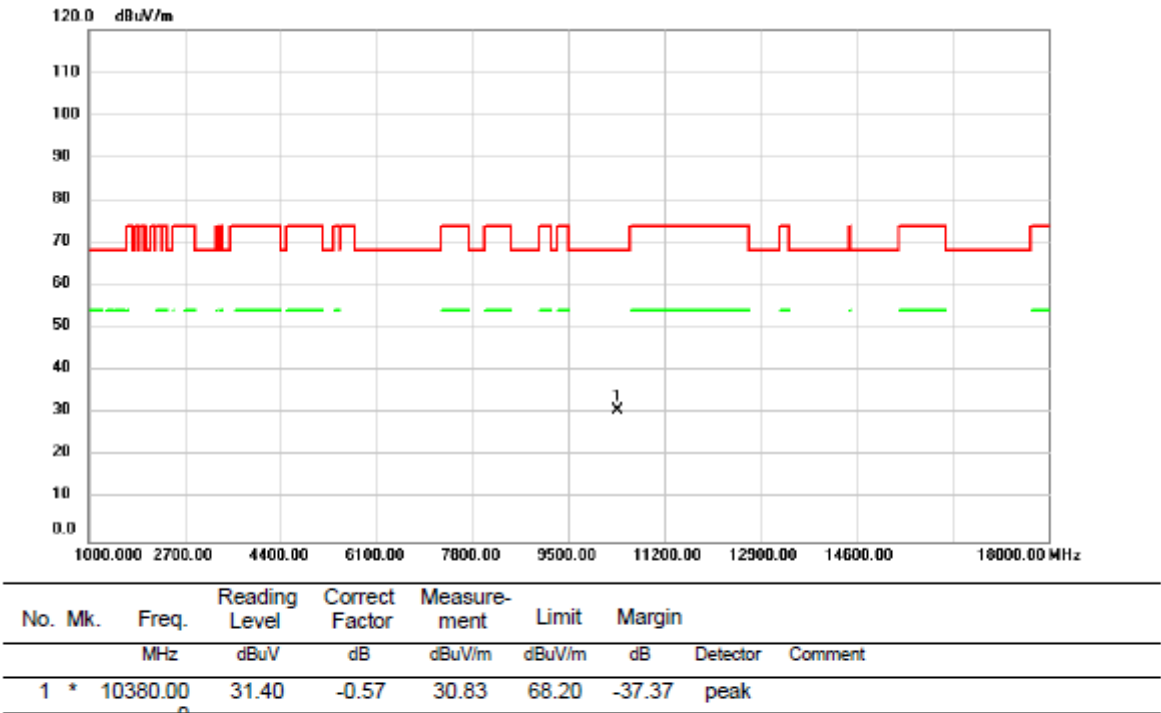


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/9/10
Test Frequency	5230MHz	Polarization	Vertical

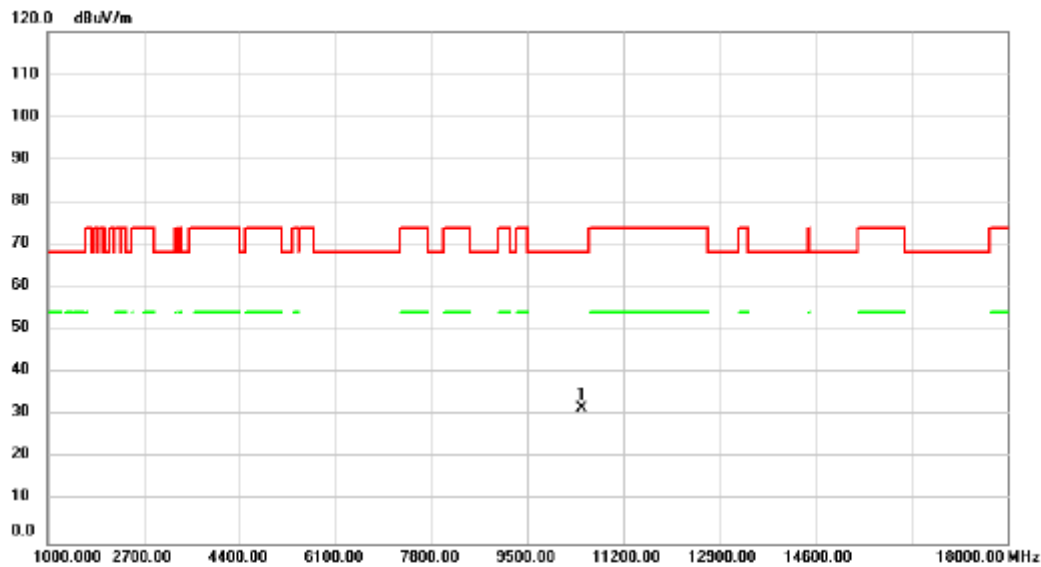


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10460.00	32.04	-0.49	31.55	68.20	-36.65	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/9/10
Test Frequency	5230MHz	Polarization	Horizontal

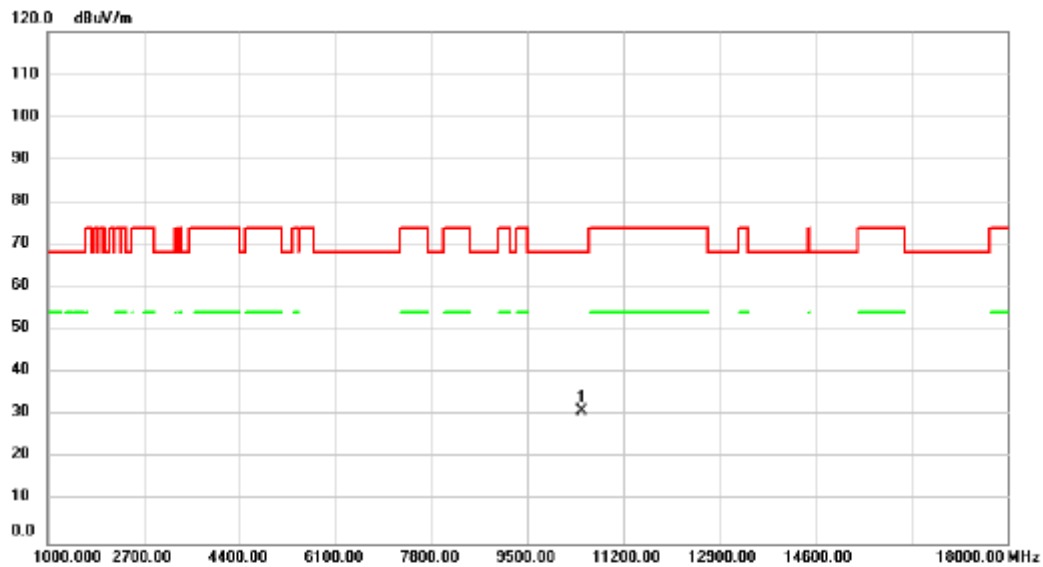


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10460.00	31.49	-0.49	31.00	68.20	-37.20	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/9/26
Test Frequency	5270MHz	Polarization	Vertical

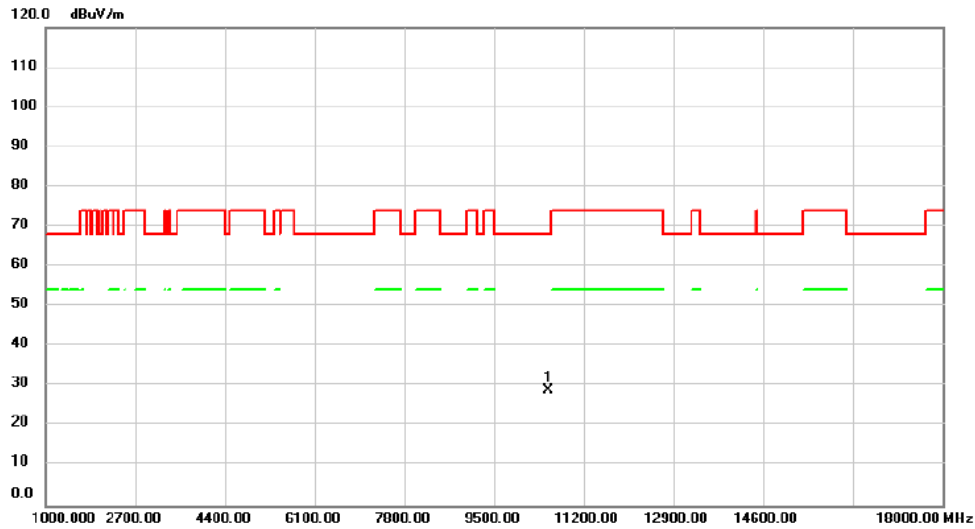


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10540.00	29.40	-0.44	28.96	68.20	-39.24	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/9/26
Test Frequency	5270MHz	Polarization	Horizontal

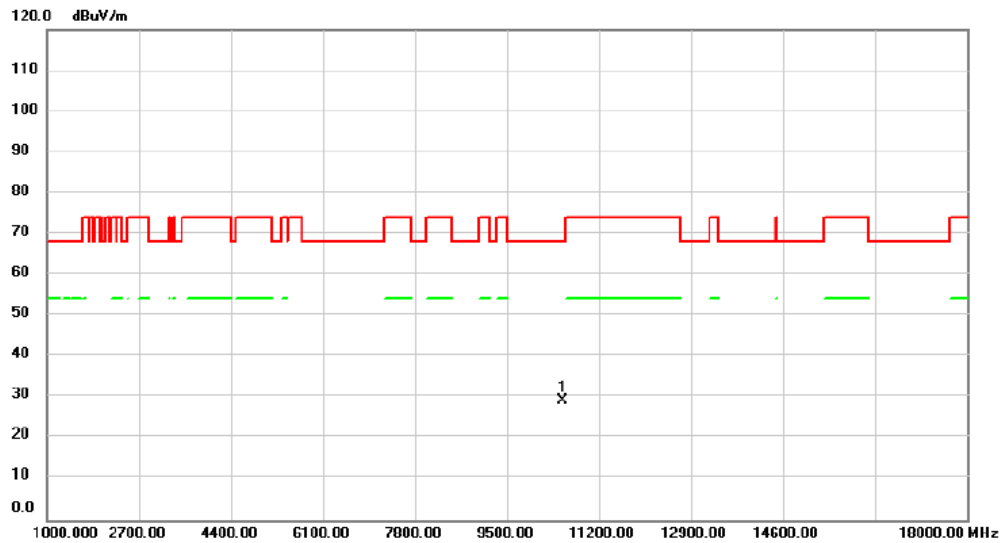


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10540.00	29.83	-0.44	29.39	68.20	-38.81	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/9/26
Test Frequency	5310MHz	Polarization	Vertical

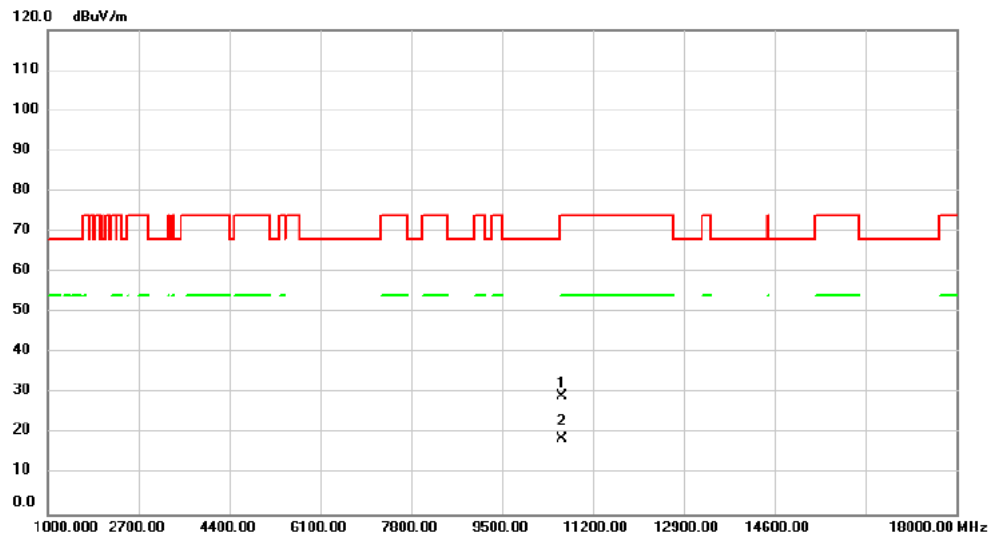


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10620.00	29.75	-0.40	29.35	74.00	-44.65	peak	
2	*	10620.00	19.25	-0.40	18.85	54.00	-35.15	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/9/26
Test Frequency	5310MHz	Polarization	Horizontal

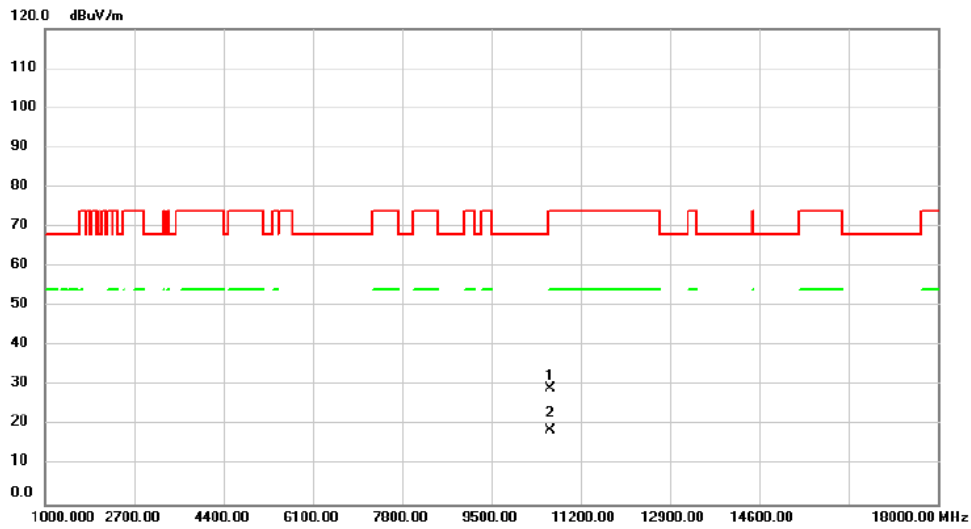


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10620.00	29.53	-0.40	29.13	74.00	-44.87	peak	
2	*	10620.00	19.22	-0.40	18.82	54.00	-35.18	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/9/26
Test Frequency	5510MHz	Polarization	Vertical

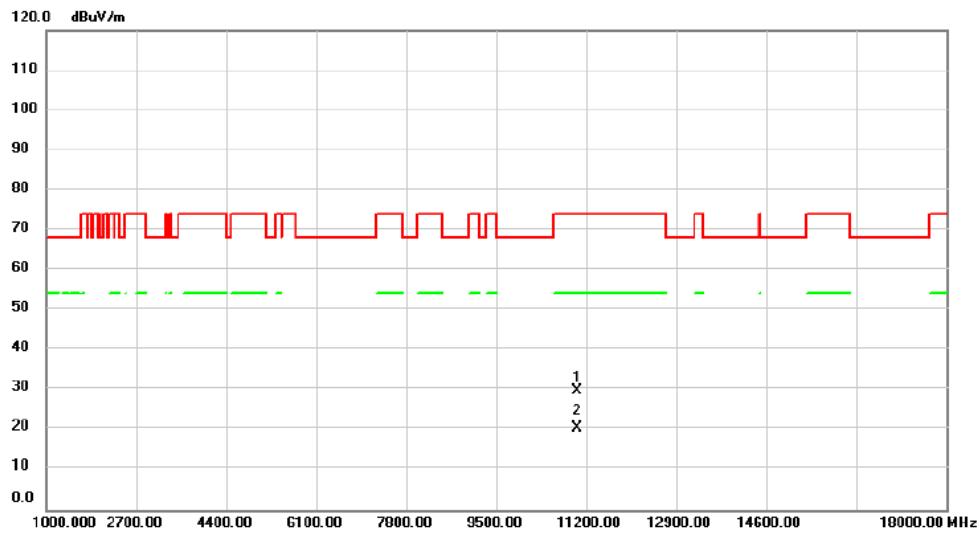


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11020.00	30.06	-0.22	29.84	74.00	-44.16	peak	
2	*	11020.00	20.77	-0.22	20.55	54.00	-33.45	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/9/26
Test Frequency	5510MHz	Polarization	Horizontal

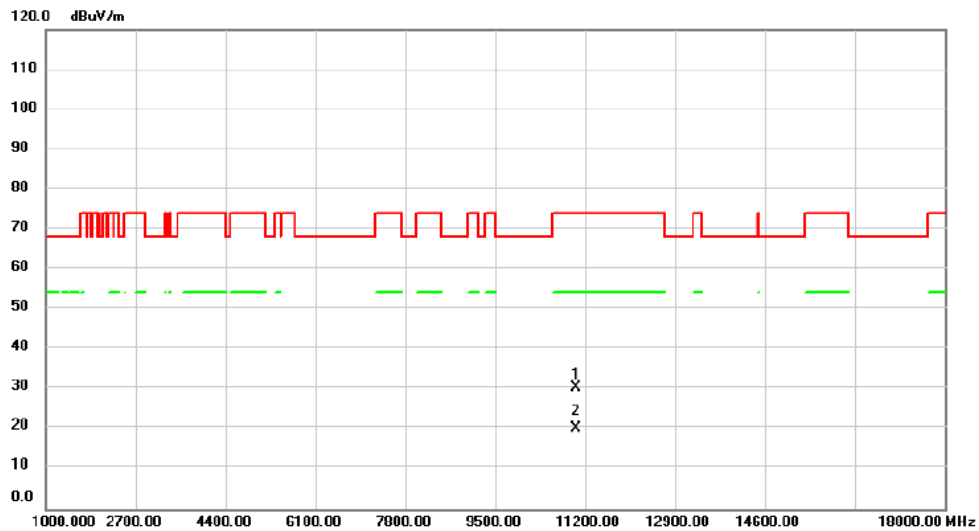


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11020.00	30.53	-0.22	30.31	74.00	-43.69	peak	
2	*	11020.00	20.32	-0.22	20.10	54.00	-33.90	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/9/26
Test Frequency	5550MHz	Polarization	Vertical

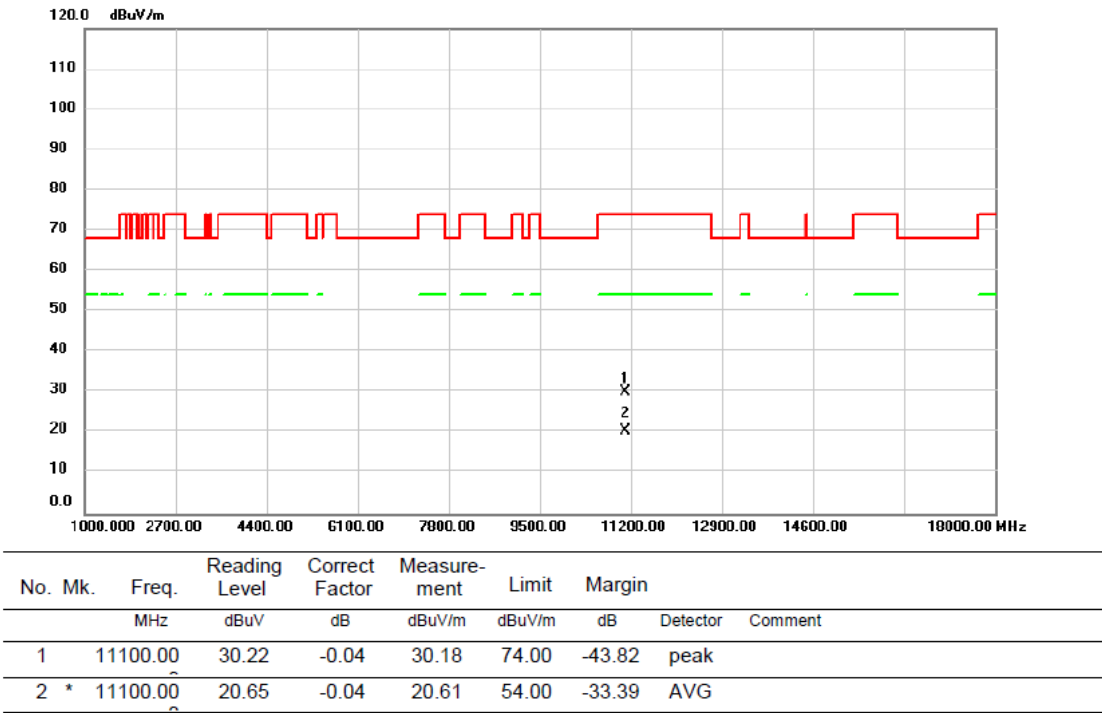


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/9/26
Test Frequency	5550MHz	Polarization	Horizontal

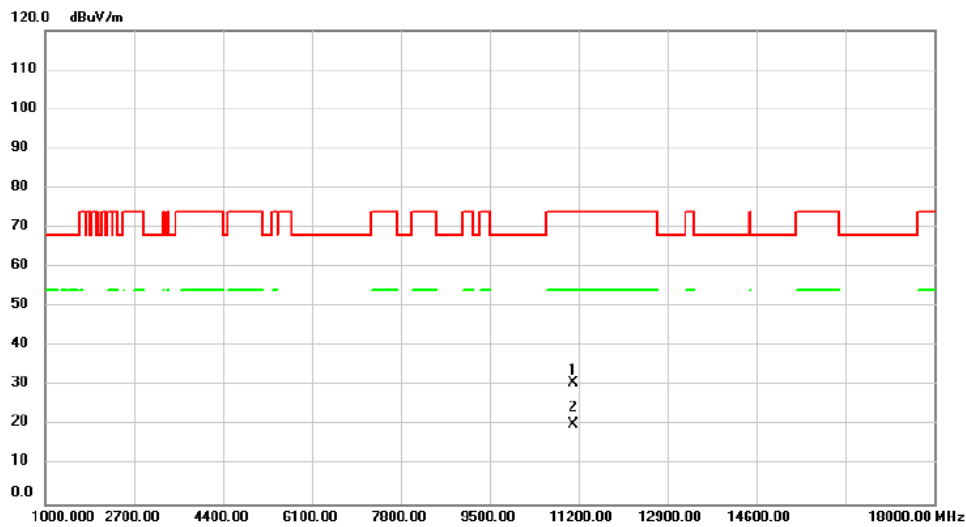


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11100.00	30.89	-0.04	30.85	74.00	-43.15	peak	
2	*	11100.00	20.41	-0.04	20.37	54.00	-33.63	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/9/26
Test Frequency	5670MHz	Polarization	Vertical

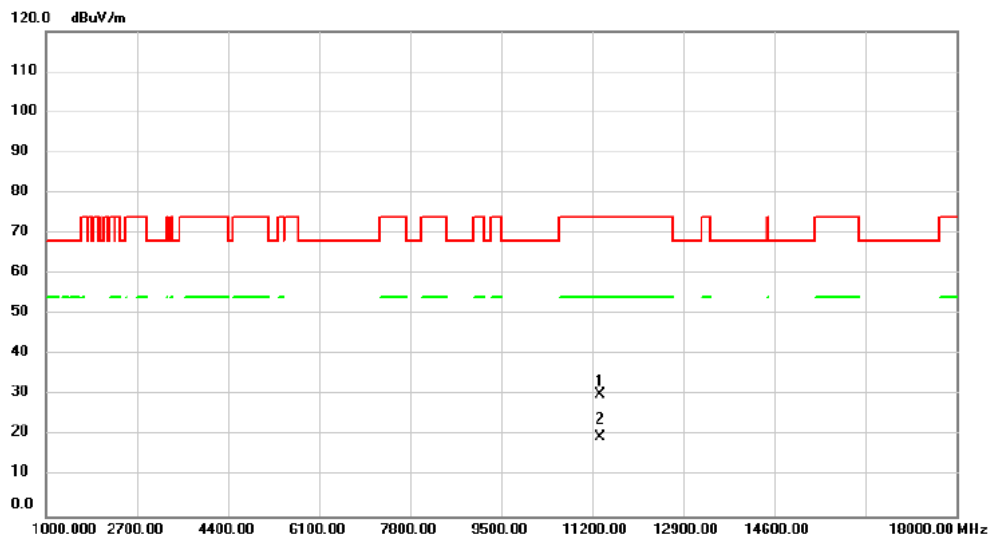


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11340.00	29.73	0.49	30.22	74.00	-43.78	peak	
2	*	11340.00	19.22	0.49	19.71	54.00	-34.29	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/9/26
Test Frequency	5670MHz	Polarization	Horizontal

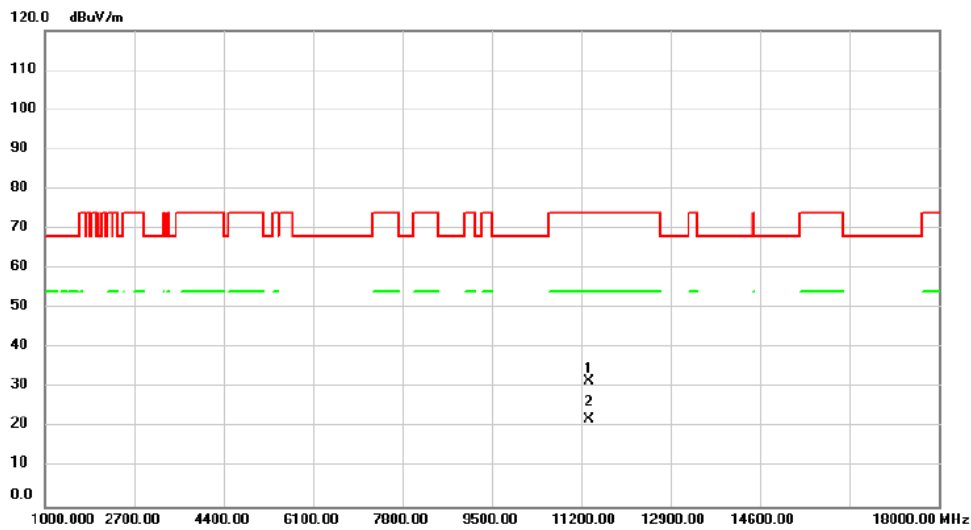


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11340.00	31.24	0.49	31.73	74.00	-42.27	peak	
2	*	11340.00	21.54	0.49	22.03	54.00	-31.97	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/9/10
Test Frequency	5755MHz	Polarization	Vertical

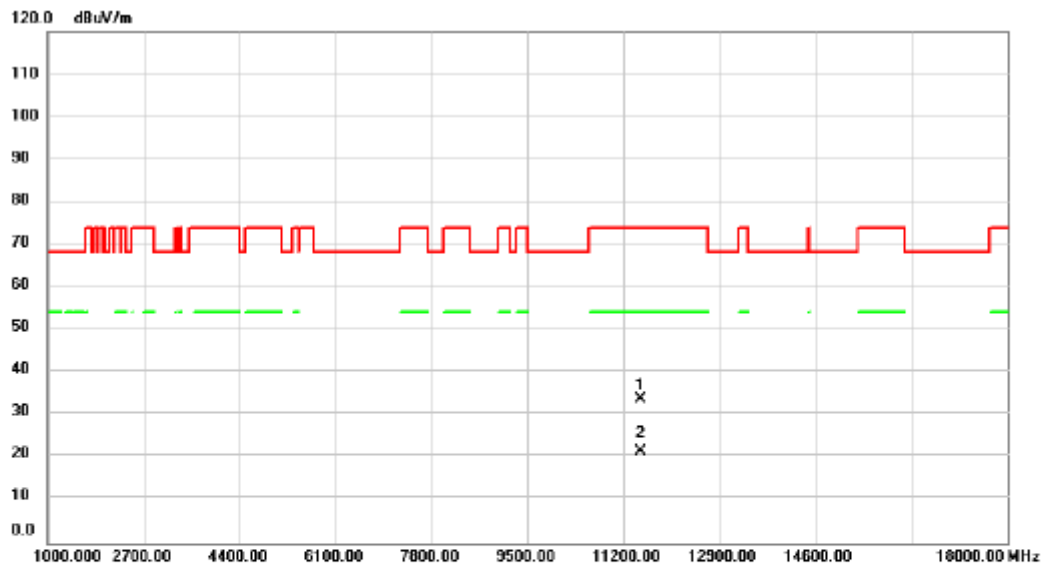


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11510.00	32.94	0.83	33.77	74.00	-40.23	peak	
2	*	11510.00	20.64	0.83	21.47	54.00	-32.53	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/9/10
Test Frequency	5755MHz	Polarization	Horizontal

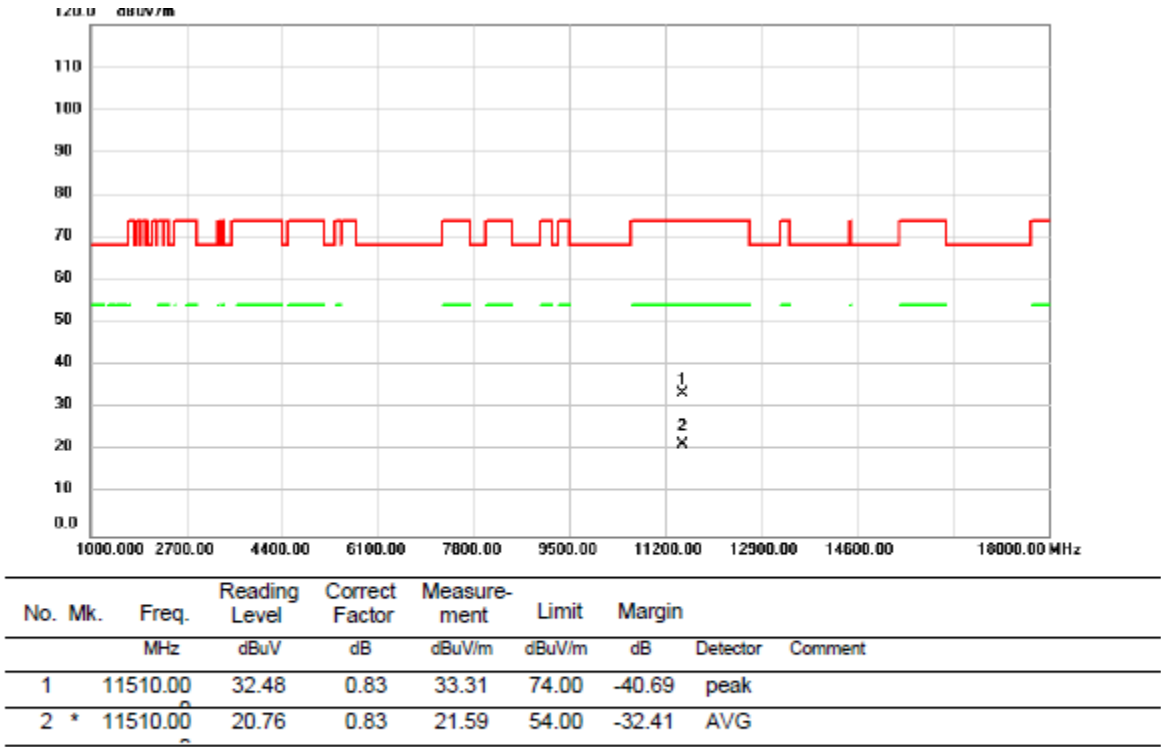


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/9/10
Test Frequency	5795MHz	Polarization	Vertical

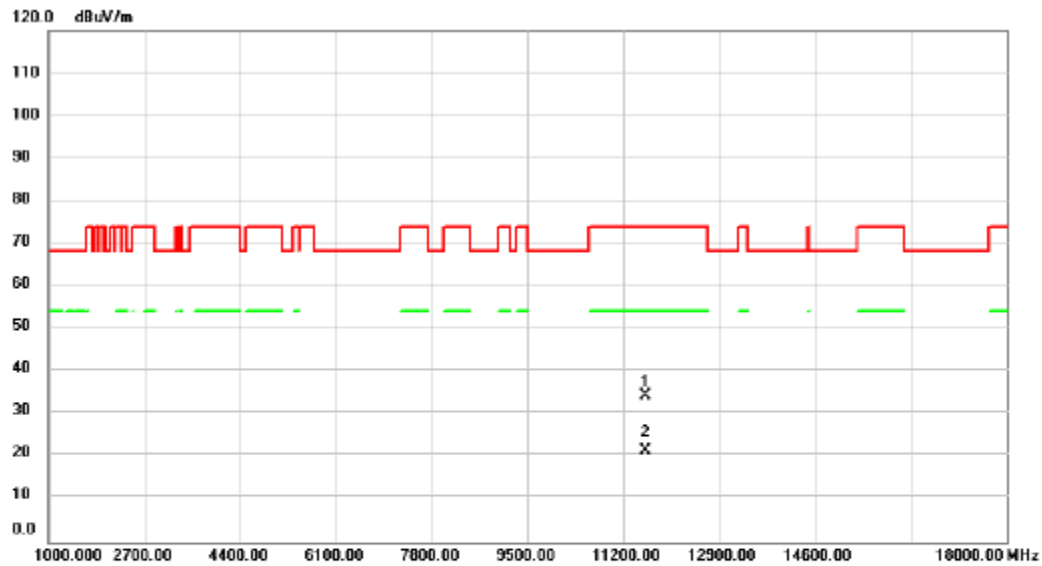


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11590.00	33.46	0.84	34.30	74.00	-39.70	peak	
2	*	11590.00	20.57	0.84	21.41	54.00	-32.59	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/9/10
Test Frequency	5795MHz	Polarization	Horizontal

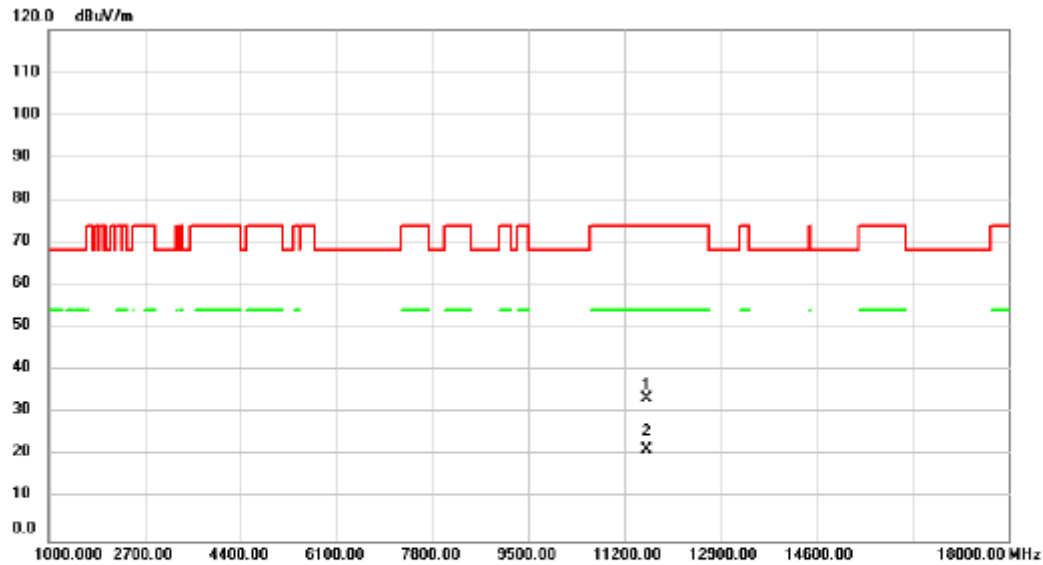


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11590.00	32.66	0.84	33.50	74.00	-40.50	peak	
2	*	11590.00	20.67	0.84	21.51	54.00	-32.49	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE80)	Test Date	2024/9/10
Test Frequency	5210MHz	Polarization	Vertical

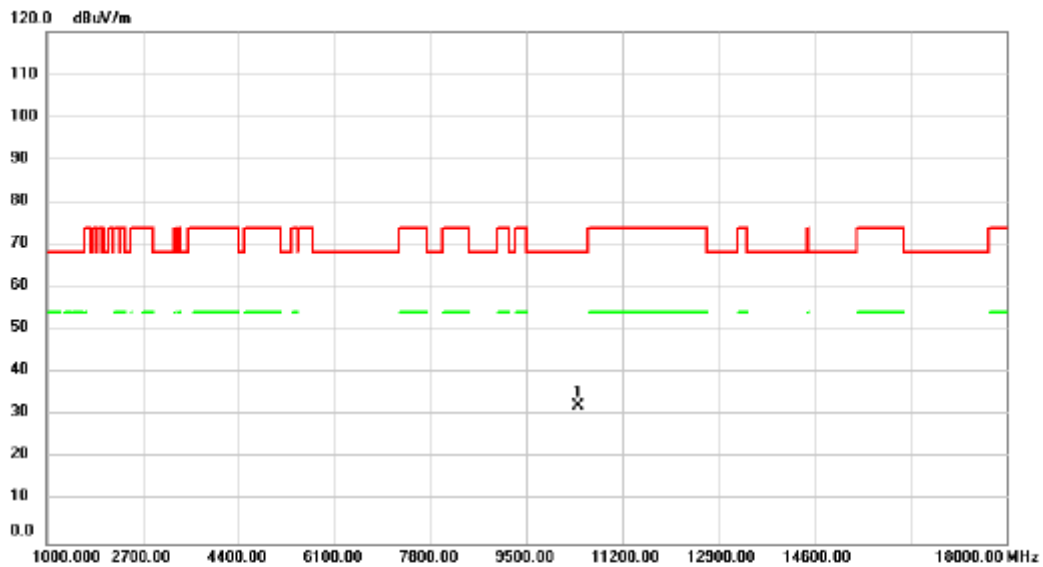


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10420.00	32.80	-0.54	32.26	68.20	-35.94	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE80)	Test Date	2024/9/10
Test Frequency	5210MHz	Polarization	Horizontal

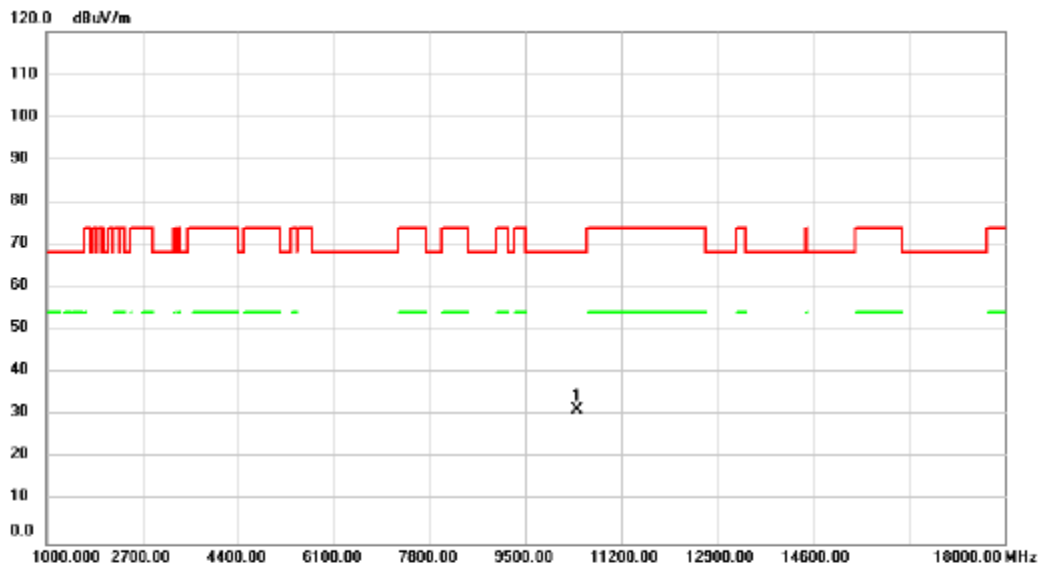


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10420.00	31.93	-0.54	31.39	68.20	-36.81	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE80)	Test Date	2024/9/26
Test Frequency	5290MHz	Polarization	Vertical

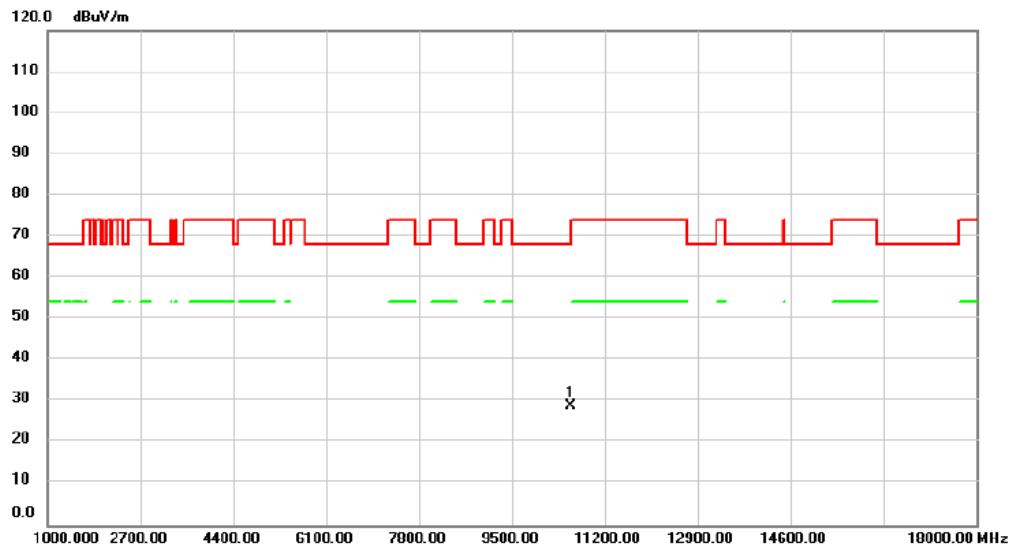


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10580.00	29.51	-0.42	29.09	68.20	-39.11	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE80)	Test Date	2024/9/26
Test Frequency	5290MHz	Polarization	Horizontal

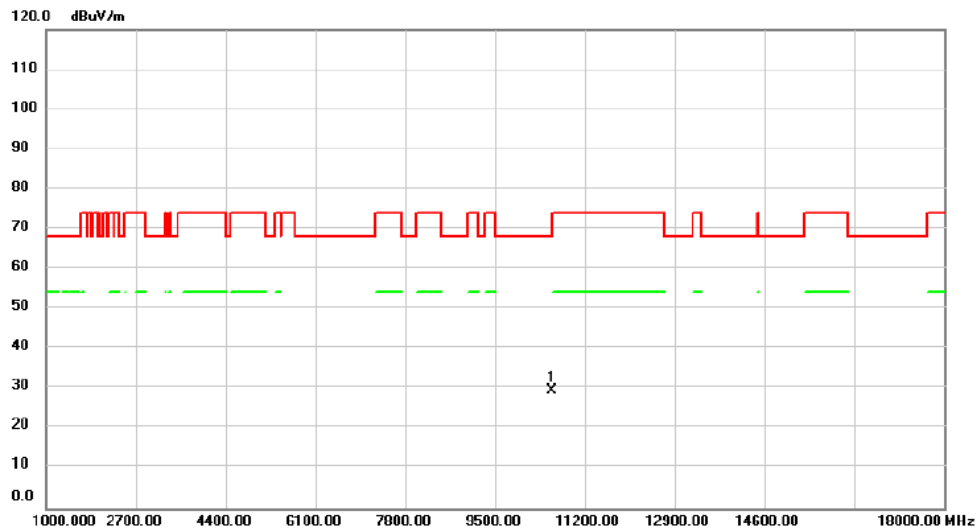


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10580.00	29.88	-0.42	29.46	68.20	-38.74	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE80)	Test Date	2024/9/26
Test Frequency	5530MHz	Polarization	Vertical

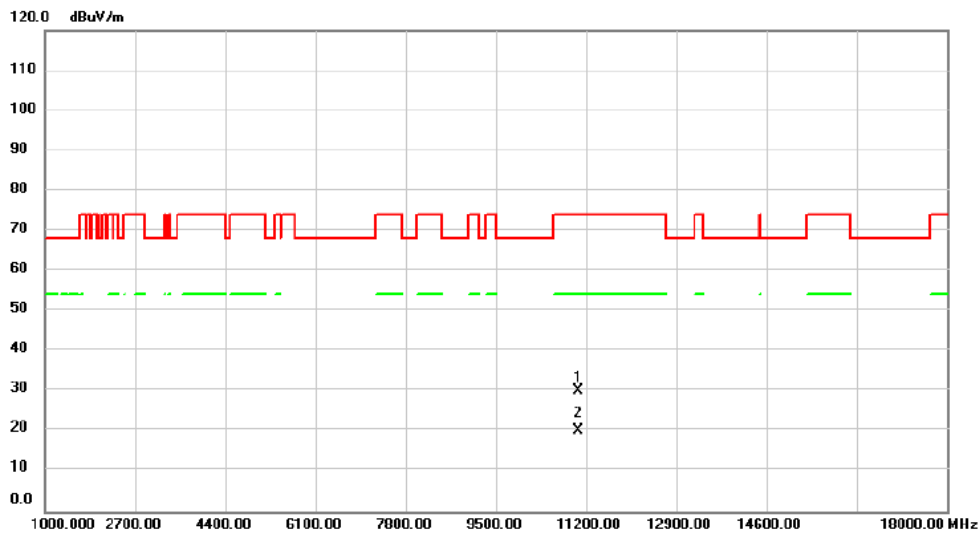


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11060.00	30.19	-0.13	30.06	74.00	-43.94	peak	
2	*	11060.00	20.47	-0.13	20.34	54.00	-33.66	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE80)	Test Date	2024/9/26
Test Frequency	5530MHz	Polarization	Horizontal

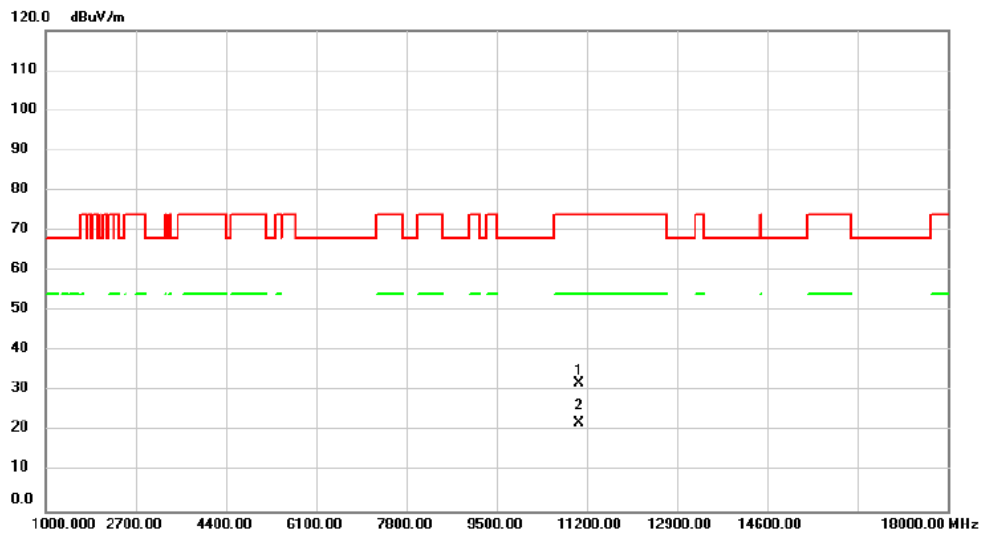


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11060.00	31.99	-0.13	31.86	74.00	-42.14	peak	
2	*	11060.00	22.32	-0.13	22.19	54.00	-31.81	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE80)	Test Date	2024/9/26
Test Frequency	5610MHz	Polarization	Vertical

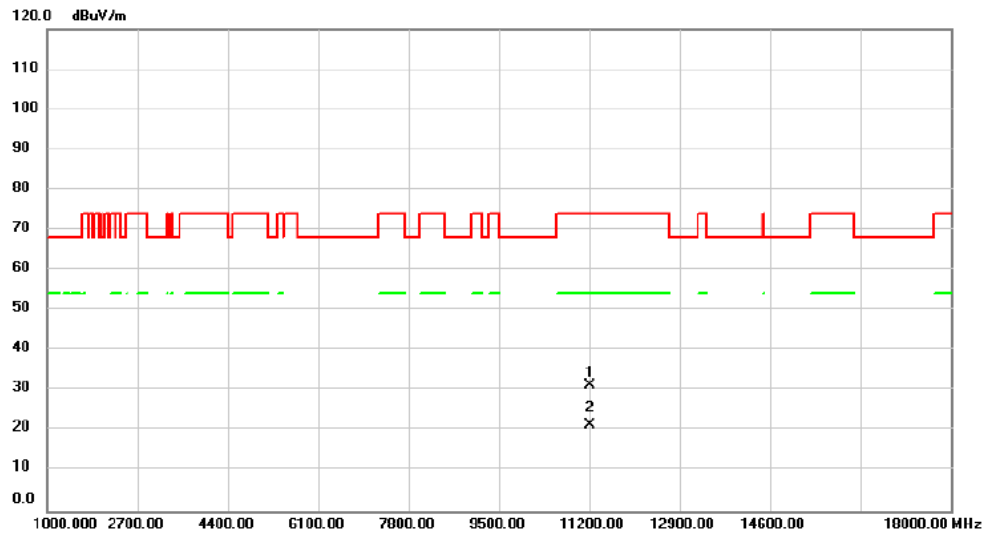


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11220.00	31.18	0.22	31.40	74.00	-42.60	peak	
2 *	11220.00	21.32	0.22	21.54	54.00	-32.46	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE80)	Test Date	2024/9/26
Test Frequency	5610MHz	Polarization	Horizontal

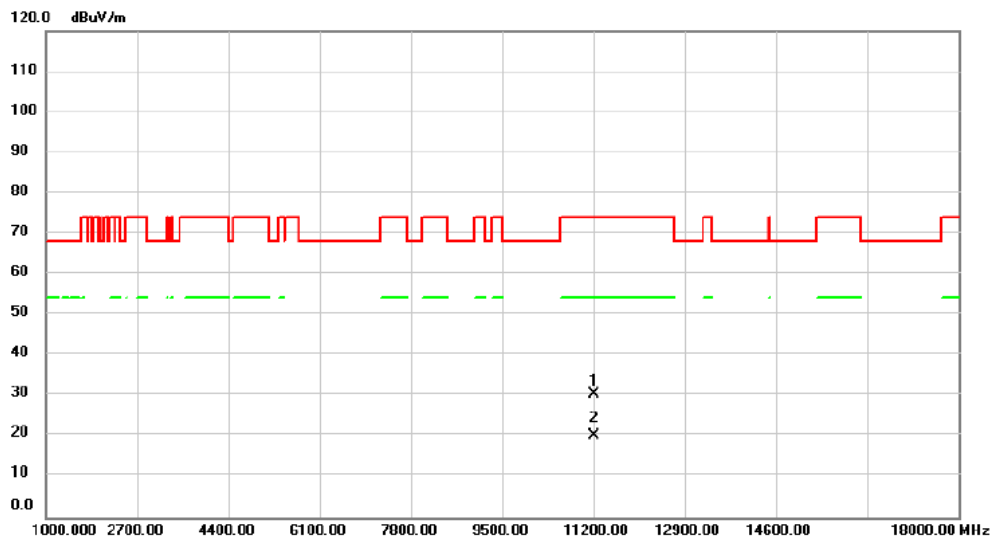


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11220.00	30.25	0.22	30.47	74.00	-43.53	peak	
2	*	11220.00	20.15	0.22	20.37	54.00	-33.63	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE80)	Test Date	2024/9/10
Test Frequency	5775MHz	Polarization	Vertical

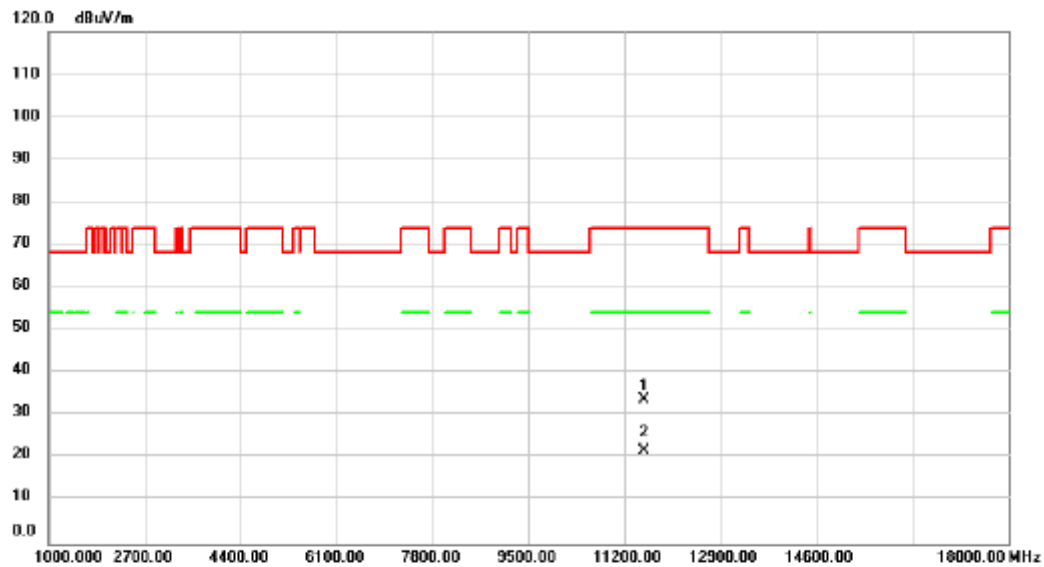


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11550.00	32.88	0.84	33.72	74.00	-40.28	peak	
2	*	11550.00	21.03	0.84	21.87	54.00	-32.13	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE80)	Test Date	2024/9/10
Test Frequency	5775MHz	Polarization	Horizontal

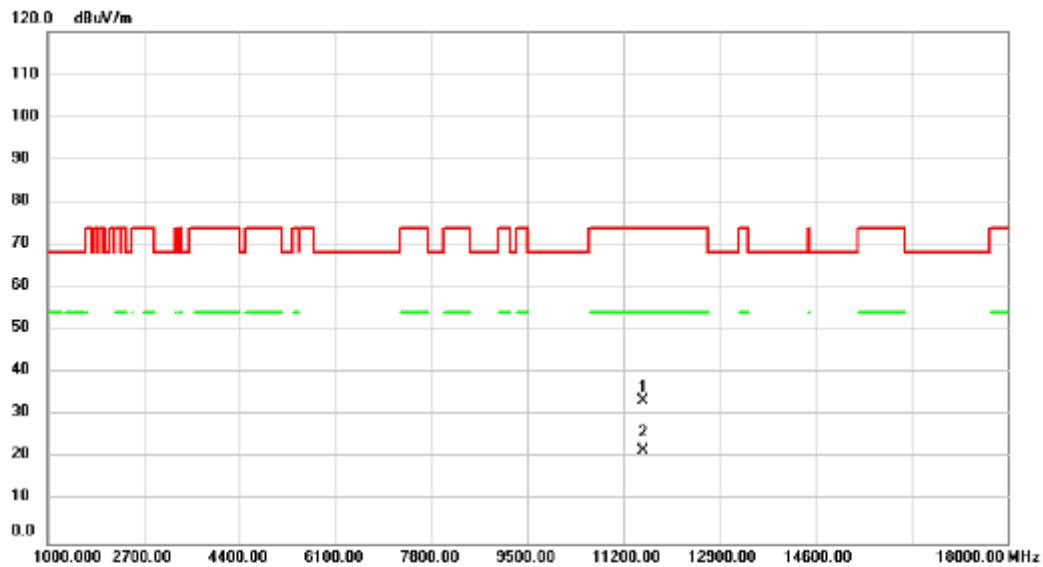


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11550.00	32.60	0.84	33.44	74.00	-40.56	peak	
2	*	11550.00	21.03	0.84	21.87	54.00	-32.13	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE160)	Test Date	2024/9/10
Test Frequency	5250MHz	Polarization	Vertical

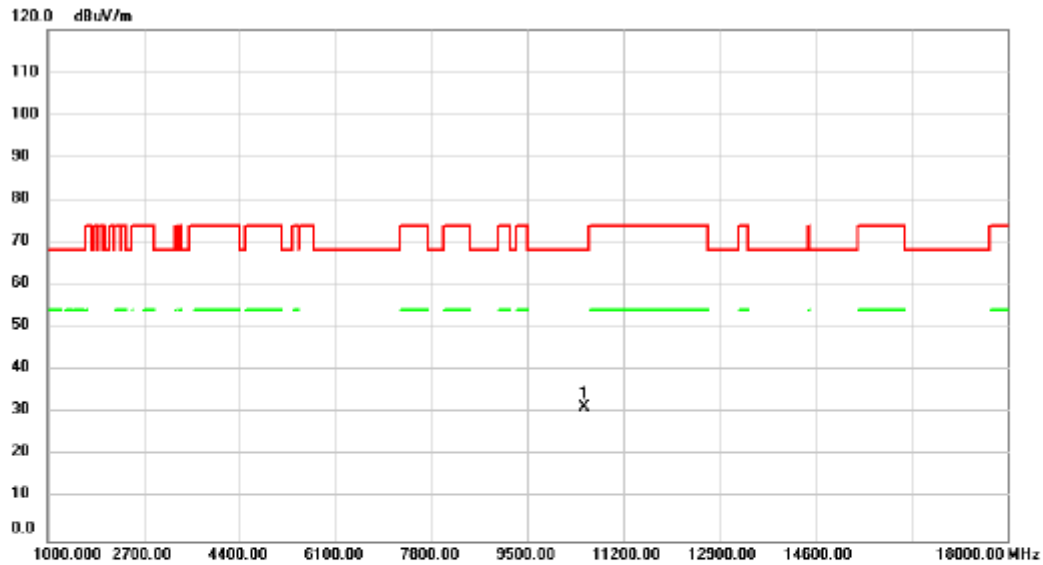


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10500.00	31.67	-0.45	31.22	68.20	-36.98	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE160)	Test Date	2024/9/10
Test Frequency	5250MHz	Polarization	Horizontal

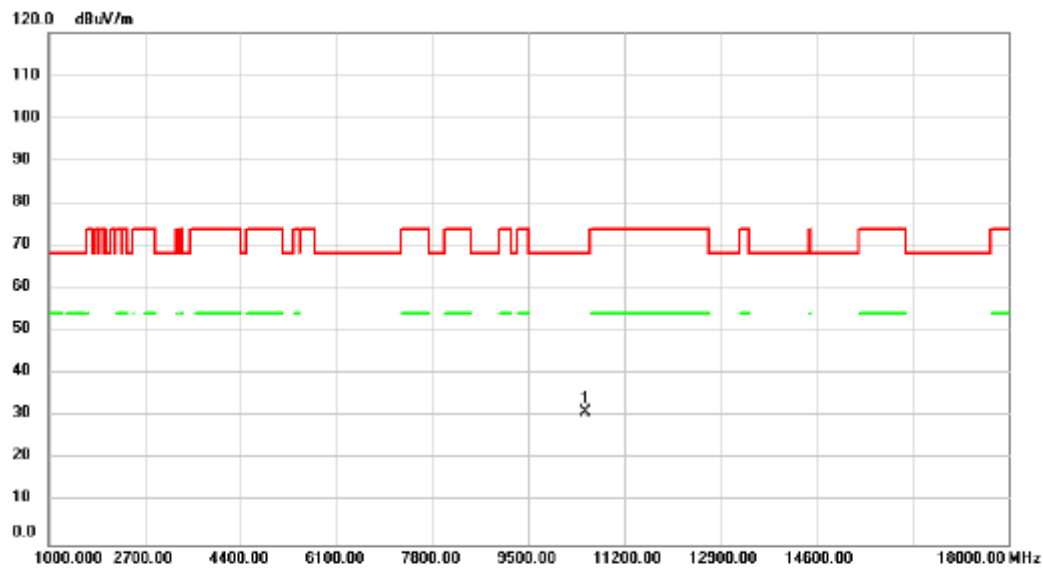


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10500.00	31.52	-0.45	31.07	68.20	-37.13	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE160)	Test Date	2025/1/20
Test Frequency	5570MHz	Polarization	Vertical

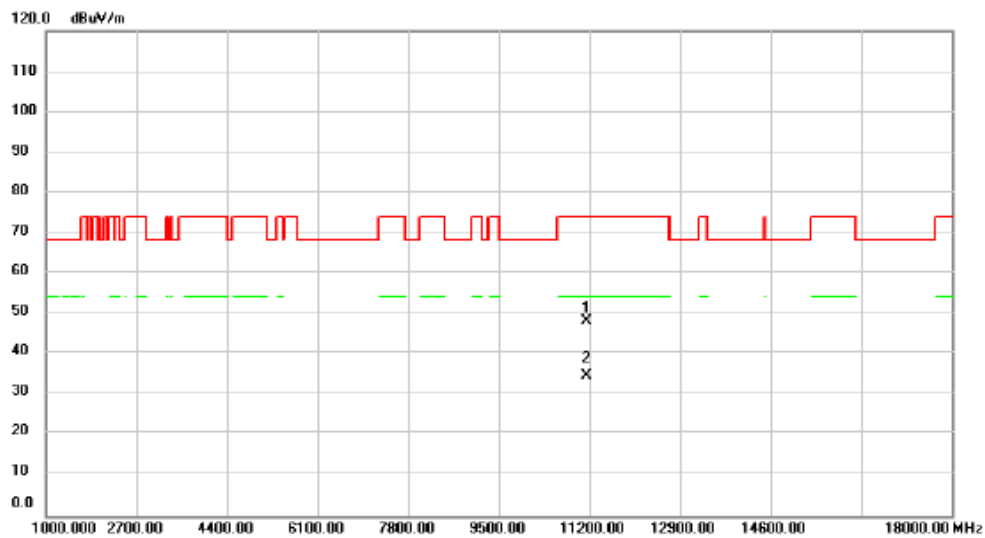


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11140.00	43.16	4.98	48.14	74.00	-25.86	peak	
2	*	11140.00	29.67	4.98	34.65	54.00	-19.35	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE160)	Test Date	2025/1/20
Test Frequency	5570MHz	Polarization	Horizontal

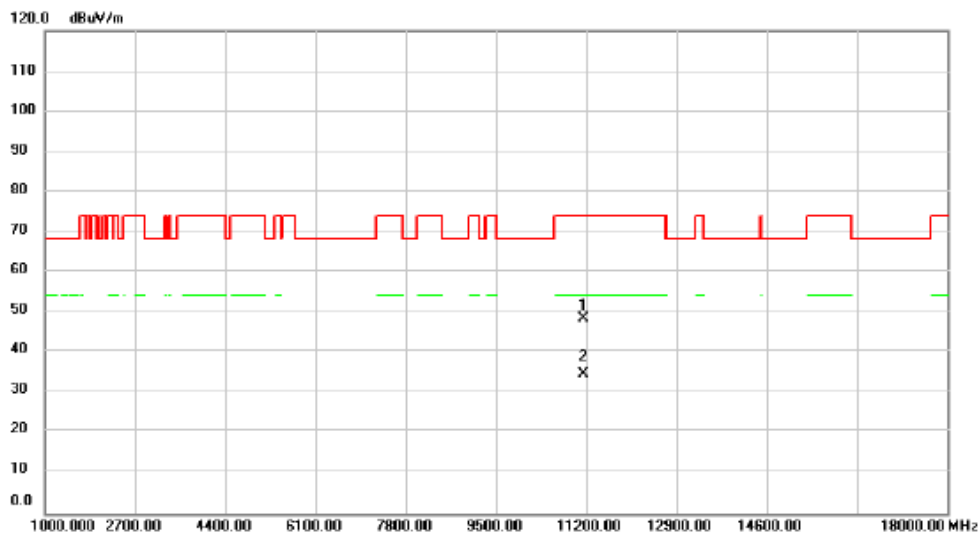


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11140.00	43.35	4.98	48.33	74.00	-25.67	peak	
2	*	11140.00	29.61	4.98	34.59	54.00	-19.41	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT20)	Test Date	2024/9/25
Test Frequency	5785MHz	Polarization	Vertical

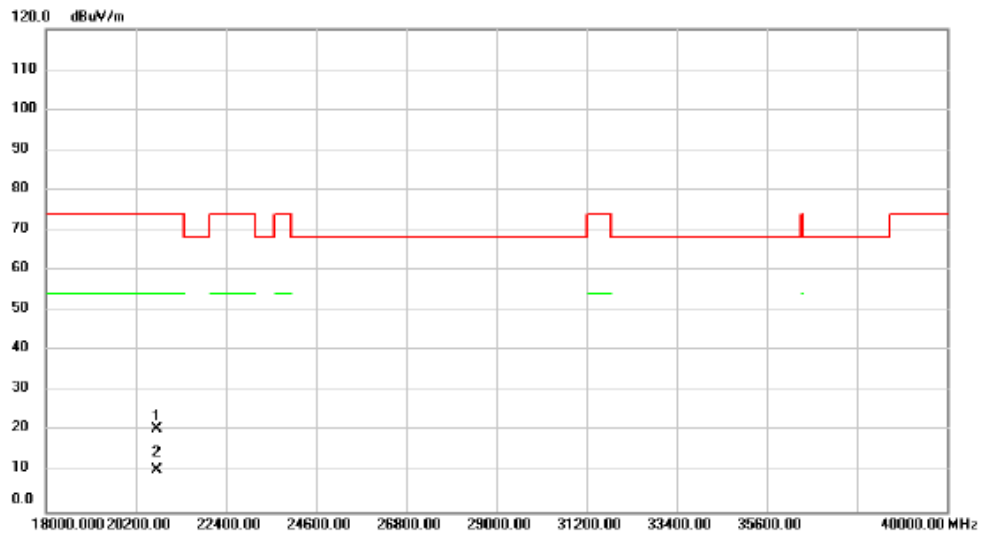


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		20720.00	30.48	-9.85	20.63	74.00	-53.37	peak	
2	*	20720.00	20.24	-9.85	10.39	54.00	-43.61	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT20)	Test Date	2024/9/25
Test Frequency	5785MHz	Polarization	Horizontal

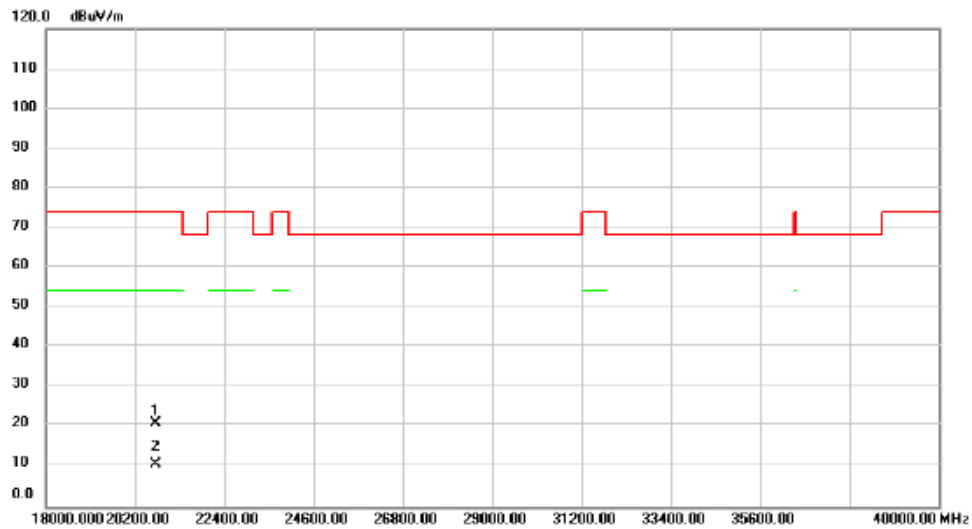


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		20720.00	30.63	-9.85	20.78	74.00	-53.22	peak	
2	*	20720.00	20.60	-9.85	10.75	54.00	-43.25	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

For WR3000E:

Test Mode	IEEE 802.11ax(HE20)	Test Date	2025/1/15
Test Frequency	5260MHz	Polarization	Vertical

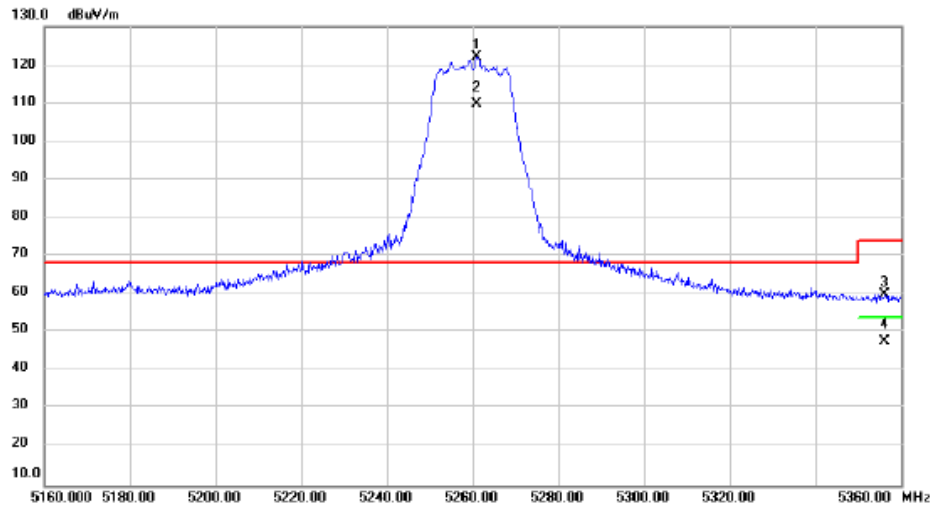


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1	*	5261.000	109.73	12.42	122.15	68.20	53.95	peak		No Limit
2	X	5261.000	97.34	12.42	109.76	68.20	41.56	AVG		No Limit
3		5356.200	47.52	12.50	60.02	74.00	-13.98	peak		
4		5356.200	35.29	12.50	47.79	54.00	-6.21	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2025/1/15
Test Frequency	5320MHz	Polarization	Vertical

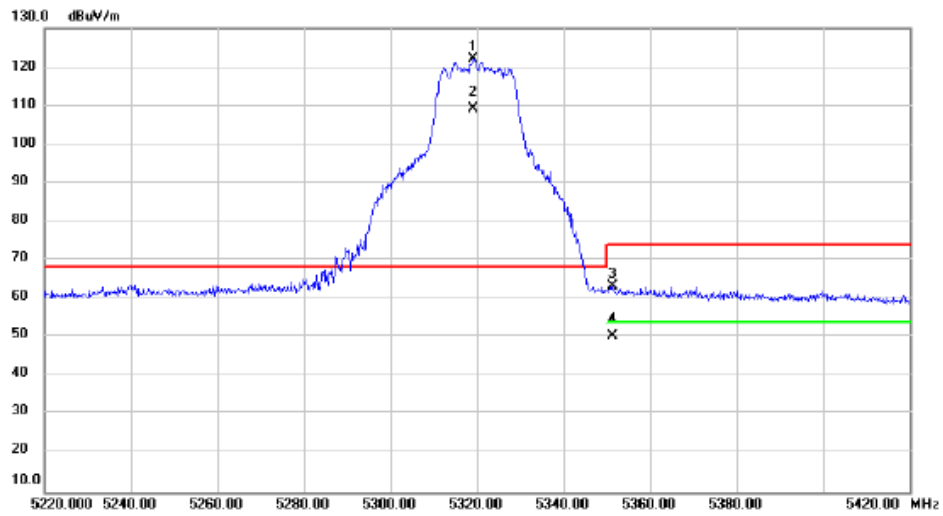


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	5319.200	109.55	12.47	122.02	68.20	53.82	peak		No Limit
2	X	5319.200	96.75	12.47	109.22	68.20	41.02	AVG		No Limit
3		5351.400	50.72	12.50	63.22	74.00	-10.78	peak		
4		5351.400	38.00	12.50	50.50	54.00	-3.50	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2025/1/15
Test Frequency	5190MHz	Polarization	Vertical

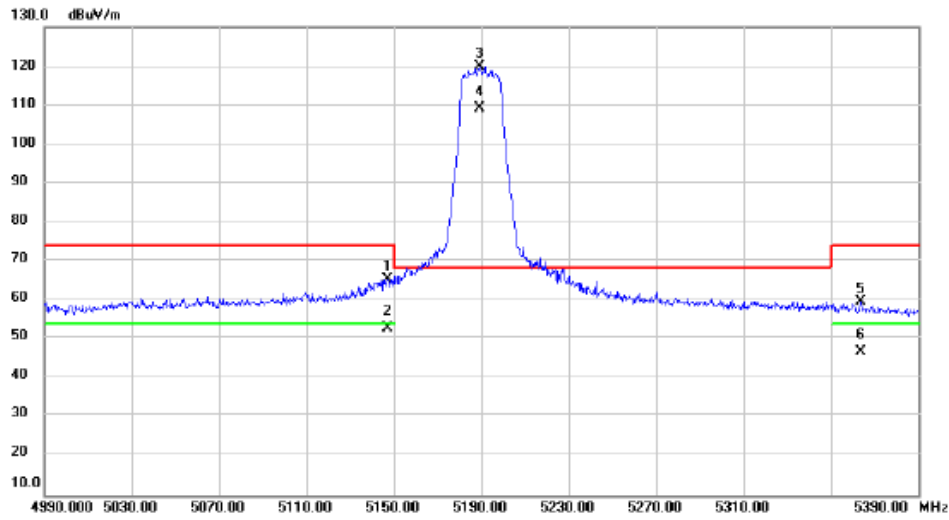


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		5146.800	53.09	12.31	65.40	74.00	-8.60	peak			
2		5146.800	40.49	12.31	52.80	54.00	-1.20	AVG			
3	*	5189.200	107.72	12.35	120.07	68.20	51.87	peak			No Limit
4	X	5189.200	96.67	12.35	109.02	68.20	40.82	AVG			No Limit
5		5363.600	47.05	12.51	59.56	74.00	-14.44	peak			
6		5363.600	34.39	12.51	46.90	54.00	-7.10	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2025/1/15
Test Frequency	5230MHz	Polarization	Vertical

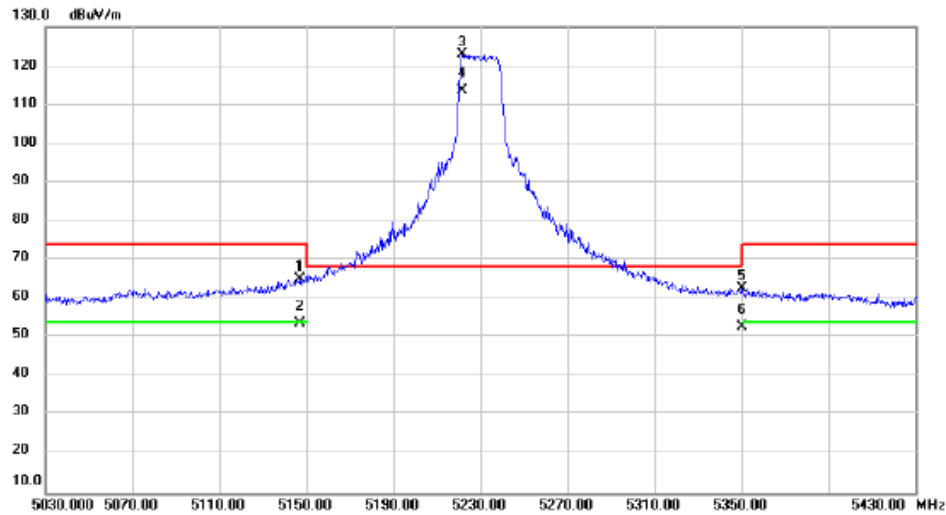


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		5146.800	52.70	12.31	65.01	74.00	-8.99	peak			
2		5146.800	41.24	12.31	53.55	54.00	-0.45	AVG			
3	*	5221.600	110.46	12.38	122.84	68.20	54.64	peak			No Limit
4	X	5221.600	101.15	12.38	113.53	68.20	45.33	AVG			No Limit
5		5350.000	50.07	12.50	62.57	74.00	-11.43	peak			
6		5350.000	40.25	12.50	52.75	54.00	-1.25	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE80)	Test Date	2025/1/15
Test Frequency	5530MHz	Polarization	Vertical

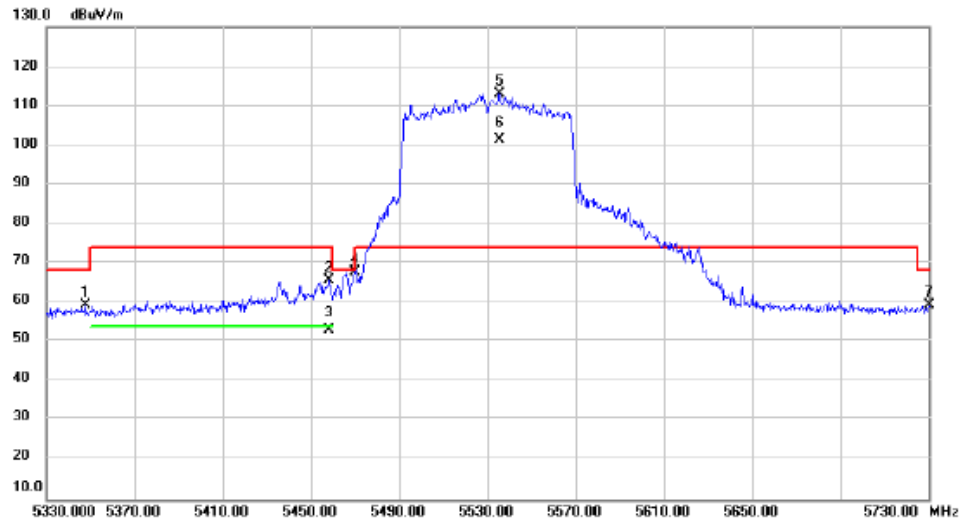


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	5347.600	46.95	12.50	59.45	68.20	-8.75	peak		
2	5458.400	53.18	12.59	65.77	74.00	-8.23	peak		
3	5458.400	40.55	12.59	53.14	54.00	-0.86	AVG		
4	5470.000	55.12	12.60	67.72	68.20	-0.48	peak		
5 *	5535.600	100.49	12.69	113.18	74.00	39.18	peak		No Limit
6 X	5535.600	88.72	12.69	101.41	74.00	27.41	AVG		No Limit
7	5730.000	46.14	13.06	59.20	68.20	-9.00	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE80)	Test Date	2025/1/15
Test Frequency	5610MHz	Polarization	Vertical

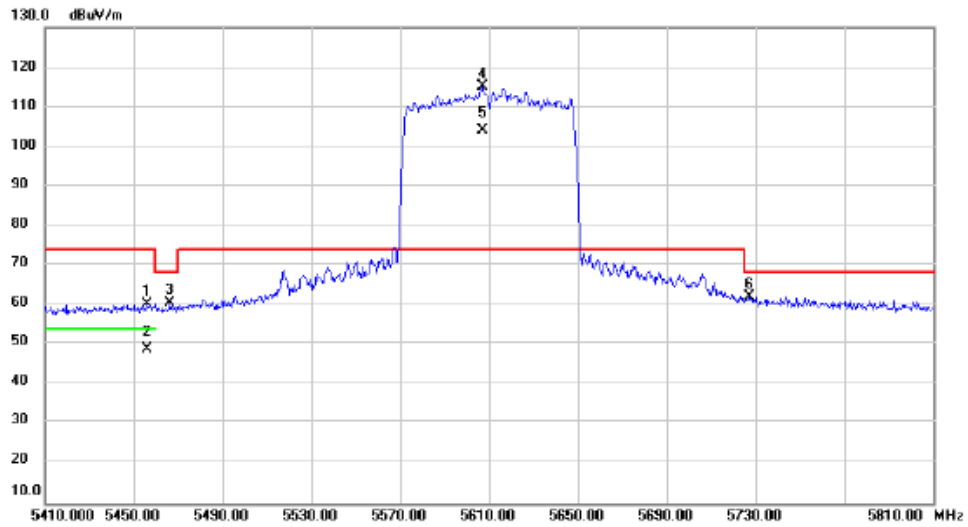


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5456.000	47.64	12.58	60.22	74.00	-13.78	peak		
2		5456.000	36.39	12.58	48.97	54.00	-5.03	AVG		
3		5466.400	48.00	12.60	60.60	68.20	-7.60	peak		
4	*	5606.800	102.46	12.83	115.29	74.00	41.29	peak		No Limit
5	X	5606.800	91.22	12.83	104.05	74.00	30.05	AVG		No Limit
6		5726.800	49.12	13.05	62.17	68.20	-6.03	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE80)	Test Date	2025/1/15
Test Frequency	5775MHz	Polarization	Vertical

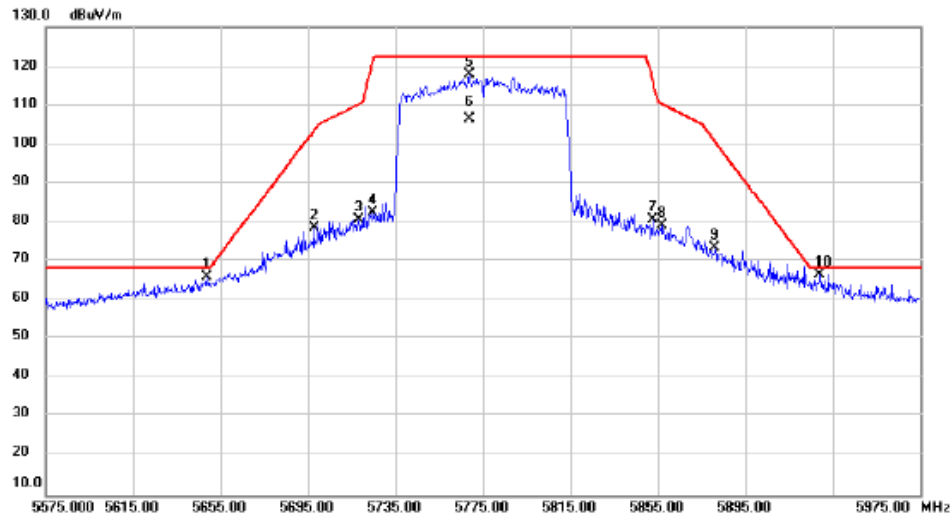


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		5648.600	53.12	12.91	66.03	68.20	-2.17	peak			
2		5697.800	65.48	13.00	78.48	103.58	-25.10	peak			
3		5718.200	67.64	13.03	80.67	110.30	-29.63	peak			
4		5724.600	69.33	13.05	82.38	121.29	-38.91	peak			
5		5769.000	104.64	13.14	117.78	122.20	-4.42	peak			No Limit
6		5769.000	93.26	13.14	106.40	122.20	-15.80	AVG			No Limit
7		5852.600	67.33	13.29	80.62	116.27	-35.65	peak			
8		5856.600	65.92	13.31	79.23	110.35	-31.12	peak			
9		5881.000	60.00	13.35	73.35	100.74	-27.39	peak			
10	*	5929.000	53.20	13.43	66.63	68.20	-1.57	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2025/1/15
Test Frequency	5260MHz	Polarization	Vertical

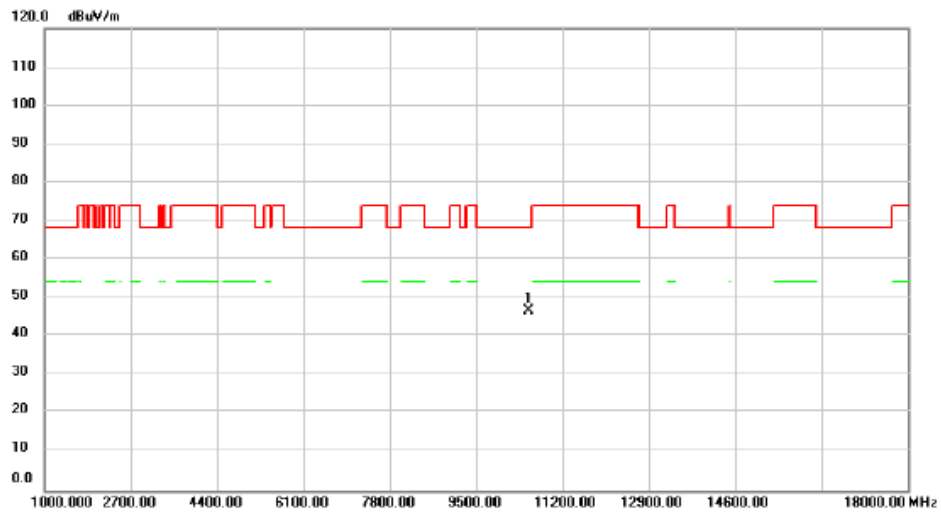


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10520.00	41.62	4.90	46.52	68.20	-21.68	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2025/1/15
Test Frequency	5260MHz	Polarization	Horizontal

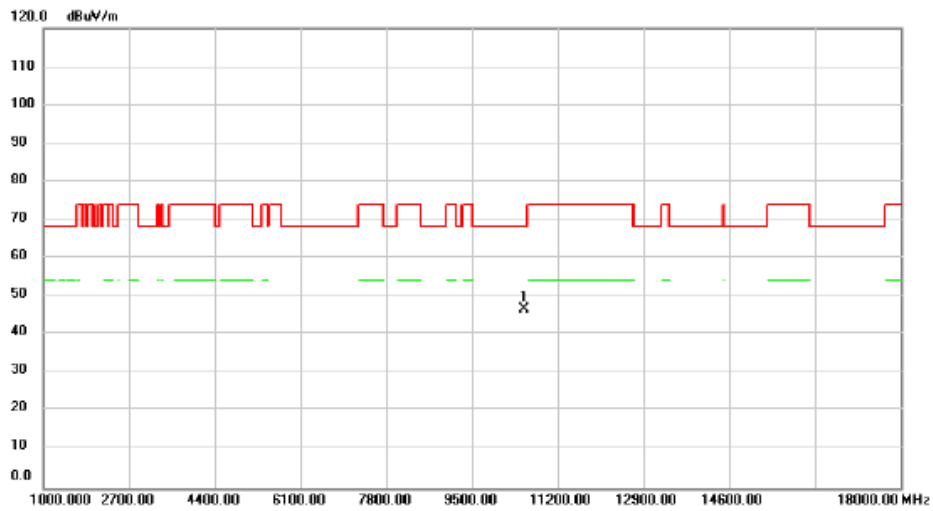


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10520.00	41.67	4.90	46.57	68.20	-21.63	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2025/1/15
Test Frequency	5300MHz	Polarization	Vertical

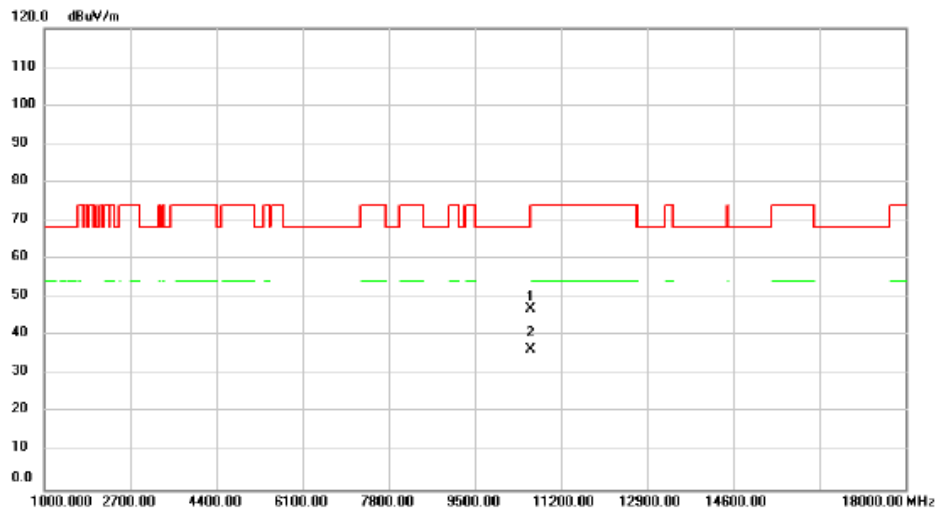


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	
1		10600.00	42.18	4.89	47.07	68.20	-21.13	peak		
2	*	10600.00	31.54	4.89	36.43	54.00	-17.57	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2025/1/15
Test Frequency	5300MHz	Polarization	Horizontal

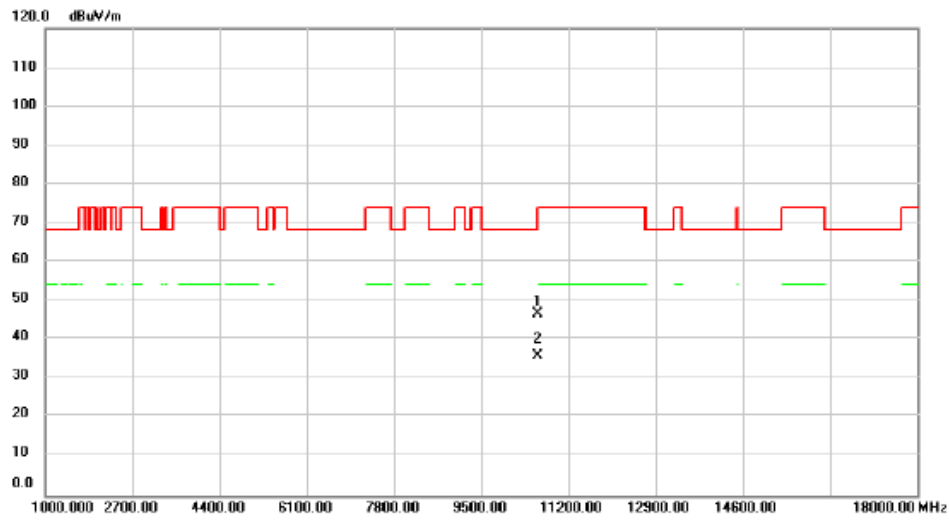


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		10600.00	41.87	4.89	46.76	68.20	-21.44	peak		
2	*	10600.00	31.01	4.89	35.90	54.00	-18.10	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2025/1/15
Test Frequency	5320MHz	Polarization	Vertical

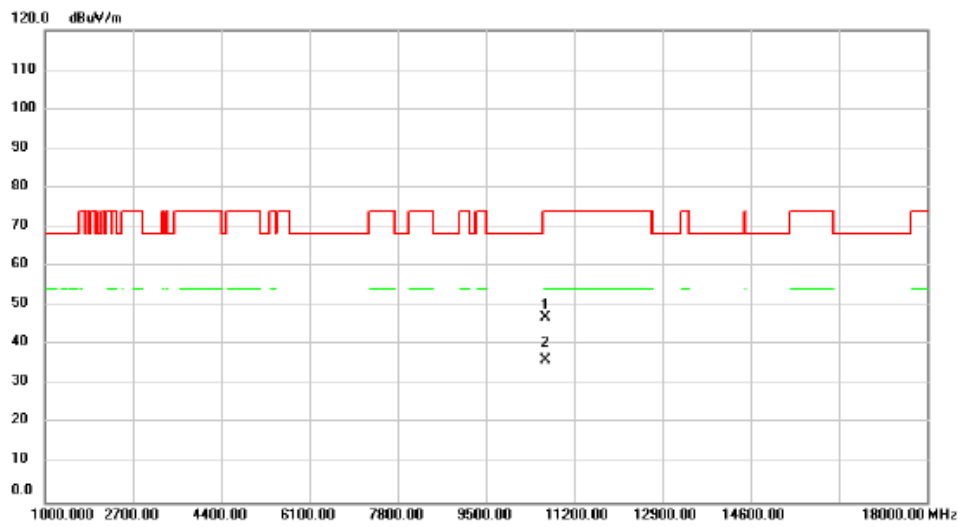


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		10640.00	42.17	4.88	47.05	74.00	-26.95	peak		
2	*	10640.00	31.26	4.88	36.14	54.00	-17.86	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2025/1/15
Test Frequency	5320MHz	Polarization	Horizontal

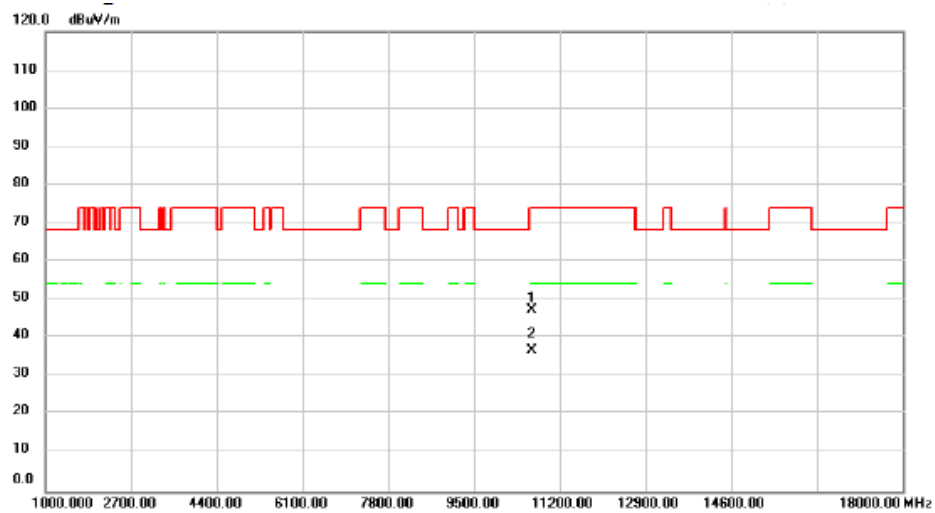


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	dBuV	dB	ment			Height	Degree	Comment
					dBuV/m	dBuV/m	dB	cm	degree	
1		10640.00	42.24	4.88	47.12	74.00	-26.88	peak		
2	*	10640.00	31.85	4.88	36.73	54.00	-17.27	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2025/1/15
Test Frequency	5190MHz	Polarization	Vertical

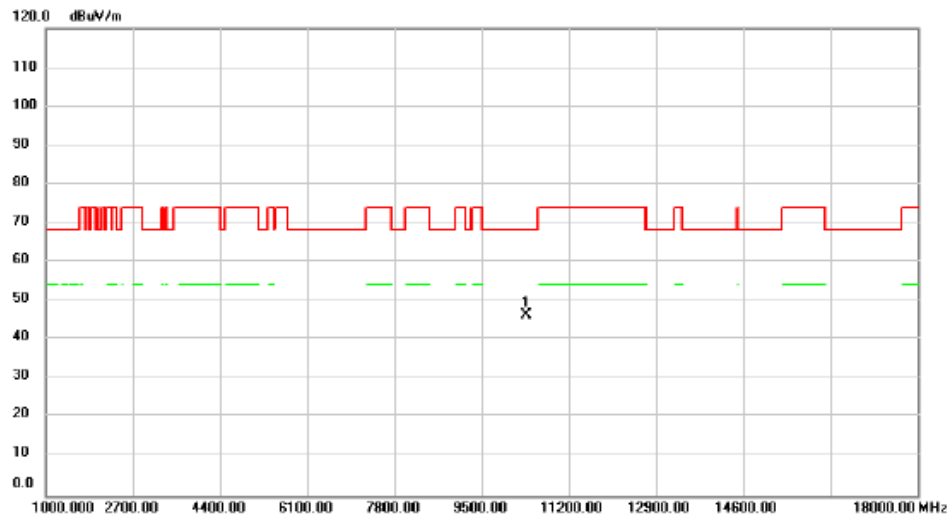


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10380.00	41.35	4.96	46.31	68.20	-21.89	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2025/1/15
Test Frequency	5190MHz	Polarization	Horizontal

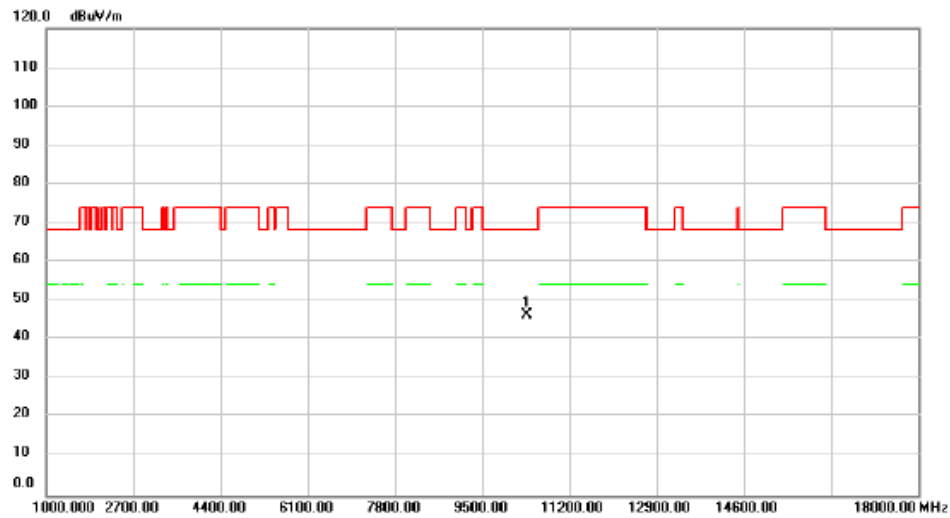


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	10380.00	41.54	4.96	46.50	68.20	-21.70	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2025/1/15
Test Frequency	5230MHz	Polarization	Vertical

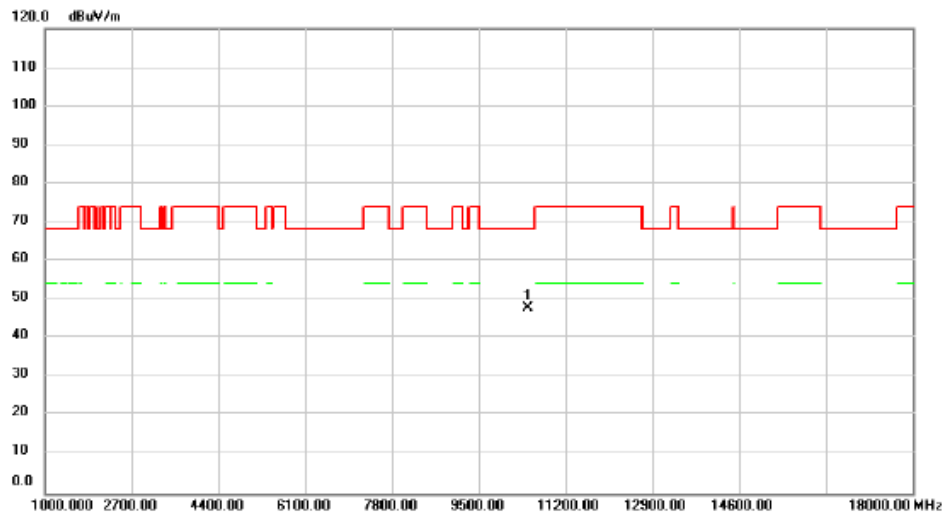


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1 *	10460.00	42.79	4.92	47.71	68.20	-20.49	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2025/1/15
Test Frequency	5230MHz	Polarization	Horizontal

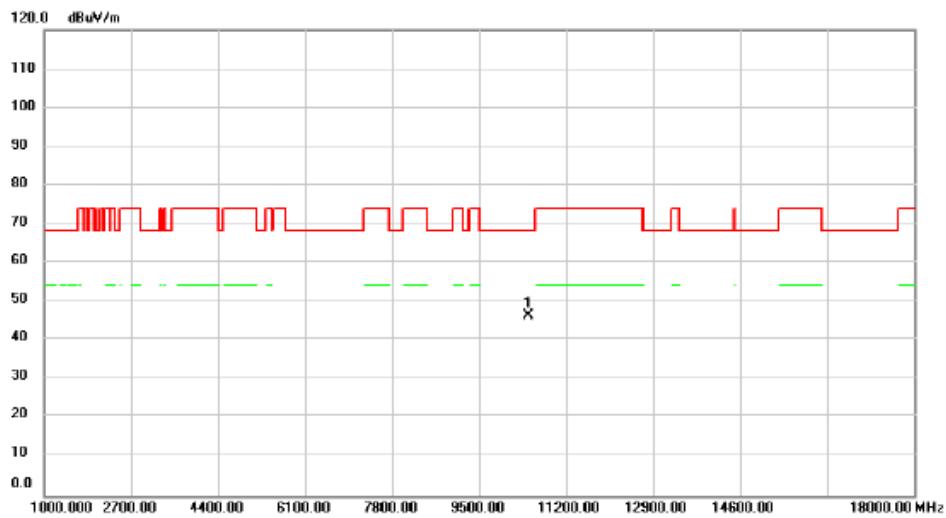


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10460.00	41.33	4.92	46.25	68.20	-21.95	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE80)	Test Date	2025/1/15
Test Frequency	5530MHz	Polarization	Vertical

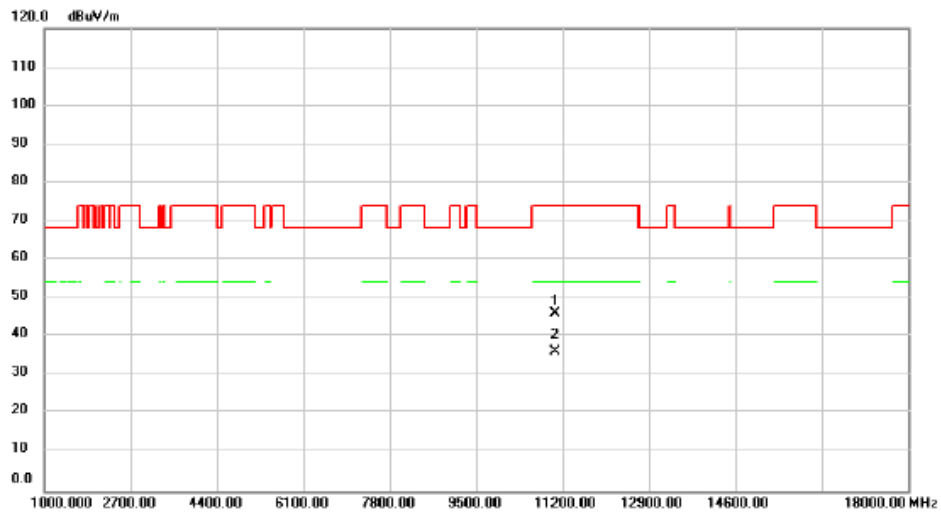


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		11060.00	41.17	4.91	46.08	74.00	-27.92	peak		
2	*	11060.00	31.25	4.91	36.16	54.00	-17.84	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE80)	Test Date	2025/1/15
Test Frequency	5530MHz	Polarization	Horizontal

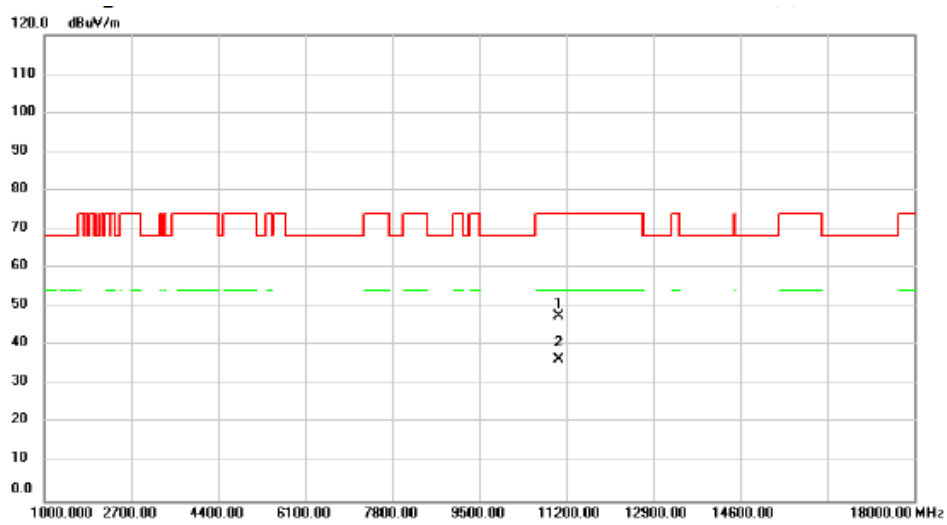


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		11060.00	42.51	4.91	47.42	74.00	-26.58	peak		
2	*	11060.00	31.56	4.91	36.47	54.00	-17.53	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE80)	Test Date	2025/1/15
Test Frequency	5610MHz	Polarization	Vertical

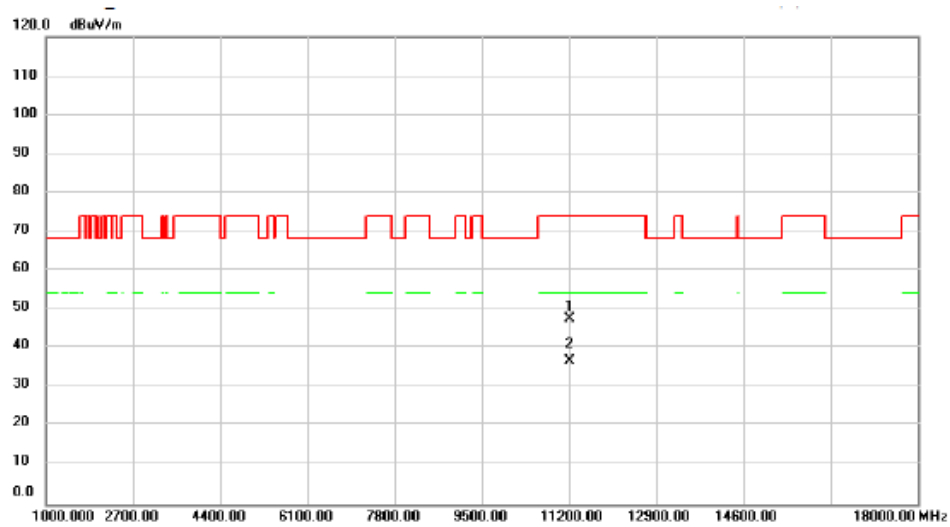


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11220.00	42.37	5.07	47.44	74.00	-26.56	peak		
2	*	11220.00	31.54	5.07	36.61	54.00	-17.39	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE80)	Test Date	2025/1/15
Test Frequency	5610MHz	Polarization	Horizontal

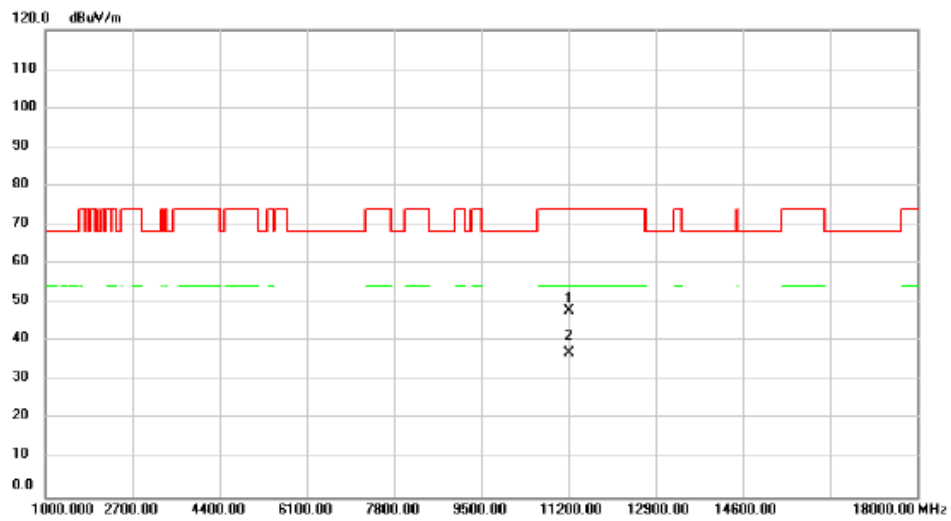


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11220.00	42.77	5.07	47.84	74.00	-26.16	peak		
2	*	11220.00	31.84	5.07	36.91	54.00	-17.09	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE80)	Test Date	2025/1/15
Test Frequency	5775MHz	Polarization	Vertical

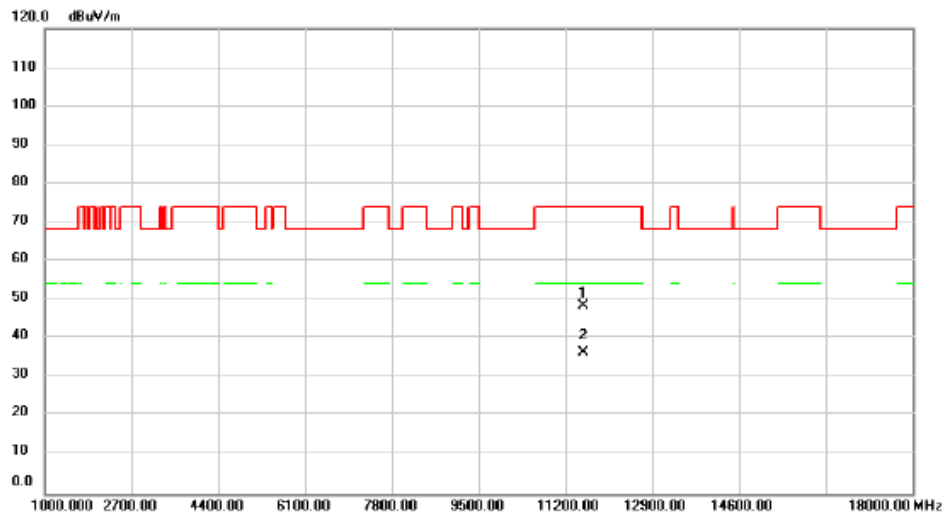


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1		11550.00	43.04	5.32	48.36	74.00	-25.64	peak		
2	*	11550.00	31.26	5.32	36.58	54.00	-17.42	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE80)	Test Date	2025/1/15
Test Frequency	5775MHz	Polarization	Horizontal

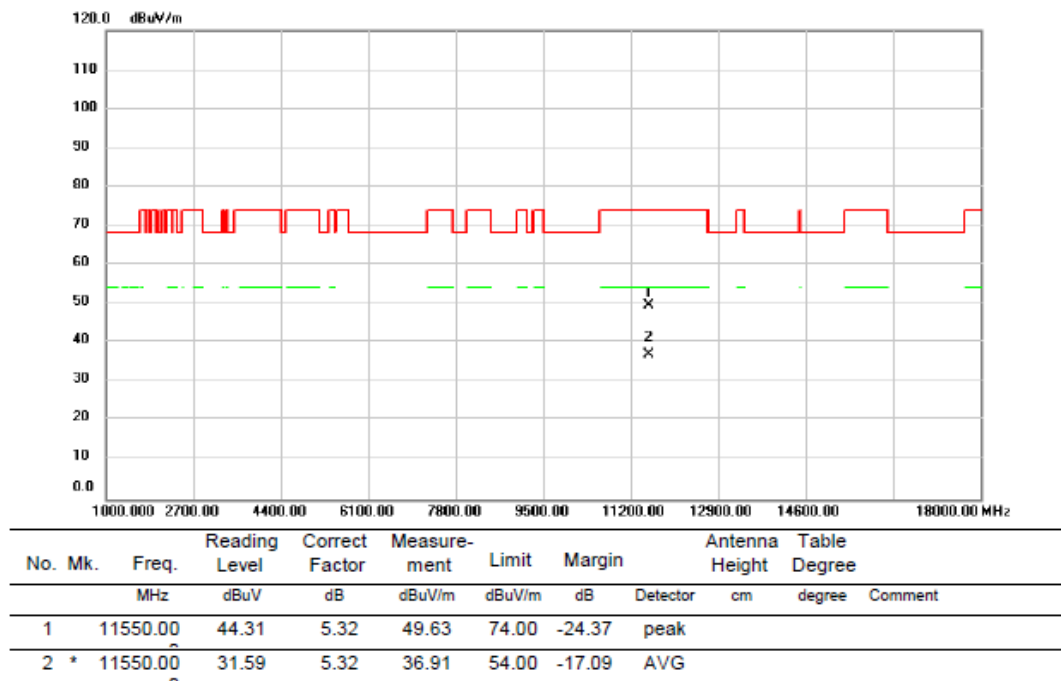

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX D BANDWIDTH

Test Mode	UNII-1_ IEEE 802.11a_Ant. 1
-----------	-----------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	31.150	17.100
40	5200	32.150	17.200
48	5240	29.900	16.900

CH36

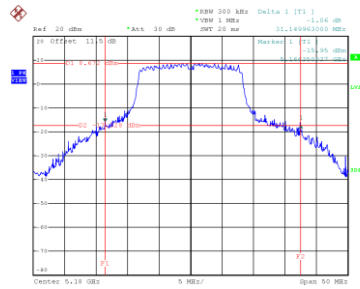


Date: 2.SEP.2024 11:41:17

CH40
26 dB Bandwidth




Date: 2.SEP.2024 11:38:49

CH48




Date: 2.SEP.2024 11:39:54


99 % Occupied Bandwidth

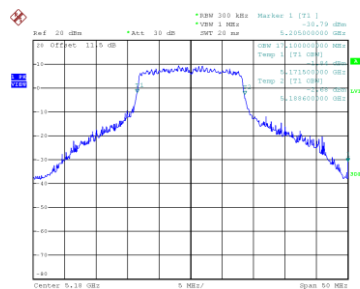

Date: 2.SEP.2024 11:40:55



Date: 2.SEP.2024 11:38:28




Date: 2.SEP.2024 11:39:33

Test Mode	UNII-1_ IEEE 802.11n(HT20)_Ant. 1
-----------	-----------------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	30.790	18.200
40	5200	32.289	18.300
48	5240	29.490	18.000

CH36




Date: 2.SEP.2024 11:48:18

CH40
26 dB Bandwidth

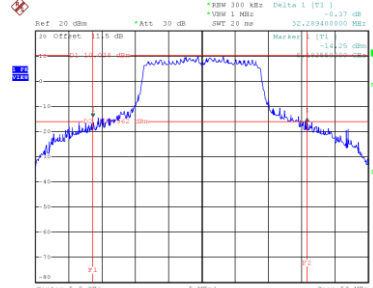


Date: 2.SEP.2024 11:49:40

CH48

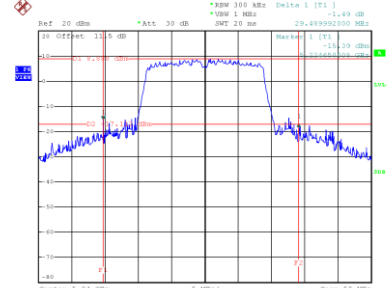


Date: 2.SEP.2024 11:51:34


99 % Occupied Bandwidth

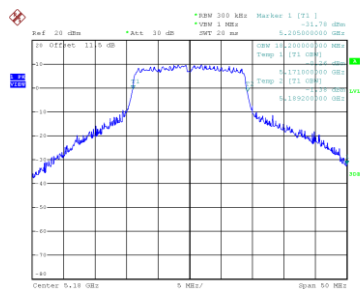

Date: 2.SEP.2024 11:47:53

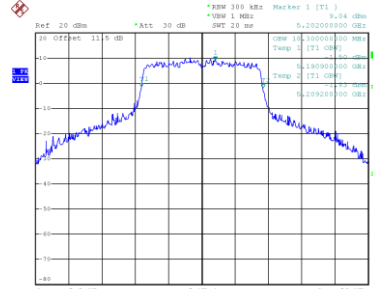

Date: 2.SEP.2024 11:49:18




Date: 2.SEP.2024 11:51:09

Test Mode	UNII-1_ IEEE 802.11n(HT40)_Ant. 1
-----------	-----------------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
38	5190	53.800	37.200
46	5230	40.300	36.800

CH38




Date: 2.SEP.2024 11:59:44

CH46
26 dB Bandwidth

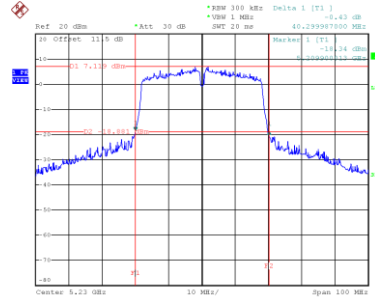


Date: 2.SEP.2024 12:01:59

99 % Occupied Bandwidth

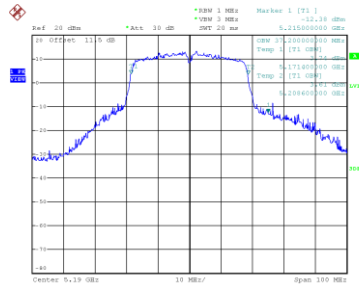

Date: 2.SEP.2024 11:59:15

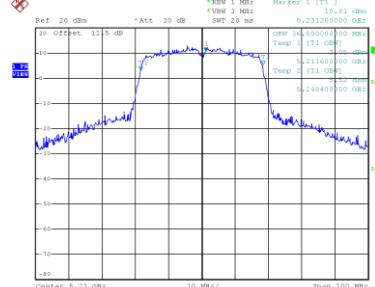


Date: 2.SEP.2024 12:01:23

Test Mode	UNII-1_ IEEE 802.11ac(VHT80)_Ant. 1
-----------	-------------------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
42	5210	109.800	76.000

CH42 26 dB Bandwidth

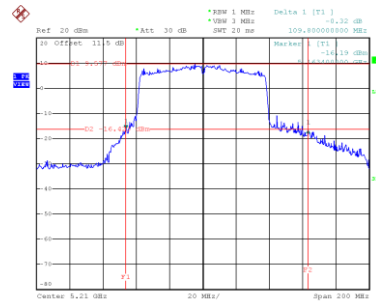

Date: 2.8.2024 12:41:31

99 % Occupied Bandwidth

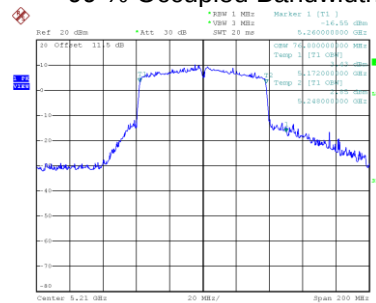


Date: 2.8.2024 12:40:58


Test Mode	UNII-1_ IEEE 802.11ax(HE20)_Ant. 1
-----------	------------------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	29.850	19.300
40	5200	32.050	19.400
48	5240	28.050	19.000

CH36




Date: 2.SEP.2024 12:49:43

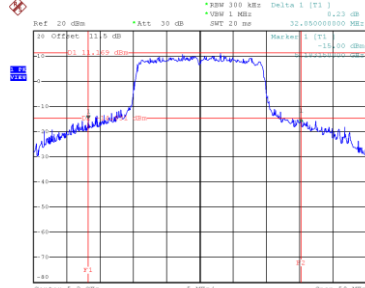CH40
26 dB Bandwidth



Date: 2.SEP.2024 12:50:54

CH48




Date: 2.SEP.2024 12:52:43


99 % Occupied Bandwidth



Date: 2.SEP.2024 12:49:20

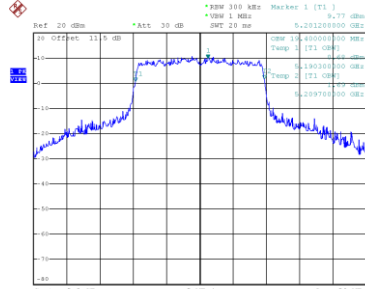

Date: 2.SEP.2024 12:50:35




Date: 2.SEP.2024 12:52:21

Test Mode	UNII-1_IEEE 802.11ax(HE40)_Ant. 1
-----------	-----------------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
38	5190	44.100	38.200
46	5230	39.400	38.000

CH38

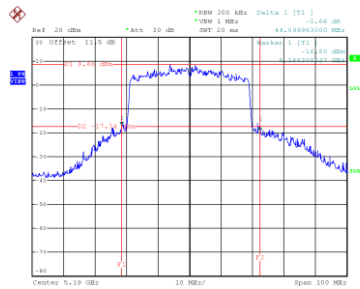


Date: 2.SEP.2024 13:03:30

CH46
26 dB Bandwidth




Date: 2.SEP.2024 13:07:50

99 % Occupied Bandwidth

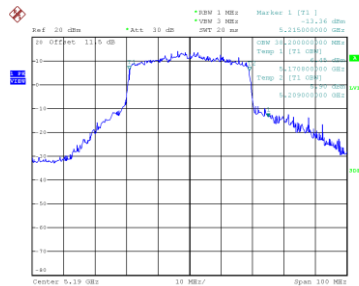

Date: 2.SEP.2024 13:02:46

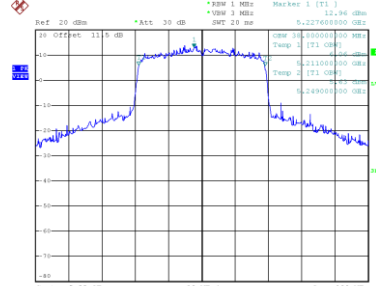


Date: 2.SEP.2024 13:07:12

Test Mode	UNII-1_ IEEE 802.11ax(HE80)_Ant. 1
-----------	------------------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
42	5210	96.600	77.600

CH42
26 dB Bandwidth

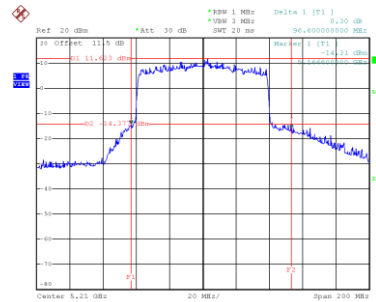

Date: 2.SEP.2024 13:12:45

99 % Occupied Bandwidth

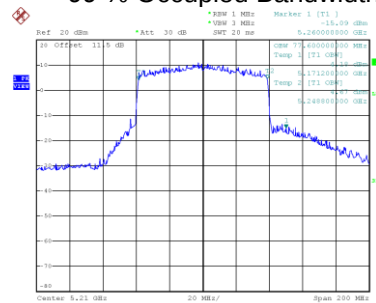


Date: 2.SEP.2024 13:12:10


Test Mode	UNII-2A_ IEEE 802.11a_Ant. 1
-----------	------------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	21.650	16.800
60	5300	31.850	17.300
64	5320	28.550	17.100

CH52

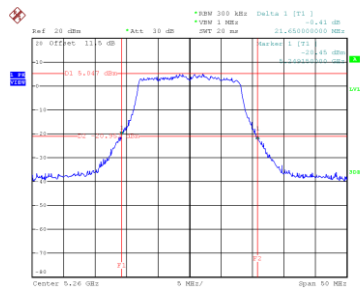


Date: 20.SEP.2024 10:51:58

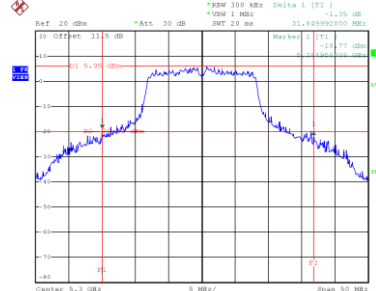CH60
26 dB Bandwidth


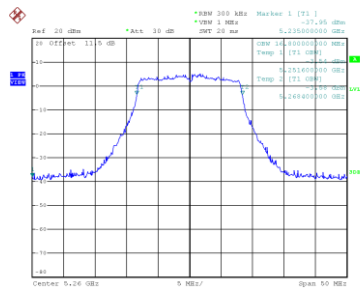
Date: 20.SEP.2024 10:53:20

CH64

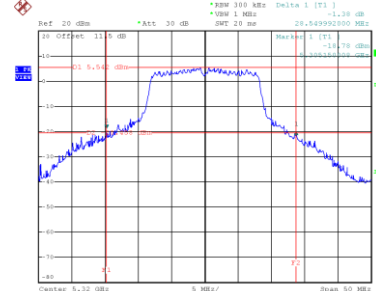


Date: 20.SEP.2024 10:54:36


99 % Occupied Bandwidth



Date: 20.SEP.2024 10:51:52



Date: 20.SEP.2024 10:53:00




Date: 20.SEP.2024 10:54:13


Test Mode	UNII-2A_ IEEE 802.11n(HT20)_Ant. 1
-----------	------------------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	21.890	17.800
60	5300	30.389	18.300
64	5320	29.350	18.200

CH52




Date: 20.SEP.2024 11:03:01

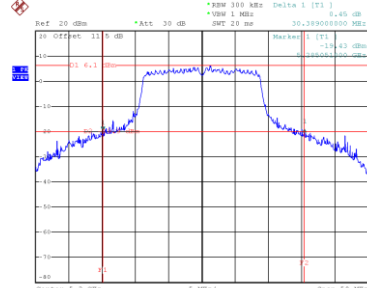CH60
26 dB Bandwidth


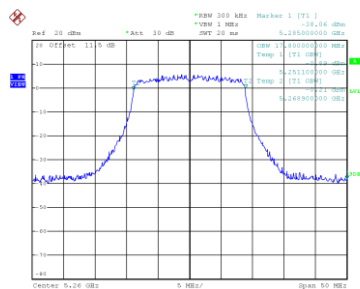
Date: 20.SEP.2024 11:04:11

CH64




Date: 20.SEP.2024 11:05:10


99 % Occupied Bandwidth



Date: 20.SEP.2024 11:02:35

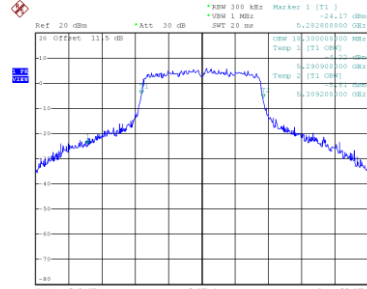

Date: 20.SEP.2024 11:03:47




Date: 20.SEP.2024 11:04:46


Test Mode	UNII-2A_ IEEE 802.11n(HT40)_Ant. 1
-----------	------------------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
54	5270	40.600	36.600
62	5310	46.298	37.200

CH54

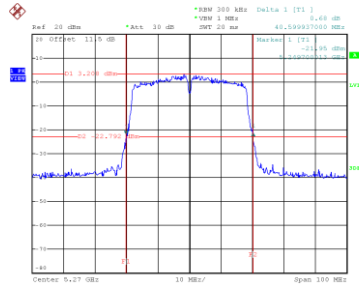


Date: 20,SEP,2024 11:13:47

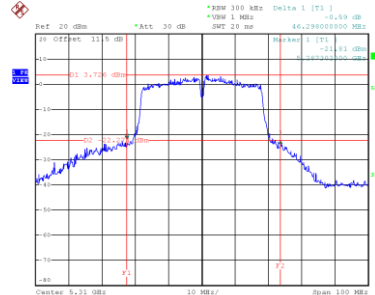
CH62
26 dB Bandwidth


Date: 20,SEP,2024 11:15:03

99 % Occupied Bandwidth



Date: 20,SEP,2024 11:13:10

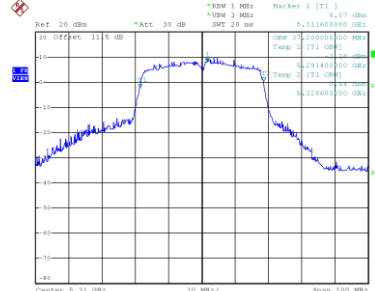


Date: 20,SEP,2024 11:14:30

Test Mode	UNII-2A_ IEEE 802.11ac(VHT80)_Ant. 1
-----------	--------------------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
58	5290	106.200	76.000

CH58 26 dB Bandwidth

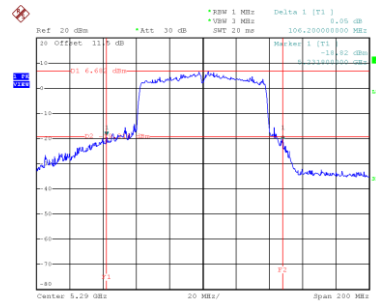

Date: 20-SEP-2024 11:48:32

99 % Occupied Bandwidth

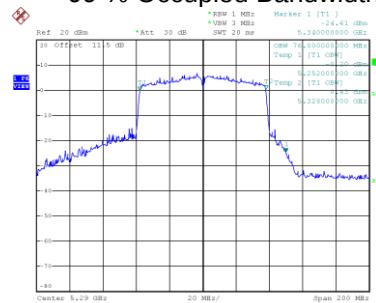


Date: 20-SEP-2024 11:48:03


Test Mode	UNII-2A_ IEEE 802.11ax(HE20)_Ant. 1
-----------	-------------------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	22.100	19.100
60	5300	29.298	19.300
64	5320	31.199	19.400

CH52

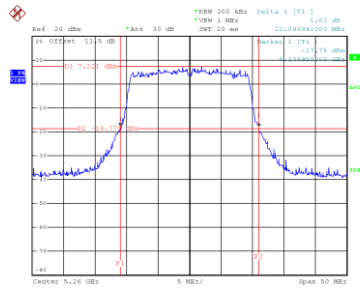


Date: 20.SEP.2024 12:07:30

CH60
26 dB Bandwidth


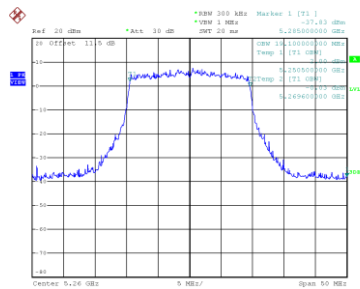
Date: 20.SEP.2024 12:08:50

CH64




Date: 20.SEP.2024 12:09:54


99 % Occupied Bandwidth



Date: 20.SEP.2024 12:07:04



Date: 20.SEP.2024 12:08:20




Date: 20.SEP.2024 12:09:29


Test Mode	UNII-2A_ IEEE 802.11ax(HE40)_Ant. 1
-----------	-------------------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
54	5270	39.608	38.000
62	5310	44.590	38.200

CH54




Date: 20,SEP,2024 12:25:55


CH62
26 dB Bandwidth


Date: 20,SEP,2024 12:27:22

99 % Occupied Bandwidth



Date: 20,SEP,2024 12:25:18

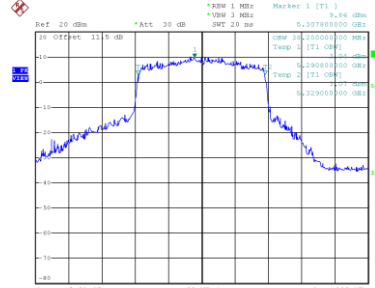


Date: 20,SEP,2024 12:26:41

Test Mode	UNII-2A_ IEEE 802.11ax(HE80)_Ant. 1
-----------	-------------------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
58	5290	88.790	77.600

CH58 26 dB Bandwidth

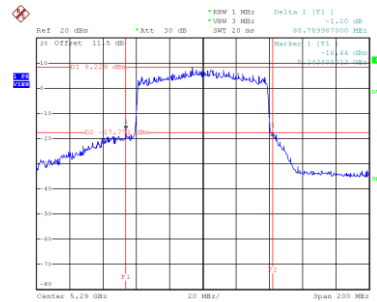

Date: 20-SEP-2024 12:36:54

99 % Occupied Bandwidth

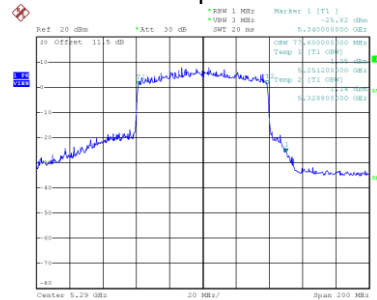


Date: 20-SEP-2024 12:36:10


Test Mode	UNII-1+UNII-2A_ IEEE 802.11ac(VHT160)_Ant. 1
-----------	--

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
50	5250	153.62	155.200

CH50 26 dB Bandwidth

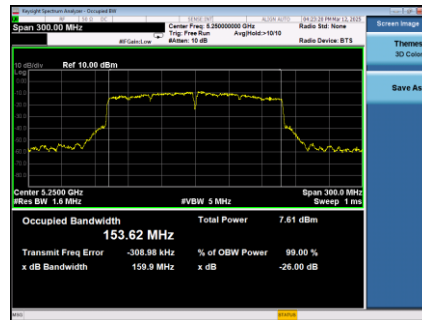

99 % Occupied Bandwidth

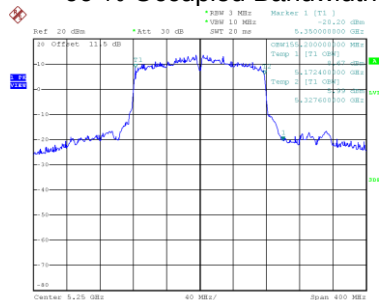


Date: 2024-02-24 12:45:09


Test Mode	UNII-1+UNII-2A_ IEEE 802.11ax(HE160)_Ant. 1
-----------	---

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
50	5250	155.65	156.800

CH50 26 dB Bandwidth

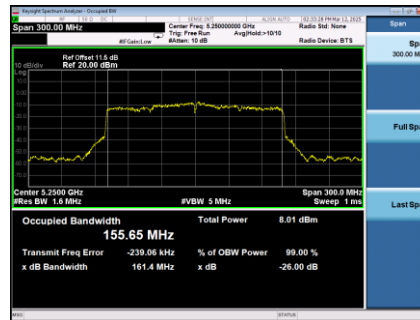

99 % Occupied Bandwidth

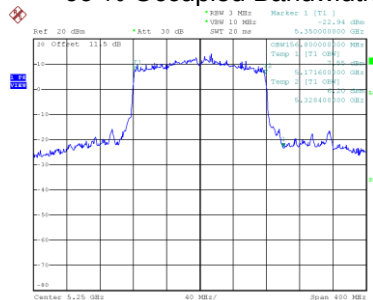


Date: 2. SEP. 2024 13:17:55


Test Mode	UNII-2C_ IEEE 802.11a_Ant. 1
-----------	------------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
100	5500	29.387	17.000
116	5580	20.789	16.600
140	5700	25.707	17.000

CH100

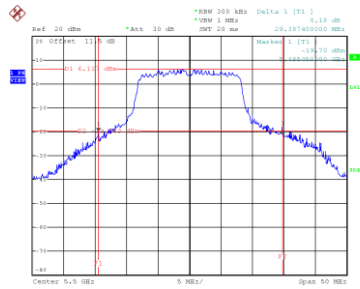


Date: 20.SEP.2024 10:58:05

CH116
26 dB Bandwidth


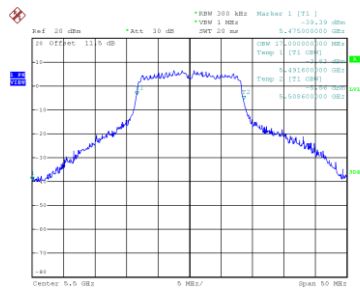
Date: 20.SEP.2024 10:59:13

CH140




Date: 20.SEP.2024 11:00:26


99 % Occupied Bandwidth



Date: 20.SEP.2024 10:57:44



Date: 20.SEP.2024 10:58:47




Date: 20.SEP.2024 11:00:02


Test Mode	UNII-2C_ IEEE 802.11n(HT20)_Ant. 1
-----------	------------------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
100	5500	29.650	18.200
116	5580	21.947	17.800
140	5700	28.499	18.100

CH100

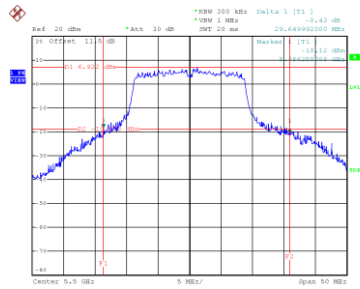


Date: 20.SEP.2024 11:07:09

CH116
26 dB Bandwidth


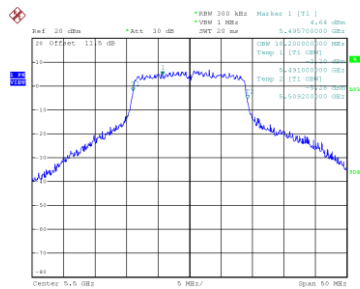
Date: 20.SEP.2024 11:08:12

CH140




Date: 20.SEP.2024 11:09:30


99 % Occupied Bandwidth



Date: 20.SEP.2024 11:06:48



Date: 20.SEP.2024 11:07:47




Date: 20.SEP.2024 11:09:09

Test Mode	UNII-2C_ IEEE 802.11n(HT40)_Ant. 1
-----------	------------------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
102	5510	46.500	37.000
110	5550	40.200	36.600
134	5670	53.390	37.200

CH102

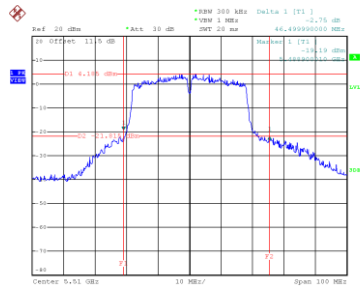


Date: 20.SEP.2024 11:16:39

CH110
26 dB Bandwidth




Date: 20.SEP.2024 11:18:44

CH134




Date: 20.SEP.2024 11:20:28


99 % Occupied Bandwidth

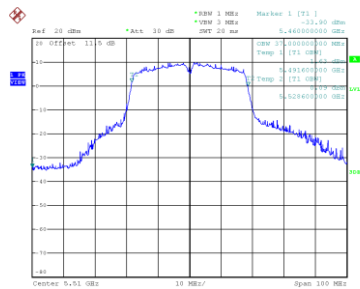

Date: 20.SEP.2024 11:16:04



Date: 20.SEP.2024 11:18:09




Date: 20.SEP.2024 11:19:33

Test Mode	UNII-2C_IEEE 802.11ac(VHT80)_Ant. 1
-----------	-------------------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
106	5530	102.800	75.600
122	5610	80.200	75.200

CH106




Date: 20.SEP.2024 11:50:16

CH122
26 dB Bandwidth

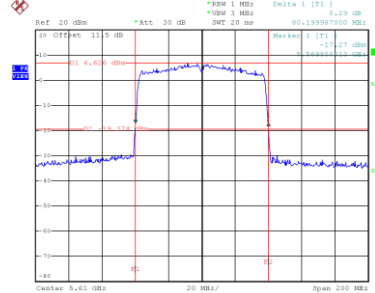


Date: 20.SEP.2024 11:51:40

99 % Occupied Bandwidth



Date: 20.SEP.2024 11:49:46

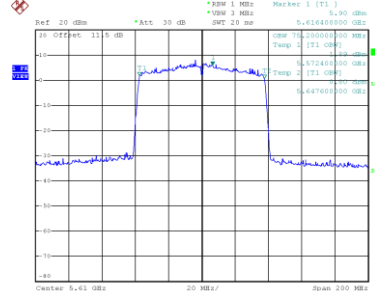

Date: 20.8EP.2024 11:51:05