



CERTIFICATION TEST REPORT

Report Number. : 12216366-E2V2

Applicant : APPLE, INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.

Model : A2105

FCC ID : BCG-E3237A

IC : 579C-E3237A

EUT Description : SMARTPHONE

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C
ISED RSS-247 ISSUE 2

Date Of Issue:
August 27, 2018

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP Lab code: 200065-0

REPORT REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
V1	8/21/18	Initial Issue	Chin Pang
V2	8/27/18	Addressed TCB Questions	Tony Li

TABLE OF CONTENTS

REPORT REVISION HISTORY	2
TABLE OF CONTENTS	3
1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	7
4.1. MEASURING INSTRUMENT CALIBRATION	7
4.2. SAMPLE CALCULATION	7
4.3. MEASUREMENT UNCERTAINTY.....	7
5. EQUIPMENT UNDER TEST	8
5.1. EUT DESCRIPTION	8
5.2. MAXIMUM OUTPUT POWER.....	8
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	8
5.4. SOFTWARE AND FIRMWARE.....	8
5.5. WORST-CASE CONFIGURATION AND MODE.....	9
5.6. DESCRIPTION OF TEST SETUP.....	10
6. MEASUREMENT METHOD.....	15
7. TEST AND MEASUREMENT EQUIPMENT	16
8. ANTENNA PORT TEST RESULTS	17
8.1. ON TIME AND DUTY CYCLE.....	17
8.2. 99% BANDWIDTH.....	18
8.2.1. HIGH POWER BLE (1Mbps).....	19
8.2.2. HIGH POWER BLE (2Mbps).....	21
8.2.3. LOW POWER BLE (1Mbps)	23
8.2.4. LOW POWER BLE (2Mbps)	25
8.3. 6 dB BANDWIDTH.....	27
8.3.1. HIGH POWER BLE (1Mbps).....	28
8.3.2. HIGH POWER BLE (2Mbps).....	30
8.3.3. LOW POWER BLE (1Mbps)	32
8.3.4. LOW POWER BLE (2Mbps)	34
8.4. OUTPUT POWER.....	36
8.4.1. HIGH POWER BLE (1Mbps).....	37
8.4.2. HIGH POWER BLE (2Mbps).....	38
8.4.3. LOW POWER BLE (1Mbps)	39
8.4.4. LOW POWER BLE (2Mbps)	40

8.5.	AVERAGE POWER.....	41
8.5.1.	HIGH POWER BLE (1Mbps).....	42
8.5.2.	HIGH POWER BLE (2Mbps).....	43
8.5.3.	LOW POWER BLE (1Mbps)	44
8.5.4.	LOW POWER BLE (2Mbps)	45
8.6.	POWER SPECTRAL DENSITY.....	46
8.6.1.	HIGH POWER BLE (1Mbps).....	47
8.6.2.	HIGH POWER BLE (2Mbps).....	49
8.6.3.	LOW POWER BLE (1Mbps)	51
8.6.4.	LOW POWER BLE (2Mbps)	53
8.7.	CONDUCTED SPURIOUS EMISSIONS.....	55
8.7.1.	HIGH POWER BLE (1Mbps).....	56
8.7.2.	HIGH POWER BLE (2Mbps).....	58
8.7.3.	LOW POWER BLE (1Mbps)	60
8.7.4.	LOW POWER BLE (2Mbps)	62
9.	RADIATED TEST RESULTS.....	64
9.1.	LIMITS AND PROCEDURE.....	64
9.2.	TRANSMITTER ABOVE 1 GHz.....	65
9.2.1.	HIGH POWER BLE (1Mbps).....	65
9.2.2.	HIGH POWER BLE (2Mbps).....	85
9.2.3.	LOW POWER BLE (1Mbps)	105
9.2.4.	LOW POWER BLE (2Mbps)	125
9.3.	Worst Case Below 1 GHz	145
9.4.	Worst Case 18-26 GHz.....	147
10.	AC POWER LINE CONDUCTED EMISSIONS	149
10.1.1.	AC Power Line Host.....	150
10.1.2.	AC Power Line Norm.....	152
11.	SETUP PHOTOS	154

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.

EUT DESCRIPTION: SMARTPHONE

MODEL: A2105

SERIAL NUMBER: C7CWM00CK3MD

DATE TESTED: JUNE 1 – JULY 27, 2018


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Complies
ISED RSS-247 Issue 2	Complies
ISED RSS-GEN Issue 5	Complies

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of the U.S. government.

Approved & Released For
UL Verification Services Inc. By:

Prepared By:



Chin Pang
CONSUMER TECHNOLOGY DIVISION
Senior Engineer
UL Verification Services Inc.

Jingang Li
CONSUMER TECHNOLOGY DIVISION
Lab Engineer
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, KDB 558074 D01 v04, ANSI C63.10-2013, RSS-GEN Issue 5, and RSS-247 Issue 2.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, and 47658 Kato Road, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street	47658 Kato Rd
<input type="checkbox"/> Chamber A (ISED:2324B-1)	<input checked="" type="checkbox"/> Chamber D (ISED:22541-1)	<input type="checkbox"/> Chamber K (ISED:2324A-1)
<input type="checkbox"/> Chamber B (ISED:2324B-2)	<input type="checkbox"/> Chamber E (ISED:22541-2)	<input type="checkbox"/> Chamber L (ISED:2324A-3)
<input checked="" type="checkbox"/> Chamber C (ISED:2324B-3)	<input type="checkbox"/> Chamber F (ISED:22541-3)	
	<input checked="" type="checkbox"/> Chamber G (ISED:22541-4)	
	<input checked="" type="checkbox"/> Chamber H (ISED:22541-5)	

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers A through C are covered under ISED company address code 2324B with site numbers 2324B -1 through 2324B-3, respectively. Chambers D through H are covered under ISED company address code 22541 with site numbers 22541 -1 through 22541-5, respectively. Chambers K and L are covered under ISED company address code 2324A with site numbers 2324A-1 and 2324A-3, respectively.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at [NVLAP Lab Search](#).

4. CALIBRATION AND UNCERTAINTY

4.1.MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2.SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3.MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.32 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.45 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.24 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1.EUT DESCRIPTION

The Apple iPhone, is a smartphone with multimedia functions (music, application support, and video), cellular GSM, GPRS, EGPRS, UMTS, LTE, TD-SCDMA, CDMA, IEEE 802.11a/b/g/n/ac, Bluetooth, GPS and NFC. All models support at least one UICC based SIM. The second SIM is either UICC based, electronic SIM (e-SIM), or second SIM is not present. The device has a built-in inductive charging receiver which is not user accessible. The rechargeable battery is not user accessible.

5.2.MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Antenna	Configuration	Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
Ant 2	Pstandalone	2402 - 2480	BLE 1M	20.32	107.65
	Plow			10.33	10.79
	Pstandalone		BLE 2M	20.29	106.91
	Plow			10.31	10.74
Ant 5	Pstandalone	2402 - 2480	BLE 1M	20.30	107.15
	Plow			10.31	10.74
	Pstandalone		BLE 2M	20.27	106.41
	Plow			10.37	10.89

5.3.DESCRPTION OF AVAILABLE ANTENNAS

Frequency Range (GHz)	Ant. 2 (dBi)	Ant. 5 (dBi)
2.4	-2.8	-4.9

5.4.SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was BT: 16.1.232

5.5.WORST-CASE CONFIGURATION AND MODE

The EUT was investigated in three orthogonal orientations X, Y and Z on Ant 2 (Antenna 2) and Ant 5 (Antenna 5). It was determined that Y (Landscape) orientation was the worst-case orientation for ANT 5 and X (Flatbed) for Ant 2.

Pstandalone is high power and Plow is low power.

Radiated band edge, harmonic, and spurious emissions from 1GHz to 18GHz were performed with the EUT was set to transmit at highest power on Low/Middle/High channels.

Radiated emissions below 30MHz, below 1GHz, 18-26GHz and power line conducted emissions were performed with the EUT transmits at the channel with the highest output power as worst-case scenario.

For below 1GHz tests were performed with EUT connected to AC power adapter as the worst case; and for above 1GHz, the worst-case configuration reported was tested with EUT only. There were no emissions found below 30MHz within 20dB of the limit. For AC line conducted emission, test was investigated with AC power adapter and with laptop.

For simultaneous transmission of multiple channels in the 2.4GHz BLE and 5GHz bands. No noticeable emission was found.

There are two vendors of the WiFi/Bluetooth radio modules: variant 1 and variant 2. The Wi-Fi/Bluetooth radio modules have the same mechanical outline (e.g., the same package dimension and pin-out layout), use the same on-board antenna matching circuit, have an identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances.

Baseline testing was performed on the two variants to determine the worst case on all conducted power and radiated emissions.

5.6.DESCRPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
laptop	Apple	Macbook Pro	C02P41RZG086	FCC DoC
Laptop AC/DC adapter	Liteon Technology	PA-1450-BA1	B123	NA
EUT AC Adapter	Apple	A1385	D292365CDYADHLHC3	NA

I/O CABLES (CONDUCTED TEST)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Antenna	1	SMA	Un-Shielded	0.2	To spectrum Analyzer
2	USB	1	USB	Shielded	1	N/A
3	AC	1	AC	Un-shielded	2	N/A

I/O CABLES (RADIATED ABOVE 1 GHZ)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
NA						


I/O CABLES (BELOW 1GHz AND AC POWER LINE TEST WITH ADAPTER AND LAPTOP)

I/O Cable List						
Cable No	Port	# of identical	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	AC	Un-shielded	2	N/A
2	USB	1	USB	Un-shielded	1	N/A


TEST SETUP

The EUT is connected to a test laptop during the tests. Test software exercised the EUT.


SETUP DIAGRAM FOR CONDUCTED TESTS

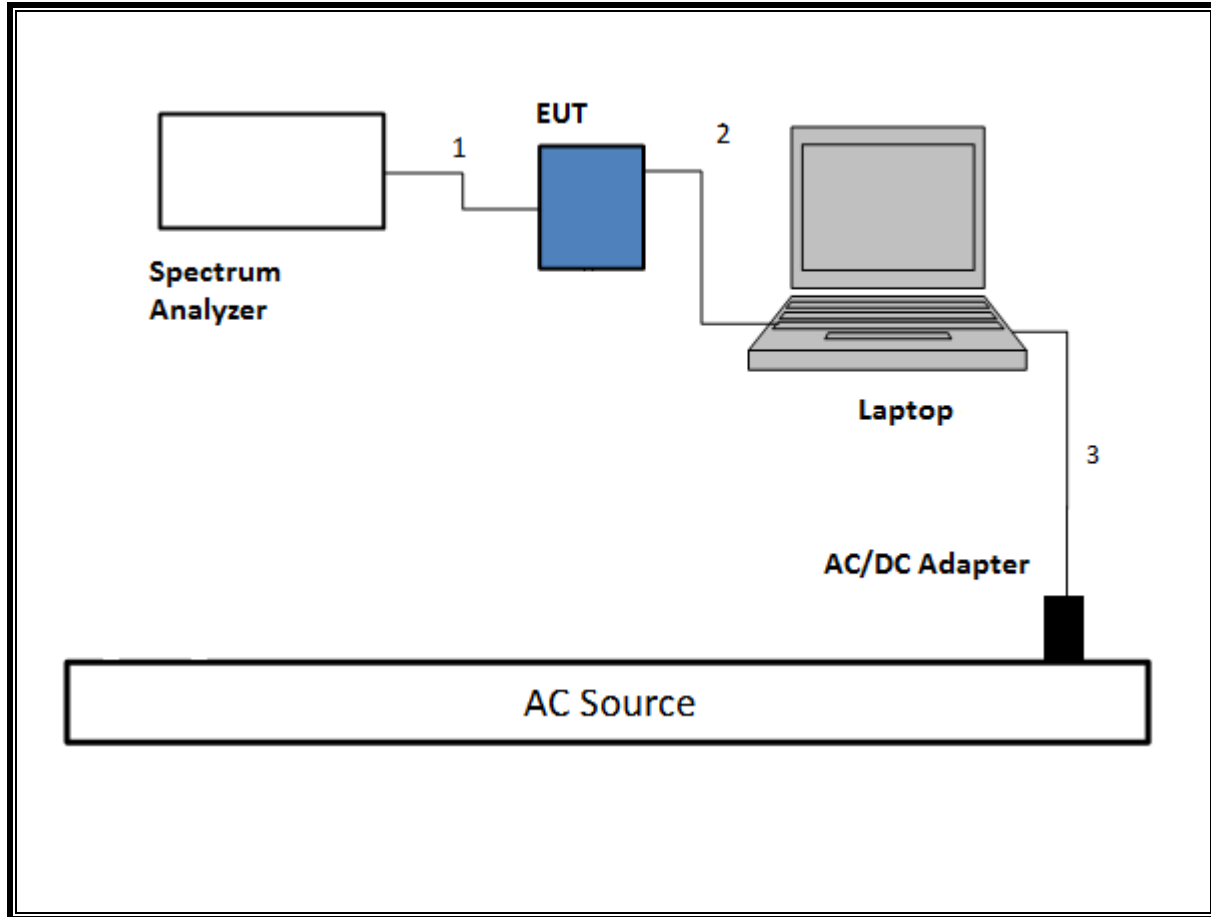


SETUP DIAGRAM FOR RADIATED TESTS Above 1 GHz

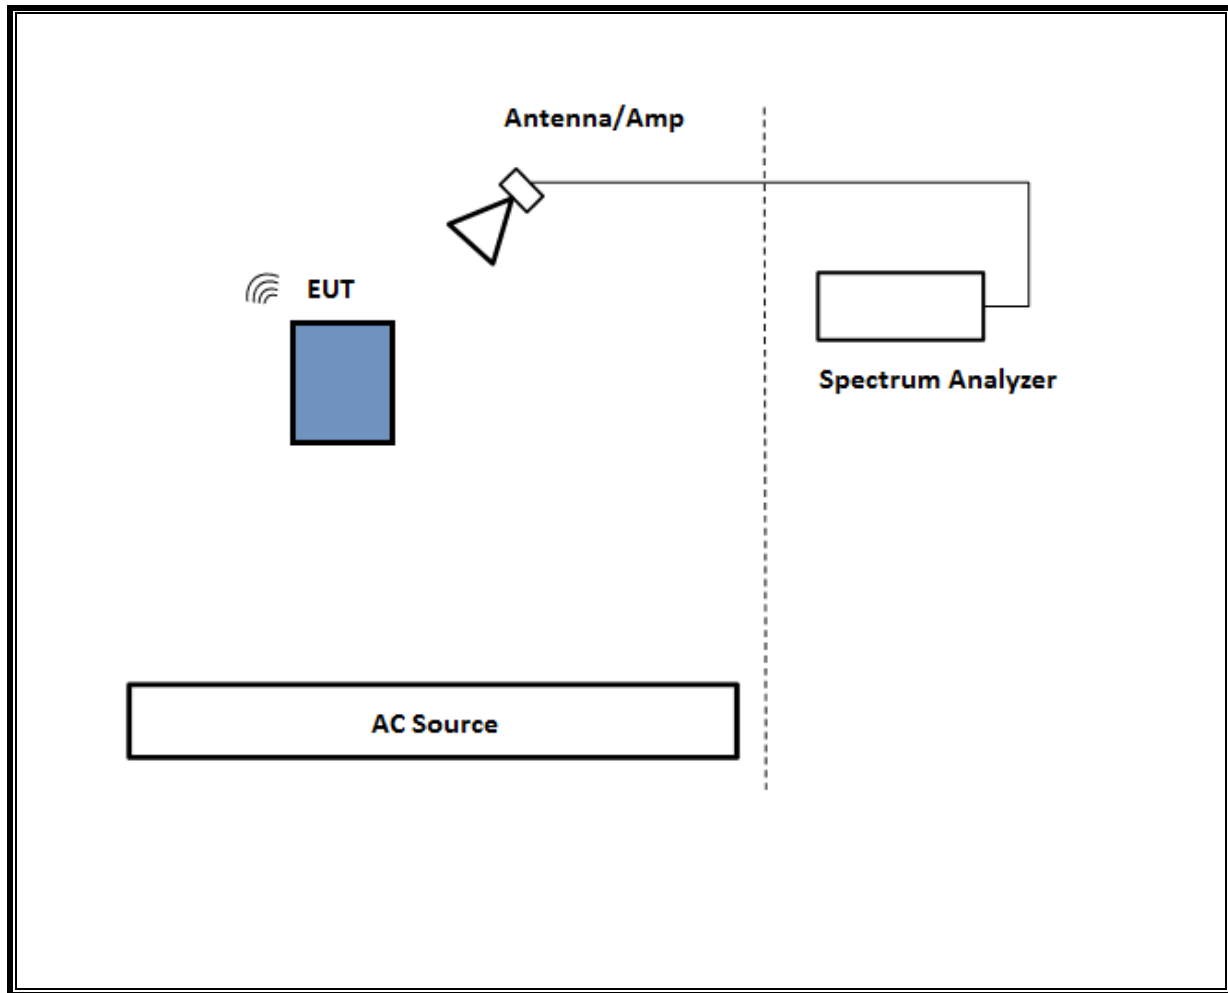

SETUP DIAGRAM FOR Below 1GHz and AC LINE CONDUCTED TEST

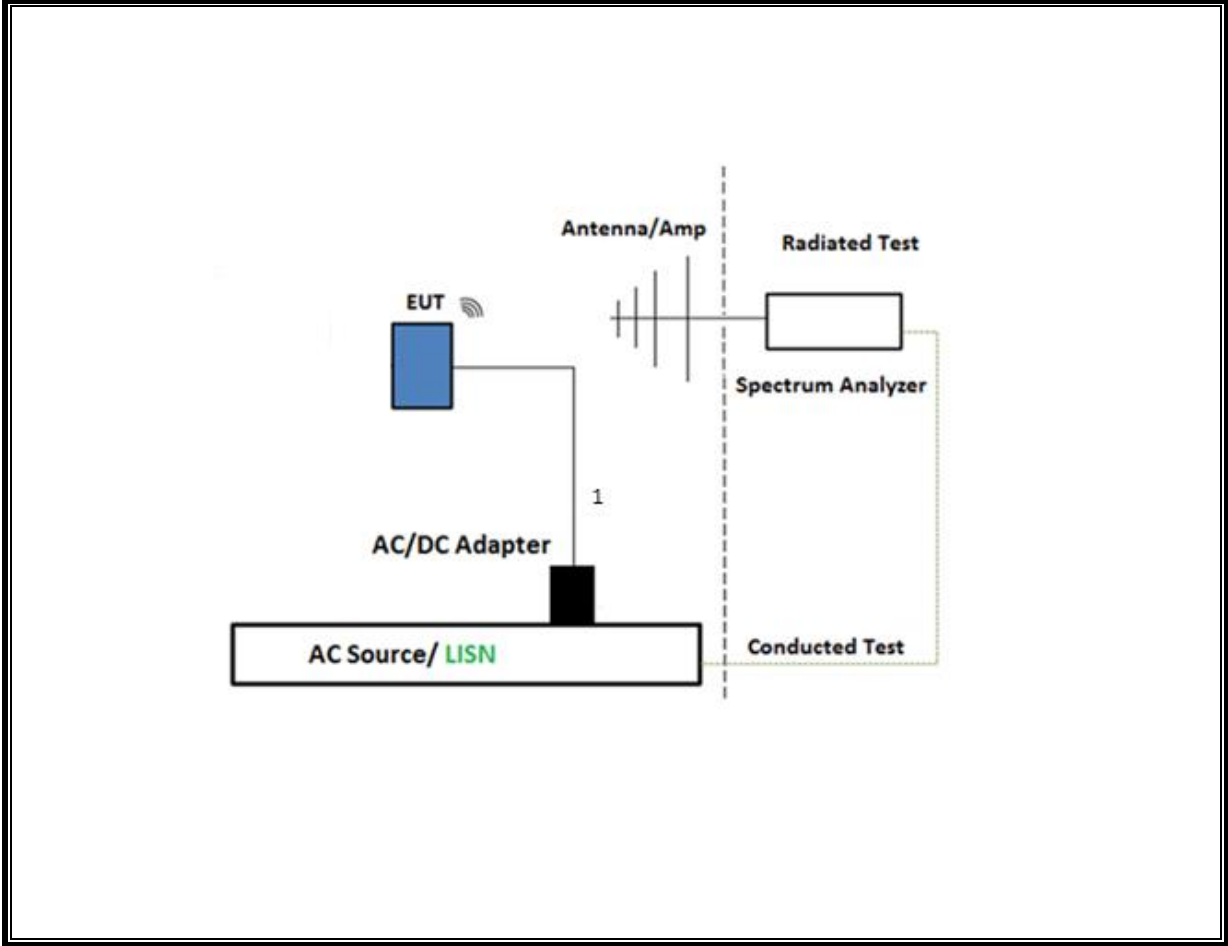

TEST SETUP- AC LINE CONDUCTED: LAPTOP CONFIGURATION

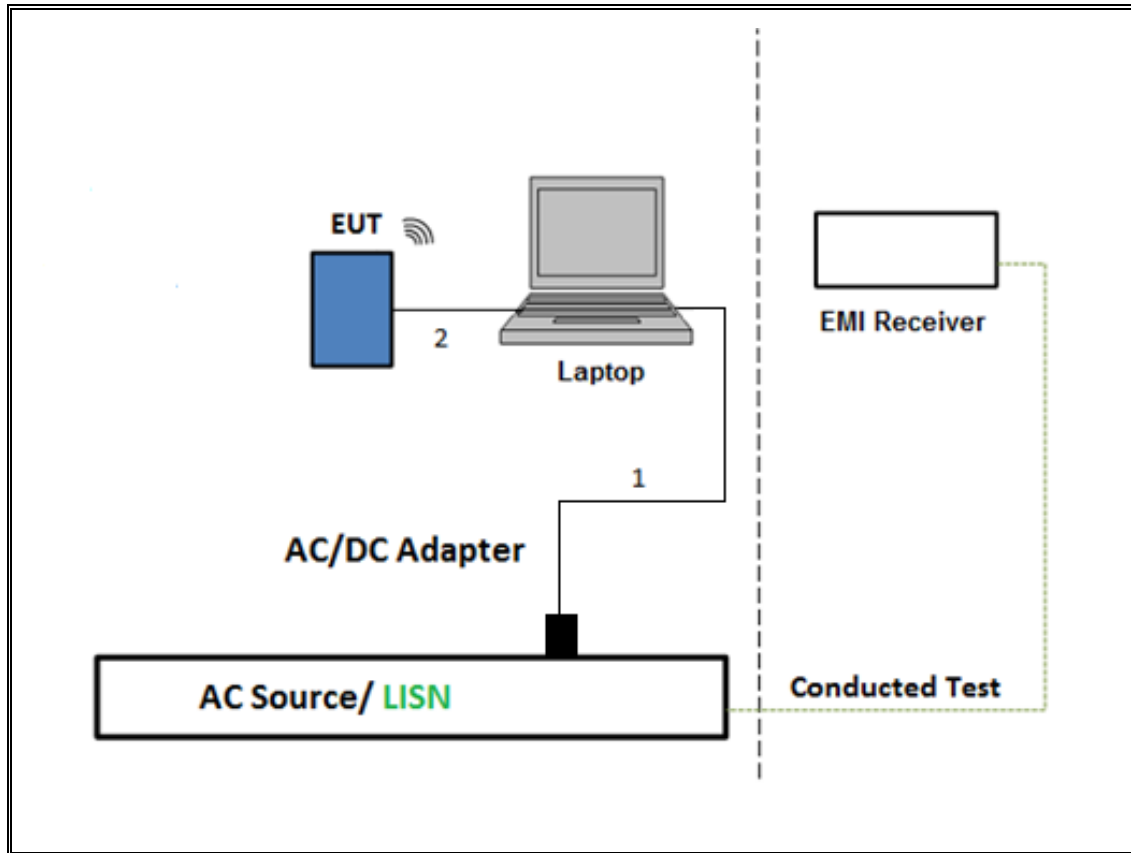

6. MEASUREMENT METHOD

On Time and Duty Cycle: KDB 558074 D01 v04, Section 6.

6 dB BW: KDB 558074 D01 v04, Section 8.1.

Output Power: KDB 558074 D01 v04, Section 9.1.3.

Power Spectral Density: KDB 558074 D01 v04, Section 10.2.

Out-of-band emissions in non-restricted bands: KDB 558074 D01 v04, Section 11.0.

Out-of-band emissions in restricted bands: KDB 558074 D01 v04, Section 12.1.

Band-edge: KDB 558074 D01 v04, Section 12.1.

AC Power Line Conducted Emissions: ANSI C63.10-2013, Section 6.2.

7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Description	Manufacturer	Model	ID Num	Cal Due
Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-S-42	T931	02/24/2019
*Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-S-42	T1165	06/12/2018
Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-S-42	T491	05/19/2019
Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-S-42	T740	12/30/2018
Amplifier, 1 to 8GHz	Miteq	AFS42-00101800-25-S-42	T1131	12/30/2018
*Pre-Amp 18-26GHz	Agilent Technology	8449B	T404	07/23/2018
*Antenna, Horn 1-18GHz	ETS Lindgren	3117	T120	07/02/2018
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T862	05/24/2019
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T346	04/03/2019
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T119	04/03/2019
*Antenna, Horn 1-18GHz	ETS Lindgren	3117	T136	07/02/2018
Antenna Horn, 18 to 26GHz	ARA	MWH-1826	T89	01/18/2019
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB1	T130	10/16/2018
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T340	12/15/2018
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T906	02/16/2019
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T342	02/22/2019
**Power Meter, P-series single channel	Keysight	N1911A	T1268	06/25/2019
Power Sensor	Keysight	N1921A	T1225	04/10/2019
Antenna, Active Loop 9KHz to 30MHz	ETS-Lindgren	6502	T757	09/14/2018
AC Line Conducted				
EMI Test Receiver 9KHz-7GHz	Rohde & Schwarz	ESCI7	T1436	01/25/2019
Power Cable, Line Conducted Emissions	UL	PG1	T861	08/31/2018
**LISN for Conducted Emissions CISPR-16	Fischer	50/250-25-2-01	T1310	06/19/2019
UL AUTOMATION SOFTWARE				
Radiated Software	UL	UL EMC	Ver 9.5, April 26, 2016	
Conducted Software	UL	UL EMC	Ver 5.4, October 13, 2016	
AC Line Conducted Software	UL	UL EMC	Ver 9.5, May 26, 2015	

Note:

*Testing is completed before equipment expiration date.

**Testing started after calibration was done.

8. ANTENNA PORT TEST RESULTS

8.1.ON TIME AND DUTY CYCLE

LIMITS


None; for reporting purposes only.

PROCEDURE

ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
2.4GHz Band						
BLE	100.000	100.000	1.000	100.00%	0.00	0.010

DUTY CYCLE PLOTS

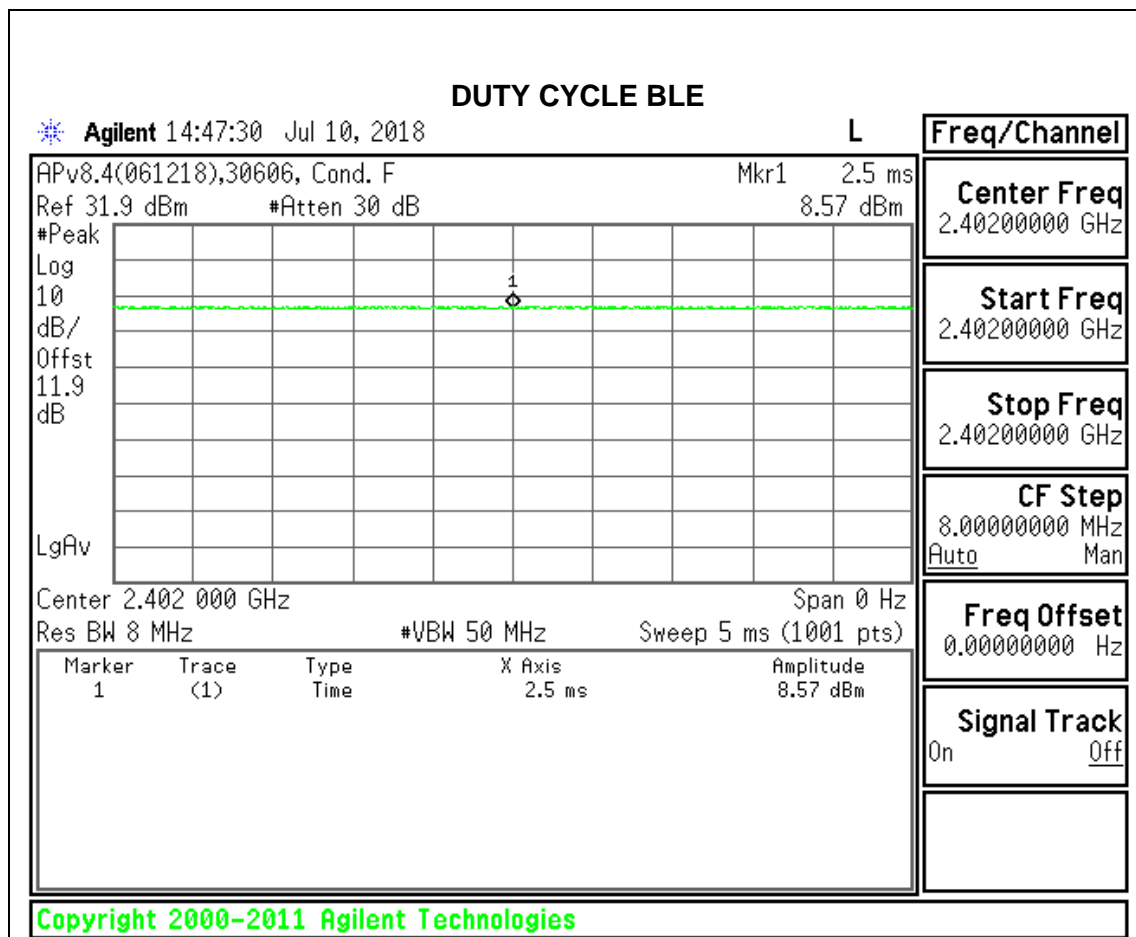

8.2.99% BANDWIDTH

LIMITS


None; for reporting purposes only.

RESULTS

8.2.1. HIGH POWER BLE (1Mbps)


Antenna 2

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	1.0564
Middle	2440	1.0594
High	2480	1.0570

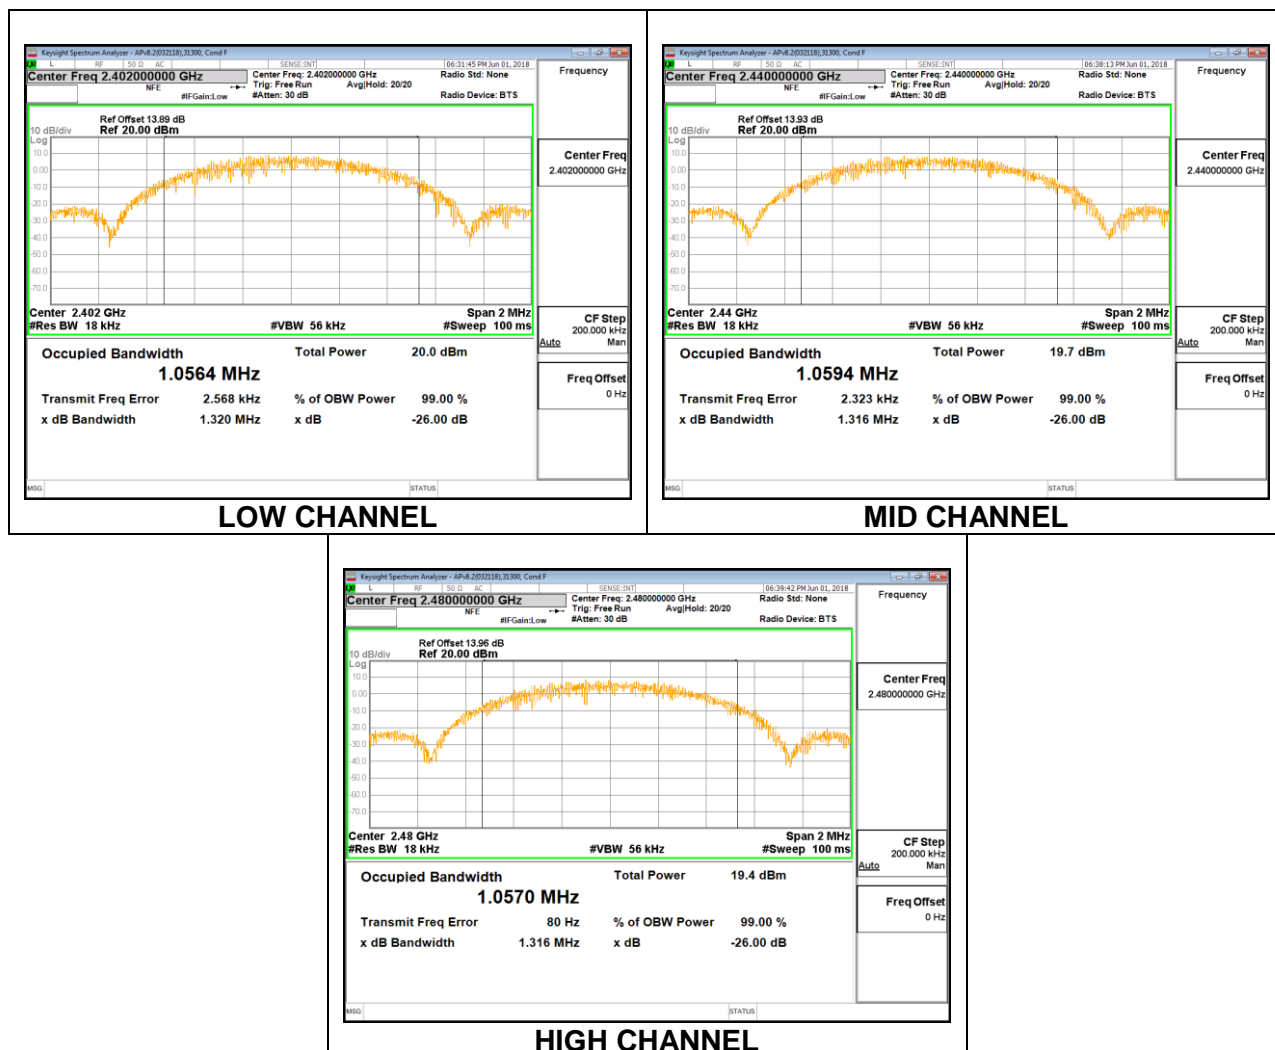

Antenna 5


Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	1.0584
Middle	2440	1.0620
High	2480	1.0565

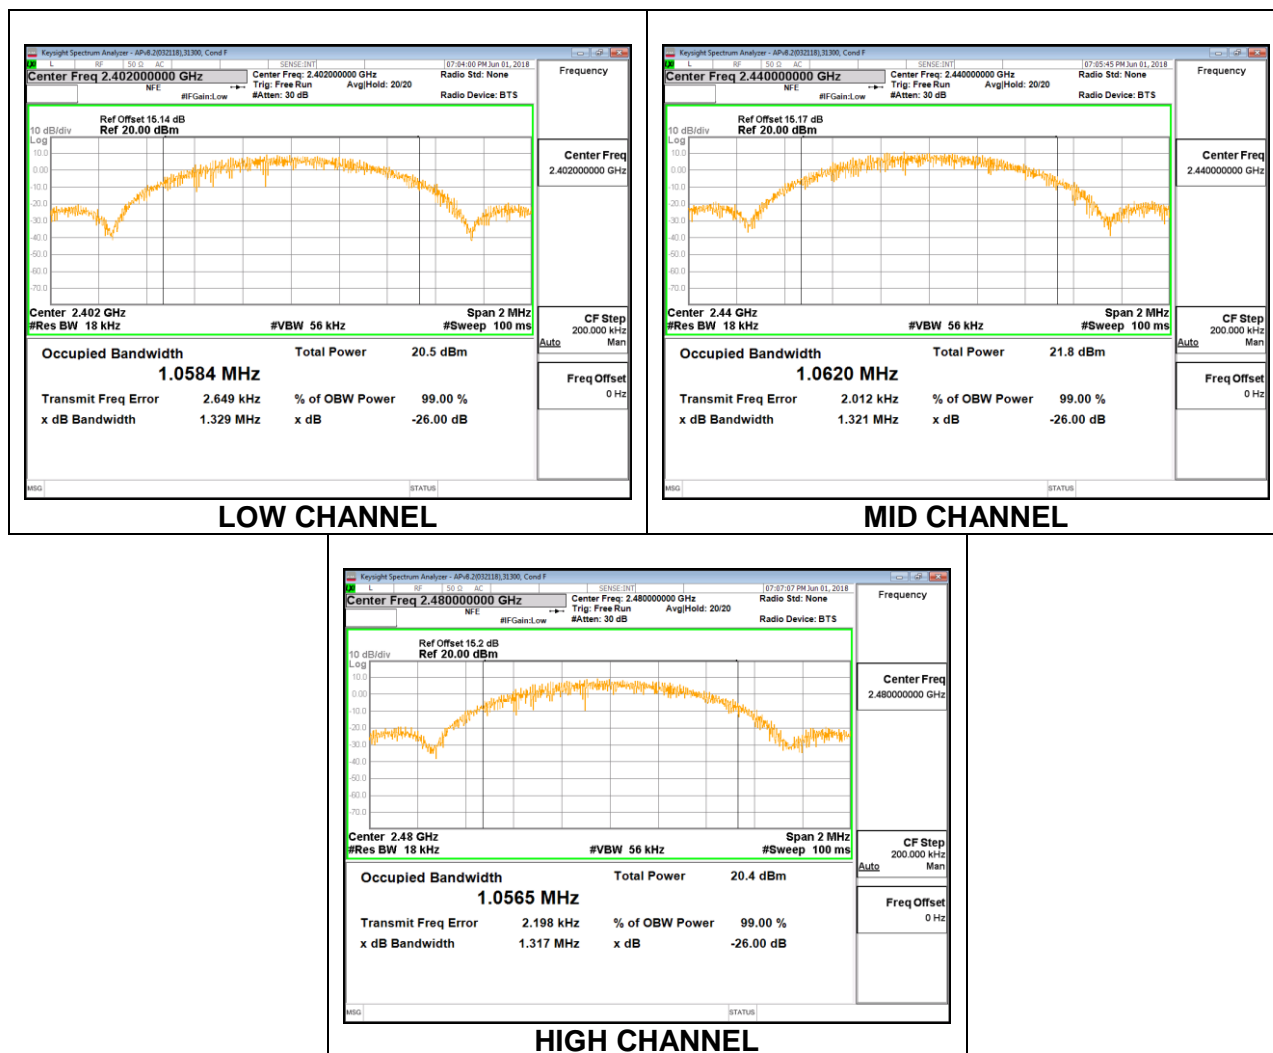

8.2.2. HIGH POWER BLE (2Mbps)




Antenna 2

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	2.0068
Middle	2440	2.0122
High	2480	2.0029

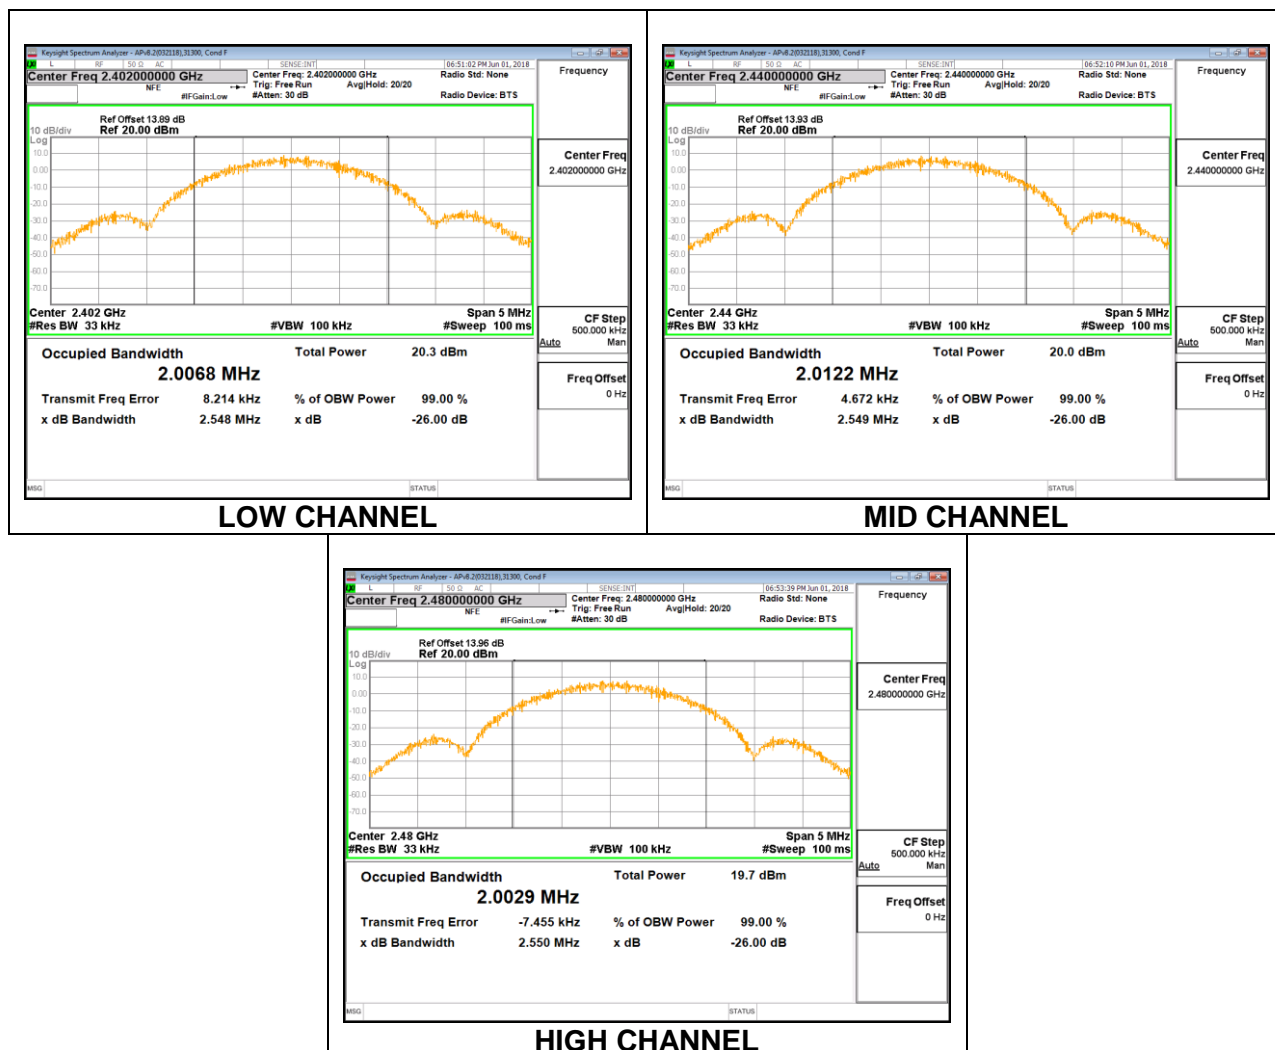

Antenna 5


Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	2.0139
Middle	2440	2.0183
High	2480	2.0141

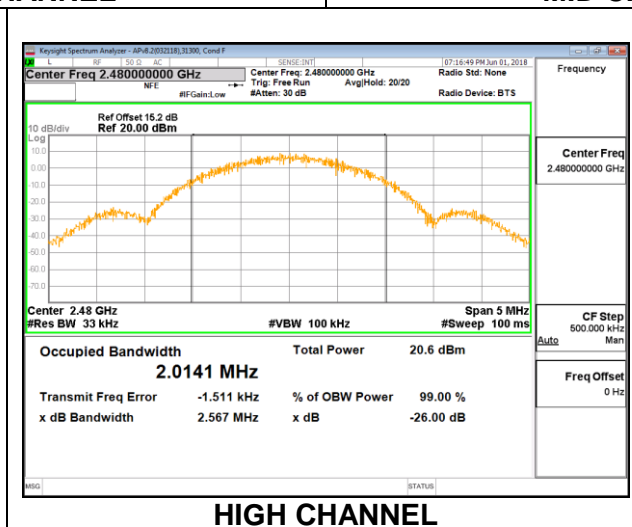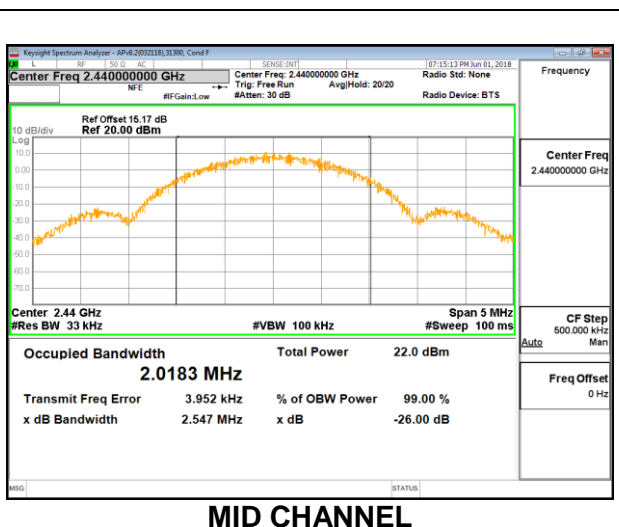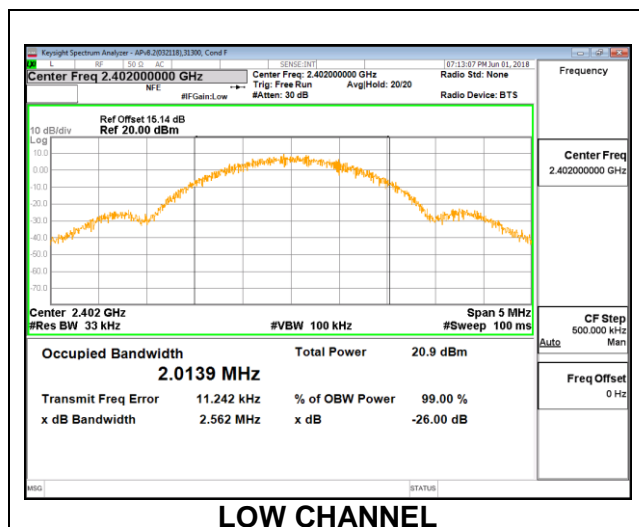

8.2.3. LOW POWER BLE (1Mbps)


Antenna 2

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	1.0525
Middle	2440	1.0556
High	2480	1.0525

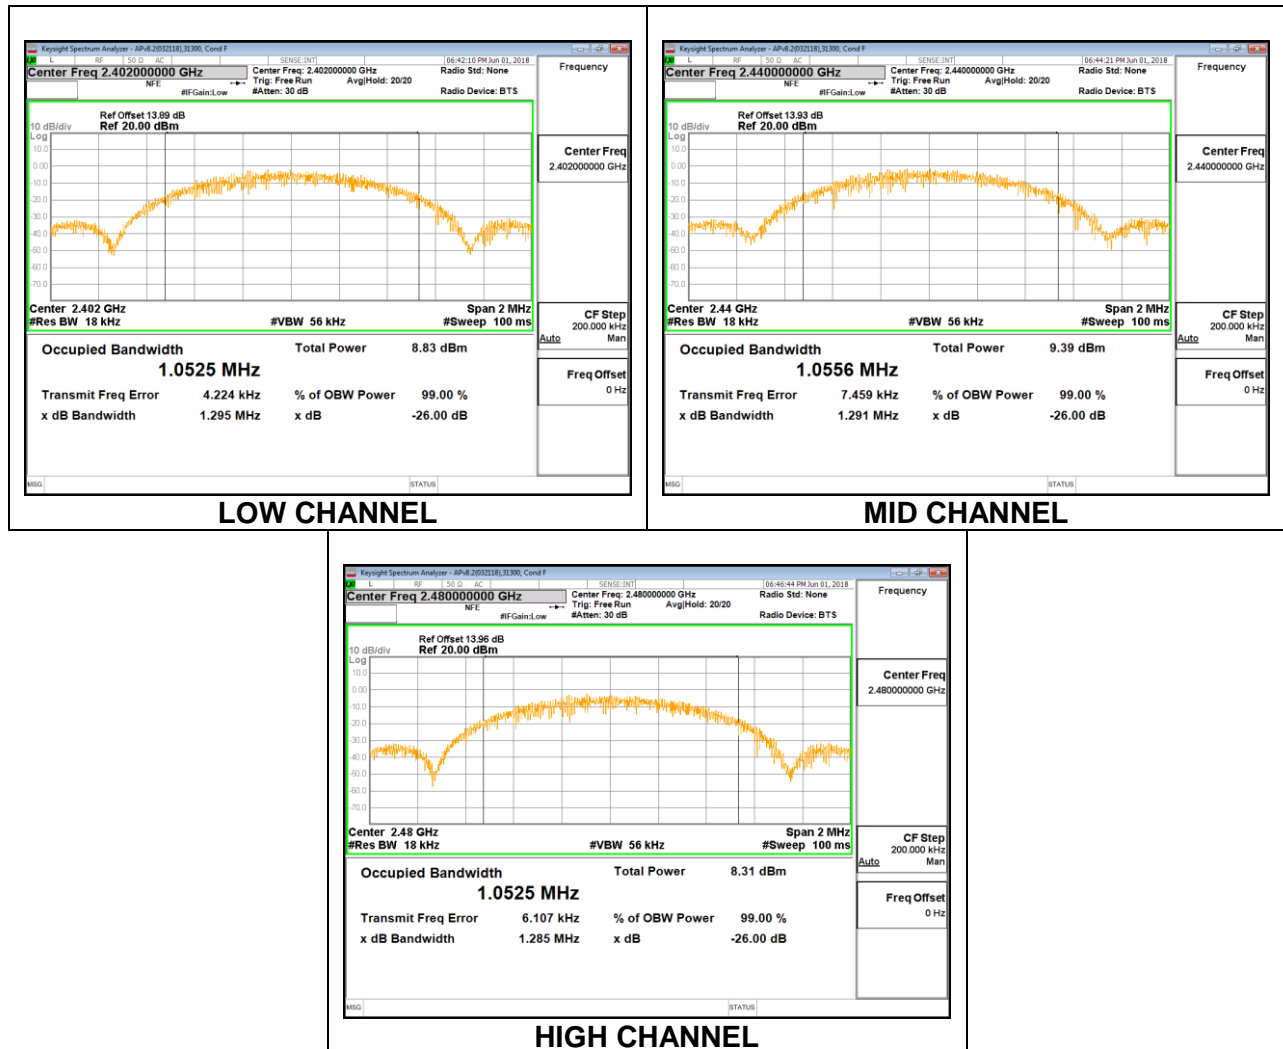

Antenna 5



Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	1.0600
Middle	2440	1.0523
High	2480	1.0577

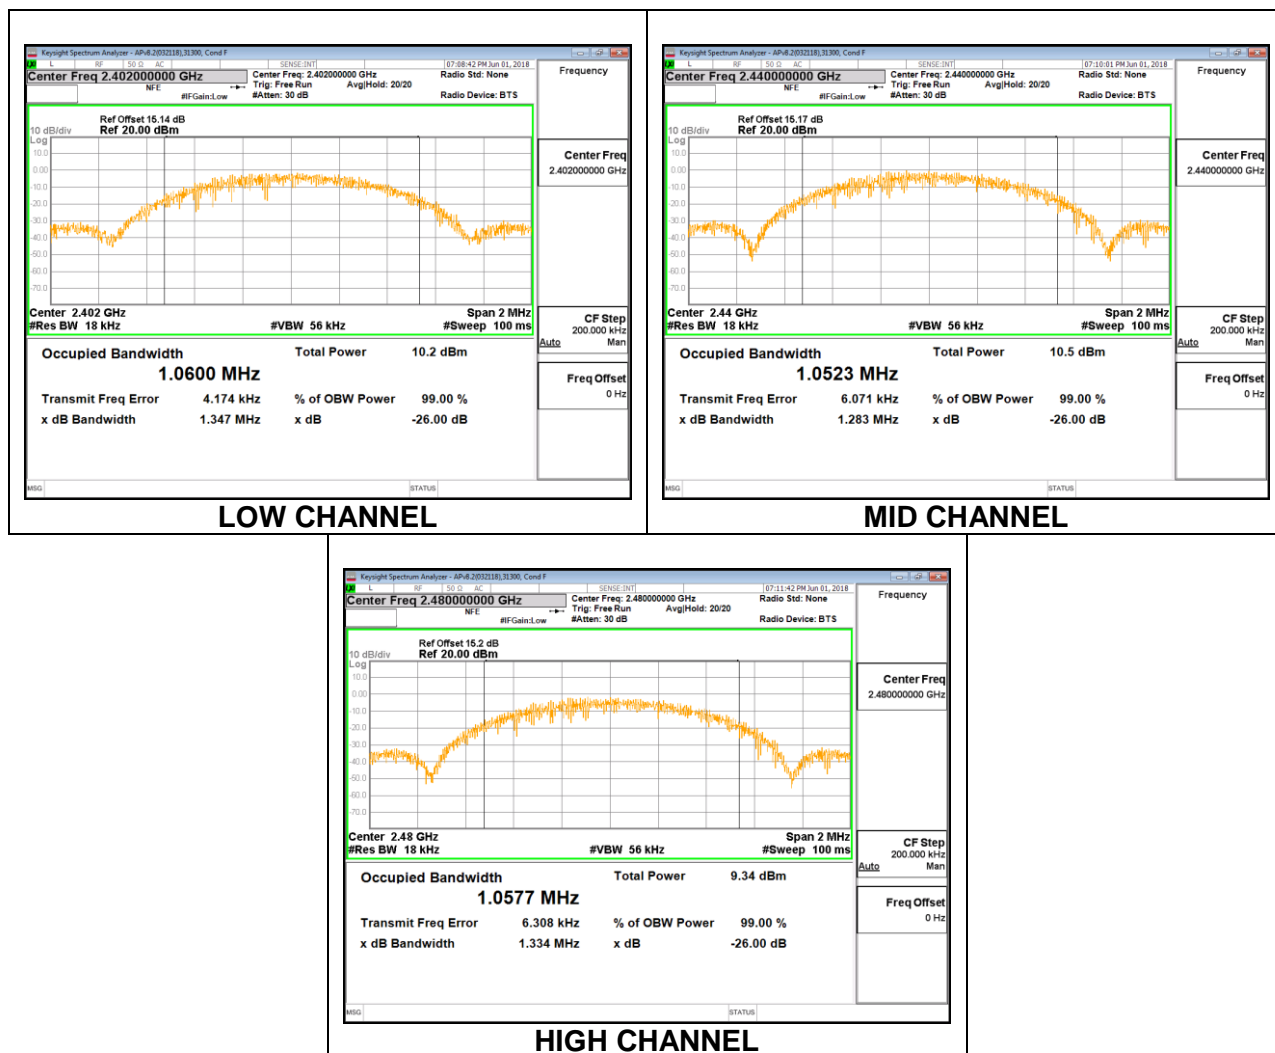

8.2.4. LOW POWER BLE (2Mbps)


Antenna 2

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	1.9977
Middle	2440	2.0000
High	2480	1.9987

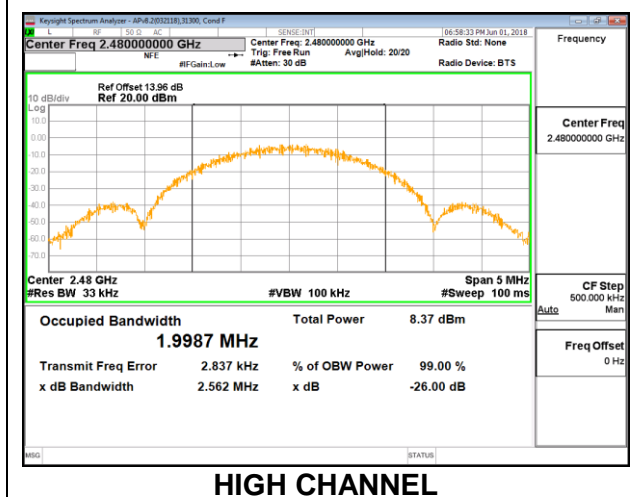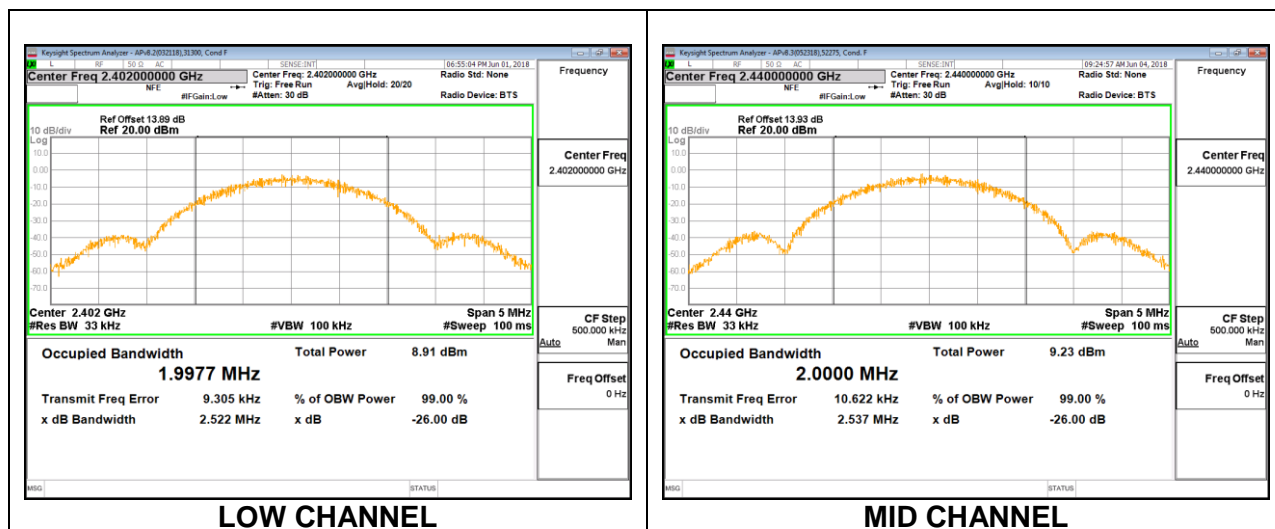

Antenna 5

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	2.0034
Middle	2440	1.9991
High	2480	2.0004

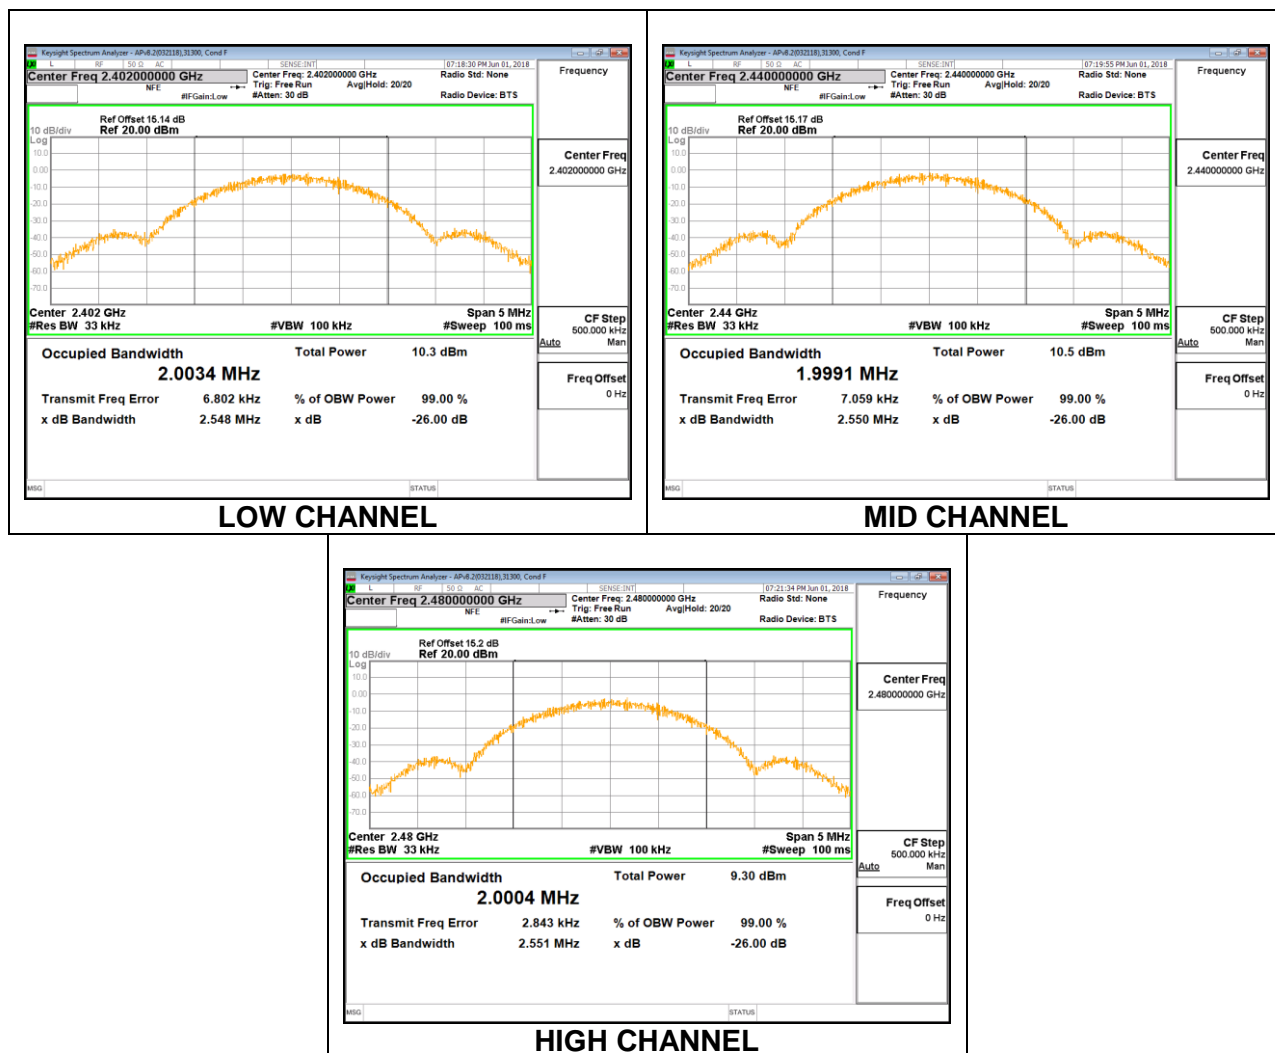

8.3.6 dB BANDWIDTH

LIMITS

FCC §15.407 (e)

RSS-247 5.2 (a)


The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

8.3.1. HIGH POWER BLE (1Mbps)


Antenna 2

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2402	0.6690	0.5
Middle	2440	0.7500	0.5
High	2480	0.7020	0.5

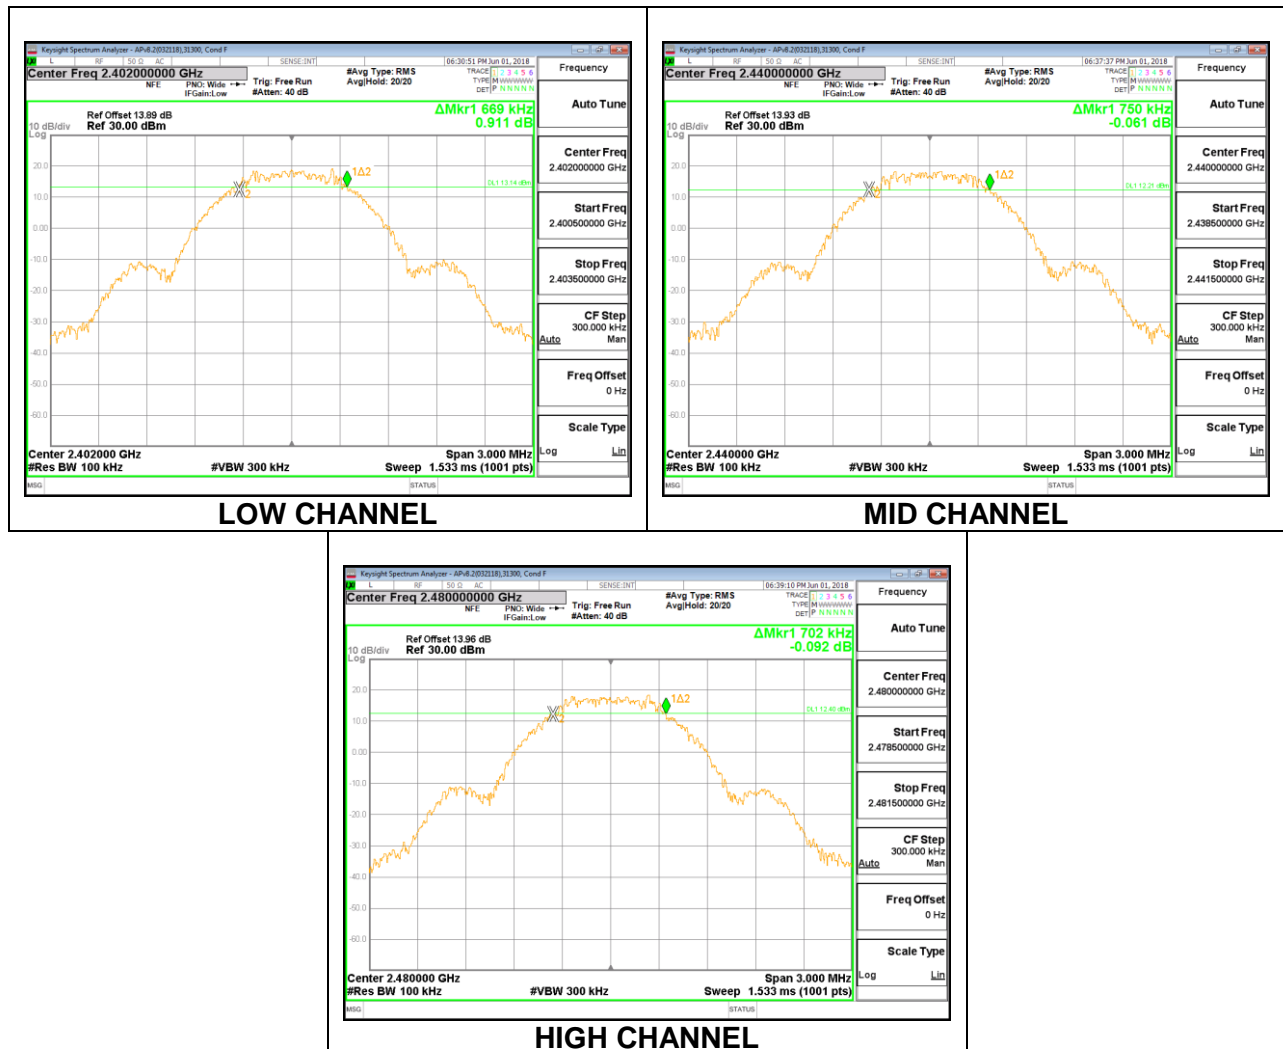

Antenna 5


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2402	0.7260	0.5
Middle	2440	0.6750	0.5
High	2480	0.7470	0.5

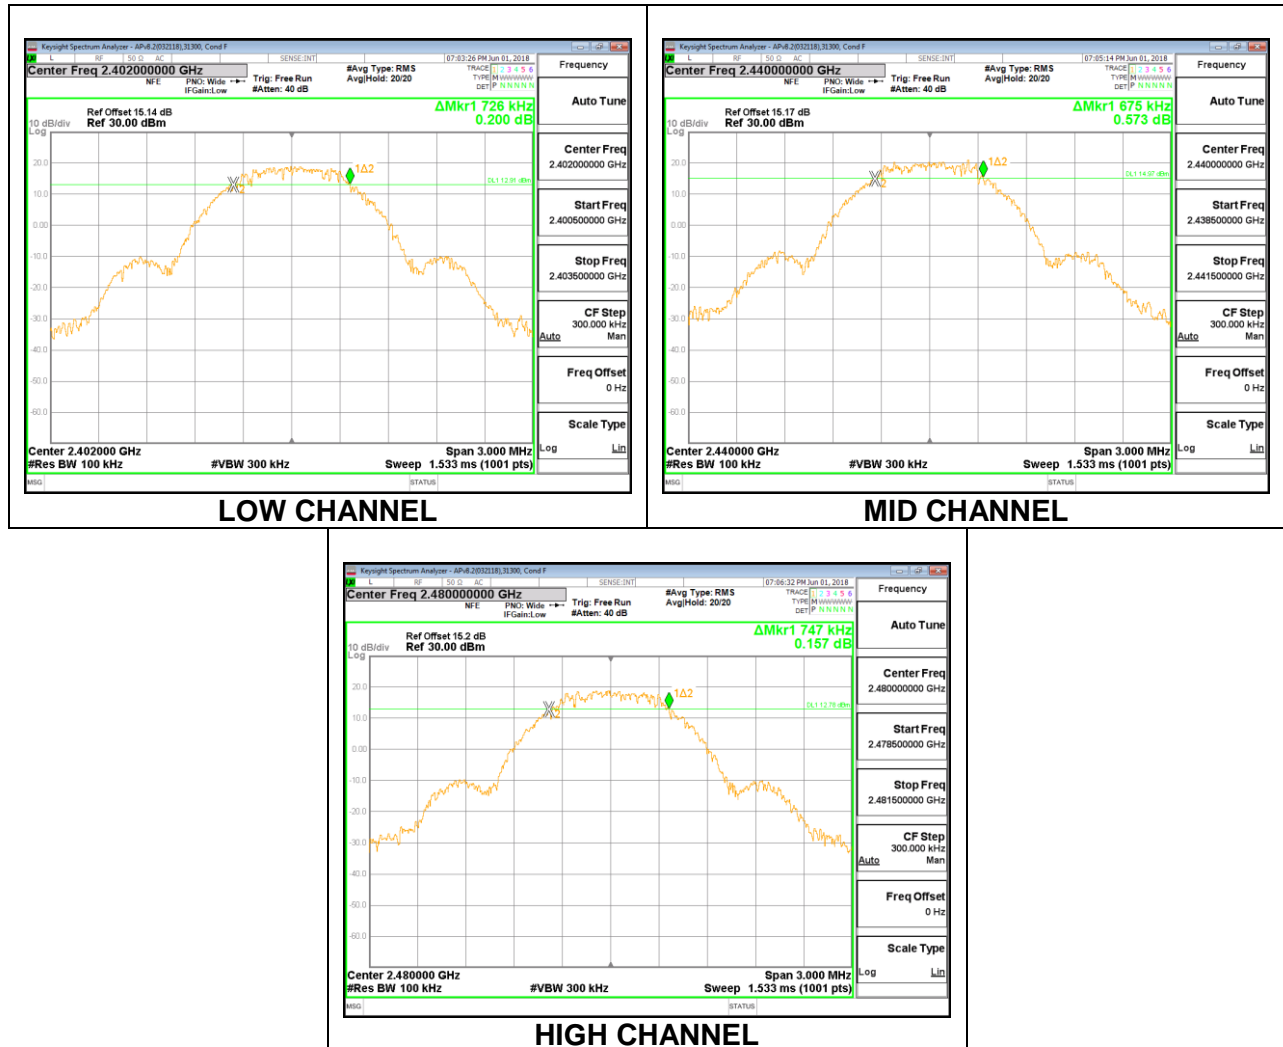

8.3.2. HIGH POWER BLE (2Mbps)


Antenna 2

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2402	1.1490	0.5
Middle	2440	1.1820	0.5
High	2480	1.2270	0.5

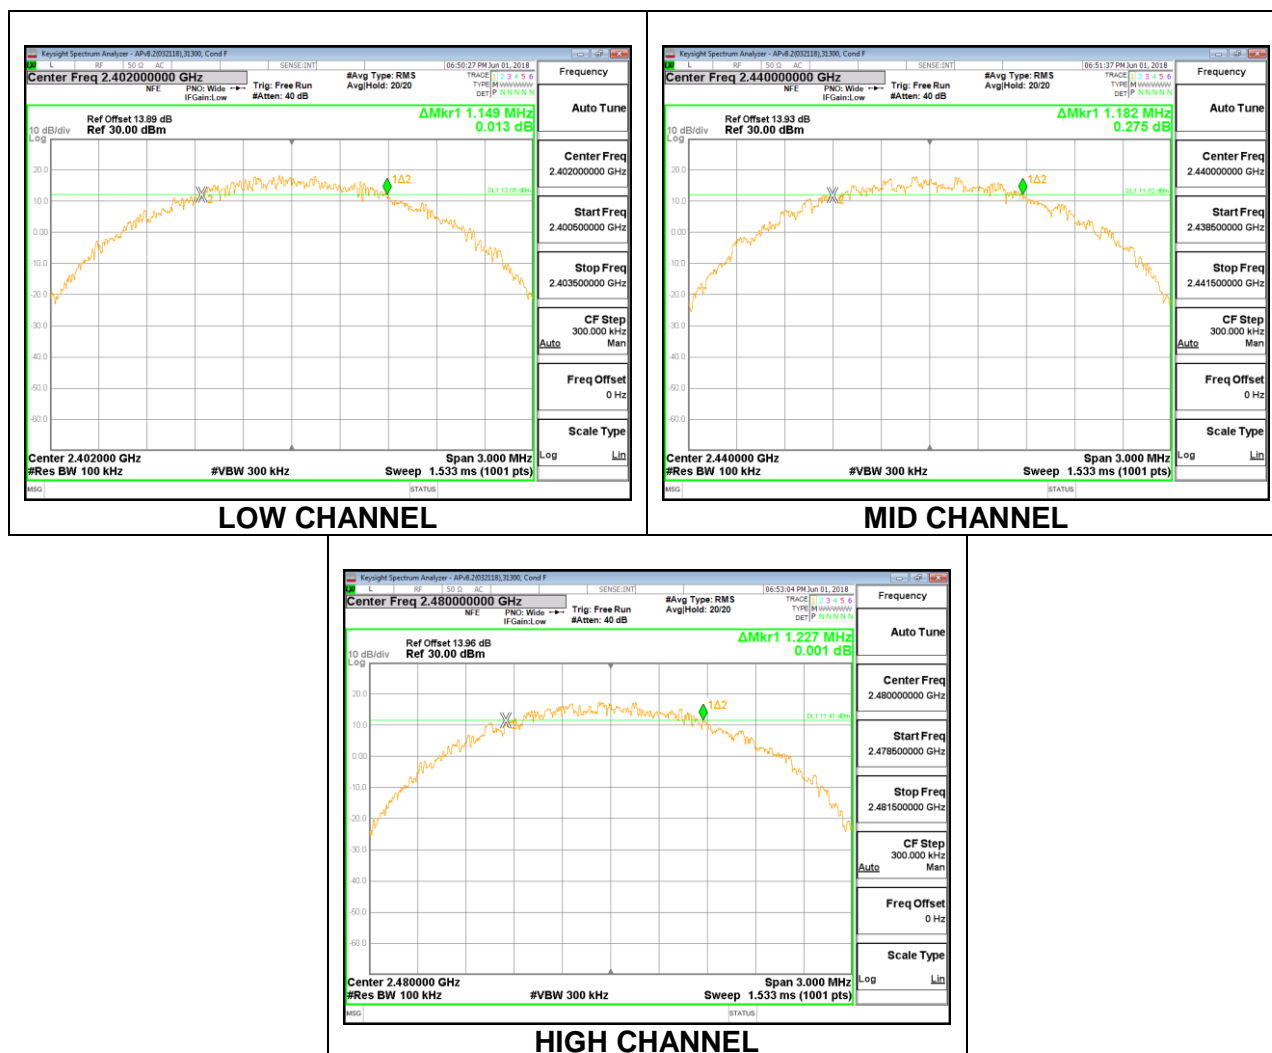

Antenna 5


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2402	1.1850	0.5
Middle	2440	1.1550	0.5
High	2480	1.1850	0.5

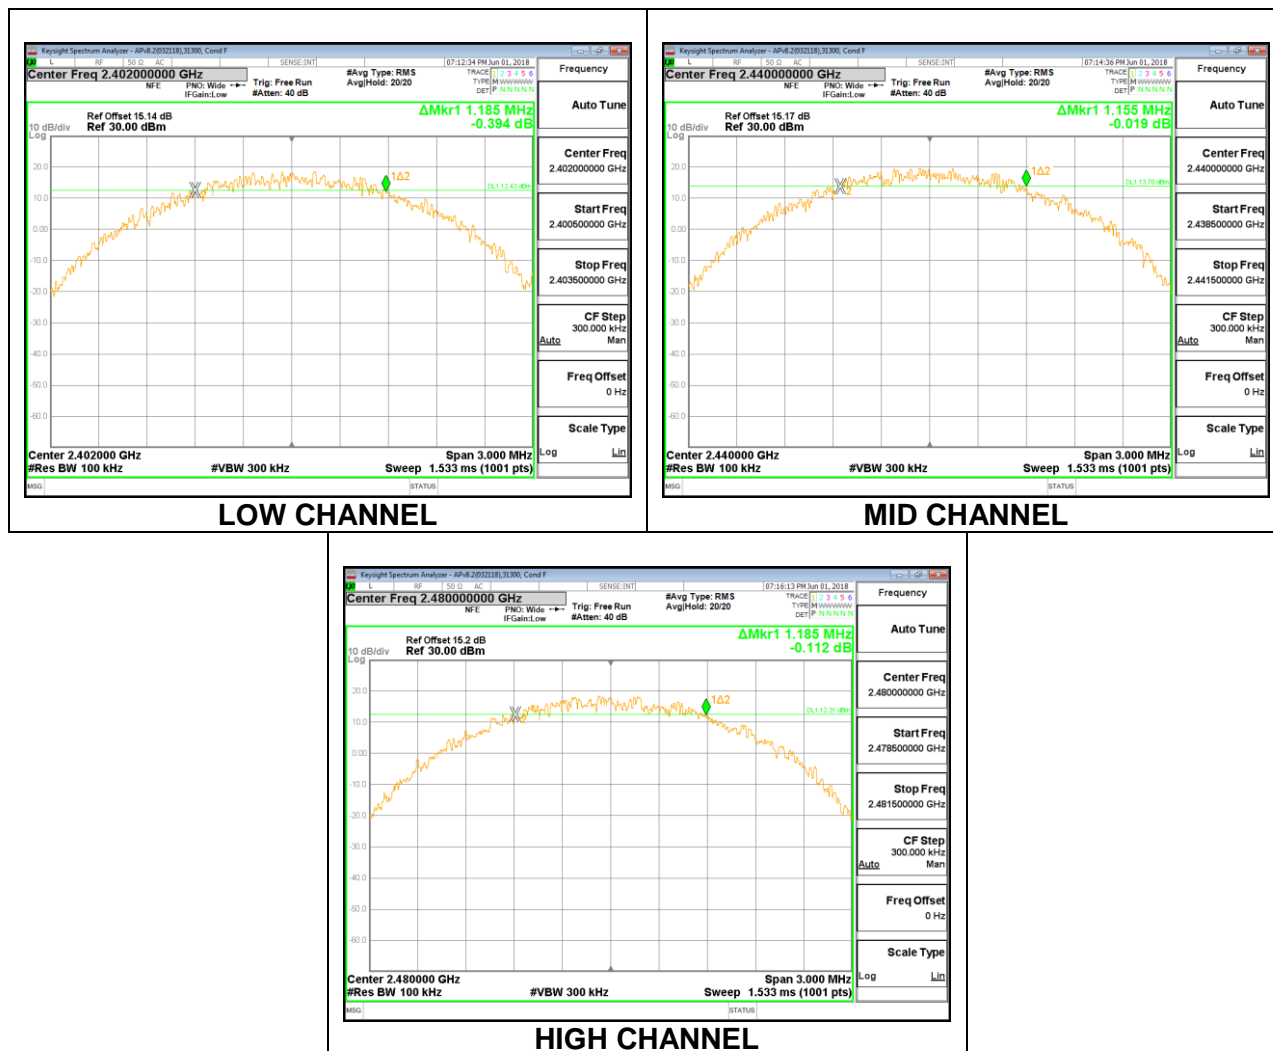

8.3.3. LOW POWER BLE (1Mbps)


Antenna 2

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2402	0.6630	0.5
Middle	2440	0.7080	0.5
High	2480	0.7320	0.5

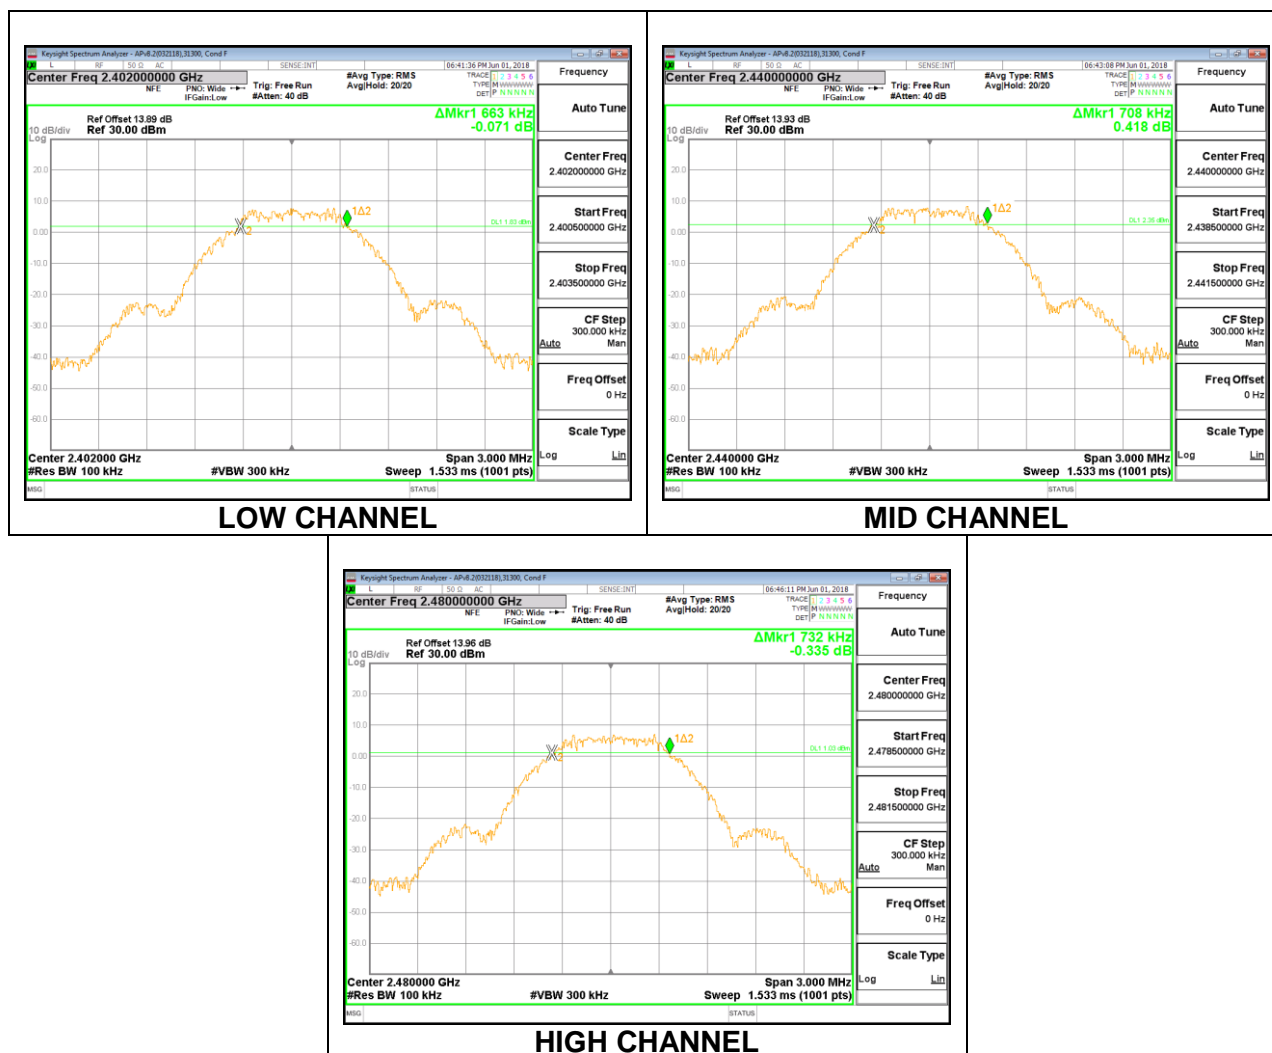

Antenna 5


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2402	0.6660	0.5
Middle	2440	0.7440	0.5
High	2480	0.7080	0.5

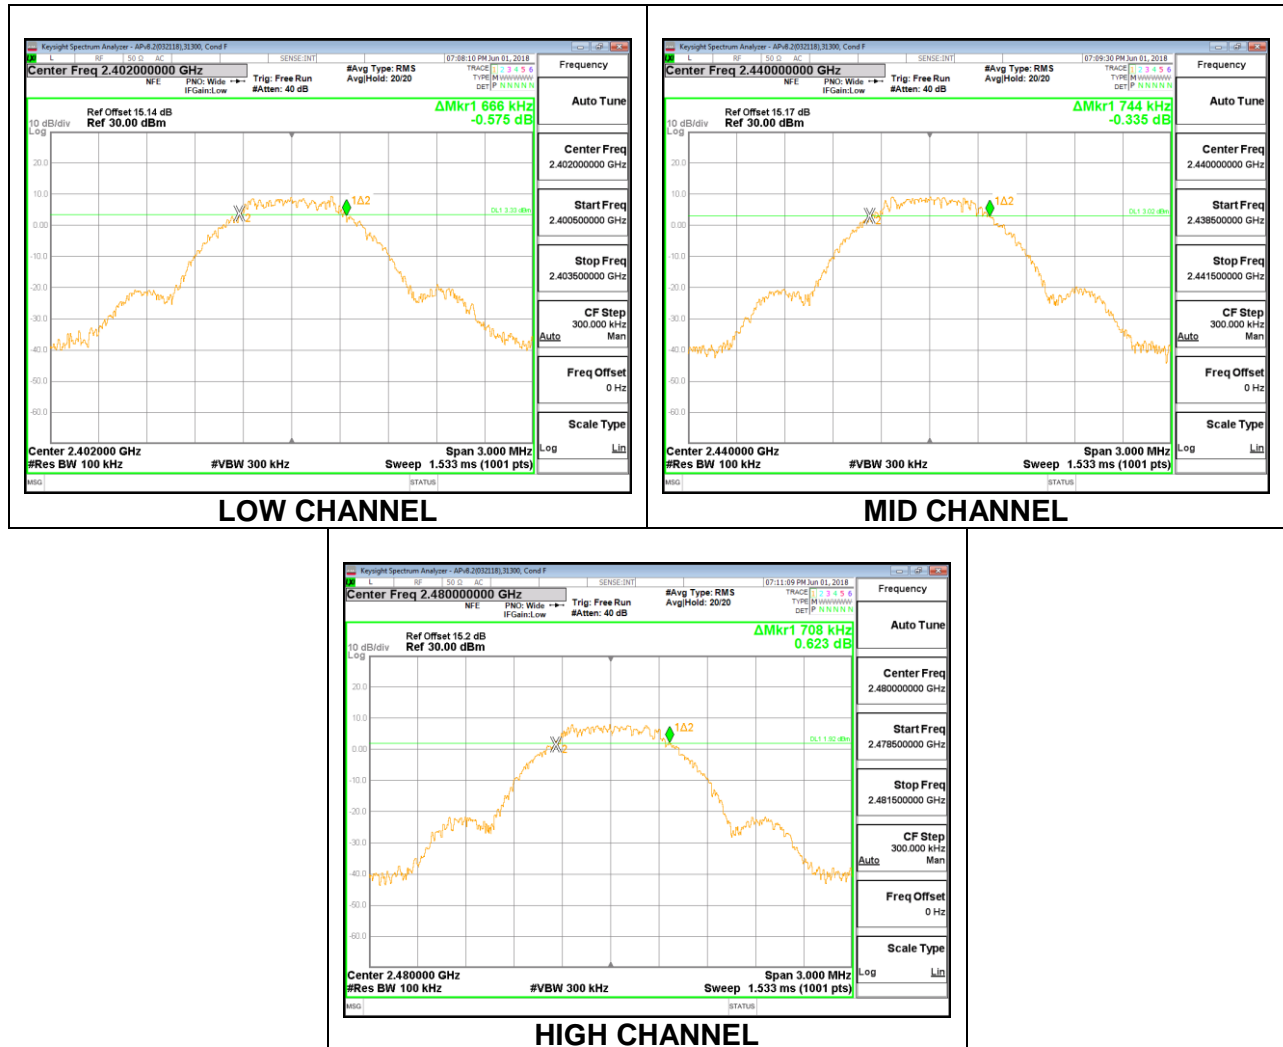

8.3.4. LOW POWER BLE (2Mbps)


Antenna 2

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2402	1.1700	0.5
Middle	2440	1.1850	0.5
High	2480	1.2150	0.5

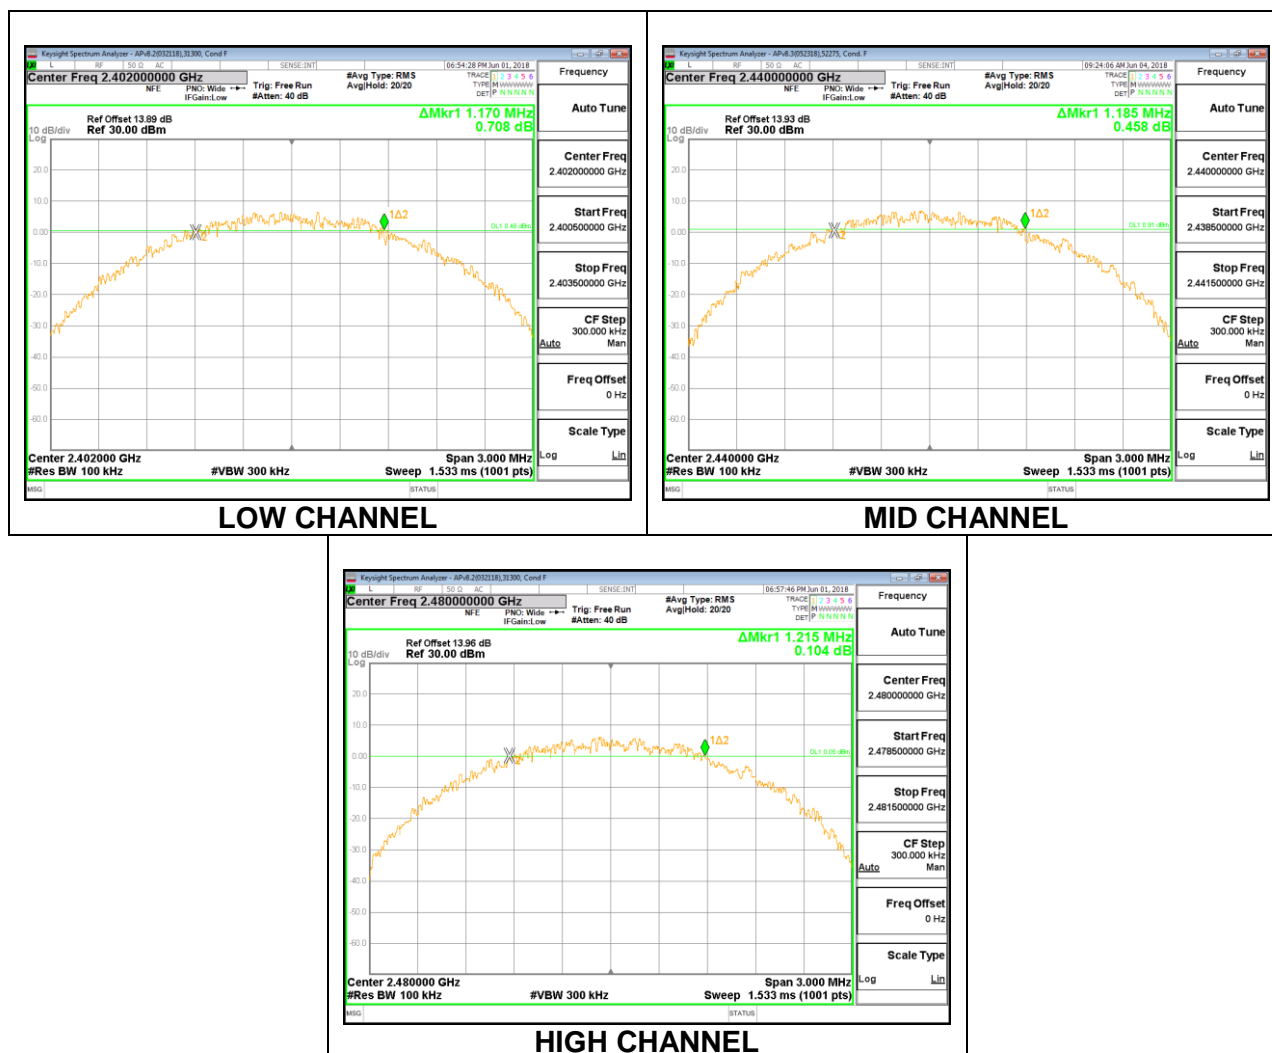

Antenna 5

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2402	1.1850	0.5
Middle	2440	1.2180	0.5
High	2480	1.1820	0.5

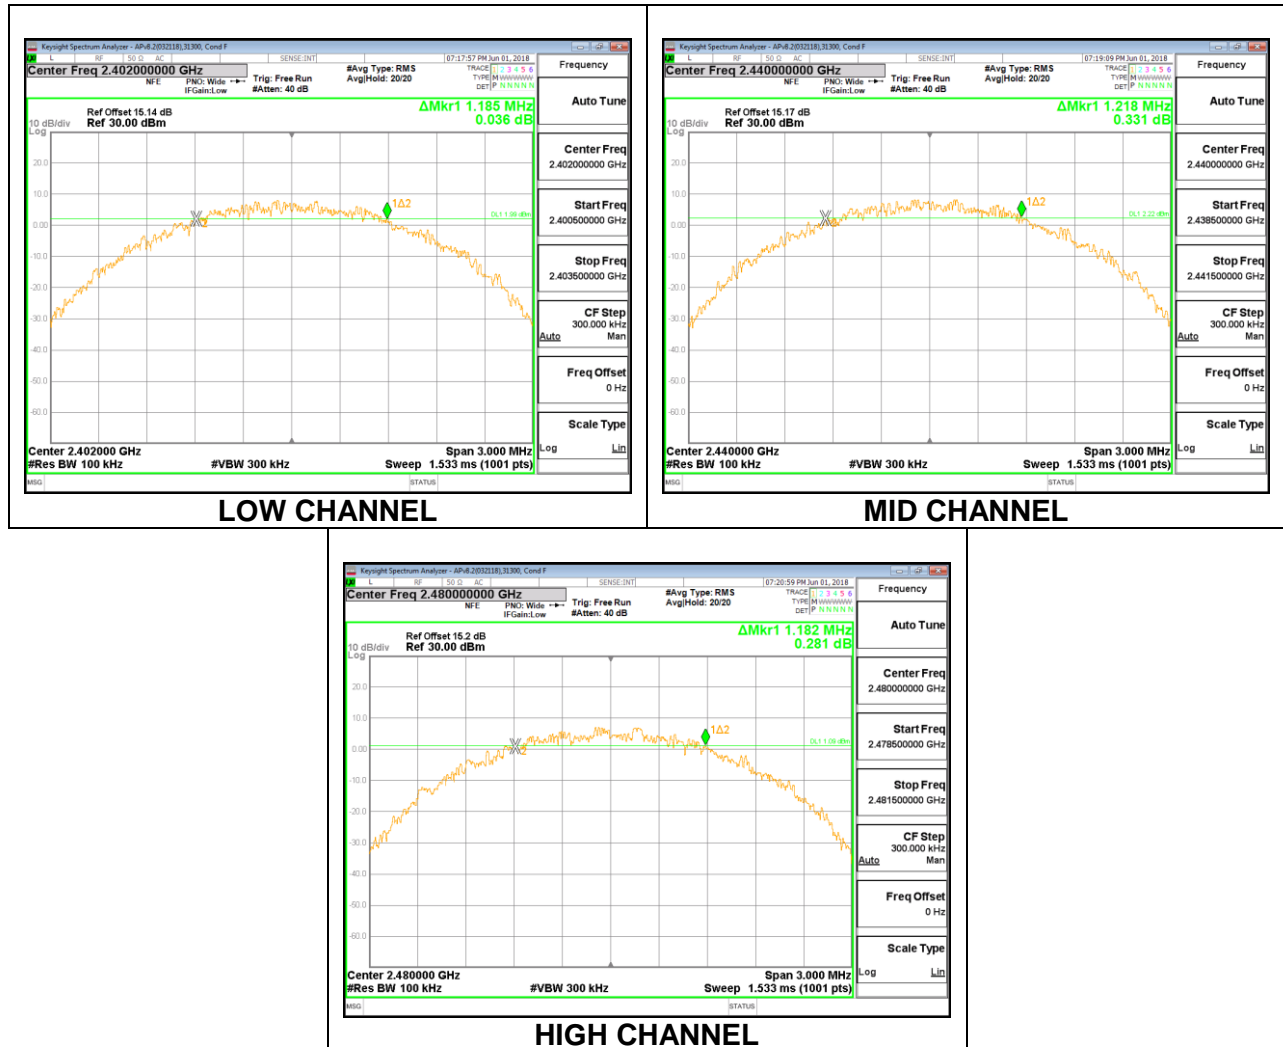

8.4.OUTPUT POWER

LIMITS

FCC §15.247 (b) (3)

RSS-247 5.4 (d)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 10.5 dB (including 10 dB pad and 0.5 dB cable) was entered as an offset in the power meter to allow for a gated peak reading of power.

RESULTS

8.4.1. HIGH POWER BLE (1Mbps)

Antenna 2

Tested By:	39919
Date:	7/27/2018

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2402	20.21	30	-9.790
Middle	2440	20.32	30	-9.680
High	2480	20.09	30	-9.910

Antenna 5

Tested By:	39919
Date:	7/27/2018

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2402	20.19	30	-9.810
Middle	2440	20.30	30	-9.700
High	2480	20.11	30	-9.890

8.4.2. HIGH POWER BLE (2Mbps)

Antenna 2

Tested By:	39919
Date:	7/27/2018

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2402	20.15	30	-9.850
Middle	2440	20.29	30	-9.710
High	2480	20.08	30	-9.920

Antenna 5

Tested By:	39919
Date:	7/27/2018

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2402	20.12	30	-9.880
Middle	2440	20.27	30	-9.730
High	2480	20.04	30	-9.960

8.4.3. LOW POWER BLE (1Mbps)

Antenna 2

Tested By:	39919
Date:	7/27/2018

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2402	10.21	30	-19.790
Middle	2440	10.33	30	-19.670
High	2480	10.13	30	-19.870

Antenna 5

Tested By:	39919
Date:	7/27/2018

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2402	10.23	30	-19.770
Middle	2440	10.31	30	-19.690
High	2480	10.14	30	-19.860

8.4.4. LOW POWER BLE (2Mbps)

Antenna 2

Tested By:	39919
Date:	7/27/2018

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2402	10.17	30	-19.830
Middle	2440	10.31	30	-19.690
High	2480	10.10	30	-19.900

Antenna 5

Tested By:	39919
Date:	7/27/2018

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2402	10.20	30	-19.800
Middle	2440	10.37	30	-19.630
High	2480	10.18	30	-19.820

8.5.AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 10.5 dB (including 10 dB pad and 0.5 dB cable) was entered as an offset in the power meter to allow for a gated average reading of power.

RESULTS

8.5.1. HIGH POWER BLE (1Mbps)

Antenna 2

Tested By:	44353
Date:	7/27/2018

Channel	Frequency (MHz)	AV power (dBm)
Low	2402	19.82
Middle	2440	19.91
High	2480	19.78

Antenna 5

Tested By:	44353
Date:	7/27/2018

Channel	Frequency (MHz)	AV power (dBm)
Low	2402	19.80
Middle	2440	19.90
High	2480	19.76

8.5.2. HIGH POWER BLE (2Mbps)

Antenna 2

Tested By:	44353
Date:	7/27/2018

Channel	Frequency (MHz)	AV power (dBm)
Low	2402	19.77
Middle	2440	19.84
High	2480	19.72

Antenna 5

Tested By:	44353
Date:	7/27/2018

Channel	Frequency (MHz)	AV power (dBm)
Low	2402	19.73
Middle	2440	19.82
High	2480	19.70

8.5.3. LOW POWER BLE (1Mbps)

Antenna 2

Tested By:	44353
Date:	7/27/2018

Channel	Frequency (MHz)	AV power (dBm)
Low	2402	9.84
Middle	2440	9.92
High	2480	9.78

Antenna 5

Tested By:	44353
Date:	7/27/2018

Channel	Frequency (MHz)	AV power (dBm)
Low	2402	9.86
Middle	2440	9.91
High	2480	9.76

8.5.4. LOW POWER BLE (2Mbps)

Antenna 2

Tested By:	44353
Date:	7/27/2018

Channel	Frequency (MHz)	AV power (dBm)
Low	2402	9.79
Middle	2440	9.89
High	2480	9.74

Antenna 5

Tested By:	44353
Date:	7/27/2018

Channel	Frequency (MHz)	AV power (dBm)
Low	2402	9.81
Middle	2440	9.93
High	2480	9.77

8.6.POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

RSS-247 (5.2) (b)




The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

RESULTS

8.6.1. HIGH POWER BLE (1Mbps)


Antenna 2

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2402	2.54	8	-5.46
Middle	2440	1.82	8	-6.19
High	2480	1.70	8	-6.30

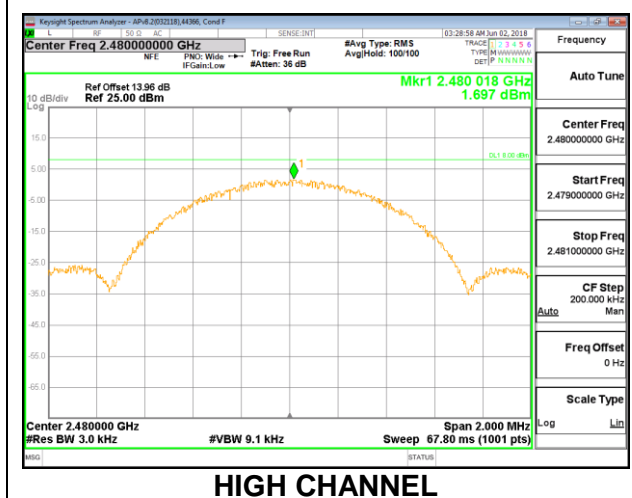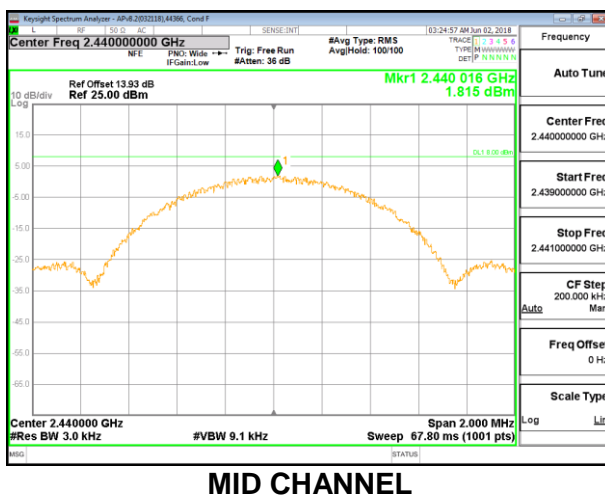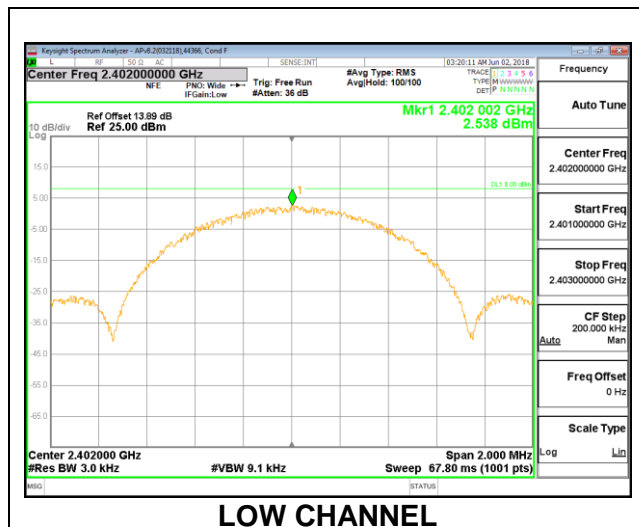


Antenna 5


Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2402	3.15	8	-4.85
Middle	2440	4.54	8	-3.46
High	2480	2.73	8	-5.27

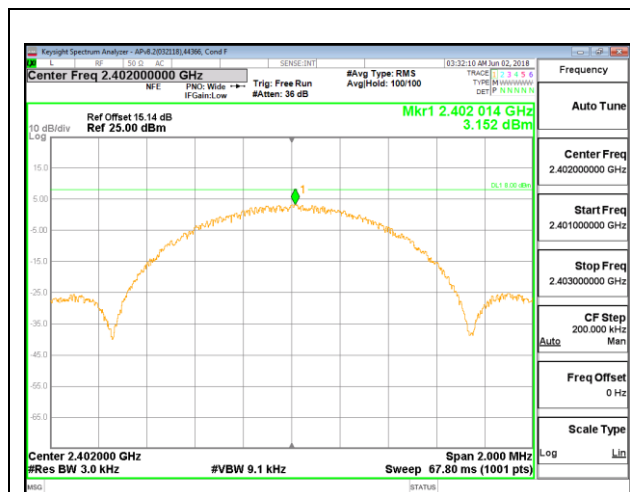

LOW CHANNEL

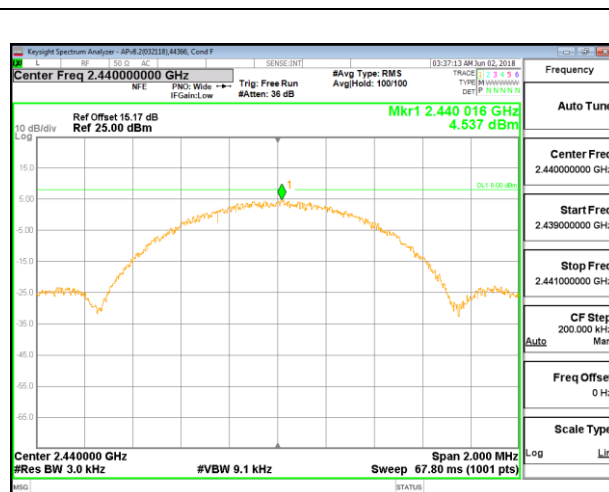

MID CHANNEL



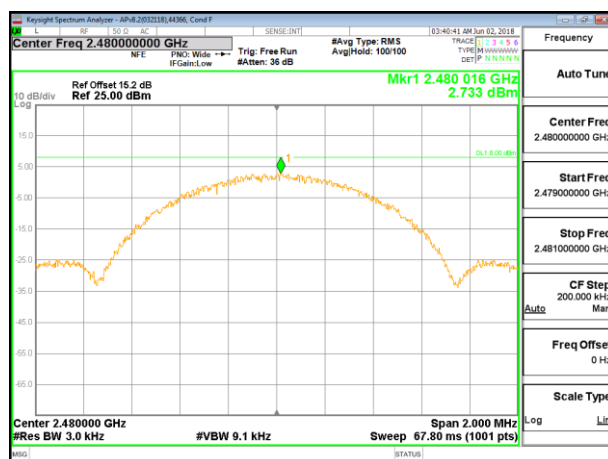


HIGH CHANNEL

8.6.2. HIGH POWER BLE (2Mbps)


Antenna 2

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2402	2.00	8	-6.00
Middle	2440	1.58	8	-6.42
High	2480	1.23	8	-6.77

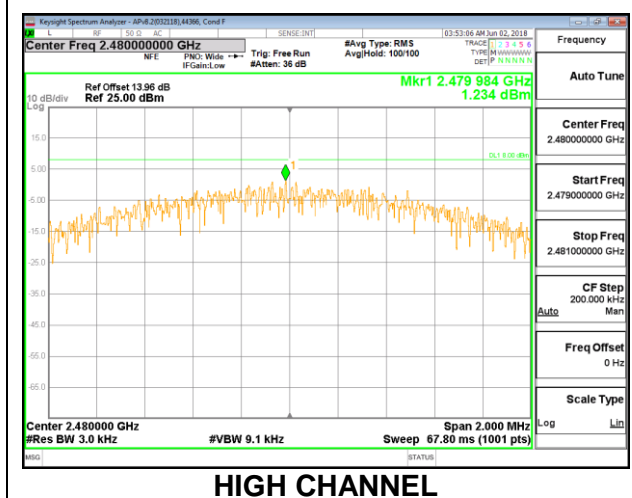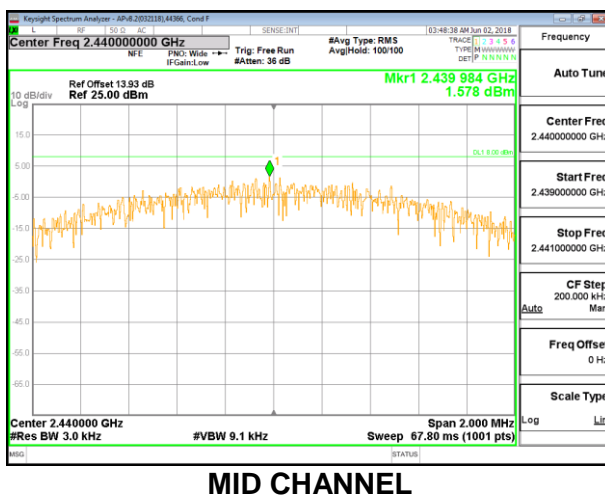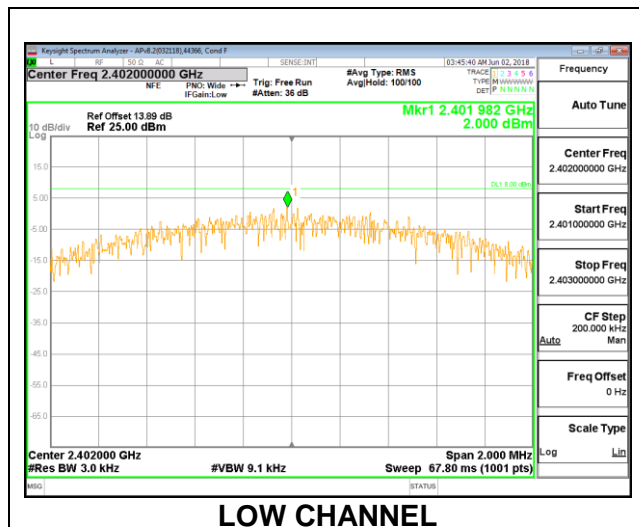

Antenna 5




Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2402	2.76	8	-5.24
Middle	2440	3.88	8	-4.13
High	2480	2.39	8	-5.61

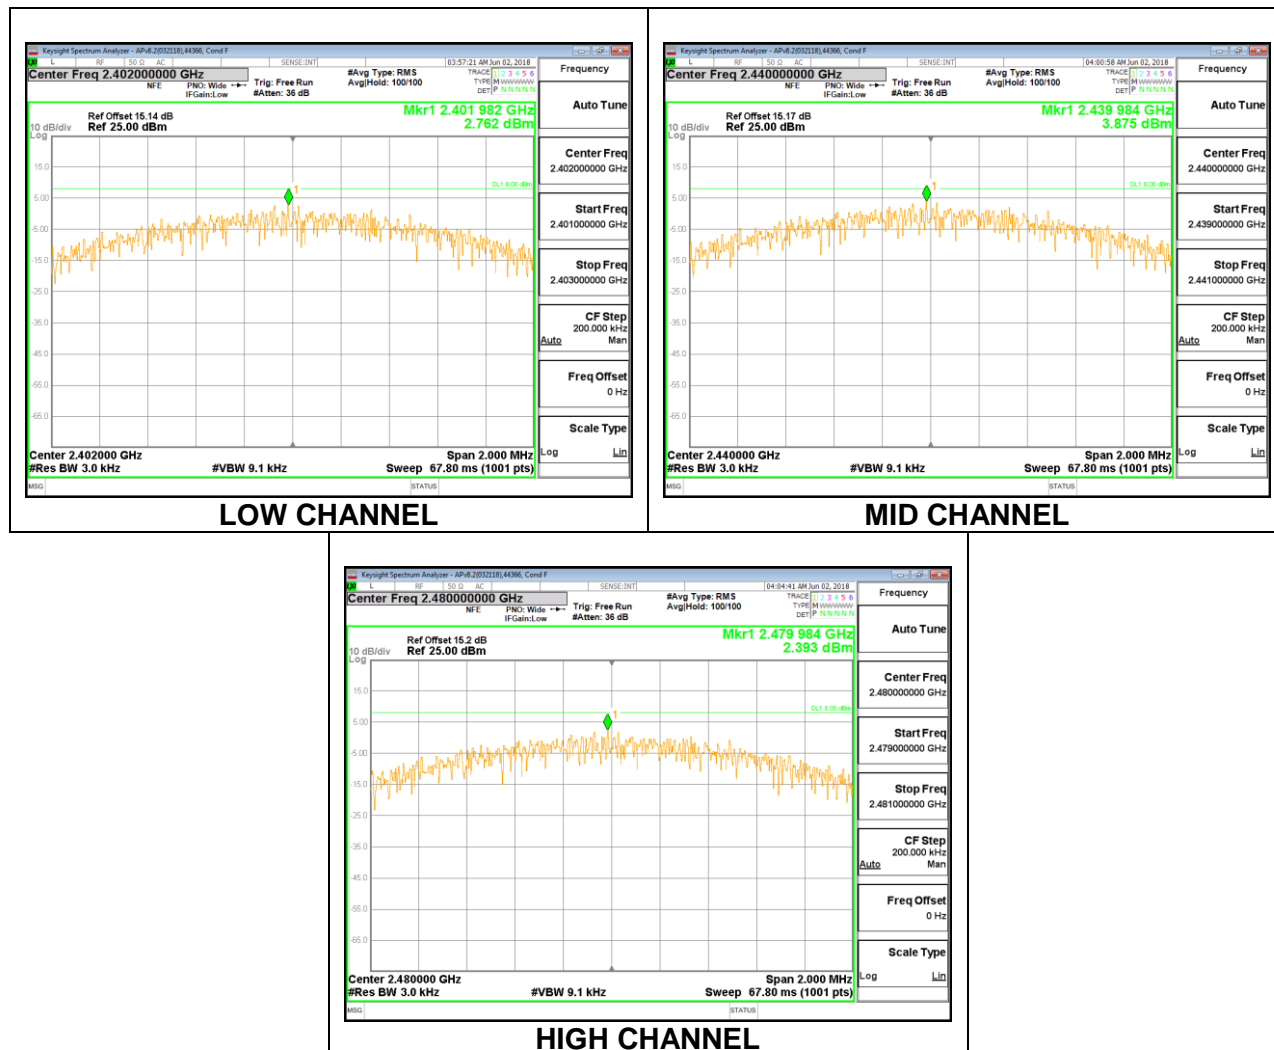

8.6.3. LOW POWER BLE (1Mbps)


Antenna 2

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2402	-9.04	8	-17.04
Middle	2440	-8.25	8	-16.25
High	2480	-9.15	8	-17.15

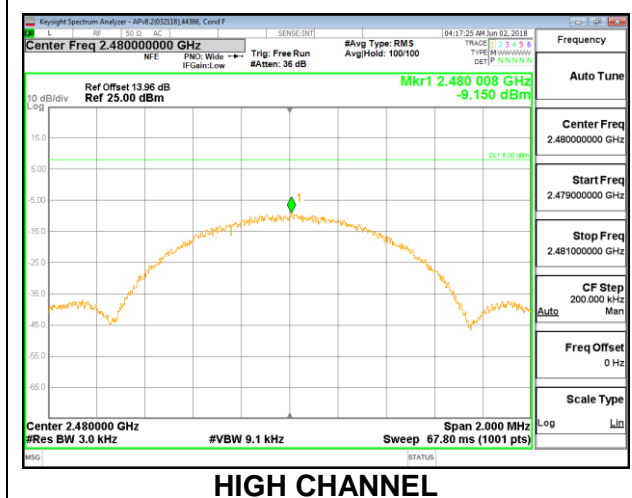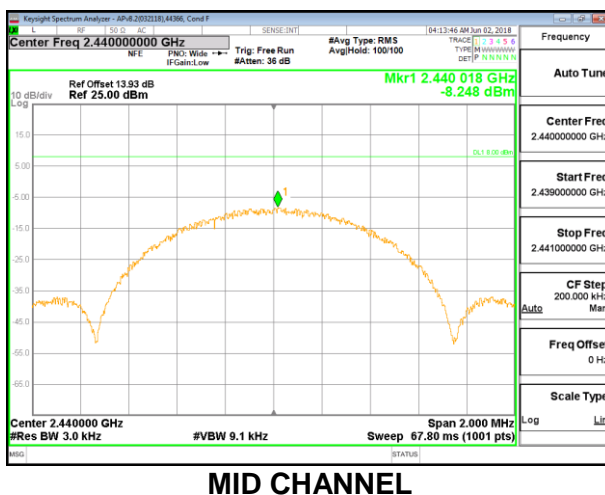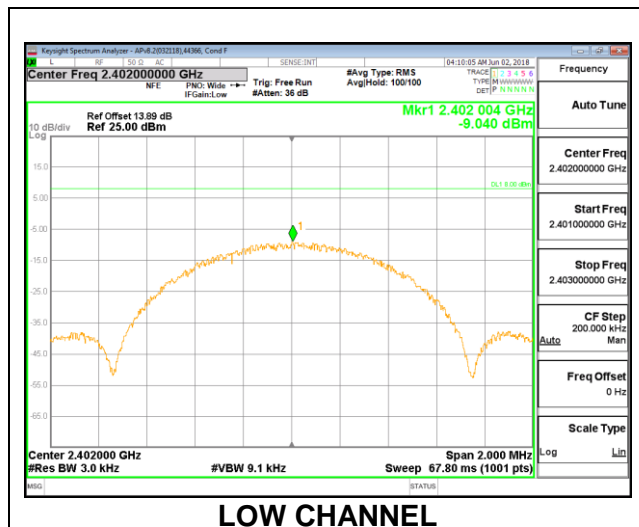

Antenna 5




Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2402	-7.51	8	-15.51
Middle	2440	-6.94	8	-14.94
High	2480	-8.67	8	-16.67

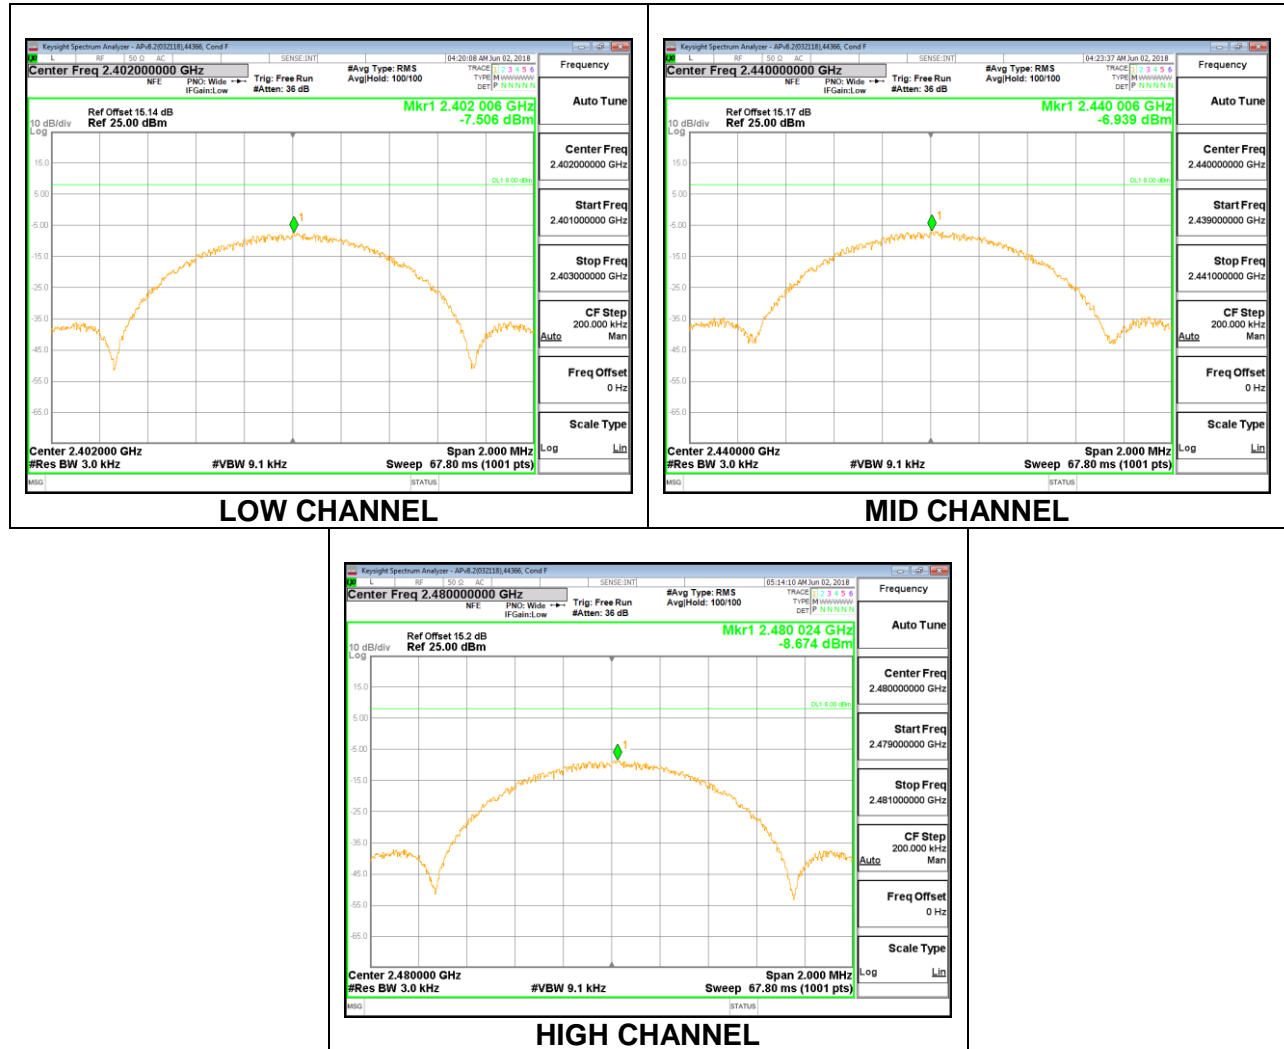

8.6.4. LOW POWER BLE (2Mbps)

Antenna 2

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2402	-9.46	8	-17.46
Middle	2440	-8.77	8	-16.77
High	2480	-10.12	8	-18.12

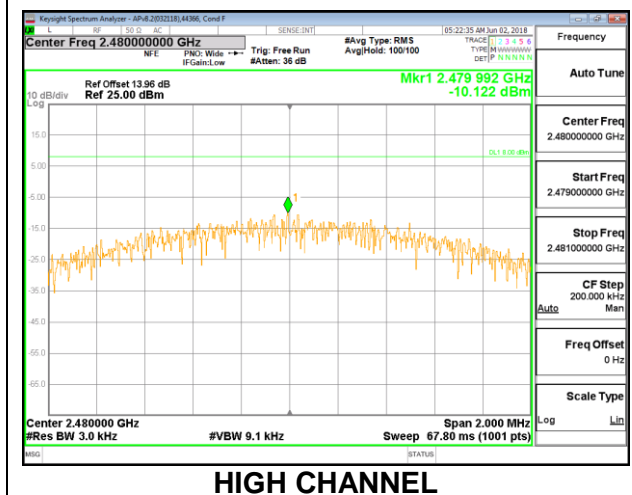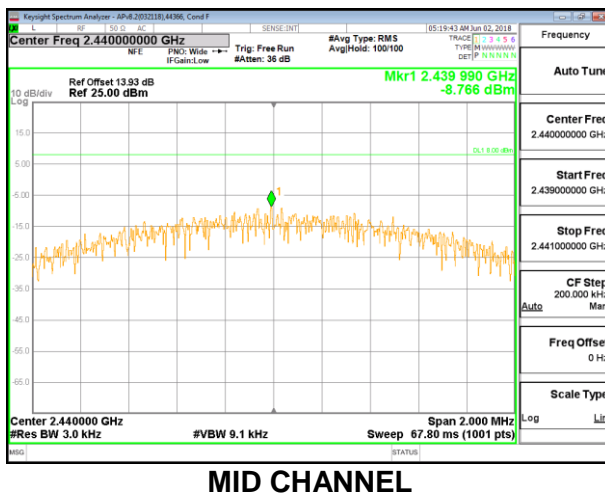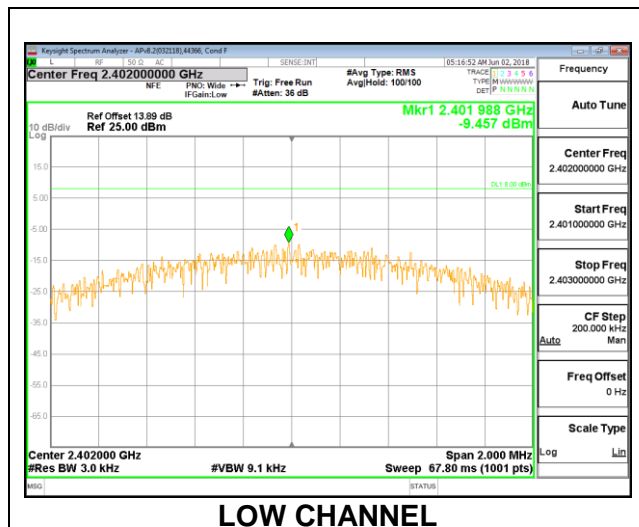

Antenna 5

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2402	-8.03	8	-16.03
Middle	2440	-7.60	8	-15.60
High	2480	-8.78	8	-16.78

