

东莞市金赞智能科技有限公司
DONGGUAN KIMCHEN INDUSTRY INTL LIMITED



PRODUCT SPECIFICATION

Shenzhen Beiliqi Technology Co., LTD	
CUSTOMER:	3-122DX01010AA-113
CUST P/N:	J30-000359-001
K C P/N:	20.5*39*0.08*80P*11TS*7MM
D E S E :	12 th September 2024
D A T E :	A.0
VERSION :	

ACCEPTANCE STAMP

PREPARED BY	MERCHANDISER	ENGINEER CHECKED BY	APPROVED BY
Huilin Yan			

Address:No2 Xisha Road Shijie Dongguan 523290 Guangdong China
Tel: 86-076986018114 Fax: 86-076986015646

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

Specification

CUST P/N

3-122DX01010AA-113

KC DESE

20.5*39*0.08*80P*11TS*7MM

Version Rev.	Before Change	DESCRIPTION(Content Or Reason ForChanged)	Date	Revisor
A.0	--	Initial Release	2024/9/12	Huilin

PREPARED BY

ENGINEER CHECKED BY

Huilin Yan

Jin Li

Address: No2 Xisha Road Shijie Dongguan 523290 Guangdong China

Tel: 86-076986018114 Fax: 86-076986015646


[Http://www.jzcoil.com](http://www.jzcoil.com)

FilNo: KC-JZ-09-008

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

			CUST P/N	3-122DX01	010AA-113	
Specification			KC DESE	20.5*39*0.08*80P*11TS*7MM		

1. (OVERALL DIMENSIONS OF PRODUCTS):

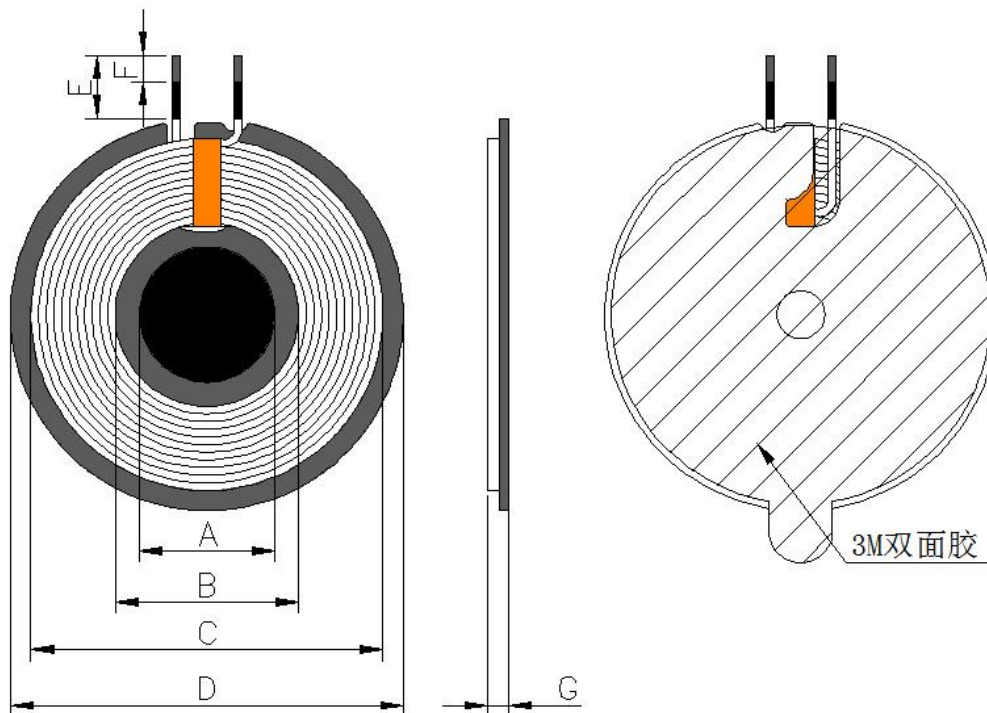

Unit: mm

A	B	C	D	E	F	G
15±1	20.5±0.5	39±0.5	43.5±0.5	7±1	3±1	2.15±0.2

PS: E is Magnetic outer lead length ; G Includes incoming wire, not include release paper.

Turns	Wire Diameter	Wdg. Type Spred/Close	Wdg. Direction	Lead wire Intersect Yes/Not	Coil Positive/Anti Paste
11TS	0.08*80P (Hot wind Strand wire)	Close	Anticlockwise	Yes	Anti/Paste

All materials are required to be ROHS compliant

PREPARED BY	ENGINEER CHECKED BY
Huilin Yan	Jin Li

Address: No2 Xisha Road Shijie Dongguan 523290 Guangdong China

Tel: 86-076986018114 Fax: 86-076986015646

Http://www.jzcoil.com

FilNo: KC-JZ-09-008

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

Specification

CUST P/N

3-122DX01010AA-113

KC DESE

20.5*39*0.08*80P*11TS*7MM

2. ELECTRICAL CHARACTERISTICS:

TEMPERATURE: $25 \pm 10^{\circ}\text{C}$, RELATIVE HUMIDITY: $65 \pm 10\%$

NO.	ITEM	TERMINAL	SPECIFICATION	TEST FREQUENCY	TEST EQUIPMENTS
1	IND	S-F	Coil+Ferrite: $7.7\mu\text{H} \pm 10\%$	100kHz/1V	LCZ METER 1062

3. BILL OF MATERIAIS:

NO.	Material name	Description	Material Code	Vendor code
1	Copper Wire	0.08*80P Hot wind strand wire	JX-2U-F-0008	CX
2	Large Ferrite	$643.5 \pm 0.5 * 5.3 * 0.8$ (With holes, with double L slots, Intermediate groove 3mm)	GCP-T-00298	HYT
3	Small Ferrite	Hard magnetic circle $15 * 0.7\text{H}$ No holes or grooves	GCP-T-00305	LX
4	Large double-sided tape	3M double sides adhesive tape 9448A $42 * 0.12\text{H}$ with hand tear	SMJ-3M-00077	HWD
5	Small double-sided tape	Round ordinary double-sided tape $13 * 0.08\text{H}$ with hand tear	SMJ-T-0082	HWD
6	Glue	JS-E7202 (thickenig) white glues	E7202W	HZY
7	Tin	Environmentally friendly lead-free	Lead-free high	XC

PREPARED BY

ENGINEER CHECKED BY

Huilin Yan

Jin Li

Address: No2 Xisha Road Shijie Dongguan 523290 Guangdong China

Tel: 86-076986018114 Fax: 86-076986015646

Http://www.jzcoil.com

FilNo: KC-JZ-09-008

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

Specification		CUST P/N	3-122DX01010AA-113	
		KC DESE	20.5*39*0.08*80P*11TS*7MM	
		solder bar	temperature tin bar	
8	Gold finger tape	3mm	High temperature adhesive tape 5MM	JRM
9	Black heat-shrink tubing	Φ1.0*4MM	/	/

PREPARED BY

Huilin Yan

ENGINEER CHECKED BY

Jin Li

Address: No2 Xisha Road Shijie Dongguan 523290 Guangdong China

Tel: 86-076986018114 Fax: 86-076986015646

[Http://www.jzcoil.com](http://www.jzcoil.com)

FilNo: KC-JZ-09-008