

# FCC Test Report

Report No.: AGC01040230701FR01

FCC ID	:	2AF9HBK9
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	Bike Speed & Cadence Sensor
BRAND NAME	:	COOSPO
MODEL NAME	:	BK9, BK9S, BK9C, BK618, BK618S, BK618C, BK10, BK20, BK30, BK40, BK60, BK70, BK80, BK90
APPLICANT	:	Shenzhen COOSPO Tech Co., Ltd.
DATE OF ISSUE	:	Aug. 16, 2023
STANDARD(S)	:	FCC Part 15.247
REPORT VERSION	:	V1.0







#### **REPORT REVISE RECORD**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Aug. 16, 2023	Valid	Initial Release



## TABLE OF CONTENTS

1. VERIFICATION OF COMPLIANCE	
2. GENERAL INFORMATION	5
<ul> <li>2.1. PRODUCT DESCRIPTION</li></ul>	5 6 6 6 6
3. MEASUREMENT UNCERTAINTY	7
4. DESCRIPTION OF TEST MODES	8
5. SYSTEM TEST CONFIGURATION	9
5.1. CONFIGURATION OF TESTED SYSTEM 5.2. EQUIPMENT USED IN TESTED SYSTEM 5.3. SUMMARY OF TEST RESULTS	9 9
6. TEST FACILITY	
7. PEAK OUTPUT POWER	
7.1. MEASUREMENT PROCEDURE 7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 7.3. LIMITS AND MEASUREMENT RESULT	11
8. BANDWIDTH	16
8.1. MEASUREMENT PROCEDURE 8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 8.3. LIMITS AND MEASUREMENT RESULTS	16
9. CONDUCTED SPURIOUS EMISSION	23
9.1. MEASUREMENT PROCEDURE 9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 9.3. MEASUREMENT EQUIPMENT USED 9.4. LIMITS AND MEASUREMENT RESULT	23 23
10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY	35
10.1. MEASUREMENT PROCEDURE 10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 10.3. MEASUREMENT EQUIPMENT USED 10.4. LIMITS AND MEASUREMENT RESULT	35 35
11. RADIATED EMISSION	39
11.1. MEASUREMENT PROCEDURE 11.2. TEST SETUP 11.3. LIMITS AND MEASUREMENT RESULT 11.4. TEST RESULT	40 41
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	55
APPENDIX B: PHOTOGRAPHS OF EUT	55



# **1. VERIFICATION OF COMPLIANCE**

Applicant	Shenzhen COOSPO Tech Co., Ltd.	
Address	6th Floor(south), Building A, Dingxin Science Park, 67 District, Bao'an, Shenzhen, China	
Manufacturer	Shenzhen COOSPO Tech Co., Ltd.	
Address	6th Floor(south), Building A, Dingxin Science Park, 67 District, Bao'an, Shenzhen, China	
Factory	Shenzhen COOSPO Tech Co., Ltd.	
Address	6th Floor(south), Building A, Dingxin Science Park, 67 District, Bao'an, Shenzhen, China	
Product Designation	Bike Speed & Cadence Sensor	
Brand Name	COOSPO	
Test Model	ВК9	
Series Model         BK9S, BK9C, BK618, BK618S, BK618C, BK10, BK20, BK30, BK40, B           BK70, BK80, BK90		
Declaration of Difference All the same except for the model name		
Date of receipt of test item	Jul. 21, 2023	
Date of test	Jul. 21, 2023 to Aug. 16, 2023	
Deviation	No any deviation from the test method	
Condition of Test Sample	Normal	
Test Result	Pass	
Report Template	AGCRT-US-BLE/RF	

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC part 15.247.

Prepared By n Duan Alan Duan Aug. 16, 2023 (Project Engineer) Reviewed By Calvin Liu Aug. 16, 2023 (Reviewer) Zhan Approved By Max Zhang Aug. 16, 2023 (Authorized Officer)



# 2. GENERAL INFORMATION

## 2.1. PRODUCT DESCRIPTION

The EUT is designed as a "Bike Speed & Cadence Sensor". It is designed by way of utilizing the GFSK technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz	
RF Output Power	-3.014dBm (Max)	
Bluetooth Version	V5.0	
Modulation	BR □GFSK, EDR □π /4-DQPSK, □8DPSK BLE ⊠GFSK 1Mbps ⊠GFSK 2Mbps	
Number of channels	40 Channel	
Antenna Designation	PCB Antenna (Comply with requirements of the FCC part 15.203)	
Antenna Gain -1.2dBi		
Hardware Version V1.2		
Software Version	V1.1.7	
Power Supply	DC 3.0V by battery	

## 2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
2400~2483.5MHz	0	2402 MHz
	1	2404 MHz
	:	:
	38	2478 MHz
	39	2480 MHz



#### 2.3. RELATED SUBMITTAL(S)/GRANT(S)

This submittal(s) (test report) is intended for FCC ID: 2AF9HBK9 filing to comply with the FCC Part 15.247 requirements.

#### 2.4. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

#### **2.5. SPECIAL ACCESSORIES**

Refer to section 5.2.

#### 2.6. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

#### 2.7. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device. For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.



# **3. MEASUREMENT UNCERTAINTY**

The reported uncertainty of measurement y  $\pm U$ , where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 3.1 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 4.0 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.8 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	$U_{c} = \pm 2.7 \%$
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$



# 4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel TX_2402MHz_GFSK_1Mbps
2	Middle channel TX_2440MHz_GFSK_1Mbps
3	High channel TX_2480MHz_GFSK_1Mbps
4	Low channel TX_2402MHz_GFSK_2Mbps
5	Middle channel TX_2440MHz_GFSK_2Mbps
6	High channel TX_2480MHz_GFSK_2Mbps

Note:

1. Only the result of the worst case was recorded in the report, if no other cases.

2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.

3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.

Software Setting

🛸 Direct Te	st Mode Tool				-	
Menu						
COM Pe						
Port N		Refresh				
🔵 💽 Tra		ceiver				
			-Common Rad	lio Control		
	e channel Multiple ch	nannels	Run Time			
			Run lime			ms
		1 A. 1 V.			LE 1Mbps	
					ша тжора	
			l			
Log Lv.I						<b>a</b>
	INFO> Port PHY	Length	Power	Channel		
08:59:22	INFO> COM11 2					Ĭ
08:59:22	INFO> Start TX					
08:59:22	INFO> ####################################		**********			
	INFO> Infinite Trasmitte					
08:59:22	INFO> ####################################		***==******			
09:00:09	INFO> Start Transmitter					
09:00:09	INFO> Port PHY	Length	Power	Channel		
09:00:09	INFO> COM11 1					
09:00:09	INFO> Start TX					
09:00:09	INFO> ####################################		*******			
	INFO> Infinite Trasmitte					
09:00:09	INFO> ####################################	*******	*******			
New New	dic Semiconductor					
NOT						



# **5. SYSTEM TEST CONFIGURATION**

## **5.1. CONFIGURATION OF TESTED SYSTEM**

Radiated Emission Configure:

EUT

Conducted Emission Configure:

EUT	AE

#### **5.2. EQUIPMENT USED IN TESTED SYSTEM**

ltem	Equipment	Model No.	ID or Specification	Remark
1	Bike Speed & Cadence Sensor	BK9	2AF9HBK9	EUT
2	Control Box	N/A	USB-TTL	AE

#### 5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
15.247 (b)(3)	Peak Output Power	Compliant
15.247 (a)(2)	6 dB Bandwidth	Compliant
15.247 (d)	Conducted Spurious Emission	Compliant
15.247 (e)	Maximum Conducted Output Power Density	Compliant
15.209	Radiated Emission	Compliant
15.207	Conducted Emission	Not applicable



# 6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Designation Number	CN1259
FCC Test Firm Registration Number	975832
A2LA Cert. No.	5054.02
Description	Attestation of Global Compliance (Shenzhen) Co., Ltd is accredited by A2LA

# TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Feb. 18, 2023	Feb. 17, 2024
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Jun. 01, 2023	May 31, 2024
2.4GHz Filter	EM Electronics	2400-2500MHz	N/A	Mar. 22, 2022	Mar. 21, 2024
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Oct. 31, 2021	Oct. 30, 2023
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Mar. 23, 2023	Mar. 22, 2024
Broadband Preamplifier	ETS LINDGREN	3117-PA	00225134	Sep. 02, 2022	Sep. 01, 2024
ANTENNA	SCHWARZBECK	VULB9168	494	Jan. 05, 2023	Jan. 04, 2025
Test software	Tonscend	JS32-RE (Ver.2.5)	N/A	N/A	N/A



# 7. PEAK OUTPUT POWER


## 7.1. MEASUREMENT PROCEDURE

For peak power test:

- 1. Connect EUT RF output port to the Spectrum Analyzer
- 2. RBW≥DTS bandwidth
- 3. VBW≥3\*RBW.
- 4. SPAN≥VBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.

Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external cables.

#### 7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) PEAK POWER TEST SETUP

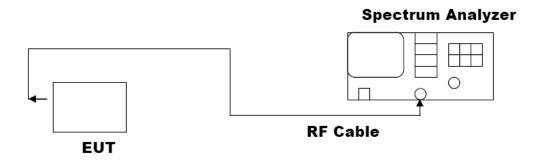





#### 7.3. LIMITS AND MEASUREMENT RESULT

Test Data of Conducted Output Power				
Test Mode	Test Channel (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail
	2402	-3.042	≪30	Pass
GFSK 1M	2440	-3.469	≪30	Pass
	2480	-3.722	≪30	Pass
	2402	-3.014	≪30	Pass
GFSK 2M	2440	-3.328	≪30	Pass
	2480	-3.596	≪30	Pass


#### **Test Graphs of Conducted Output Power**

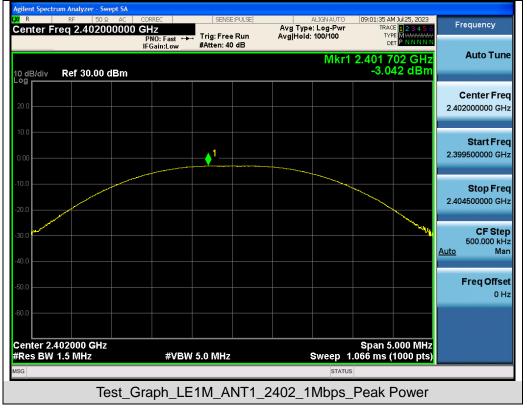



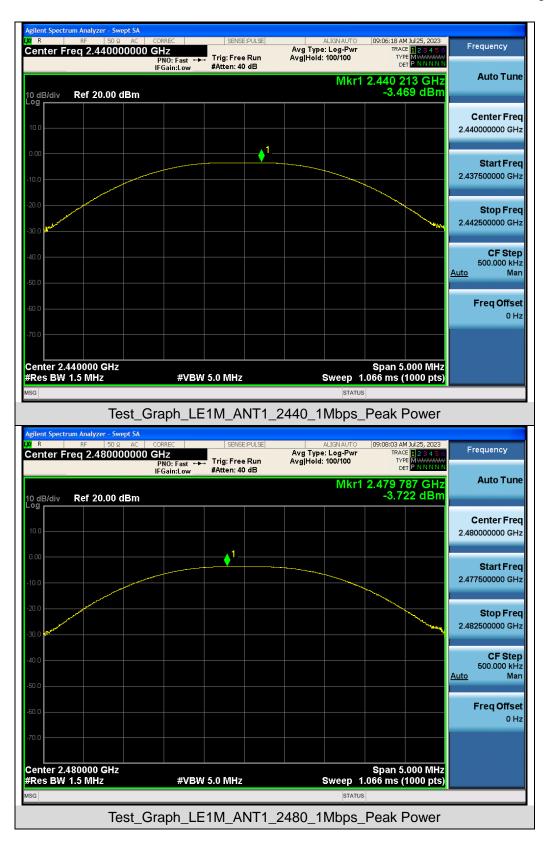



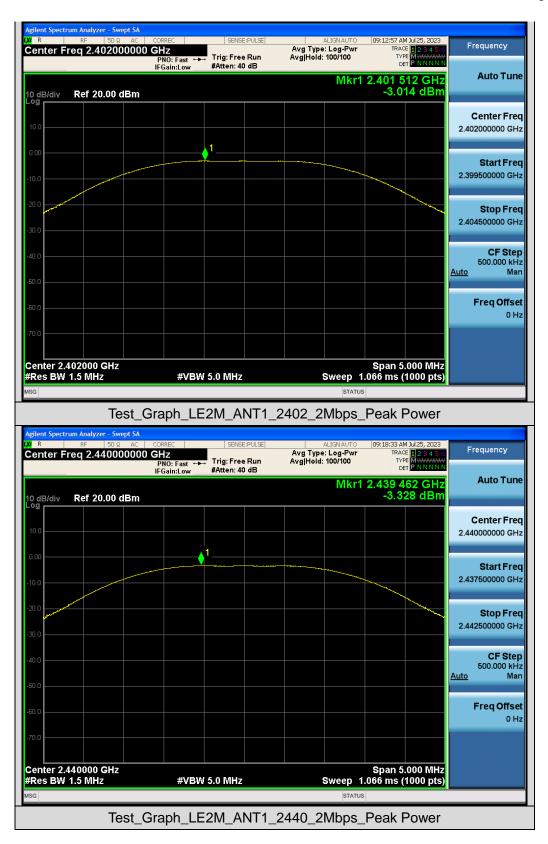







# 8. BANDWIDTH

#### **8.1. MEASUREMENT PROCEDURE**

6dB bandwidth:

- 1. Connect EUT RF output port to the Spectrum Analyzer
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 kHz, VBW≥3×RBW.
- 4. Set SPA Trace 1 Max hold, then View.

Occupied bandwidth:

- 1. Connect EUT RF output port to the Spectrum Analyzer
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hoping channel The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
  4. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.


## 8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 7.2.

8.3. LIMITS AND MEASUREMENT RESULTS	

Test Data of Occupied Bandwidth and DTS Bandwidth					
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-6dB Bandwidth(MHz)	-6dB Bandwidth Limits (MHz)	Pass or Fail
	2402	1.033	0.686	≥0.5	Pass
GFSK 1M	2440	1.036	0.688	≥0.5	Pass
	2480	1.036	0.686	≥0.5	Pass
	2402	2.051	1.181	≥0.5	Pass
GFSK 2M	2440	2.053	1.177	≥0.5	Pass
	2480	2.055	1.177	≥0.5	Pass



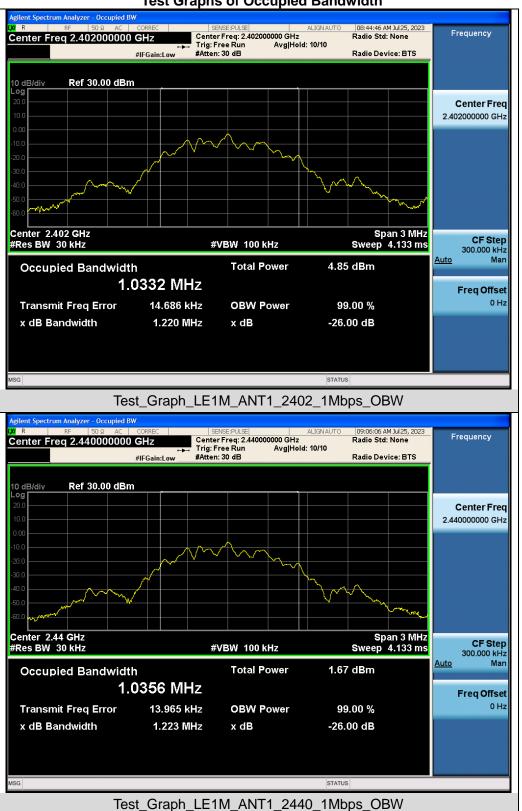

#### Test Graphs of Occupied Bandwidth














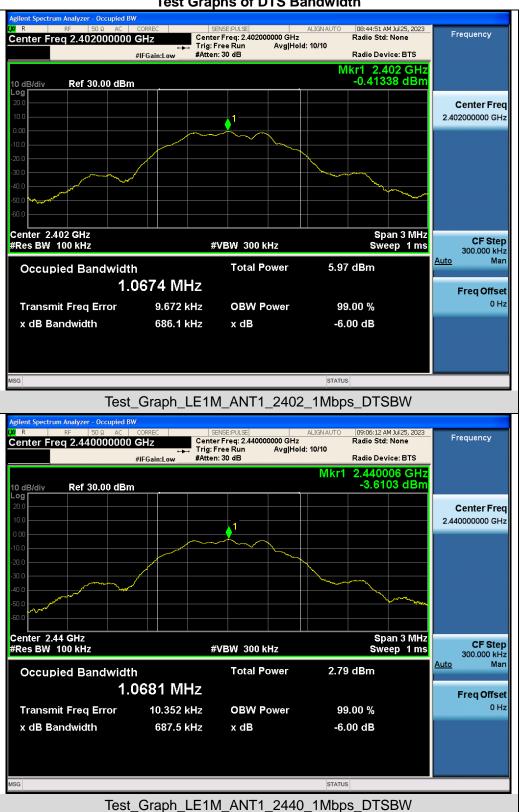


#### Test Graphs of DTS Bandwidth







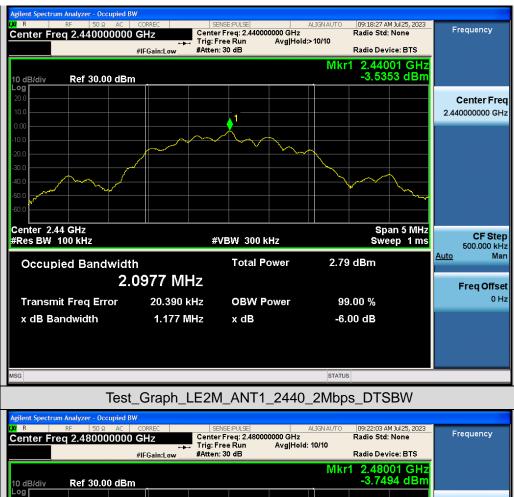





# 9. CONDUCTED SPURIOUS EMISSION

#### 9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

#### 9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 7.2.

#### 9.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6.

#### 9.4. LIMITS AND MEASUREMENT RESULT


LIMITS AND MEASUREMENT RESULT					
Anniisekis Limite	Measurement Result				
Applicable Limits	Test Data	Criteria			
In any 100 kHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power.	At least -20dBc than the reference level	PASS			






#### Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands



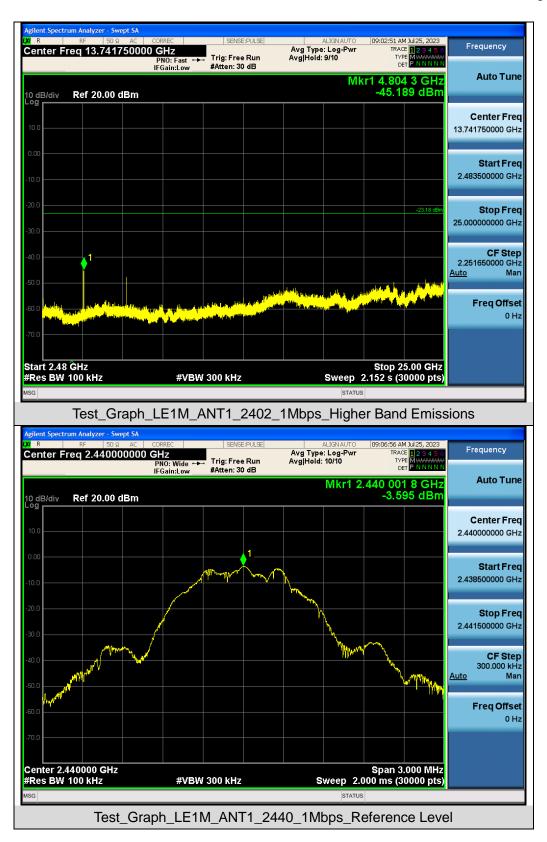



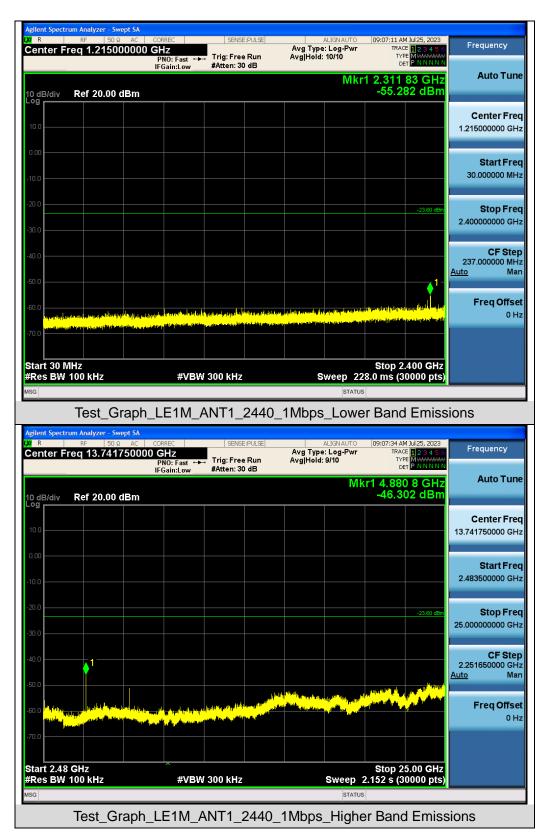













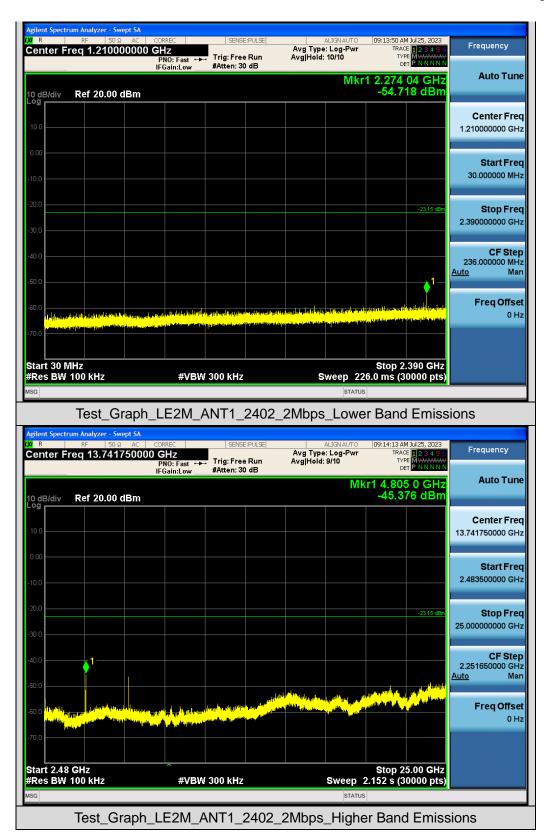









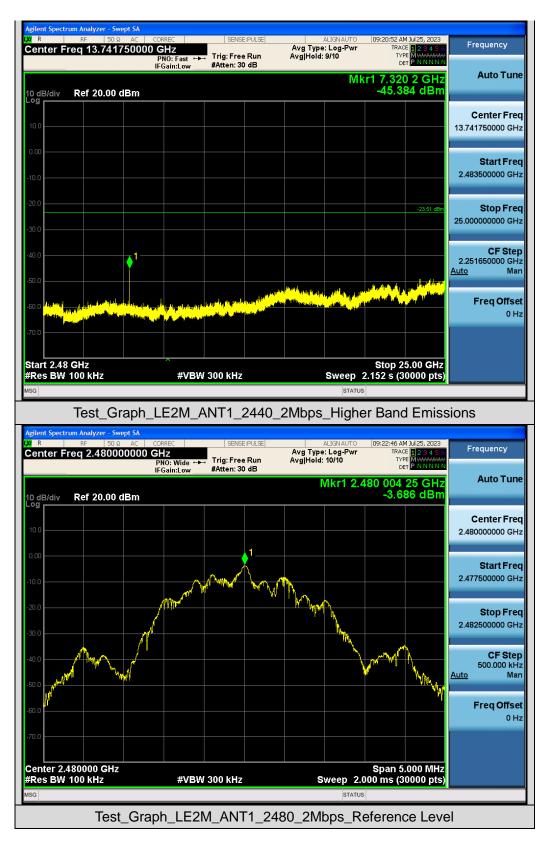



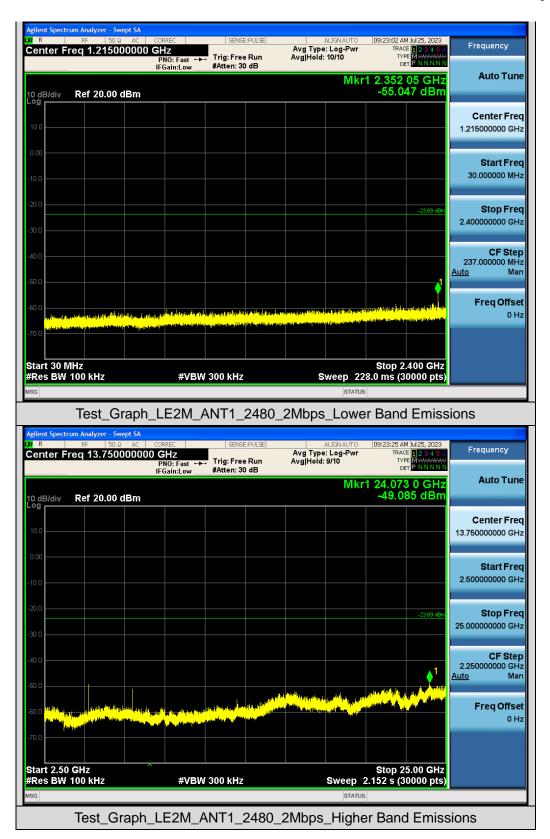



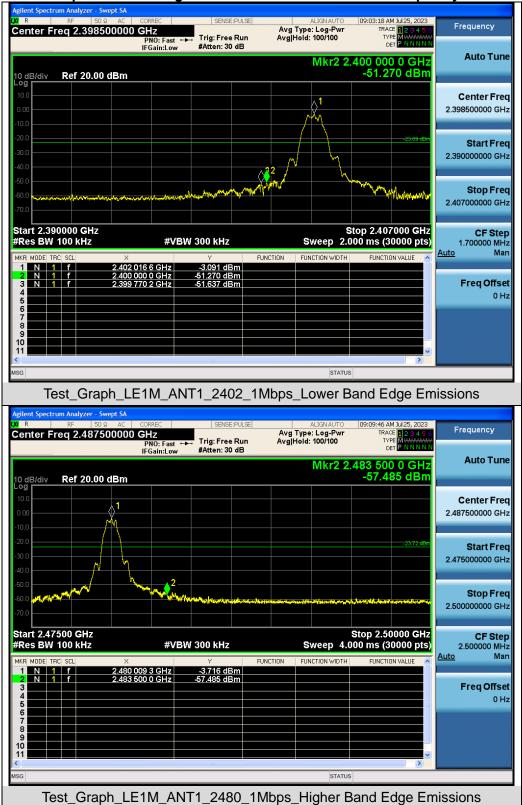

#### Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands







# **10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY**

#### **10.1. MEASUREMENT PROCEDURE**

- (1). Connect EUT RF output port to the Spectrum Analyzer
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set the SPA Trace 1 Max hold, then View.

Note: The method of PKPSD in the KDB 558074 item 8.4 was used in this testing.

#### **10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)**

Refer to Section 7.2.

#### **10.3. MEASUREMENT EQUIPMENT USED**

Refer to Section 6.

#### **10.4. LIMITS AND MEASUREMENT RESULT**


Test Data of Conducted Output Power Spectral Density				
Test Mode	Test Channel (MHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail
	2402	-20.424	<b>≤8</b>	Pass
GFSK 1M	2440	-20.998	≪8	Pass
	2480	-21.121	≪8	Pass
	2402	-22.606	<b>≤8</b>	Pass
GFSK 2M	2440	-22.941	≪8	Pass
	2480	-23.171	≪8	Pass






#### Test Graphs of Conducted Output Power Spectral Density



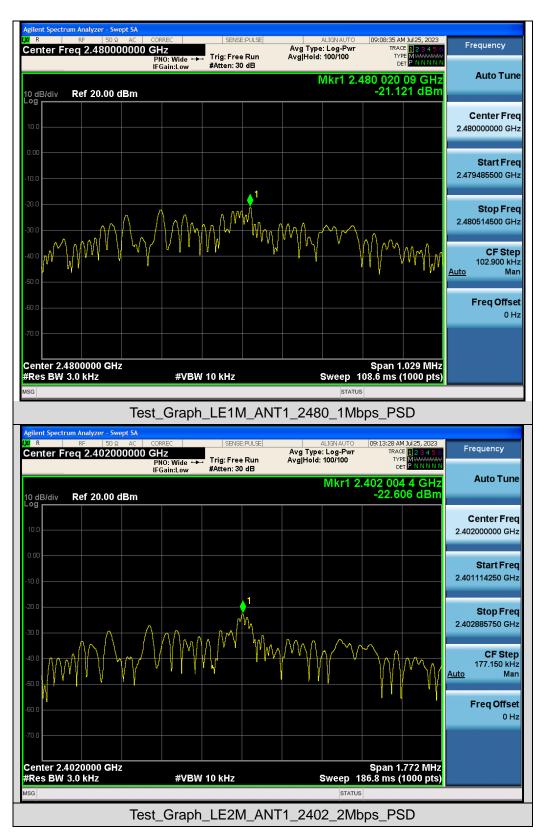



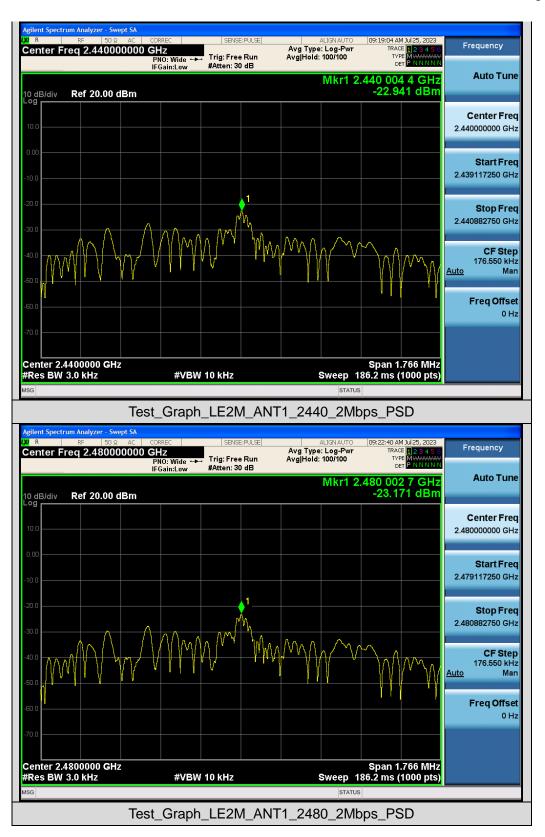




## **11. RADIATED EMISSION**

#### **11.1. MEASUREMENT PROCEDURE**

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.



### 11.2. TEST SETUP

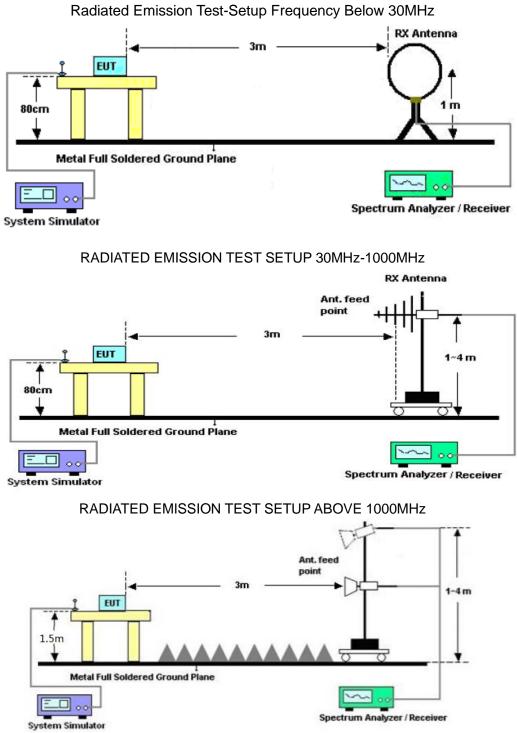



## **11.3. LIMITS AND MEASUREMENT RESULT**

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

## 11.4. TEST RESULT

## Radiated emission below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.



32

EUT	Bike Speed & Cadence Sensor	Model Name	BK9	
Temperature25° C		Relative Humidity	55.4%	
Pressure	Pressure 960hPa		Normal Voltage	
Test Mode	Mode 4	Antenna Horizontal		
72.0 dBu∀/m				
			Limit: — Margin: —	


#### Radiated emission from 30MHz to 1000MHz

utruction and a	He Her Horth	1 4. Maridan	uhantukertu	yadme v <sup>an</sup> angah	www.	2 Martin Hannahar Judik	www.www.laylo						
-8 30.000	) 40	50	60 7	0 80		(MHz)	3	00 400	500	) 600	700	1000.0	)00
No	. Mk.	Fi	req.	Read Lev	<u> </u>	Correct Factor	Measur ment	e- Lin	nit	Ove	ər		
		М	Hz	dBu	١V	dB	dBuV/m	dB	/m	dB		Detec	tor
1		47.3	253	8.1	18	13.39	21.57	40.0	00	-18.4	43	pea	k
2		129.0	146	7.1	11	15.86	22.97	43.5	50	-20.	53	pea	k
3	4	452.7	196	5.6	64	24.65	30.29	46.0	00	-15.	71	pea	k
4		522.7	179	5.8	31	25.02	30.83	46.0	00	-15.1	17	pea	k
5		593.0	497	6.5	54	24.82	31.36	46.0	00	-14.(	64	pea	k
6	*	896.9	964	6.	72	31.42	38.14	46.0	00	-7.8	6	pea	k

## **RESULT: PASS**



EUT	Bike Speed & Cadence Sensor	Model Name	BK9
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna	Vertical

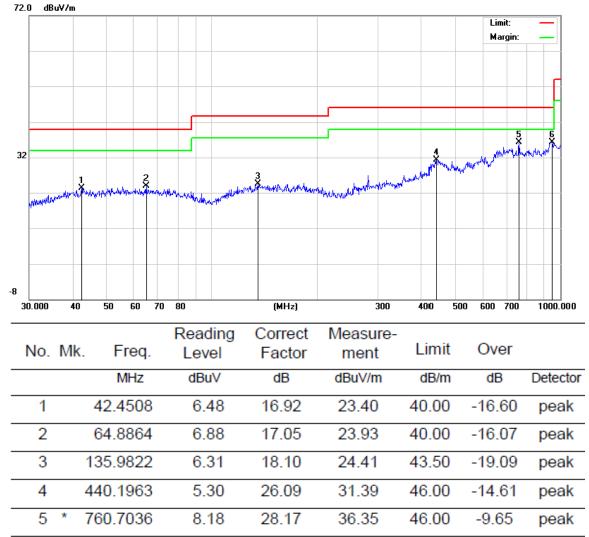

# RESULT: PASS Note:

6

1. Factor=Antenna Factor + Cable loss, Over= Measurement -Limit.

948,7609

2. All test modes had been tested. The mode 4 is the worst case and recorded in the report.

5.66

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

30.65

36.31

46.00

-9.69

peak



#### Radiated emission above 1GHz

EUT	Bike Speed & Cadence Sensor	Model Name	BK9
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	44.03	0.08	44.11	74	-29.89	peak
4804.000	36.07	0.08	36.15	54	-17.85	AVG
7206.000	39.22	2.21	41.43	74	-32.57	peak
7206.000	32.69	2.21	34.9	54	-19.1	AVG
Remark:						
actor = Anter	na Factor + Cabl	e Loss – Pre-	amplifier.			

EUT	Bike Speed & Cadence Sensor	Model Name	BK9
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4804.000	45.36	0.08	45.44	74	-28.56	peak
4804.000	35.62	0.08	35.7	54	-18.3	AVG
7206.000	39.17	2.21	41.38	74	-32.62	peak
7206.000	31.26	2.21	33.47	54	-20.53	AVG
Remark:						
		alaaa Dua				
actor = Anter	nna Factor + Cabl	e Loss – Pre-	amplifier.		-	



EUT	Bike Speed & Cadence Sensor	Model Name	BK9
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type			
4880.000	45.23	0.14	45.37	74	-28.63	peak			
4880.000	36.17	0.14	36.31	54	-17.69	AVG			
7320.000	40.26	2.36	42.62	74	-31.38	peak			
7320.000	32.69	2.36	35.05	54	-18.95	AVG			
Remark:						1			
actor = Anter	nna Factor + Cabl	e Loss – Pre-	amplifier.						

EUT	Bike Speed & Cadence Sensor	Model Name	BK9
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type			
4880.000	45.36	0.14	45.5	74	-28.5	peak			
4880.000	38.32	0.14	38.46	54	-15.54	AVG			
7320.000	40.69	2.36	43.05	74	-30.95	peak			
7320.000	32.12	2.36	34.48	54	-19.52	AVG			
Remark:									
actor = Anter	nna Factor + Cabl	e Loss – Pre-a	amplifier.		-				



EUT	Bike Speed & Cadence Sensor	Model Name	BK9
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4960.000	44.86	0.22	45.08	74	-28.92	peak
4960.000	35.77	0.22	35.99	54	-18.01	AVG
7440.000	38.61	2.64	41.25	74	-32.75	peak
7440.000	30.24	2.64	32.88	54	-21.12	AVG
Remark:						
actor = Anter	na Factor + Cabl	e Loss – Pre-	amplifier			

EUT	Bike Speed & Cadence Sensor	Model Name	BK9
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	43.02	0.22	43.24	74	-30.76	peak
4960.000	35.28	0.22	35.5	54	-18.5	AVG
7440.000	39.17	2.64	41.81	74	-32.19	peak
7440.000	29.91	2.64	32.55	54	-21.45	AVG
Remark:						
actor = Anter	na Factor + Cabl	e Loss – Pre-	amplifier.			

## **RESULT: PASS**

#### Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Margin= Emission Level-Limit.

The "Factor" value can be calculated automatically by software of measurement system.


All test modes had been tested. The GFSK\_1M is the worst case and recorded in the report.




EUT	Bike Speed & Cadence Sensor	Model Name	BK9
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

#### Test result for band edge emission at restricted bands- GFSK\_1M

Test Graph for Peak Measurement

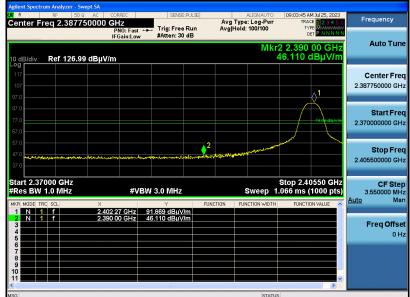


Test Graph for Average Measurement

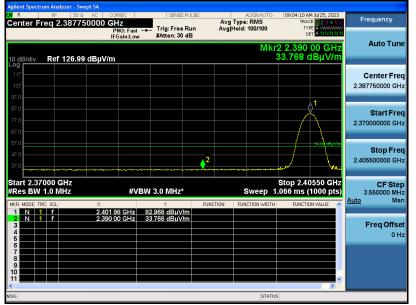


## **RESULT: PASS**



EUT	Bike Speed & Cadence Sensor	Model Name	BK9
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

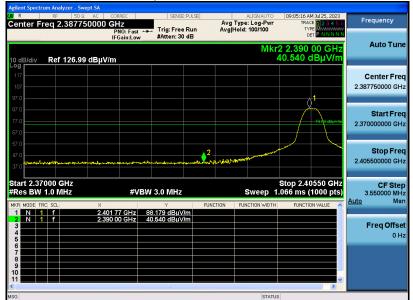


Test Graph for Average Measurement

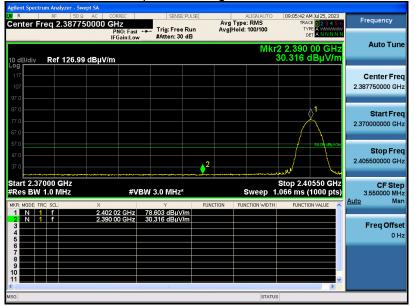

## **RESULT: PASS**



EUT	Bike Speed & Cadence Sensor	Model Name	BK9
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

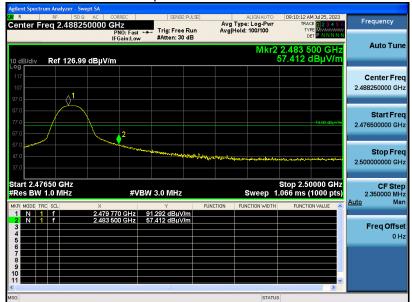

Test Graph for Average Measurement



#### **RESULT: PASS**



EUT	Bike Speed & Cadence Sensor	Model Name	BK9
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical



Test Graph for Average Measurement




#### **RESULT: PASS**




EUT	Bike Speed & Cadence Sensor	Model Name	BK9
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna	Horizontal

#### Test result for band edge emission at restricted bands- GFSK\_2M

Test Graph for Peak Measurement

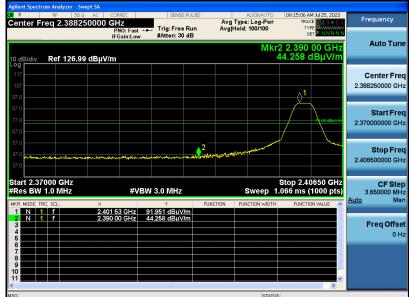


Test Graph for Average Measurement

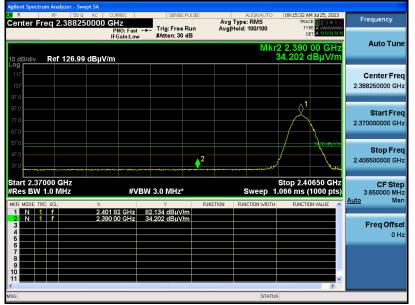


## **RESULT: PASS**



EUT	Bike Speed & Cadence Sensor	Model Name	BK9
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna	Vertical

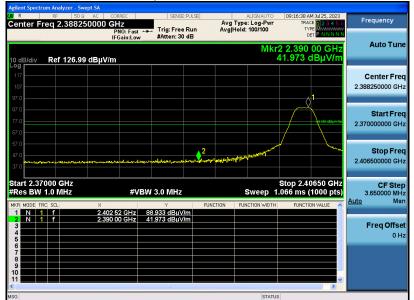


Test Graph for Average Measurement

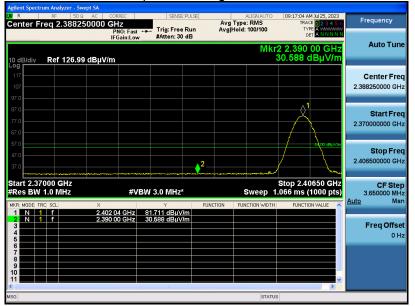

#### **RESULT: PASS**



EUT	Bike Speed & Cadence Sensor	Model Name	BK9
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna	Horizontal

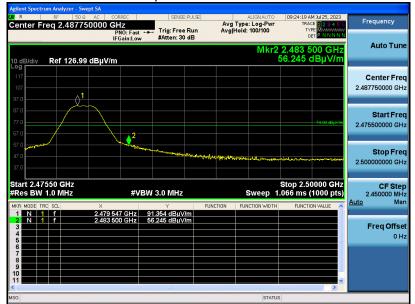

Test Graph for Average Measurement



## **RESULT: PASS**



EUT	Bike Speed & Cadence Sensor	Model Name	BK9
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna	Vertical



Test Graph for Average Measurement



#### **RESULT: PASS**

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.



# **APPENDIX A: PHOTOGRAPHS OF TEST SETUP**

Refer to the Report No.: AGC01040230701AP02 **APPENDIX B: PHOTOGRAPHS OF EUT** Refer to the Report No.: AGC01040230701AP03

----END OF REPORT----



# Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.