

Report No.: TW2203419-02E File reference No.: 2022-05-16

2022 05 10

Applicant: Hangzhou Roombanker Technology Co., Ltd

Product: Outdoor LoraWAN Gateway

Model No.: DSGW-010C

Trademark: N/A

Test Standards: FCC Part 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for the

evaluation of electromagnetic compatibility

Approved By

Terry Tang

Terry Tang

Manager

Dated: May 16, 2022


Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

# SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com



Report No.: TW2203419-02E

Date: 2022-05-16



Page 2 of 86

# **Special Statement:**

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

## **CNAL-LAB Code: L2292**

The EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2017 General Requirements) for the Competence of testing Laboratories.

# FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

# Industry Canada (IC) — Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

### **A2LA** (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Page 3 of 86

Report No.: TW2203419-02E

Date: 2022-05-16



# **Test Report Conclusion**

# Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample.	5
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment	6
3.0	Technical Details	8
3.1	Summary of Test Results.	8
3.2	Test Standards.	8
4.0	EUT Modification.	8
5.0	Power Line Conducted Emission Test.	9
5.1	Schematics of the Test.	9
5.2	Test Method and Test Procedure.	9
5.3	Configuration of the EUT.	9
5.4	EUT Operating Condition.	10
5.5	Conducted Emission Limit.	10
5.6	Test Result.	10
6.0	Radiated Emission test.	13
6.1	Test Method and Test Procedure.	13
6.2	Configuration of the EUT.	14
6.3	EUT Operation Condition.	14
5.4	Radiated Emission Limit.	14
7.0	6dB Bandwidth Measurement.	24
8.0	Maximum Output Power	44
9.0	Power Spectral Density Measurement.	47
10.0	Out of Band Measurement.	66
11.0	Antenna Requirement.	84
12.0	FCC ID Label	85
13.0	Photo of Test Setup and EUT View.	86

Date: 2022-05-16



#### 1.0 General Details

### 1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site Listed with Federal Communications commission (FCC)

Registration Number:744189 For 3m Anechoic Chamber

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A

For 3m Anechoic Chamber

#### 1.2 Applicant Details

Applicant: Hangzhou Roombanker Technology Co., Ltd Address: A#801 Wantong center, Hangzhou, China

Telephone: +86-18768289112

Fax: --

### 1.3 Description of EUT

Product: Outdoor LoraWAN Gateway

Manufacturer: Hangzhou Roombanker Technology Co., Ltd Address: A#801 Wantong center, Hangzhou, China

Trademark: N/A

Model Number: DSGW-010C

Additional Model Number: N/A
Hardware Version: V0.1
Software Version: V0.1
Rating: DC48V

Power Supply: Model: RP028-4800320Z

Input: 100-240V~, 50/60Hz, 0.6A Max; Output:48V, 0.32A, 15.36W

Type of Modulation IEEE 802.11b: DSSS (CCK, QPSK, DBPSK)

IEEE 802.11g/n (HT20, HT40): OFDM (64QAM, 16QAM, QPSK, BPSK)

Frequency range IEEE 802.11b/g/n (HT20): 2412-2462MHz;

IEEE 802.11n HT40: 2422-2452MHz

Channel Spacing 5MHz for IEEE 802.11b/g/n (HT20, HT40)

Air Data Rate IEEE 802.11b: 11, 5.5, 2, 1 Mbps

IEEE 802.11g: 54, 48,36, 24, 18, 12, 9, 6 Mbps

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2203419-02E Page 5 of 86

Date: 2022-05-16



IEEE 802.11n HT20/HT40: mcs0-mcs15

Frequency Selection By software

Channel Number IEEE 802.11b/g/n (HT20): 11 Channels;

IEEE 802.11n (HT40): 7 Channels;

Antenna: External antenna with Reverse polarity N connector used. The gain of the

antennas is 2.8dBi (Declared by the manufacturer)

1.4 Submitted Sample: 1 Samples

1.5 Test Duration

2022-03-28 to 2022-05-16

1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty =6.0dB

Occupied Channel Bandwidth Uncertainty =5%

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

1.7 Test Engineer

The sample tested by

Print Name: Andy Xing

Page 6 of 86

Report No.: TW2203419-02E

Date: 2022-05-16



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2021-06-18	2022-06-17
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2021-06-18	2022-06-17
Loop Antenna	EMCO	6507	00078608	2021-06-18	2024-06-17
Spectrum	R&S	FSIQ26	100292	2021-06-18	2022-06-17
Horn Antenna	A-INFO	LB-180400-KF	ANT01060660	2021-07-02	2024-07-02
Horn Antenna	R&S	BBHA 9120D	9120D-631	2021-07-02	2024-07-02
Power meter	Anritsu	ML2487A	6K00003613	2021-06-18	2022-06-17
Power sensor	Anritsu	MA2491A	32263	2021-06-18	2022-06-17
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2021-07-02	2024-07-01
9*6*6 Anechoic			N/A	2021-07-02	2022-07-01
EMI Test Receiver	RS	ESVB	826156/011	2021-06-18	2022-06-17
EMI Test Receiver	RS	ESH3	860904/006	2021-06-18	2022-06-17
Spectrum	HP/Agilent	ESA-L1500A	US37451154	2021-06-18	2022-06-17
Spectrum	HP/Agilent	E4407B	MY50441392	2021-06-18	2022-06-17
Spectrum	RS	FSP	1164.4391.38	2022-01-14	2023-01-13
RF Cable	Zhengdi	ZT26-NJ-NJ-8 M/FA	-	2021-06-18	2022-06-17
RF Cable	Zhengdi	7m		2021-06-18	2022-06-17
RF Switch	EM	EMSW18	060391	2021-06-18	2022-06-17
Pre-Amplifier	Schwarebeck	BBV9743	#218	2021-06-18	2022-06-17
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2021-06-18	2022-06-17
LISN	SCHAFFNER	NNB42	00012	2022-01-05	2023-01-04

# 2.2 Automation Test Software

### For Conducted Emission Test

Name	Version
EZ-EMC	Ver.EMC-CON 3A1.1

# For Radiated Emissions

Name	Version
EMI Test Software BL410-EV18.91	V18.905
EMI Test Software BL410-EV18.806 High Frequency	V18.06

Page 7 of 86

Report No.: TW2203419-02E

Date: 2022-05-16



#### 3. DESCRIPTION OF TEST MODES

## IEEE 802.11b, 802.11g, 802.11n (HT20) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

IEEE 802.11b mode: 1Mbps data rate (worst case) was chosen for full testing. IEEE 802.11g mode: 6Mbps data rate (worst case) was chosen for full testing. IEEE 802.11n (HT20) mode: mcs0 (worst case) were chosen for full testing;

#### IEEE 802.11n (HT40) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2422
Middle	2437
High	2452

IEEE 802.11n (HT40) mode: mcs0 data rate (worst case) were chosen for full testing

Note: During the test, the duty cycle was set up to >98%

Page 8 of 86

Report No.: TW2203419-02E

Date: 2022-05-16



#### 3.0 **Technical Details**

#### 3.1 **Summary of test results**

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph15.203	Antenna Requirement	Pass	Complies
FCC Part 15, Paragraph15.207	<b>Conducted Emission Test</b>	Pass	Complies
FCC Part 15 Subpart C Paragraph 15.247(a)(2) Limit	Spectrum bandwidth of a Orthogonal Frequency Division Multiplex System Limit: 6dB bandwidth>500kHz	Pass	Complies
FCC Part 15, Paragraph 15.247(b)	Maximum peak output power Limit: max. 30dBm	Pass	Complies
FCC Part 15, Paragraph 15.109,15.205 & 15.209	Transmitter Radiated Emission Limit: Table 15.209	Pass	Complies
FCC Part 15, Paragraph 15.247(e)	Power Spectral Density Limit: max. 8dBm/3kHz	Pass	Complies
FCC Part 15, Paragraph 15.247(d)	Out of Band Emission and Restricted Band Radiation Limit: 20dB less than peak value of fundamental frequency Restricted band limit: Table 15.209	Pass	Complies

#### 3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

#### 4.0 **EUT Modification**

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.


Report No.: TW2203419-02E

Date: 2022-05-16



#### **5.0** Power Line Conducted Emission Test


### 5.1 Schematics of the test

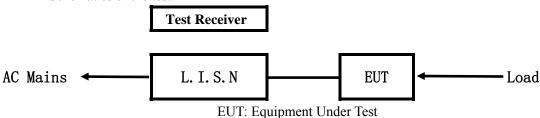

#### 5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

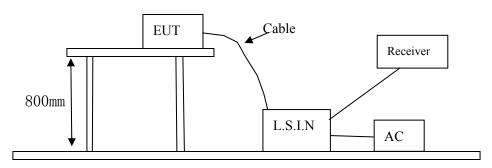

## 5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

# A. EUT

Device	Manufacturer	Model	FCC ID
Outdoor			
LoraWAN	Hangzhou Roombanker Technology Co., Ltd	DSGW-010C	2AUXBDSGW-010C
Gateway			

### B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

# C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Cable

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2203419-02E Page 10 of 86

Date: 2022-05-16



5.4 **EUT Operating Condition** 

Operating condition is according to ANSI C63.10-2013.

- A Setup the EUT and simulators as shown on follow
- В Enable AF signal and confirm EUT active to normal condition

#### 5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Limits (d	lB μV)
(MHz)	Quasi-peak Level	Average Level
0.15 ~ 0.50	66.0~56.0*	56.0~46.0*
$0.50 \sim 5.00$	56.0	46.0
5.00 ~ 30.00	60.0	50.0

Notes:

- 1. \*Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

#### 5.6 **Test Results**

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Note: Only the worst case was recorded in the test report.

Report No.: TW2203419-02E

Date: 2022-05-16



# A: Conducted Emission on Live Terminal (150kHz to 30MHz)


# **EUT Operating Environment**

Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

**EUT set Condition: Keep WIFI Transmitting** 

**Results: Pass** 

Please refer to following diagram for individual

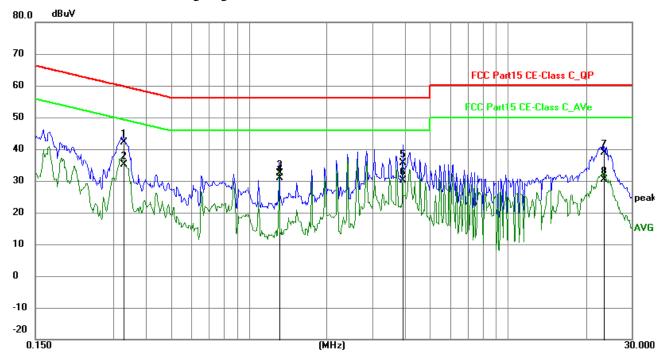

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.3294	32.45	9.76	42.21	59.47	-17.26	QP	Р
2	0.3294	25.31	9.76	35.07	49.47	-14.40	AVG	Р
3	1.3122	22.49	9.79	32.28	56.00	-23.72	QP	Р
4	1.3122	20.97	9.79	30.76	46.00	-15.24	AVG	Р
5	3.9399	25.68	9.88	35.56	56.00	-20.44	QP	Р
6	3.9399	20.37	9.88	30.25	46.00	-15.75	AVG	Р
7	23.3931	27.94	10.89	38.83	60.00	-21.17	QP	Р
8	23.3931	19.53	10.89	30.42	60.00	-29.58	QP	Р

Date: 2022-05-16



# B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)


# **EUT Operating Environment**

Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

**EUT set Condition: Keep WIFI Transmitting** 

**Results: Pass** 

Please refer to following diagram for individual

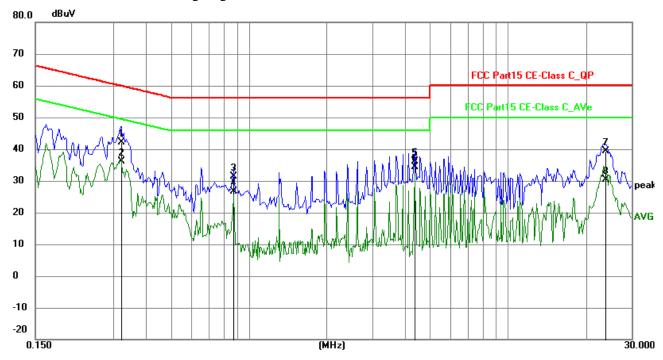

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.3215	32.49	9.76	42.25	59.67	-17.42	QP	Р
2	0.3215	26.43	9.76	36.19	49.67	-13.48	AVG	Р
3	0.8754	21.48	9.79	31.27	56.00	-24.73	QP	Р
4	0.8754	16.81	9.79	26.60	46.00	-19.40	AVG	Ъ
5	4.3728	26.13	9.90	36.03	56.00	-19.97	QP	Ъ
6	4.3728	24.56	9.90	34.46	46.00	-11.54	AVG	Р
7	23.8338	28.41	10.92	39.33	60.00	-20.67	QP	Р
8	23.8338	19.34	10.92	30.26	50.00	-19.74	AVG	Р

Report No.: TW2203419-02E Page 13 of 86

Date: 2022-05-16




#### 6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. F For measurement above 1GHz, peak values with RBW=1MHz VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

### **Block diagram of Test setup**

For radiated emissions from 9kHz to 30MHz

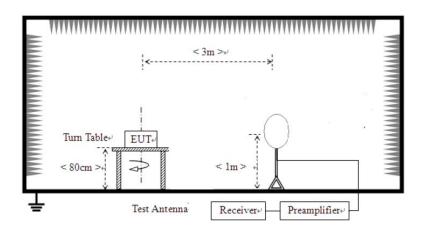


Report No.: TW2203419-02E


Date: 2022-05-16



For radiated emissions from 30MHz to1GHz

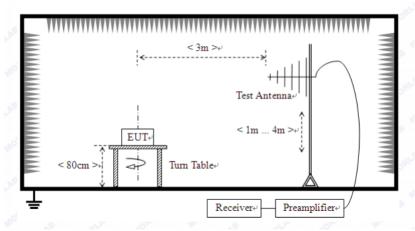

For radiated emissions above 1GHz

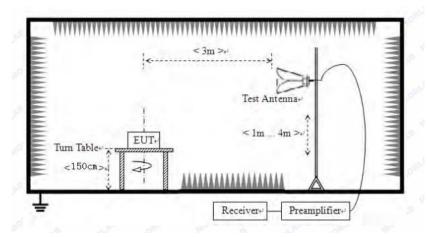

- 6.2 Configuration of The EUT
  Same as section 5.3 of this report
- 6.3 EUT Operating Condition
  Same as section 5.4 of this report.
- 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Report No.: TW2203419-02E Page 15 of 86

Date: 2022-05-16



## Frequencies in restricted band are complied to limit on Paragraph 15.209

Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
0.009-0.049	3	20log(2400/F(kHz)) +40log (300/3)
0.490-1.705	3	20log(24000/F(kHz)) +40log (30/3)
1.705-30	3	69.5
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz.As to 1G-25G, the final emission level got using PK. For fundamental measurement, PK detector used.
- 5. For radiated emissions from 9kHz to 30MHz, the emission level is much less than the limit for more than 20dB. No necessary to take down the record.
- 6. Worse case were recorded in the test report. 802.11g was the worst case.

Note: Only the worst case was recorded in the test report.

Page 16 of 86

Report No.: TW2203419-02E

Date: 2022-05-16




# Test result General Radiated Emission Data and Harmonics Radiated Emission Data

## Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: **Keep Transmitting** 

**Results: Pass** 

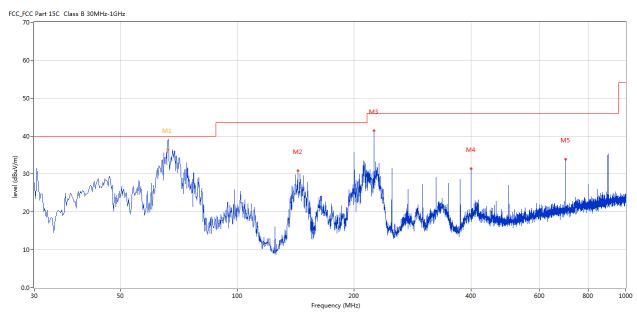

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(0)	(cm)		
1	66.123	39.49	-13.97	40.0	-0.51	Peak	0.00	100	Horizontal	Pass
1*	66.123	36.37	-13.97	40.0	-3.63	QP	0.00	100	Horizontal	Pass
2	143.219	30.85	-17.22	43.5	-12.65	Peak	122.00	100	Horizontal	Pass
3	224.921	41.43	-12.93	46.0	-4.57	Peak	28.00	100	Horizontal	Pass
4	399.963	31.42	-8.57	46.0	-14.58	Peak	54.00	100	Horizontal	Pass
5	699.860	33.87	-4.20	46.0	-12.13	Peak	75.00	100	Horizontal	Pass

Page 17 of 86

Report No.: TW2203419-02E

Date: 2022-05-16




# Test result General Radiated Emission Data and Harmonics Radiated Emission Data

## Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: **Keep Transmitting** 

**Results: Pass** 

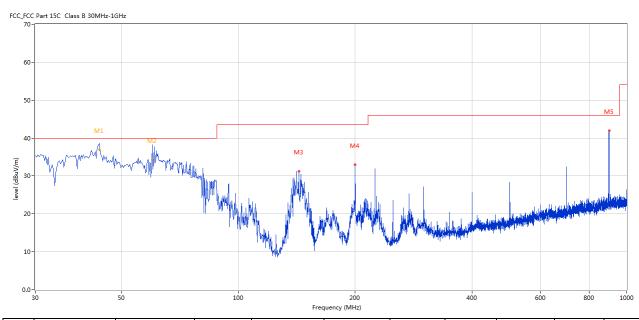

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	43.819	38.68	-11.48	40.0	-1.32	Peak	283.00	100	Vertical	Pass
1*	43.819	36.87	-11.48	40.0	-3.13	QP	283.00	100	Vertical	Pass
2	60.062	38.24	-12.97	40.0	-1.76	Peak	288.00	100	Vertical	Pass
2*	60.062	34.29	-12.97	40.0	-5.71	QP	288.00	100	Vertical	Pass
3	143.219	31.28	-17.22	43.5	-12.22	Peak	256.00	100	Vertical	Pass
4	199.950	32.90	-13.45	43.5	-10.60	Peak	341.00	100	Vertical	Pass
5	900.115	41.97	-1.86	46.0	-4.03	Peak	277.00	100	Vertical	Pass

Page 18 of 86


Report No.: TW2203419-02E

Date: 2022-05-16



Please refer to the following test plots for details:

# CH01 for 11g at 6Mbps: Horizontal

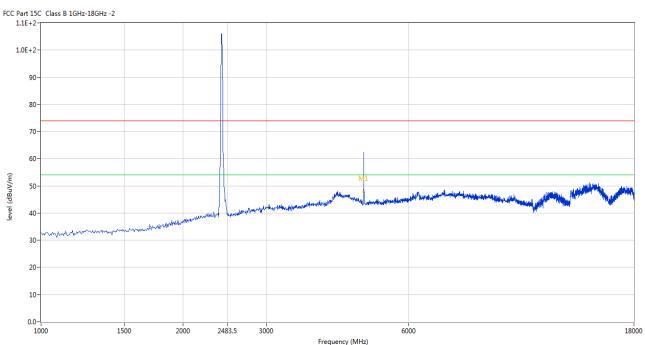


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	4824.044	62.28	3.14	74.0	-11.72	Peak	261.00	100	Horizontal	Pass
1**	4824.044	47.80	3.14	54.0	-6.20	AV	261.00	100	Horizontal	Pass

Page 19 of 86 Report No.: TW2203419-02E

Date: 2022-05-16



# CH01 for 11g at 6Mbps: Vertical

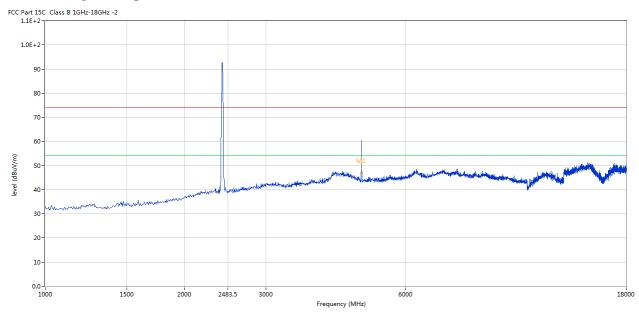


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	4824.044	60.42	3.14	74.0	-13.58	Peak	358.00	100	Vertical	Pass
1**	4824.044	46.76	3.14	54.0	-7.24	AV	358.00	100	Vertical	Pass

Page 20 of 86 Report No.: TW2203419-02E

Date: 2022-05-16



# CH06 for 11g at 6Mbps: Horizontal

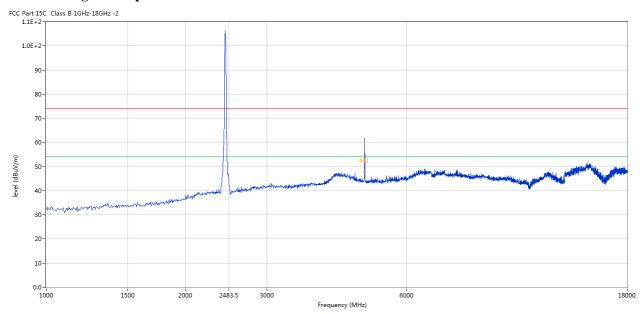


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	4875.031	62.97	3.19	74.0	-11.03	Peak	256.00	100	Horizontal	Pass
1**	4875.031	47.56	3.19	54.0	-6.44	AV	256.00	100	Horizontal	Pass

Report No.: TW2203419-02E Page 21 of 86

Date: 2022-05-16



# CH06 for 11g at 6Mbps: Vertical

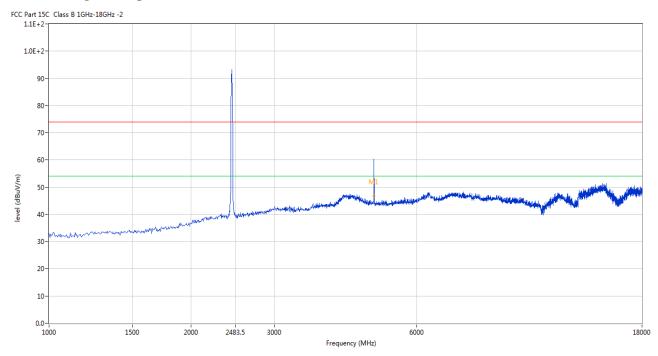


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	4875.031	60.31	3.19	74.0	-13.69	Peak	133.00	100	Vertical	Pass
1**	4875.031	46.72	3.19	54.0	-7.28	AV	133.00	100	Vertical	Pass

Report No.: TW2203419-02E Page 22 of 86

Date: 2022-05-16



# CH11 for 11g at 6Mbps: Horizontal

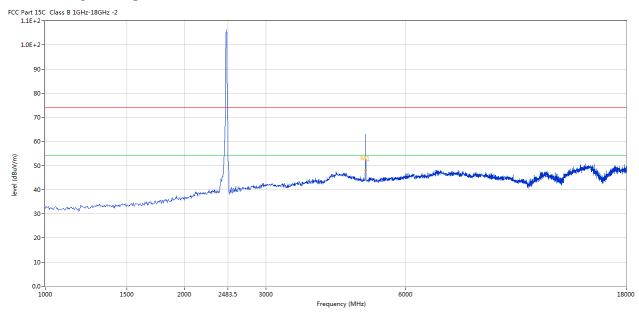


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	4921.770	63.00	3.27	74.0	-11.00	Peak	251.00	100	Horizontal	Pass
1**	4921.770	48.16	3.27	54.0	-5.84	AV	251.00	100	Horizontal	Pass

Report No.: TW2203419-02E Page 23 of 86

Date: 2022-05-16



## CH11 for 11g at 6Mbps: Vertical

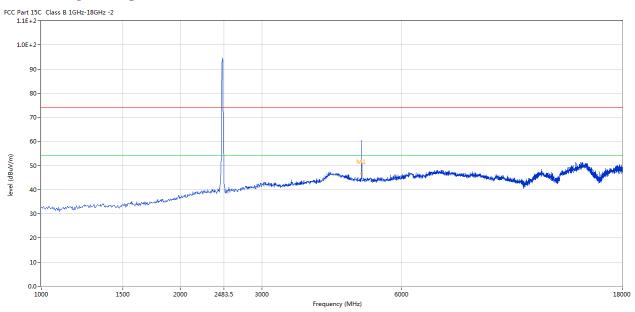

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	4921.770	60.52	3.27	74.0	-13.48	Peak	21.00	100	Vertical	Pass
1**	4921.770	46.52	3.27	54.0	-7.48	AV	21.00	100	Vertical	Pass

Note: 1. Result Level = Reading + Factor

- 2. Factor= AF + Cable Loss- Preamp
- 3. Margin = Result– Limit
- 4. For radiated Emissions from 18-25GHz and below 30MHz, it is only the floor noise and less than the limit for more than 20dB. No necessary to take down.
- 5. Note: the final peak measurement results less than the AV limit. No necessary to take down the final AV measurement result

Page 24 of 86


Report No.: TW2203419-02E

Date: 2022-05-16



# 7.0 6dB Bandwidth Measurement

# 7.1 Test Setup



### 7.2 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500 kHz

## 7.3 Test Procedure

- 1. Set resolution bandwidth (RBW) = 100 kHz
- 2. Set the video bandwidth (VBW)  $\geq$  3 x RBW.
- 3. Detector = Peak.
- 4. Trace mode =  $\max$  hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 7.4 Test Result

Page 25 of 86 Report No.: TW2203419-02E

Date: 2022-05-16



# 6dB Occupied Bandwidth


EUT		Outdoo	or LoraWA	N Gateway	Model	DS	GW-010C
Mode			802.111	)	Test Voltage	I	DC48V
Temperat	ure		24 deg. (	C,	Humidity	5	6% RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)	Minimum (MHz		Pass/ Fail
1		2412	1	10.05	0.5		Pass
6		2437	1	10.05	0.5		Pass
11		2462	1	10.04	0.5		Pass
1		2412	11	11.01	0.5		Pass
6		2437	11	11.01	0.5		Pass
11	2462		11	11.01	0.5		Pass

Report No.: TW2203419-02E Page 26 of 86

Date: 2022-05-16



# 1. 802.11b at 1Mbps of CH01

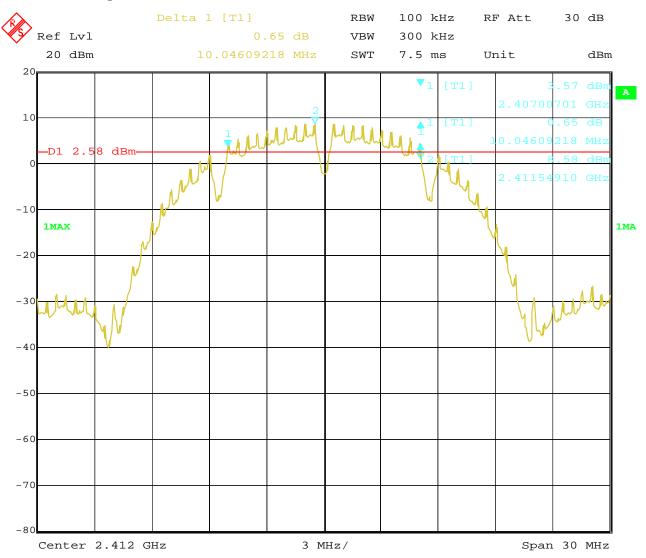


Date: 23.APR.2022 14:57:30 Report No.: TW2203419-02E Page 27 of 86

Date: 2022-05-16



# 2. 802.11b at 1Mbps of CH06

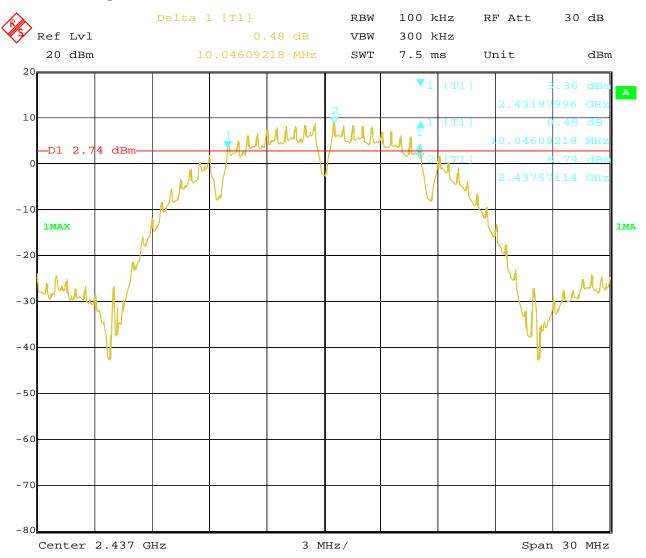


Date: 23.APR.2022 15:09:21 Report No.: TW2203419-02E Page 28 of 86

Date: 2022-05-16



# 3. 802.11b at 1Mbps of CH11

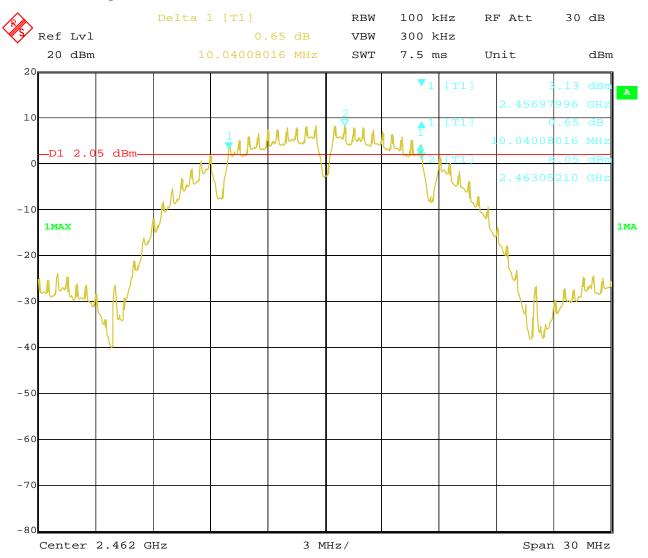


Date: 23.APR.2022 15:11:12 Report No.: TW2203419-02E Page 29 of 86

Date: 2022-05-16



# 4. 802.11b at 11Mbps of CH01

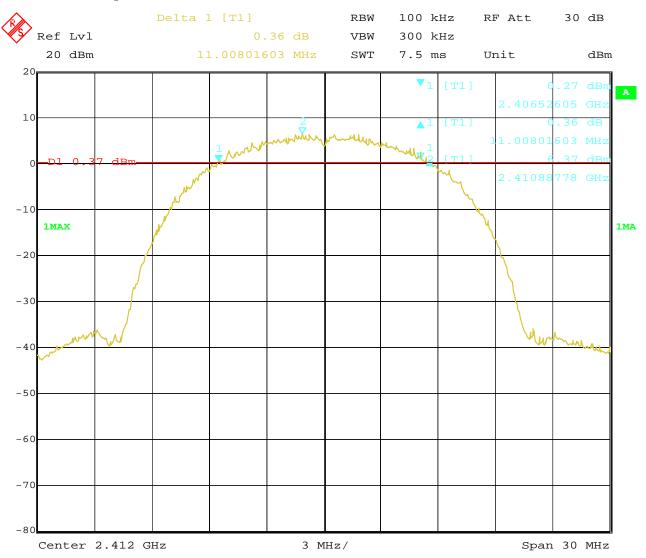


Date: 23.APR.2022 15:02:35 Report No.: TW2203419-02E Page 30 of 86

Date: 2022-05-16



# 5. 802.11b at 11Mbps of CH06

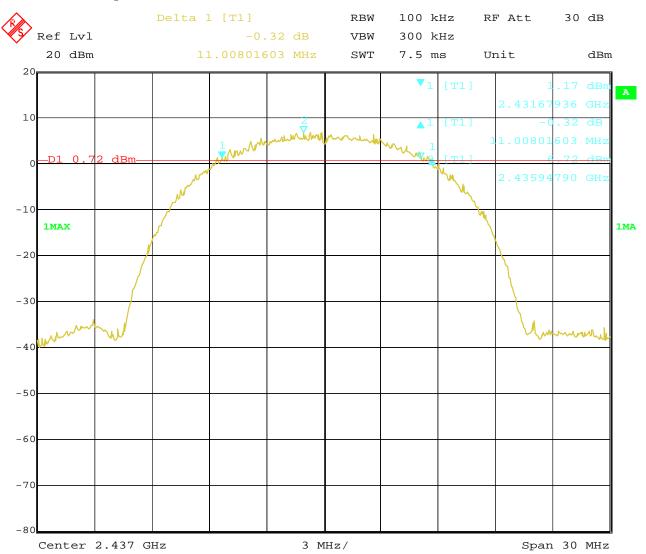


Date: 23.APR.2022 15:04:48 Report No.: TW2203419-02E Page 31 of 86

Date: 2022-05-16



# 6. 802.11b at 11Mbps of CH11

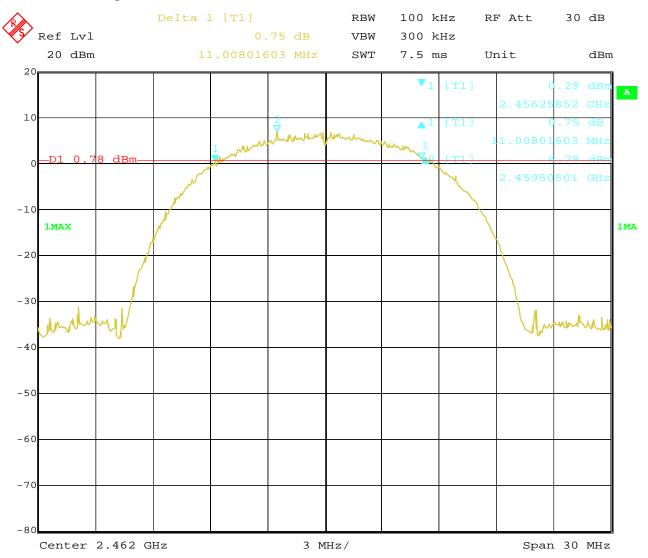

Date: 23.APR.2022 15:16:42 Report No.: TW2203419-02E

Date: 2022-05-16



Page 32 of 86

# 6dB Occupied Bandwidth

EUT		Outdo	or LoraWA	N Gateway	Model	DSGW-010C
Mode			802.11	g	Test Voltage	DC48V
Temperat	ure		24 deg.	C,	Humidity	56% RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)	Minimum Limi (MHz)	it Pass/ Fail
1		2412	6	16.30	0.5	Pass
6		2437	6	16.30	0.5	Pass
11		2462	6	16.30	0.5	Pass

Page 33 of 86


Report No.: TW2203419-02E

Date: 2022-05-16



#### **Test Plots:**

# 1. 802.11g at 6Mbps of CH01

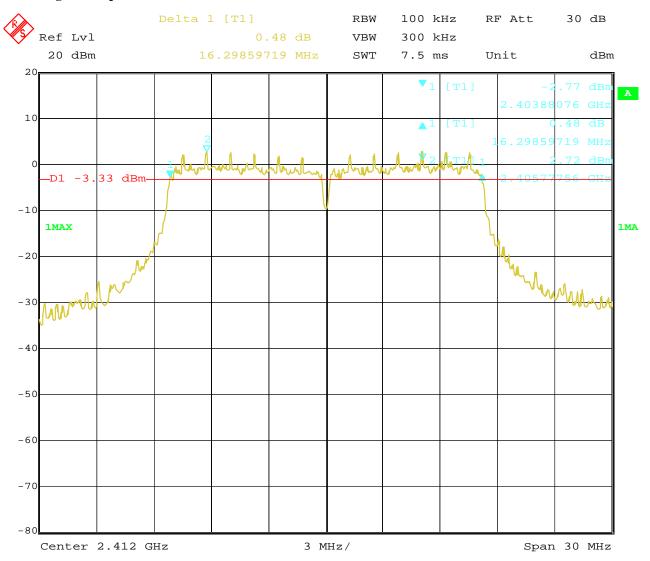


23.APR.2022 15:00:00 Date:

Report No.: TW2203419-02E Page 34 of 86

Date: 2022-05-16



# 2. 802.11g at 6Mbps of CH06

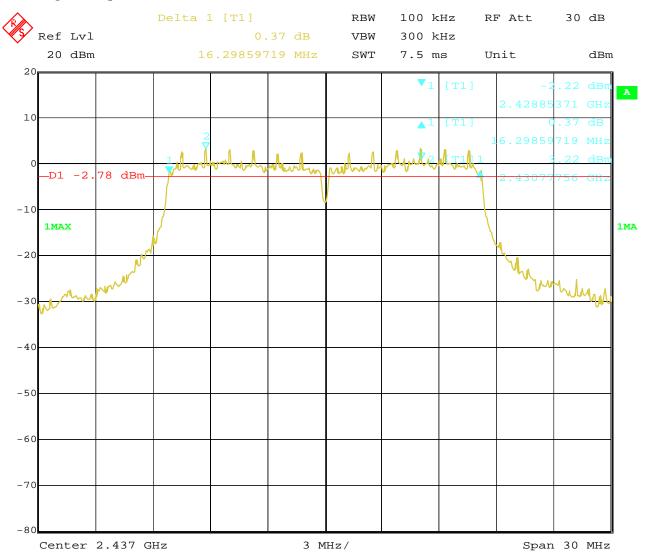


Date: 23.APR.2022 15:08:07 Report No.: TW2203419-02E Page 35 of 86

Date: 2022-05-16



# 3. 802.11g at 6Mbps of CH11

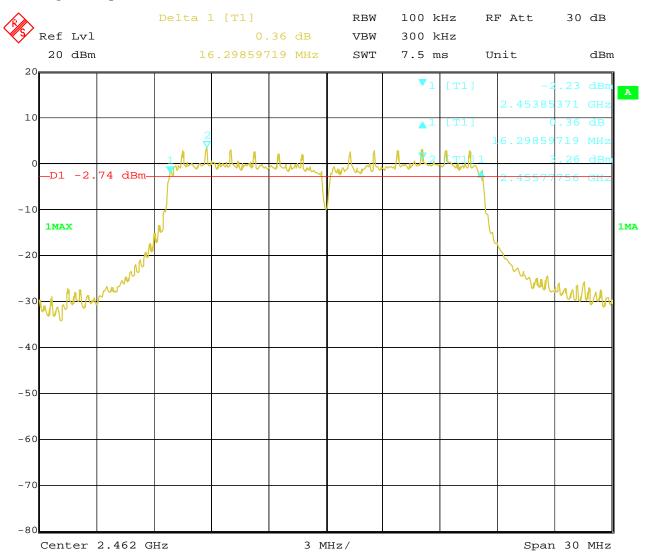

Date: 23.APR.2022 15:14:12

Page 36 of 86 Report No.: TW2203419-02E

Date: 2022-05-16



# 6dB Occupied Bandwidth

EUT		Outdoor LoraWAN Gateway			Model	DSGW-010C	
Mode		802.11n HT20			Test Voltage	DC48V	
Temperature		24 deg. C,			Humidity		56% RH
Channel	Channel Frequency (MHz)		Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)		Pass/ Fail
1		2412	mcs0	17.56	0.5	0.5	
6		2437	mcs0	17.56	0.5		Pass
11		2462	mcs0	15.03	0.5		Pass

Page 37 of 86


Report No.: TW2203419-02E

Date: 2022-05-16



#### **Test Plots:**

# 1. 802.11n at HT20 of CH01

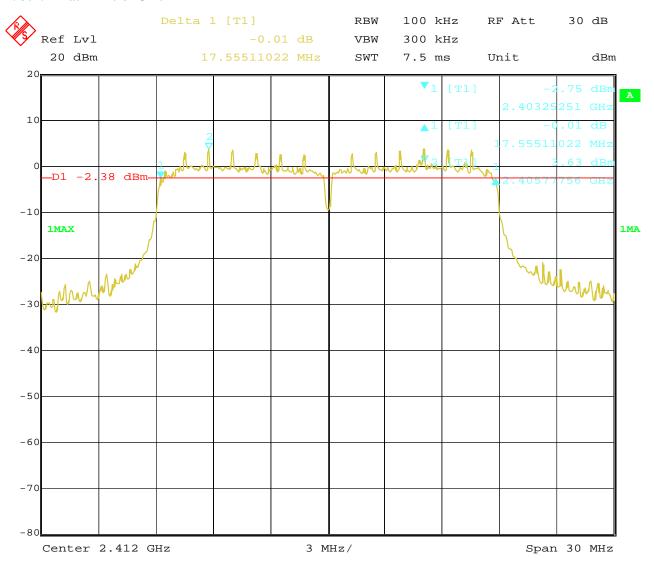


23.APR.2022 15:26:41 Date:

Report No.: TW2203419-02E Page 38 of 86

Date: 2022-05-16



### 2. 802.11n at HT20 of CH06

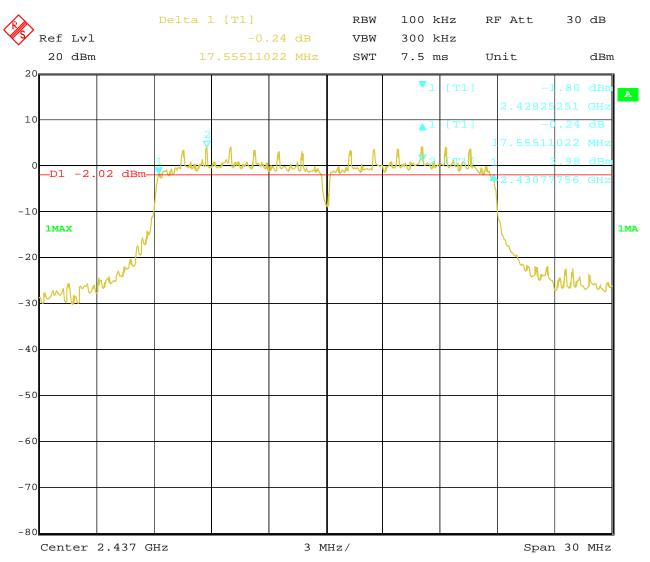


Date: 23.APR.2022 15:24:27 Report No.: TW2203419-02E Page 39 of 86

Date: 2022-05-16



### 3. 802.11n at HT20 of CH11

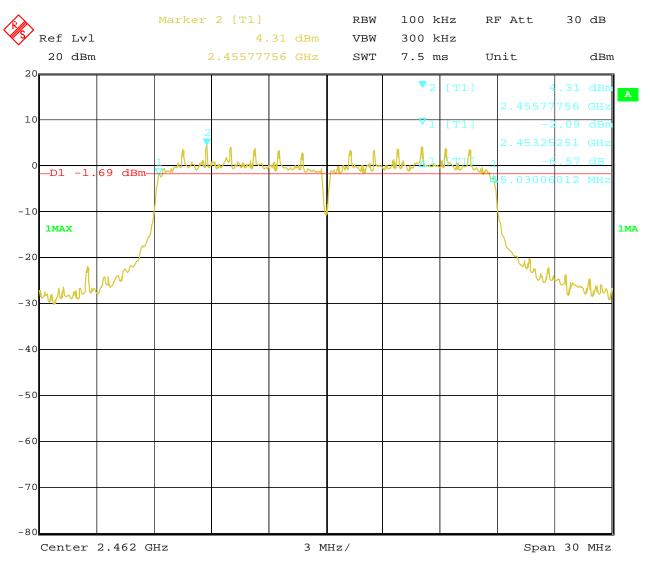

Date: 23.APR.2022 15:22:47

Page 40 of 86 Report No.: TW2203419-02E

Date: 2022-05-16



# 6dB Occupied Bandwidth

EUT		Outdoor LoraWAN Gateway			Model	DSGW-010C	
Mode		802.11n HT40 Test Voltage		802.11n HT40		DC48V	
Temperat	ure		24 deg. (	C,	Humidity	56% RH	
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)	Minimum Lin (MHz)	nit	Pass/ Fail
3		2422	mcs0	36.05	0.5		Pass
6		2437	mcs0	36.05	0.5		Pass
9	2452		mcs0	36.05	0.5		Pass

Page 41 of 86


Report No.: TW2203419-02E

Date: 2022-05-16



#### **Test Plots:**

## 1. 802.11n at HT40 of CH03

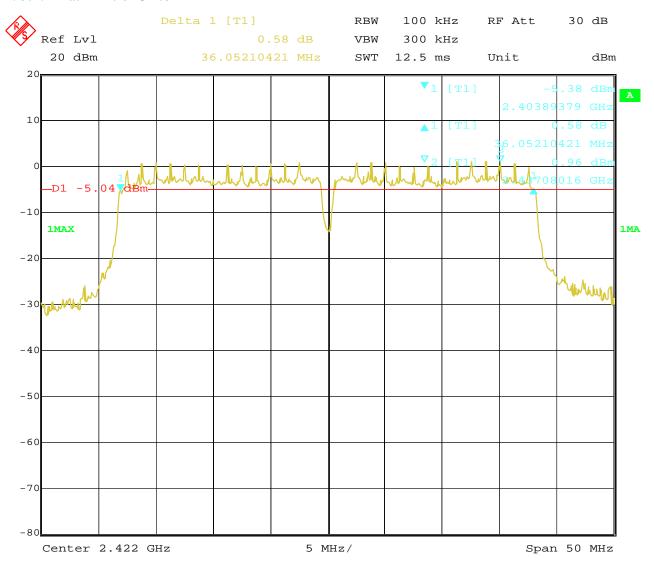


23.APR.2022 15:28:43 Date:

Report No.: TW2203419-02E Page 42 of 86

Date: 2022-05-16



## 2. 802.11n at HT40 of CH06

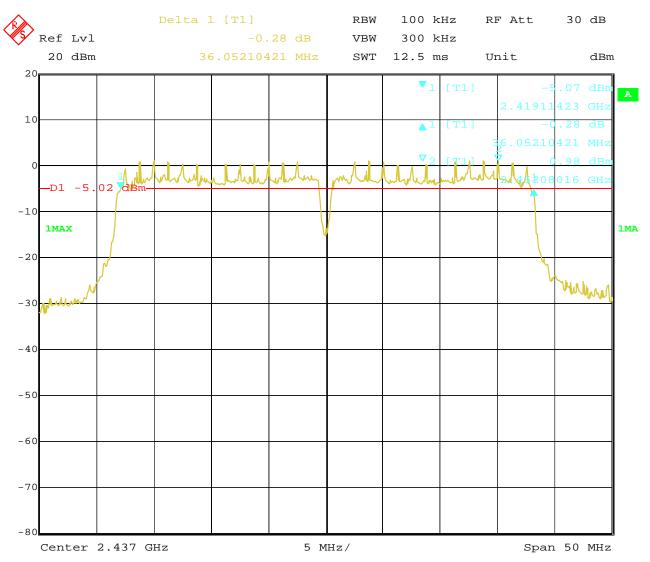


Date: 23.APR.2022 15:30:45 Report No.: TW2203419-02E Page 43 of 86

Date: 2022-05-16



### 3. 802.11n at HT40 of CH09

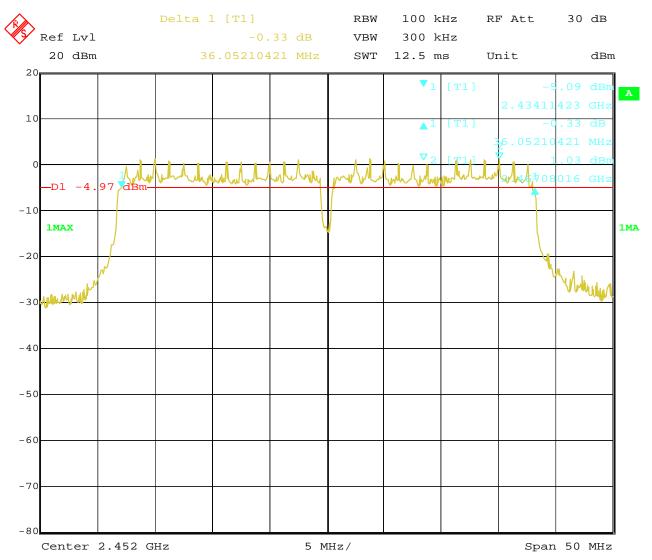

Date: 23.APR.2022 15:32:20 Report No.: TW2203419-02E


Date: 2022-05-16



Page 44 of 86

# 8. Maximum Output Power

## 8.1 Test Setup



### 8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

#### **8.3 Test Procedure**

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: The AV power was measured

Page 45 of 86

Report No.: TW2203419-02E

Date: 2022-05-16



#### **8.4Test Results**

EUT		Outdoor LoraWAN Gateway		Model DS		SGW-010C
Mode		802.11b		Test Voltage		DC48V
Temperat	ure		24 deg. C,	Humidity		56% RH
Channel	Frequ (MH	uency z)	AV Power (dBm)	(dBm) Power Limit (dBm)		Pass/ Fail
1	2412		20.84	30		Pass
6	2437		21.31	30		Pass
11	11 2462		21.06	30		Pass

Note: 1. At finial test to get the worst-case emission at 1Mbps for CH01, CH06 and CH11

2. The result basic equation calculation as follow: Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EUT			Outdoor LoraWAN Gateway	Model	DSGW-010C
Mode		802.11g Test Volta		Test Voltage	DC48V
Temperat	ure		24 deg. C,	Humidity 56% RH	
Channel	Channel Frequency (MHz)		AV Power (dBm)	Power Limit (dBm)	Pass/ Fail
1	1 2412		21.30	30	Pass
6	6 2437		21.77	30	Pass
11 2462			21.81	30	Pass

Note: 1. At finial test to get the worst-case emission at 6Mbps for CH01, CH06 and CH11

- 2. The result basic equation calculation as follow: Power Output = Power Reading + Cable loss + Attenuator
- 3. The worse case was recorded

Report No.: TW2203419-02E Page 46 of 86

Date: 2022-05-16



EUT		Outdoor LoraWAN Gateway Mode		Model	DSGW-010C		
Mode		802.11n (HT20) Test Voltage		802.11n (HT20)		Test Voltage	DC48V
Temperat	ure		24 deg. C,	Humidity	56% RH		
Channel	Frequ (MH	uency z)	AV Power (dBm)	Power Limit (dBm)	Pass/ Fail		
1	2412		22.14	30	Pass		
6	6 2437		22.52	30	Pass		
11	11 2462		22.59	30	Pass		

Note: 1. At finial test to get the worst-case emission at mcs0 of 11n HT20 for CH01, CH06 and CH11

2. The result basic equation calculation as follow:Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EUT		Outdoor LoraWAN Gateway		Model D		GGW-010C
Mode		802.11n (HT40)		Test Voltage		DC48V
Temperat	ure		24 deg. C,	Humidity		56% RH
Channel	Frequency (MHz) AV Power (dBm)		Power Lin (dBm)	nit	Pass/ Fail	
3	2422		22.67	30		Pass
6	2437		22.81	30		Pass
9	9 2452		22.86	30		Pass

Note: 1. At finial test to get the worst-case emission at msc0 of 11n HT40 for CH03, CH06 and CH09

- 2. The result basic equation calculation as follow:

  Power Output = Power Reading + Cable loss + Attenuator
- 3. The worse case was recorded

Page 47 of 86


Date: 2022-05-16

Report No.: TW2203419-02E



# 9. Power Spectral Density Measurement

## 9.1 Test Setup



### 9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm/3kHz.

#### 9.3 Test Procedure

- 1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- 2. Set the RBW = 10 kHz.
- 3. Set the VBW  $\geq$  30 kHz.
- 4. Set the span to 1.5 times the DTS channel bandwidth.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11. The resulting peak PSD level must be  $\leq 8 \text{ dBm/3kHz}$ .

Page 48 of 86

Report No.: TW2203419-02E

Date: 2022-05-16



### 9.4Test Result

EUT			EUT		Outdoor LoraWAN Gateway	Model	DSGV	V-010C
Mode		802.11b 11Mbps		Test Voltage	DC	48V		
Temperat	ure		24 deg. C,	Humidity	56% RH			
Channel	-	uency (Hz)			Limit (dBm/3kHz)	Pass/ Fail		
1	,	412	-4.13		8 8	Pass		
6	24	437	-3.54		8	Pass		
1	24	462	-3.28		8	Pass		

EUT		Outdoor LoraWAN Gateway		Model	DSGW	-010C
Mode		802.11b 1Mbps Test Voltage		Test Voltage	DC4	-8V
Temperat	ure		24 deg. C,	Humidity	56%	RH
Channel	Freq	uency	Power Spectral Density (dB	ower Spectral Density (dBm/10kHz)		Pass/ Fail
	(M	(Hz)			(dBm/3kHz)	
1	24	0.56			8	Pass
6	24	437	0.89		8	Pass
1	24	462	-0.51		8	Pass

EUT		Outdoor LoraWAN Gateway Model		Model	DSGW	-010C
Mode		802.11g 6Mbps		Test Voltage	DC4	18V
Temperat	ure	24 deg. C, Hu		Humidity	56%	RH
Channel	Freq	uency	Power Spectral Density (dBm	Power Spectral Density (dBm/10kHz)		Pass/ Fail
	(M	Hz)			(dBm/3kHz)	
1	24	412	-6.83		8	Pass
6	24	137	-6.58		8	Pass
1	24	162	-6.01		8	Pass

Report No.: TW2203419-02E Page 49 of 86

Date: 2022-05-16



EUT		Outdoor LoraWAN Gateway		Outdoor LoraWAN Gateway Model D		-010C	
Mode		802.11n HT20 mcs0 Test Voltage		802.11n HT20 mcs0 Test Voltage		DC4	18V
Temperat	ure		24 deg. C,	Humidity	56%	RH	
Channel	Freq	uency	nency Power Spectral Density (dBm/10kHz		Limit	Pass/ Fail	
	(M	(Hz)			(dBm/3kHz)		
1	24	412	-6.06		8	Pass	
6	24	437	-5.86		8	Pass	
1	24	462	-5.63		8	Pass	

EUT		Outdoor LoraWAN Gateway		Outdoor LoraWAN Gateway Model DSG		-010C
Mode	Mode 802.11n HT40 mcs0		802.11n HT40 mcs0	Test Voltage	DC4	-8V
Temperat	ure		24 deg. C,	Humidity	56%	RH
Channel	Freq	uency	Power Spectral Density (dBm	n/10kHz)	Limit	Pass/ Fail
	(M	(Hz)			(dBm/3kHz)	
3	24	-9.10			8	Pass
6	24	437	-8.91		8	Pass
9	24	452	-8.77		8	Pass


Report No.: TW2203419-02E Page 50 of 86

Date: 2022-05-16



# 9.5 Photo of Power Spectral Density Measurement

1.802.11b at 11Mbps of CH01

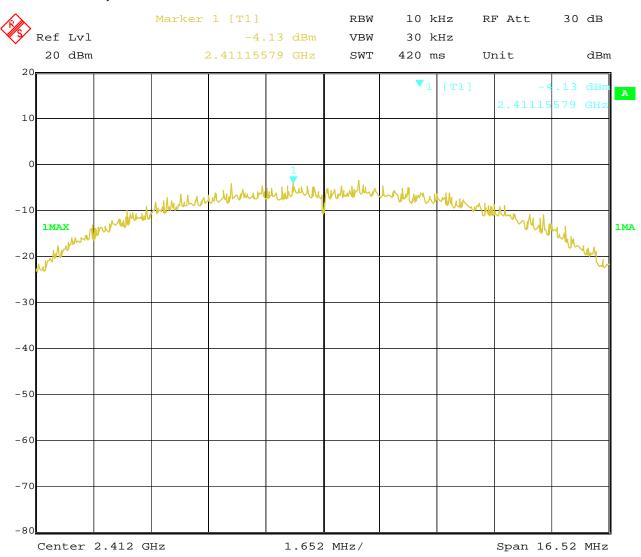

23.APR.2022 16:56:24 Date:


Page 51 of 86

Report No.: TW2203419-02E

Date: 2022-05-16



### 2. 802.11b at 11Mbps at CH06

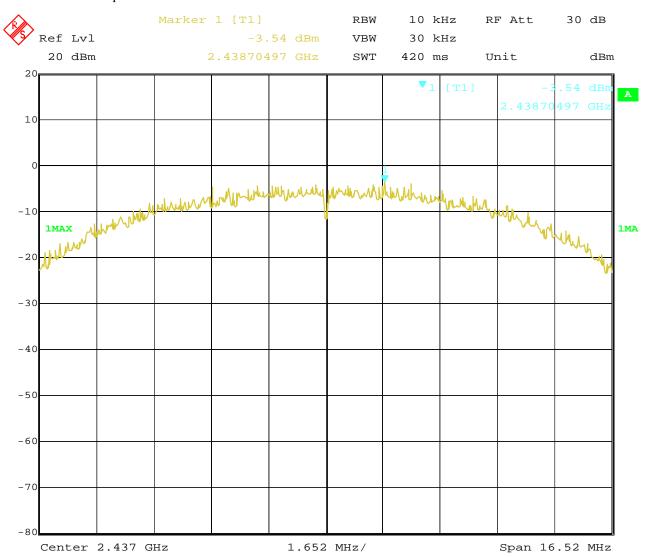

Date: 23.APR.2022 16:56:51


Page 52 of 86

Report No.: TW2203419-02E

Date: 2022-05-16



## 3. 802.11b at 11Mbps of CH11

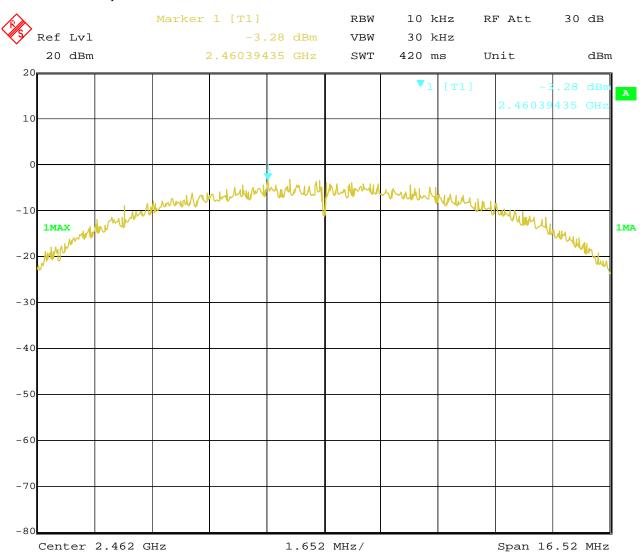

Date: 23.APR.2022 16:57:21


Page 53 of 86

Report No.: TW2203419-02E

Date: 2022-05-16



## 4. 802.11b at 1Mbps of CH1

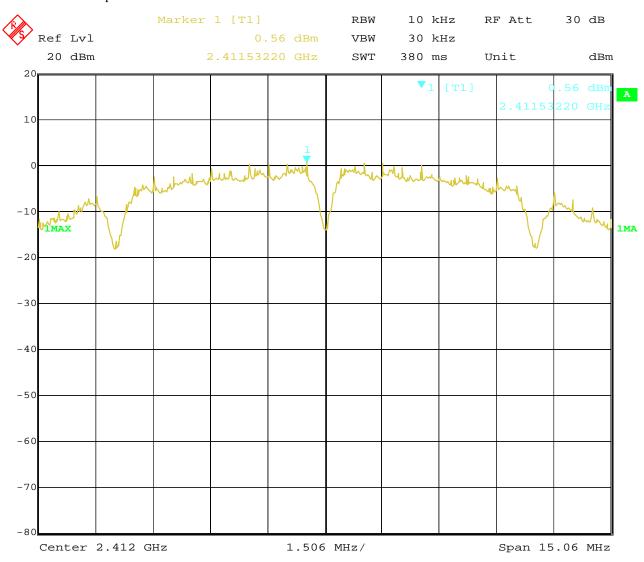

Date: 23.APR.2022 16:42:38


Page 54 of 86

Report No.: TW2203419-02E

Date: 2022-05-16



## 5. 802.11b at 1Mbps of CH6

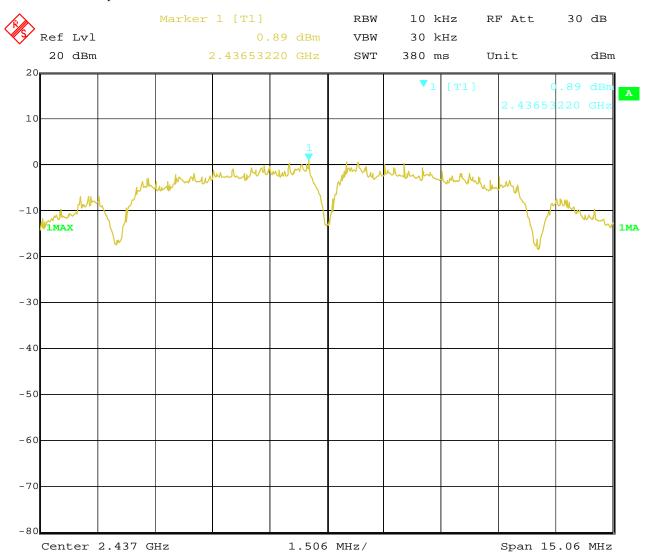

Date: 23.APR.2022 16:47:45


Page 55 of 86

Report No.: TW2203419-02E

Date: 2022-05-16



## 6. 802.11b at 1Mbps of CH11

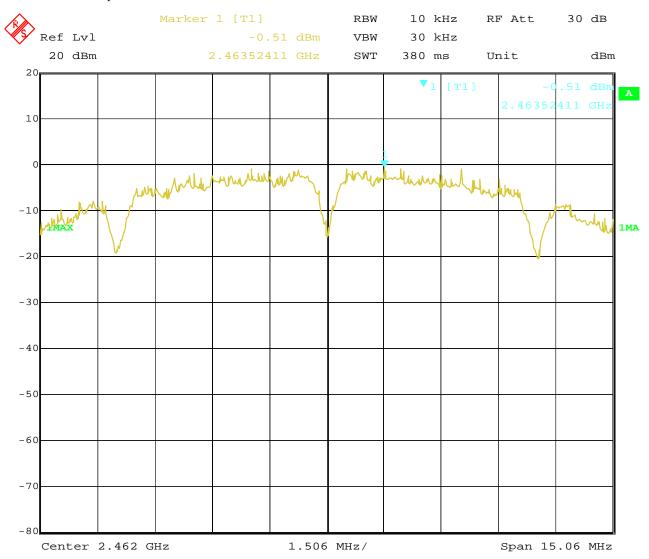

Date: 23.APR.2022 16:48:30


Page 56 of 86

Report No.: TW2203419-02E

Date: 2022-05-16



# 7. 802.11g at 6Mbps of CH1

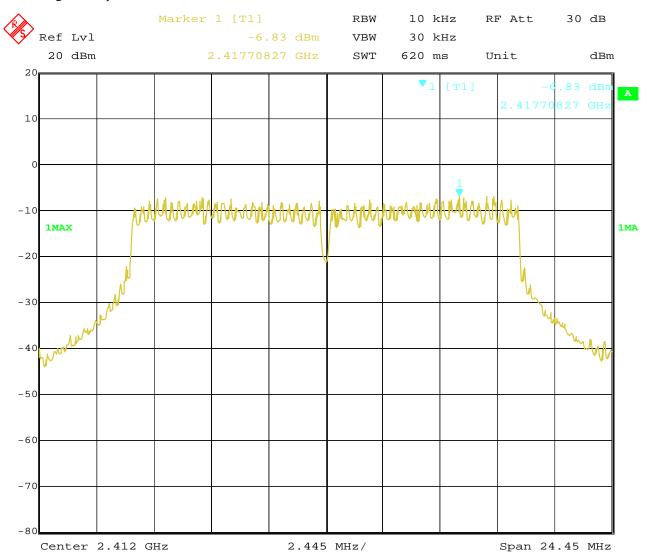

Date: 23.APR.2022 16:55:23


Page 57 of 86

Report No.: TW2203419-02E

Date: 2022-05-16



## 8. 802.11g at 6Mbps of CH6

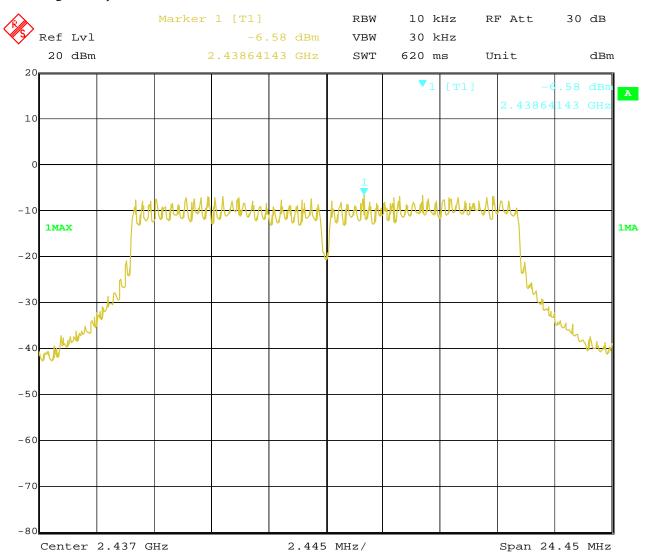

Date: 23.APR.2022 16:53:03


Page 58 of 86

Report No.: TW2203419-02E

Date: 2022-05-16



# 9. 802.11g at 6Mbps of CH11

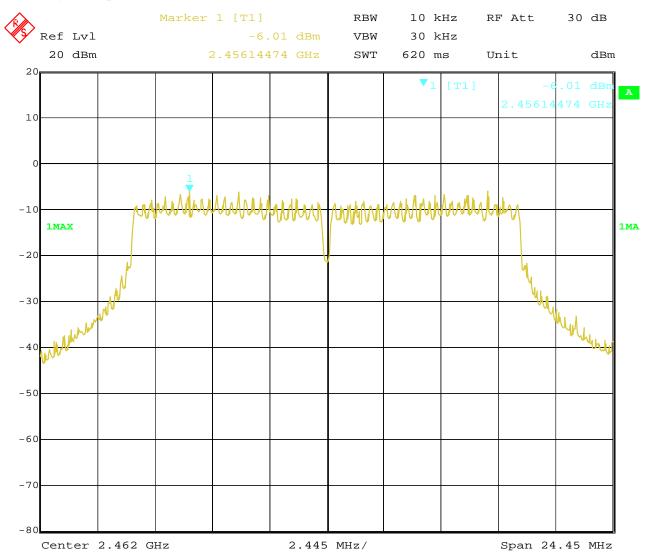

Date: 23.APR.2022 16:51:29


Page 59 of 86

Report No.: TW2203419-02E

Date: 2022-05-16



#### 10. 802.11n at HT20 of CH01

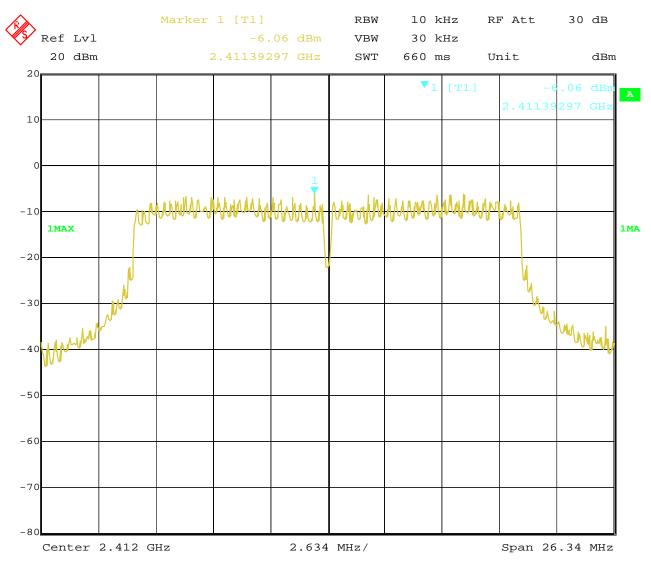


Date: 23.APR.2022 17:02:32 Report No.: TW2203419-02E Page 60 of 86

Date: 2022-05-16



#### 11. 802.11n at HT20 of CH06

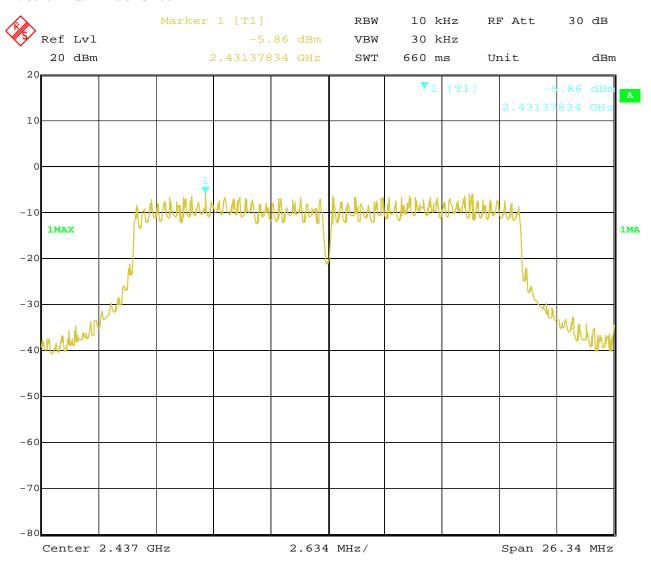


Date: 23.APR.2022 17:00:39 Report No.: TW2203419-02E Page 61 of 86

Date: 2022-05-16



#### 12. 802.11n at HT20 of CH11

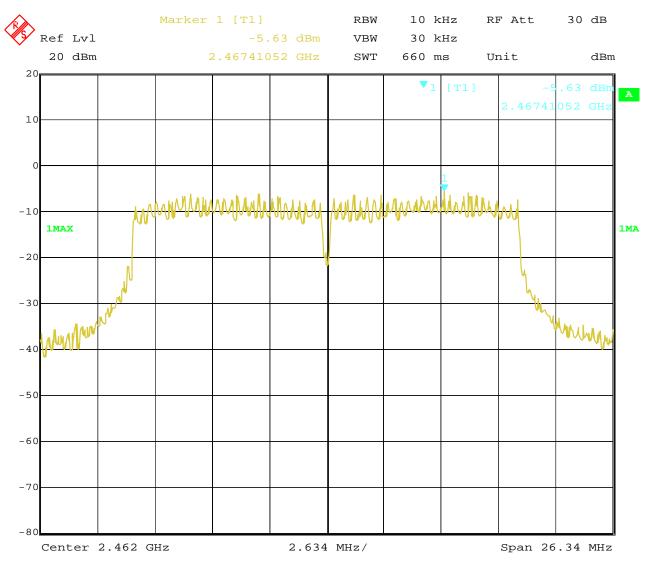

Date: 23.APR.2022 16:59:28


Page 62 of 86

Report No.: TW2203419-02E

Date: 2022-05-16



#### 13. 802.11n at HT40 of CH03

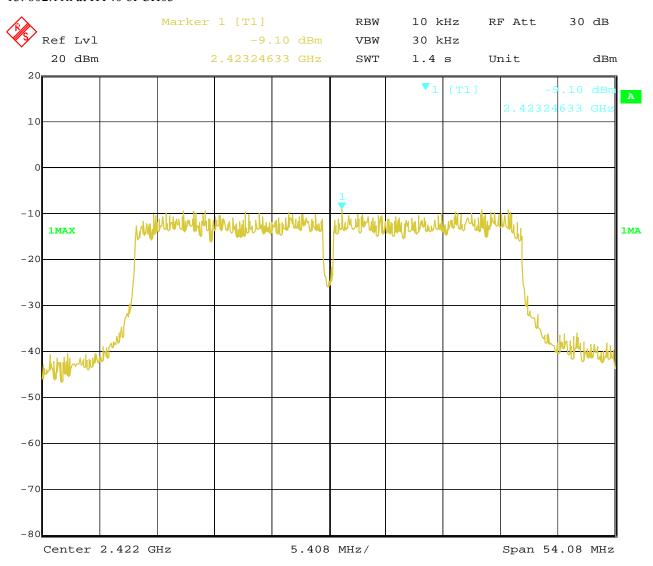

Date: 23.APR.2022 17:03:46


Page 63 of 86

Report No.: TW2203419-02E

Date: 2022-05-16



#### 14. 802.11n at HT40 of CH06

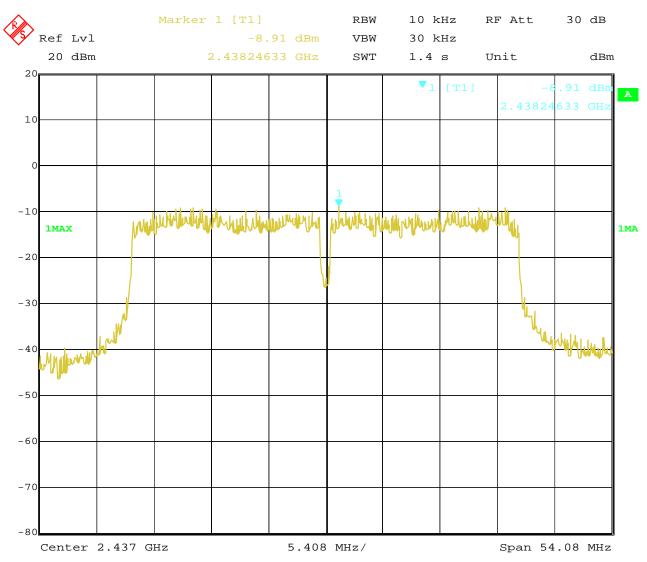

Date: 23.APR.2022 17:04:42


Page 64 of 86

Report No.: TW2203419-02E

Date: 2022-05-16



#### 15. 802.11n at HT40 of CH09

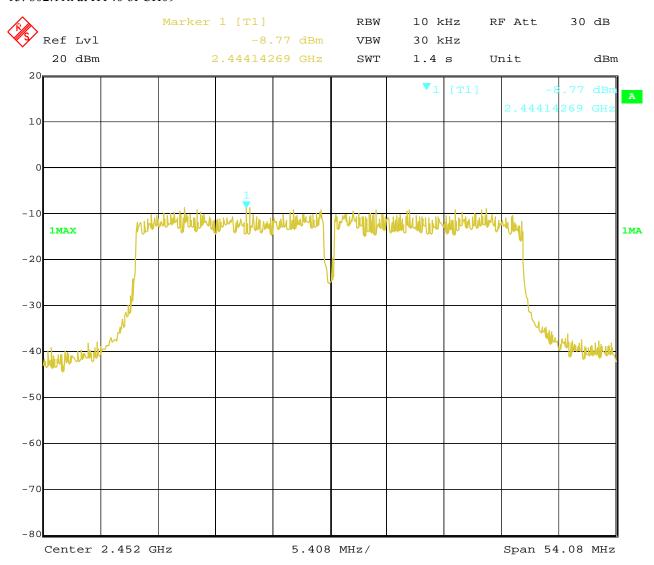

Date: 23.APR.2022 17:07:26


Page 65 of 86

Report No.: TW2203419-02E

Date: 2022-05-16



# 10 Out of Band Measurement 10.1 Test Setup for band edge



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

#### 10.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

### **10.3 Test Procedure**

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test. (Peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector)

For bandage test, the spectrum set as follows: RBW=100, VBW=300 kHz. A conducted measurement used

#### 10.4 Test Result

Please see next pages

Note: 1. for band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

Page 66 of 86

Report No.: TW2203419-02E

Date: 2022-05-16




### For 802.11b mode

CH01 at 1Mbps

#### 10.4 Band-edge Measurement

EUT	Outdoor LoraWAN Gateway	Model	DSGW-010C
Mode	Keeping Transmitting	Test Voltage	DC48V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

## **Test Figure:**

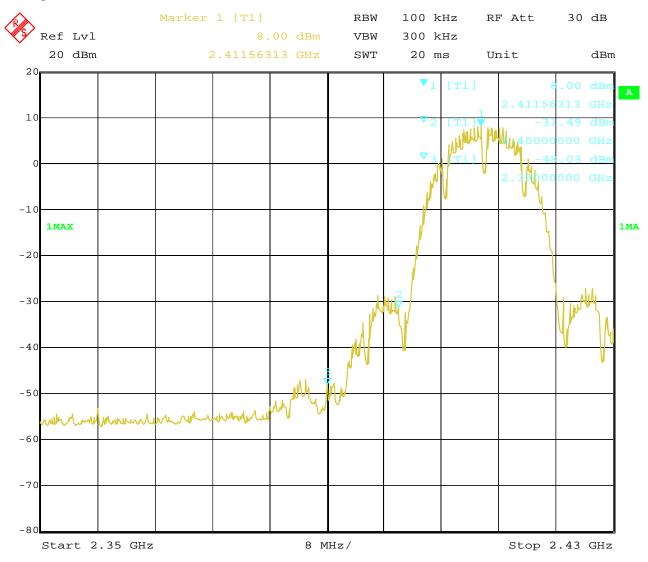

Date: 23.APR.2022 17:10:40

Page 67 of 86

Report No.: TW2203419-02E

Date: 2022-05-16




## CH11 at 1Mbps

#### 10.4 Band-edge Measurement

EUT	Outdoor LoraWAN Gateway	Model	DSGW-010C
Mode	Keeping Transmitting	Test Voltage	DC48V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

## **Test Figure:**

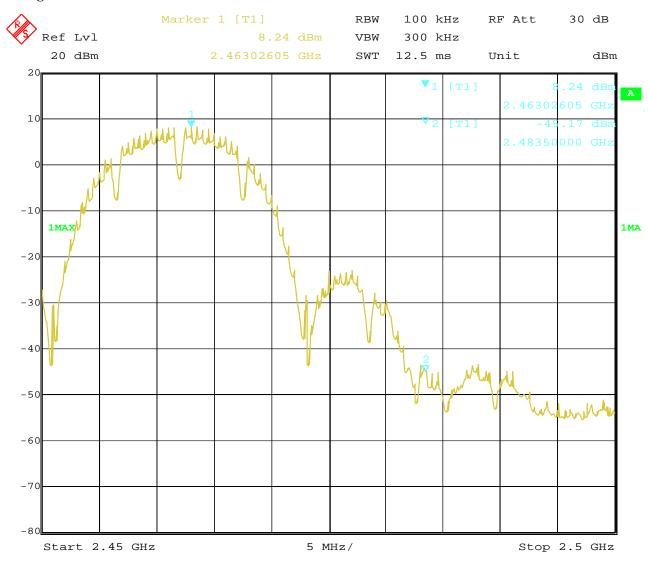

23.APR.2022 17:13:50 Date:

Report No.: TW2203419-02E

Date: 2022-05-16




### For 802.11b mode

# CH01 at 11Mbps

#### Band-edge Measurement 10.4

EUT	Outdoor LoraWAN Gateway	Model	DSGW-010C
Mode	Keeping Transmitting	Test Voltage	DC48V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

## **Test Figure:**

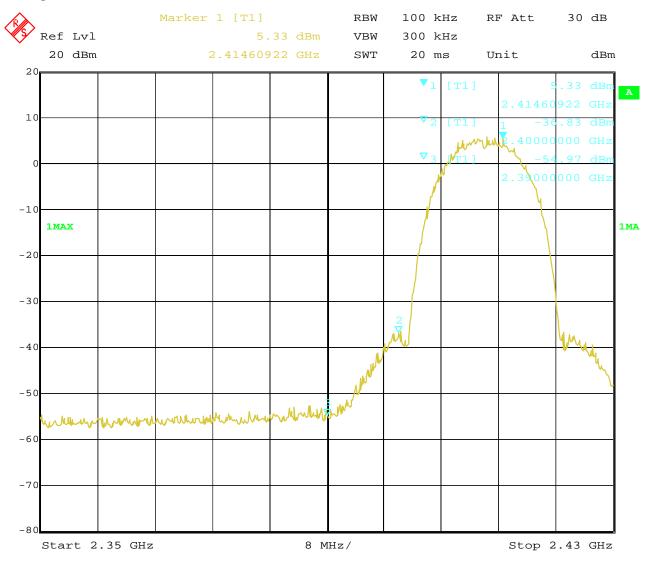

Date: 23.APR.2022 17:11:31

Page 69 of 86

Report No.: TW2203419-02E

Date: 2022-05-16




## CH11 at 11Mbps

#### 10.4 Band-edge Measurement

EUT	Outdoor LoraWAN Gateway	Model	DSGW-010C
Mode	Keeping Transmitting	Test Voltage	DC48V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

## **Test Figure:**

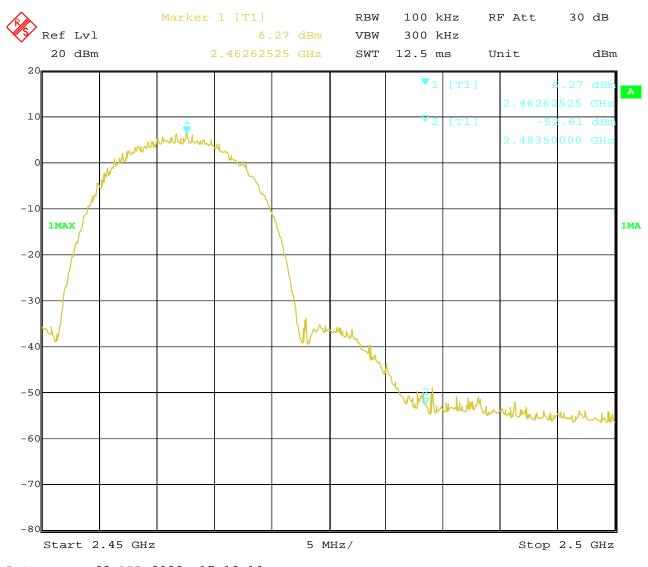

23.APR.2022 17:12:10 Date:

Page 70 of 86

Report No.: TW2203419-02E

Date: 2022-05-16




### For 802.11g mode

CH01 at 6Mbps

#### 10.4 Band-edge Measurement

EUT	Outdoor LoraWAN Gateway	Model	DSGW-010C
Mode	Keeping Transmitting	Test Voltage	DC48V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

## **Test Figure:**

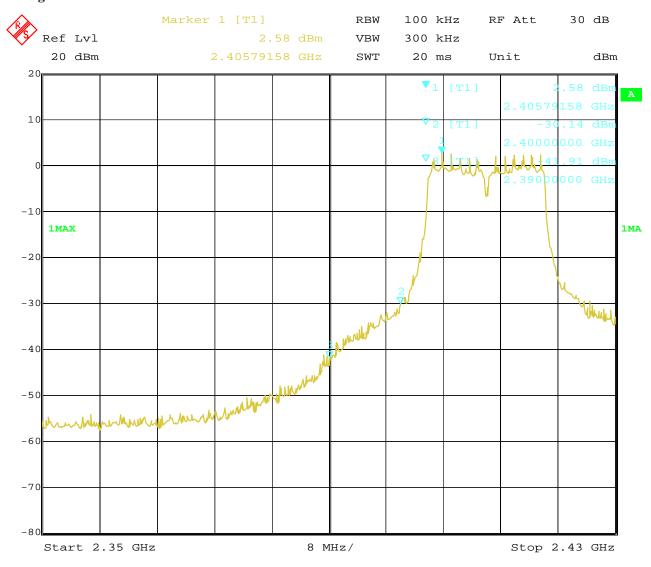

23.APR.2022 17:11:07 Date:

Page 71 of 86

Report No.: TW2203419-02E

Date: 2022-05-16




## CH11 at 6Mbps

#### 10.4 Band-edge Measurement

EUT	Outdoor LoraWAN Gateway	Model	DSGW-010C
Mode	Keeping Transmitting	Test Voltage	DC48V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

## **Test Figure:**

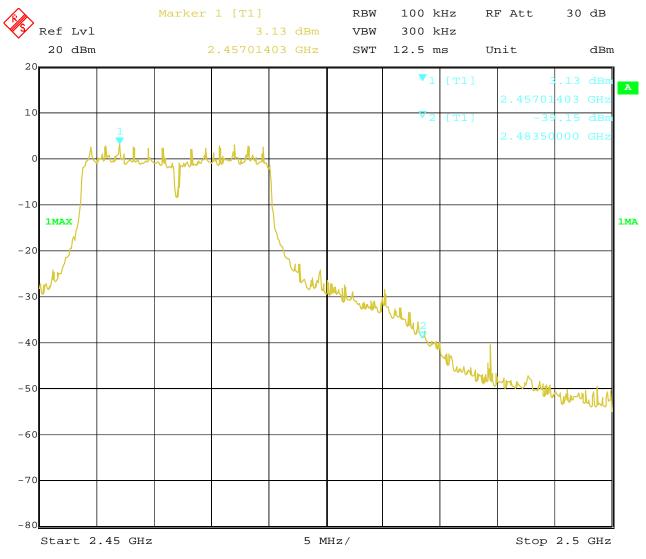

23.APR.2022 Date: 17:13:11

Page 72 of 86

Report No.: TW2203419-02E

Date: 2022-05-16




### For 802.11n (HT20) mode

CH01 at mcs0

## **10.4** Band-edge Measurement

EUT	Outdoor LoraWAN Gateway	Model	DSGW-010C
Mode	Keeping Transmitting	Test Voltage	DC48V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

## **Test Figure:**

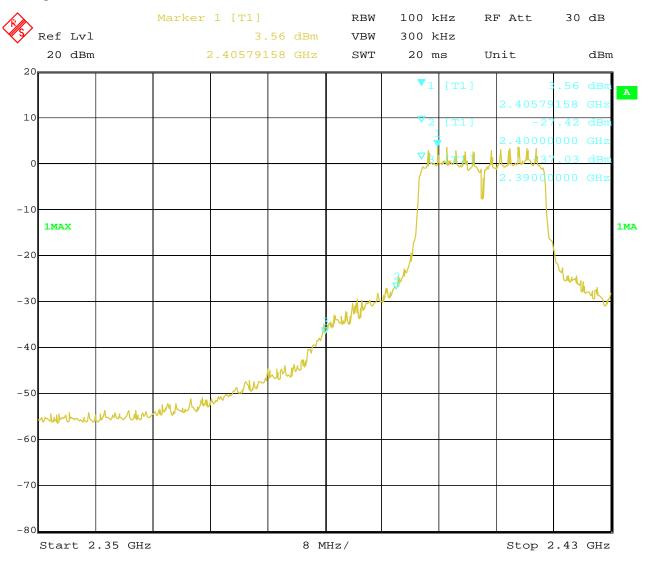

Date: 23.APR.2022 17:09:55

Page 73 of 86

Report No.: TW2203419-02E

Date: 2022-05-16




### CH11 at mcs0

#### 10.4 Band-edge Measurement

EUT	Outdoor LoraWAN Gateway	Model	DSGW-010C
Mode	Keeping Transmitting	Test Voltage	DC48V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

## **Test Figure:**

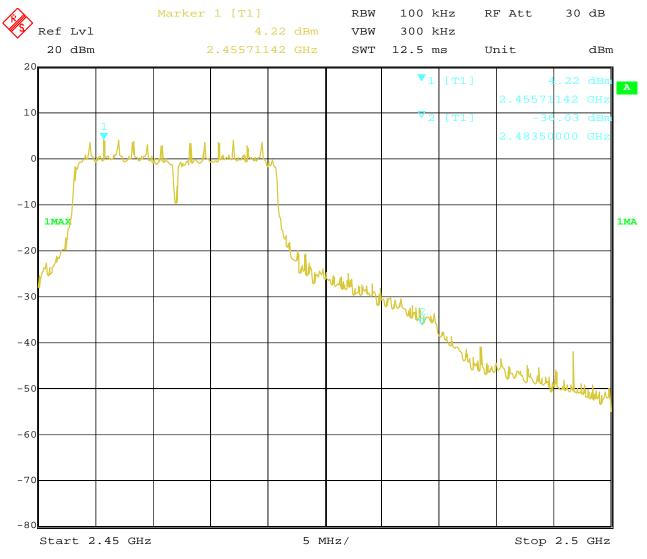

23.APR.2022 Date: 17:14:26

Page 74 of 86

Report No.: TW2203419-02E

Date: 2022-05-16




### For 802.11n (HT40) mode

CH03 at msc0

### **10.4** Band-edge and Restricted band Measurement

EUT	Outdoor LoraWAN Gateway	Model	DSGW-010C
Mode	Keeping Transmitting	Test Voltage	DC48V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

### **Test Figure:**

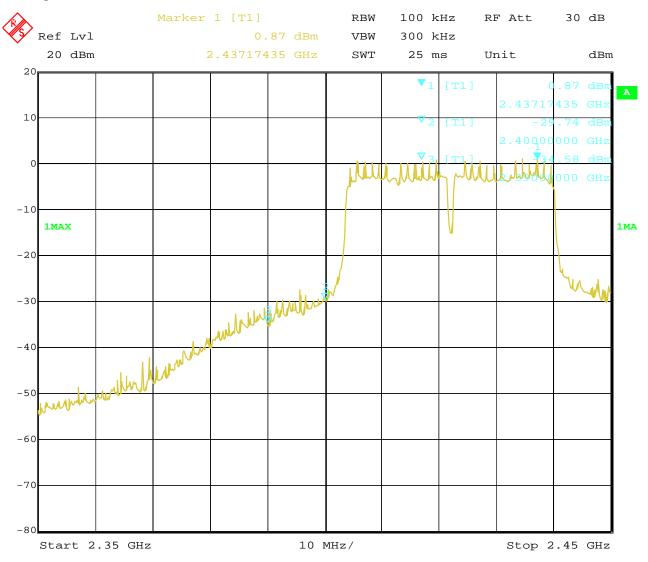

Date: 23.APR.2022 17:08:45

Page 75 of 86

Report No.: TW2203419-02E

Date: 2022-05-16




### CH09 at msc0

### **10.4** Band-edge and Restricted band Measurement

EUT	Outdoor LoraWAN Gateway	Model	DSGW-010C
Mode	Keeping Transmitting	Test Voltage	DC48V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

### **Test Figure:**

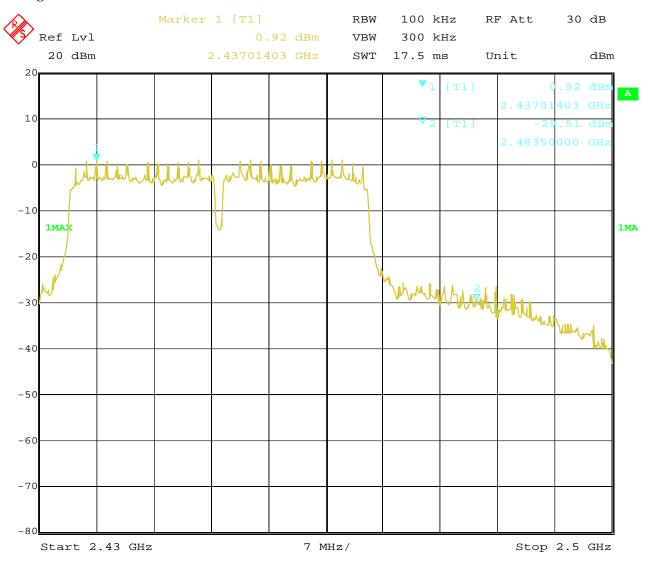

Date: 23.APR.2022 17:08:08

Report No.: TW2203419-02E Page 76 of 86

Date: 2022-05-16



#### 10.5 Restricted band Measurement

EUT	Outdoo	Outdoor LoraWAN Gateway			del	DSGW-010C			
Mode	Kee	Keeping Transmitting			oltage/	DC48V			
Temperature	24 deg. C,			Humidity		56% RH			
Test Result:	Pass				ector	PK			
	802.11n HT20 mode, Low Channel, Horizontal								
2390	PK (dBµV/m)	58.64		•4		$74(dB\mu V/m)$			
	AV (dBμV/m)	44.57	Lli	mit		54(dBµV/m)			
	8	302.11n HT20 mode, L	ow Chanr	nel, Vertic	al				
2390	PK (dBμV/m)	53.68	т:.	mit		74(dBµV/m)			
	AV (dBμV/m)	43.35	Lli	IIII	$54(dB\mu V/m)$				

EUT	Outdoo	r LoraWAN Gateway		Model		DSGW-010C		
Mode	Kee	Keeping Transmitting			Voltage	DC48V		
Temperature		24 deg. C,	Humidity			56% RH		
Test Result:		Pass		Det	ector PK			
802.11n HT20 mode, High Channel, Horizontal								
2483.5	PK (dBμV/m)	58.68	T ::	:4		$74(dB\mu V/m)$		
	AV (dBμV/m)	43.42	Limi	It		$54(dB\mu V/m)$		
	80	2.11n HT20 mode, H	igh Channe	l, Verti	cal			
2483.5	PK (dBμV/m)	55.85	Limi	4	74(dBμV/m)			
	AV (dBμV/m)	42.79	Limi	t		54(dBµV/m)		

Report No.: TW2203419-02E Page 77 of 86

Date: 2022-05-16



#### 10.5 Restricted band Measurement

EUT	Outdoo	or LoraWAN Gateway		Mo	del	DSGW-010C		
Mode	Kee	Keeping Transmitting				DC48V		
Temperature		24 deg. C,				56% RH		
Test Result:		Pass				PK		
802.11g mode, Low Channel, Horizontal								
2390	PK (dBµV/m)	64.35	т:.	:4		$74(dB\mu V/m)$		
	AV (dBμV/m)	46.58	Lli	nit	54(dBµV/m)			
		802.11g mode, Low	Channel,	Vertical				
2390	PK (dBμV/m)	53.35	т:.	imit		74(dBµV/m)		
	AV (dBμV/m)	44.15	LII	IIIt		54(dBµV/m)		

EUT	Outdo	or LoraWAN Gateway		Model		DSGW-010C		
Mode	Keeping Transmitting			Test Voltage		DC48V		
Temperature	24 deg. C,			Humidity		56% RH		
Test Result:			De	tector	PK			
802.11g mode, High Channel, Horizontal								
2483.5	PK (dBµV/m)	62.35	т::	:4		$74(dB\mu V/m)$		
	AV (dBμV/m)	46.75	Limi	It		$54(dB\mu V/m)$		
	8	302.11n HT20 mode, H	igh Channe	l, Verti	cal			
2483.5	PK (dBµV/m)	58.36	Limi	:4	74(dBμV/m)			
	AV (dBμV/m)	43.35	LIIII	IL		$54(dB\mu V/m)$		

Report No.: TW2203419-02E Page 78 of 86

Date: 2022-05-16



#### 10.5 Restricted band Measurement

EUT	Outdoo	or LoraWAN Gateway		Mo	del	DSGW-010C		
Mode	Kee	Keeping Transmitting				DC48V		
Temperature	24 deg. C,			Hun	idity	56% RH		
Test Result:			Dete	ector	PK			
	802.11n HT20 mode, Low Channel, Horizontal							
2390	PK (dBµV/m)	64.43	т:.	:4		$74(dB\mu V/m)$		
	AV (dBμV/m)	46.86	Lli	nit	$54(dB\mu V/m)$			
	8	802.11n HT20 mode, Lo	ow Chanr	nel, Vertic	al			
2390	PK (dBμV/m)	54.34	т:.	Limit		74(dBµV/m)		
	AV (dBμV/m)	44.14	LII			54(dBµV/m)		

EUT	Outdo	or LoraWAN Gateway		Model		DSGW-010C		
Mode	Ke	Keeping Transmitting			Voltage	DC48V		
Temperature		24 deg. C,			nidity	56% RH		
Test Result:		Pass		Det	Detector PK			
802.11n HT20 mode, High Channel, Horizontal								
2483.5	PK (dBμV/m)	63.35	т ::	:4		$74(dB\mu V/m)$		
	AV (dBμV/m)	47.47	Limi	It		$54(dB\mu V/m)$		
	8	02.11n HT20 mode, H	igh Channe	l, Verti	cal			
2483.5	PK (dBμV/m)	59.25	Limi	4	74(dBμV/m)			
	AV (dBμV/m)	43.46	Limit		$54(dB\mu V/m)$			

Page 79 of 86

Report No.: TW2203419-02E


Date: 2022-05-16



#### 10.5 Restricted band Measurement

EUT	Outdoo	or LoraWAN Gateway		M	odel	DSGW-010C			
Mode	Kee	Keeping Transmitting				DC48V			
Temperature			Hur	nidity	56% RH				
Test Result:	Pass Detector PK								
	802.11n HT40 mode, Low Channel, Horizontal								
2390	PK (dBµV/m)	69.35			74(dBμV/m)				
	AV (dBμV/m)	50.79	Liı	nıt		54(dBμV/m)			
		802.11n HT40 mode, L	ow Chan	nel Vertic	al				
2390	PK (dBµV/m)	56.31	т:.	nit	74(dBμV/m)				
	AV (dBμV/m)	47.89	LII	1111		$54(dB\mu V/m)$			

### **Test Plots**

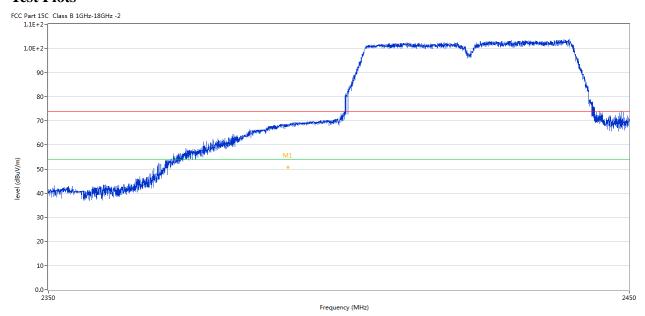


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2390.715	69.35	-3.53	74.0	-4.65	Peak	264.00	100	Horizontal	Pass
1**	2390.715	50.79	-3.53	54.0	-3.21	AV	264.00	100	Horizontal	Pass

Page 80 of 86

Report No.: TW2203419-02E

Date: 2022-05-16



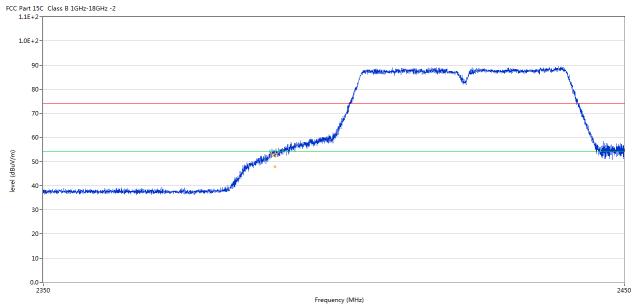

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2389.390	56.31	-3.53	74.0	-17.69	Peak	341.00	100	Vertical	Pass
1**	2389.390	47.89	-3.53	54.0	-6.11	AV	341.00	100	Vertical	Pass


Page 81 of 86

Report No.: TW2203419-02E

Date: 2022-05-16



EUT	Outdoor LoraWAN Gateway				/lodel	DSGW-010C			
Mode	Keeping Transmitting				Voltage	DC48V			
Temperature	24 deg. C,				midity	56% RH			
Test Result:	Pass				etector	PK			
802.11n HT40 mode, High Channel, Horizontal									
2483.5	PK (dBµV/m)	69.48	т :	•,		$74(dB\mu V/m)$			
	AV ( $dB\mu V/m$ )	50.96	Lim	1τ	54(dBμV/m)				
802.11n HT40 mode, High Channel, Vertical									
2483.5	PK (dBμV/m)	54.35	T :			$74(dB\mu V/m)$			
	AV (dBμV/m)	47.79	Limit			$54(dB\mu V/m)$			

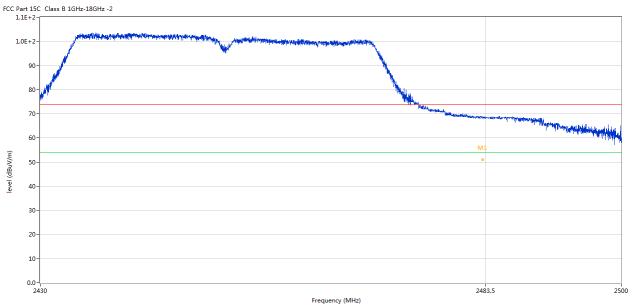

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2483.134	69.48	-3.57	74.0	-4.52	Peak	282.00	100	Horizontal	Pass
1**	2483.134	50.96	-3.57	54.0	-3.04	AV	282.00	100	Horizontal	Pass

Page 82 of 86

Report No.: TW2203419-02E

Date: 2022-05-16





No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2483.537	54.35	-3.57	74.0	-19.65	Peak	0.00	100	Vertical	Pass
1**	2483.537	47.79	-3.57	54.0	-6.21	AV	0.00	100	Vertical	Pass

Report No.: TW2203419-02E

Date: 2022-05-16



Page 83 of 86

## 11.0 Antenna Requirement

## 11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

### 11.2 Antenna Connected construction

External Antenna with Reverse polarity N connector used. The gain of the antennas is 2.8dBi (Declared by the manufacturer)

Report No.: TW2203419-02E Page 84 of 86

Date: 2022-05-16




### 12.0 FCC ID Label

## FCC ID: 2AUXBDSGW-010C

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

### **Mark Location:**

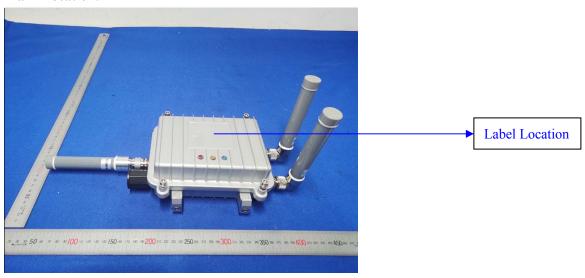

Page 85 of 86

Report No.: TW2203419-02E

Date: 2022-05-16



#### 13.0 Photo of testing

Conducted Emission Test Setup:




Report No.: TW2203419-02E

Date: 2022-05-16



# Radiated Emission Test Setup:

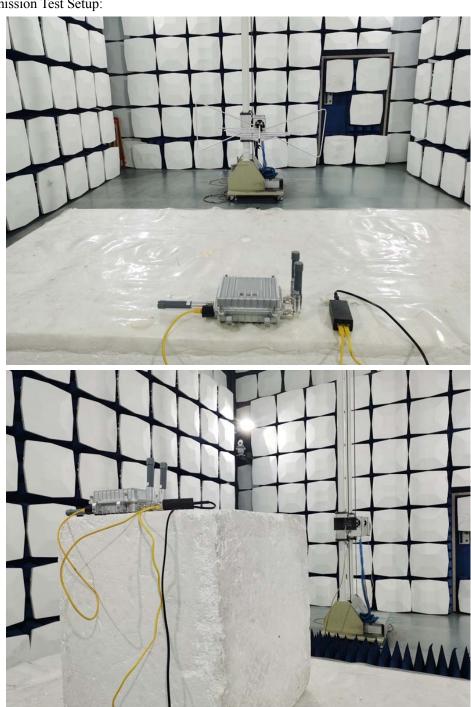

## Photographs - EUT

Please refer test report TW2203419-01E

## -End of the report-

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the propert. discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.