



Page 66 of 85 Report No.: CTC2024299407


3.5. DTS Bandwidth

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(2) / RSS-247 5.2 a

Test Item	Limit	Frequency Range (MHz)
DTS Bandwidth	≥500 kHz (6dB bandwidth)	2400~2483.5

Test Configuration



Test Procedure

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- 2. DTS Spectrum Setting:
 - (1) Set RBW = 100 kHz.
 - (2) Set the video bandwidth (VBW) ≥ 3 RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.
 - OCB Spectrum Setting:
 - (1) Set RBW = 1% ~ 5% occupied bandwidth.
 - (2) Set the video bandwidth (VBW) ≥ 3 RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.

NOTE: The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.

Test Mode

Please refer to the clause 2.4.

TRF No: CTC-TR-057_A1 For anti-rake ve





Test Result

Page 67 of 85 Report No.: CTC2024299407


Test Mode	Antenna	Channel Frequency[MHz]	OCB [MHz]	DTS BW [MHz]	Limit[MHz]	Verdict
		2412	13.784	8.560		
11B	Ant1	2437	13.736	8.560		
		2462	13.800	8.560		1
	11G Ant1	2412	16.894	15.480		
11G		2437	16.963	16.320		
		2462	16.956	16.320	>0 E	PASS
		2412	18.129	15.320	≥0.5	PASS
11N20SISO	Ant1	2437	18.045	16.880		
		2462	18.030	16.520		
11N40SISO Ant		2422	36.364	35.440		
	Ant1	2437	36.356	35.360		
		2452	36.373	35.040		



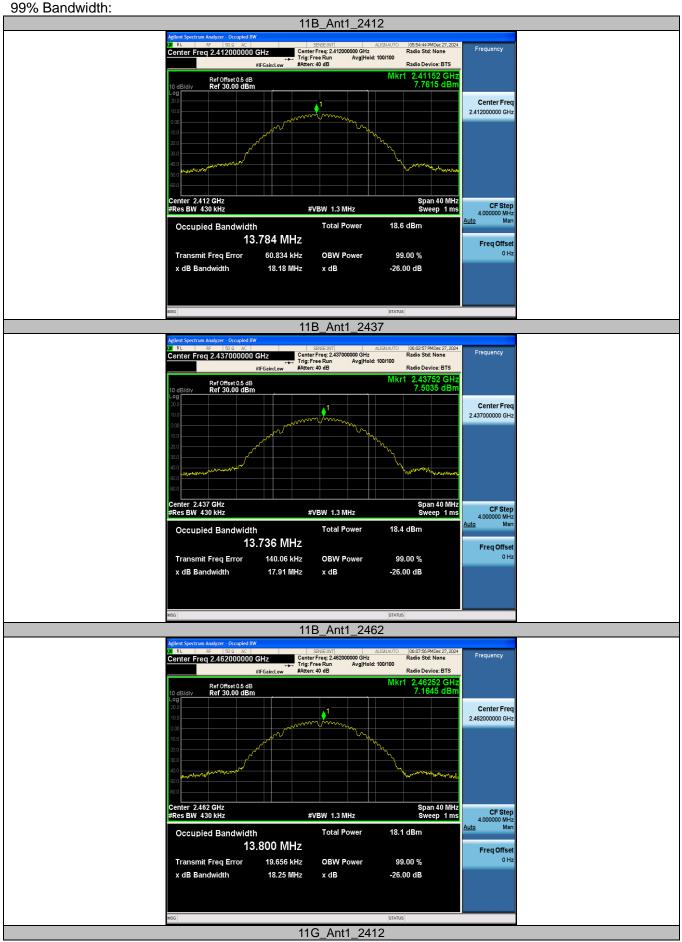

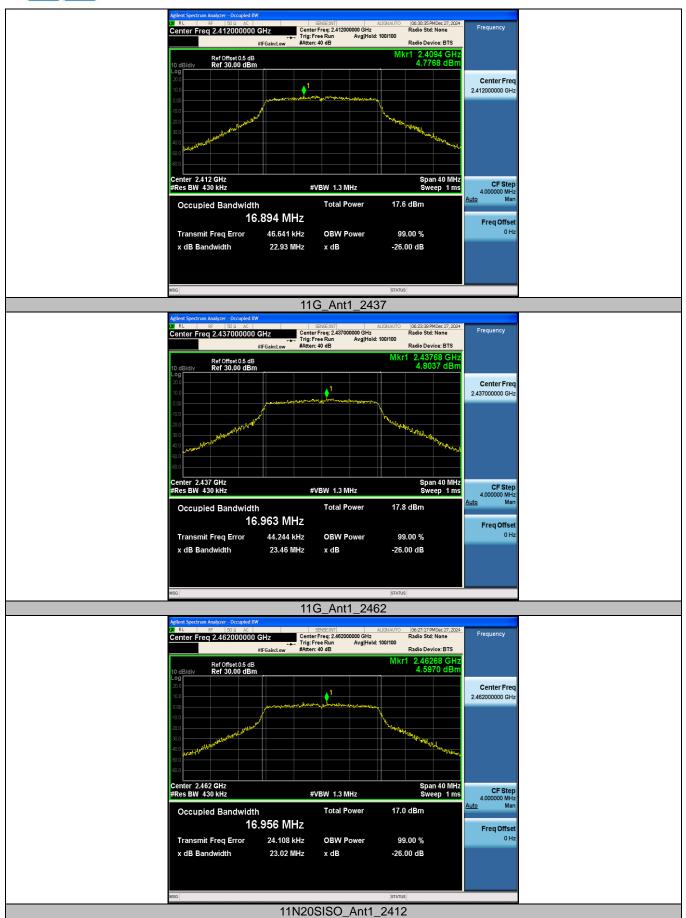



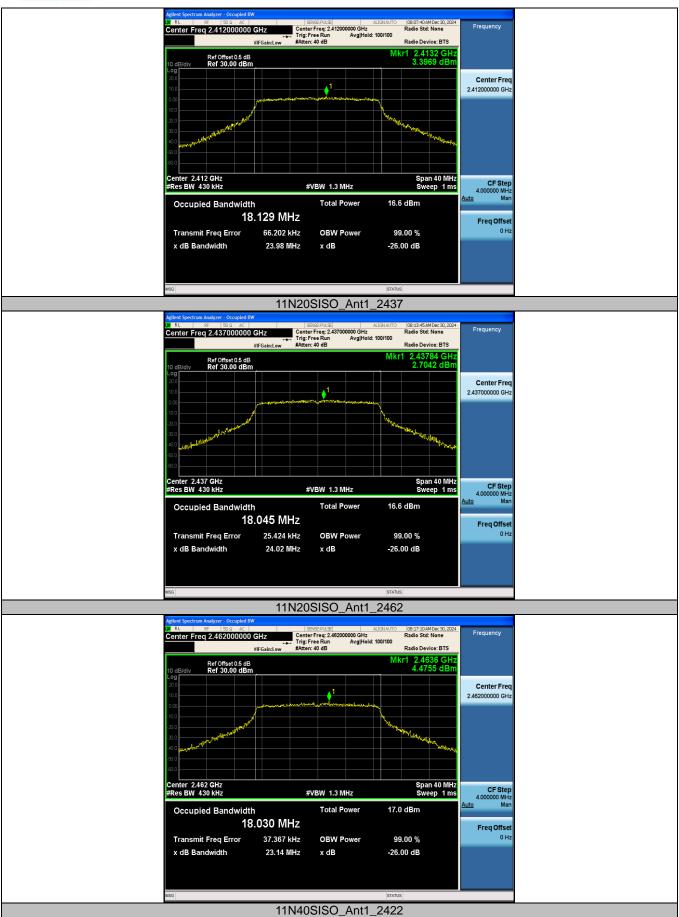







TRF No: CTC-TR-057_A1 Society: <u>vz.cnca.cn</u>





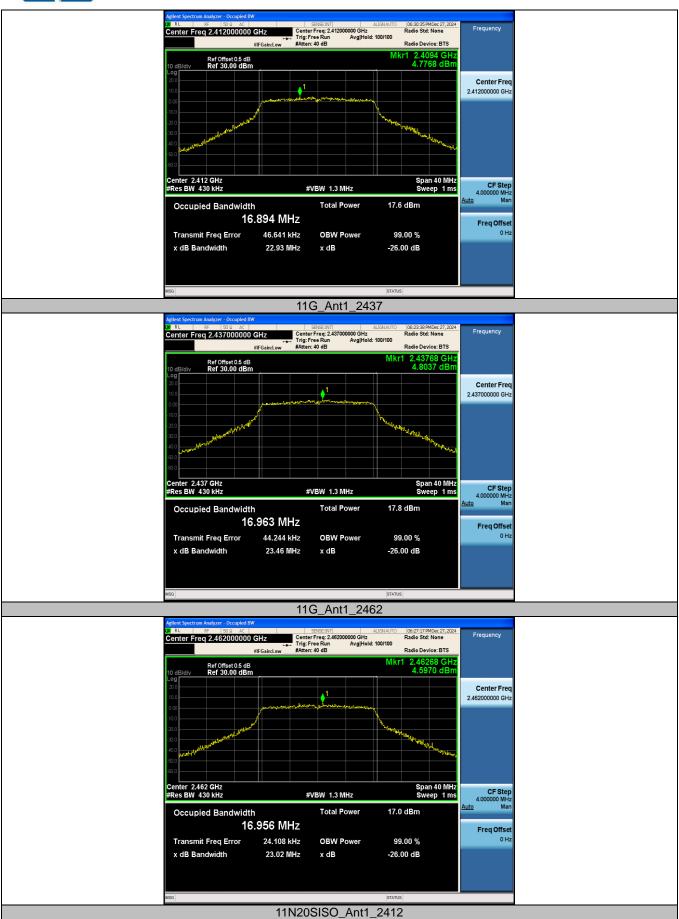

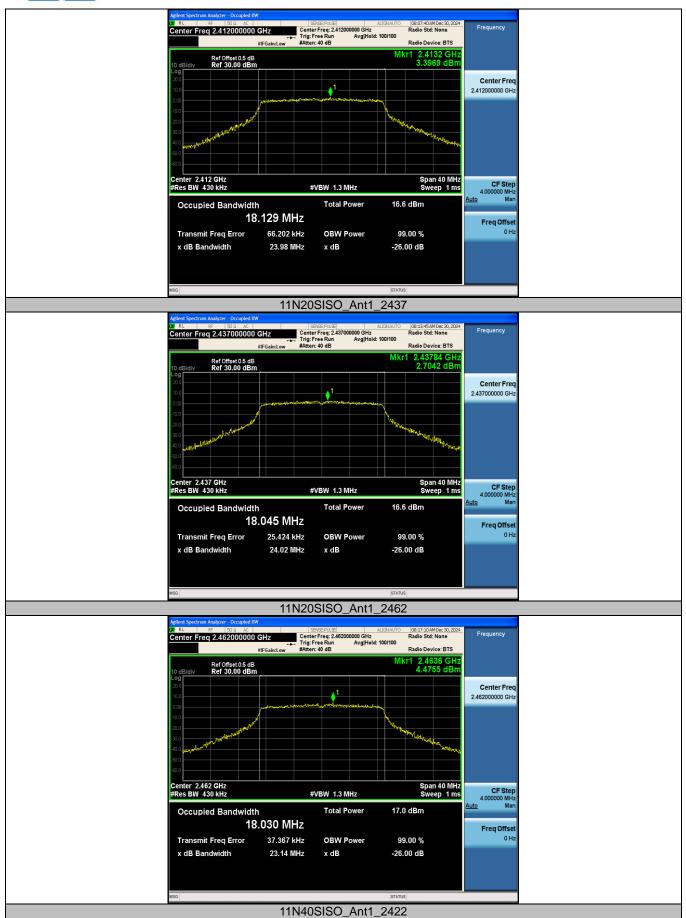





TRF No: CTC-TR-057_A1 Society: <u>vz.cnca.cn</u>

Page 76 of 85

Report No.: CTC2024299407




3.6. Peak Output Power

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3) / RSS-247 5.4 d

Section	Test Item	Test Item Limit	
FCC CFR 47 Part15.247 (b)(3)	Maximum Conducted Output Power	1 Watt or 30dBm	2400~2483.5
ISED RSS-247 5.4 d	Maximum Conducted Output Power	1 Watt or 30dBm	2400~2483.5
	EIRP	4 Watt or 36dBm	2400~2483.5

Test Configuration




Test Procedure

- 1. The maximum conducted output power may be measured using a broadband RF power meter.
- 2. Power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor.
- 3. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.
- 4. Record the measurement data.

Test Mode

Please refer to the clause 2.4.





Test Result

Model: WCN3988 A1

Test Mode	Antenna	Frequency [MHz]	Conducted Peak Powert[dBm]	Conducted Limit[dBm]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
		2412	18.22	≤30.00	23.86	≤36.00	PASS
11B	Ant1	2437	17.93	≤30.00	23.57	≤36.00	PASS
		2462	17.61	≤30.00	23.25	≤36.00	PASS
		2412	18.46	≤30.00	24.10	≤36.00	PASS
11G	Ant1	2437	18.54	≤30.00	24.18	≤36.00	PASS
		2462	17.89	≤30.00	23.53	≤36.00	PASS
		2412	17.04	≤30.00	22.68	≤36.00	PASS
11N20SISO	Ant1	2437	17.39	≤30.00	23.03	≤36.00	PASS
		2462	17.75	≤30.00	23.39	≤36.00	PASS
11N40SISO		2422	16.93	≤30.00	22.57	≤36.00	PASS
	Ant1	2437	16.91	≤30.00	22.55	≤36.00	PASS
		2452	16.44	≤30.00	22.08	≤36.00	PASS

Model: WCN3988 A2

Test Mode	Antenna	Frequency [MHz]	Conducted Peak Powert[dBm]	Conducted Limit[dBm]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
		2412	18.20	≤30.00	23.84	≤36.00	PASS
11B	Ant1	2437	17.98	≤30.00	23.62	≤36.00	PASS
		2462	17.67	≤30.00	23.31	≤36.00	PASS
		2412	18.44	≤30.00	24.08	≤36.00	PASS
11G	Ant1	2437	18.51	≤30.00	24.15	≤36.00	PASS
		2462	17.92	≤30.00	23.56	≤36.00	PASS
		2412	17.16	≤30.00	22.80	≤36.00	PASS
11N20SISO	Ant1	2437	17.44	≤30.00	23.08	≤36.00	PASS
		2462	17.70	≤30.00	23.34	≤36.00	PASS
11N40SISO		2422	16.91	≤30.00	22.55	≤36.00	PASS
	Ant1	2437	16.88	≤30.00	22.52	≤36.00	PASS
		2452	16.40	≤30.00	22.04	≤36.00	PASS



Page 78 of 85 Report No.: CTC2024299407


3.7. Power Spectral Density

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (e) / RSS-247 5.2 b

Test Item	Limit	Frequency Range (MHz)	
Power Spectral Density	8 dBm (in any 3 kHz)	2400~2483.5	

Test Configuration



Test Procedure

- 1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- 2. The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v05r02.
- 3. Spectrum Setting:

Set analyzer center frequency to DTS channel center frequency.

Set span to at least 1.5 times the OBW.

Set RBW to: 3 kHz ≤ RBW ≤ 100 kHz.

Set VBW ≥ [3 x RBW].

Detector = power averaging (rms) or sample detector (when rms not available).

Ensure that the number of measurement points in the sweep ≥ [2 x span / RBW].

Sweep time = auto couple.

Employ trace averaging (rms) mode over a minimum of 100 traces.

Use the peak marker function to determine the maximum amplitude level.

If the measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).

Test Mode

Please refer to the clause 2.4.




Test Result


Report No.: CTC2024299407

Test Mode	Antenna	Frequency[MHz]	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
		2412	-1.90	≤8.00	PASS
11B	Ant1	2437	-2.57	≤8.00	PASS
		2462	-2.00	≤8.00	PASS
		2412	-7.94	≤8.00	PASS
11G	Ant1	2437	-8.39	≤8.00	PASS
		2462	-9.36	≤8.00	PASS
	Ant1	2412	-8.76	≤8.00	PASS
11N20SISO		2437	-10.51	≤8.00	PASS
		2462	-9.22	≤8.00	PASS
11N40SISO		2422	-12.95	≤8.00	PASS
	Ant1	2437	-13.39	≤8.00	PASS
		2452	-14.10	≤8.00	PASS




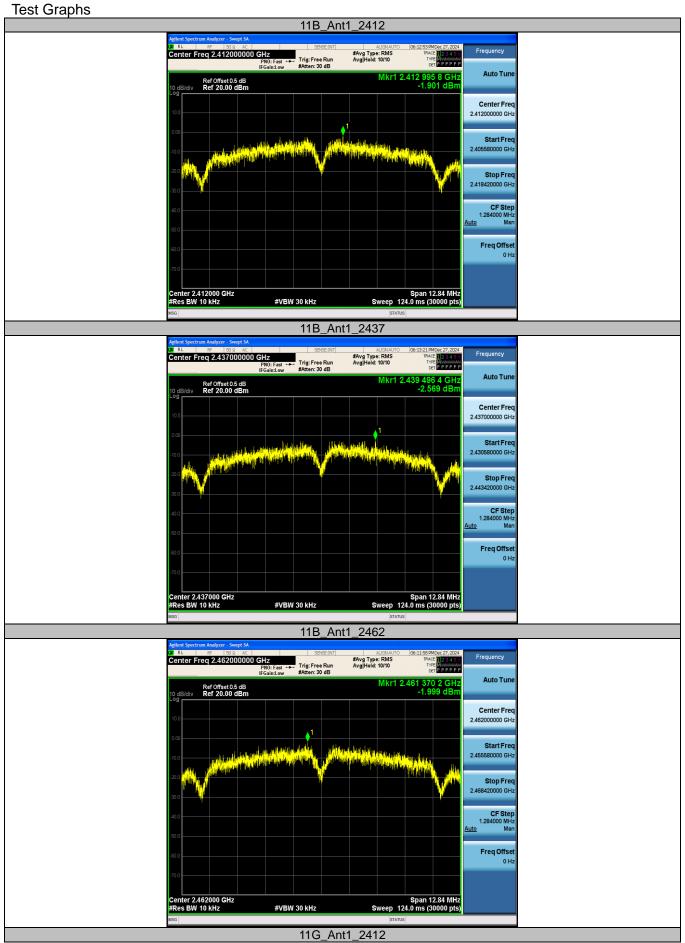




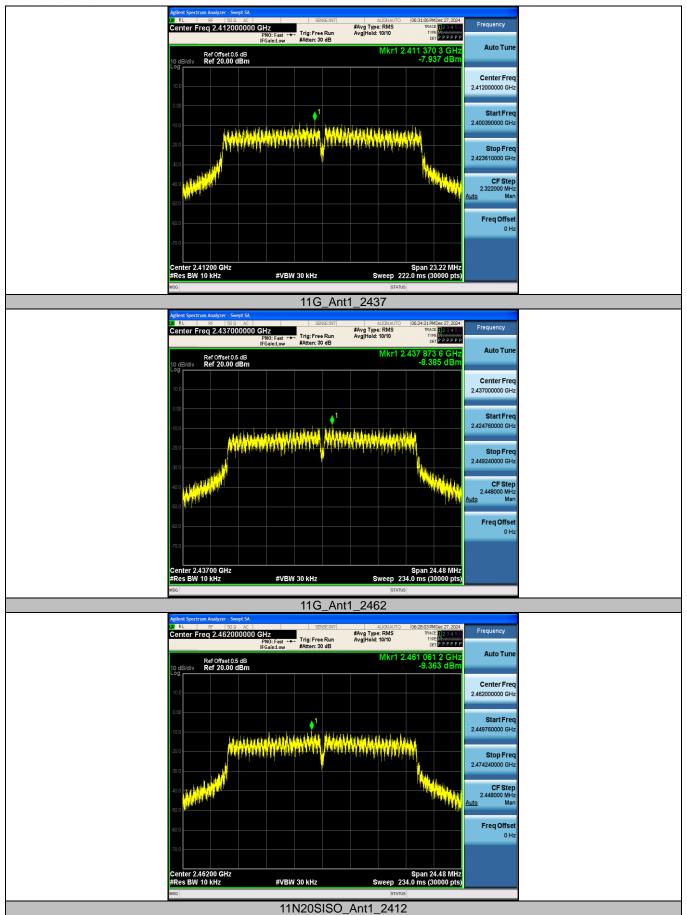



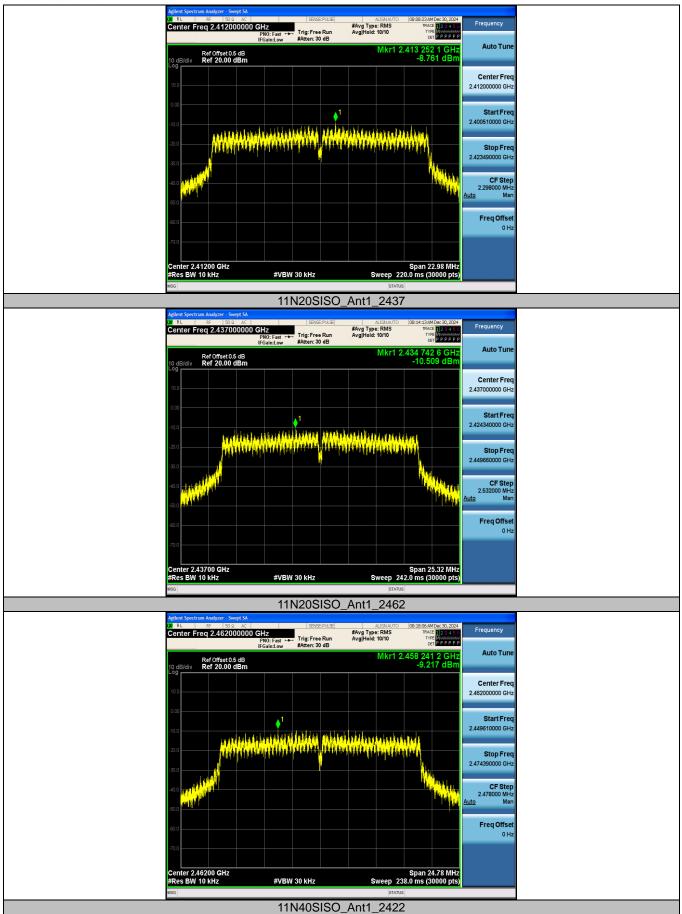



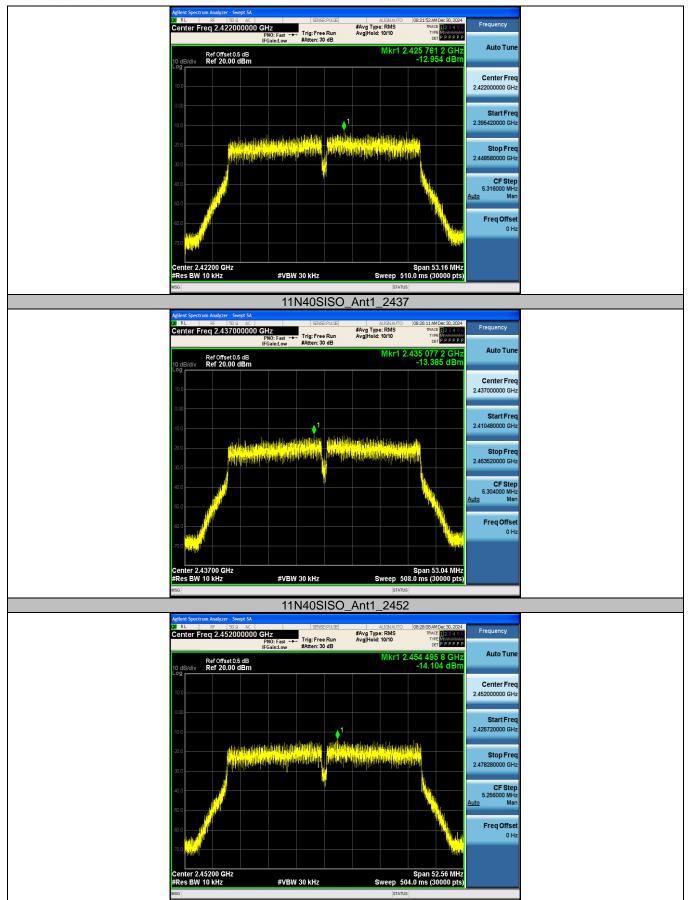

Page 84 of

Page 84 of 85 Report No.: CTC2024299407

3.8. Duty Cycle

Limit

None, for report purposes only.

Test Configuration



Test Procedure

- 1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- 2. The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v05r02.
- 3. Spectrum Setting:

Set analyzer center frequency to test channel center frequency.

Set the span to 0Hz.

Set the RBW to 10MHz.

Set the VBW to 10MHz.

Detector: Peak. Sweep time: Auto.

Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

Test Mode

Please refer to the clause 2.4.

Test Result

Test Mode	Antenna	Frequency [MHz]	Transmission Duration [ms]	Transmission Period [ms]	DC [%]	1/T Minimum VBW (kHz)	Final Setting for VBW (kHz)
		2412	12.21	12.31	99.19	0.08	1
11B	Ant1	2437	12.21	12.30	99.27	0.08	1
		2462	12.21	12.30	99.27	0.08	1
		2412	2.03	2.07	98.07	0.49	1
11G	Ant1	2437	2.02	2.06	98.06	0.50	1
		2462	2.03	2.06	98.54	0.49	1
		2412	1.89	1.92	98.44	0.53	1
11N20SISO	Ant1	2437	1.89	1.93	97.93	0.53	1
		2462	1.89	1.93	97.93	0.53	1
		2422	0.93	0.98	94.90	1.08	3
11N40SISO	Ant1	2437	0.93	0.97	95.88	1.08	3
		2452	0.93	0.98	94.90	1.08	3

TRF No: CTC-TR-057_A1 For anti-fake verifica Society: <u>vz.cnca.cn</u>



Page 85 of 85 Report No.: CTC2024299407

3.9. Antenna Requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i)

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Test Result

Result

The directional gain of the antenna is 6.05dBi, please refer to the EUT internal photographs antenna photo.

RSS-Gen Issue 5 Section 6.8

The applicant for equipment certification, as per RSP-100, must provide a list of all antenna types that may be used with the licence-exempt transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. Licence-exempt transmitters that have received equipment certification may operate with different types of antennas. However, it is not permissible to exceed the maximum equivalent isotropically radiated power(e.i.r.p.) limits specified in the applicable standard (RSS) for licence-exempt apparatus.

PASS. The EUT has 1 antenna: a FPC Antenna for 2.4G WIFI. Note: Antenna use a permanently attached antenna which is not replaceable. Not using a standard antenna jack or electrical connector for antenna replacement. The antenna has to be professionally installed (please provide method of installation). Which in accordance to RSS-Gen 6.8, please refer to the internal photos.