


11.5 Test data for Right Earbud


11.5.1 Test data for 1 Mbps

-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402.00	10.32	21.00	10.68
MIDDLE	2 441.00	11.14	21.00	9.86
HIGH	2 480.00	11.34	21.00	9.66

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

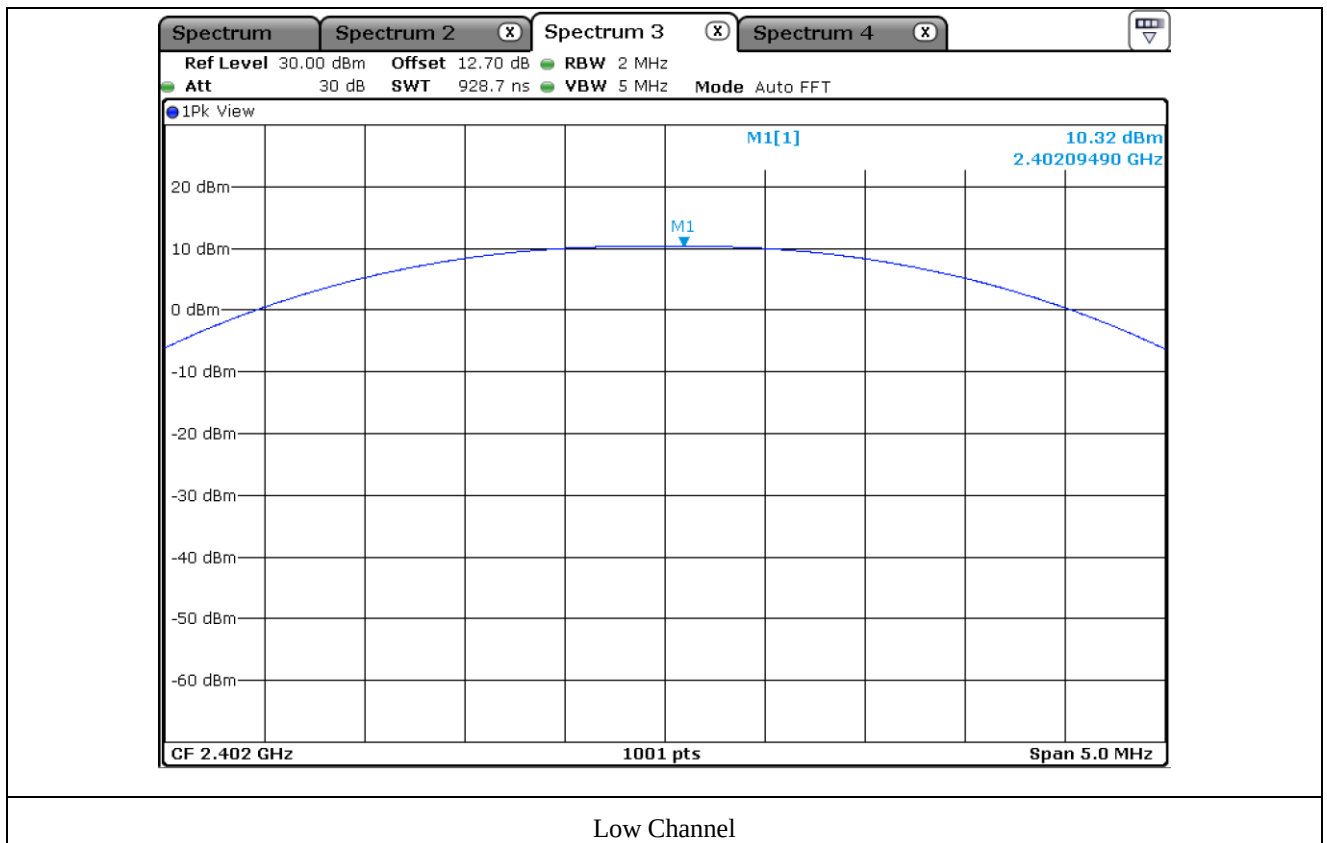

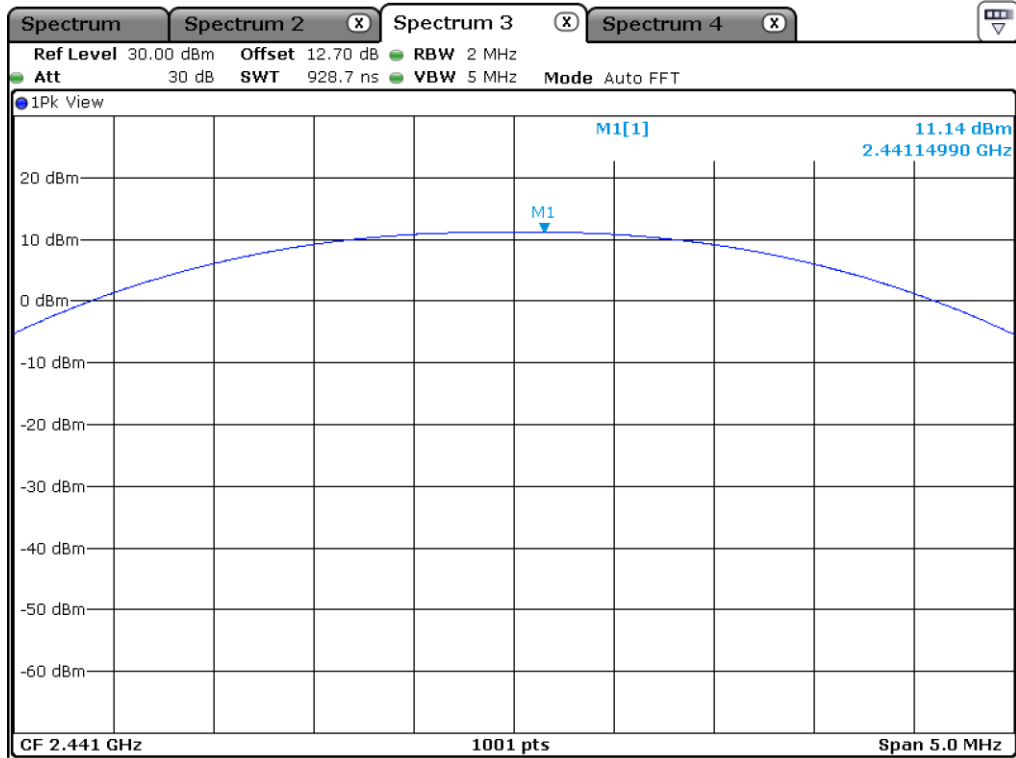

Middle Channel

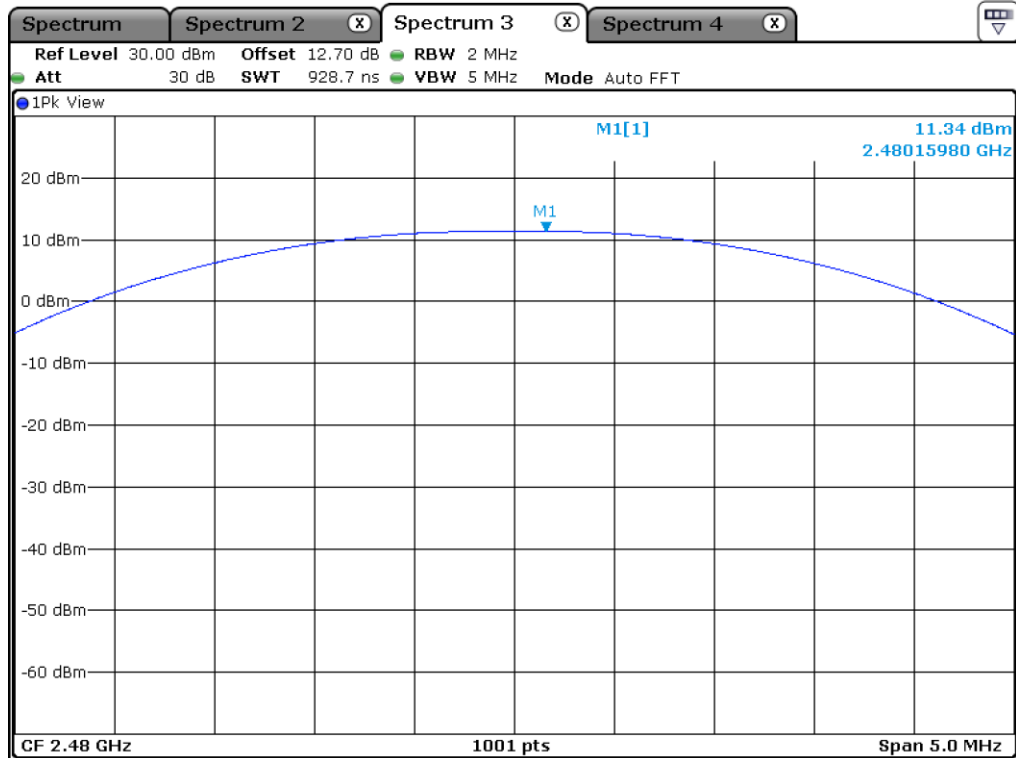


High Channel


11.5.2 Test data for 2 Mbps

-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402.00	10.46	21.00	10.54
MIDDLE	2 441.00	11.15	21.00	9.85
HIGH	2 480.00	11.01	21.00	9.99

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

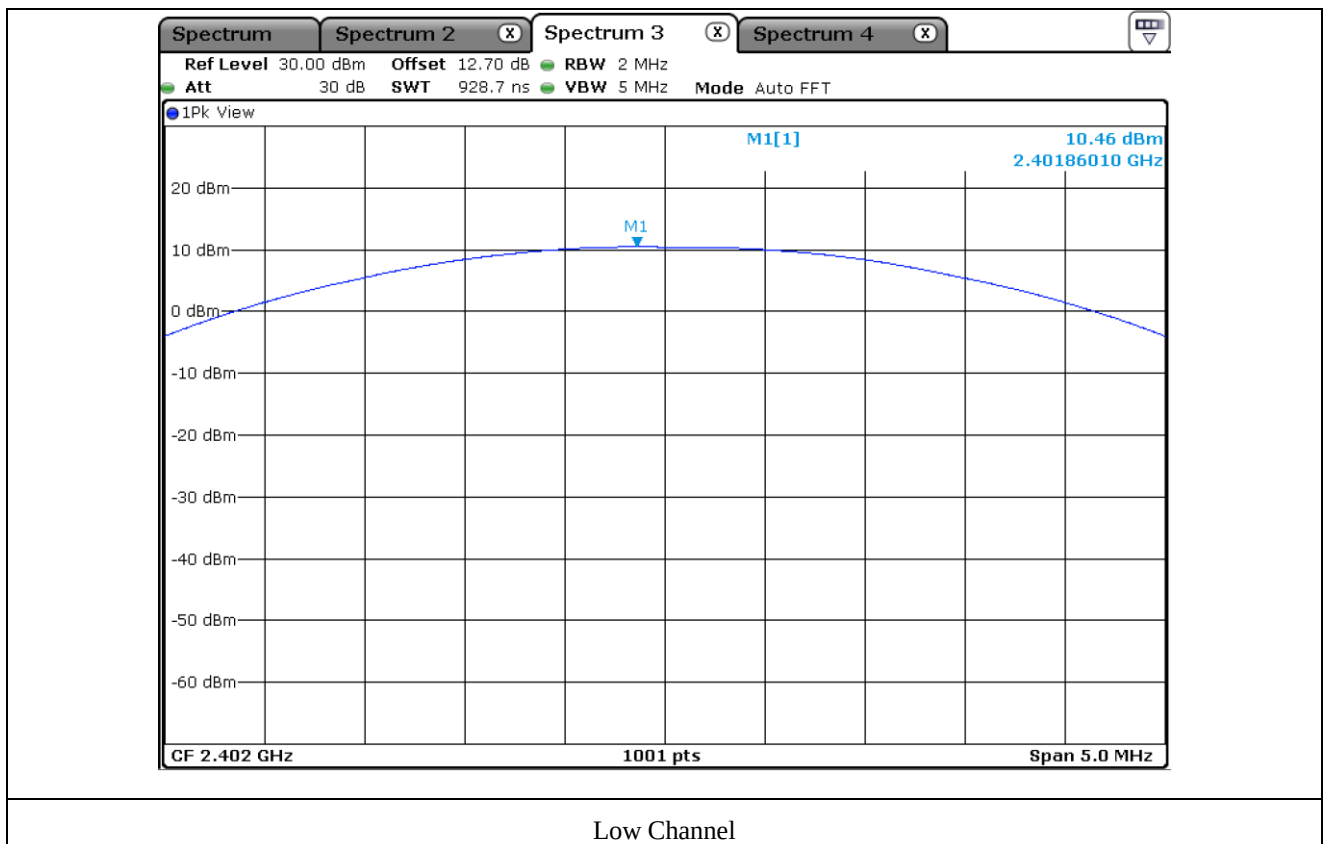

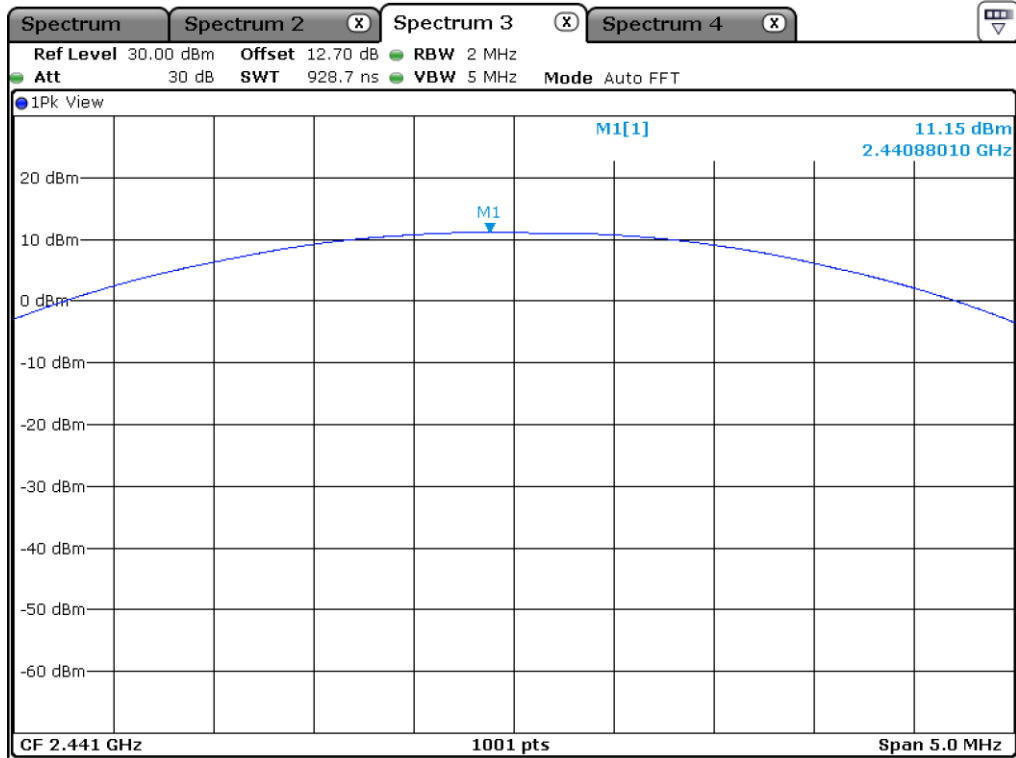

Middle Channel

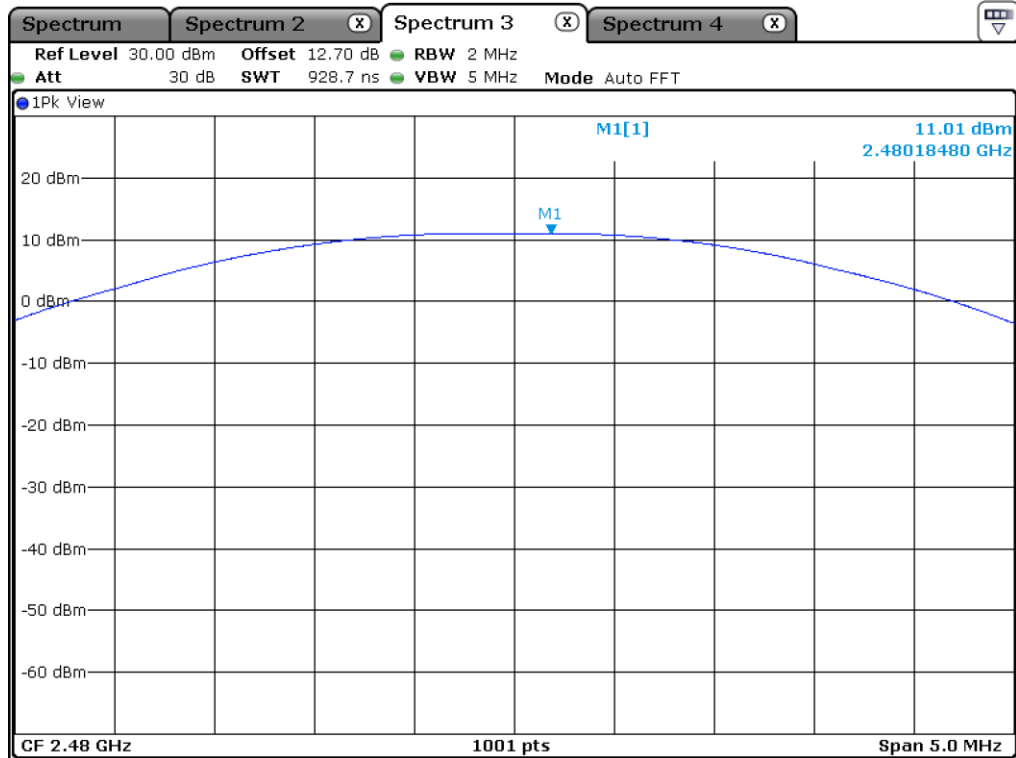


High Channel


11.5.3 Test data for 3 Mbps

-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402.00	10.62	21.00	10.38
MIDDLE	2 441.00	11.22	21.00	9.78
HIGH	2 480.00	11.39	21.00	9.61

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

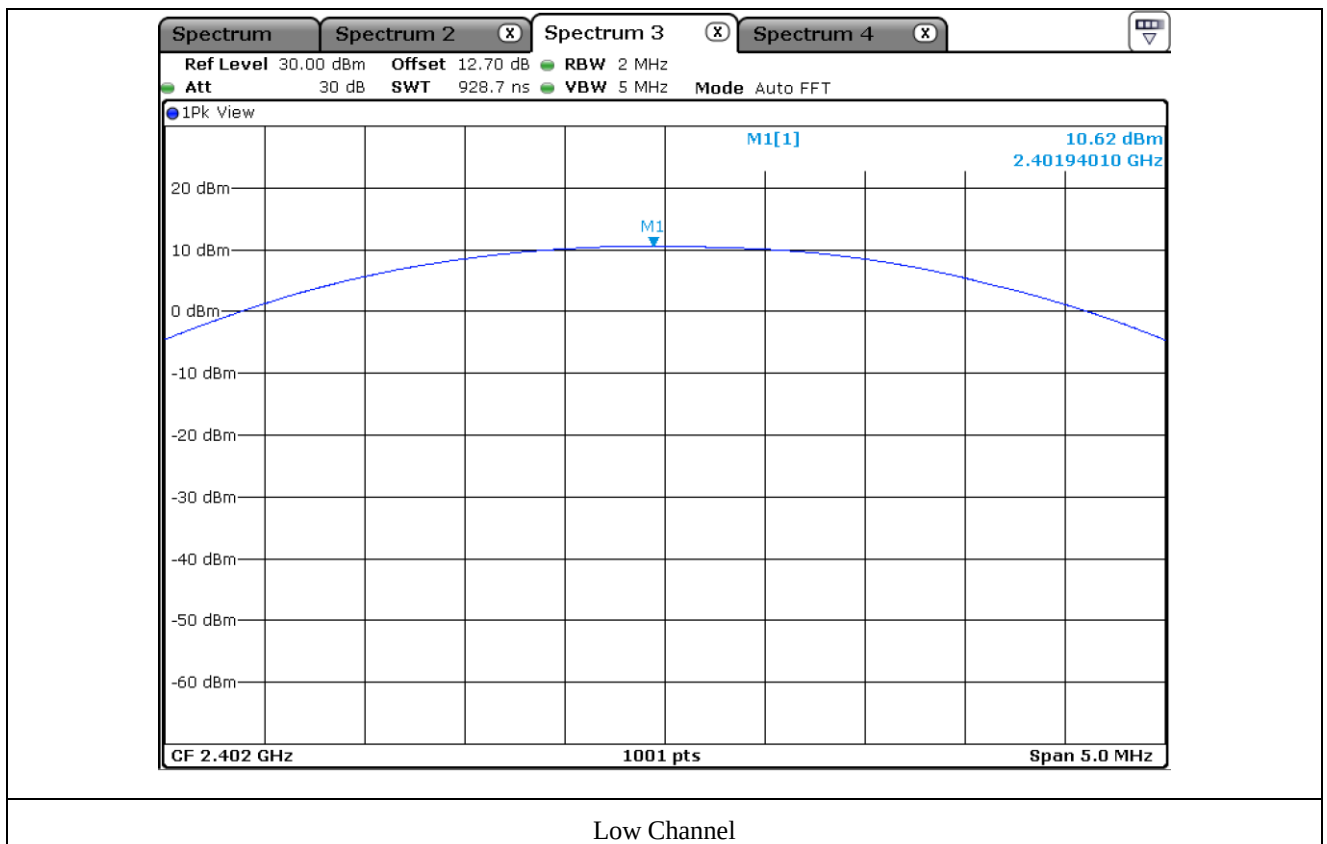

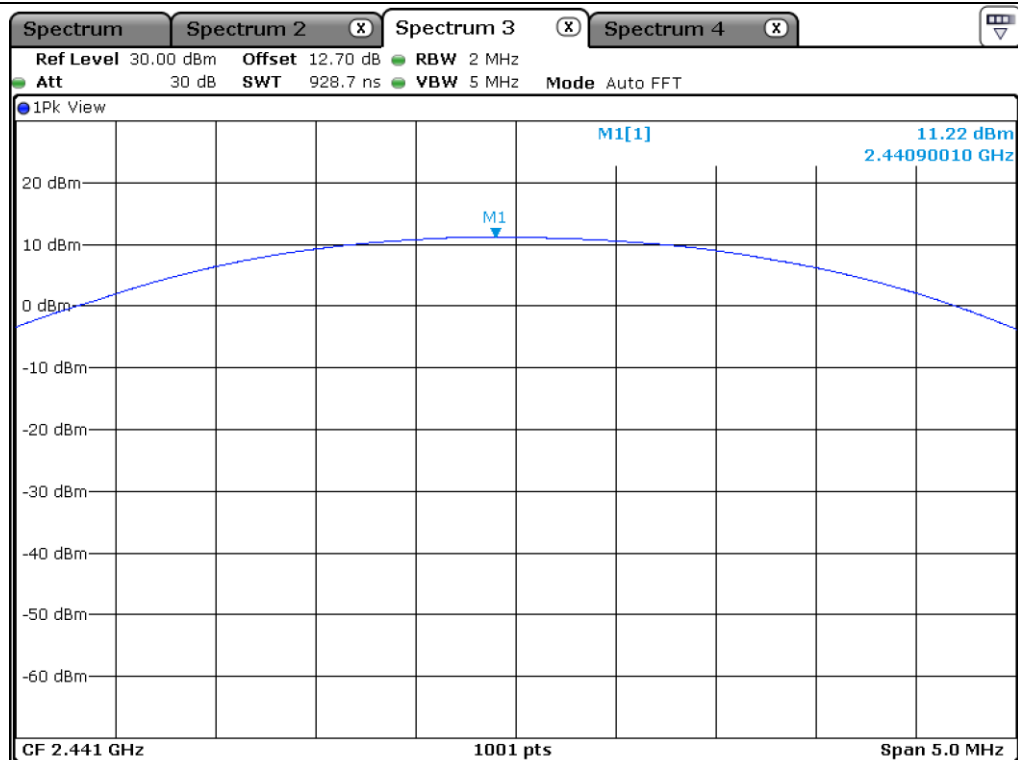

Middle Channel

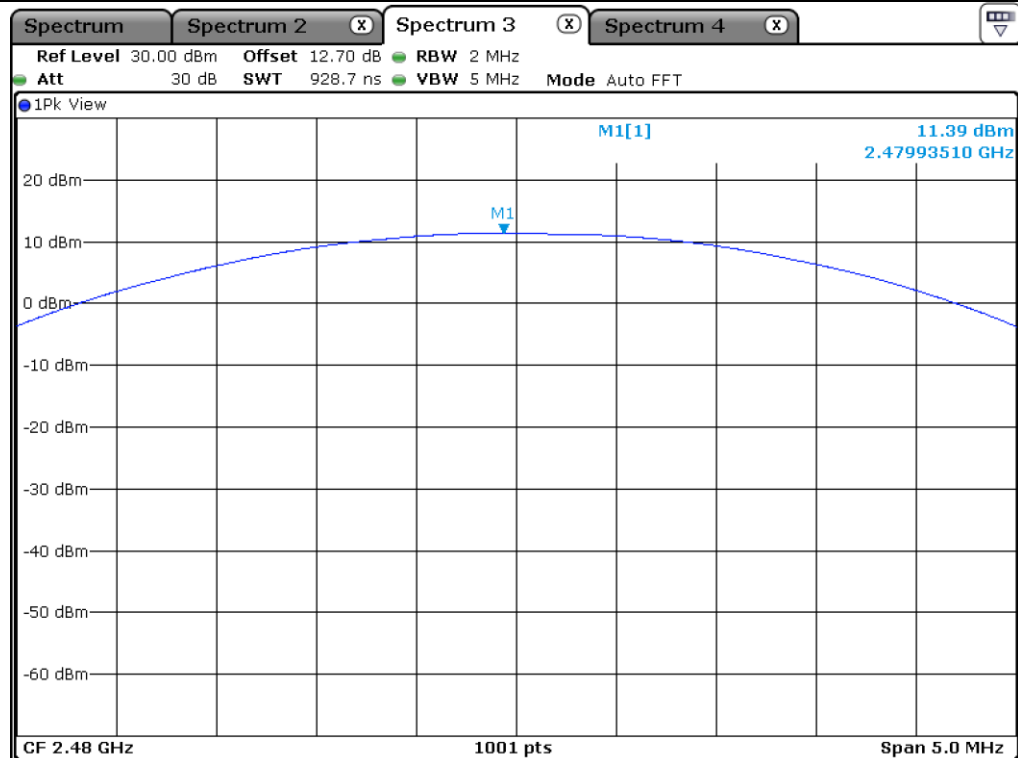

High Channel


12. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND

12.1 Operating environment

Temperature : 22 °C
Relative humidity : 46 % R.H.

12.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution and video bandwidth is set to 100 kHz, and peak detection was used.

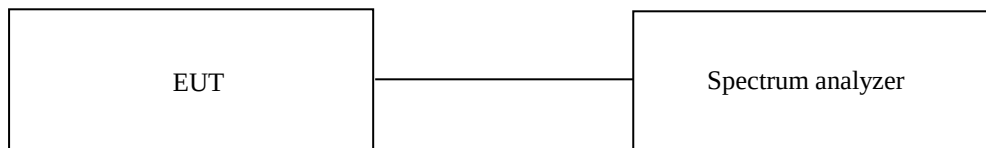

12.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3 m semi anechoic chamber. The EUT was placed on turntable approximately 1.5 m above the ground plane.


The frequency spectrum from 30 MHz to 26.5 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.


12.4 Test Date

September 10, 2021 ~ September 15, 2021


12.5 Test data for conducted emission (Left Earbud)

12.5.1 Test data for 1 Mbps

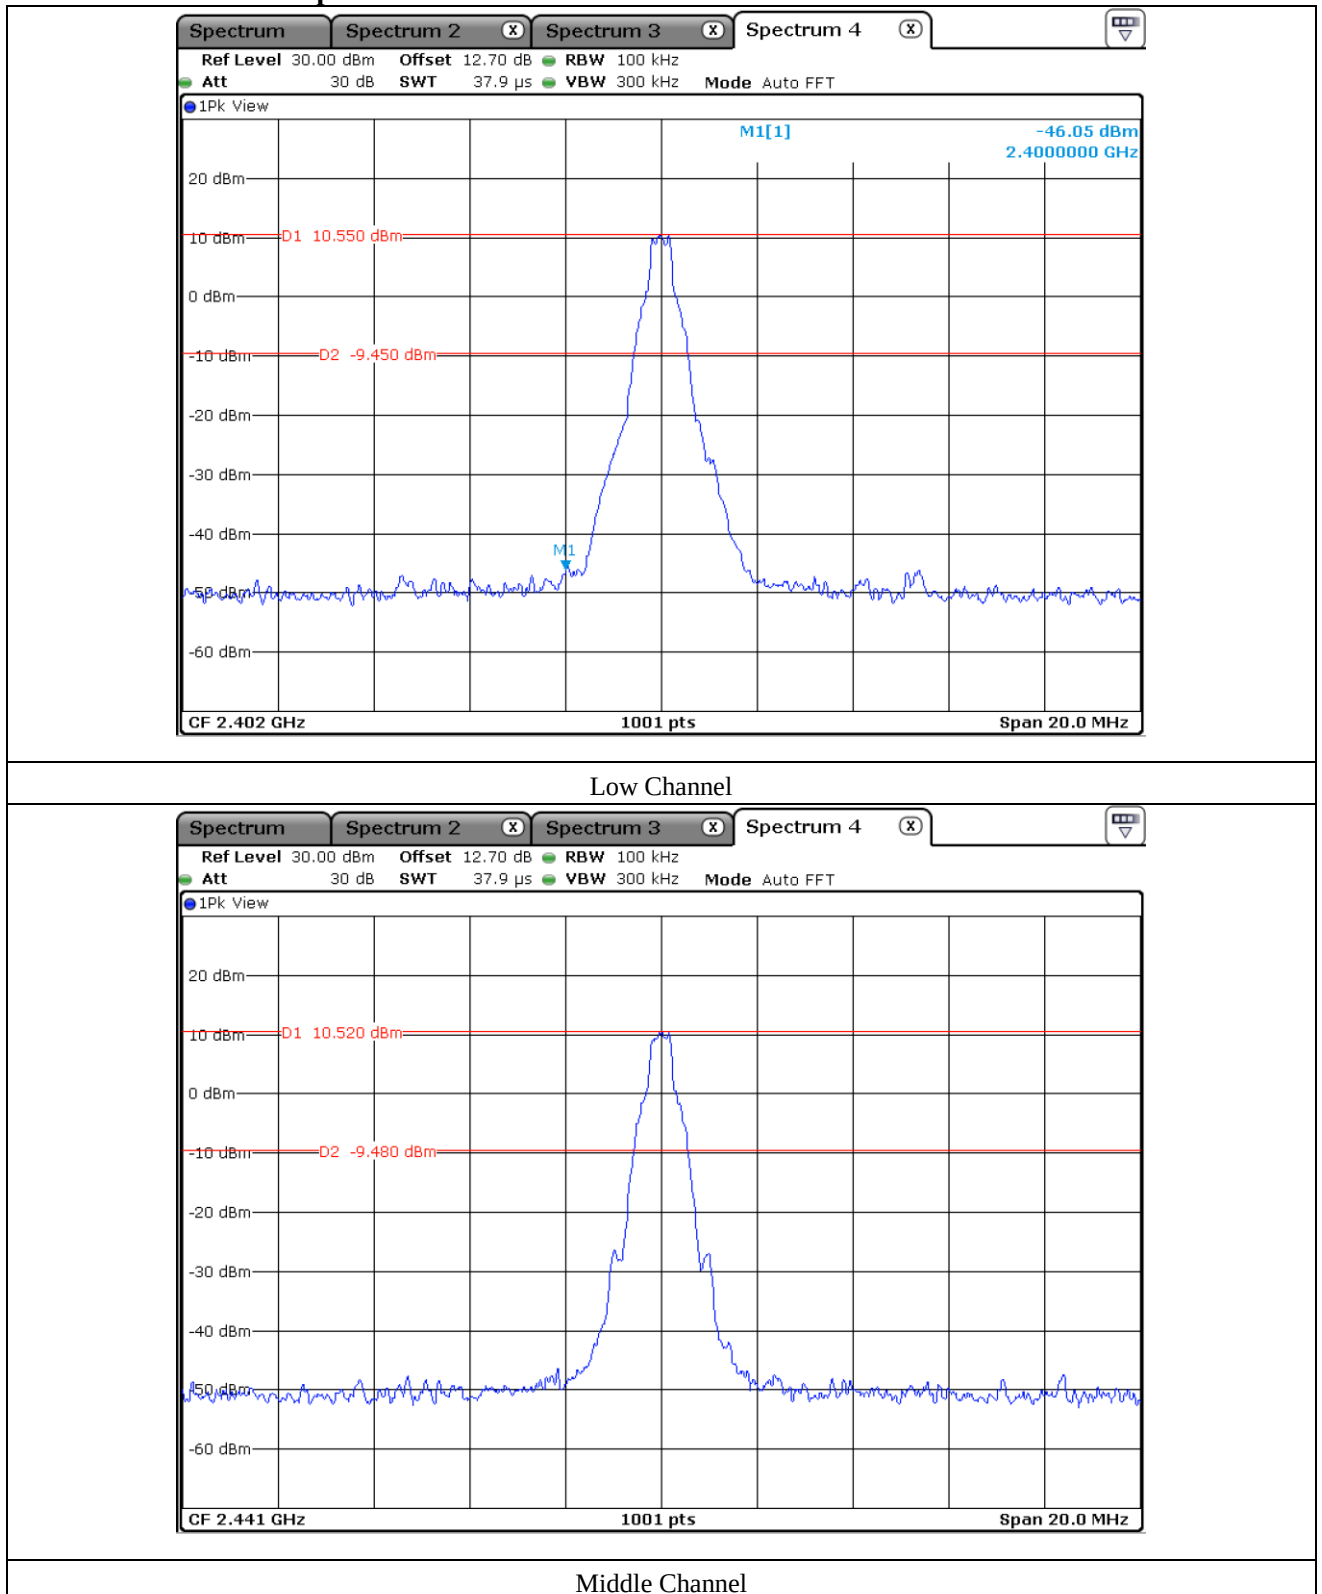


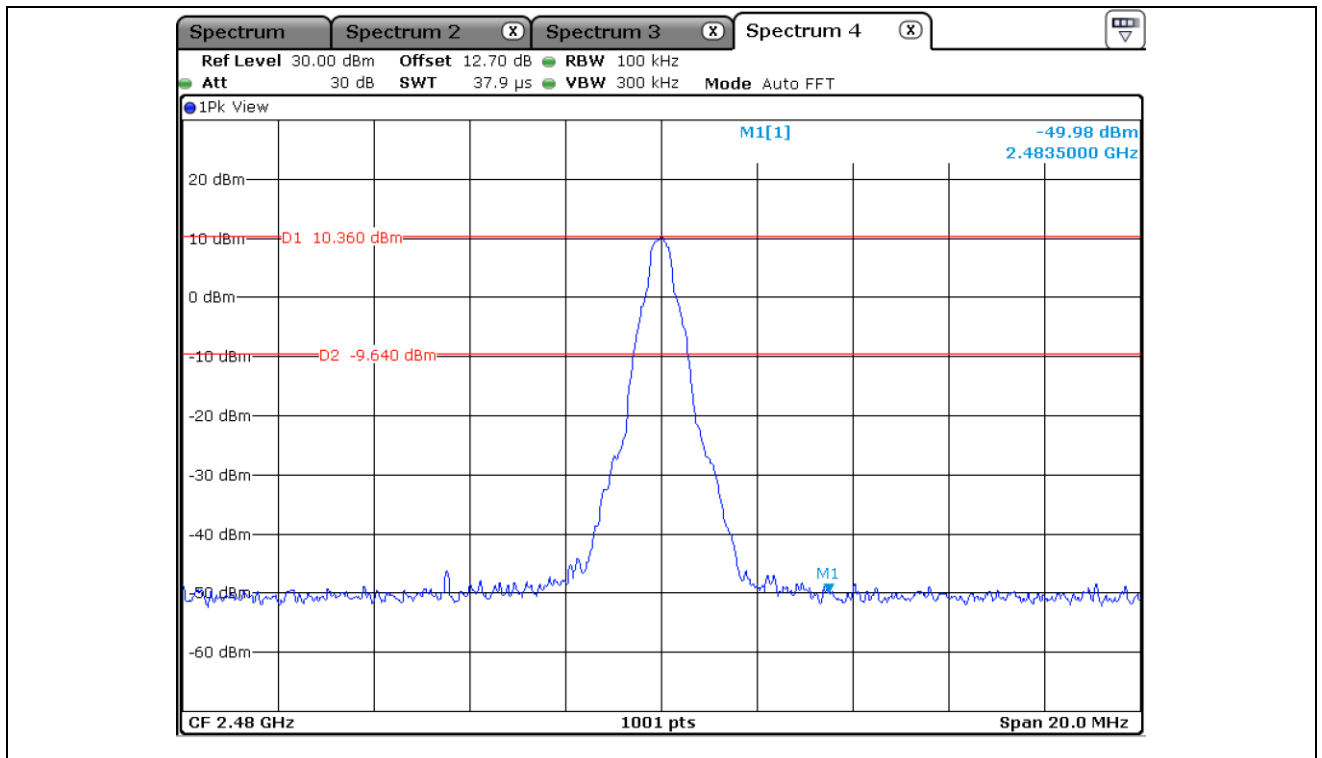


High Channel

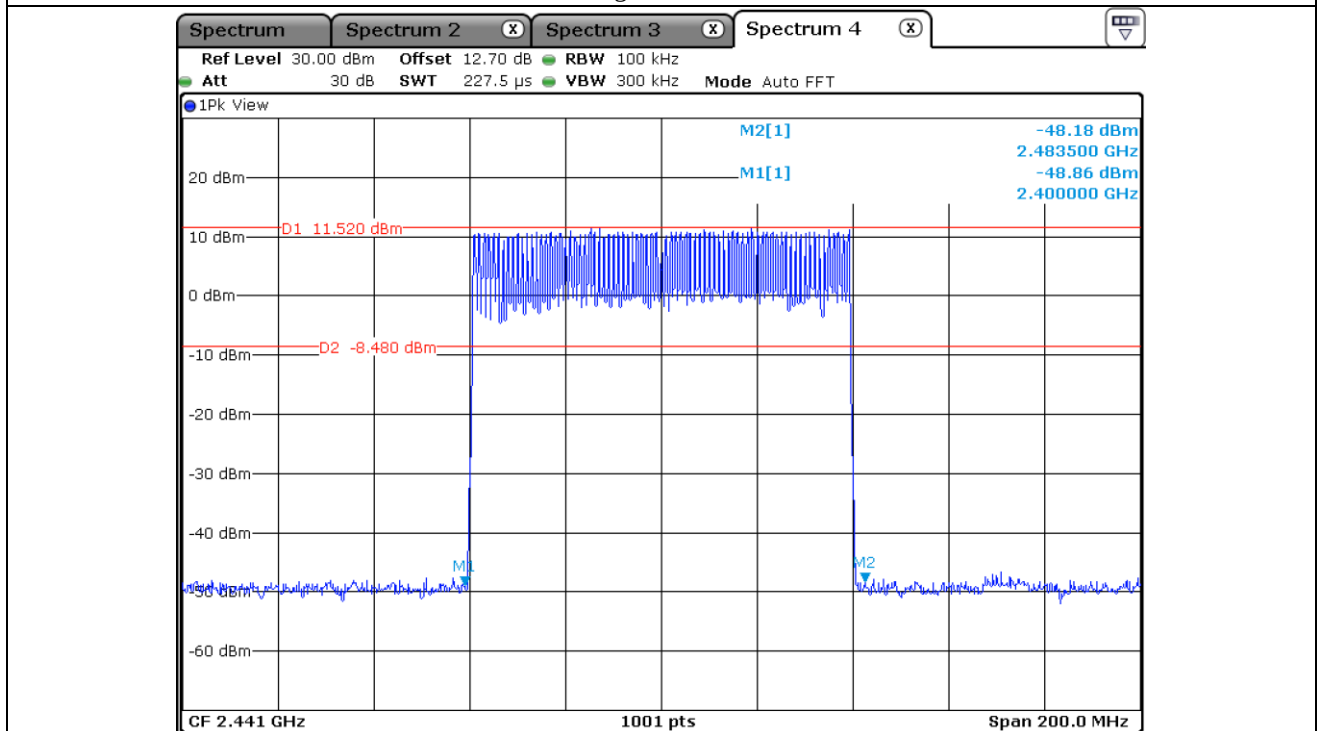


Hopping Mode

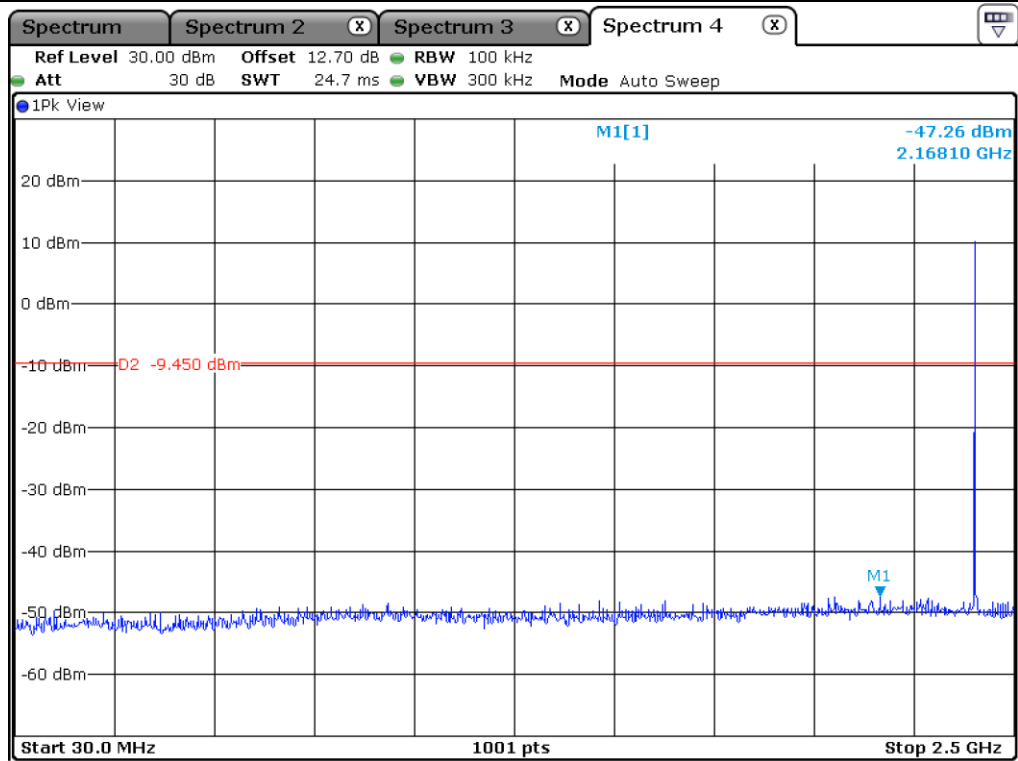


Low Channel

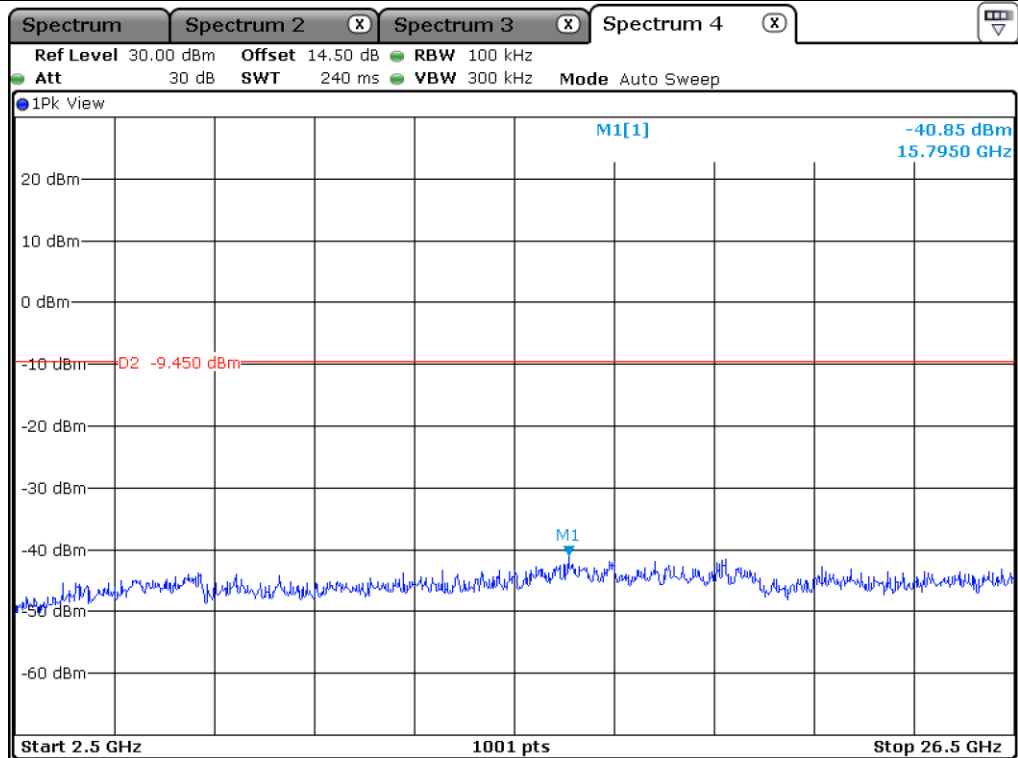


Low Channel

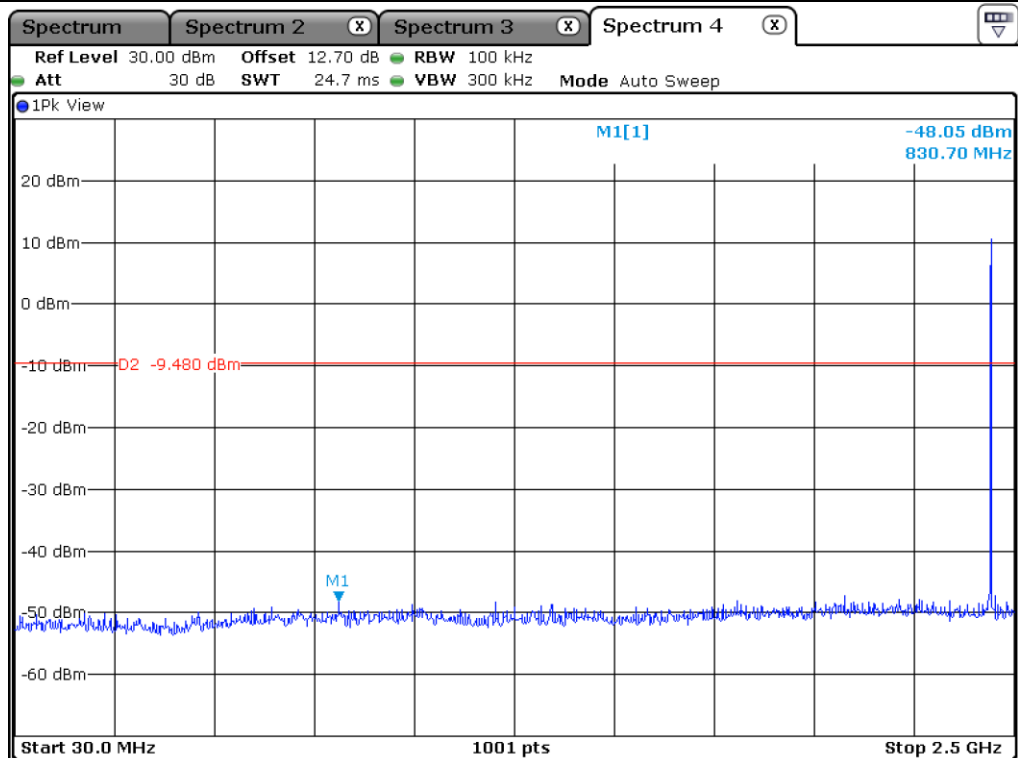


Middle Channel

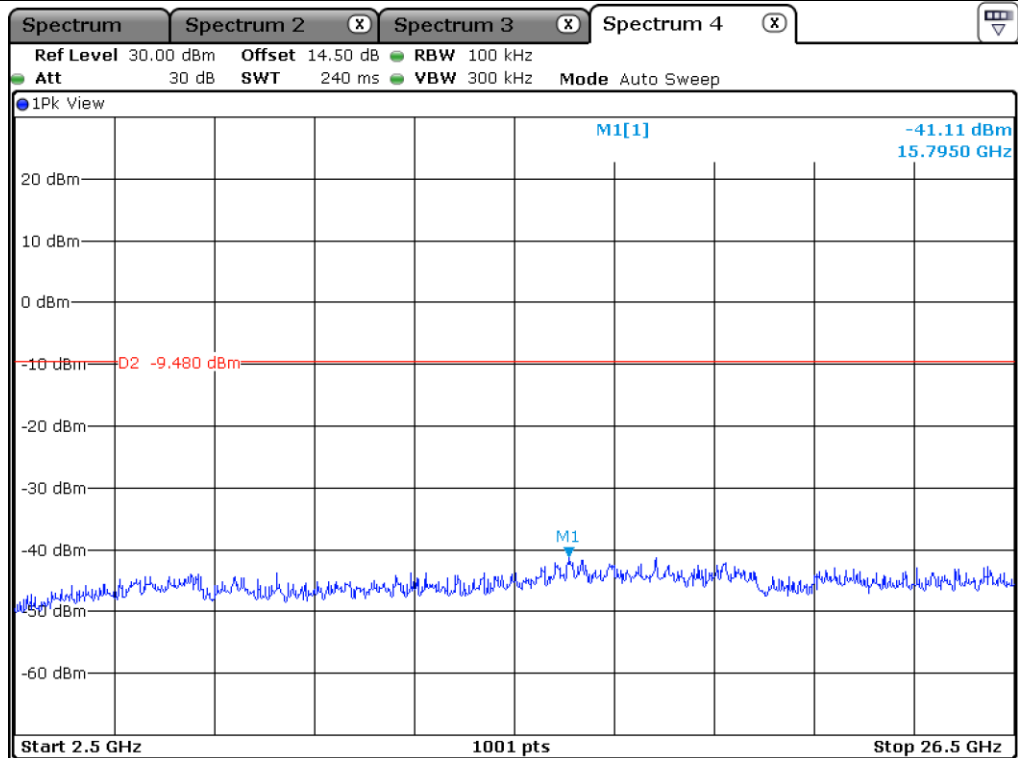


Middle Channel

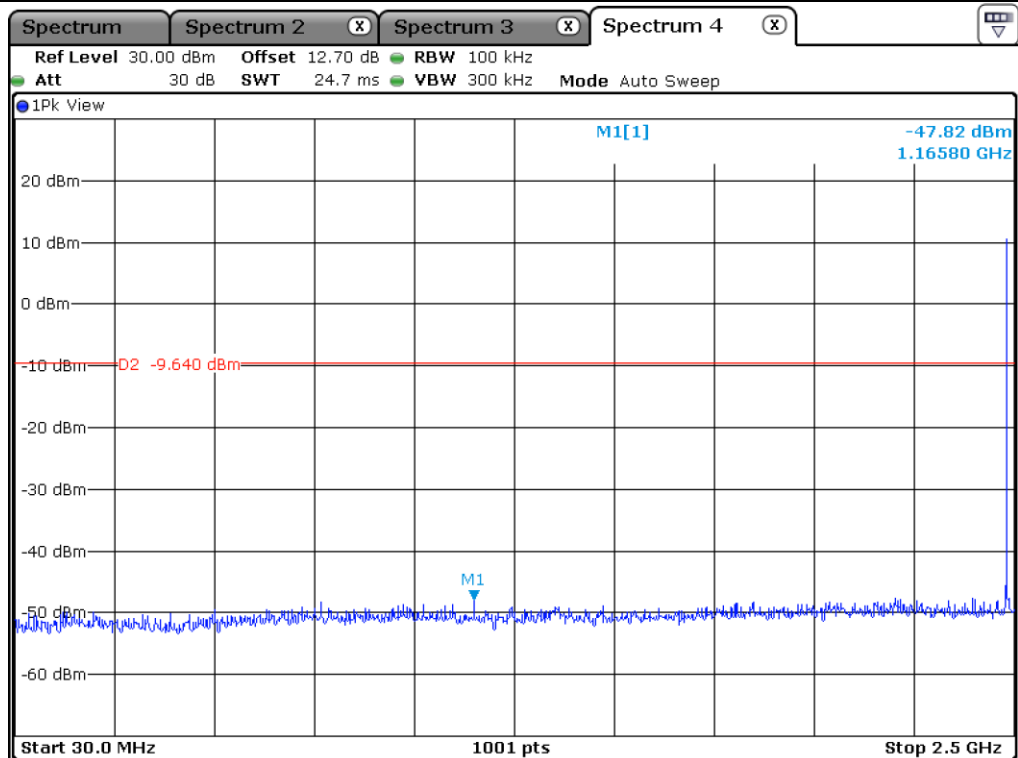


High Channel

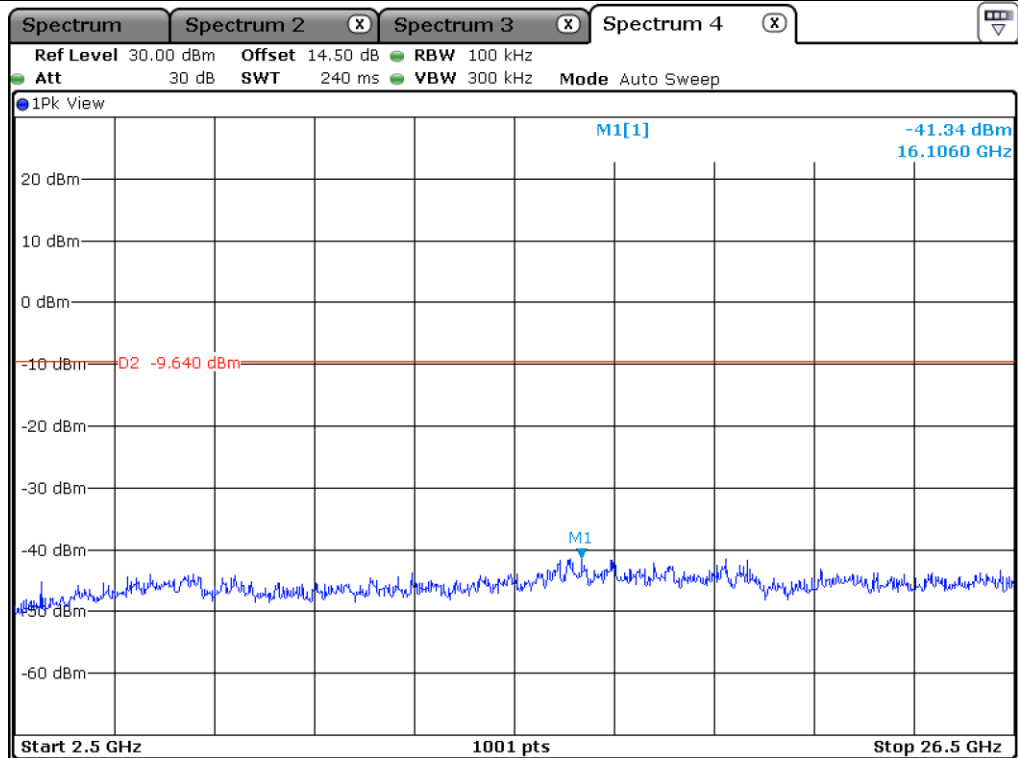

High Channel

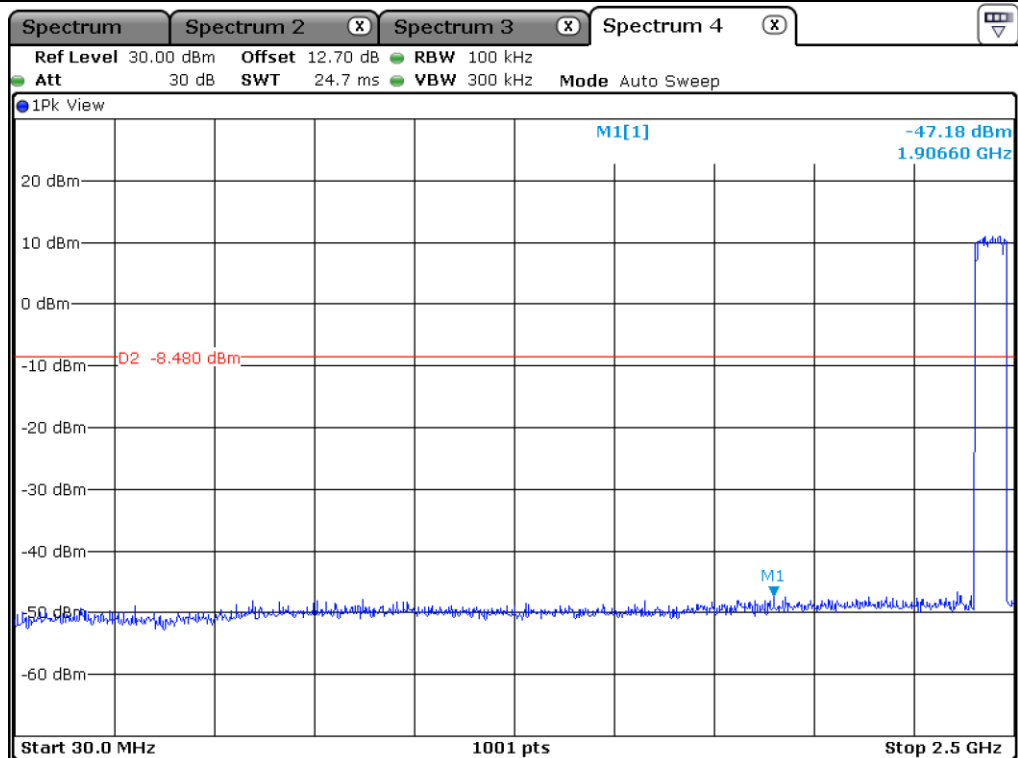



Hopping Mode

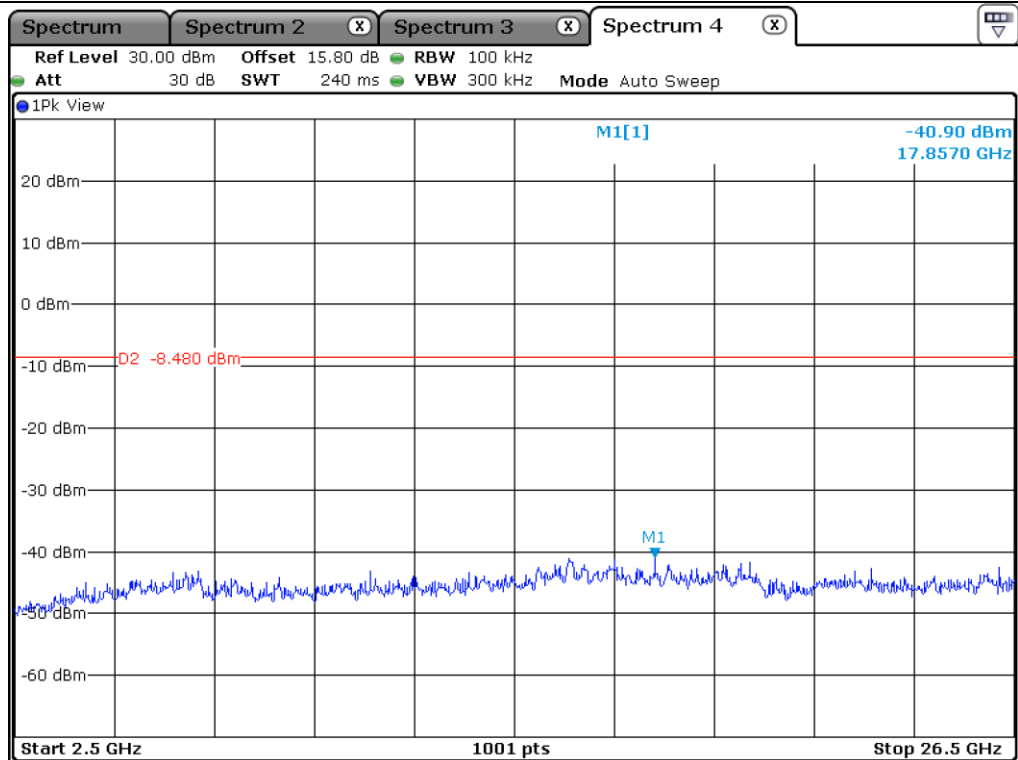


Hopping Mode

12.5.2 Test data for 2 Mbps

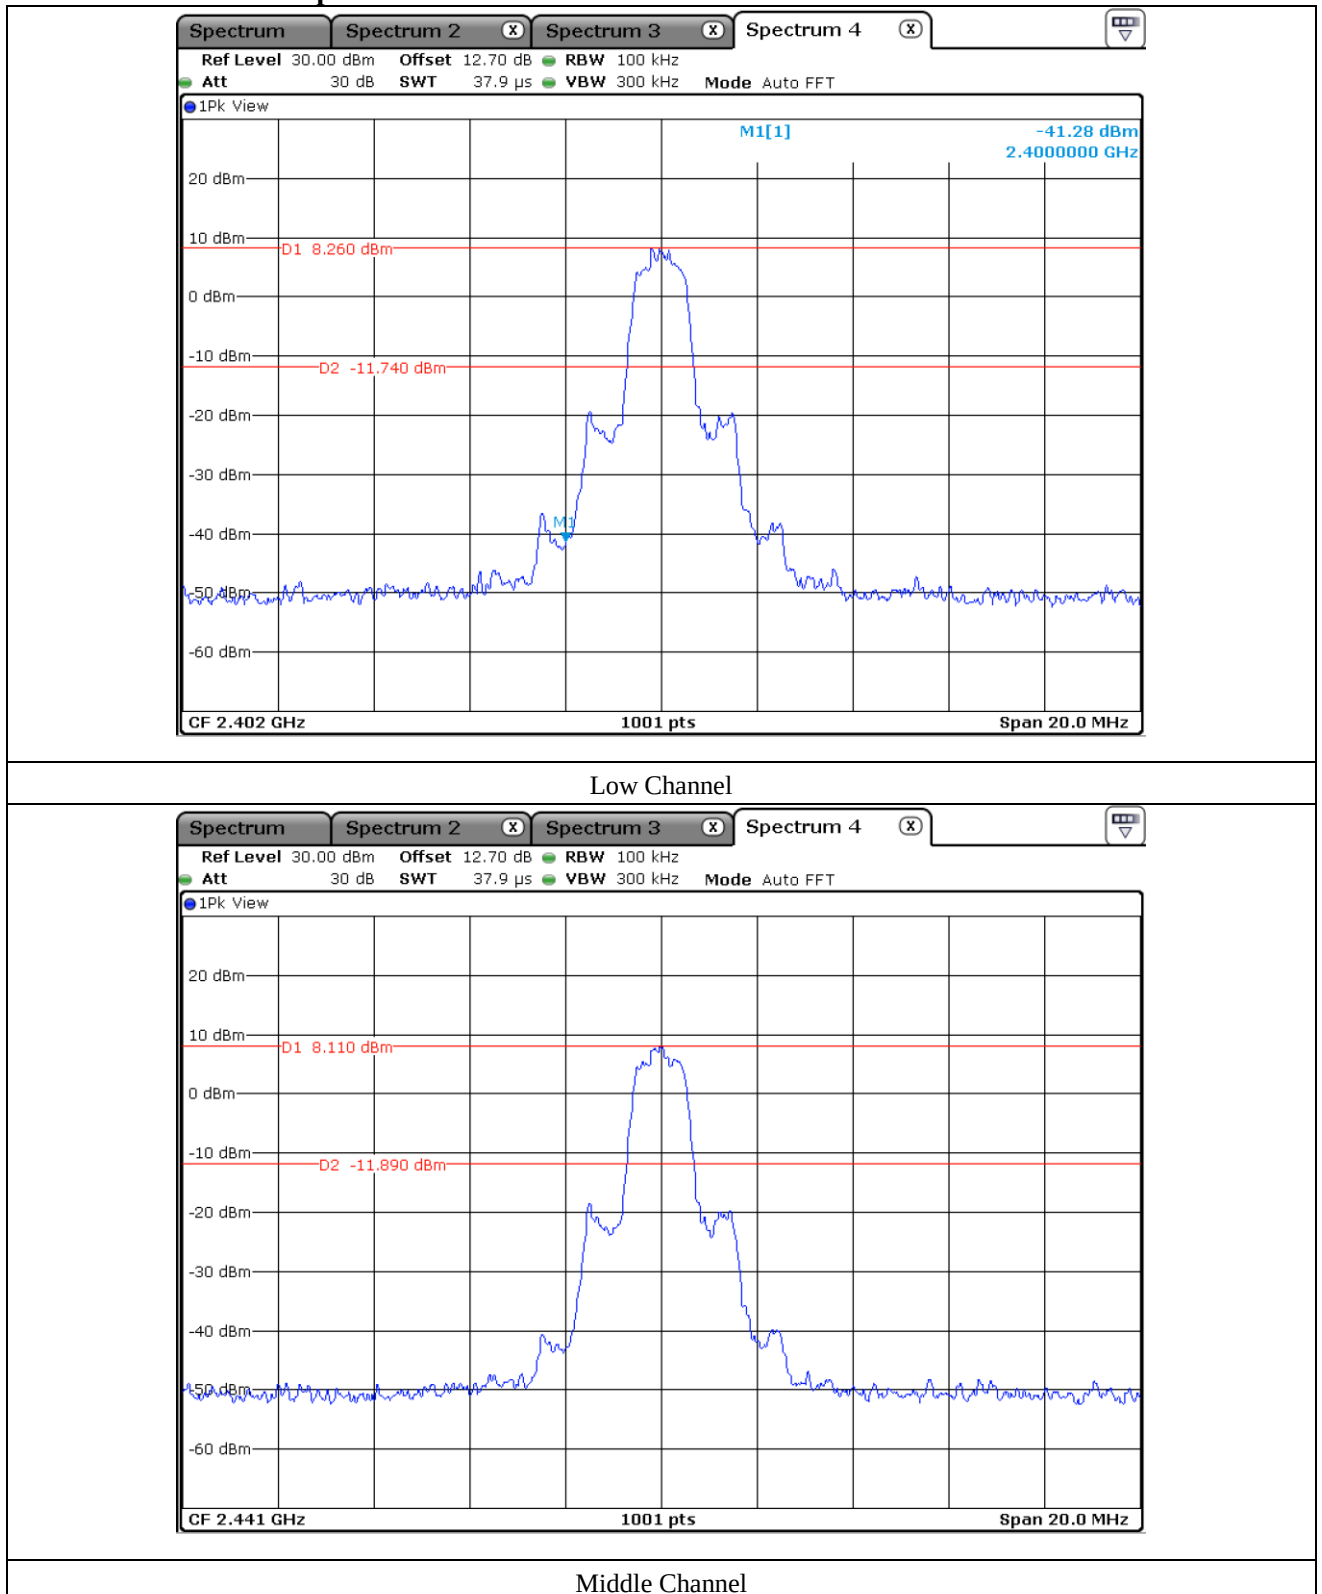


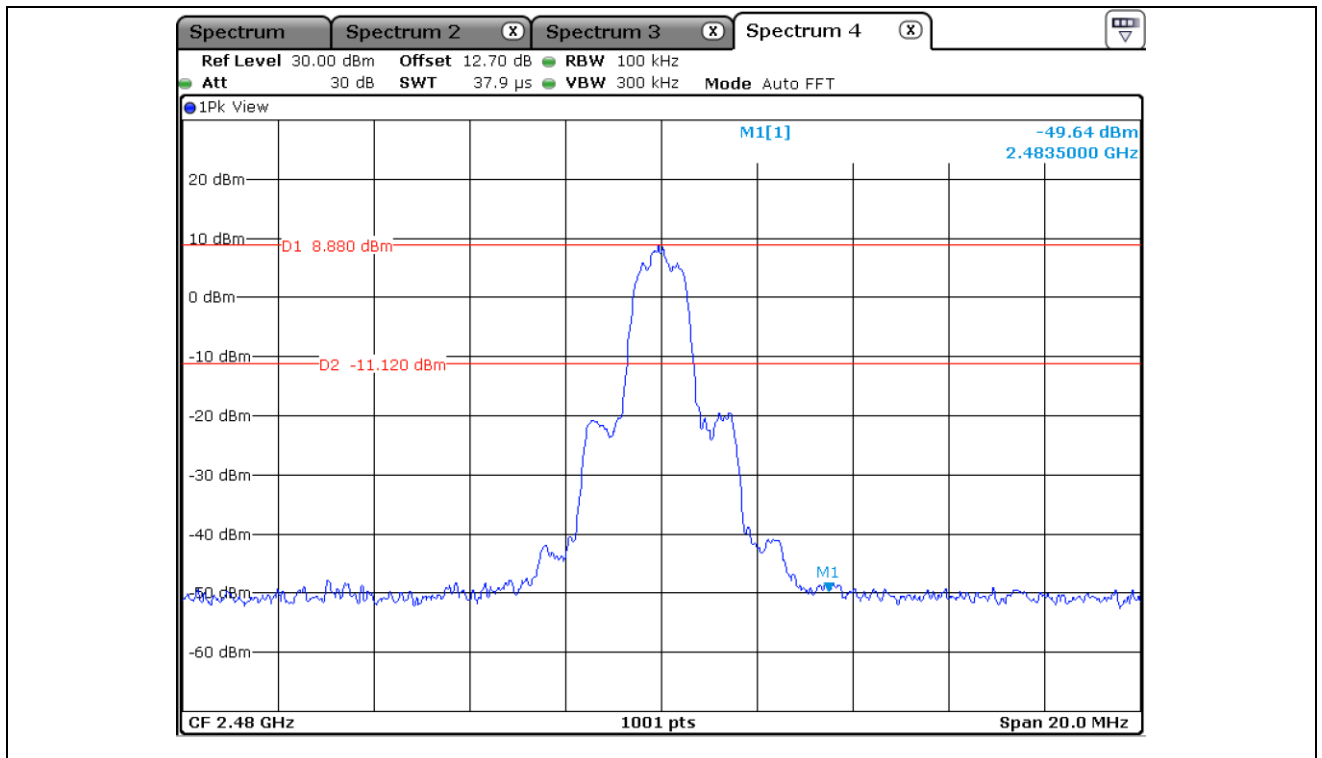


High Channel

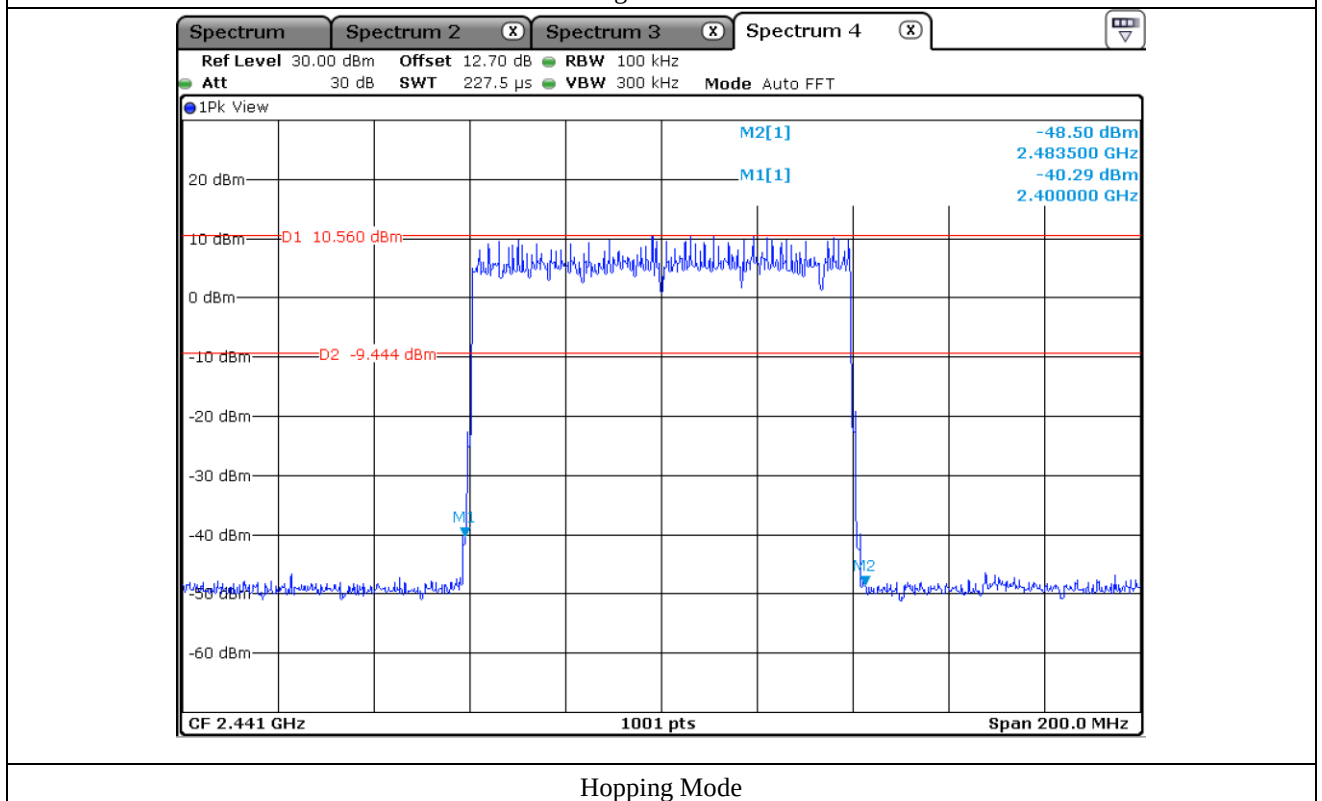


Hopping Mode

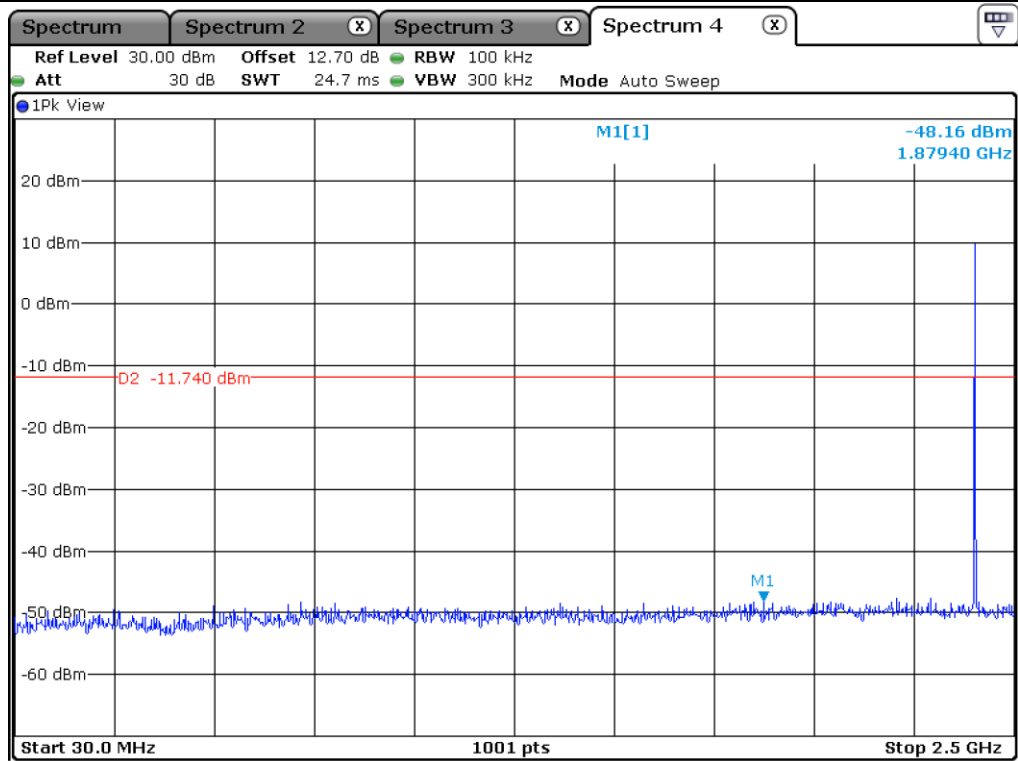


Low Channel

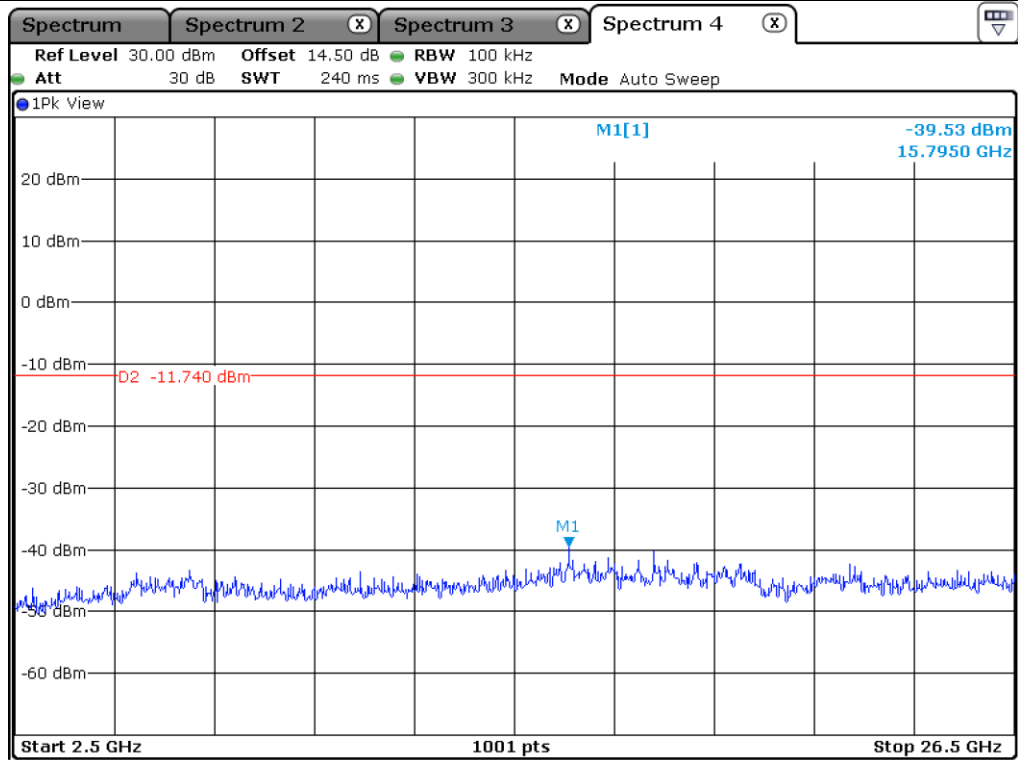


Low Channel

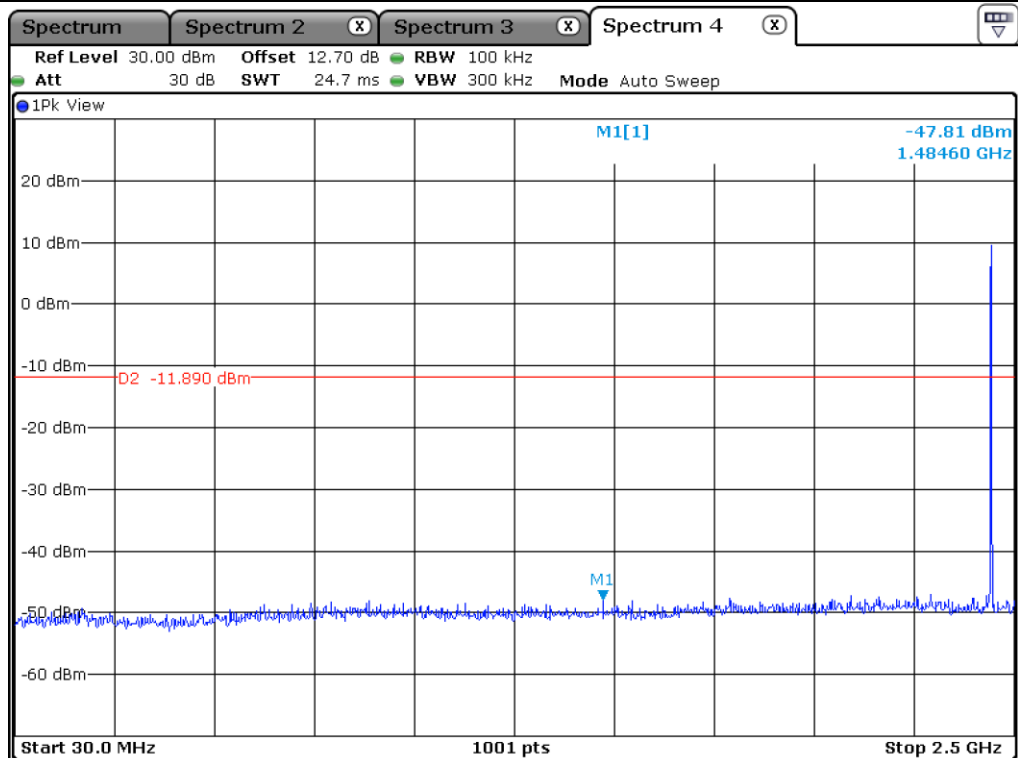


Middle Channel

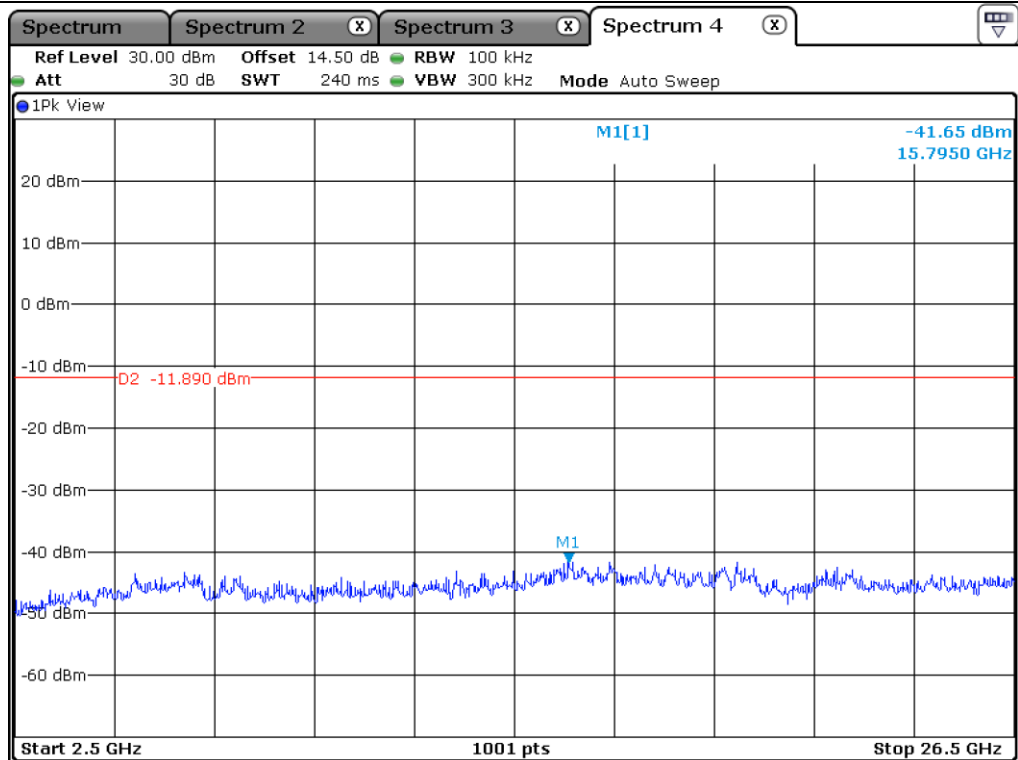


Middle Channel

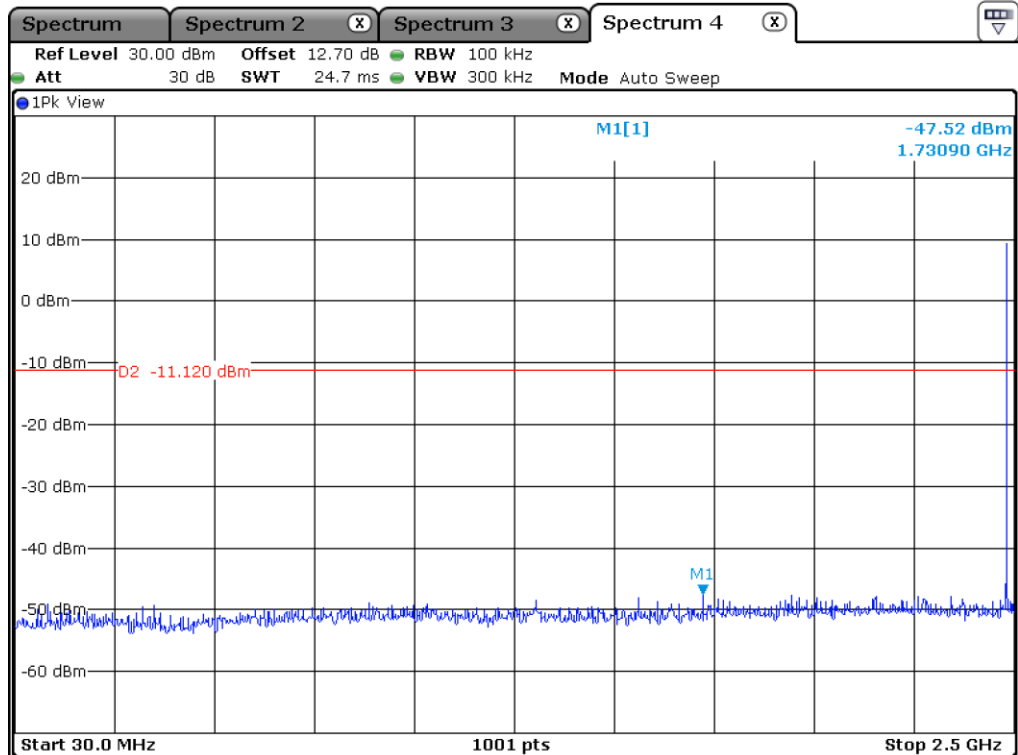


High Channel

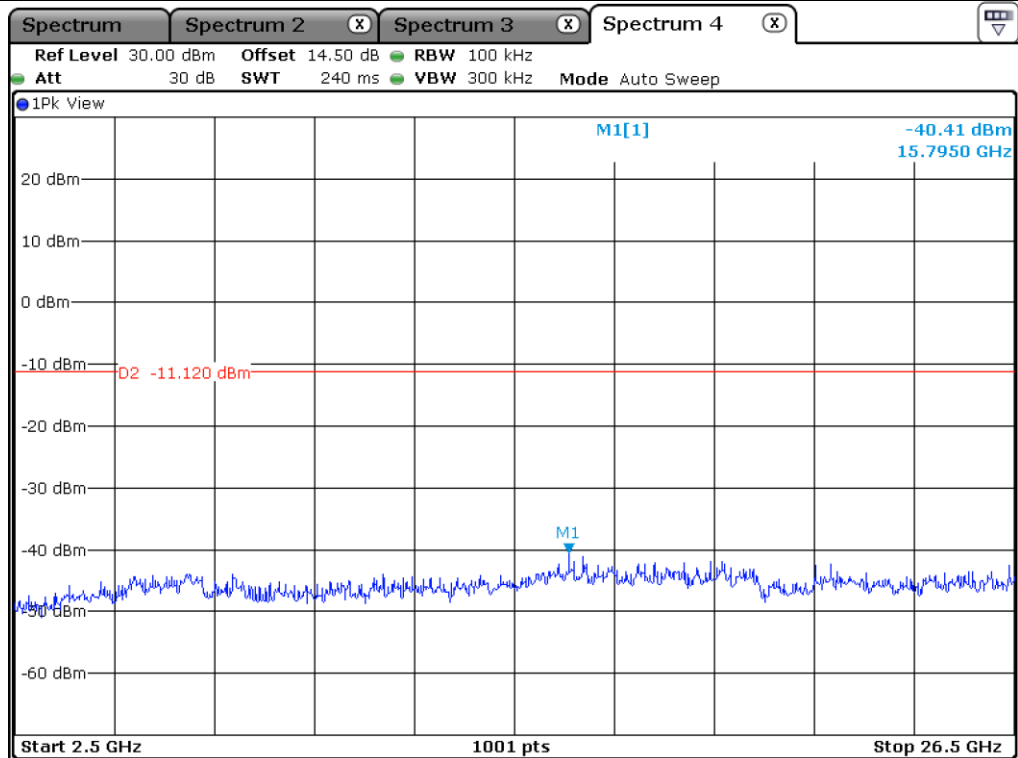

High Channel

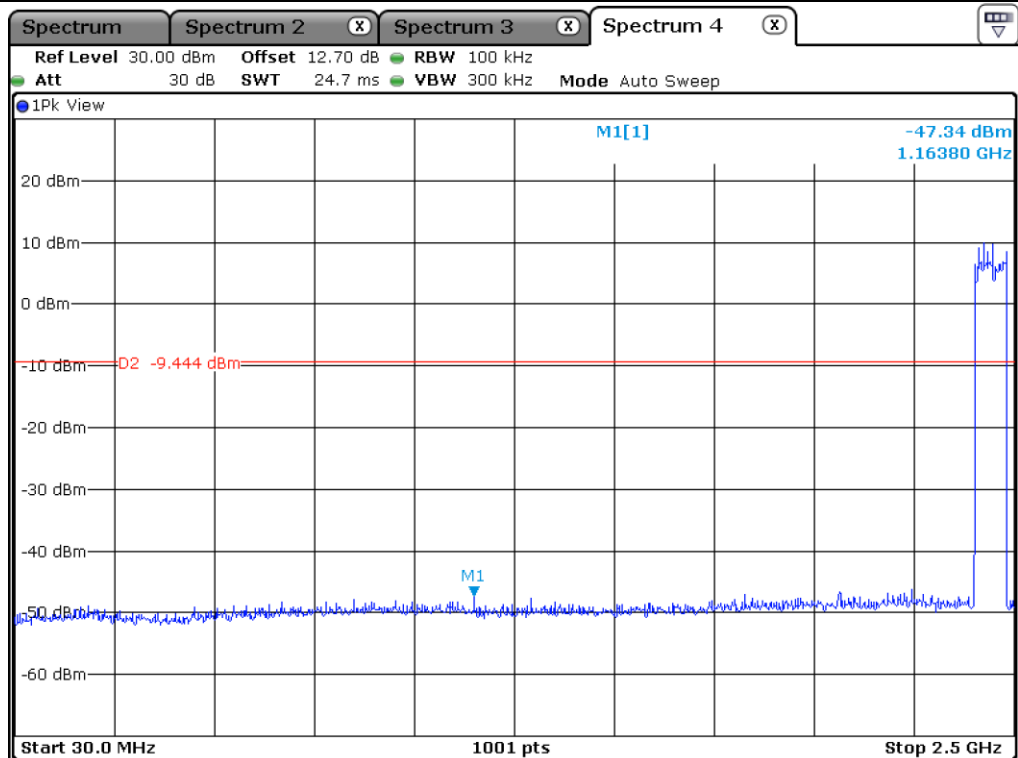



Hopping Mode

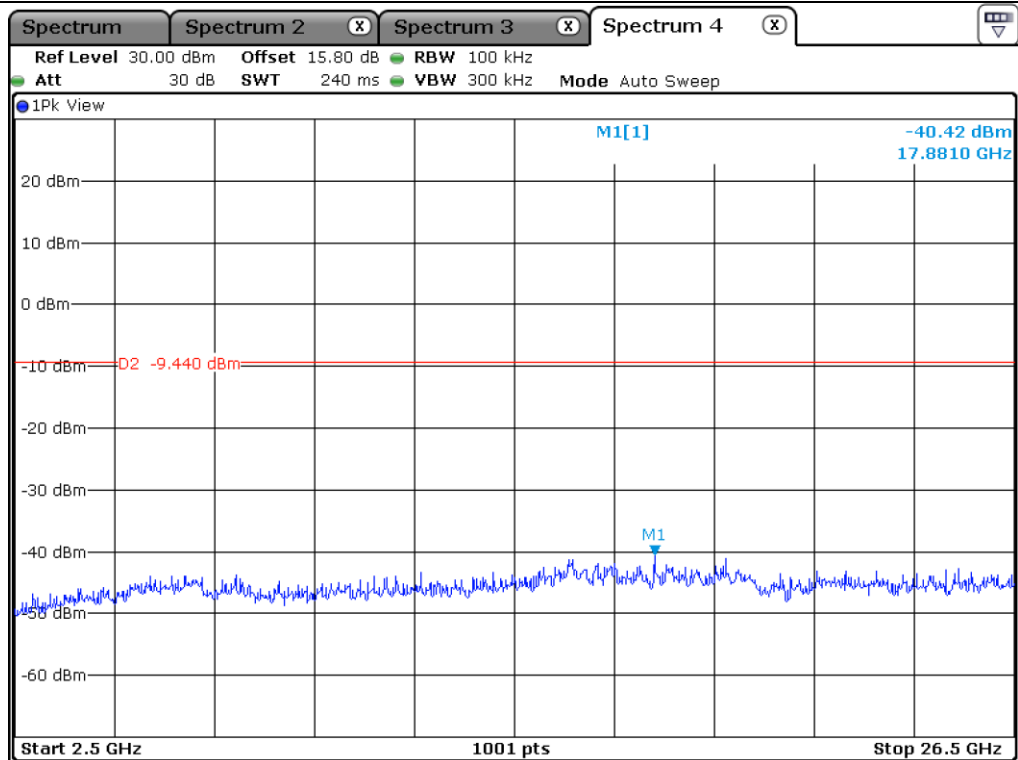


Hopping Mode

12.5.3 Test data for 3 Mbps

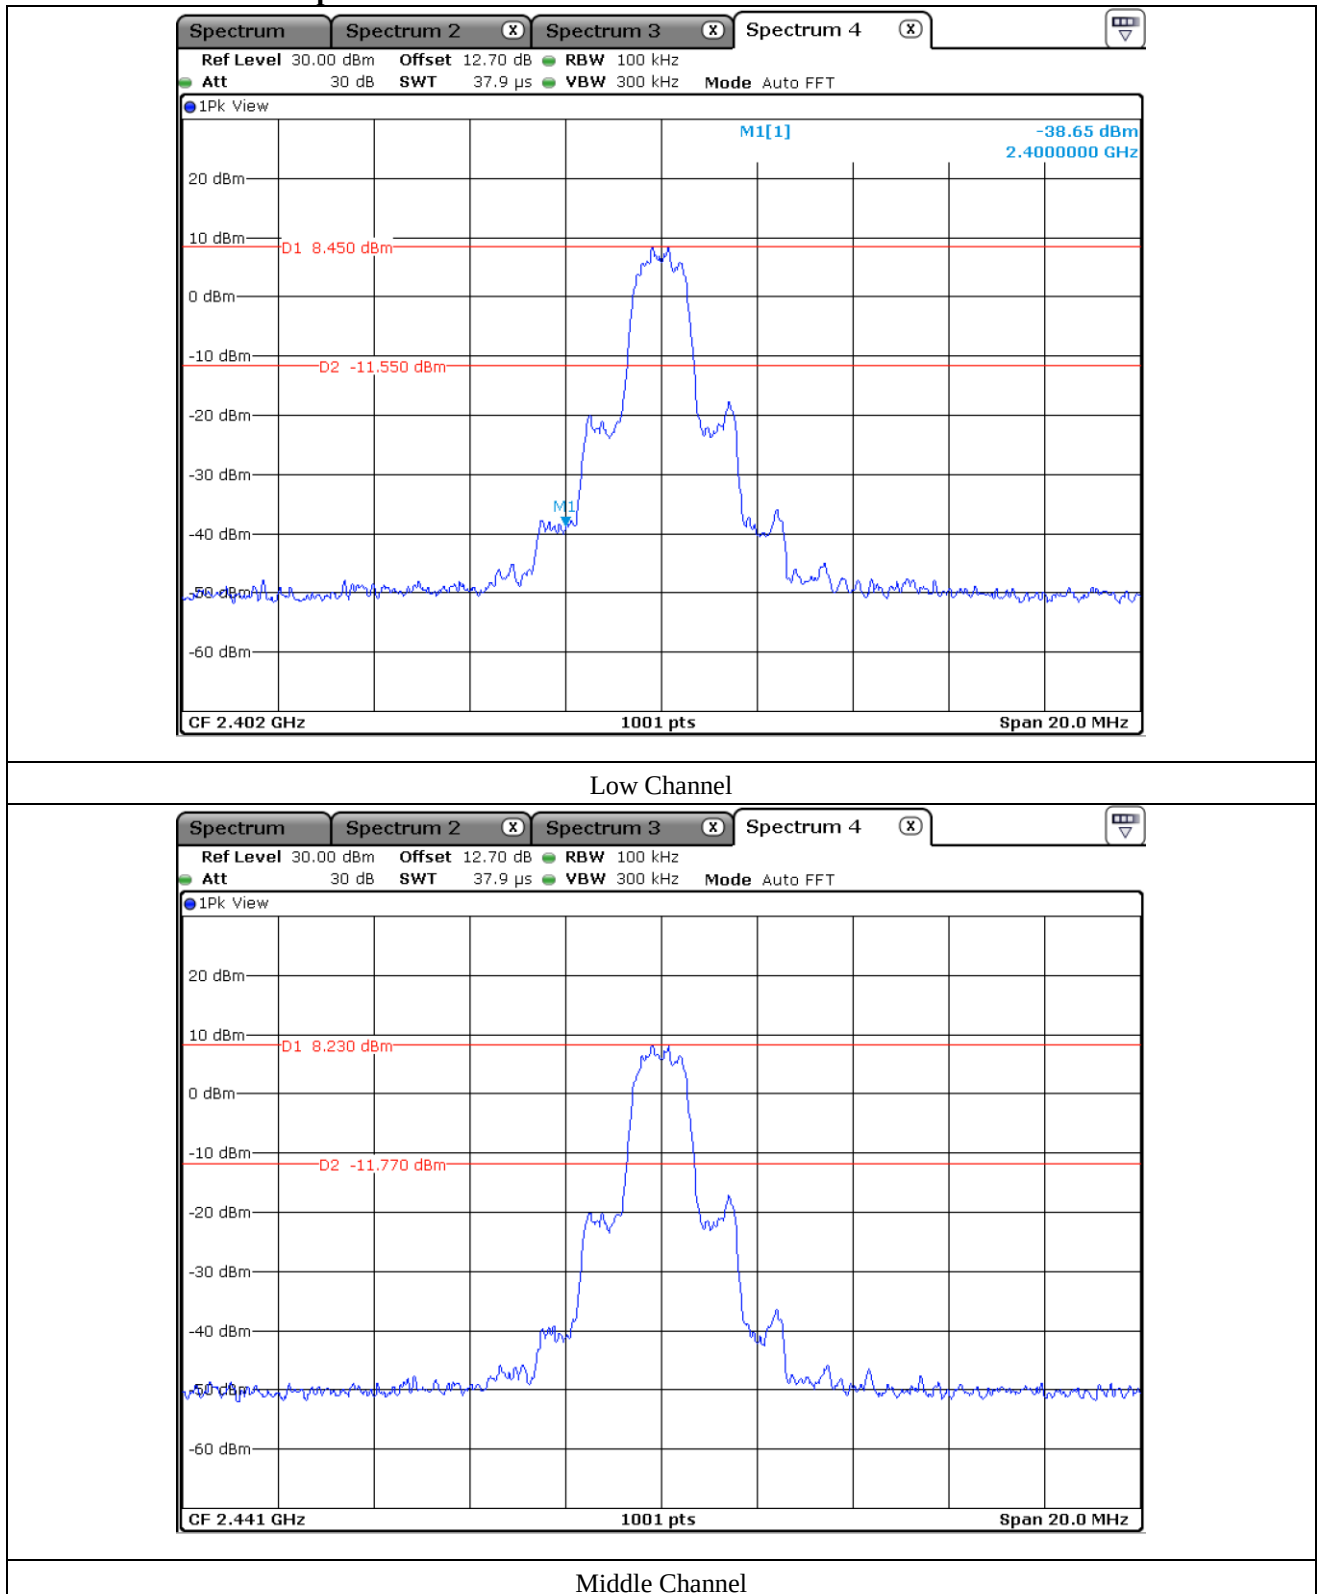


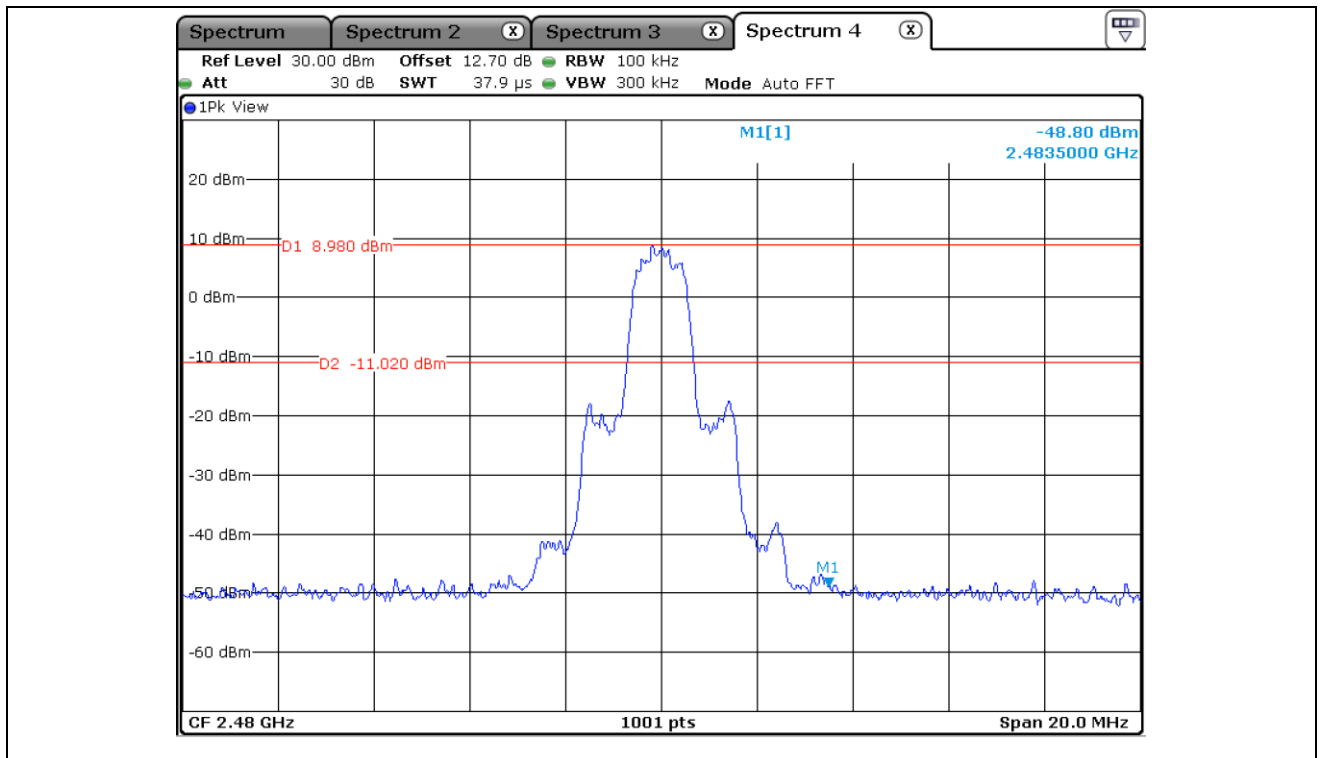


High Channel

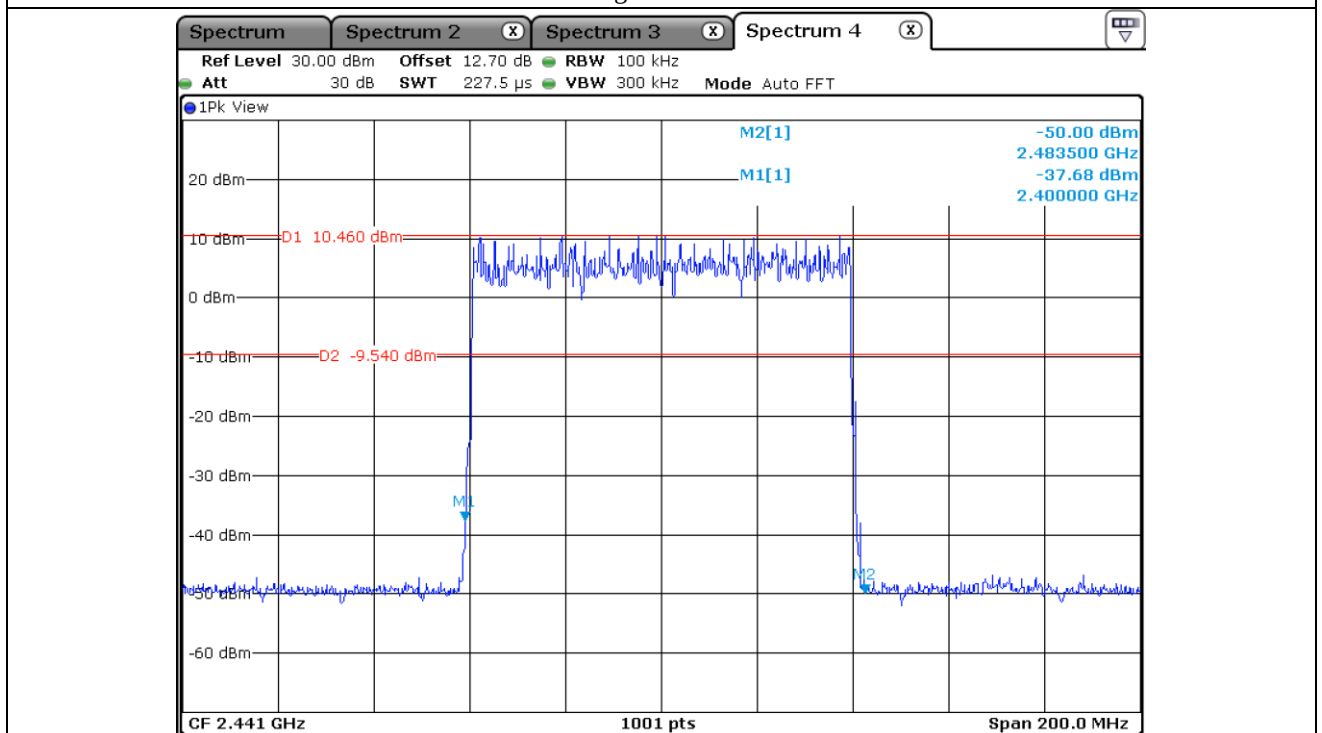


Hopping Mode

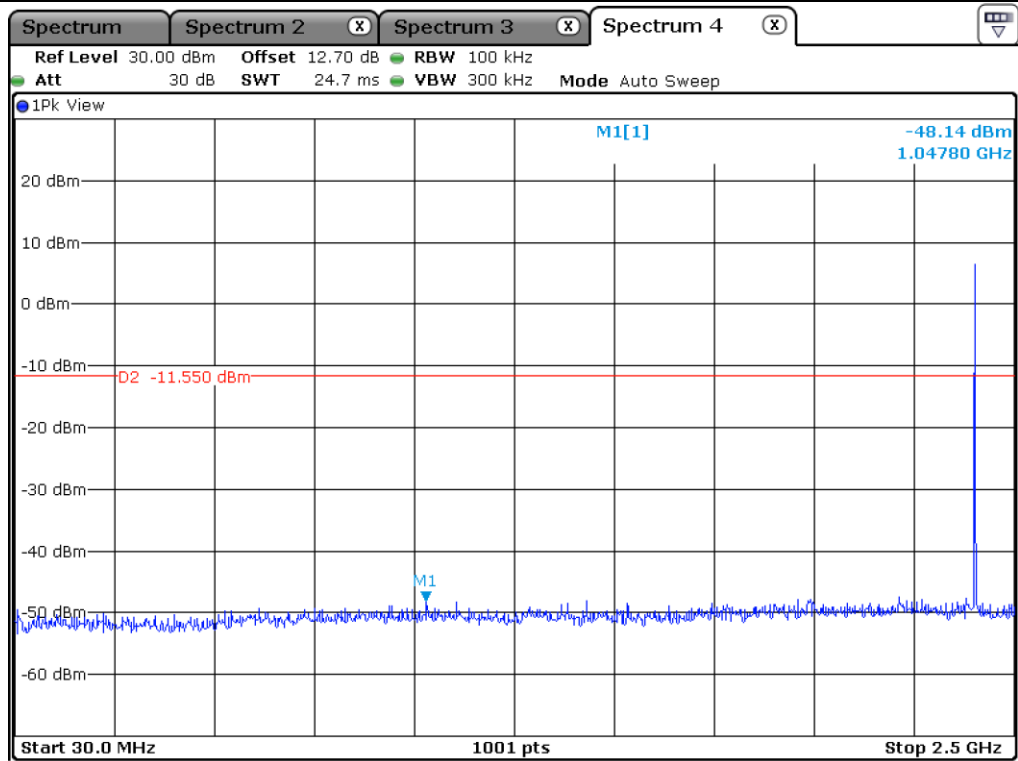


Low Channel

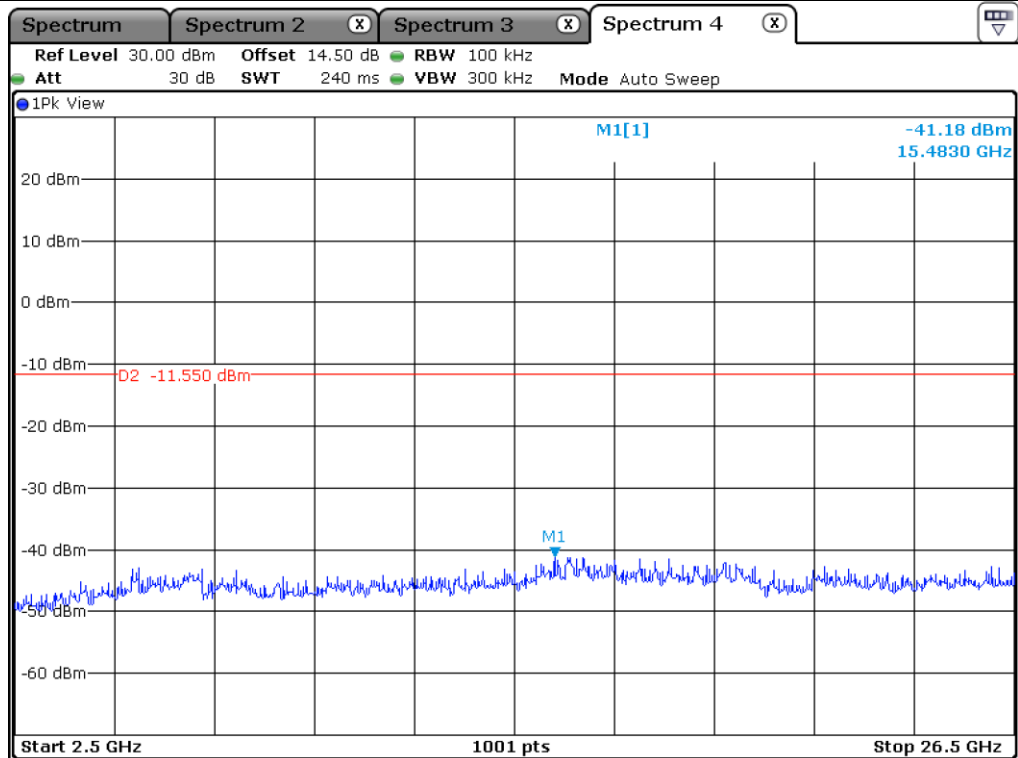


Low Channel

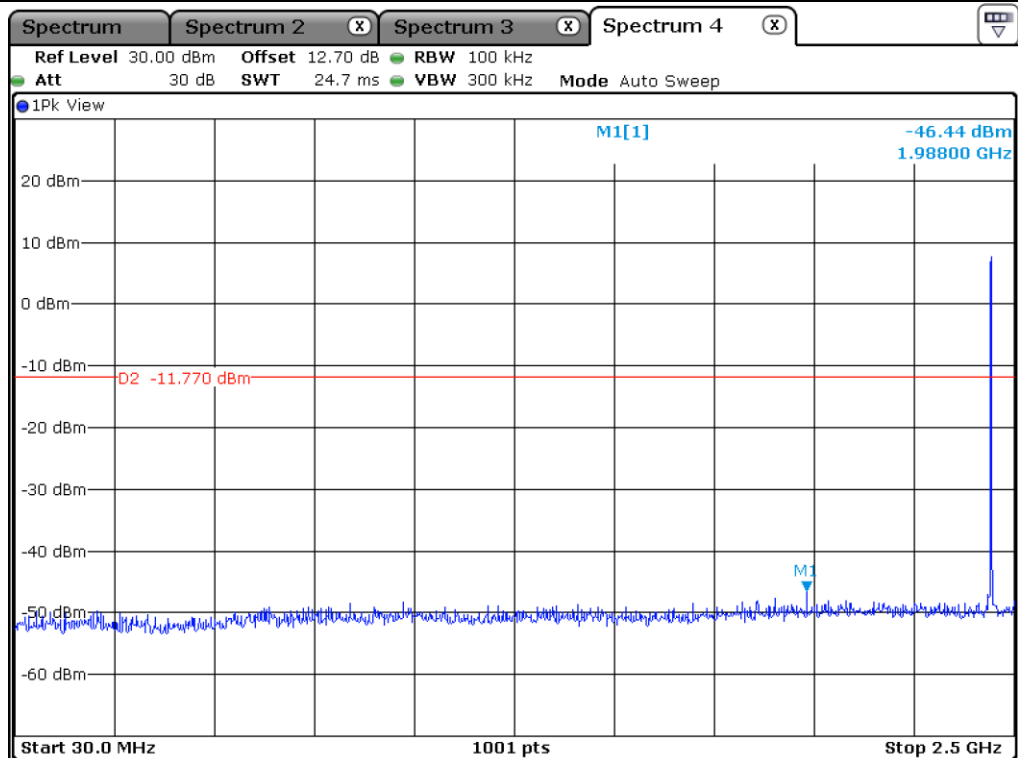


Middle Channel

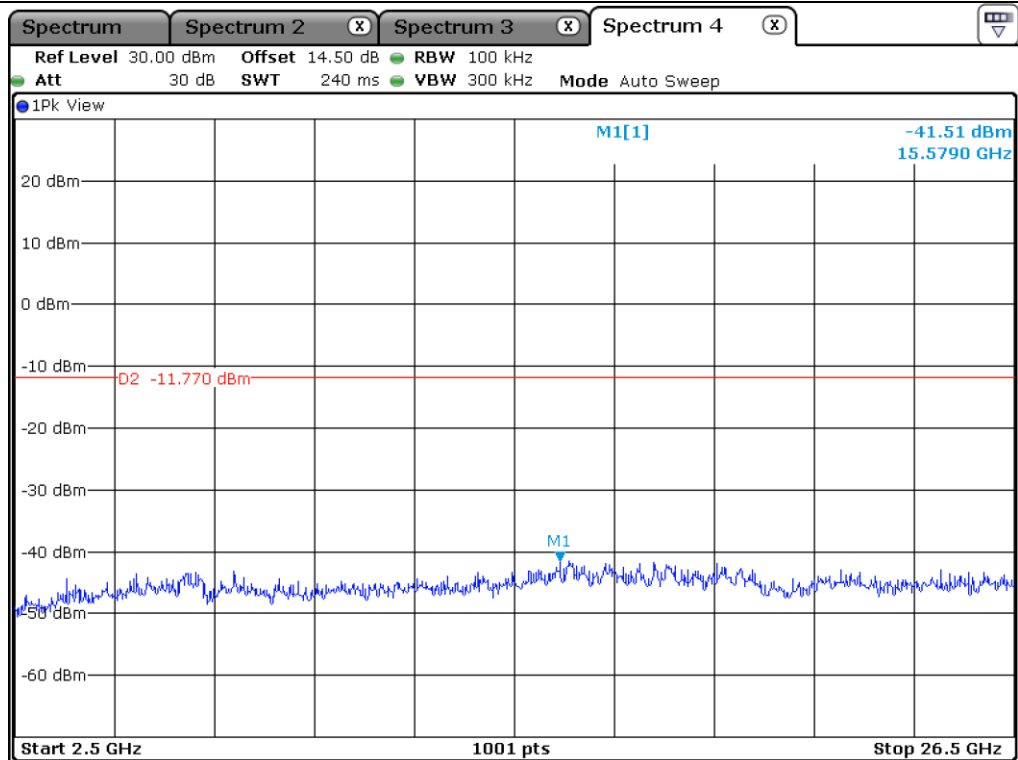


Middle Channel

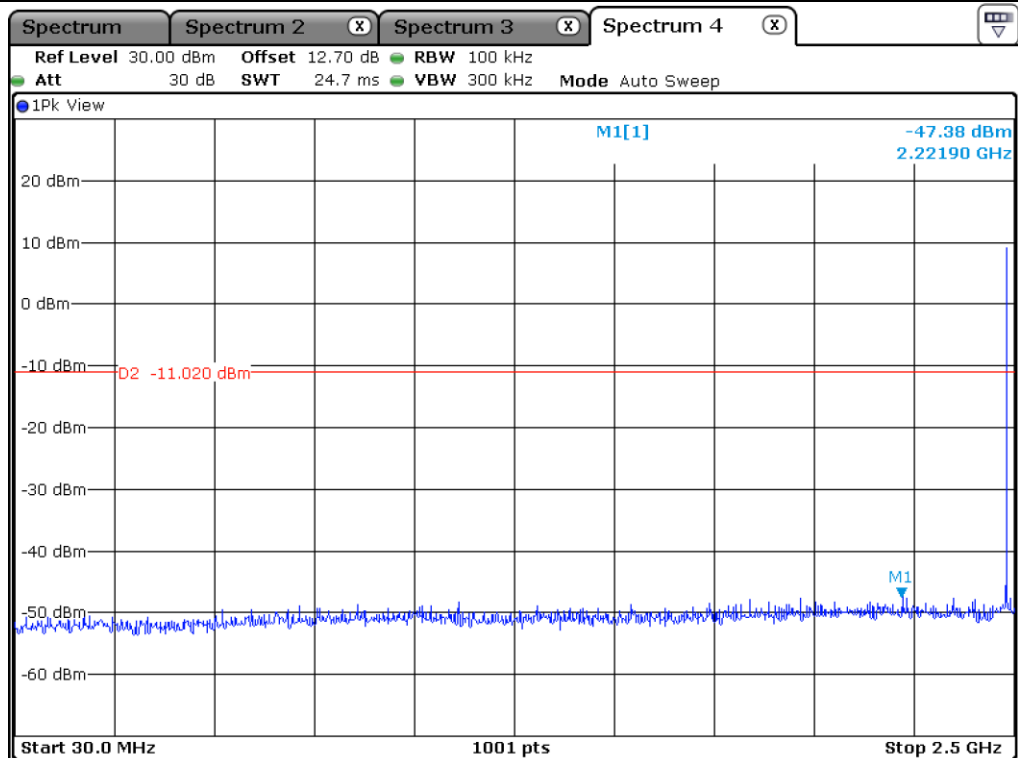


High Channel

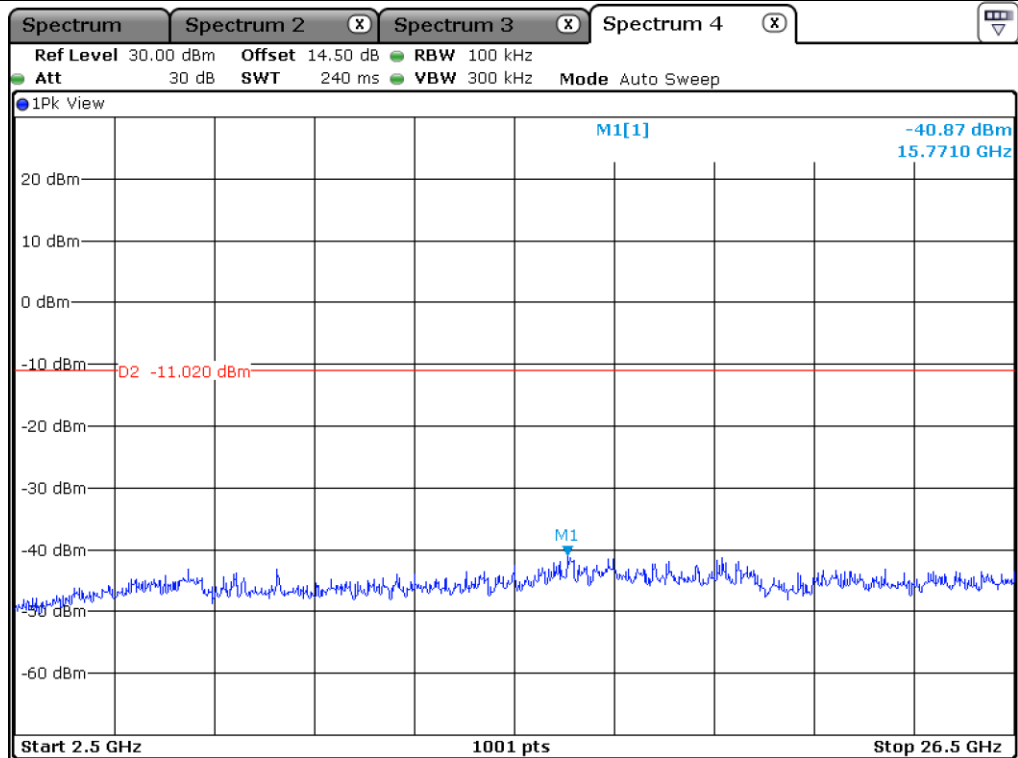

High Channel

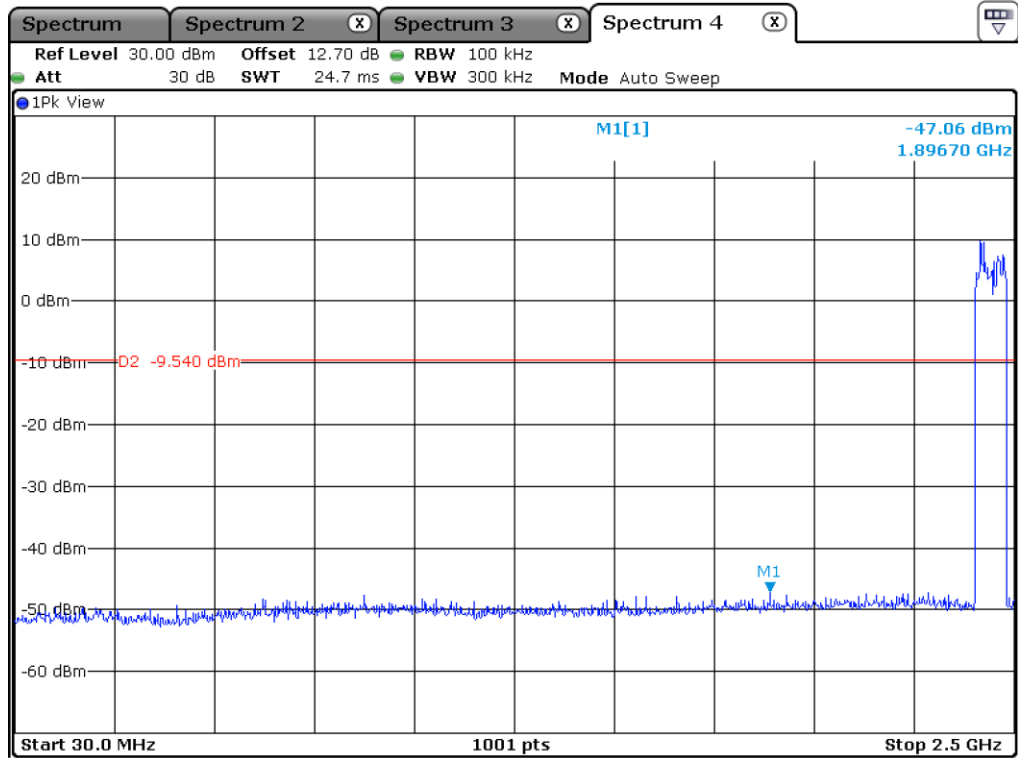


Hopping Mode

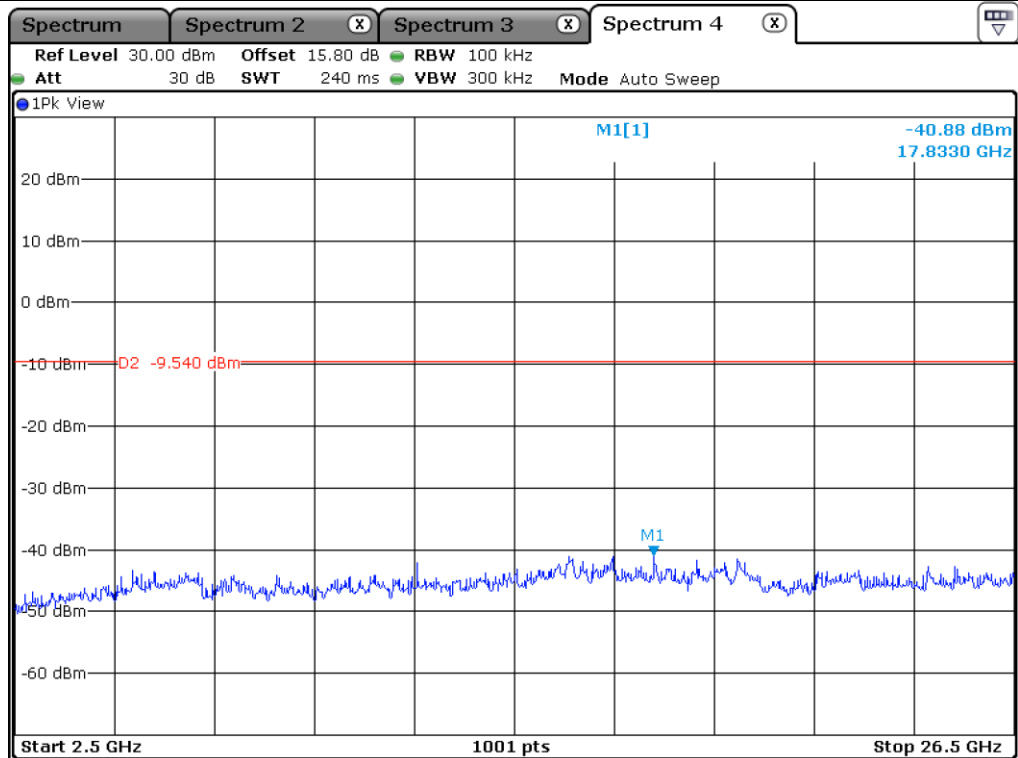


Hopping Mode


12.6 Test data for conducted emission (Right Earbud)

12.6.1 Test data for 1 Mbps

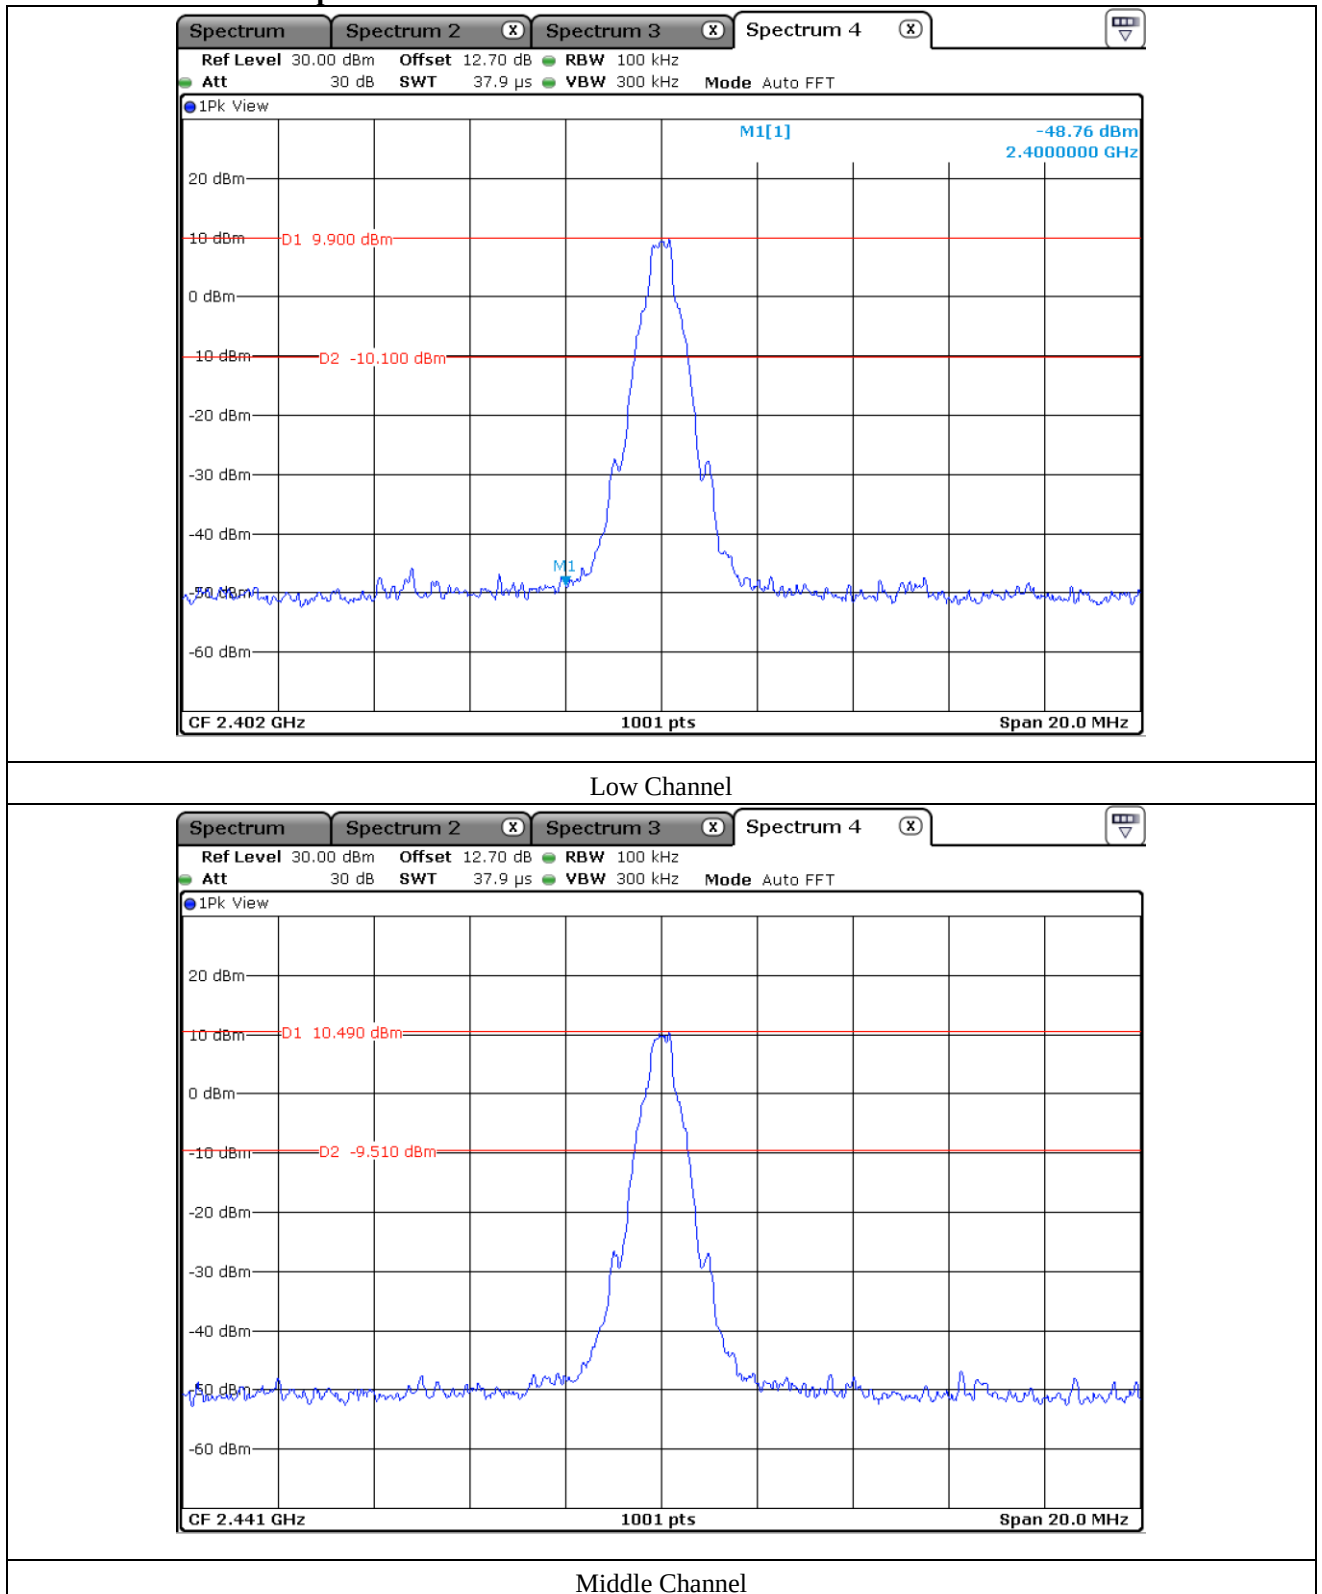


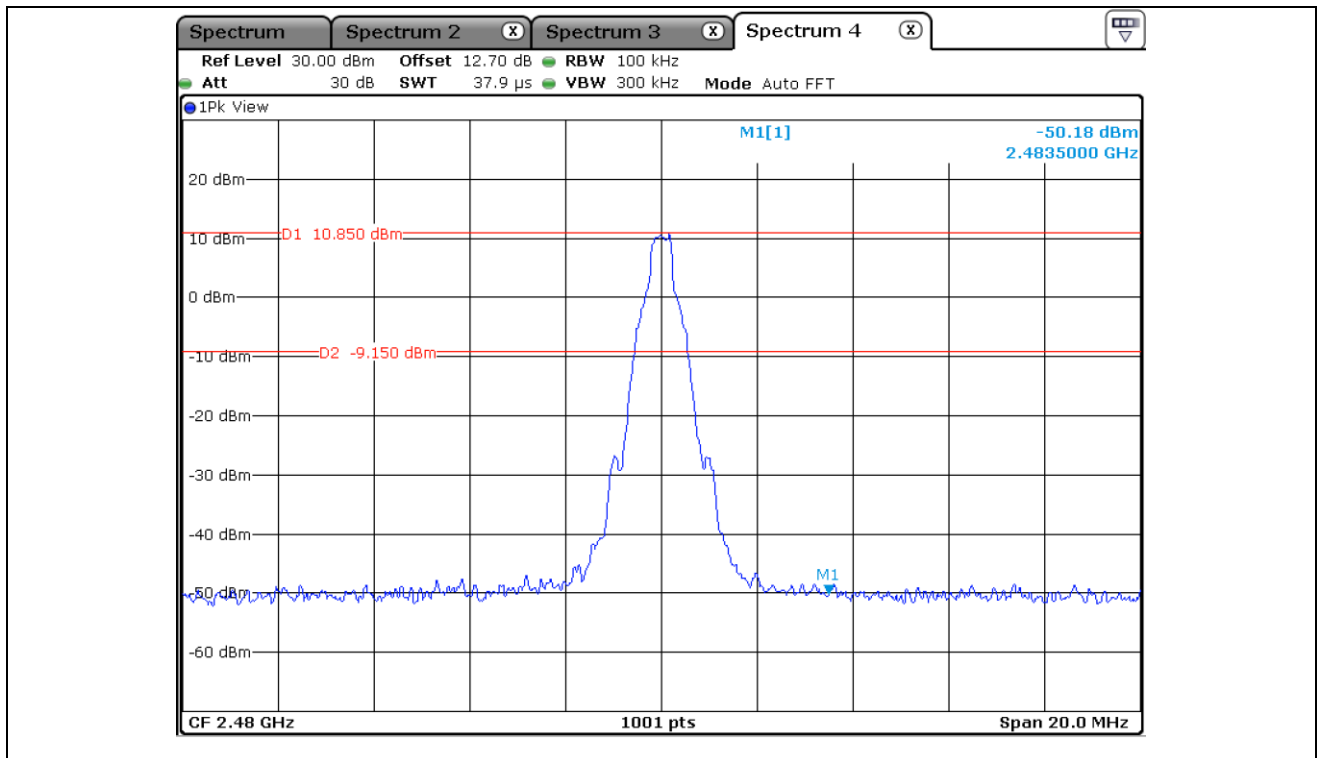


High Channel

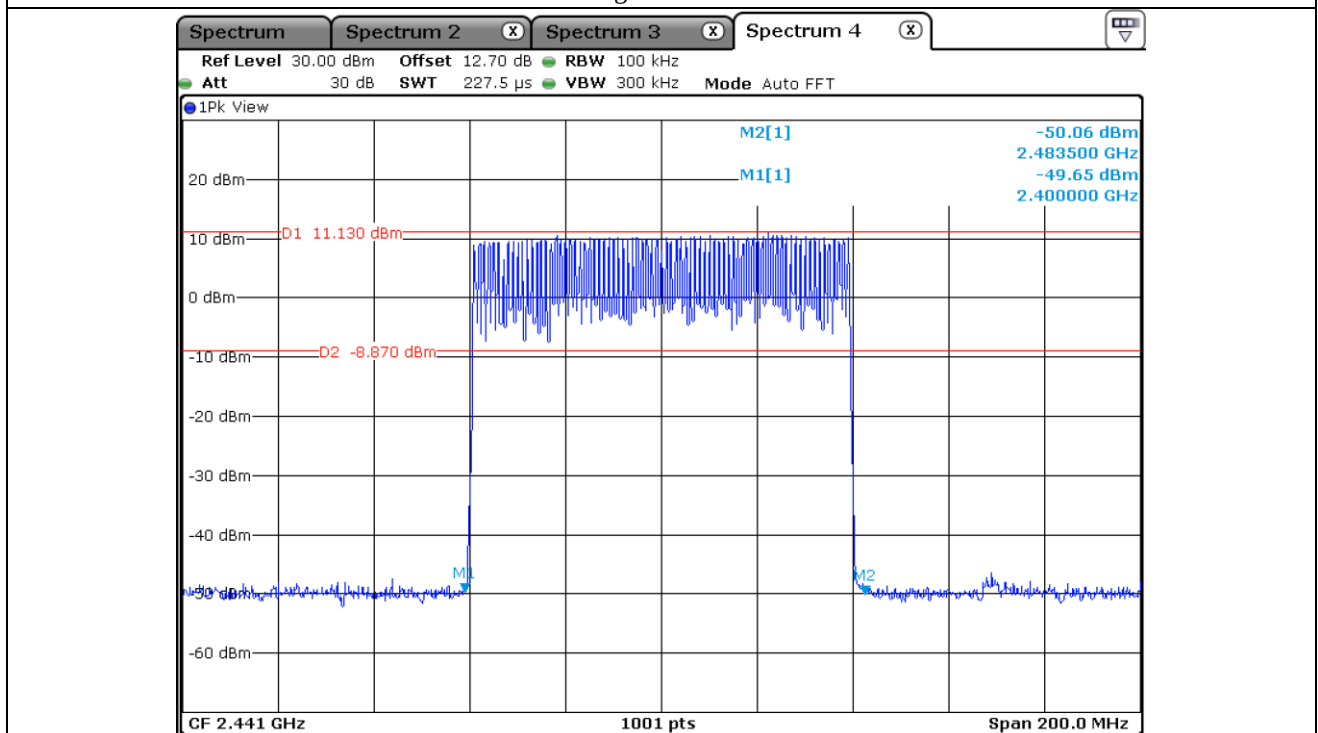


Hopping Mode

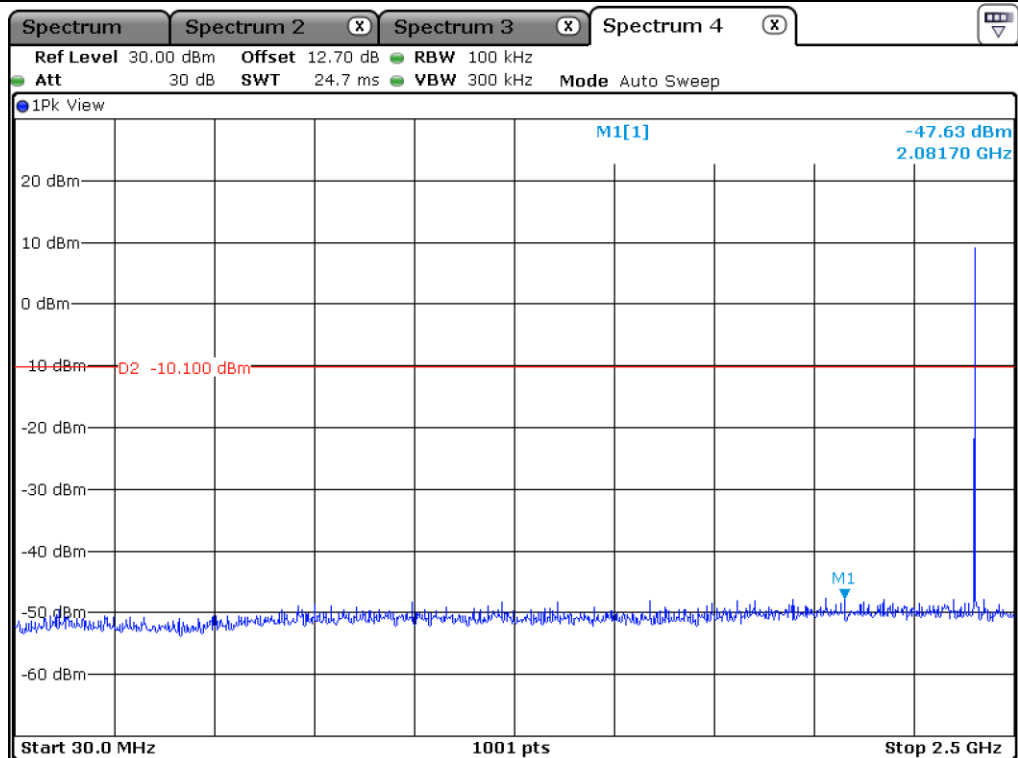


Low Channel

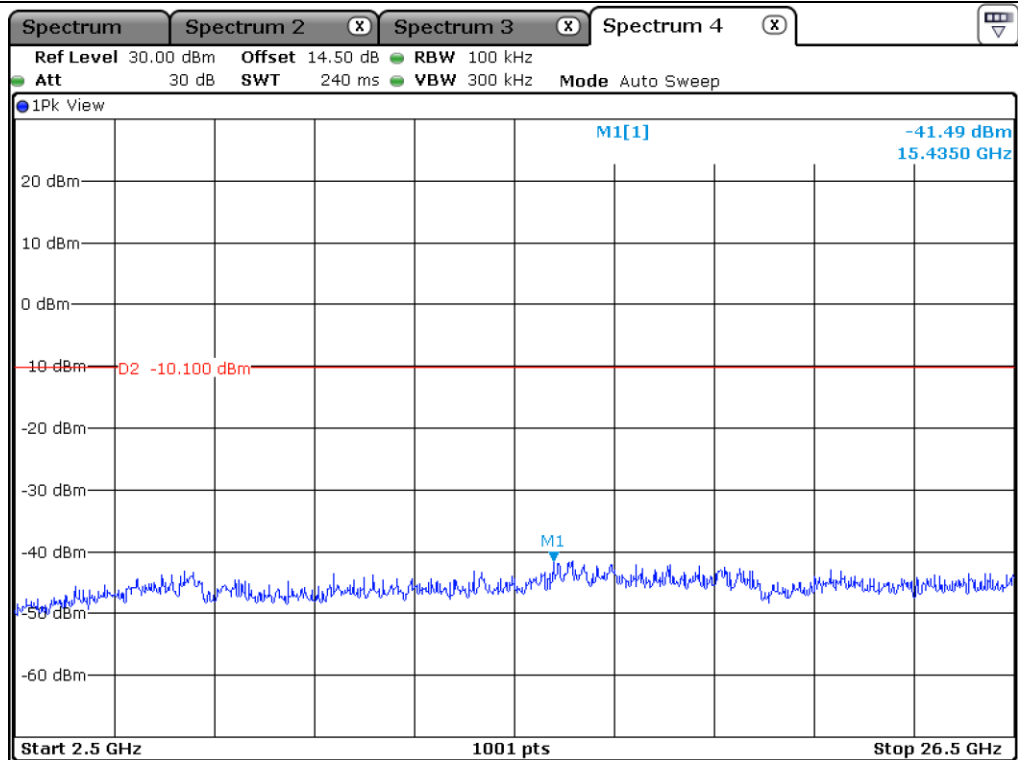


Low Channel

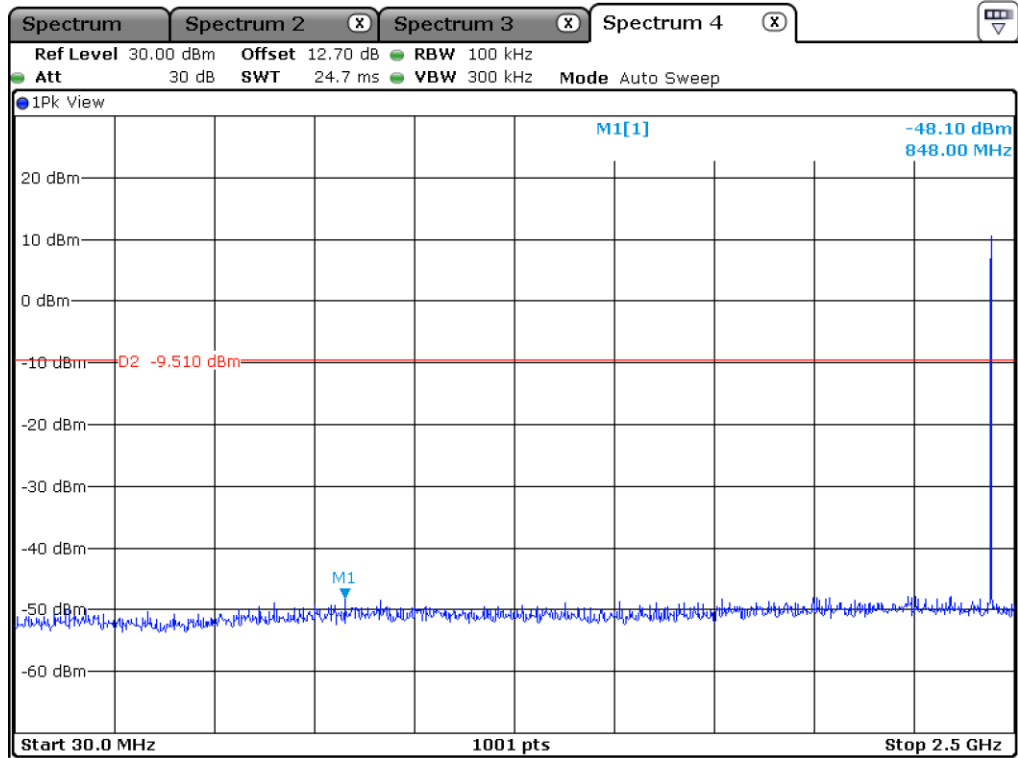


Middle Channel

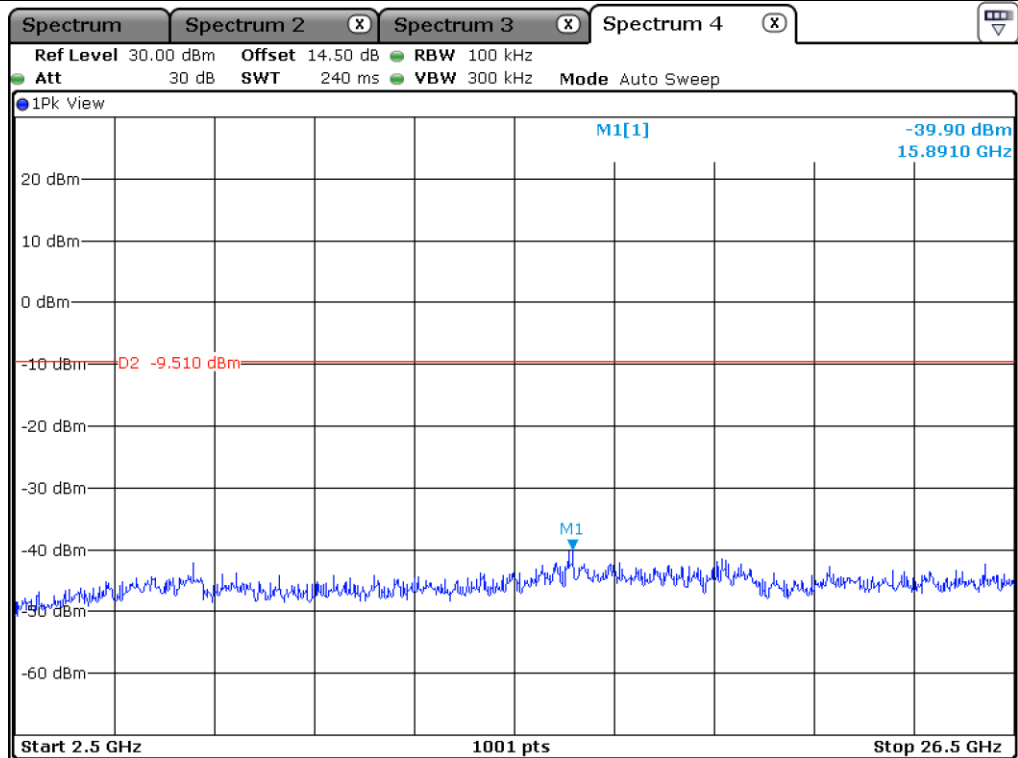


Middle Channel

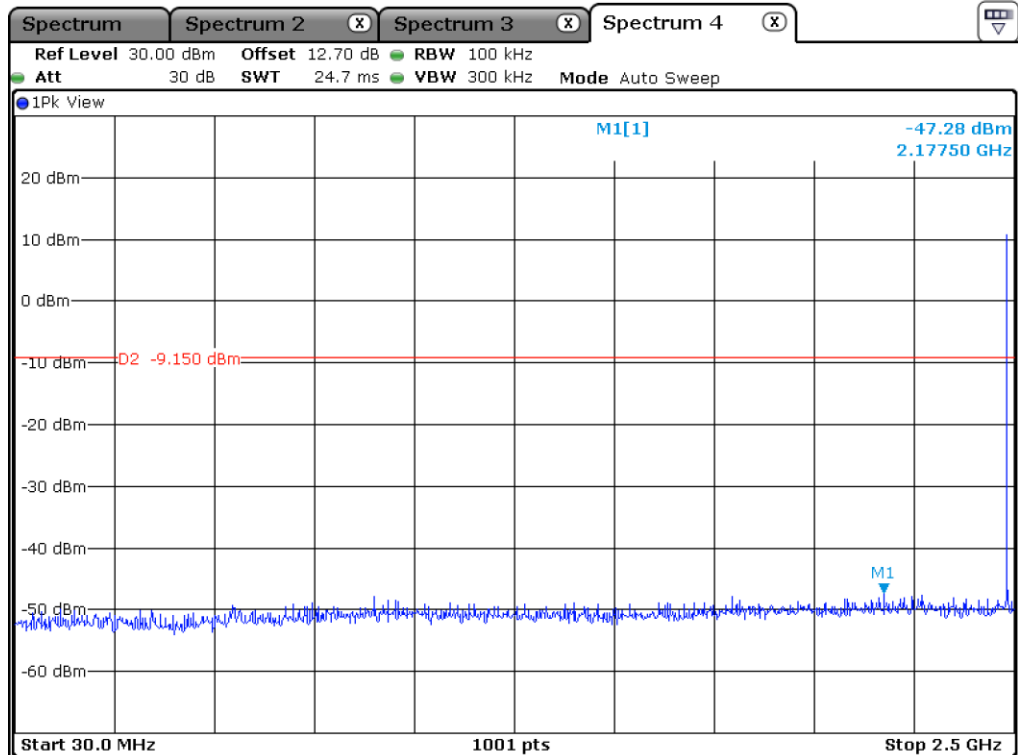


High Channel

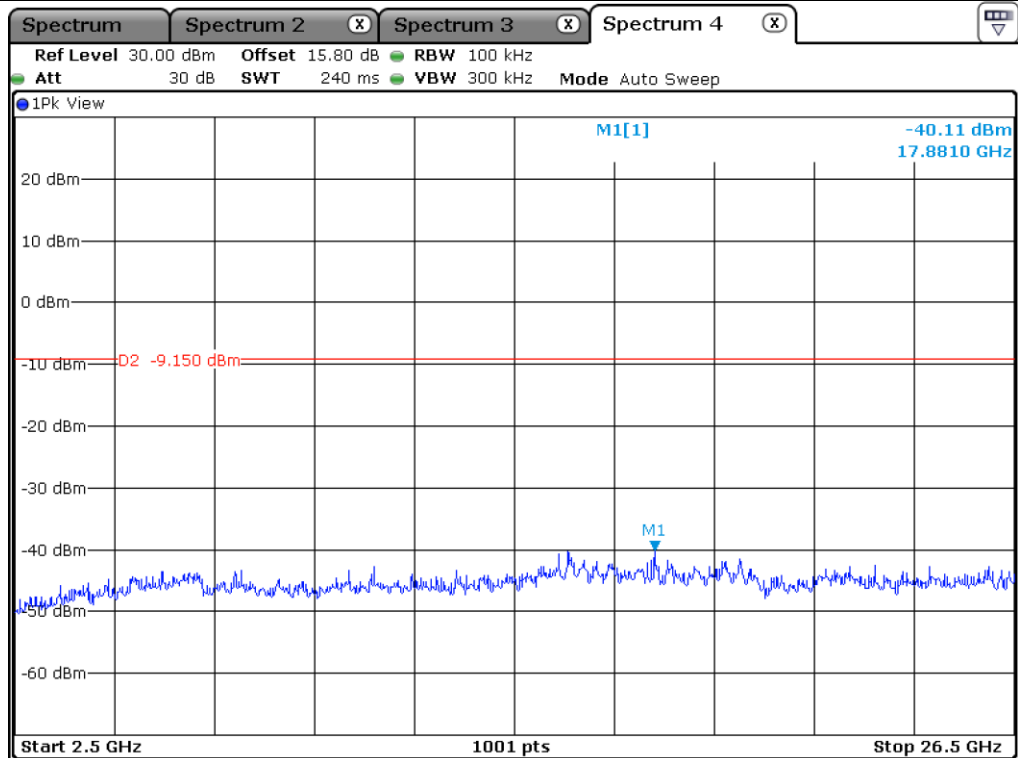

High Channel

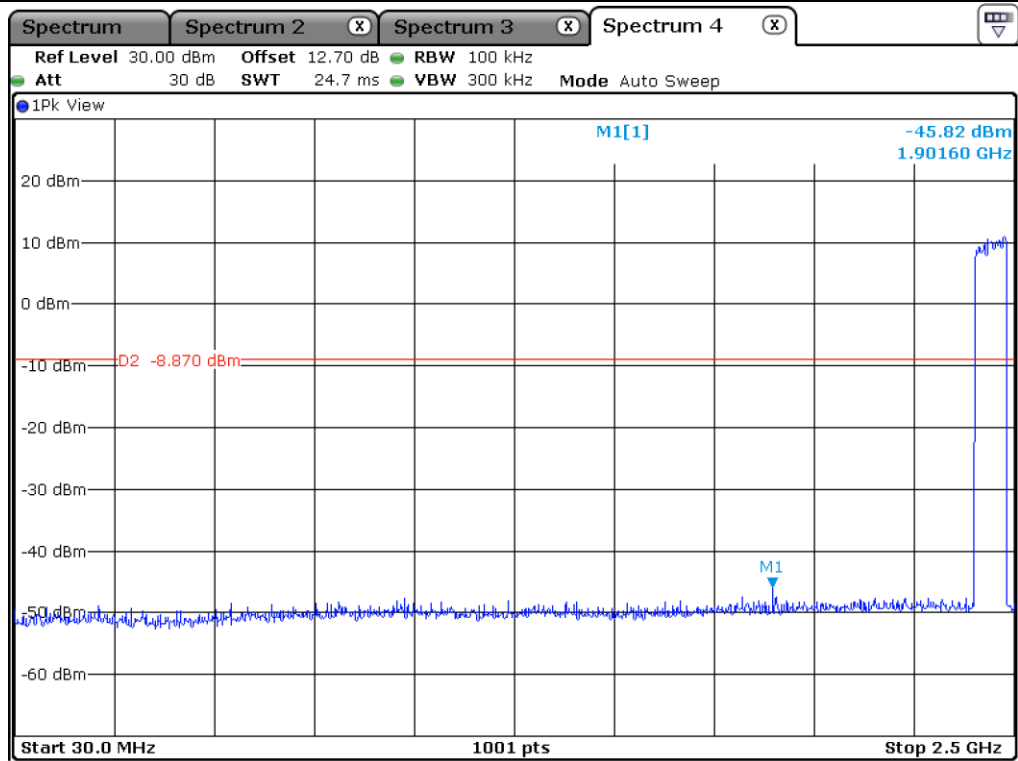



Hopping Mode

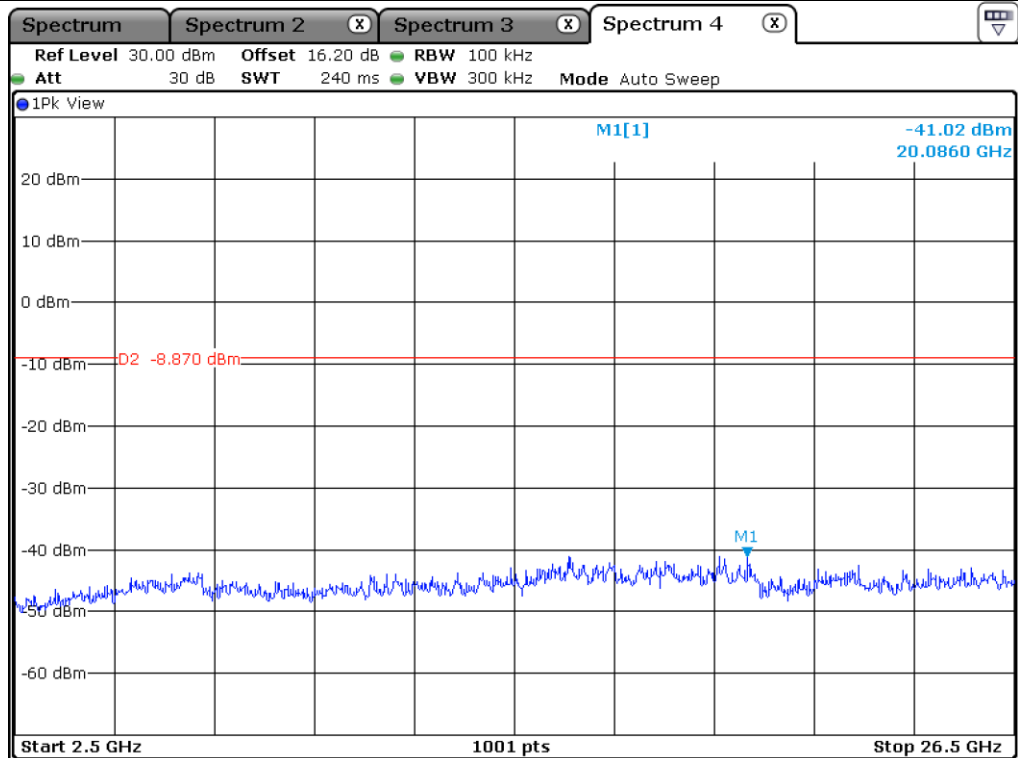


Hopping Mode

12.6.2 Test data for 2 Mbps

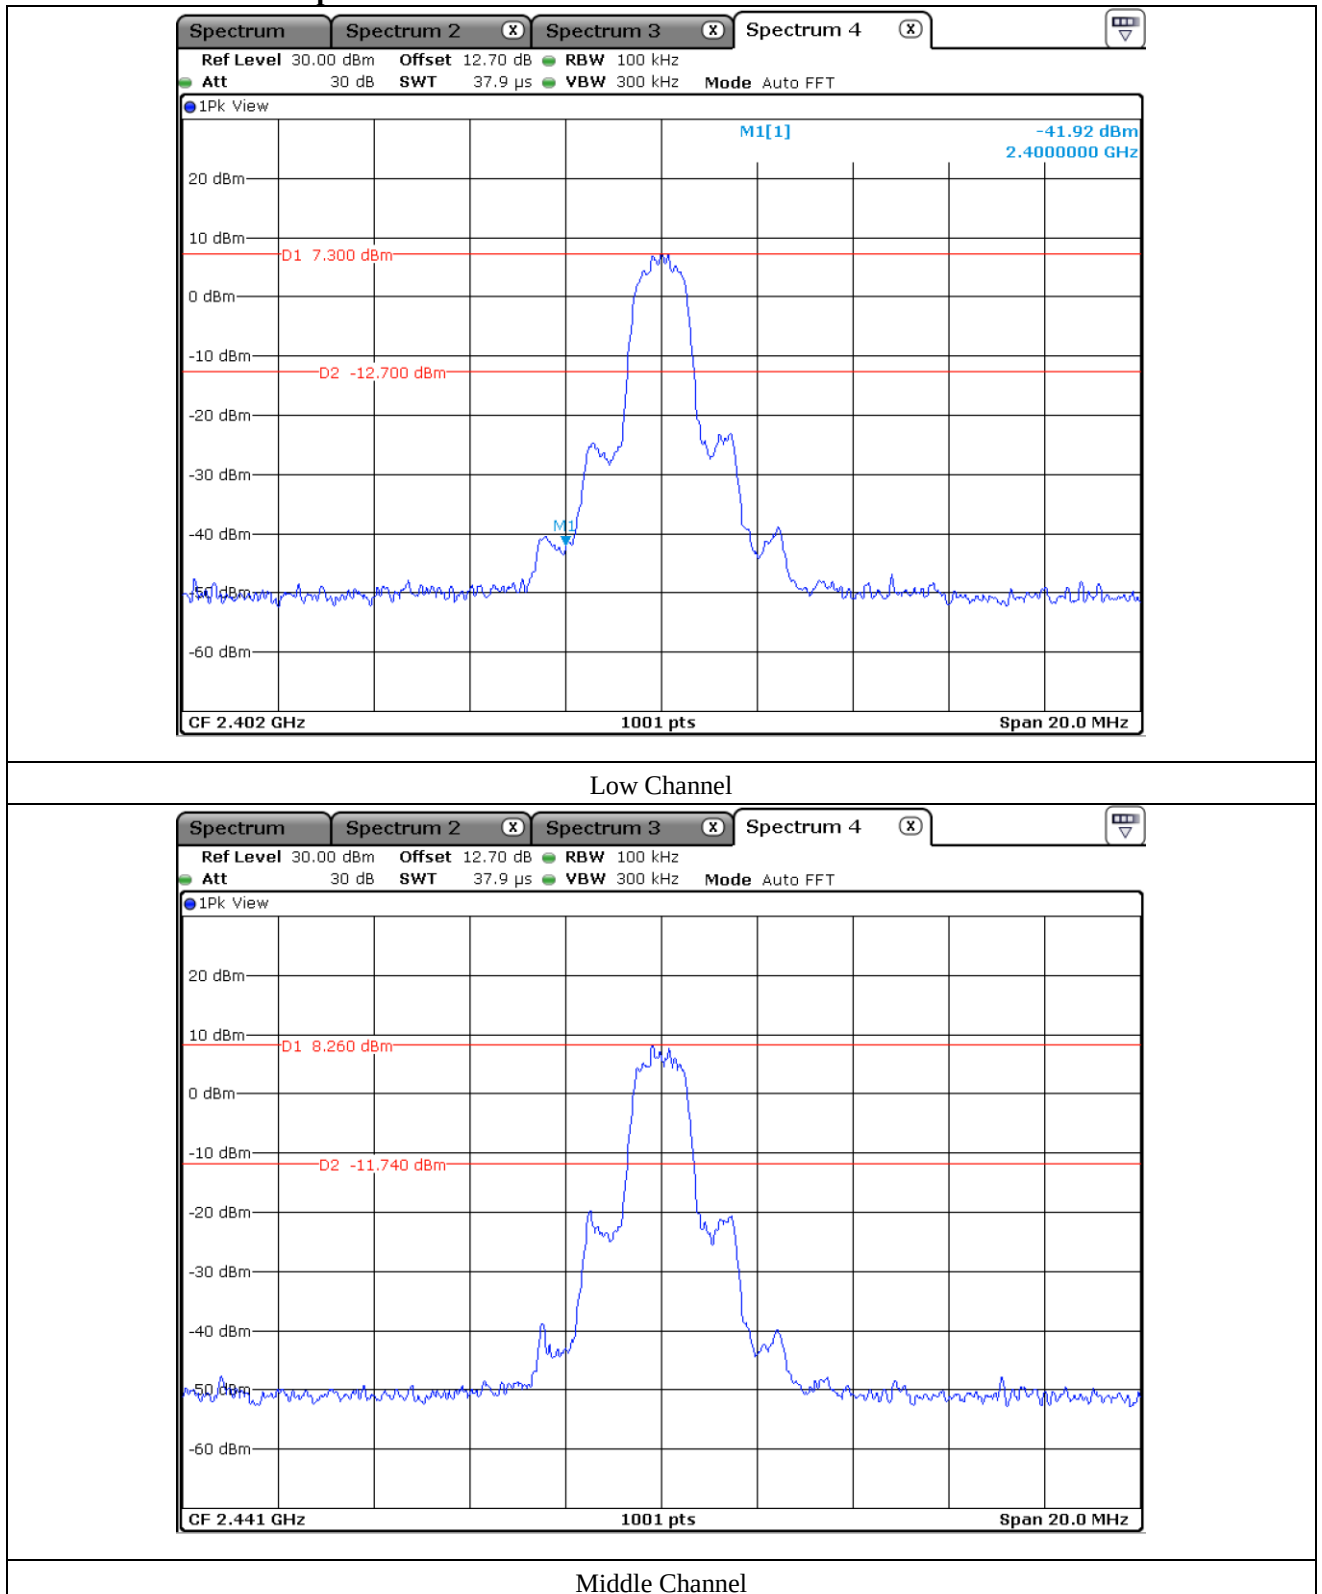


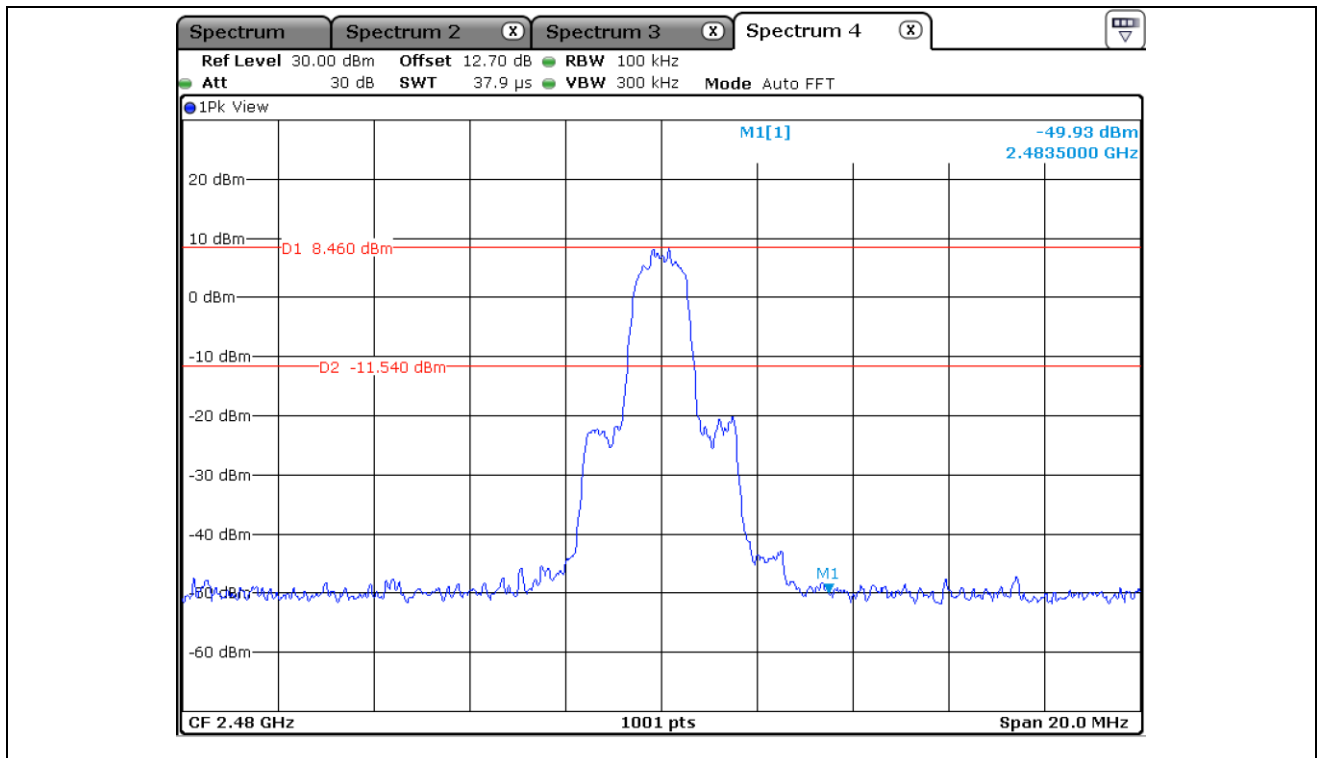


High Channel

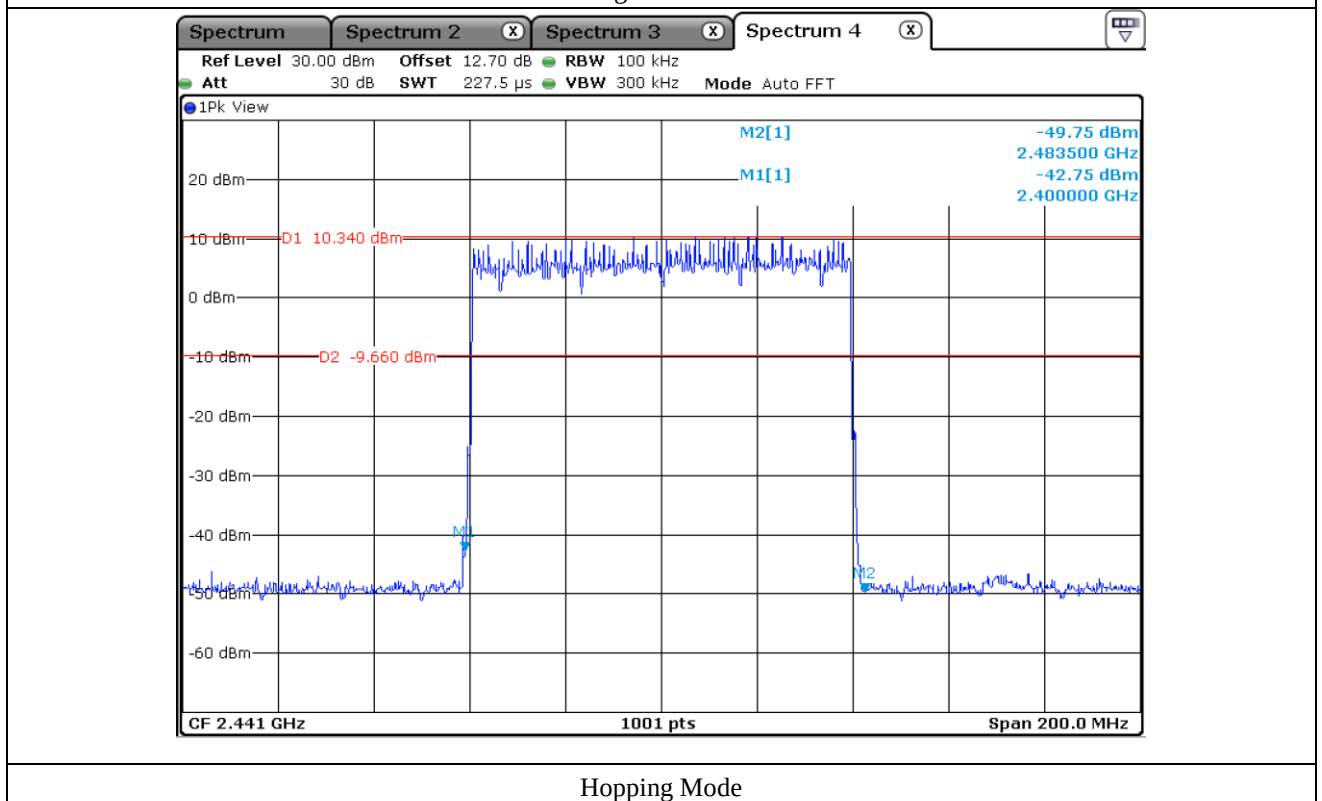


Hopping Mode

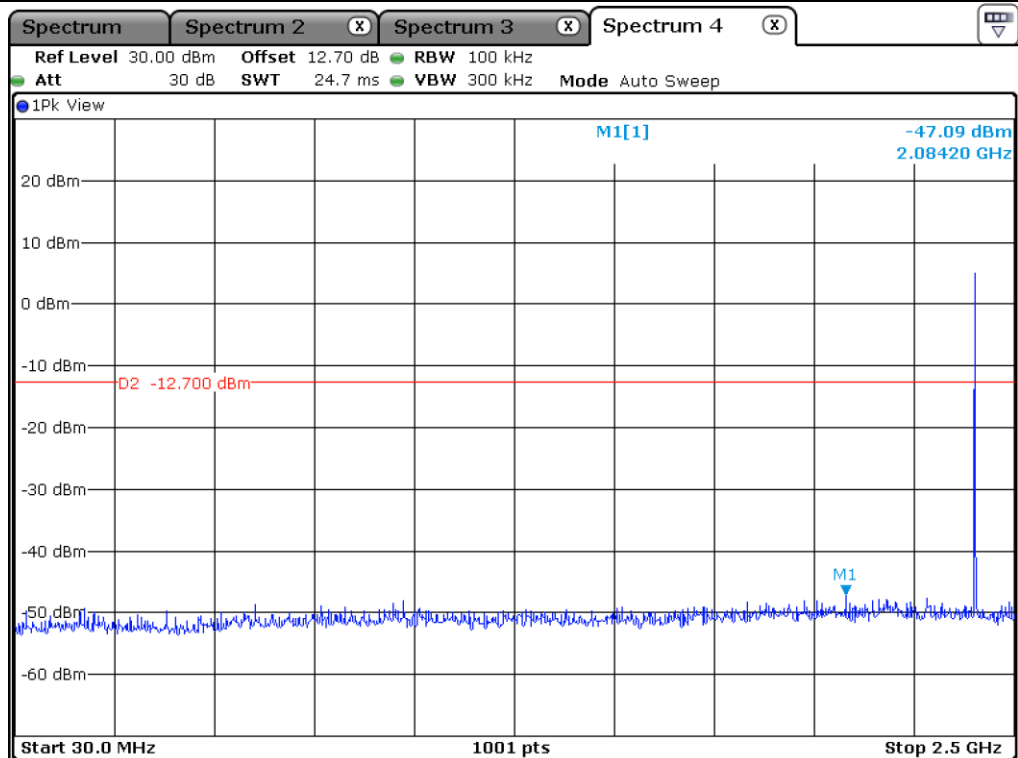


Low Channel

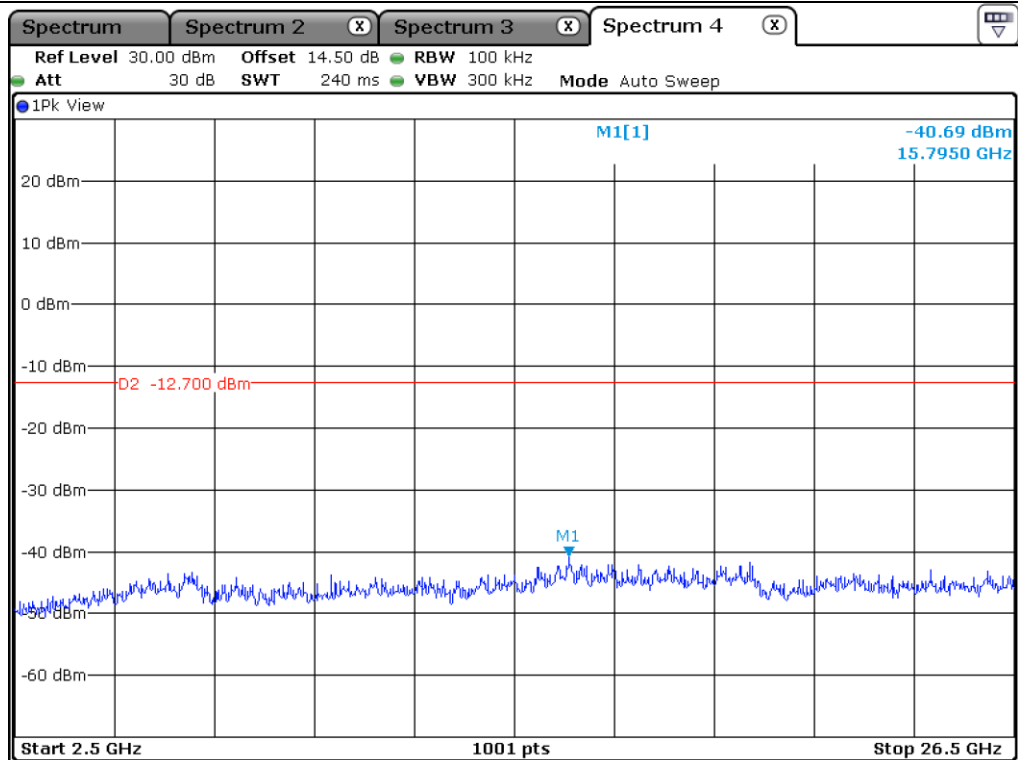


Low Channel

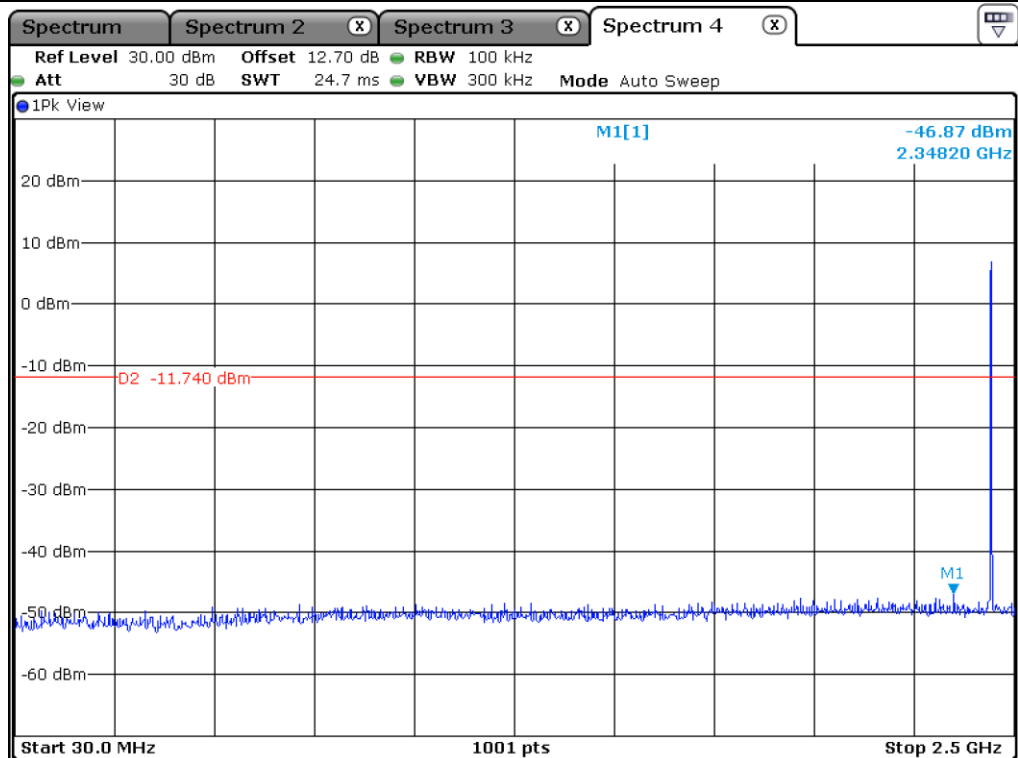


Middle Channel

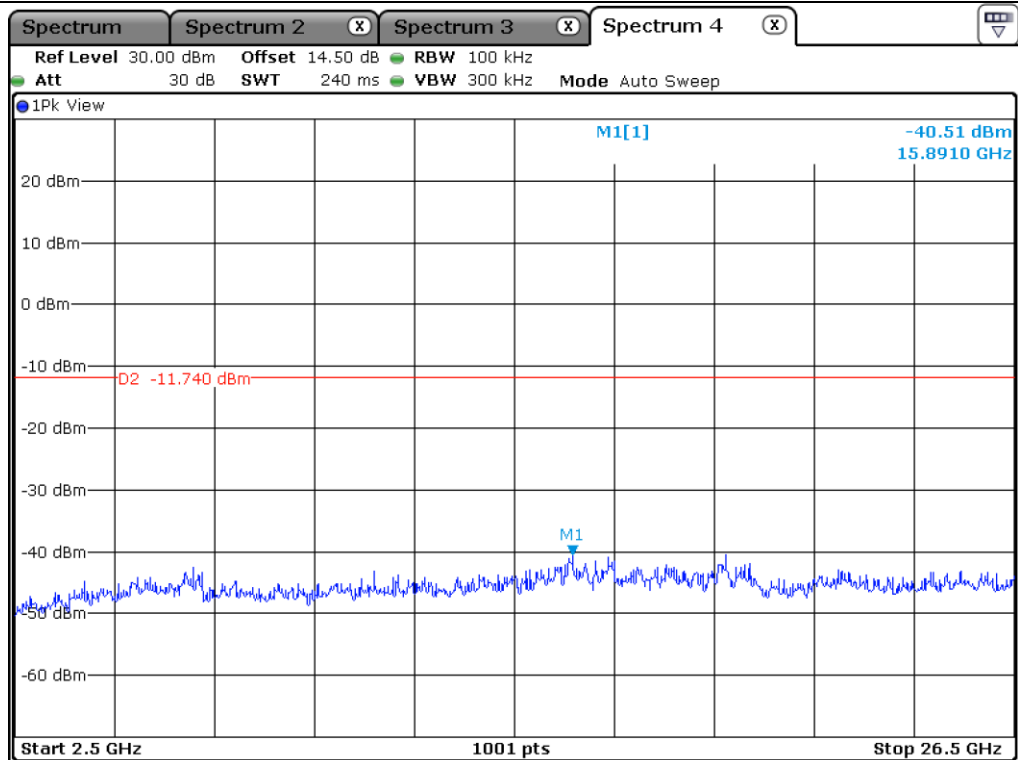


Middle Channel

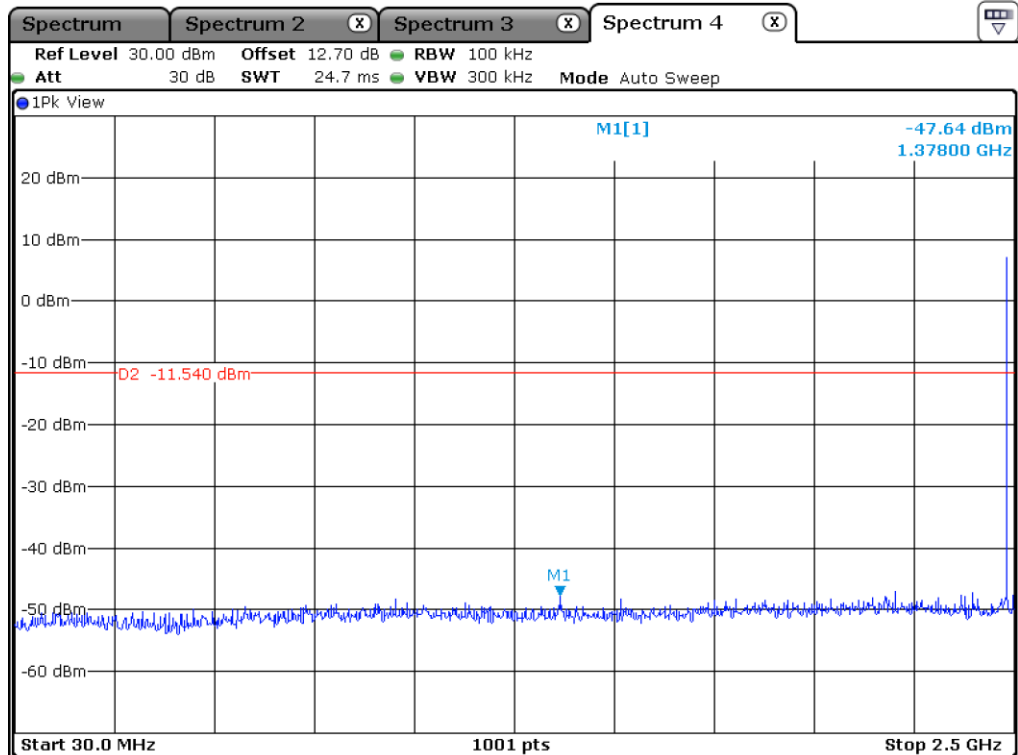


High Channel

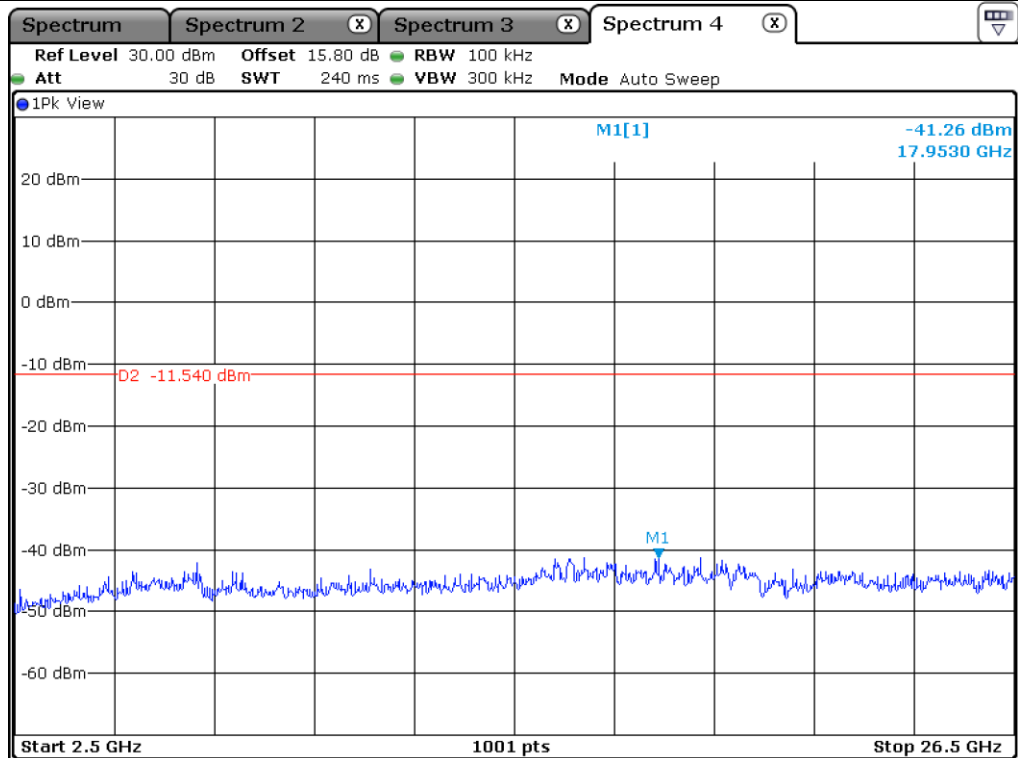

High Channel

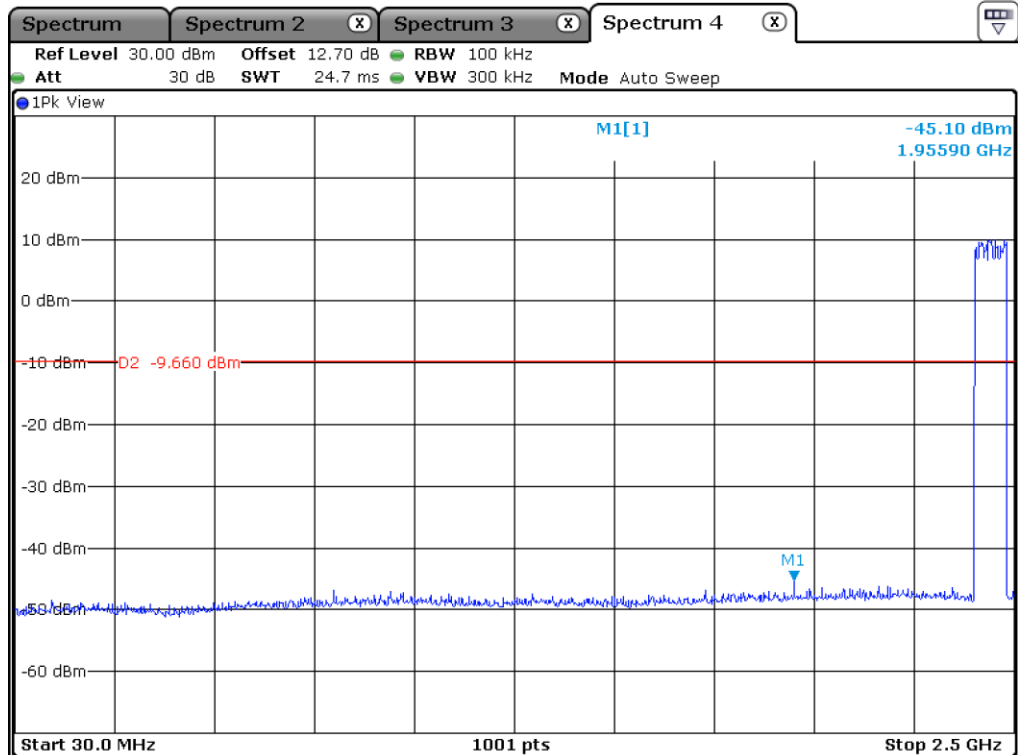



Hopping Mode

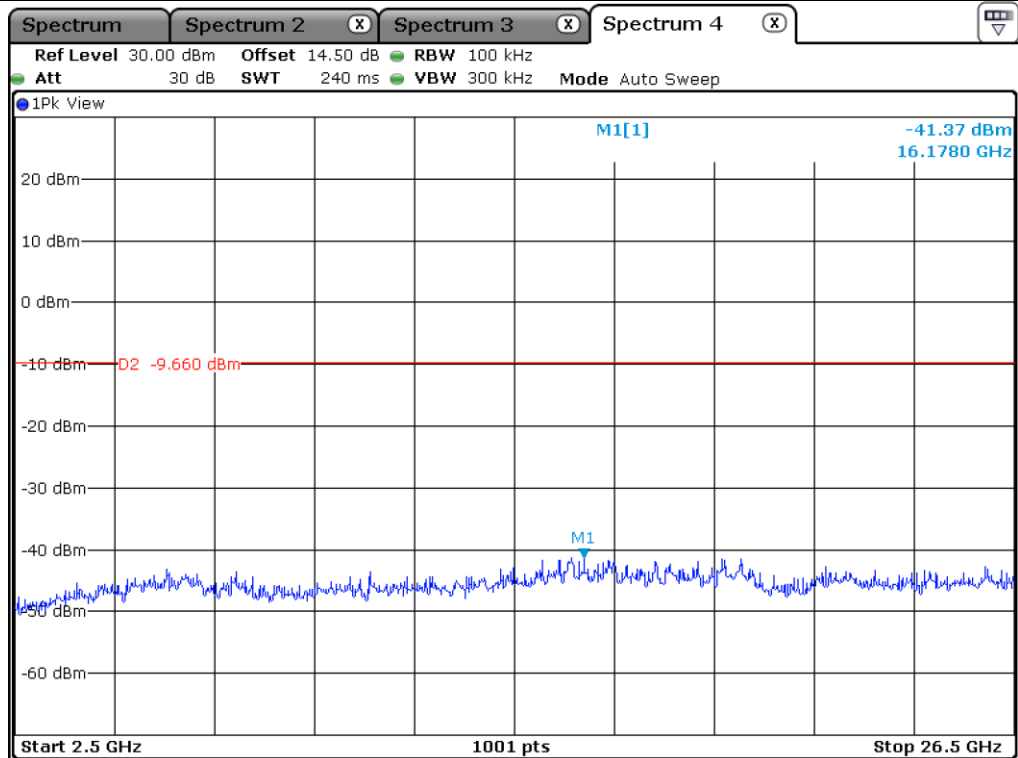


Hopping Mode

12.6.3 Test data for 3 Mbps

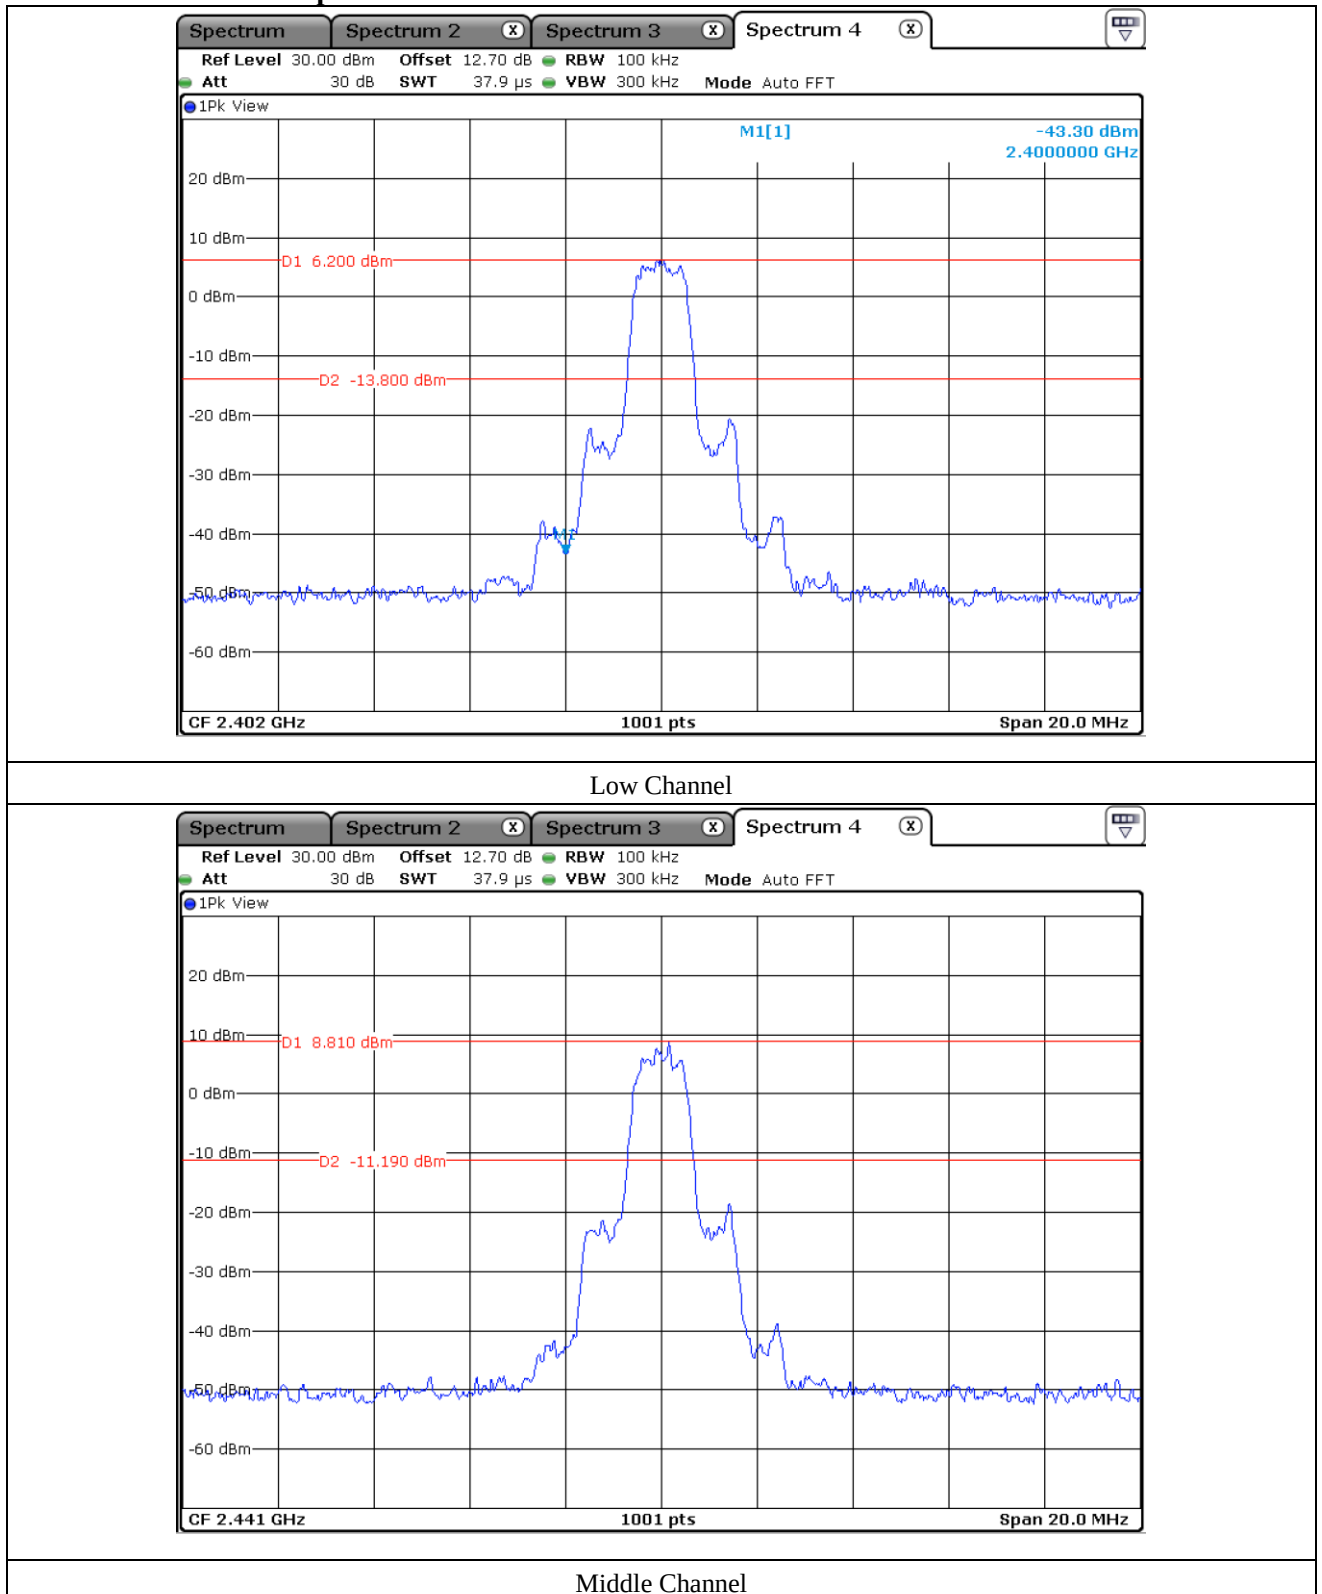


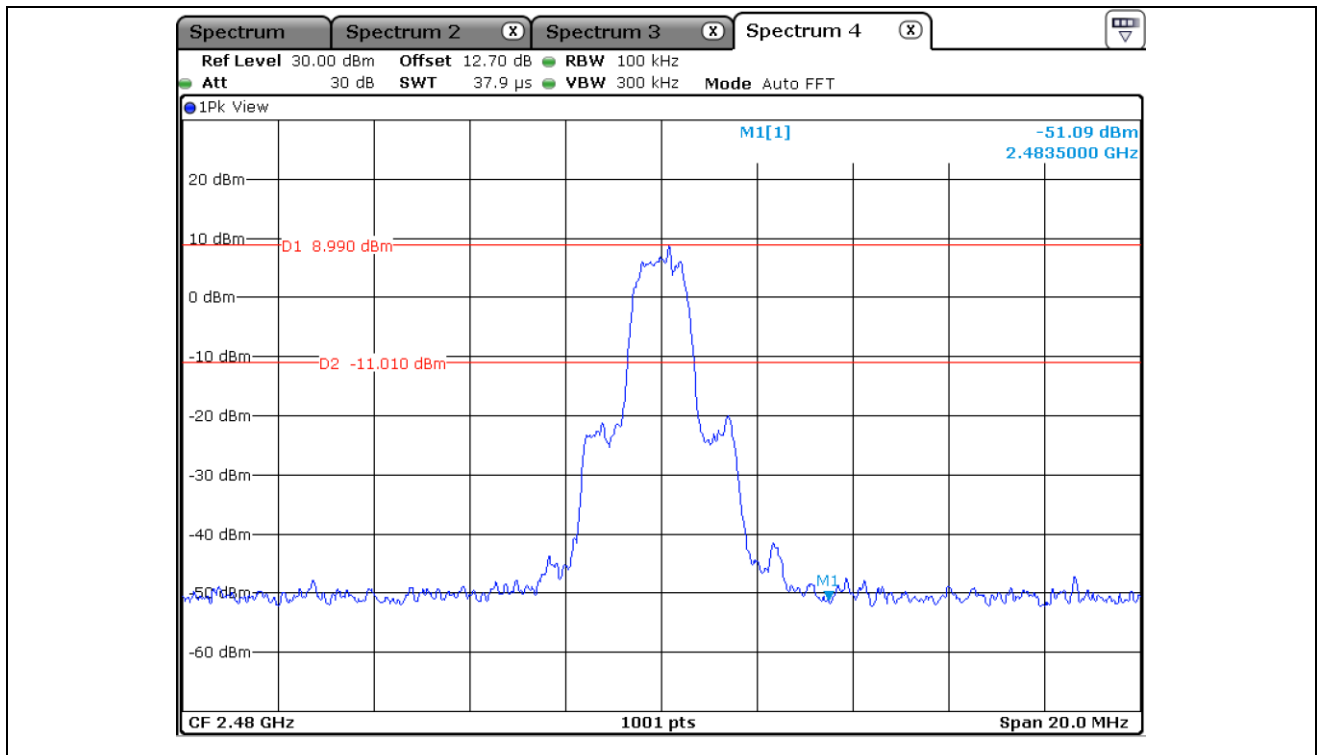


High Channel

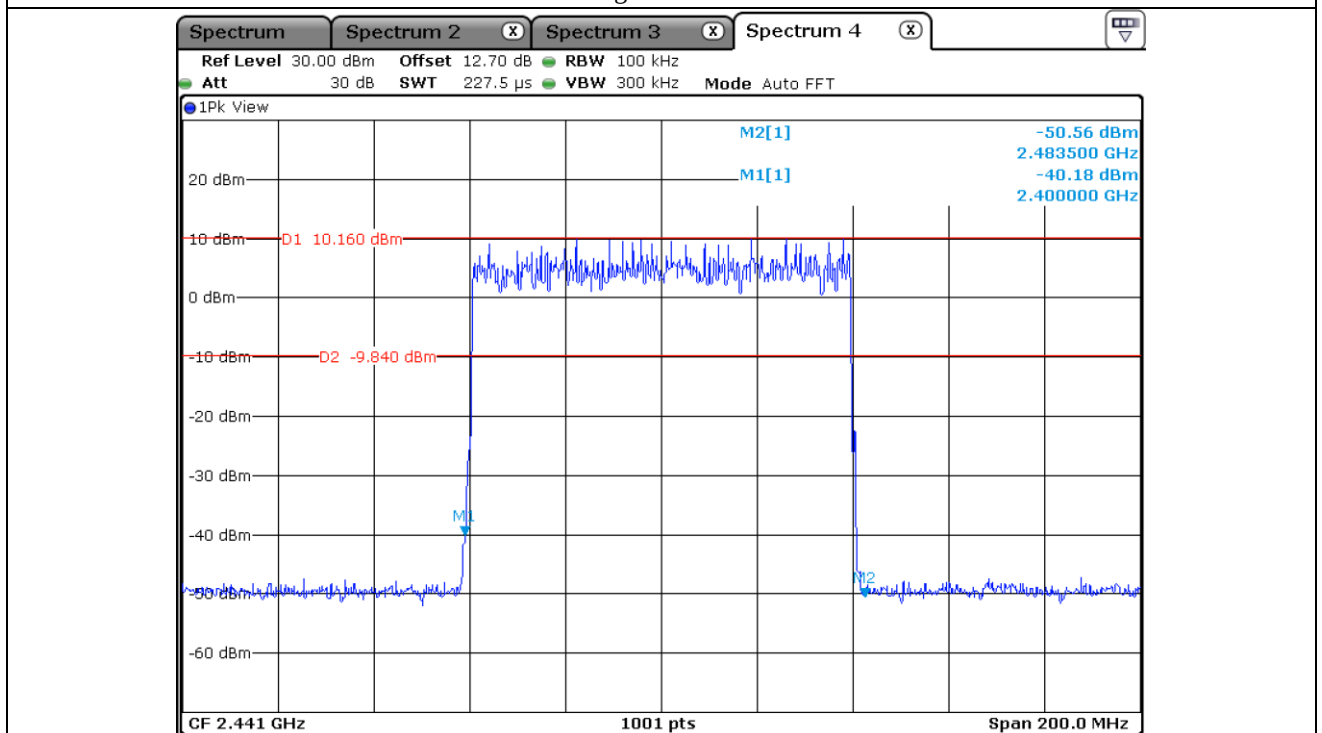


Hopping Mode

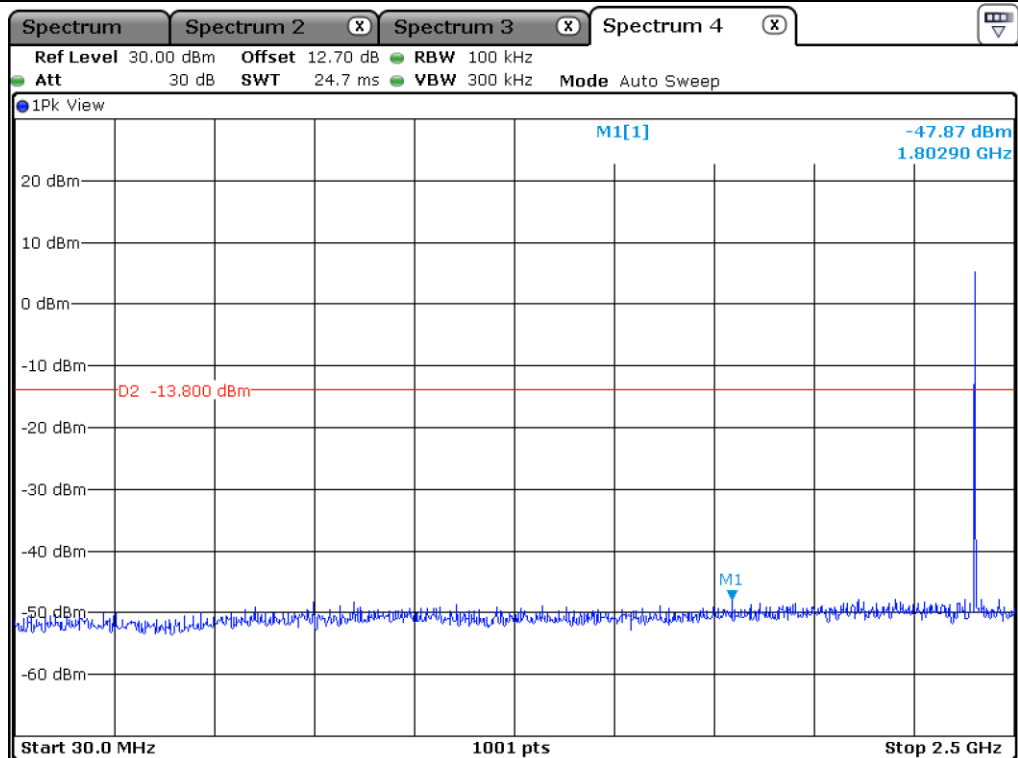


Low Channel

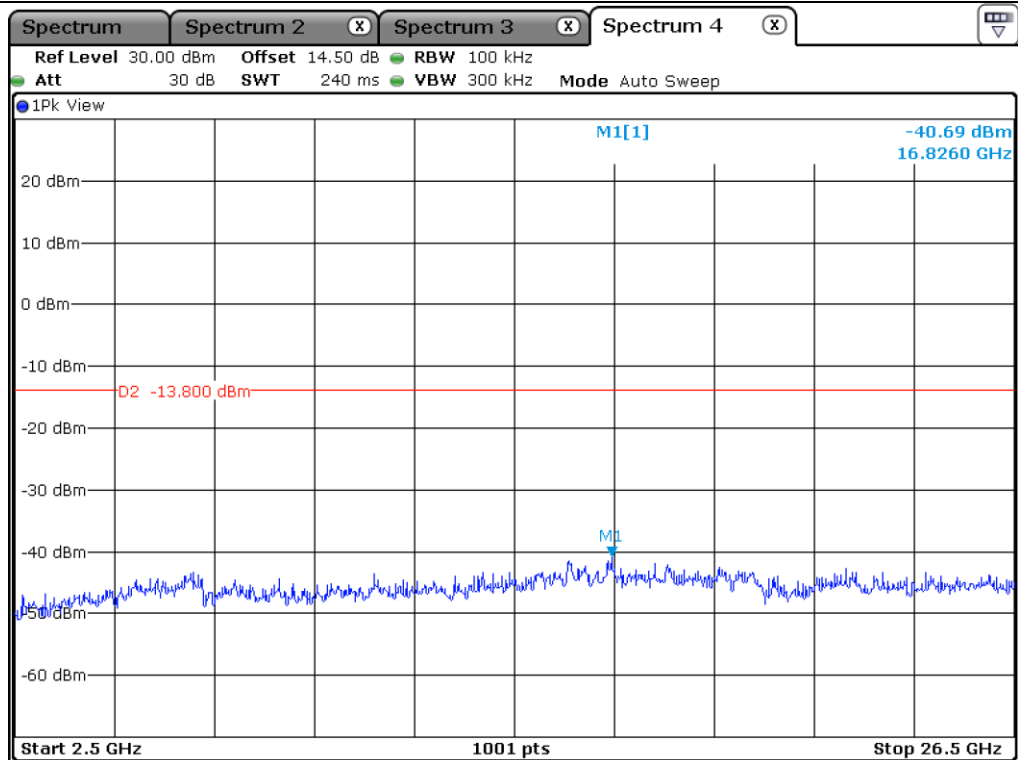


Low Channel

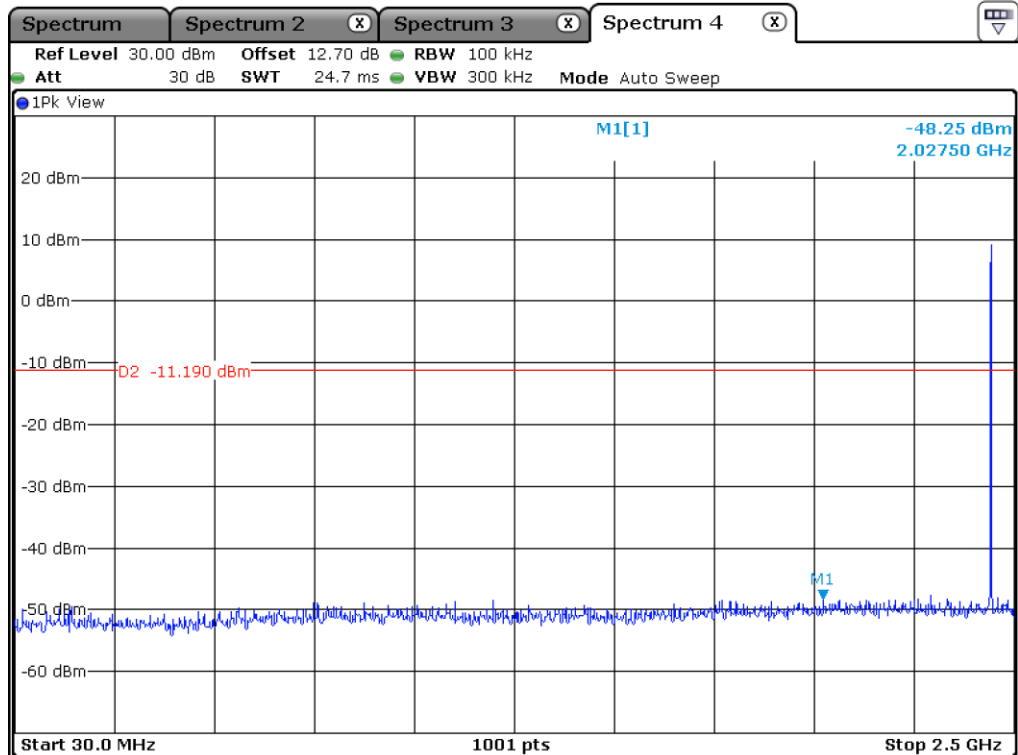


Middle Channel

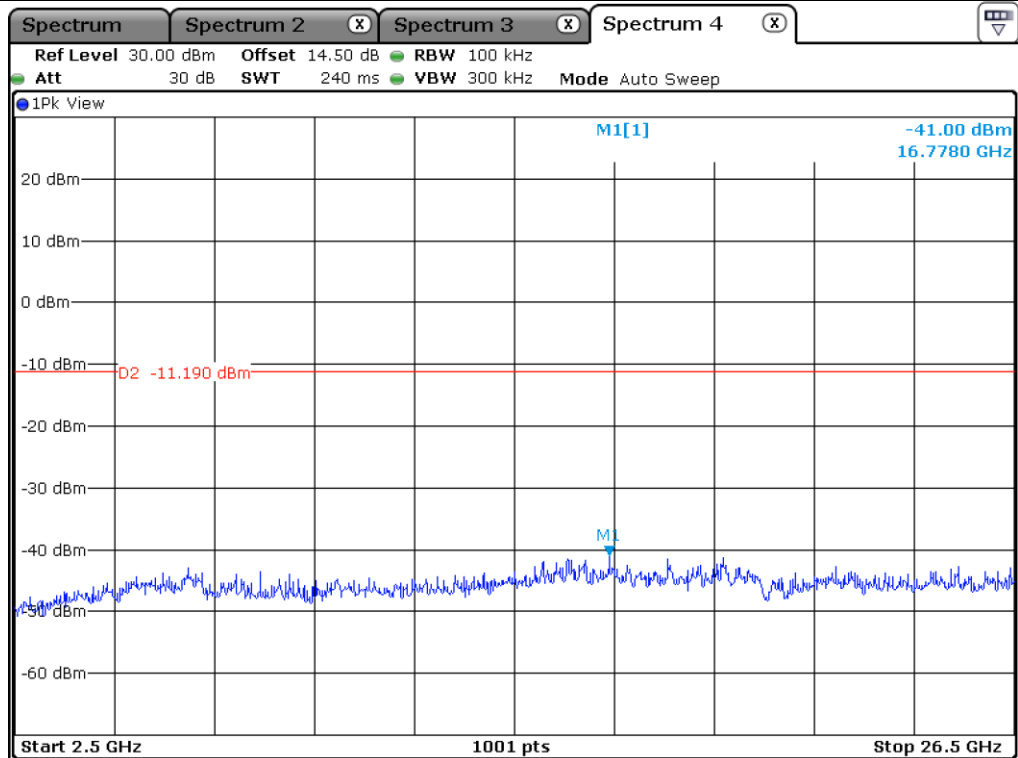


Middle Channel

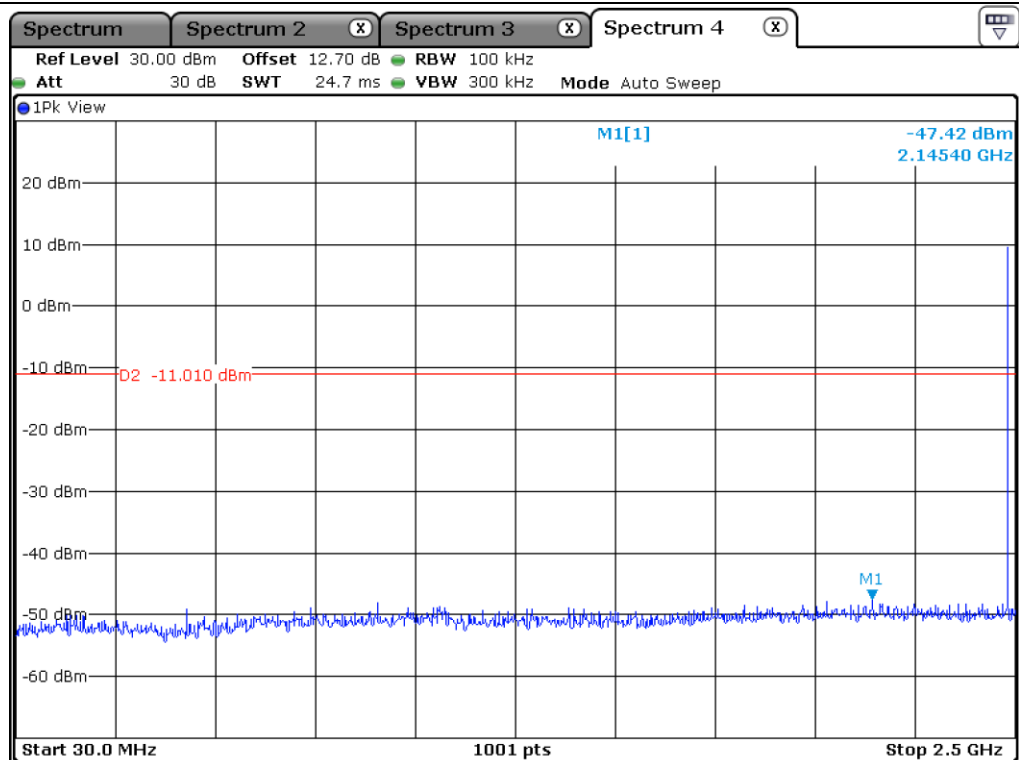


High Channel

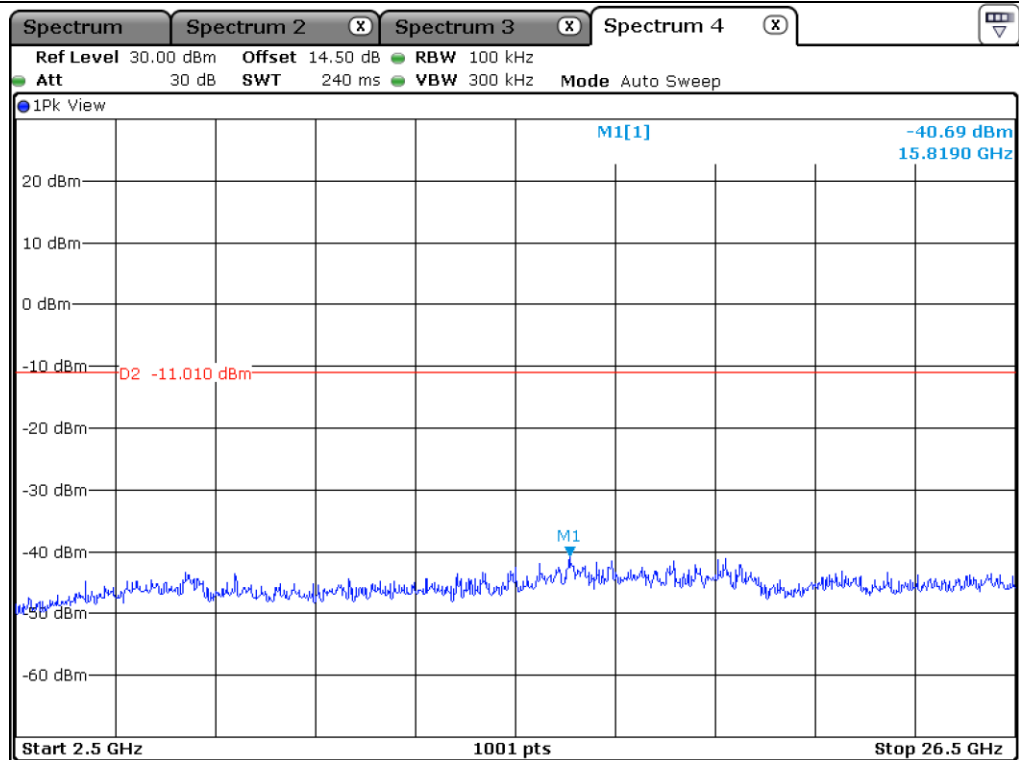

High Channel

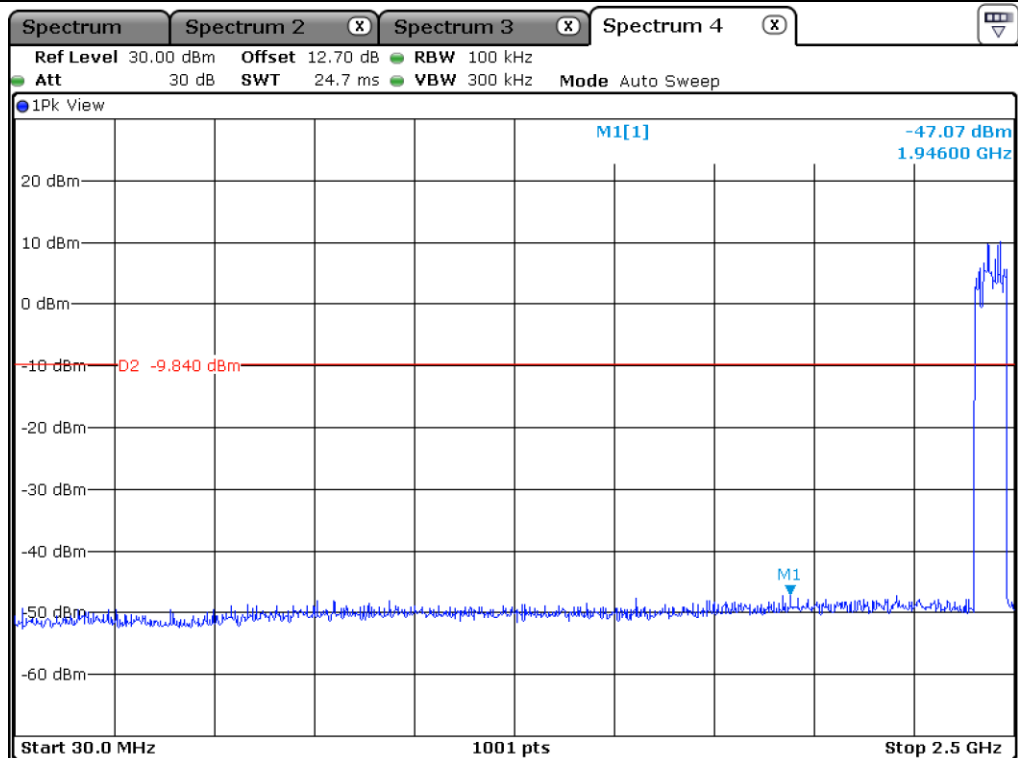

Hopping Mode

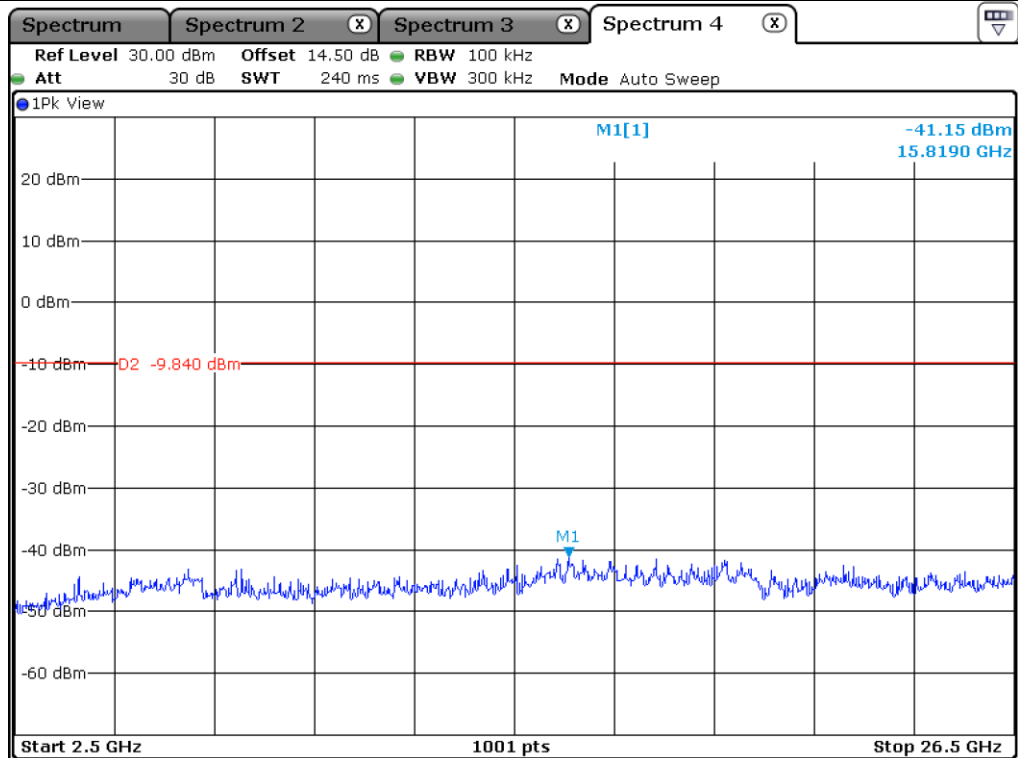

Hopping Mode

12.6 Test data for Transmitting mode radiated emission

12.6.1 Radiated Emission which fall in the Restricted Band (Left Earbud)

12.6.1.1 Test data for 1 Mbps

- . Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Measurement distance : 3 m
- . Duty Cycle : 77.01 %
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Duty Factor (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel										
2 378.60	56.19	Peak	H	28.30	8.12	46.15	-	46.46	74.00	27.54
2 390.00	47.20	Average	H	28.30	8.12	46.15	1.13	38.60	54.00	15.40
2 379.06	58.01	Peak	V	28.30	8.12	46.15	-	48.28	74.00	25.72
2 321.90	47.94	Average	V	28.30	8.12	46.15	1.13	39.34	54.00	14.66
Test Data for High Channel										
2 483.50	61.48	Peak	H	28.70	8.20	46.06	-	52.32	74.00	21.68
2 483.50	51.59	Average	H	28.70	8.20	46.06	1.13	43.56	54.00	10.44
2 483.50	60.28	Peak	V	28.70	8.20	46.06	-	51.12	74.00	22.88
2 483.50	50.05	Average	V	28.70	8.20	46.06	1.13	42.02	54.00	11.98

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amp Gain} + \text{Duty Factor}$$

12.6.1.2 Test data for 2 Mbps

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 77.13 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Duty Factor (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel										
2 383.57	56.37	Peak	H	28.30	8.12	46.15	-	46.64	74.00	27.36
2 387.15	47.38	Average	H	28.30	8.12	46.15	1.13	38.78	54.00	15.22
2 389.72	56.34	Peak	V	28.30	8.12	46.15	-	46.61	74.00	27.39
2 321.99	47.35	Average	V	28.30	8.12	46.15	1.13	38.75	54.00	15.25
Test Data for High Channel										
2 483.50	65.52	Peak	H	28.70	8.20	46.06	-	56.36	74.00	17.64
2 483.50	52.92	Average	H	28.70	8.20	46.06	1.13	44.89	54.00	9.11
2 483.50	61.90	Peak	V	28.70	8.20	46.06	-	52.74	74.00	21.26
2 483.50	50.31	Average	V	28.70	8.20	46.06	1.13	42.28	54.00	11.72

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amp Gain} + \text{Duty Factor}$$

12.6.1.3 Test data for 3 Mbps

- . Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Measurement distance : 3 m
- . Duty Cycle : 77.54 %
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Duty Factor (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel										
2 386.32	57.05	Peak	H	28.30	8.12	46.15	-	47.32	74.00	26.68
2 389.36	47.22	Average	H	28.30	8.12	46.15	1.10	38.59	54.00	15.41
2 390.00	57.66	Peak	V	28.30	8.12	46.15	-	47.93	74.00	26.07
2 322.08	47.11	Average	V	28.30	8.12	46.15	1.10	38.48	54.00	15.52
Test Data for High Channel										
2 483.50	64.44	Peak	H	28.70	8.20	46.06	-	55.28	74.00	18.72
2 483.50	53.21	Average	H	28.70	8.20	46.06	1.10	45.15	54.00	8.85
2 483.50	61.21	Peak	V	28.70	8.20	46.06	-	52.05	74.00	21.95
2 483.50	50.68	Average	V	28.70	8.20	46.06	1.10	42.62	54.00	11.38

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amp Gain} + \text{Duty Factor}$$

12.6.2 Radiated Emission which fall in the Restricted Band (Right Earbud)

12.6.2.1 Test data for 1 Mbps

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 77.13 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Duty Factor (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel										
2 332.01	54.65	Peak	H	28.30	8.12	46.15	-	44.92	74.00	29.08
2 389.27	44.24	Average	H	28.30	8.12	46.15	1.13	35.64	54.00	18.36
2 390.00	58.28	Peak	V	28.30	8.12	46.15	-	48.55	74.00	25.45
2 388.99	47.47	Average	V	28.30	8.12	46.15	1.13	38.87	54.00	15.13
Test Data for High Channel										
2 483.50	57.84	Peak	H	28.70	8.20	46.06	-	48.68	74.00	25.32
2 483.50	48.13	Average	H	28.70	8.20	46.06	1.13	40.10	54.00	13.90
2 483.50	59.77	Peak	V	28.70	8.20	46.06	-	50.61	74.00	23.39
2 483.50	50.21	Average	V	28.70	8.20	46.06	1.13	42.18	54.00	11.82

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amp Gain} + \text{Duty Factor}$$

12.6.2.2 Test data for 2 Mbps

- . Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Measurement distance : 3 m
- . Duty Cycle : 77.13 %
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Duty Factor (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel										
2 387.70	53.39	Peak	H	28.30	8.12	46.15	-	43.66	74.00	30.34
2 390.00	45.24	Average	H	28.30	8.12	46.15	1.13	36.64	54.00	17.36
2 390.00	56.90	Peak	V	28.30	8.12	46.15	-	47.17	74.00	26.83
2 390.00	47.55	Average	V	28.30	8.12	46.15	1.13	38.95	54.00	15.05
Test Data for High Channel										
2 483.50	58.10	Peak	H	28.70	8.20	46.06	-	48.94	74.00	25.06
2 483.50	48.41	Average	H	28.70	8.20	46.06	1.13	40.38	54.00	13.62
2 483.82	60.30	Peak	V	28.70	8.20	46.06	-	51.14	74.00	22.86
2 483.50	50.47	Average	V	28.70	8.20	46.06	1.13	42.44	54.00	11.56

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amp Gain} + \text{Duty Factor}$$

12.6.2.3 Test data for 3 Mbps

- . Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Measurement distance : 3 m
- . Duty Cycle : 77.01 %
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Duty Factor (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel										
2 330.26	53.62	Peak	H	28.30	8.12	46.15	-	43.89	74.00	30.11
2 390.00	45.09	Average	H	28.30	8.12	46.15	1.13	36.49	54.00	17.51
2 364.27	57.44	Peak	V	28.30	8.12	46.15	-	47.71	74.00	26.29
2 390.00	47.59	Average	V	28.30	8.12	46.15	1.13	38.99	54.00	15.01
Test Data for High Channel										
2 483.50	60.07	Peak	H	28.70	8.20	46.06	-	50.91	74.00	23.09
2 483.50	48.63	Average	H	28.70	8.20	46.06	1.13	40.60	54.00	13.40
2 483.50	59.70	Peak	V	28.70	8.20	46.06	-	50.54	74.00	23.46
2 483.50	50.57	Average	V	28.70	8.20	46.06	1.13	42.54	54.00	11.46

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amp Gain} + \text{Duty Factor}$$

12.6.3 Spurious & Harmonic Radiated Emission above 1 GHz (Left Earbud)

12.6.3.1 Test data for 1 Mbps

- . Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m
- . Duty Cycle : 77.01 %
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Duty Factor (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel										
4 804.00	51.66	Peak	H	33.40	11.19	45.73	-	50.52	74.00	23.48
4 804.00	41.16	Average	H	33.40	11.19	45.73	1.13	41.15	54.00	12.85
4 804.00	50.89	Peak	V	33.40	11.19	45.73	-	49.75	74.00	24.25
4 804.00	41.18	Average	V	33.40	11.19	45.73	1.13	41.17	54.00	12.83
Test Data for Middle Channel										
4 882.00	51.27	Peak	H	33.50	11.21	45.80	-	50.18	74.00	23.82
4 882.00	41.32	Average	H	33.50	11.21	45.80	1.13	41.36	54.00	12.64
4 882.00	50.65	Peak	V	33.50	11.21	45.80	-	49.56	74.00	24.44
4 882.00	40.94	Average	V	33.50	11.21	45.80	1.13	40.98	54.00	13.02
Test Data for High Channel										
4 960.00	51.02	Peak	H	33.40	11.28	45.89	-	49.81	74.00	24.19
4 960.00	40.95	Average	H	33.40	11.28	45.89	1.13	40.87	54.00	13.13
4 960.00	51.65	Peak	V	33.40	11.28	45.89	-	50.44	74.00	23.56
4 960.00	40.70	Average	V	33.40	11.28	45.89	1.13	40.62	54.00	13.38

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dBμV/m)} - \text{Total Level (dBμV/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amp Gain} + \text{Duty Factor}$$

12.6.3.2 Test data for 2 Mbps

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Duty Cycle : 77.13 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Duty Factor (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel										
4 804.00	52.04	Peak	H	33.40	11.19	45.73	-	50.90	74.00	23.10
4 804.00	40.78	Average	H	33.40	11.19	45.73	1.13	40.77	54.00	13.23
4 804.00	51.10	Peak	V	33.40	11.19	45.73	-	49.96	74.00	24.04
4 804.00	41.09	Average	V	33.40	11.19	45.73	1.13	41.08	54.00	12.92
Test Data for Middle Channel										
4 882.00	50.86	Peak	H	33.50	11.21	45.80	-	49.77	74.00	24.23
4 882.00	41.00	Average	H	33.50	11.21	45.80	1.13	41.04	54.00	12.96
4 882.00	52.12	Peak	V	33.50	11.21	45.80	-	51.03	74.00	22.97
4 882.00	41.43	Average	V	33.50	11.21	45.80	1.13	41.47	54.00	12.53
Test Data for High Channel										
4 960.00	50.14	Peak	H	33.40	11.28	45.89	-	48.93	74.00	25.07
4 960.00	41.07	Average	H	33.40	11.28	45.89	1.13	40.99	54.00	13.01
4 960.00	51.47	Peak	V	33.40	11.28	45.89	-	50.26	74.00	23.74
4 960.00	41.02	Average	V	33.40	11.28	45.89	1.13	40.94	54.00	13.06

Remark: "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dBμV/m) - Total Level (dBμV/m)

Total Level = Reading + Antenna Factor + Cable Loss - Amp Gain + Duty Factor

12.6.3.3 Test data for 3 Mbps

- . Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m
- . Duty Cycle : 77.54 %
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Duty Factor (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel										
4 804.00	51.45	Peak	H	33.40	11.19	45.73	-	50.31	74.00	23.69
4 804.00	41.12	Average	H	33.40	11.19	45.73	1.10	41.08	54.00	12.92
4 804.00	51.05	Peak	V	33.40	11.19	45.73	-	49.91	74.00	24.09
4 804.00	41.07	Average	V	33.40	11.19	45.73	1.10	41.03	54.00	12.97
Test Data for Middle Channel										
4 882.00	50.64	Peak	H	33.50	11.21	45.80	-	49.55	74.00	24.45
4 882.00	41.32	Average	H	33.50	11.21	45.80	1.10	41.33	54.00	12.67
4 882.00	51.4	Peak	V	33.50	11.21	45.80	-	50.31	74.00	23.69
4 882.00	41.17	Average	V	33.50	11.21	45.80	1.10	41.18	54.00	12.82
Test Data for High Channel										
4 960.00	50.26	Peak	H	33.40	11.28	45.89	-	49.05	74.00	24.95
4 960.00	40.68	Average	H	33.40	11.28	45.89	1.10	40.57	54.00	13.43
4 960.00	51.40	Peak	V	33.40	11.28	45.89	-	50.19	74.00	23.81
4 960.00	41.02	Average	V	33.40	11.28	45.89	1.10	40.91	54.00	13.09

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amp Gain} + \text{Duty Factor}$$

12.6.4 Spurious & Harmonic Radiated Emission above 1 GHz (Right Earbud)

12.6.4.1 Test data for 1 Mbps

- . Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m
- . Duty Cycle : 77.13 %
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Duty Factor (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel										
4 804.00	50.63	Peak	H	33.40	11.19	45.73	-	49.49	74.00	24.51
4 804.00	41.20	Average	H	33.40	11.19	45.73	1.13	41.19	54.00	12.81
4 804.00	51.52	Peak	V	33.40	11.19	45.73	-	50.38	74.00	23.62
4 804.00	41.35	Average	V	33.40	11.19	45.73	1.13	41.34	54.00	12.66
Test Data for Middle Channel										
4 882.00	50.82	Peak	H	33.50	11.21	45.80	-	49.73	74.00	24.27
4 882.00	41.21	Average	H	33.50	11.21	45.80	1.13	41.25	54.00	12.75
4 882.00	50.31	Peak	V	33.50	11.21	45.80	-	49.22	74.00	24.78
4 882.00	40.69	Average	V	33.50	11.21	45.80	1.13	40.73	54.00	13.27
Test Data for High Channel										
4 960.00	50.46	Peak	H	33.40	11.28	45.89	-	49.25	74.00	24.75
4 960.00	41.08	Average	H	33.40	11.28	45.89	1.13	41.00	54.00	13.00
4 960.00	51.03	Peak	V	33.40	11.28	45.89	-	49.82	74.00	24.18
4 960.00	40.51	Average	V	33.40	11.28	45.89	1.13	40.43	54.00	13.57

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dBμV/m)} - \text{Total Level (dBμV/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amp Gain} + \text{Duty Factor}$$

12.6.4.2 Test data for 2 Mbps

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Duty Cycle : 77.13 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Duty Factor (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel										
4 804.00	51.20	Peak	H	33.40	11.19	45.73	-	50.06	74.00	23.94
4 804.00	40.90	Average	H	33.40	11.19	45.73	1.13	40.89	54.00	13.11
4 804.00	50.71	Peak	V	33.40	11.19	45.73	-	49.57	74.00	24.43
4 804.00	41.31	Average	V	33.40	11.19	45.73	1.13	41.30	54.00	12.70
Test Data for Middle Channel										
4 882.00	51.11	Peak	H	33.50	11.21	45.80	-	50.02	74.00	23.98
4 882.00	40.76	Average	H	33.50	11.21	45.80	1.13	40.80	54.00	13.20
4 882.00	50.61	Peak	V	33.50	11.21	45.80	-	49.52	74.00	24.48
4 882.00	40.59	Average	V	33.50	11.21	45.80	1.13	40.63	54.00	13.37
Test Data for High Channel										
4 960.00	50.85	Peak	H	33.40	11.28	45.89	-	49.64	74.00	24.36
4 960.00	40.56	Average	H	33.40	11.28	45.89	1.13	40.48	54.00	13.52
4 960.00	51.08	Peak	V	33.40	11.28	45.89	-	49.87	74.00	24.13
4 960.00	41.33	Average	V	33.40	11.28	45.89	1.13	41.25	54.00	12.75

Remark: "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dBμV/m) - Total Level (dBμV/m)

Total Level = Reading + Antenna Factor + Cable Loss - Amp Gain + Duty Factor

12.6.4.3 Test data for 3 Mbps

- . Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m
- . Duty Cycle : 77.01 %
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Duty Factor (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel										
4 804.00	51.37	Peak	H	33.40	11.19	45.73	-	50.23	74.00	23.77
4 804.00	40.89	Average	H	33.40	11.19	45.73	1.13	40.88	54.00	13.12
4 804.00	51.03	Peak	V	33.40	11.19	45.73	-	49.89	74.00	24.11
4 804.00	40.86	Average	V	33.40	11.19	45.73	1.13	40.85	54.00	13.15
Test Data for Middle Channel										
4 882.00	50.51	Peak	H	33.50	11.21	45.80	-	49.42	74.00	24.58
4 882.00	41.04	Average	H	33.50	11.21	45.80	1.13	41.08	54.00	12.92
4 882.00	50.80	Peak	V	33.50	11.21	45.80	-	49.71	74.00	24.29
4 882.00	40.89	Average	V	33.50	11.21	45.80	1.13	40.93	54.00	13.07
Test Data for High Channel										
4 960.00	51.35	Peak	H	33.40	11.28	45.89	-	50.14	74.00	23.86
4 960.00	41.04	Average	H	33.40	11.28	45.89	1.13	40.96	54.00	13.04
4 960.00	50.27	Peak	V	33.40	11.28	45.89	-	49.06	74.00	24.94
4 960.00	40.64	Average	V	33.40	11.28	45.89	1.13	40.56	54.00	13.44

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amp Gain} + \text{Duty Factor}$$

13. RADIATED EMISSION TEST

13.1 Operating environment

Temperature : 22 °C
Relative humidity : 46 % R.H.

13.2 Test set-up

The radiated emissions measurements were on the 3 m semi anechoic chamber. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.

The frequency spectrum from 30 MHz to 26.5 GHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.


13.3 Test Date

September 10, 2021 ~ September 15, 2021

13.4 Test data for Left Earbud

13.4.1 Test data for 30 MHz ~ 1000 MHz

- Resolution bandwidth : 120 kHz
- Frequency range : 30 MHz ~ 1 000 MHz
- Measurement distance : 3 m

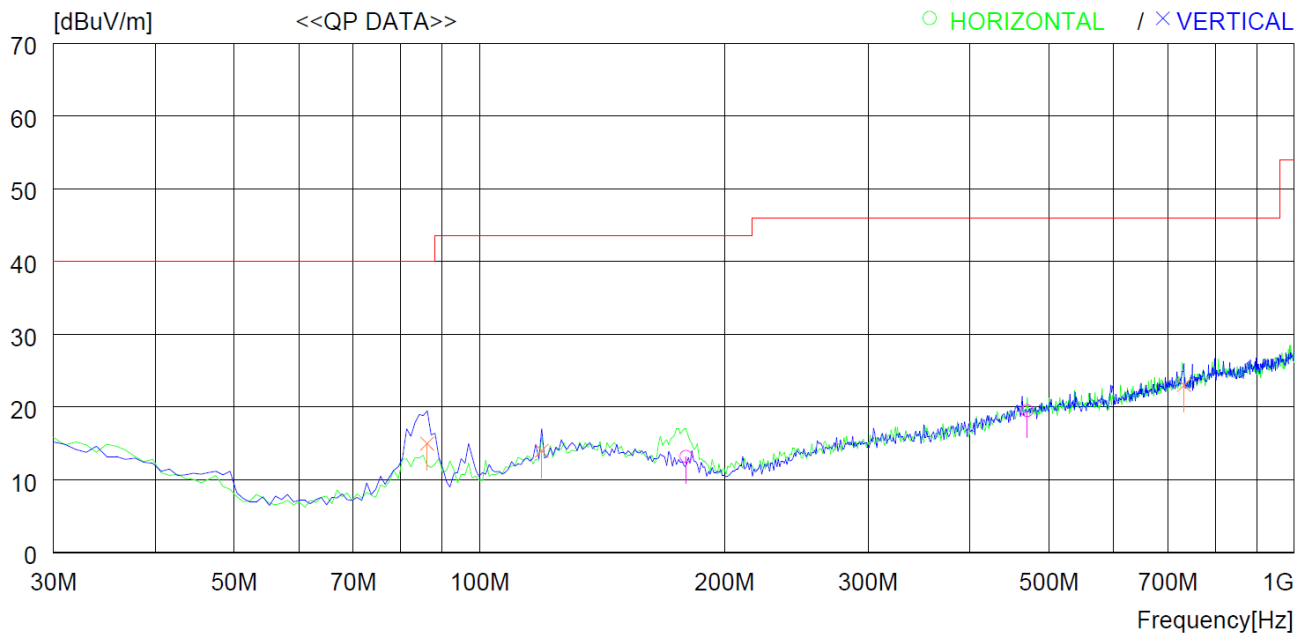

No.	FREQ	READING	ANT	LOSS	GAIN	RESULT	LIMIT	MARGIN	ANTENNA	TABLE
	[MHz]	[dBuV]	FACTOR	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]	[DEG]
----- Horizontal -----										
1	179.380	27.1	16.6	2.5	33.0	13.2	43.5	30.3	200	248
2	470.381	25.3	23.0	4.3	33.1	19.5	46.0	26.5	400	97
----- Vertical -----										
3	86.260	33.2	13.1	1.8	33.1	15.0	40.0	25.0	200	359
4	119.240	26.5	18.4	2.1	33.0	14.0	43.5	29.5	100	39
5	732.274	24.9	26.1	5.3	33.3	23.0	46.0	23.0	100	239

13.4.2 Test data for Below 30 MHz

- . Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- . Frequency range : 9 kHz ~ 30 MHz
- . Measurement distance : 3 m

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
Emission from the EUT more than 20 dB below the limit in each frequency range.								

13.4.3 Test data for above 1 GHz


- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
Emission from the EUT more than 20 dB below the limit in each frequency range.								

13.5 Test data for Right Earbud

13.5.1 Test data for 30 MHz ~ 1000 MHz

- Resolution bandwidth : 120 kHz
- Frequency range : 30 MHz ~ 1 000 MHz
- Measurement distance : 3 m

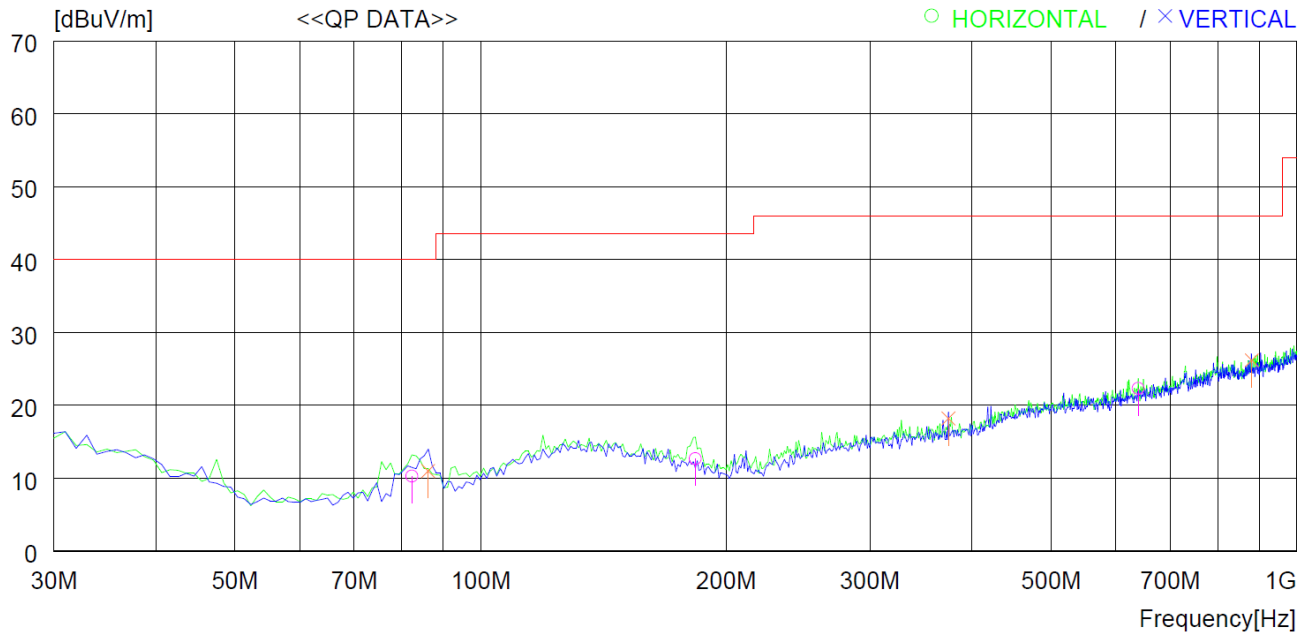

No.	FREQ	READING	ANT	LOSS	GAIN	RESULT	LIMIT	MARGIN	ANTENNA	TABLE
	[MHz]	QP [dBuV]	FACTOR [dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]	[DEG]
----- Horizontal -----										
1	82.380	28.8	12.9	1.7	33.1	10.3	40.0	29.7	300	281
2	183.260	26.9	16.3	2.5	33.0	12.7	43.5	30.8	300	297
3	639.157	25.8	24.8	5.0	33.3	22.3	46.0	23.7	300	49
----- Vertical -----										
4	86.260	29.2	13.1	1.8	33.1	11.0	40.0	29.0	300	147
5	374.350	27.1	20.4	3.7	33.0	18.2	46.0	27.8	400	359
6	880.679	25.7	27.4	5.8	32.7	26.2	46.0	19.8	400	192

13.5.2 Test data for Below 30 MHz

- . Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- . Frequency range : 9 kHz ~ 30 MHz
- . Measurement distance : 3 m

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
Emission from the EUT more than 20 dB below the limit in each frequency range.								

13.5.3 Test data for above 1 GHz

- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
Emission from the EUT more than 20 dB below the limit in each frequency range.								

14. LIST OF TEST EQUIPMENT

Model Number	Manufacturer	Description	Serial Number	Last Cal.(Interval)
FSV40-N	Rohde & Schwarz	Signal Analyzer	101457	Apr. 16, 2021 (1Y)
ESW 44	Rohde & Schwarz	EMI Test Receiver	101851	Mar. 23, 2021 (1Y)
310N	Sonoma Instrument	Pre-Amplifier	392756	Oct. 16, 2020 (1Y)
PAM-840A	Com-Power	Pre-Amplifier	461339	Oct. 16, 2020 (1Y)
SCU18	Rohde & Schwarz	Pre-Amplifier	102266	Jul. 14, 2021 (1Y)
DT2000-2t	Innco Systems GmbH	Turn Table	N/A	N/A
CO3000	Innco Systems GmbH	Controller	1026/40960617/P	N/A
MA-4640-XPET	Innco Systems GmbH	Antenna Master	MA4640/652/ 43100318/P	N/A
HLP-2008	TDK RF Solutions	Hybrid Antenna	131316	Feb. 27, 2020 (2Y)
BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170178	Jan. 07, 2021 (1Y)
AH-118	Com-Power	Horn Antenna	10050061	Oct. 15, 2020 (1Y)
FMZB 1513	Schwarzbeck	Loop Antenna	1513-235	Mar. 24, 2020 (2Y)
HPF 3GHz	Rohde & Schwarz	High Pass Filter (1-3 GHz)	N/A	Feb. 08, 2021 (1Y)
TC-3000C	TESCOM	BLUETOOTH TESTER	3000C000634	Feb. 09, 2021 (1Y)