

FCC MEASUREMENT AND TEST REPORT

For

ZTE Corporation

ZTE Plaza, Hi-tech Park, Nanshan District, Shenzhen,
Guangdong, China 518057

FCC ID: Q78- R8881S8500
JAN, 29,2015

This Report Concerns: ☒ Original Report		Equipment Type: Macro Radio Remote Unit
Test Engineer:	Bloom	<i>Bloom</i>
Report No.:	RF20150052RP	
Test Date:	JAN 4 – JAN 27, 2015	
Reviewed By:	Xie Yuming	<i>Xie Yuming</i>
Prepared By:	ZTETS Corporation	
ZTE Plaza, Hi-tech Park, Nanshan District, Shenzhen, Guangdong, China 518057, P.R.China Tel: +86-755-26770000 Fax: +86-755-26771999		

Note: The test report is specially limited to the above company and this particular sample only. It may not be duplicated without prior written consent of ZTE Corporation. This report must not be used by the client to claim product certification ,approval ,or endorsement by any agency of the US Government.

TABLE OF CONTENTS

TABLE OF CONTENTS	2
1 GENERAL INFORMATION.....	6
Product Description for Equipment Under Test (EUT).....	6
Objective	6
Related Submittal(s)/Grant(s).....	7
Test Methodology	7
Test Facility.....	7
2 SYSTEM TEST CONFIGURATION.....	8
Description of Test Configuration	8
3 UMTS MODE TEST RESULTS.....	9
3.1 TRANSMITTER OUTPUT POWER	10
Applicable Standard: FCC §2.1046 §22.913	10
Test Equipment List and Details.....	10
Test Procedure.....	10
Environmental Conditions	10
Test Result: Pass.....	11
Test Mode: Transmitting UMTS.....	11
Test Data:.....	11
3.2 RF EXPOSURE	19
Applicable standard: FCC §2.1091 §1.1310	19
Limit.....	19
Test Data.....	19
Test Result: pass.....	19
3.3 MODULATION CHARACTERISTIC.....	20
Applicable Standard: FCC §2.1047	20
Test Equipment List and Details.....	20
Test Procedure.....	20
Test Data Environmental Conditions	20
Test Result: Pass.....	20
Test Mode: Transmitting UMTS.....	20
Test Data:.....	21
3.4 SPURIOUS RADIATED EMISSIONS.....	23
Applicable Standard: FCC CFR 47, §2.1053	23
Test Equipment List and Details.....	23
Test Procedure.....	24
Test Results Summary: PASS	25
Environmental Conditions	25
Test data	25
3.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....	27
Applicable Standard: FCC§2.1051, §22.917	27
Test Equipment List and Details.....	27
Test Procedure.....	27
Test Data Environmental Conditions	28
Test Result: Pass.....	28
Test Mode: Transmitting UMTS.....	28
Test Data:.....	28
3.6 OCCUPIED BANDWIDTH.....	65
Applicable Standard: FCC §2.1049 §22.917	65

Test Equipment List and Details:	65
Test Procedure	65
Environmental Conditions	65
Test Result: Pass	66
Test Mode: Transmitting UMTS	66
Test Data	66
3.7 BAND EDGES	68
Applicable Standard: FCC §2.1051	68
Test Equipment List and Details	68
Test Procedure	68
Test Data Environmental Conditions	68
Test Result: Pass	69
Test Mode: Transmitting UMTS	69
Test Data	69
3.8 FREQUENCY STABILITY	75
Applicable Standard: FCC § 2.1055, § 22.355	75
Test Equipment List and Details	75
Test Procedure	75
Environmental Conditions	75
Test Result: Pass	76
Test Mode: Transmitting UMTS	76
Test Data	76
Frequency Stability Versus Temperature	76
Frequency Stability Versus Voltage	77
4 GSM MODE TEST RESULTS	79
4.1 TRANSMITTER OUTPUT POWER	80
Applicable Standard: FCC §2.1046 §22.913	80
Test Equipment List and Details	80
Test Procedure	80
Environmental Conditions	80
Test Result: Pass	81
Test Mode: Transmitting GSM	81
Test Data:	81
4.2 RF EXPOSURE	106
Applicable standard: FCC §2.1091 §1.1310	106
Limit	106
Test Data	106
Test Result: pass	106
4.3 MODULATION CHARACTERISTIC	107
Applicable Standard: FCC §2.1047	107
Test Equipment List and Details	107
Test Procedure	107
Test Data Environmental Conditions	107
Test Result: Pass	108
Test Mode: Transmitting GSM	108
Test Data:	108
4.4 SPURIOUS RADIATED EMISSIONS	112
Applicable Standard: FCC CFR 47, §2.1053	112
Test Equipment List and Details	112
Test Procedure	113
Test Results Summary: PASS	114
Environmental Conditions	114
Test data	114

4.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....	116
Applicable Standard: FCC§2.1051, §22.917	116
Test Equipment List and Details	116
Test Procedure.....	116
Test Data Environmental Conditions	117
Test Result: Pass.....	117
Test Mode: Transmitting GSM	117
Test Data:.....	117
4.6 OCCUPIED BANDWIDTH.....	136
Applicable Standard: FCC §2.1049 §22.917	136
Test Equipment List and Details:.....	136
Test Procedure.....	136
Environmental Conditions	136
Test Result: Pass.....	137
Test Mode: Transmitting GSM	137
Test Data.....	137
4.7 BAND EDGES.....	141
Applicable Standard: FCC §2.1051	141
Test Equipment List and Details.....	141
Test Procedure.....	141
Test Data Environmental Conditions	141
Test Result: Pass.....	142
Test Mode: Transmitting GSM	142
Test Data.....	142
4.8 FREQUENCY STABILITY	151
Applicable Standard: FCC § 2.1055, § 22.355.....	151
Test Equipment List and Details.....	151
Test Procedure.....	151
Environmental Conditions	151
Test Result: Pass.....	152
Test Mode: Transmitting GSM	152
Test Data.....	152
Frequency Stability Versus Temperature.....	152
Frequency Stability Versus Voltage.....	153
5 DUAL-MODE OF TEST RESULTS.....	155
5.1 TRANSMITTER OUTPUT POWER	156
Applicable Standard: FCC §2.1046 §22.913	156
Test Equipment List and Details.....	156
Test Procedure.....	156
Environmental Conditions	156
Test Result: Pass.....	157
Test Mode: Transmitting 2GSMTRX and 2UMTS carriers / 4GSMTRX and 1UMTS carriers.....	157
Test Data:.....	157
5.2 RF EXPOSURE	159
Applicable standard: FCC §2.1091 §1.1310	159
Limit.....	159
Test Data.....	159
Test Result: pass.....	159
5.3 SPURIOUS RADIATED EMISSIONS.....	160
Applicable Standard: FCC CFR 47, §2.1053	160
Test Equipment List and Details.....	160
Test Procedure.....	161
Test Results Summary: PASS	162

Environmental Conditions	162
Test data	162
5.4 SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....	164
Applicable Standard: FCC§2.1051, §22.917	164
Test Equipment List and Details.....	164
Test Procedure.....	164
Test Data Environmental Conditions	165
Test Result: Pass.....	165
Test Mode: Transmitting 2GSMTRX and 2UMTS carriers / 4GSMTRX and 1UMTS carriers.....	165
Test Data:.....	165
5.5 OCCUPIED BANDWIDTH.....	172
Applicable Standard: FCC §2.1049 §22.917	172
Test Equipment List and Details:.....	172
Test Procedure.....	172
Environmental Conditions	172
Test Result: Pass.....	173
Test Mode: Transmitting 2GSMTRX and 2UMTS carriers / 4GSMTRX and 1UMTS carriers.....	173
Test Data.....	173
5.6 BAND EDGES.....	175
Applicable Standard: FCC §2.1051	175
Test Equipment List and Details.....	175
Test Procedure.....	175
Test Data Environmental Conditions	175
Test Result: Pass.....	176
Test Mode: Transmitting 2GSMTRX and 2UMTS carriers / 4GSMTRX and 1UMTS carriers.....	176
Test Data.....	176

1 GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

The ZXSDR R8881 is a remote RF unit. It supports GSM, UMTS communications systems and features compact structure, large capacity, and easy installation.

Technical specification:

Size: 370 mm × 320 mm × 170 mm (H x W x D)

Input voltage: -48VDC


Frequency range: 869MHz to 894MHz

Max RF output power: 49dBm, except GSM (8PSK modulation) :47dBm

Gain of the antenna: 18dBi,

Modulation type of emission: UMTS is QPSK,16QAM,64QAM; GSM is GMSK ,8PSK.

Appearance of EUT:

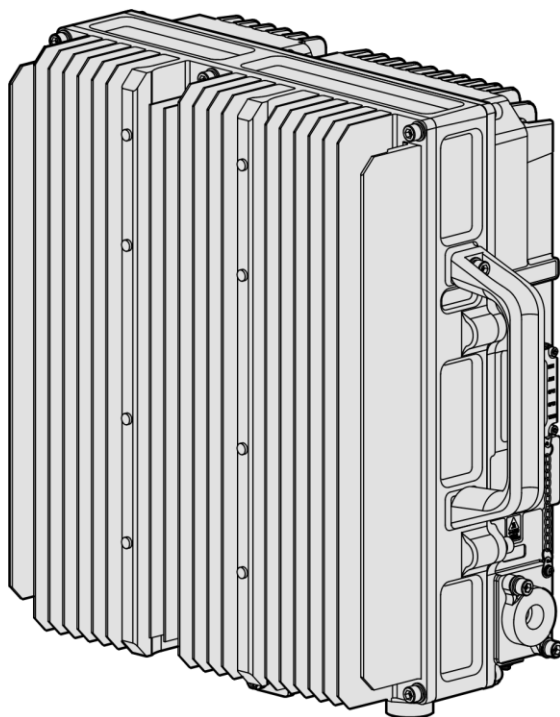

Objective

This Type approval report is prepared on behalf of ZTE Corporation in accordance with Part 1、Part 2、Part 15、Part 22 of the Federal Communication Commissions rules.

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of federal Regulations Title 47 Part 2. as well as the following parts:

Part 24 Wireless Communication Services

Applicable Standards: TIA EIA 137-A, TIA EIA 97-D, TIA/EIA 603-C, Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

All radiated and conducted measurement was performed at ZTE Corporation Reliability Testing Center. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Shenzhen ZTE Technology Service Co., Ltd to collect test data is located in the ZTE Plaza, Hi-tech Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China, Tel: +86-755-26770000, Fax: +86-755-26771999. Test site at ZTETS Corporation has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 04, 2004. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 0007895832. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

2 SYSTEM TEST CONFIGURATION

Description of Test Configuration


Justification

The EUT was configured for testing according to TIA/EIA-603C.

The final qualification test was performed with EUT operating at normal mode.

Equipment Modifications

ZTE Corporation has not done any modification on the EUT.

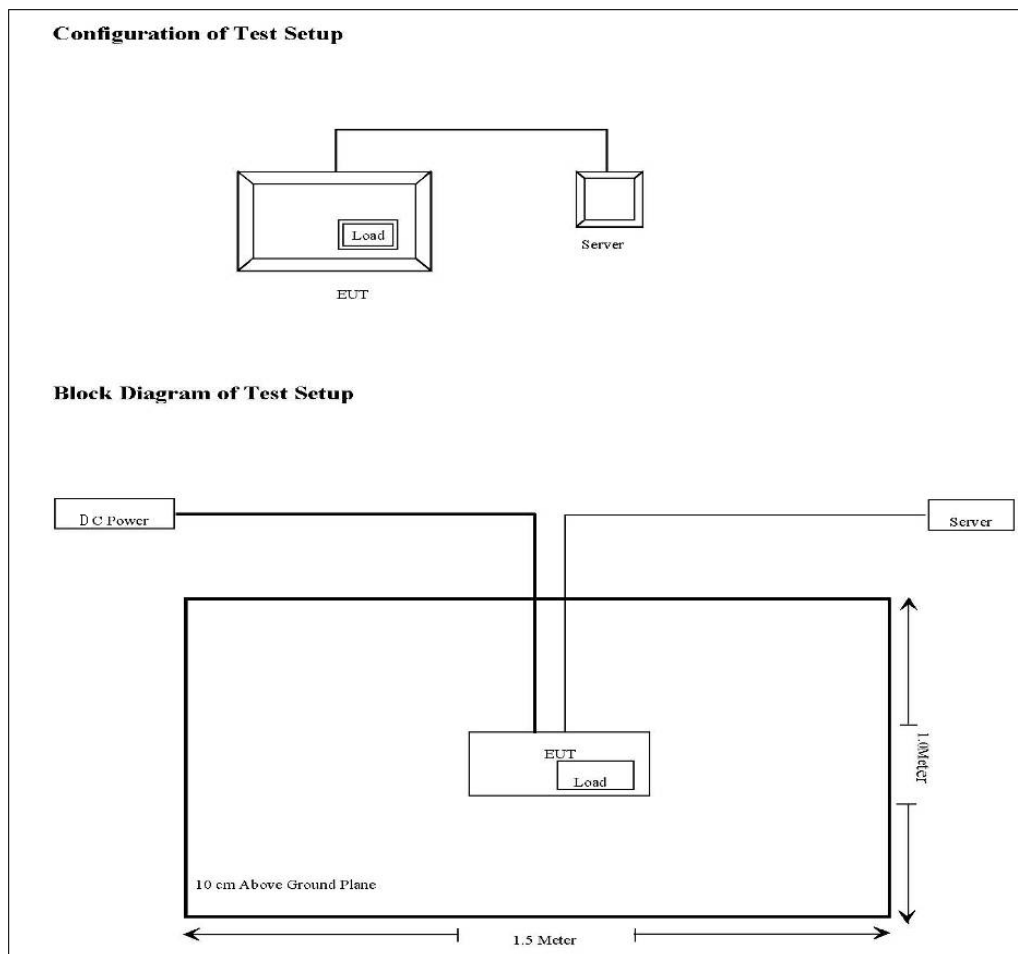

3 UMTS MODE TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§2.1046 ,§22.913	Transmitter output Power	Compliant
§2.1091 ,§1.1310	RF Exposure	Compliant
§2.1047	Modulation Characteristic	Compliant
§2.1053, §22.917	Spurious Radiated Emissions	Compliant
§2.1051, §22.917	Spurious Emissions AT Antenna Terminals	Compliant
§2.1049 §22.917	Occupied Bandwidth	Compliant
§2.1051, §22.917	Band Edge	Compliant
§ 2.1055, §22.355	Frequency stability	Compliant

3.1 TRANSMITTER OUTPUT POWER

Applicable Standard: FCC §2.1046 §22.913


According to FCC §2.1046 & §22.913, the ERP (equivalent radiated power) must not exceed 500 Watts.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9020A	MY51160170	2014-6-16	2015-6-16
Atten	40dB Attenuator	ATSI150-4-40	11300100204204	2014-4-8	2015-4-8
Forstar	Forstar RF Cable	002	1034	2014-4-8	2015-4-8

***statement of traceability:** ZTE Corporation Reliability Testing Center attests that all calibration has been performed per the NVLAP requirements, traceable to NIST.

Test Procedure

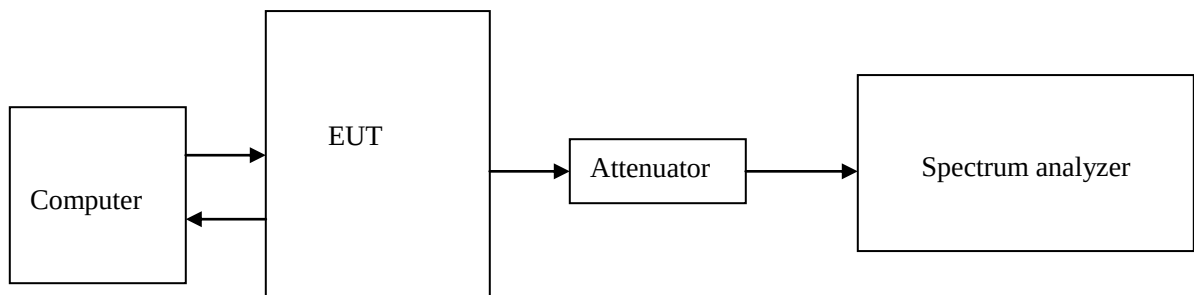

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation. External attenuation Loss is 50dB, Cable Loss is about 3dB

Environmental Conditions

Temperature:	20 °C
Relative Humidity:	53 %
ATM Pressure:	1009 mbar


Test Result: Pass


Test Mode: Transmitting UMTS


Test Data:


Four carriers

Center Freq. (MHz)	Frequency (MHz)	Max output Power (dBm)
878.9	871.4/ 876.4/ 881.4/ 886.4	49.48
881.5	874/879/884/889	49.63
884.1	876.6/881.6/886.6/891.6	49.39

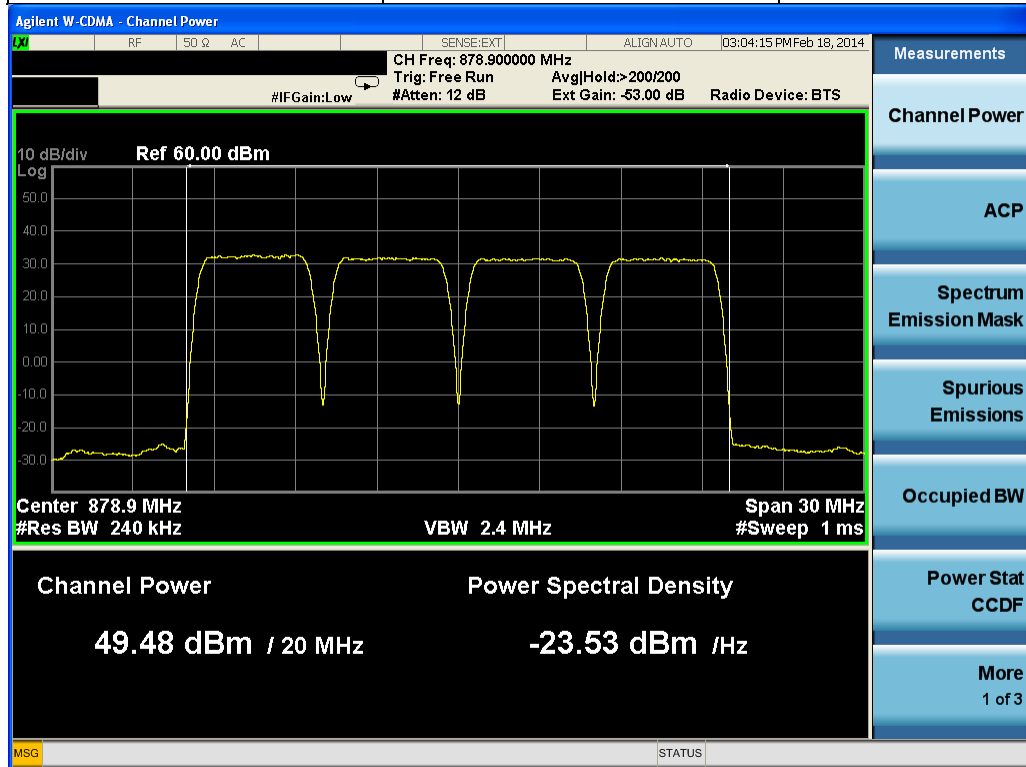

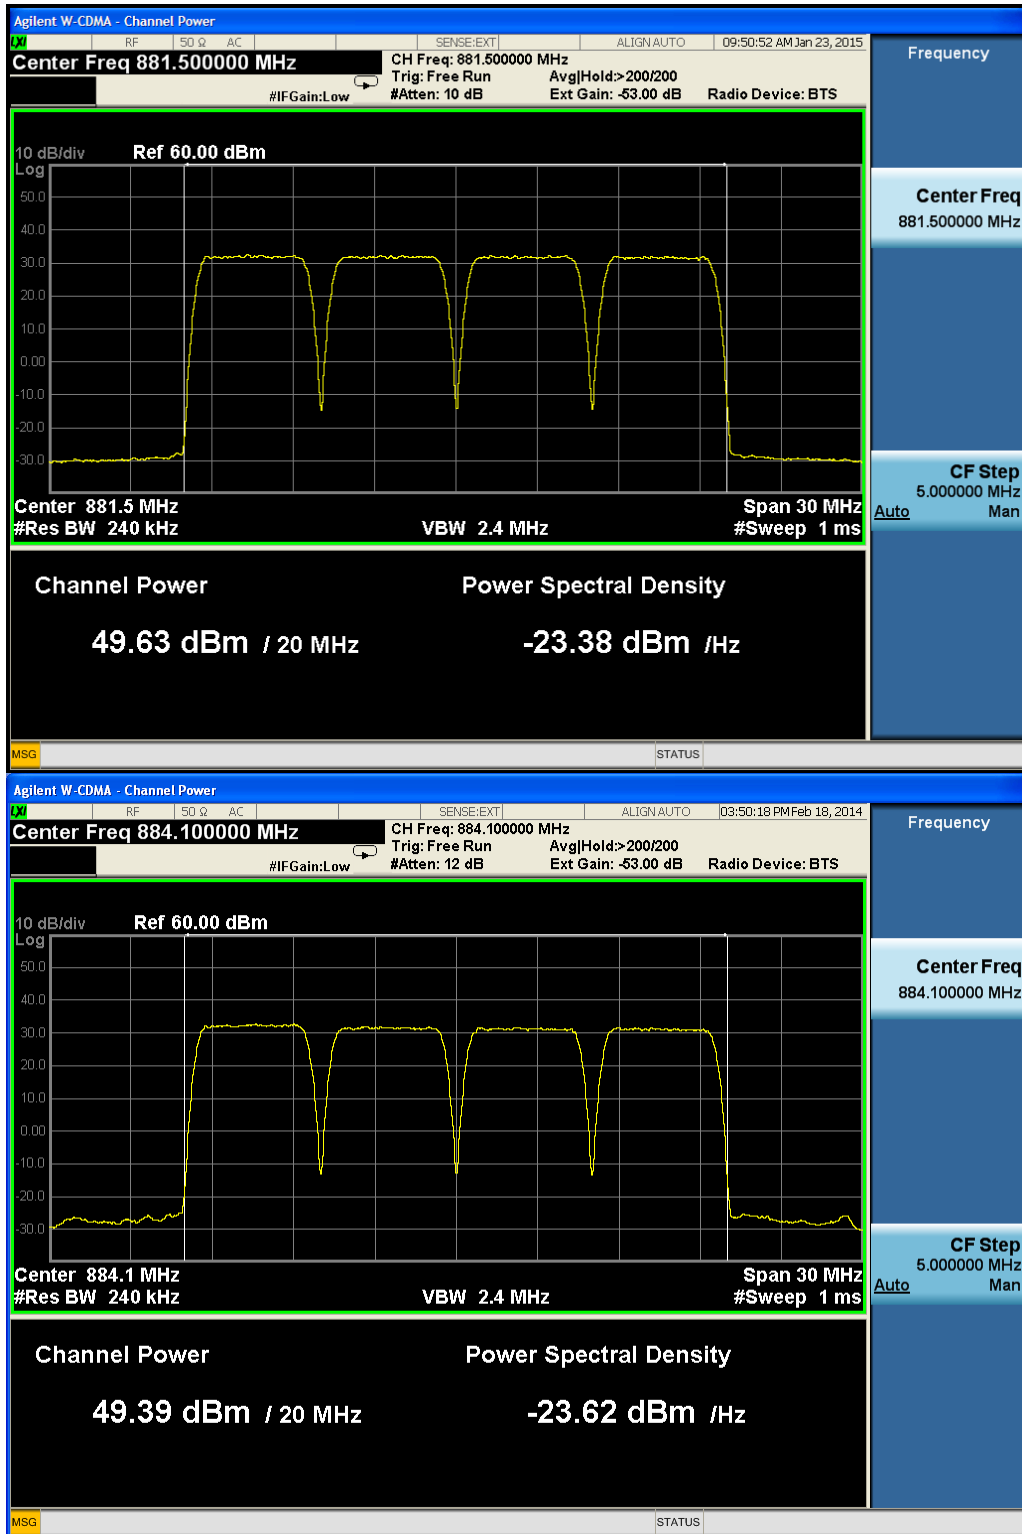


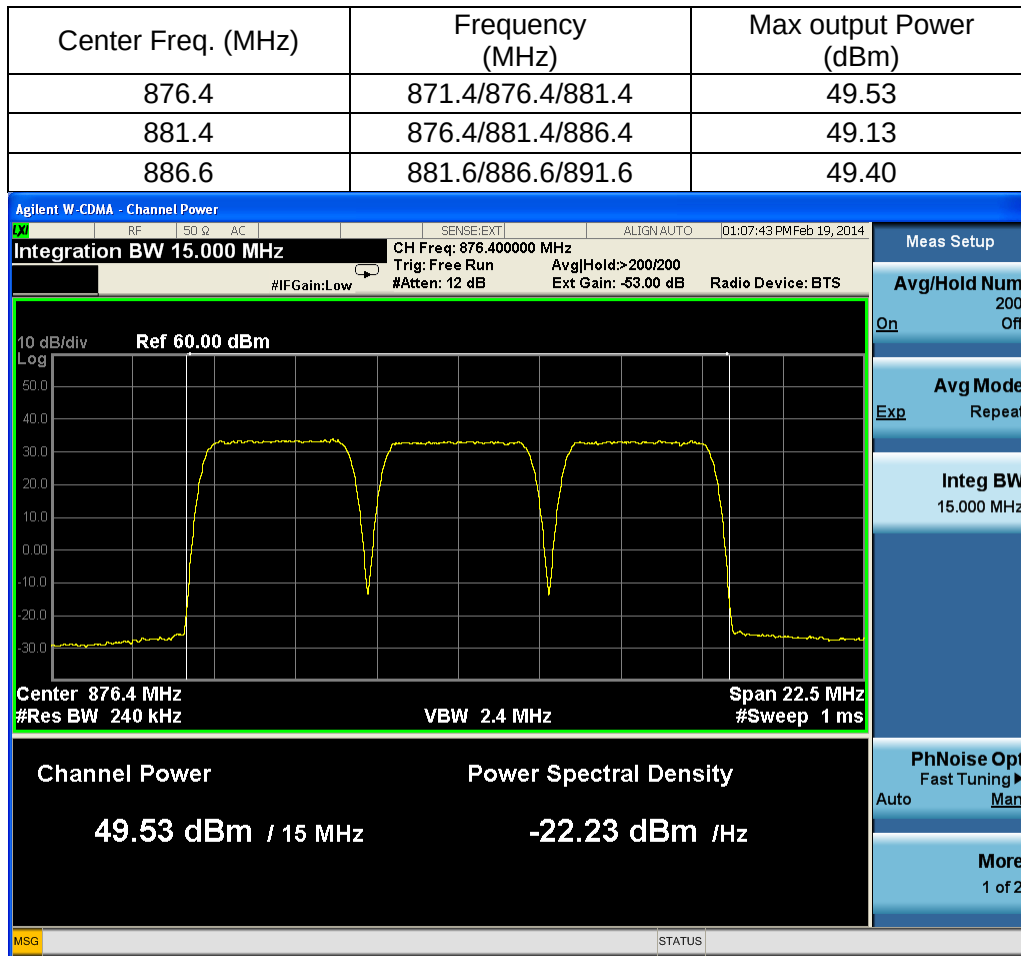
Three carriers

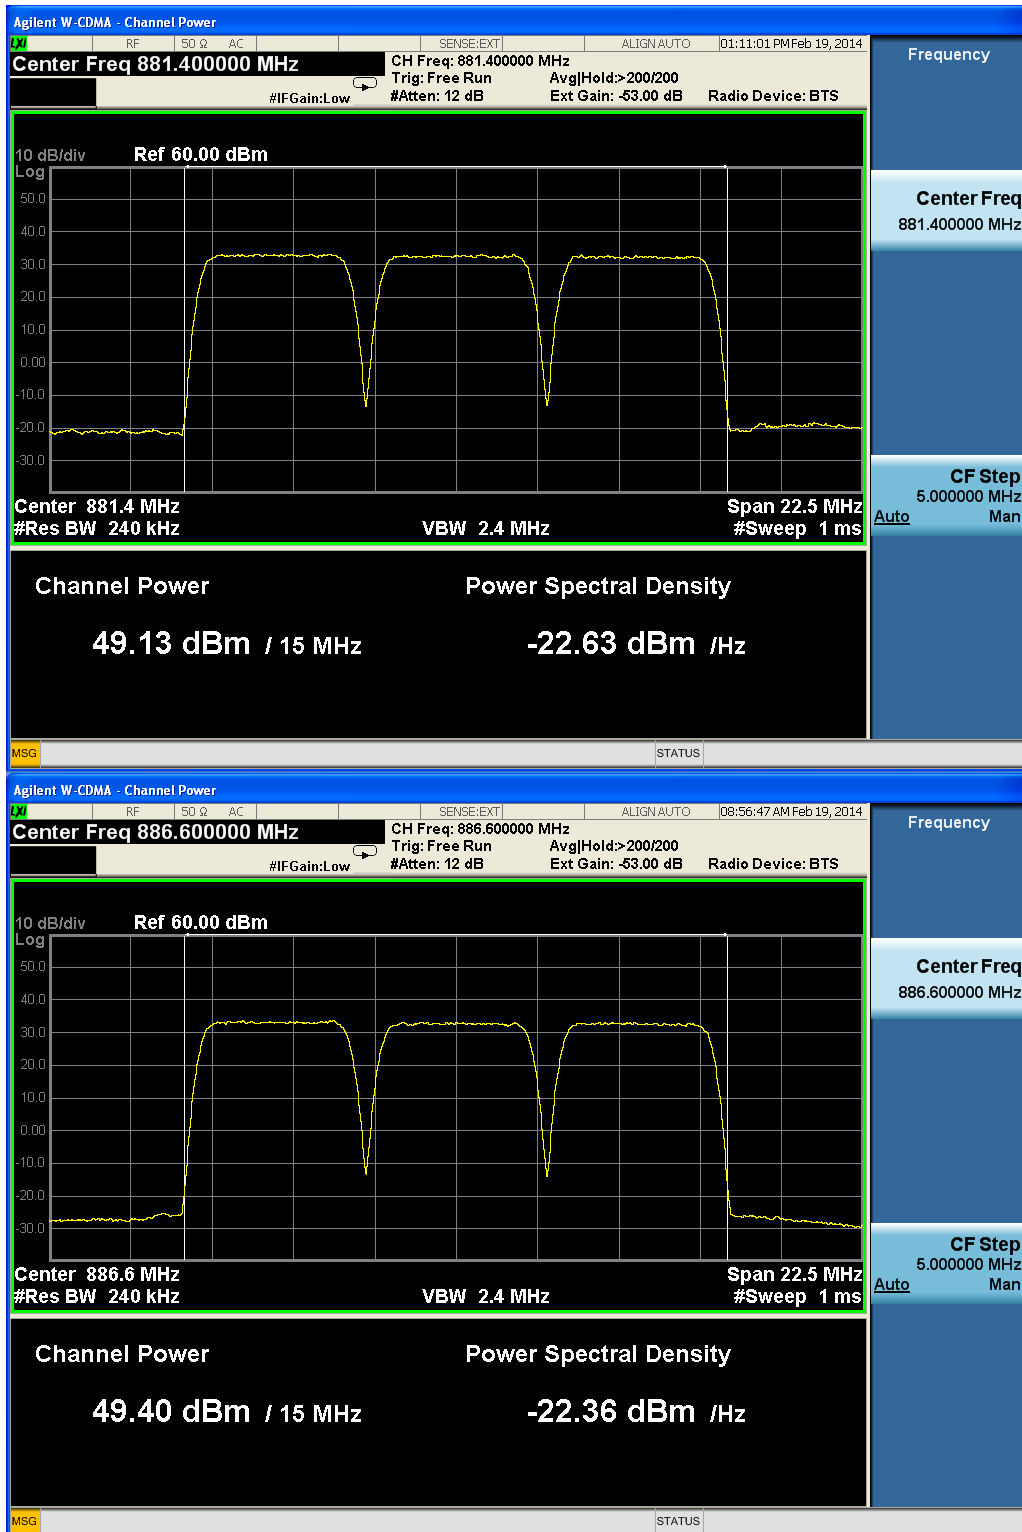

Two carriers


Center Freq. (MHz)	Frequency (MHz)	Max output Power (dBm)
873.9	871.4/876.4	49.43
881.5	879/884	49.67
889.1	886.6/891.6	49.44

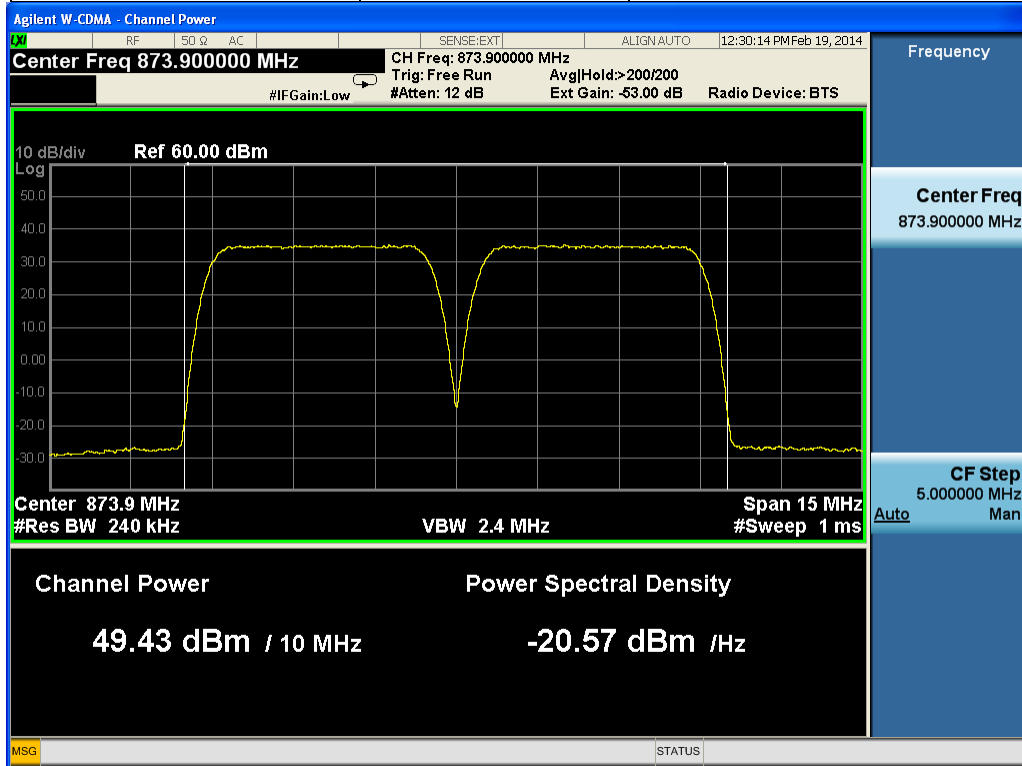

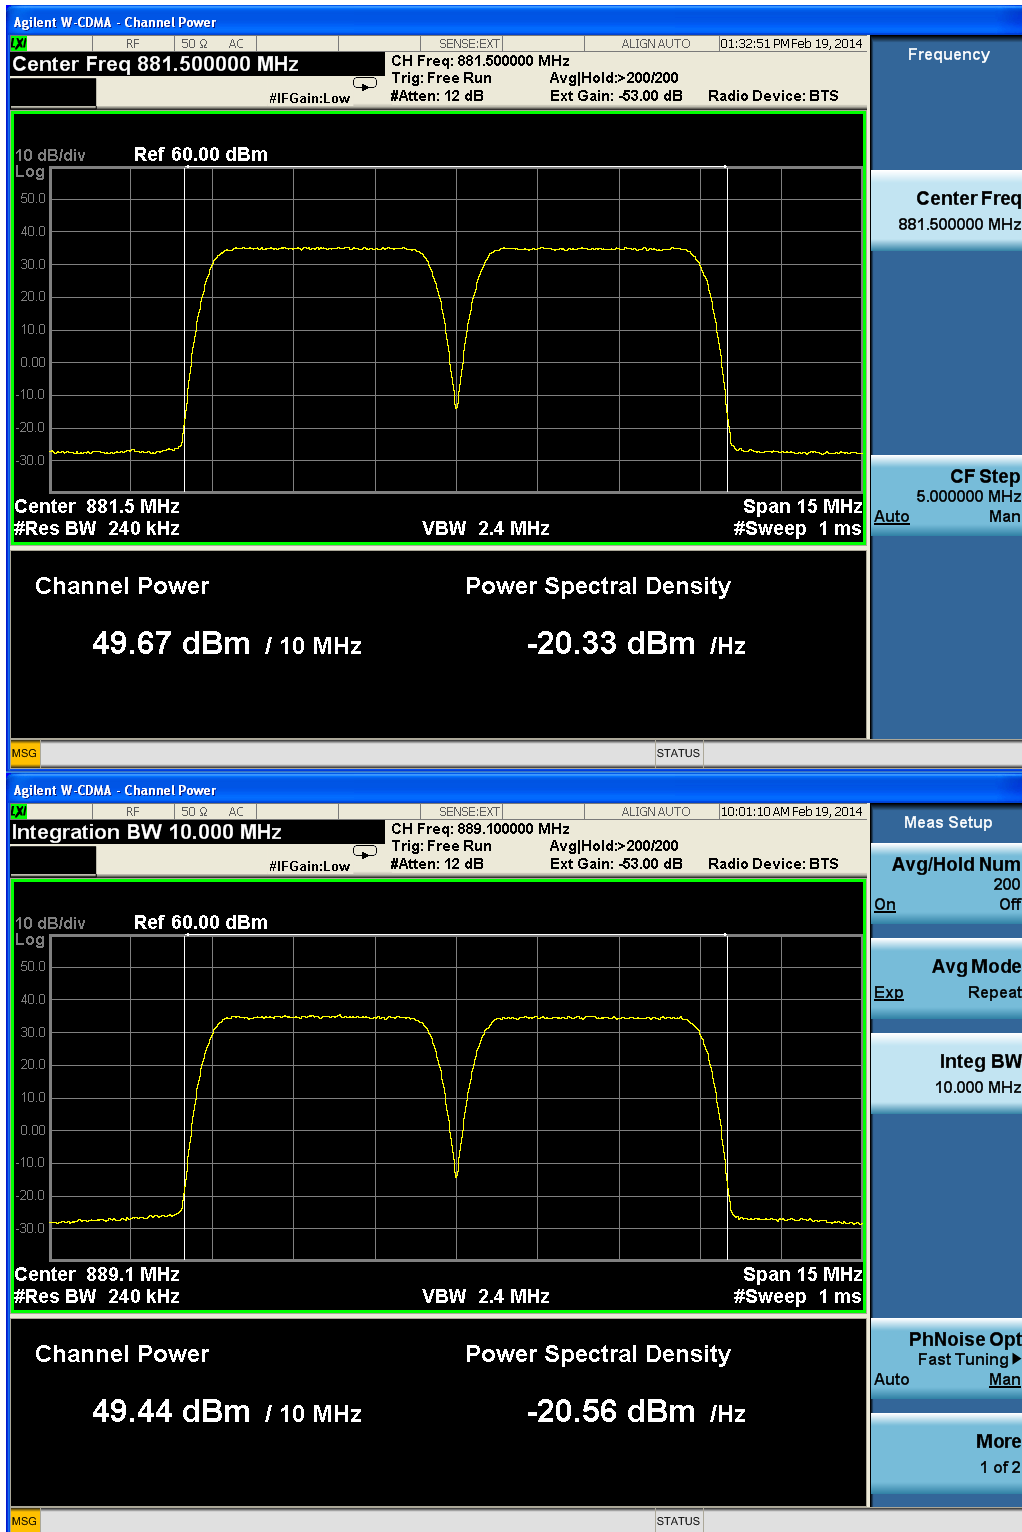

One carrier

Center Freq. (MHz)	Frequency (MHz)	Max output Power (dBm)
871.4	871.4	49.21
881.4	881.4	49.65
891.6	891.6	49.10

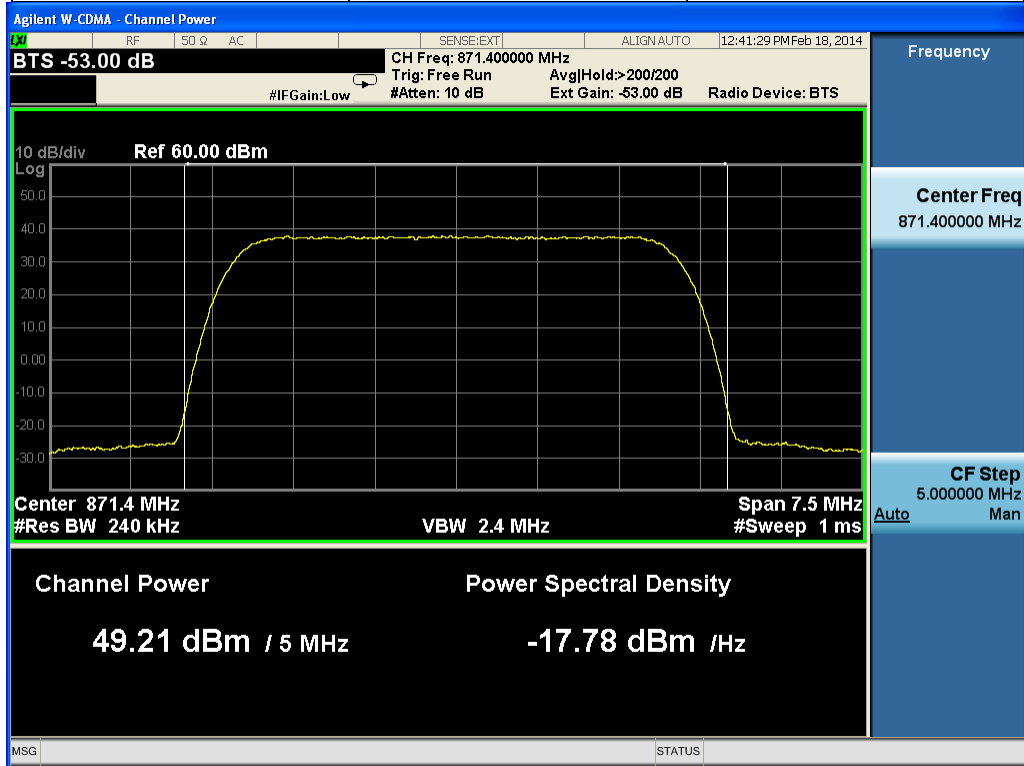



3.2 RF EXPOSURE

Applicable standard: FCC §2.1091 §1.1310

Limit

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

According to §1.1310 and §2.1091 RF exposure is calculated. Limits for Maximum Permissible Exposure (MPE)

(B) Limits for General Population/Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f ²)*	30
30-300	27.5	0.073	0.2	30
300-1500	--	--	f/1500	30
1500-100,000	--	--	1.0	30

Test Data

Predication of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = \text{EIRP} / 4\pi R^2$$

Where: S = power density

EIRP= equivalent isotropically radiated power=ERP+2.15dB

R = distance to the center of radiation of the antenna= $[(\text{ERP}+2.15\text{dB})/4\pi S]^{1/2}$

Maximum ERP, In general, the effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts.

Frequency is between 300MHz and 1500MHz, and the Maximum,

$$S=894/1500=0.596\text{mW/cm}^2, R=3.31\text{m}.$$

This equipment should be installed and operated with minimum distance 3.31m between the radiator& your body.

Test Result: pass

3.3 MODULATION CHARACTERISTIC

Applicable Standard: FCC §2.1047

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9020A	MY51160170	2014-6-16	2015-6-16
Atten	40dB Attenuator	ATSI150-4-40	11300100204204	2014-4-8	2015-4-8
Forstar	Forstar RF Cable	002	1034	2014-4-8	2015-4-8

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements , traceable to NIST.

Test Procedure

UMTS digital mode is used by EUT.

Test Data Environmental Conditions


Temperature:	20 °C
Relative Humidity:	53 %
ATM Pressure:	1009 mbar


Test Result: Pass

Test Mode: Transmitting UMTS

Test Data:

Frequency (MHz)	EVM(%rms)
871.4	10.06
881.4	9.44
891.6	8.76

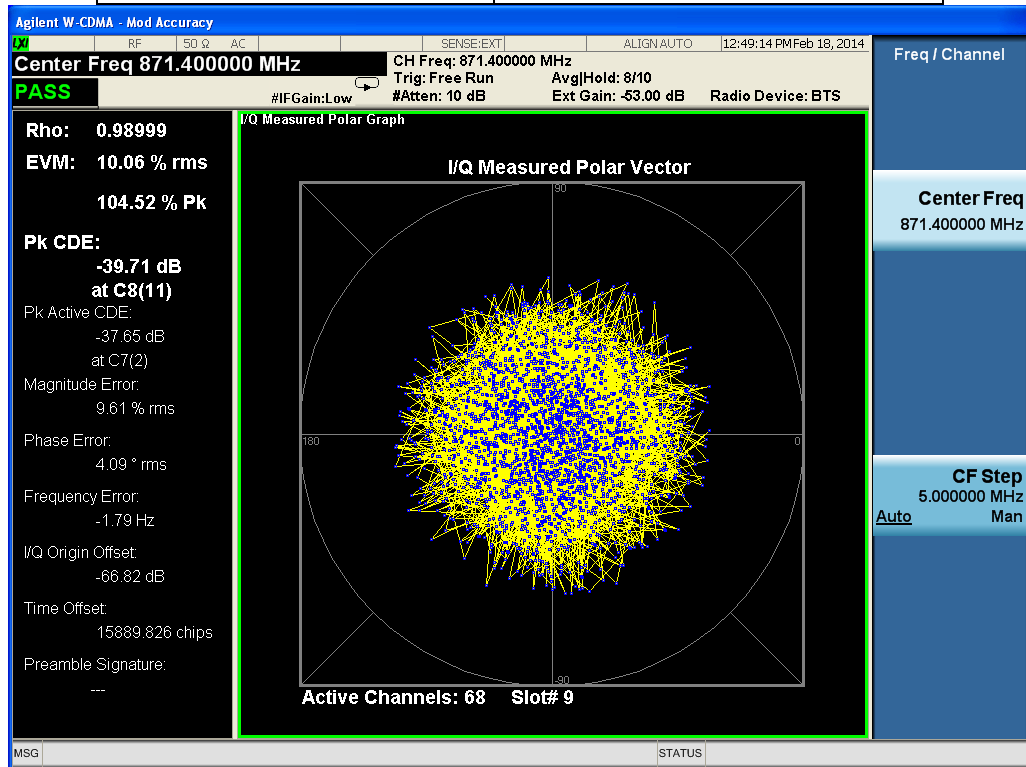

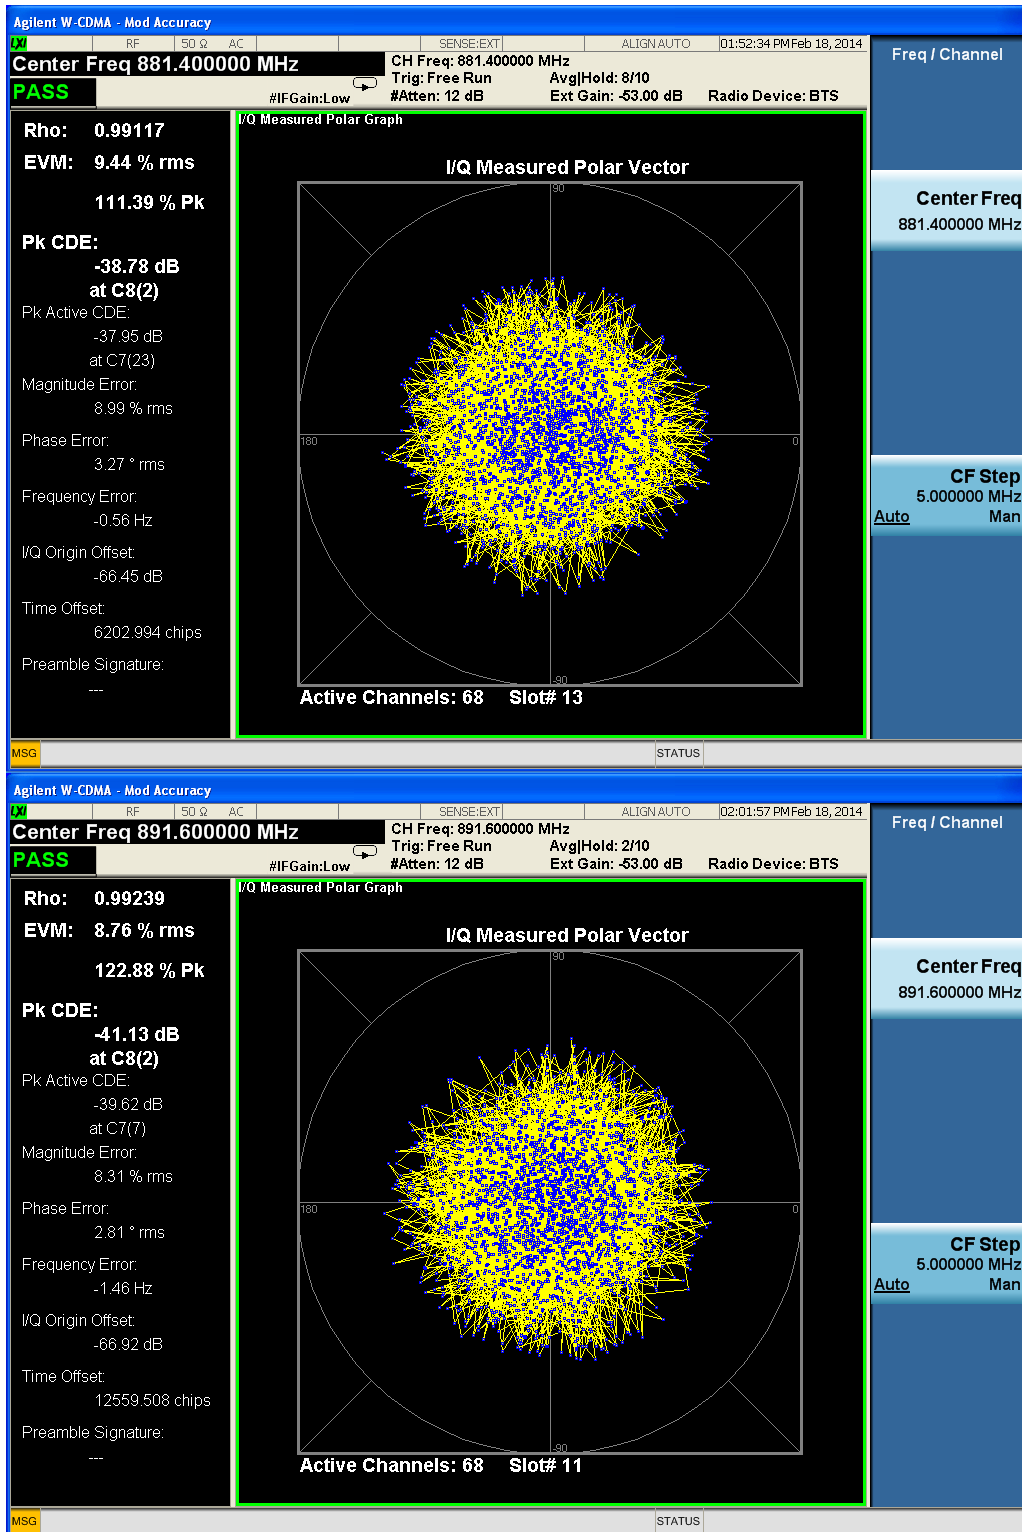

3.4 SPURIOUS RADIATED EMISSIONS

Applicable Standard: FCC CFR 47, §2.1053

Test Equipment List and Details


Manufacturer	Equipment	Model	Serial Number	Last Cal.	Cal. Interval
R&S	SIGNAL GENERATOR	SMR20	A00017351	2014-09-09	1 year
Albatross	Anechoic Chamber	3m Site	A00017354	2014-12-01	1 year
R&S	EMI Test Receiver	ESIB26	100058	2014-10-13	1 year
R&S	Ultra Breitband Antennas	HL562	100022	2014-07-29	1 year
R&S	Double-Ridged Waveguide Horn Antenna	HF906	100032	2014-07-14	1 year
R&S	Double-Ridged Waveguide Horn Antenna	HF906	100446	2014-07-14	1 year
SCHWARZ-BECK	Biconical Antenna	VUBA9117	9117-122	2014-07-14	1 year

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiated emissions measurement at the EMC lab. is 3.6dB.

EUT Setup

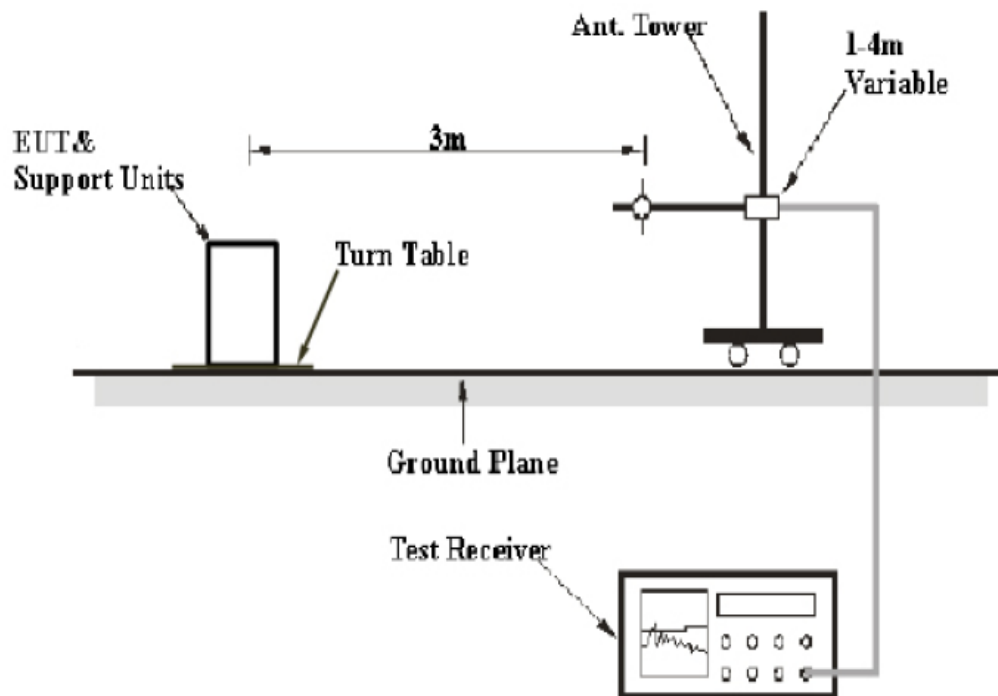

The radiated emission tests were performed in the 3-meter Chamber, using the setup accordance with the FCC part 2.1053. The specification used was the FCC 2.1053 limits.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to teeth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \lg(\text{TX pwr in Watts}/0.001)$ - the absolute level

Spurious attenuation limit in dB = $43 + 10 \lg P$ (power out in Watts)

The resolution bandwidth of the spectrum analyzer was set at 1 percent as specified for 30MHz to 1GHz scanning, set at 1MHz for 1GHz to 20GHz scanning.

Test Results Summary: PASS

Environmental Conditions

Temperature:	26°C
Relative Humidity:	60 %
ATM Pressure:	1009 mbar

Test data

Indicated		Test Antenna	Substituted		Cable Loss(dB)	Effective radiated power (dBm)	Dipole Antenna	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
Frequency (GHz)	Amp. (dB μ V)	Polar H/V	Level (dBm)	Antenna Gain Correction						
30	24.6	V	-33.1	-43.49	0.3	-76.89	2.15	-79.04	-13	66.04
125.250501	25.32	V	-60.58	-10.46	0.8	-71.84	2.15	-73.99	-13	60.99
220.501002	36.13	V	-56.67	1.42	1.2	-56.45	2.15	-58.6	-13	45.6
638.436874	29.04	V	-64.96	-1.09	2.1	-68.15	2.15	-70.3	-13	57.3
871.703407	72.29	V	-21.21	-1.32	2.5	-25.03	2.15	-27.18	-13	14.18
96.092184	25.38	H	-55.52	-16.61	0.8	-72.93	2.15	-75.08	-13	62.08
220.501002	38.83	H	-61.17	1.42	1.2	-60.95	2.15	-63.1	-13	50.1
276.873747	29.77	H	-67.73	0.79	1.3	-68.24	2.15	-70.39	-13	57.39
630.661323	29.7	H	-66.8	-1.09	2.1	-69.99	2.15	-72.14	-13	59.14
871.703407	67.85	H	-27.85	-1.32	2.5	-31.67	2.15	-33.82	-13	20.82

Radiation emission spurious below 3GHz

Indicated		Test Antenna	Substituted		Cable Loss(dB)	Effective radiated power (dBm)	Dipole Antenna	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
Frequency (GHz)	Amp. (dB μ V)	Polar H/V	Level (dBm)	Antenna Gain Correction						
3801.60321	41.82	V	-51.88	9.9	5.2	-47.18	2.15	-49.33	-13	36.33
4723.44689	42.83	V	-53.07	11.3	5.8	-47.57	2.15	-49.72	-13	36.72
5797.59519	44.05	V	-49.75	11.2	6.5	-45.05	2.15	-47.2	-13	34.2
6943.88778	46.42	V	-45.48	11.4	7.3	-41.38	2.15	-43.53	-13	30.53
9131.76353	47.64	V	-46.86	11.9	8.5	-43.46	2.15	-45.61	-13	32.61
12335.1703	49.94	V	-47.36	14.2	9.9	-43.06	2.15	-45.21	-13	32.21
3488.97796	43.31	H	-50.19	9.9	5	-45.29	2.15	-47.44	-13	34.44
4002.00401	41.53	H	-53.47	10.1	5.3	-48.67	2.15	-50.82	-13	37.82
6126.25251	44.37	H	-43.23	11.2	6.8	-38.83	2.15	-40.98	-13	27.98
6831.66333	45.86	H	-42.94	11.4	7.2	-38.74	2.15	-40.89	-13	27.89
8555.61122	46.67	H	-42.63	11.8	8.3	-39.13	2.15	-41.28	-13	28.28
11735.9719	48.37	H	-43.23	14	9.6	-38.83	2.15	-40.98	-13	27.98

Radiation emission spurious above 3GHz

3.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Applicable Standard: FCC§2.1051, §22.917

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified.


Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9020A	MY51160170	2014-6-16	2015-6-16
Atten	40dB Attenuator	ATSI150-4-40	11300100204204	2014-4-8	2015-4-8
Forstar	Forstar RF Cable	002	1034	2014-4-8	2015-4-8

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements, traceable to NIST.

Test Procedure

EUT Setup:

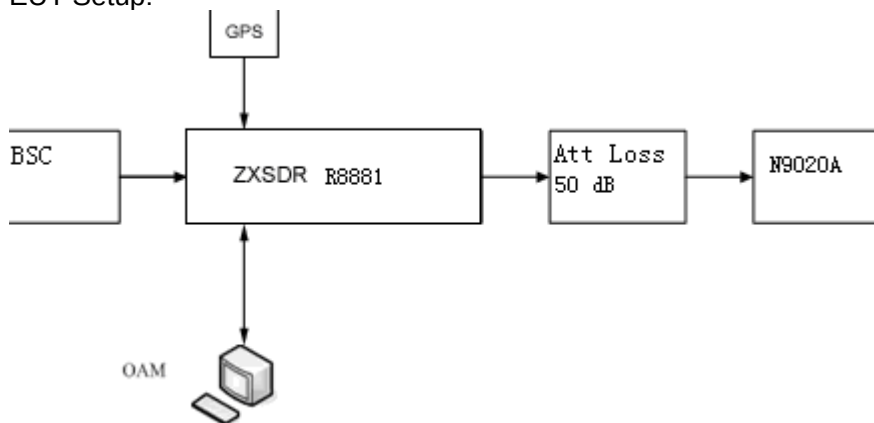

REMARKS: Attenuator loss (dB)=50dB, Cable Loss (dB)=3dB.

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100KHz for 30MHz to 1GHz band, set at 1MHz for 1GHz to 10GHz band. Sufficient scans were taken to

show any out of band emissions up to 10th harmonic.

Test Data Environmental Conditions


Temperature:	20 °C
Relative Humidity:	53 %
ATM Pressure:	1009 mbar


Test Result: Pass

Test Mode: Transmitting UMTS


Test Data:

Four carriers (working in bottom frequency)

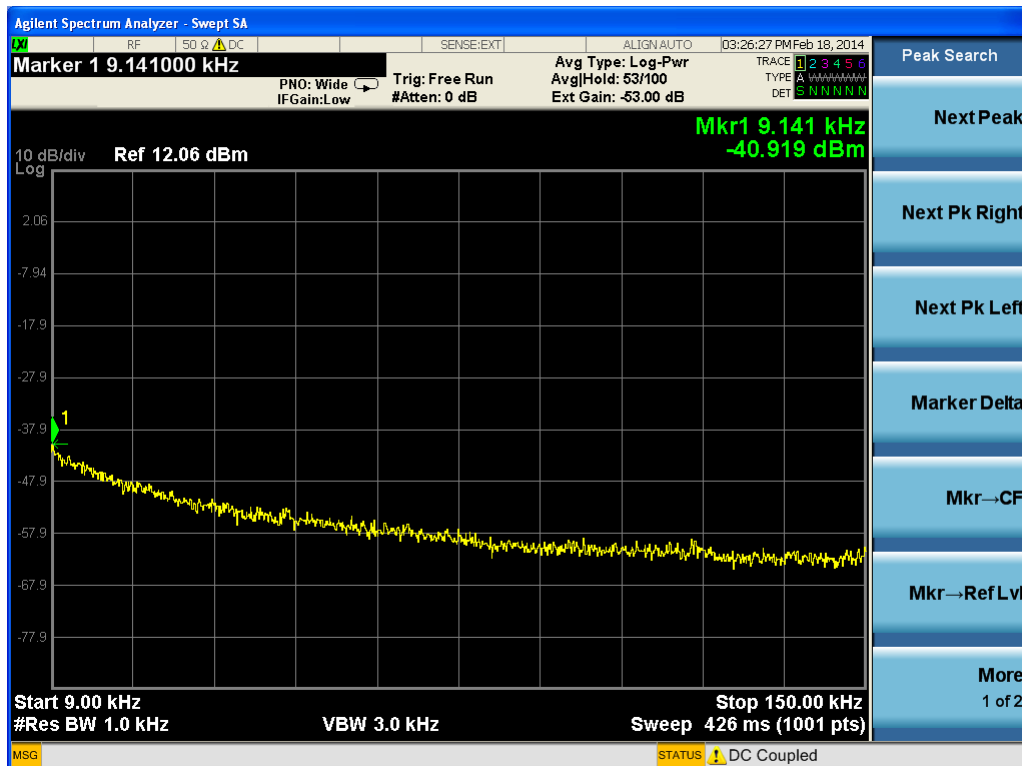

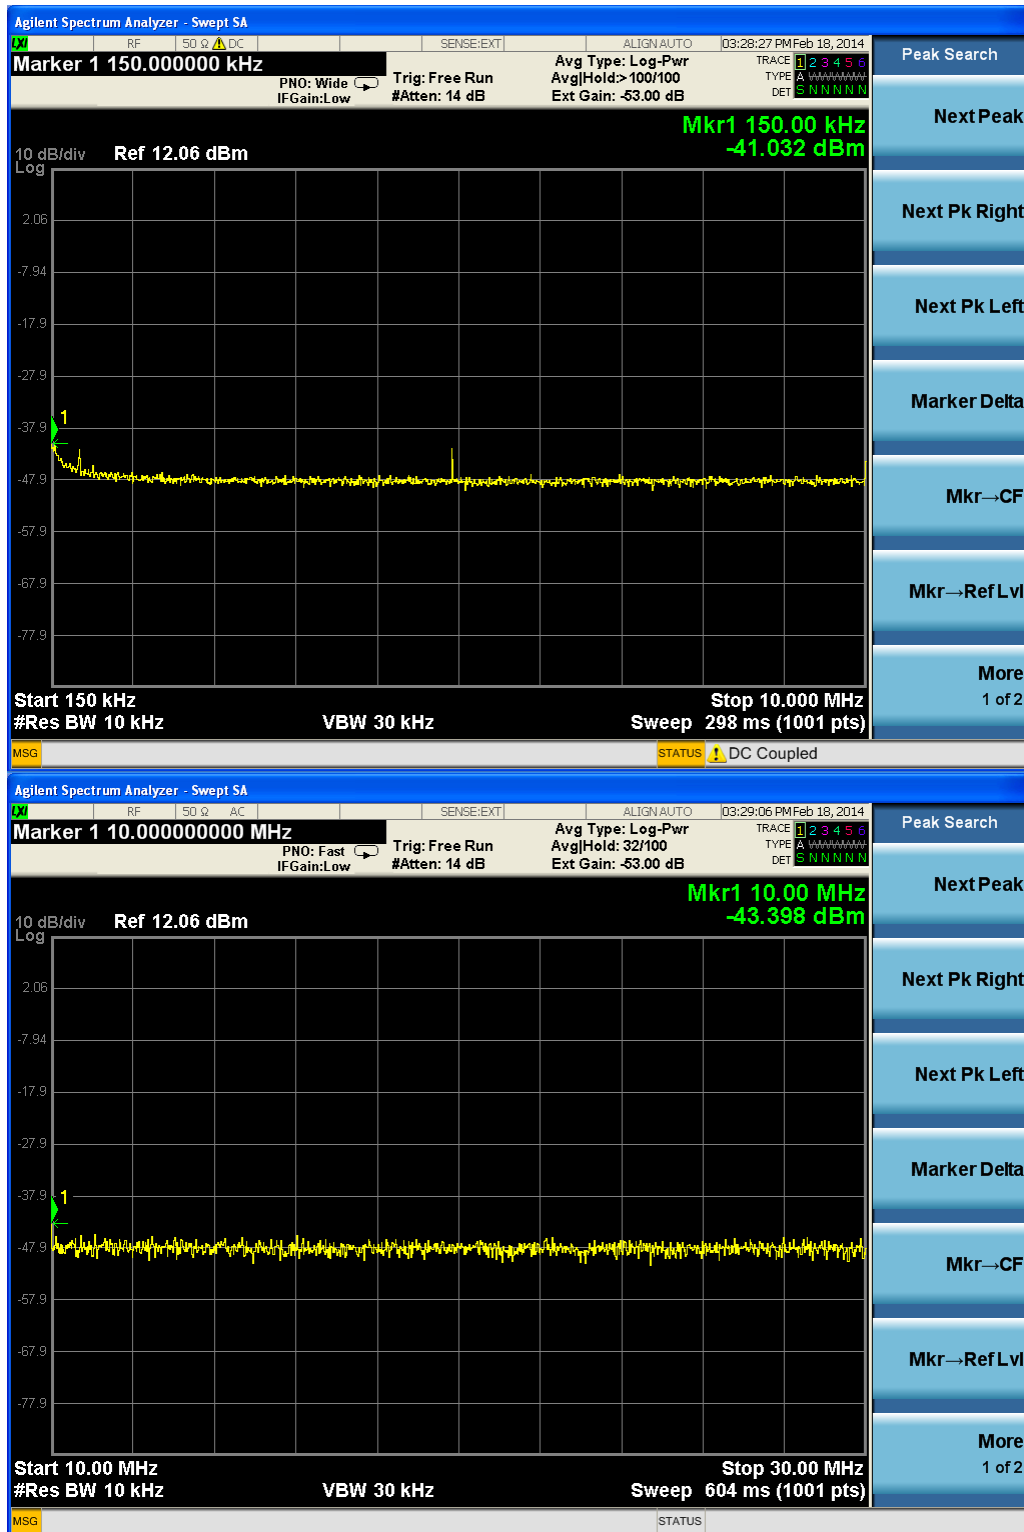




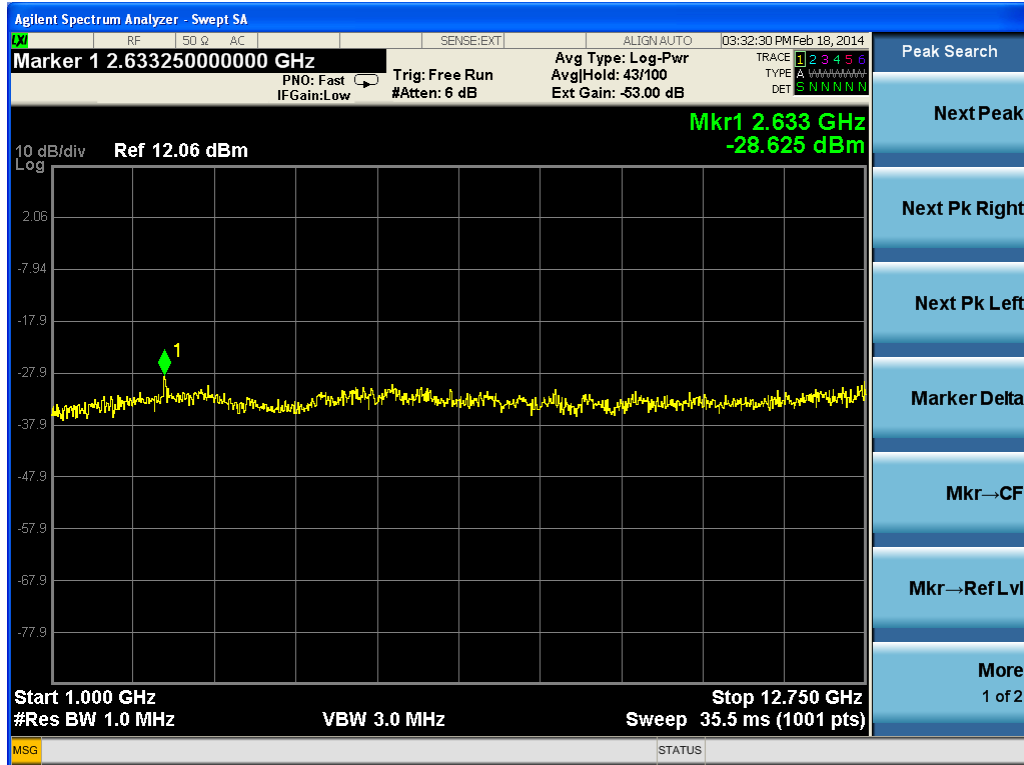



Four carriers (working in middle frequency)







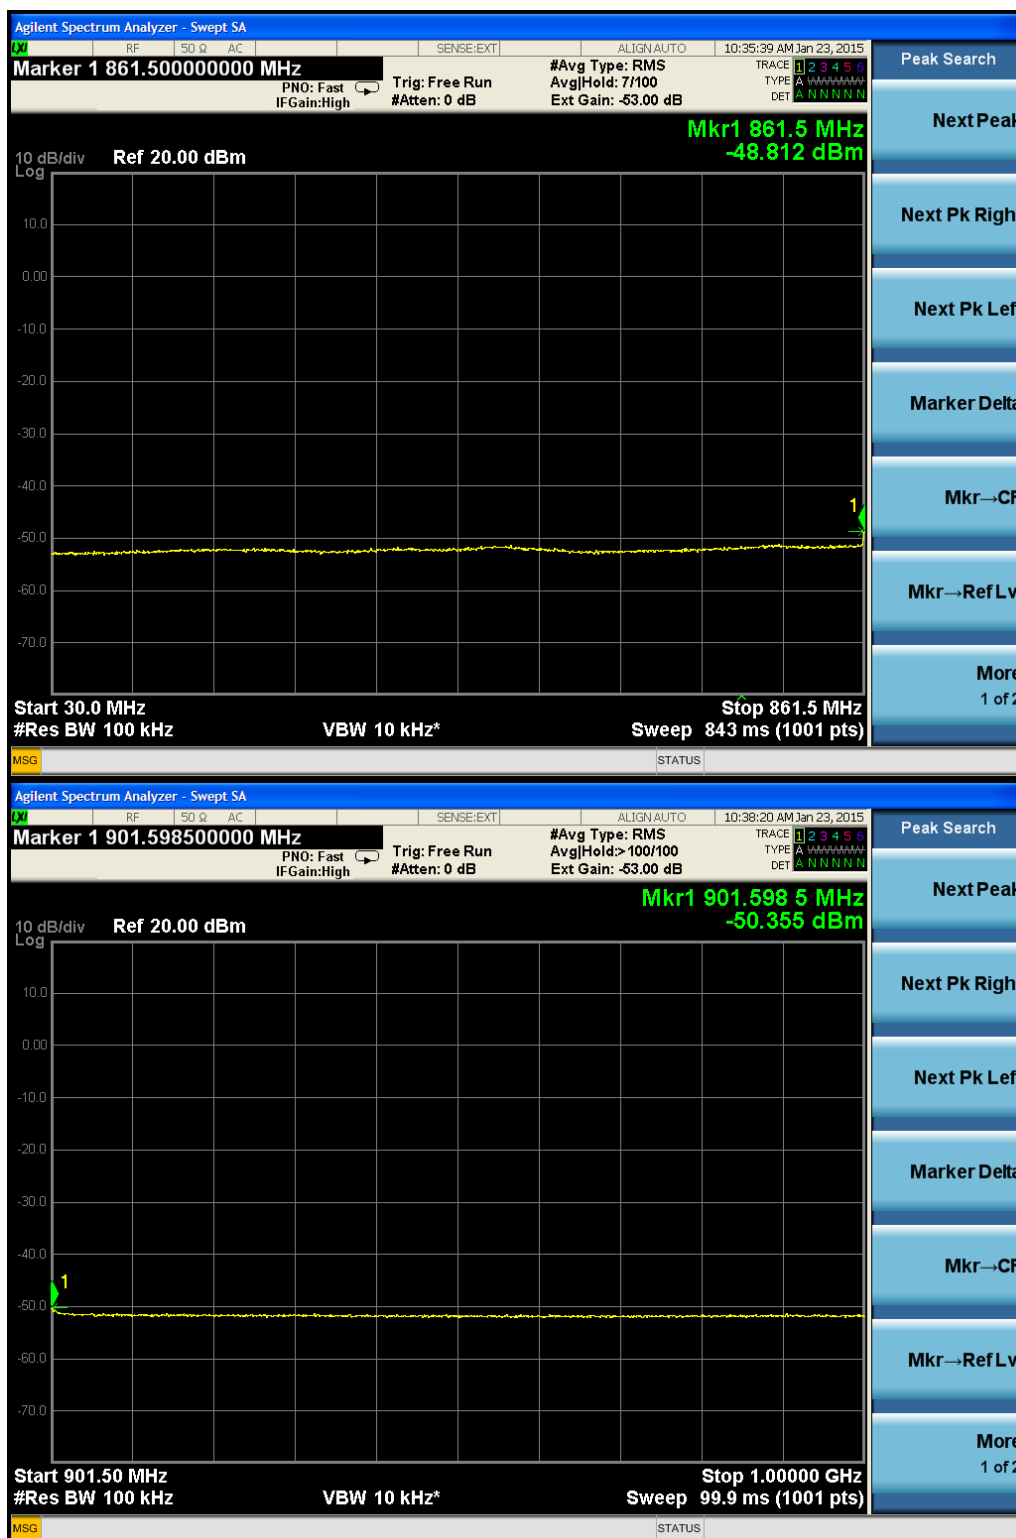



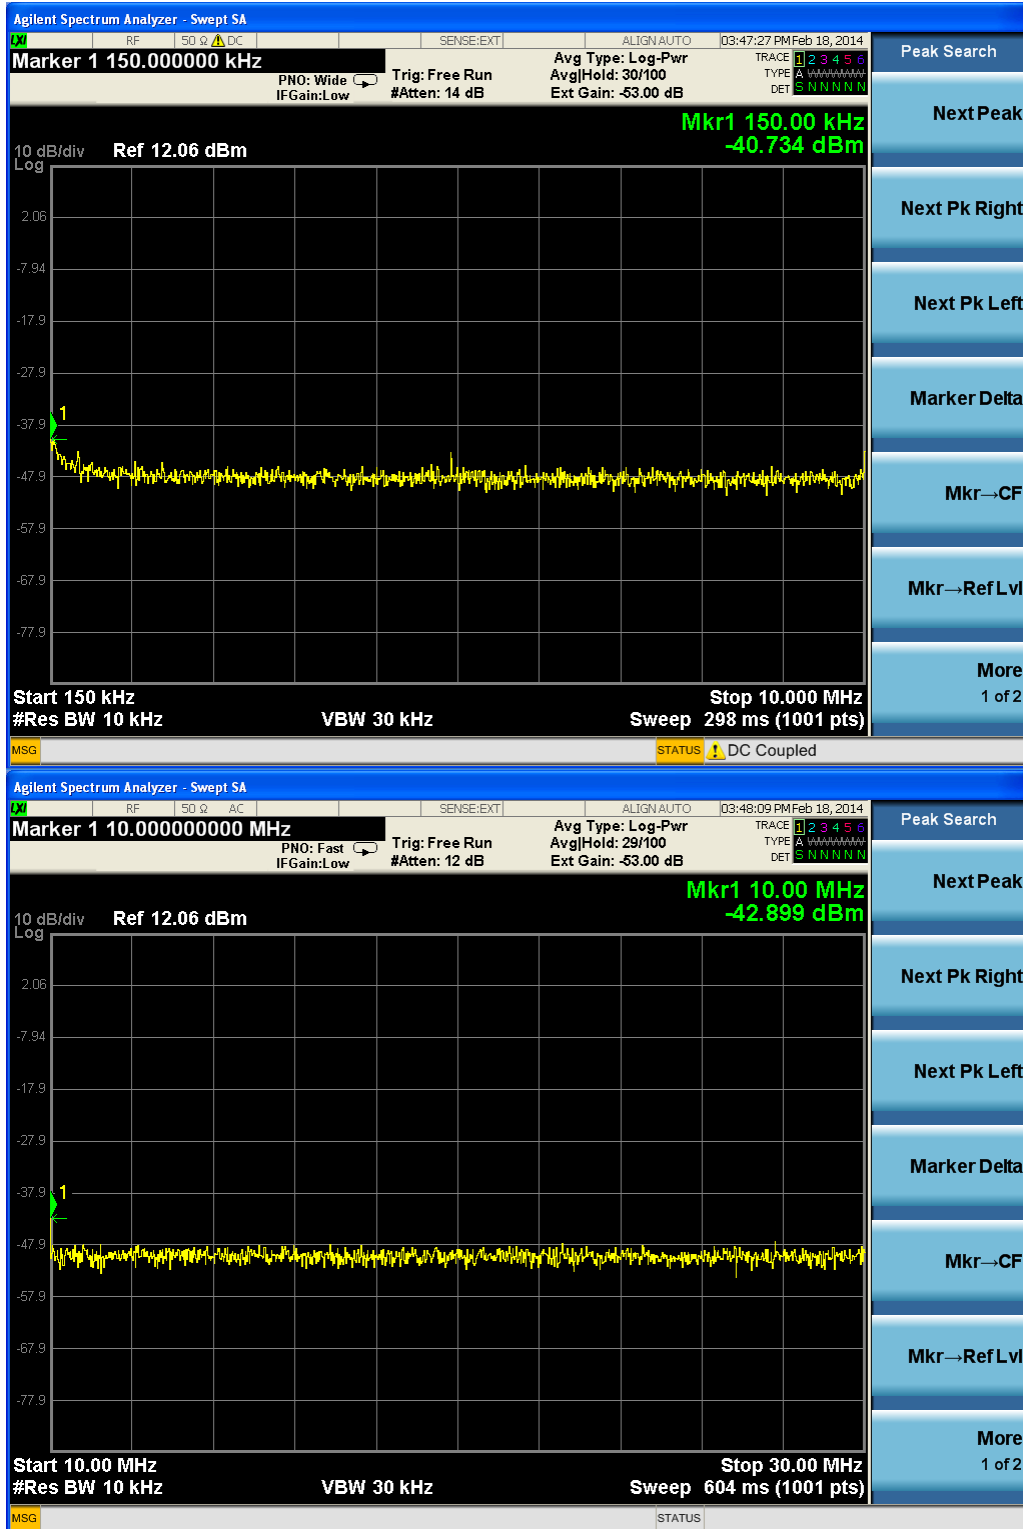


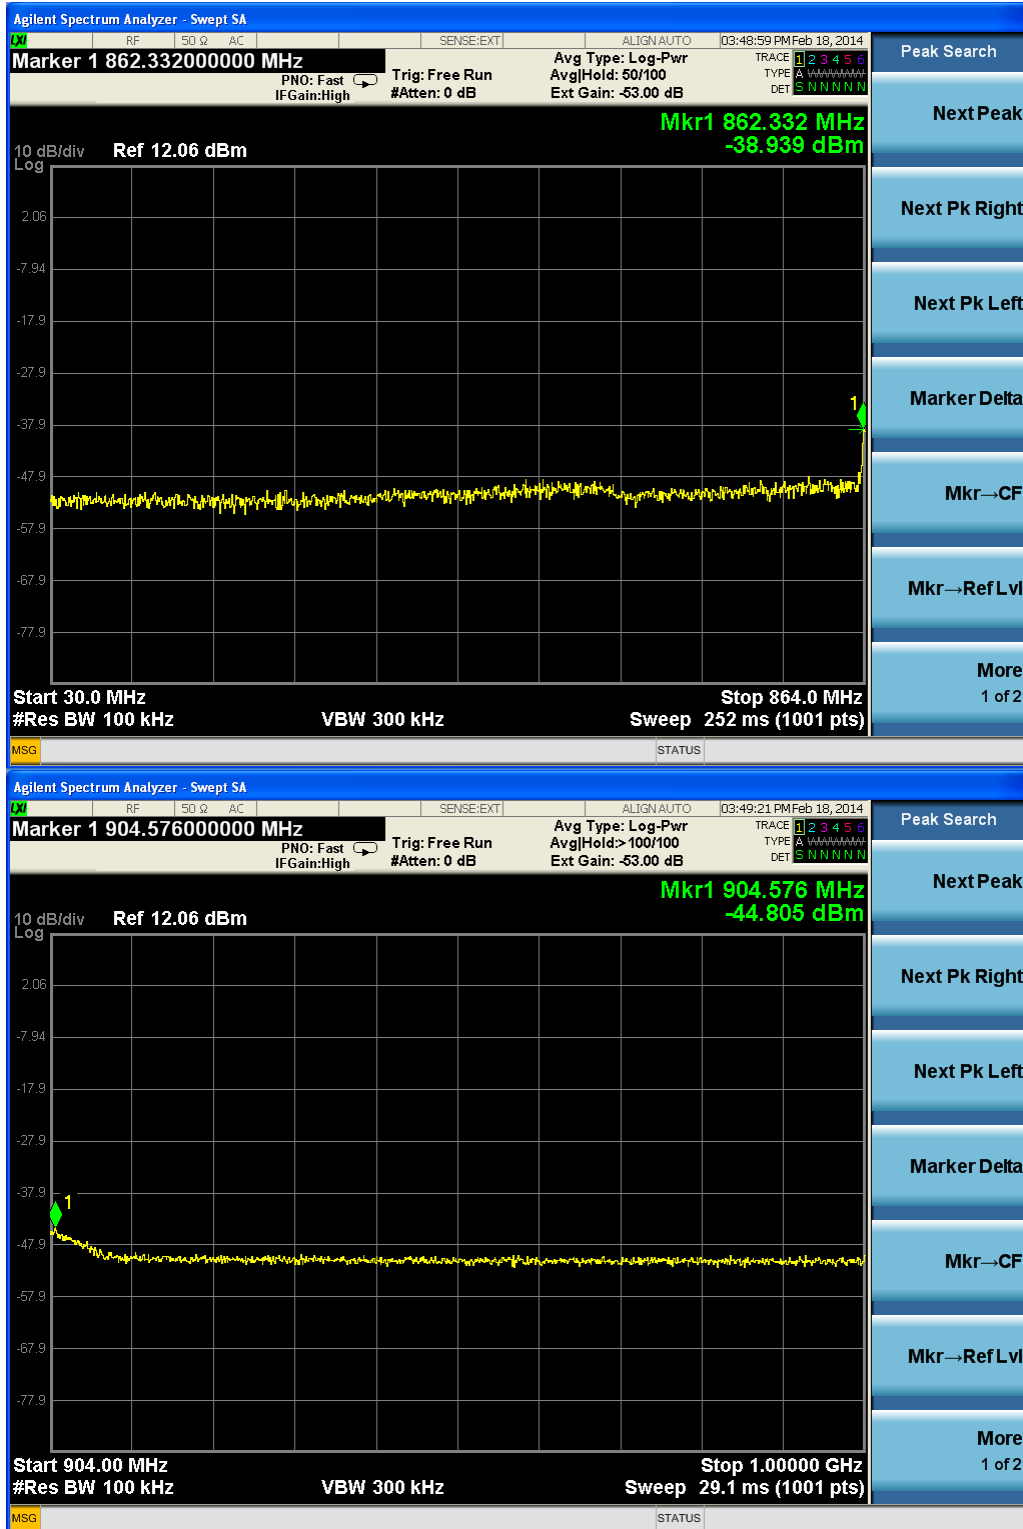


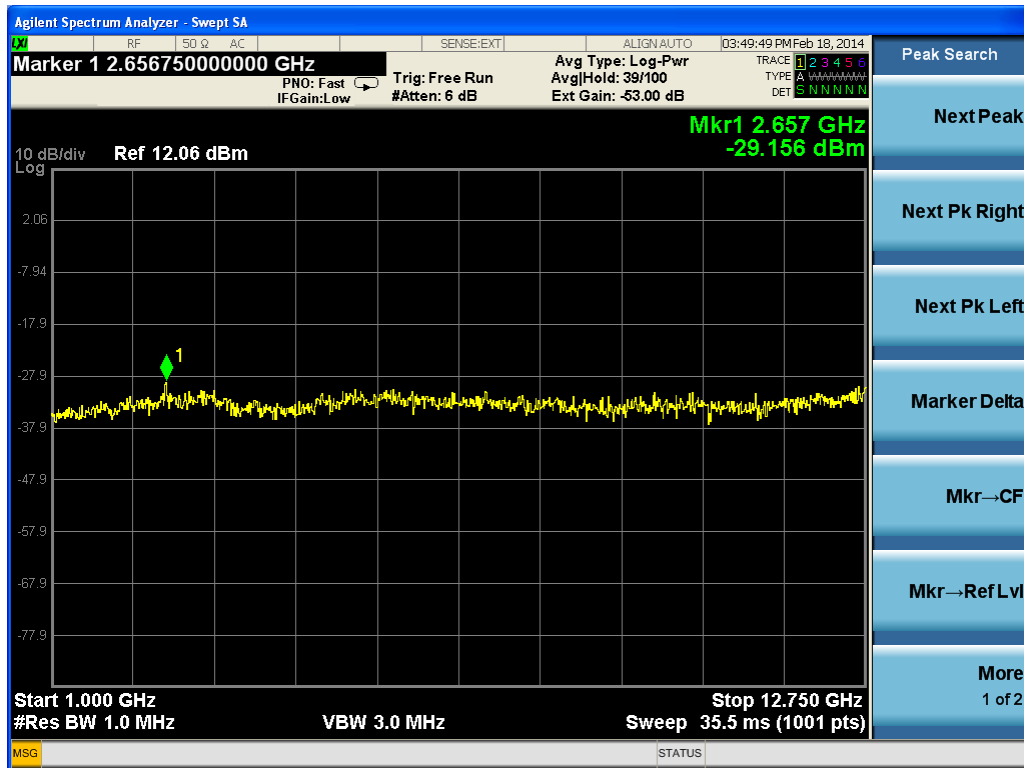


Three carriers (working in bottom frequency)




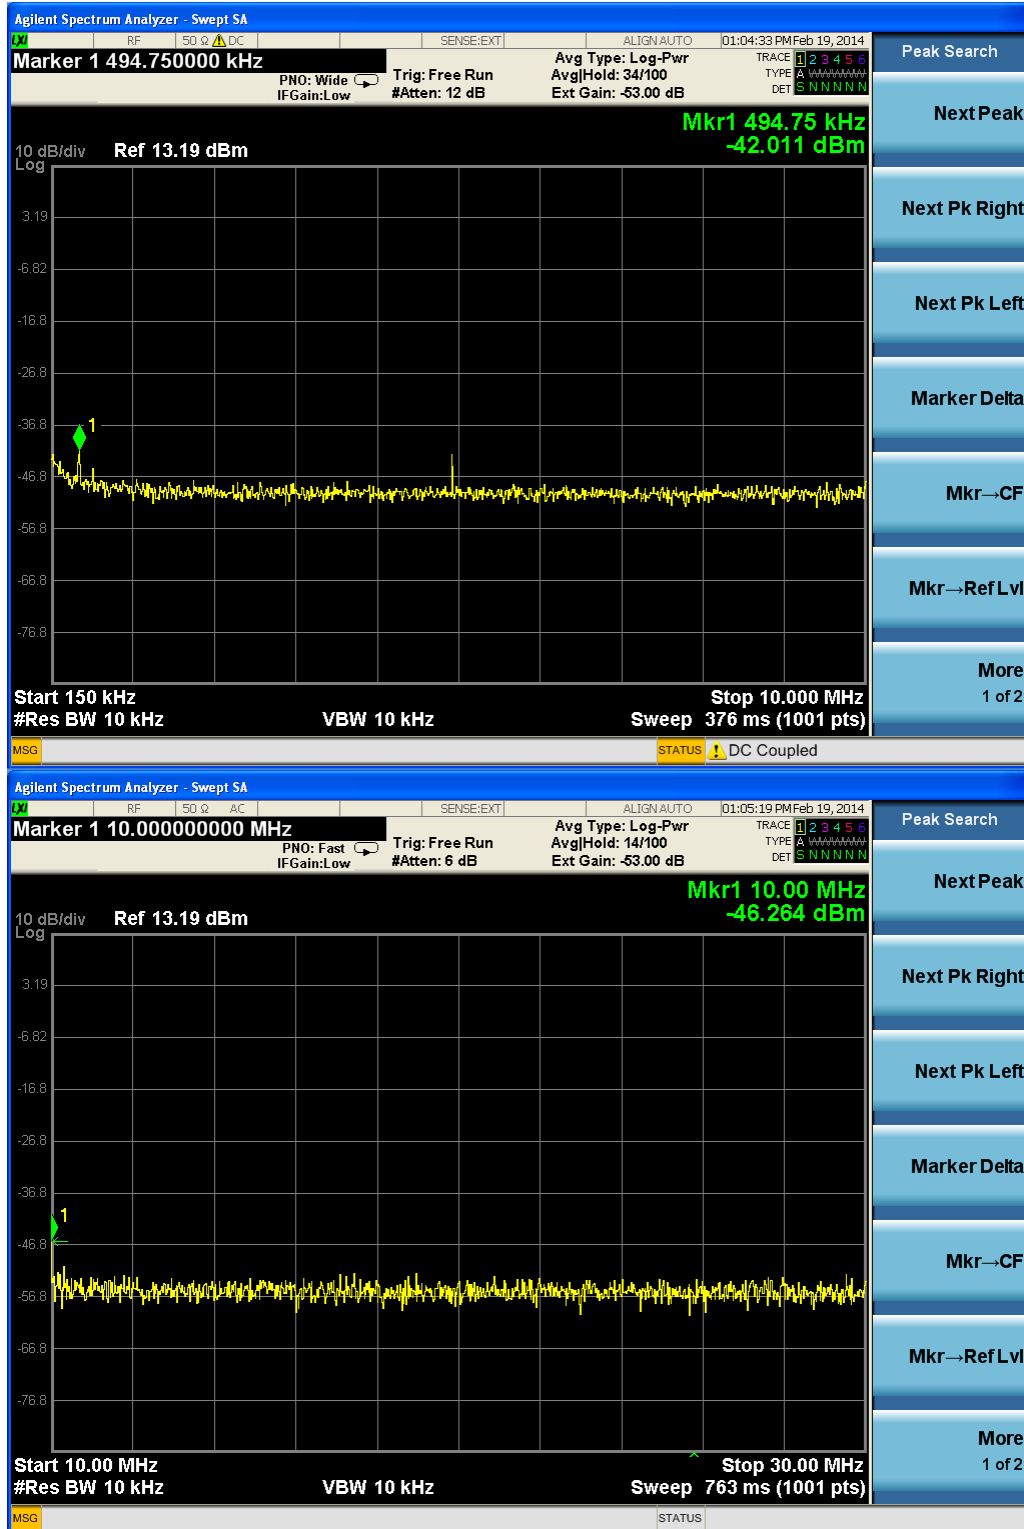


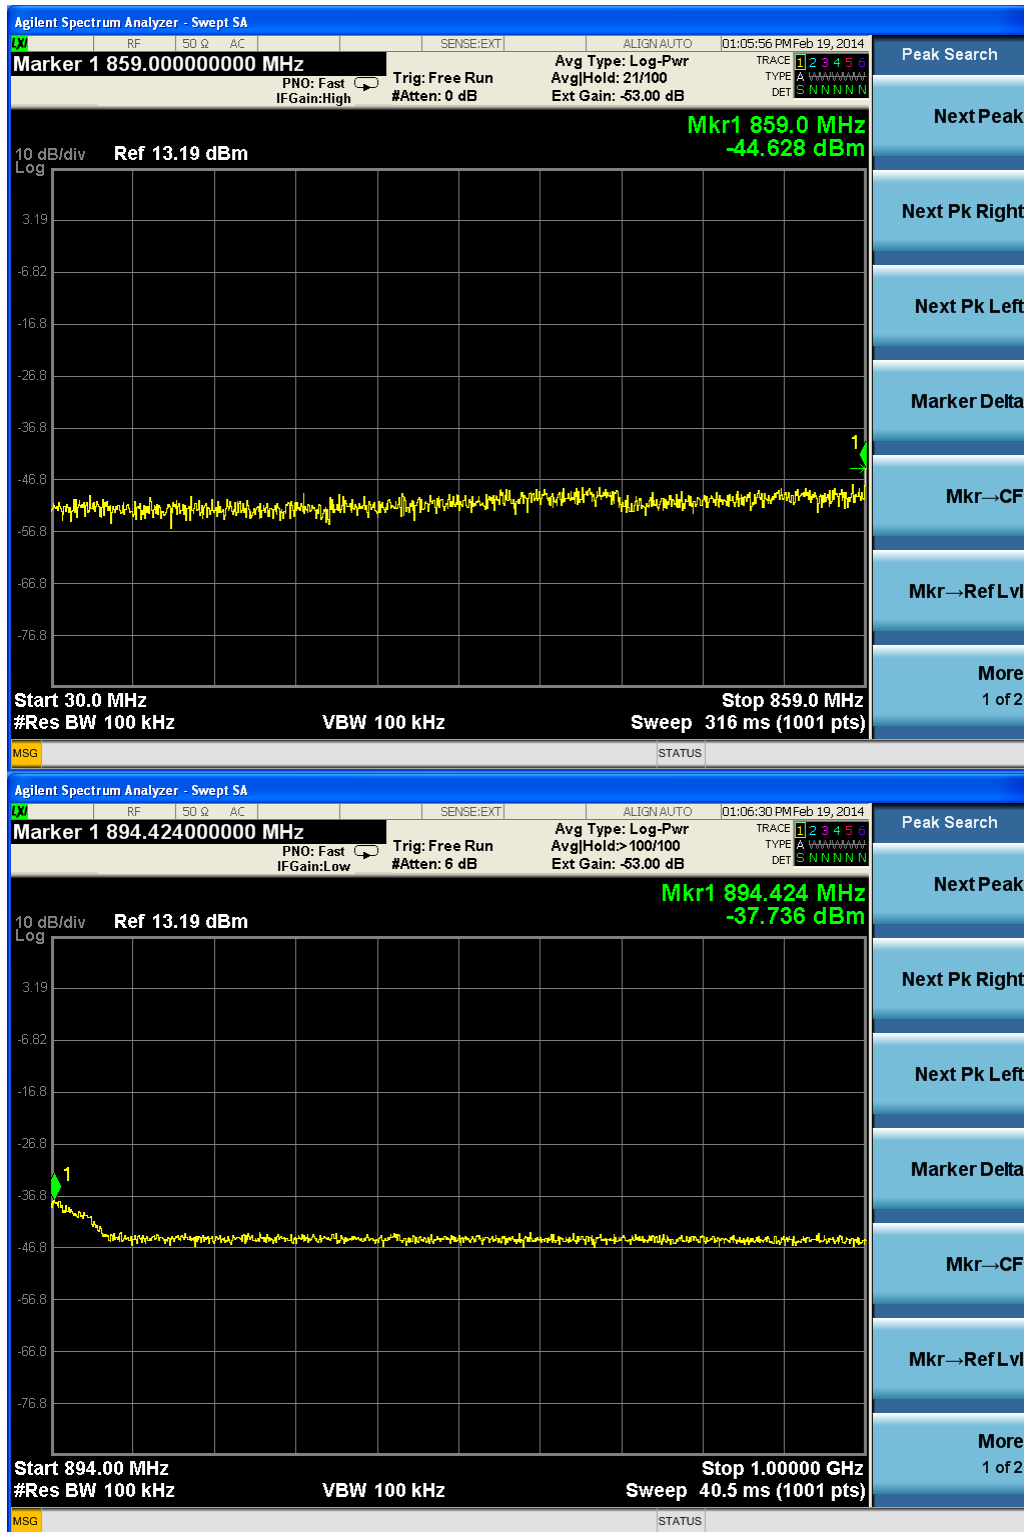


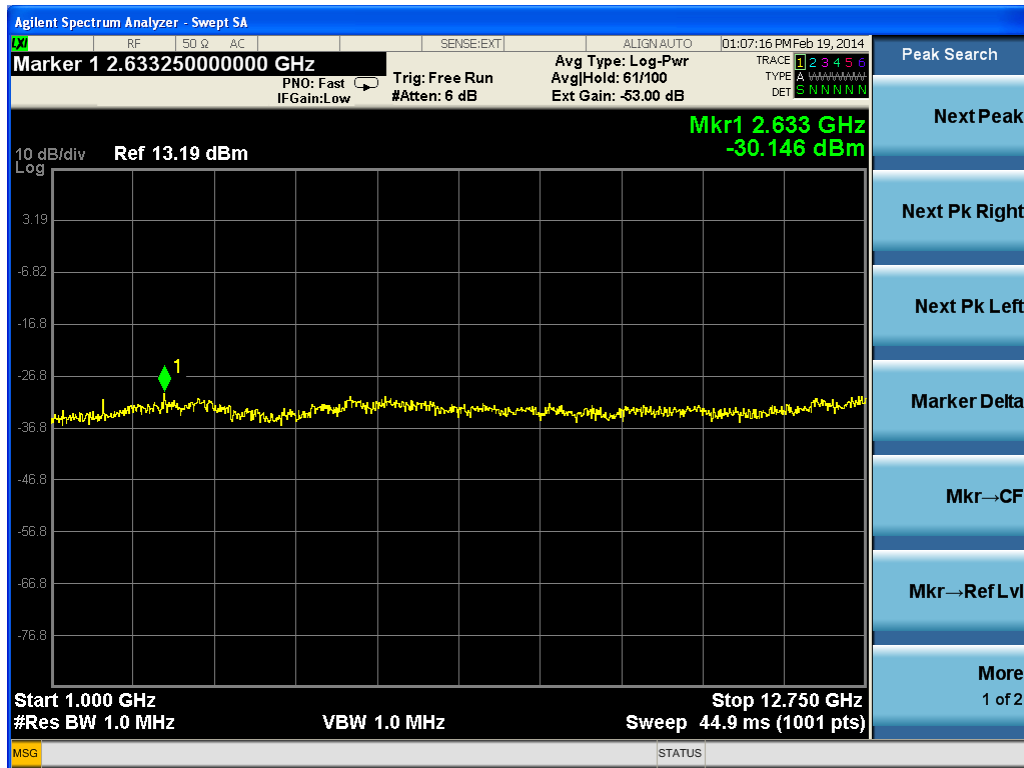


Three carriers (working in middle frequency)

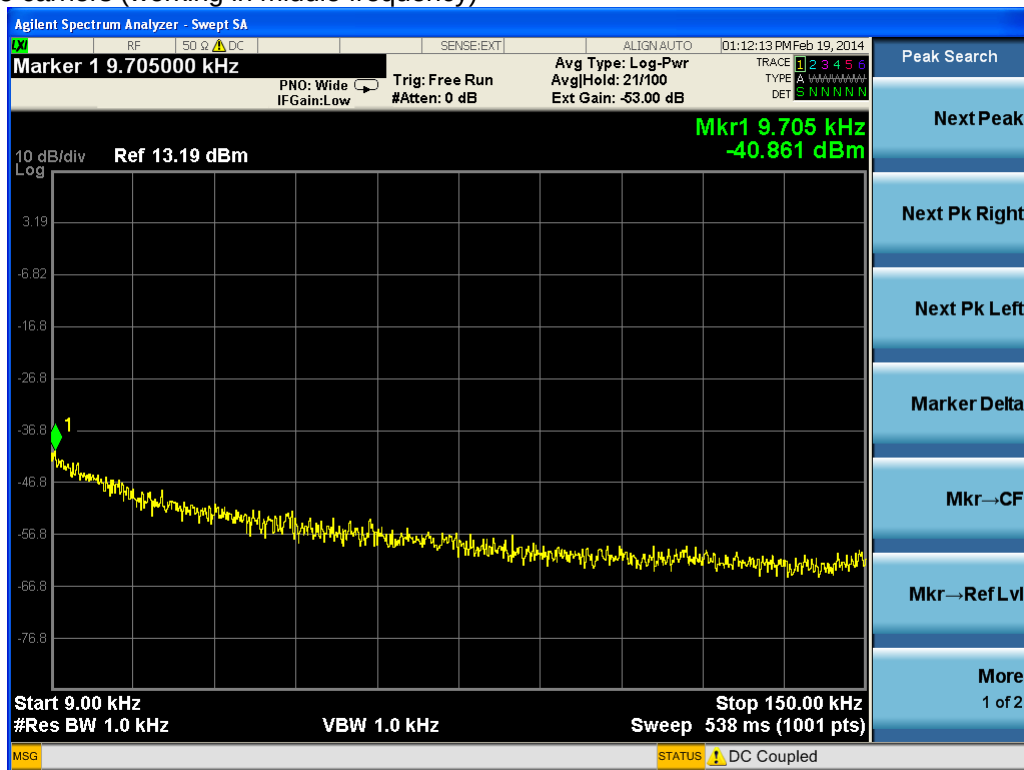


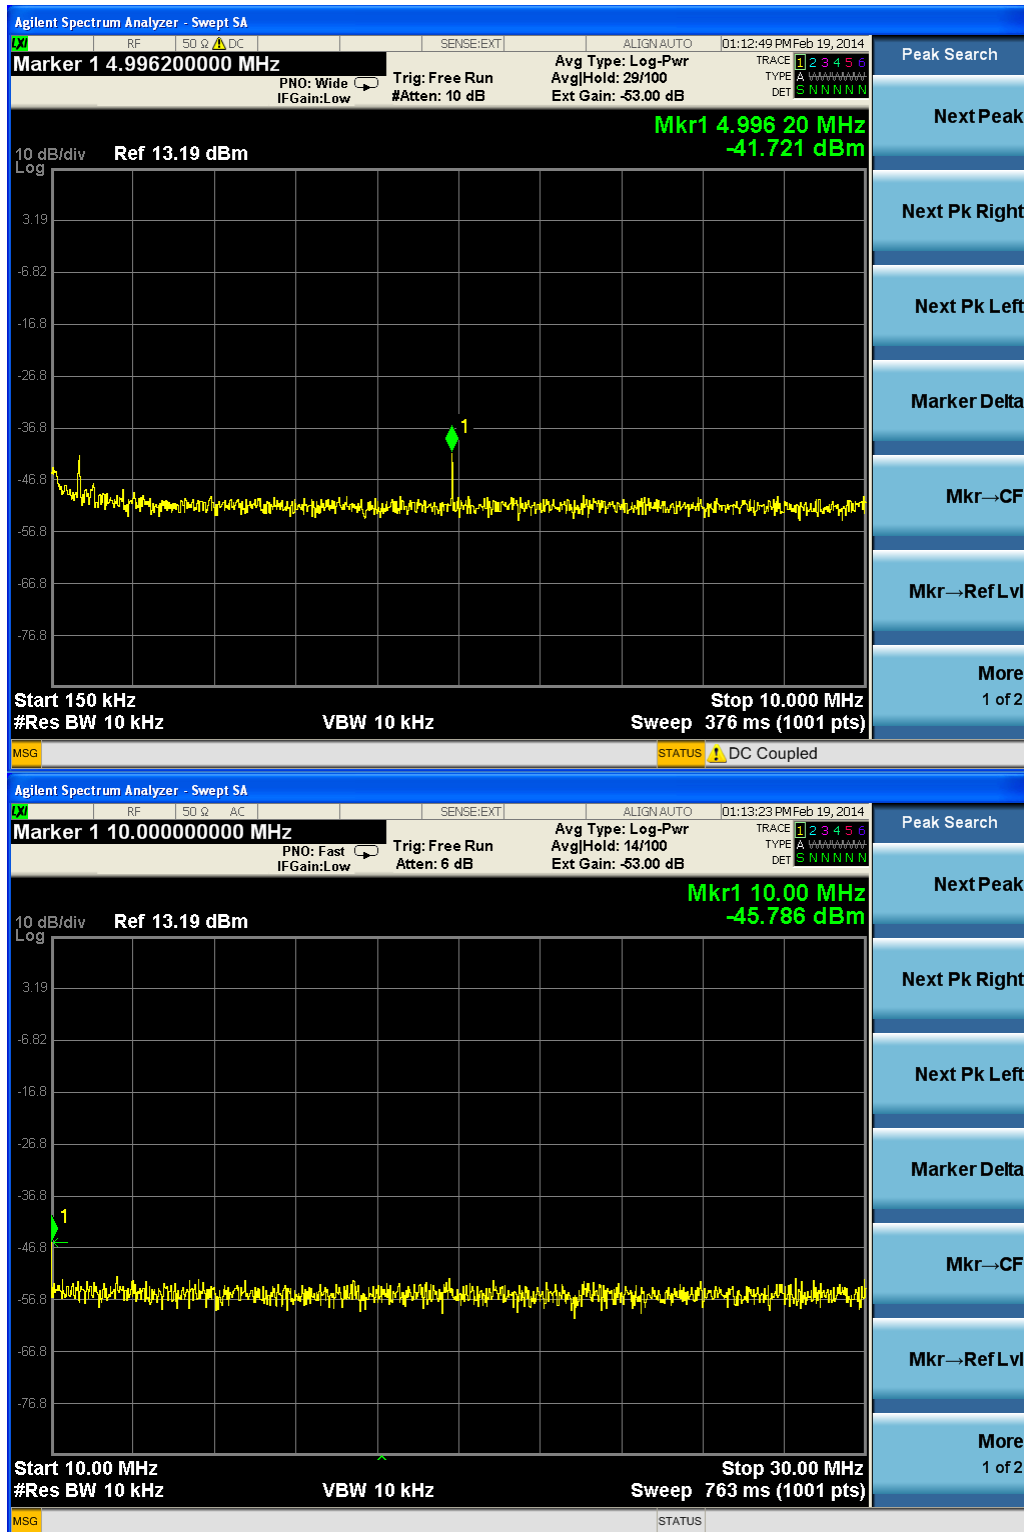


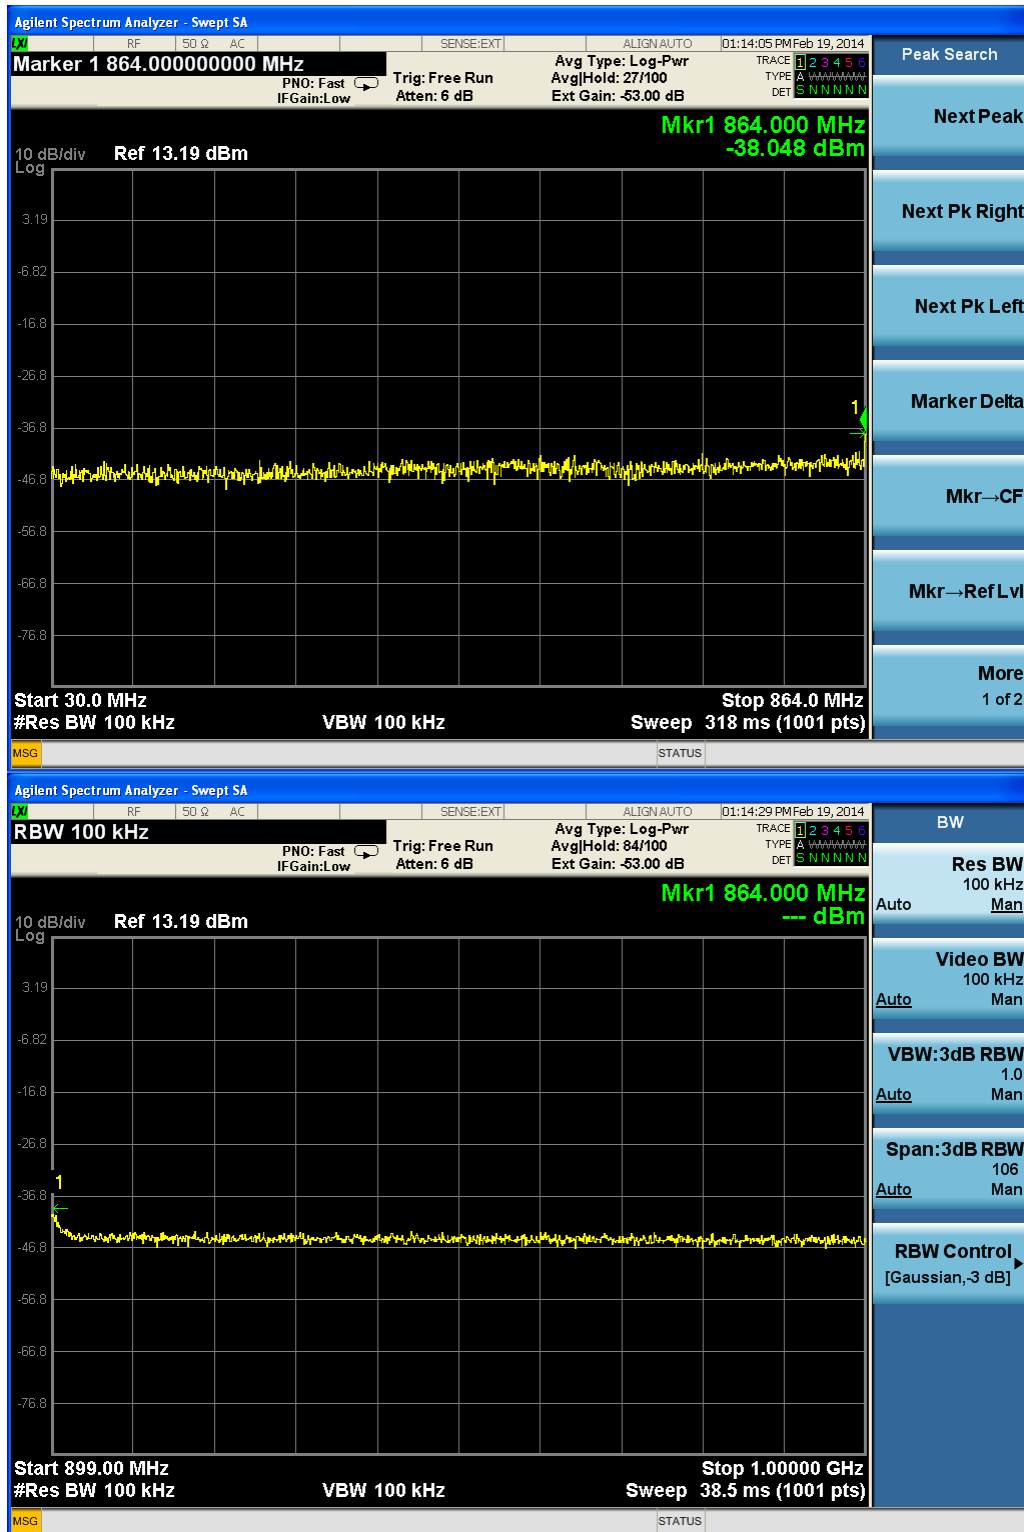


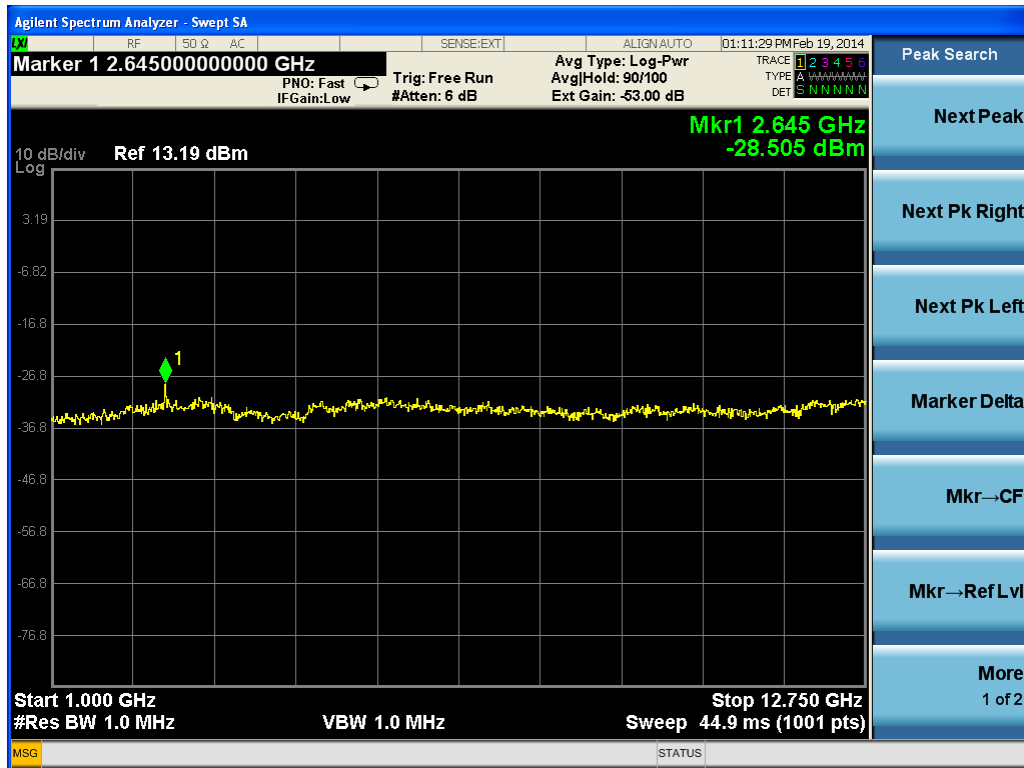


Three carriers (working in top frequency)

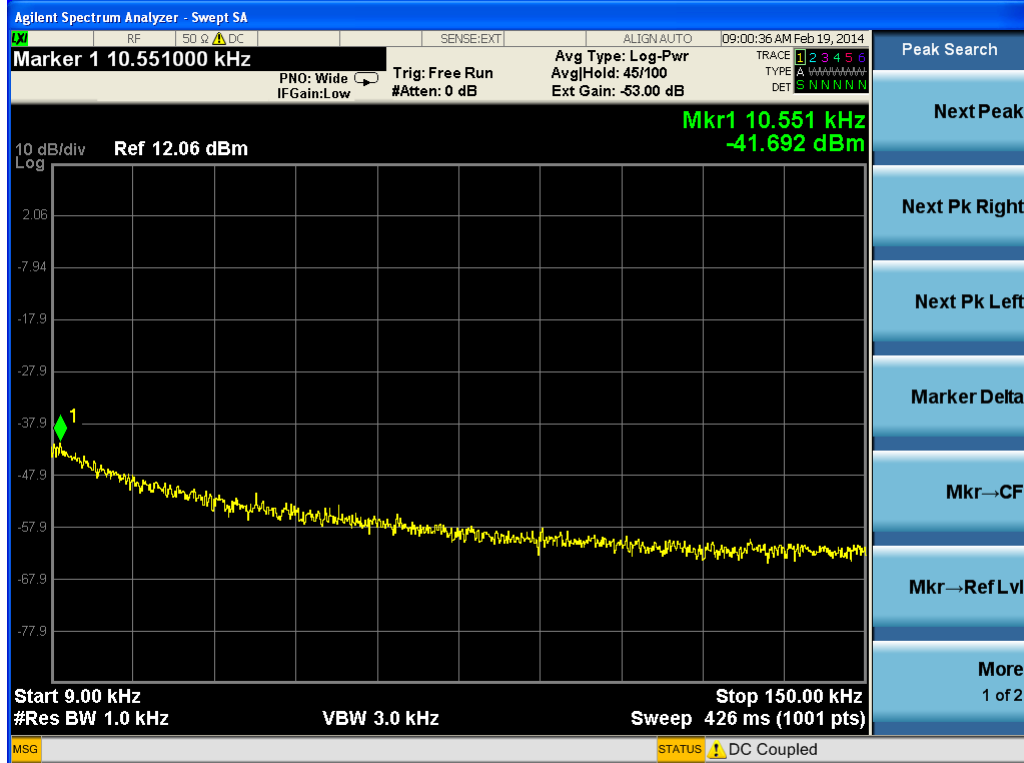


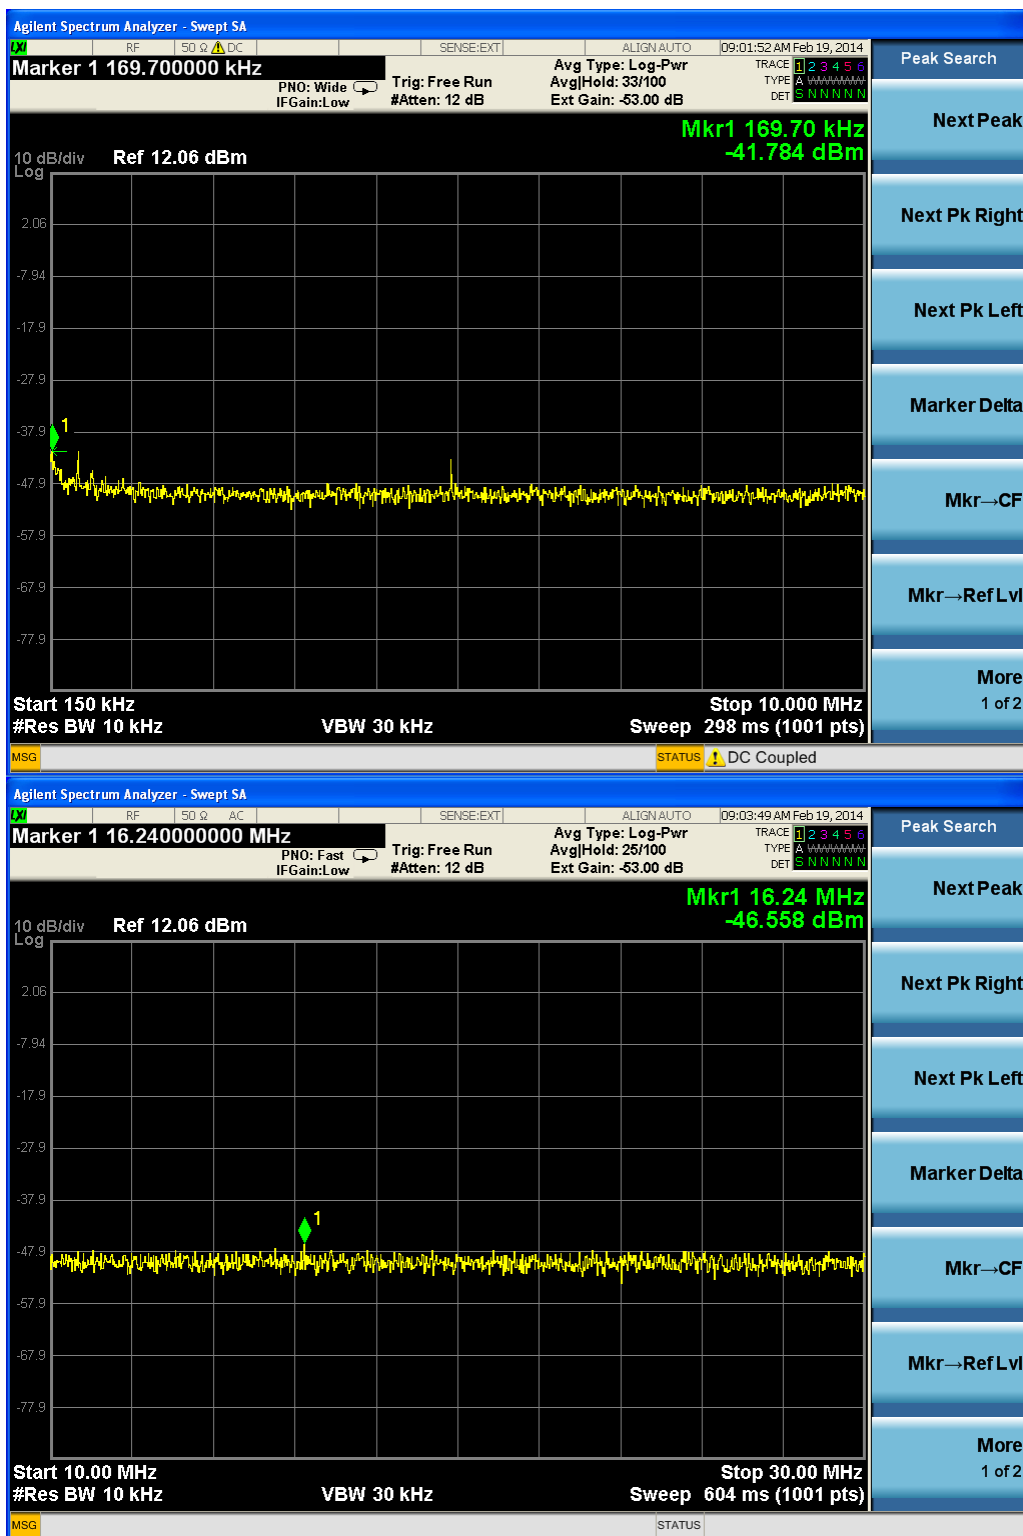


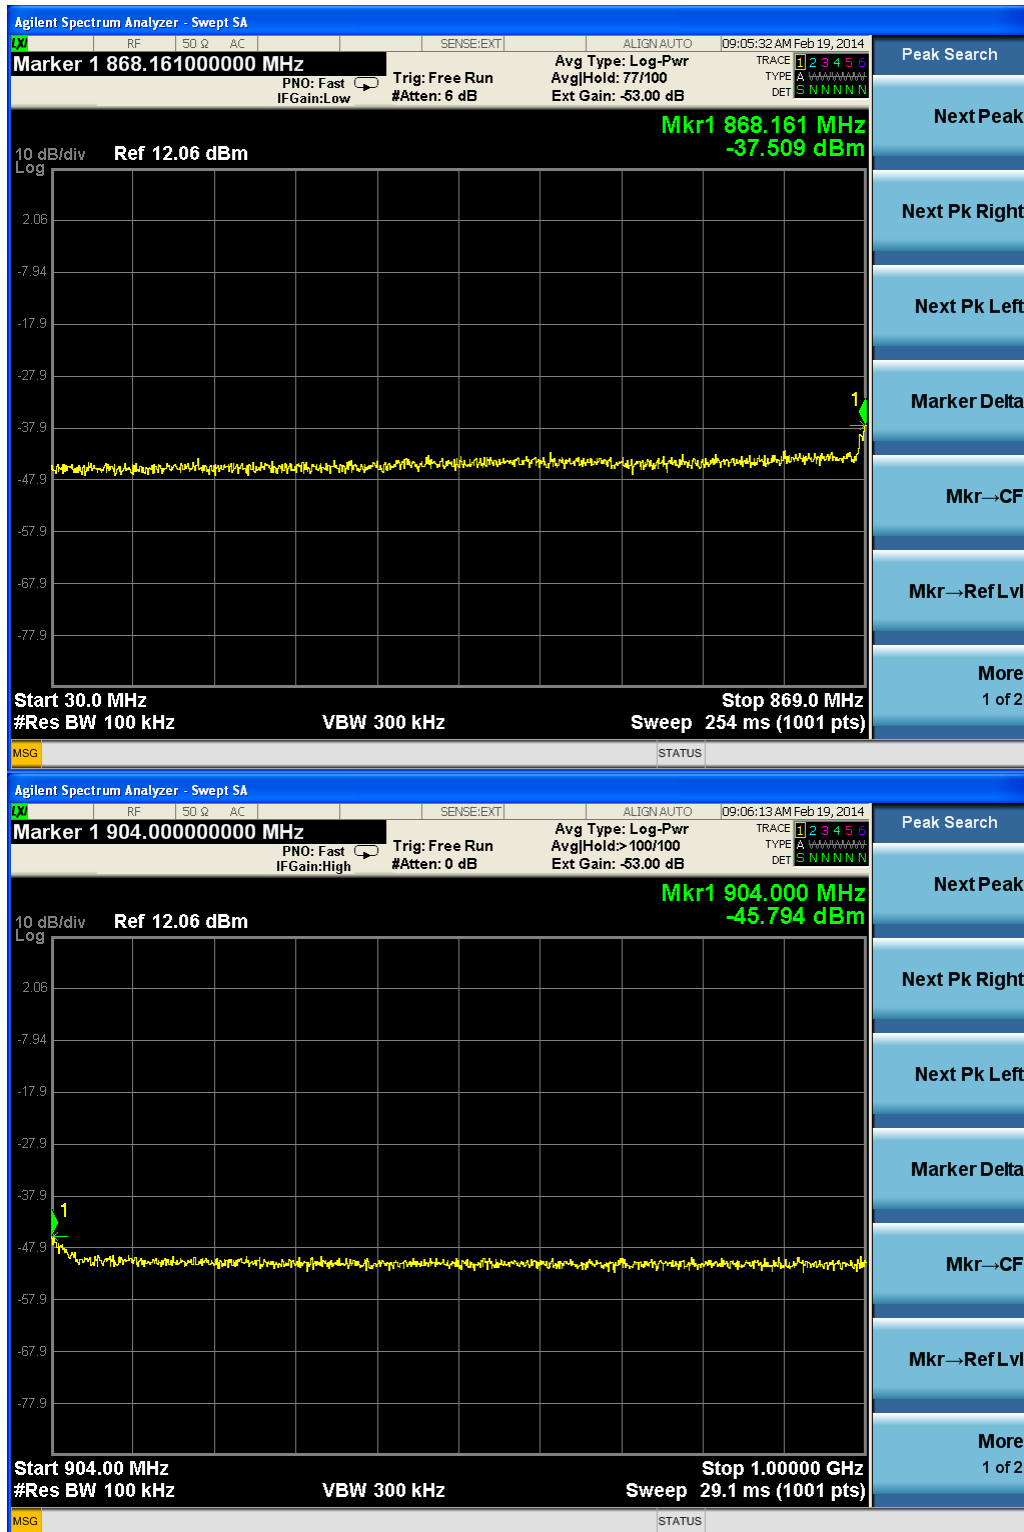

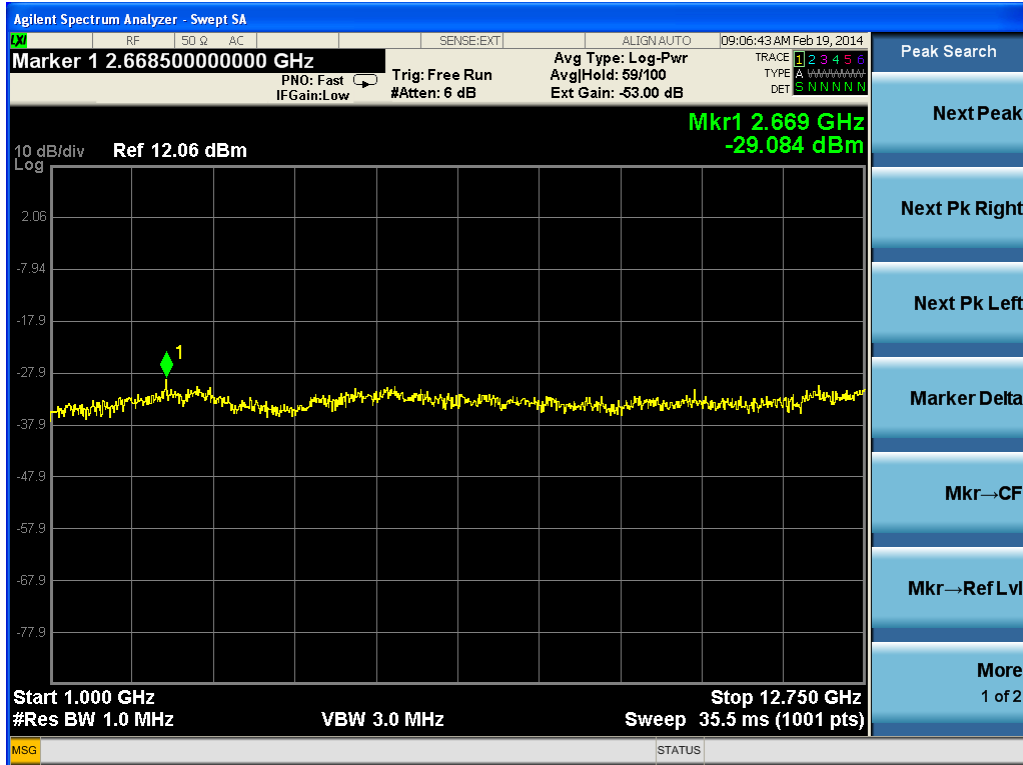


Two carriers (working in bottom frequency)

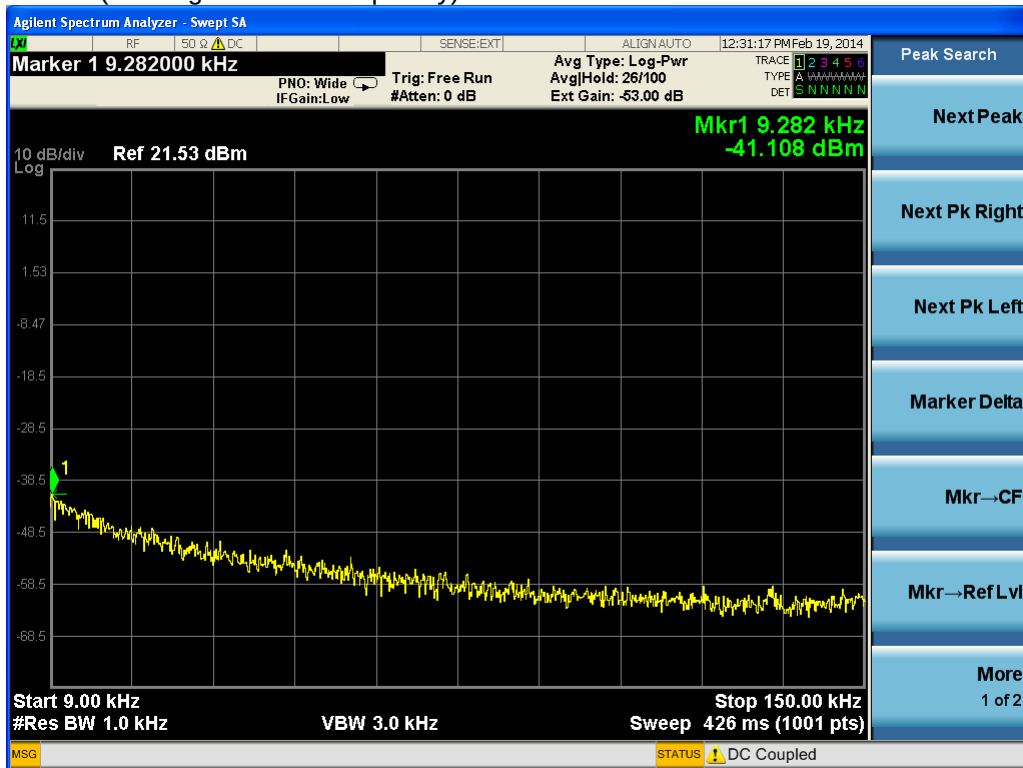


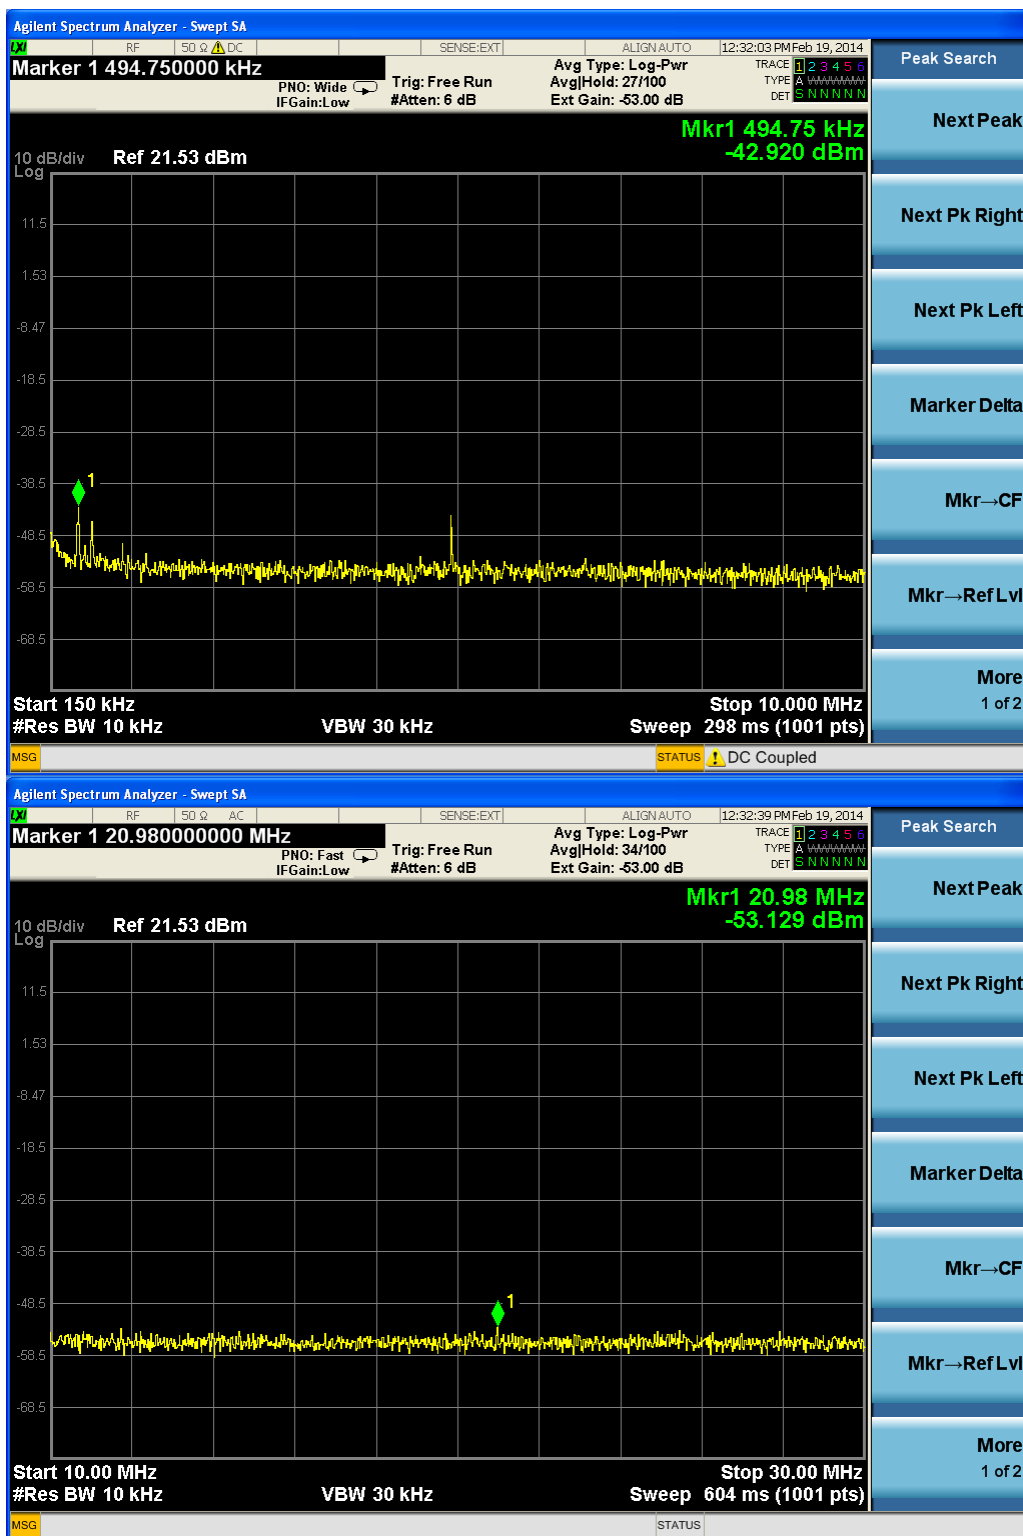





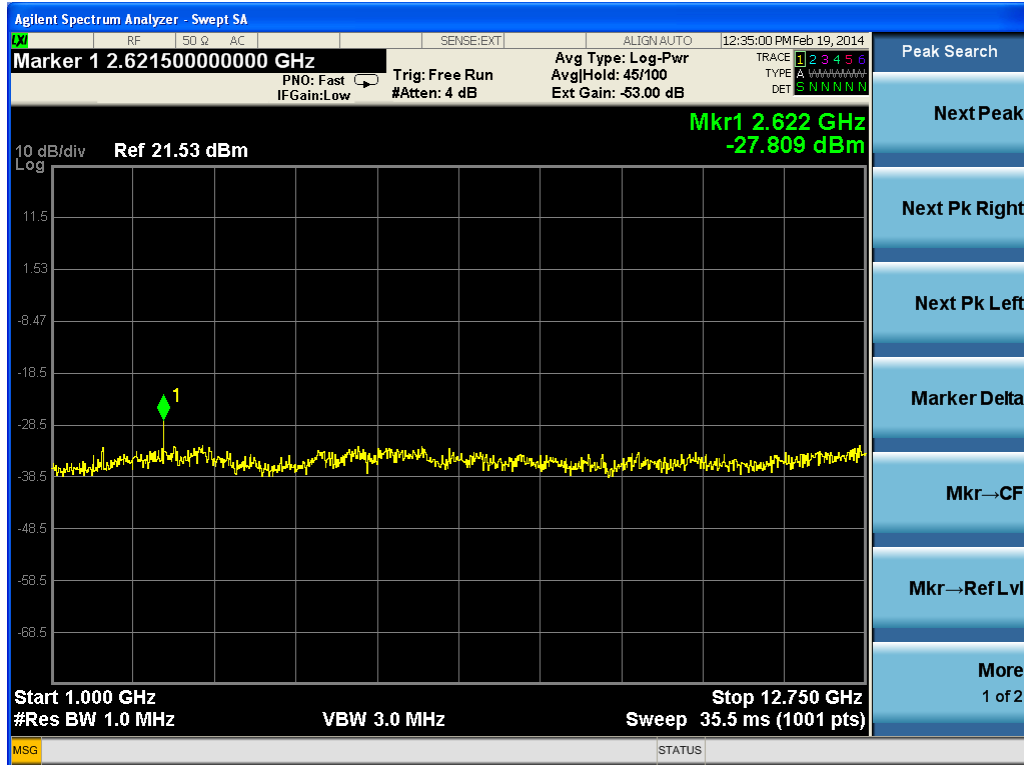


Two carriers (working in middle frequency)

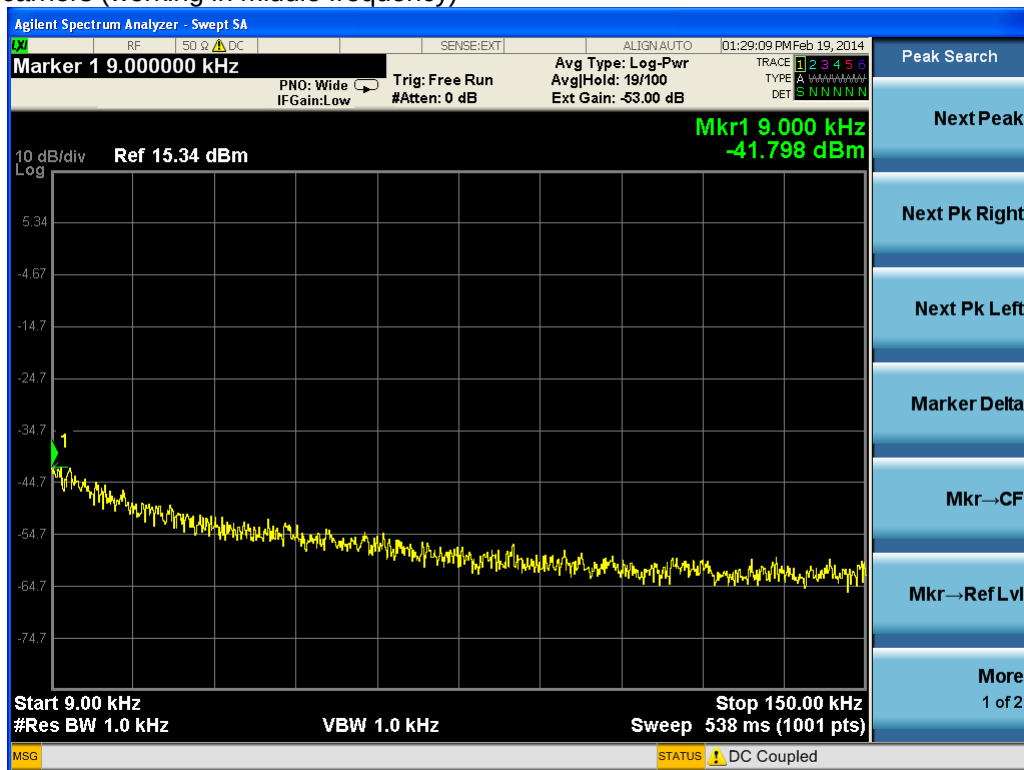


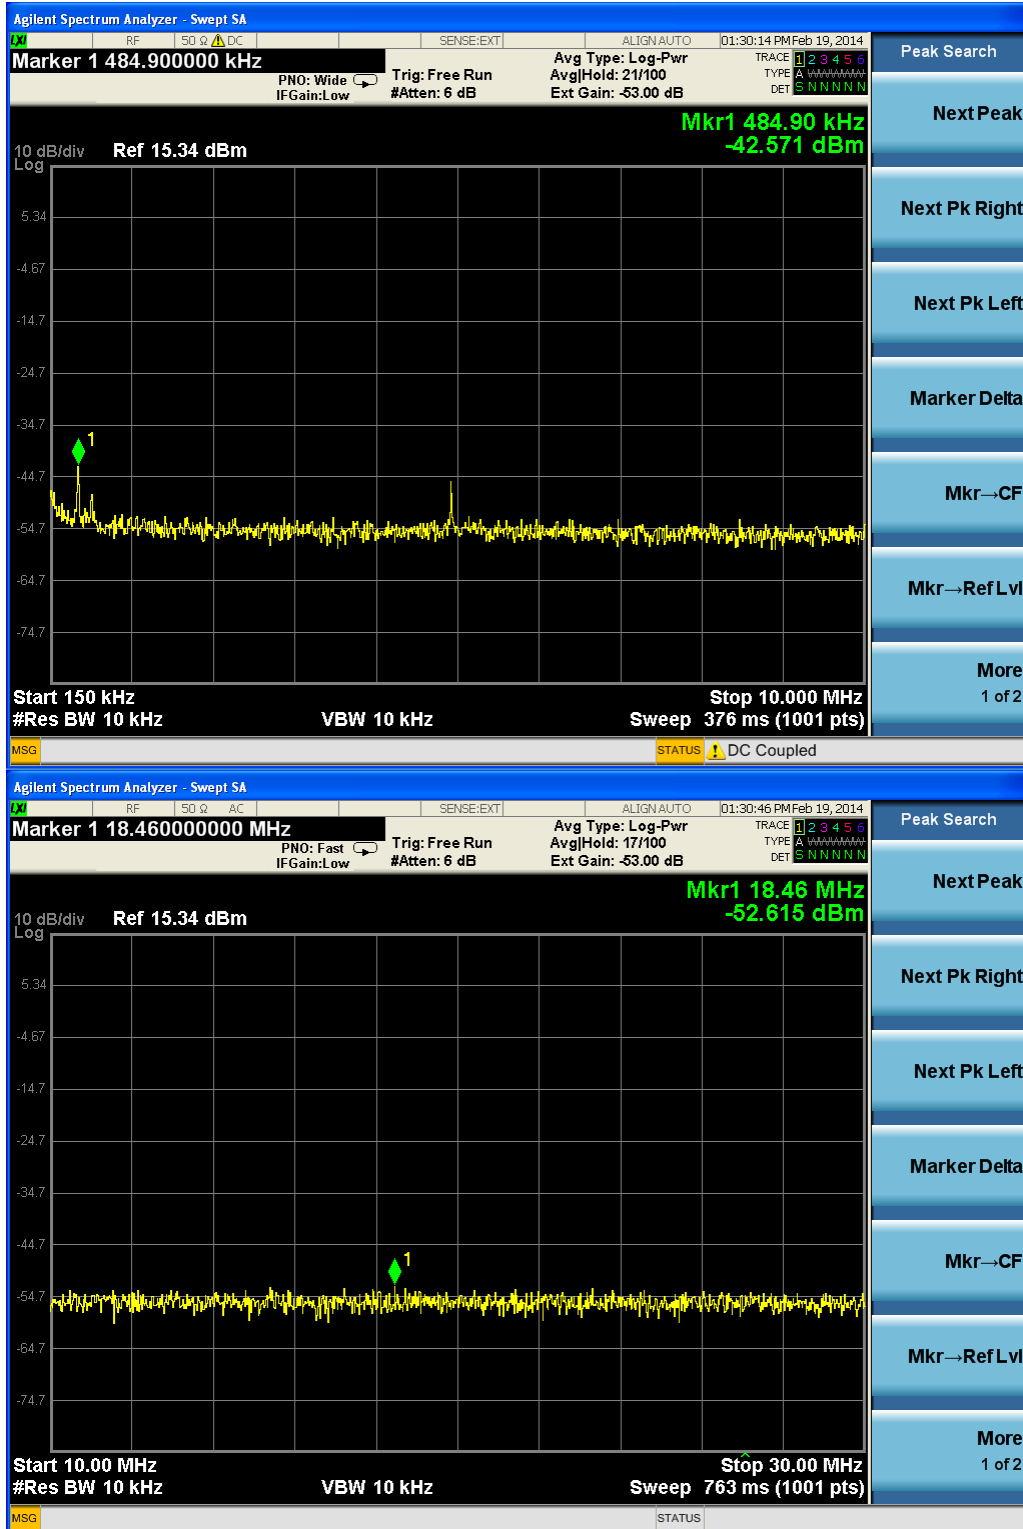


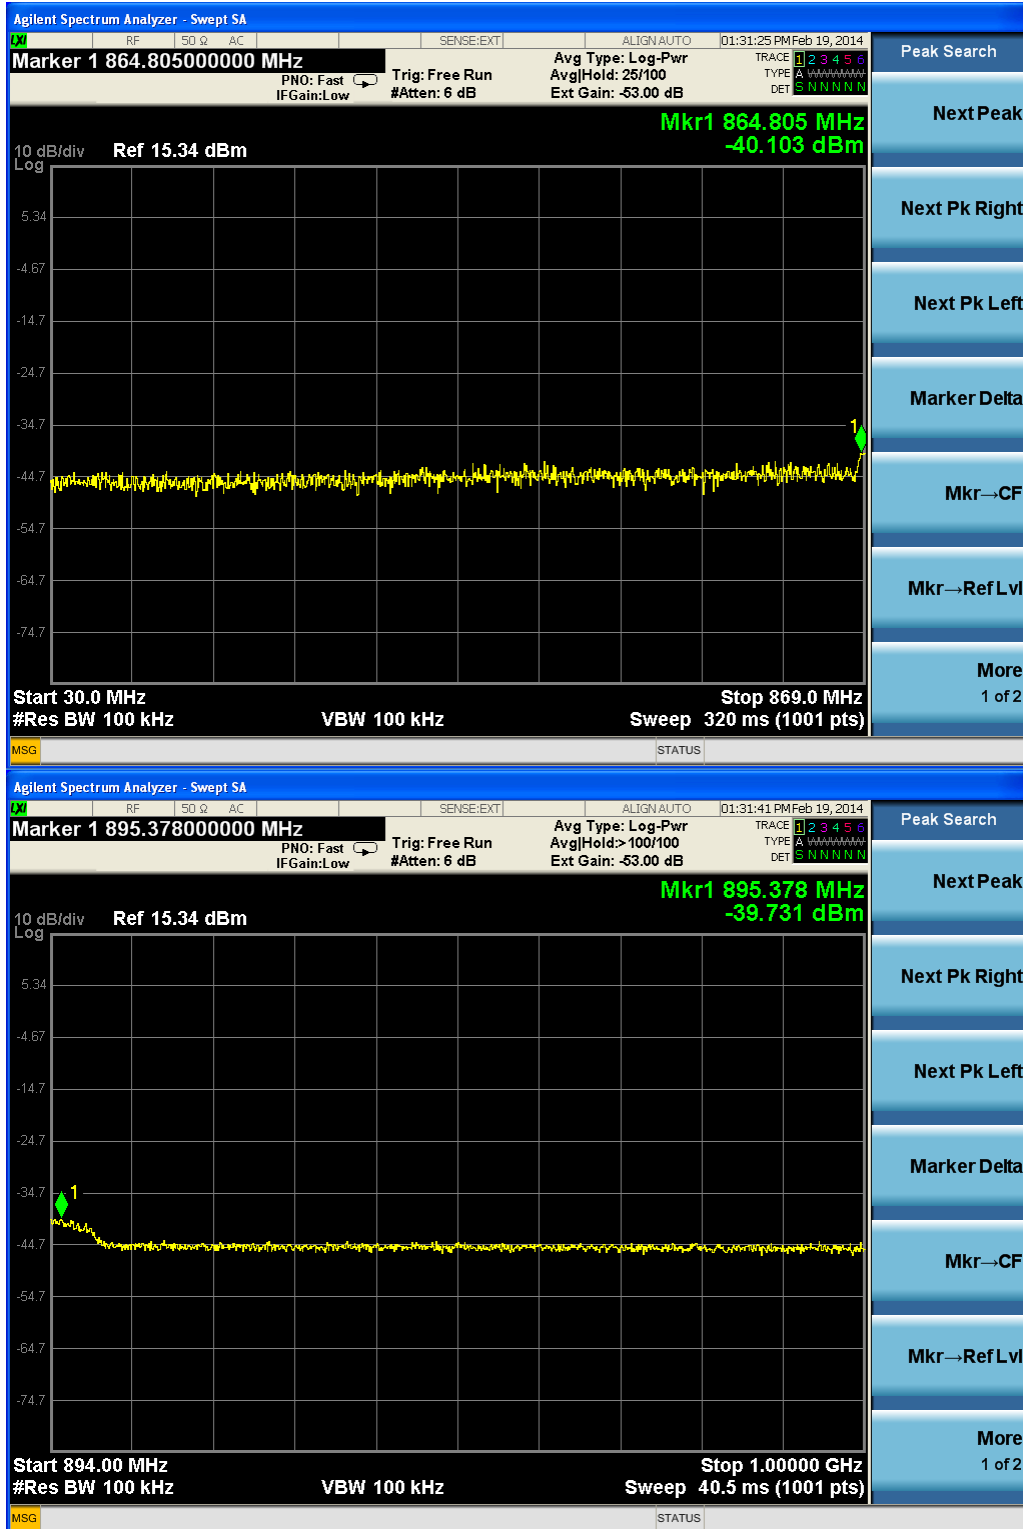


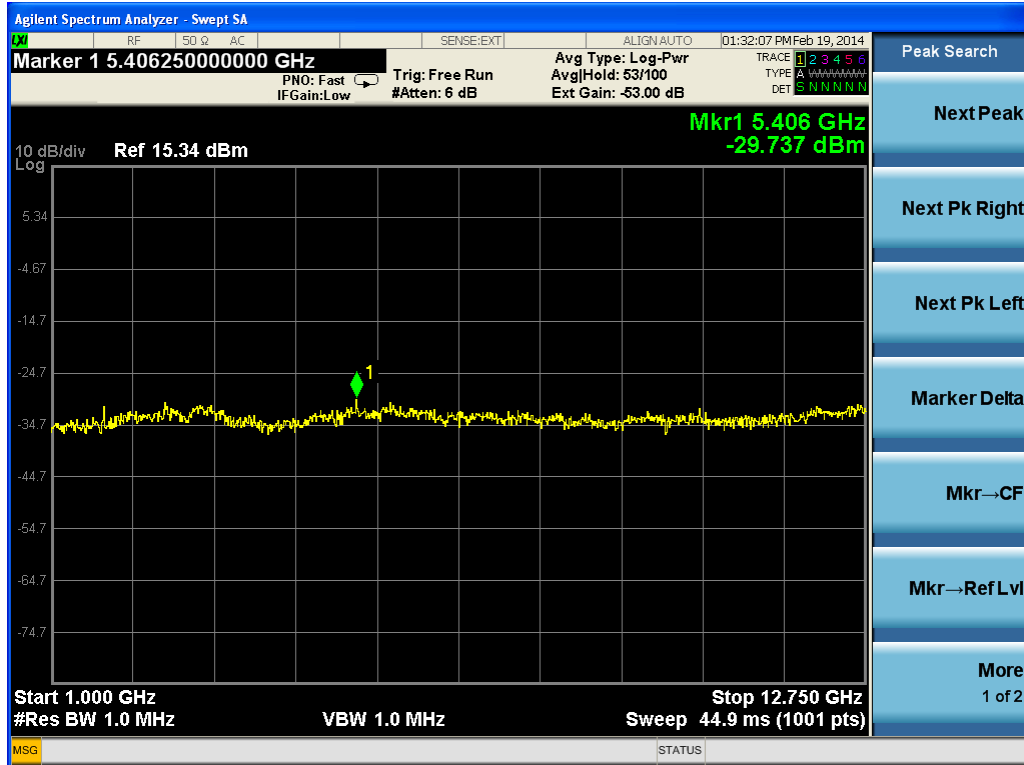


Two carriers (working in top frequency)

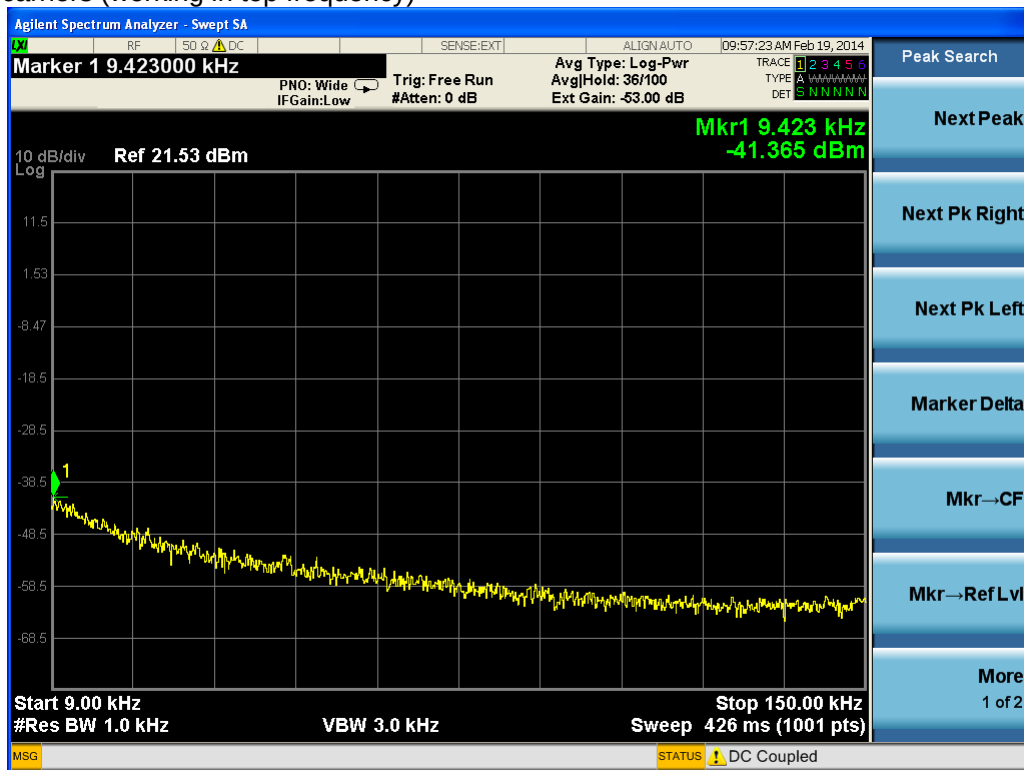

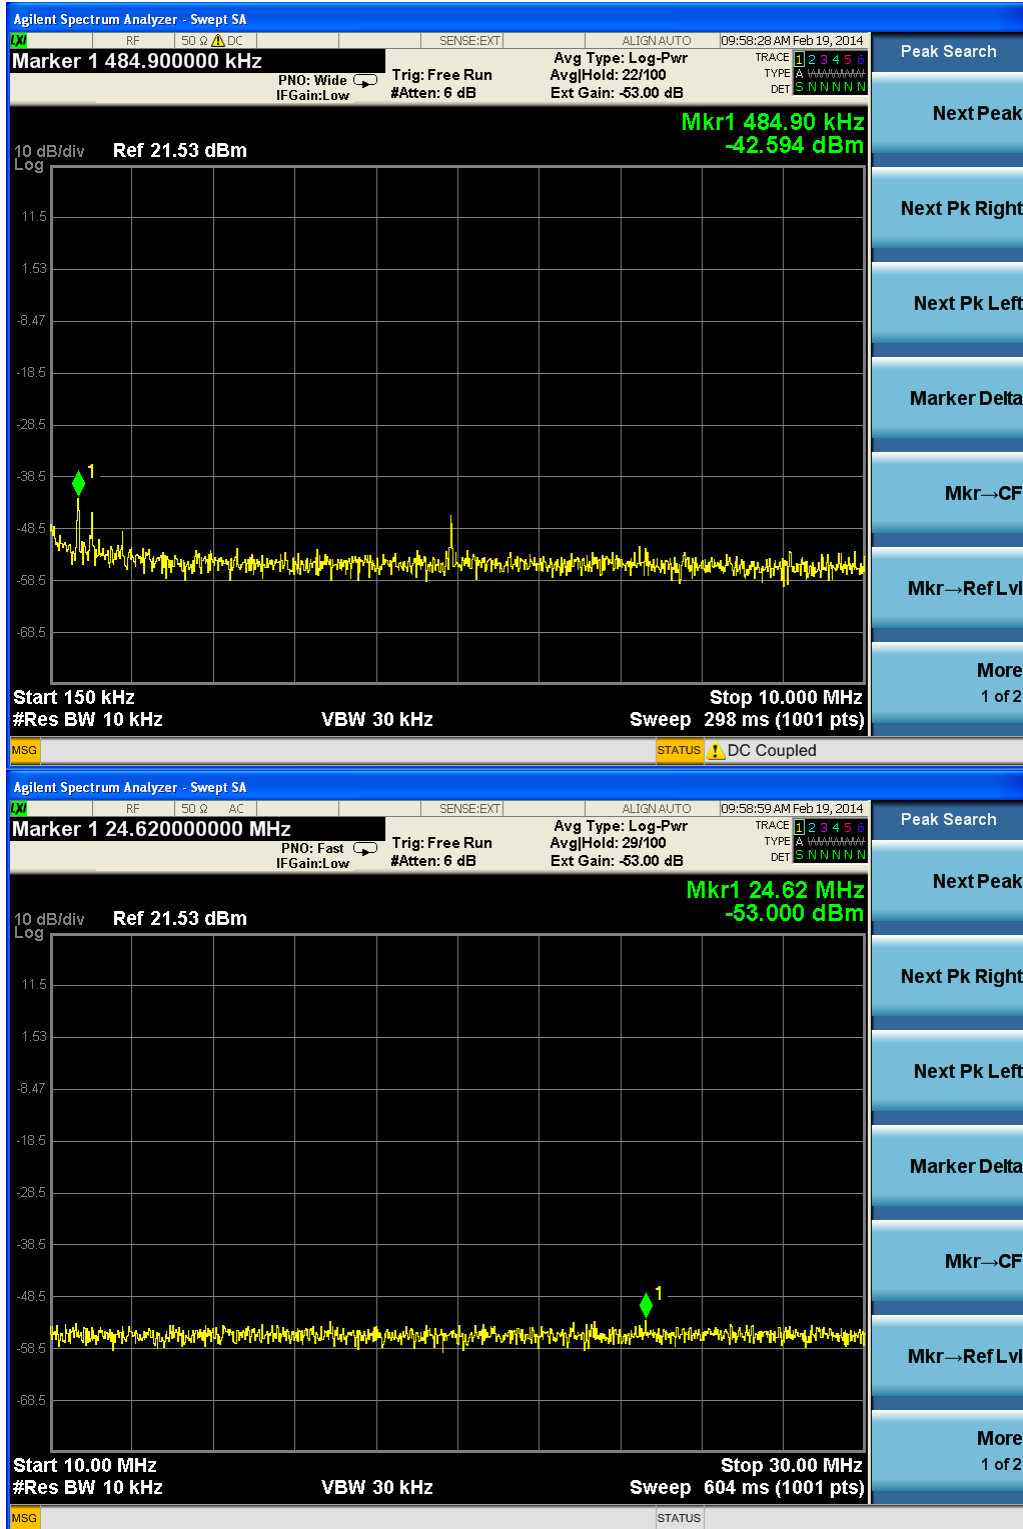


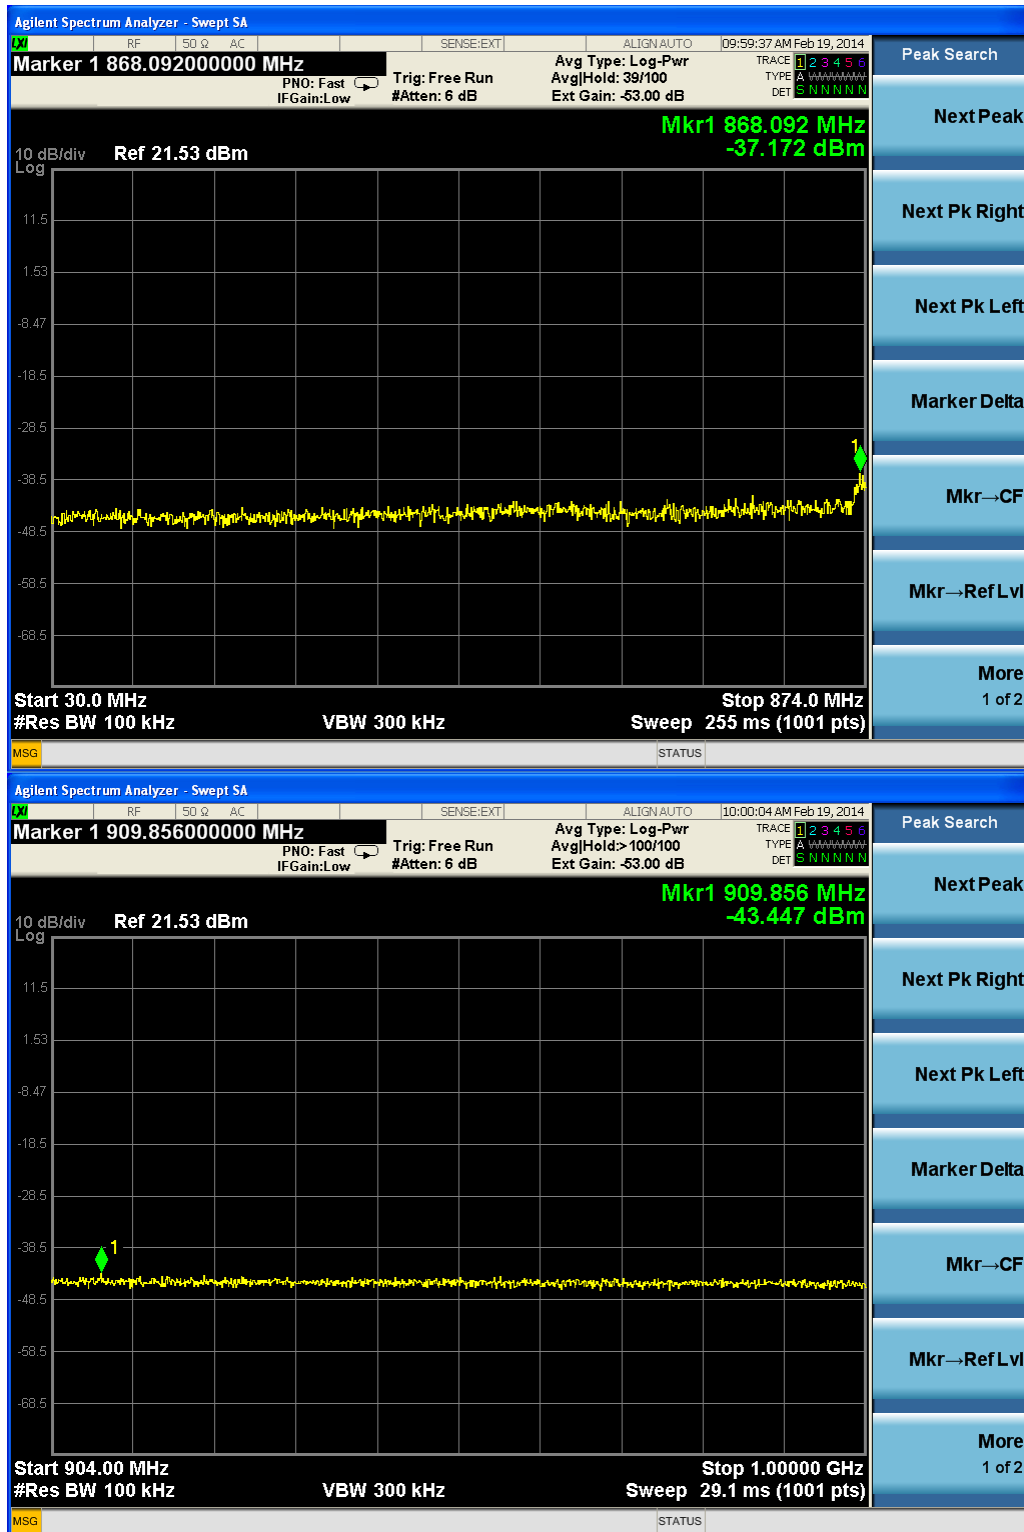


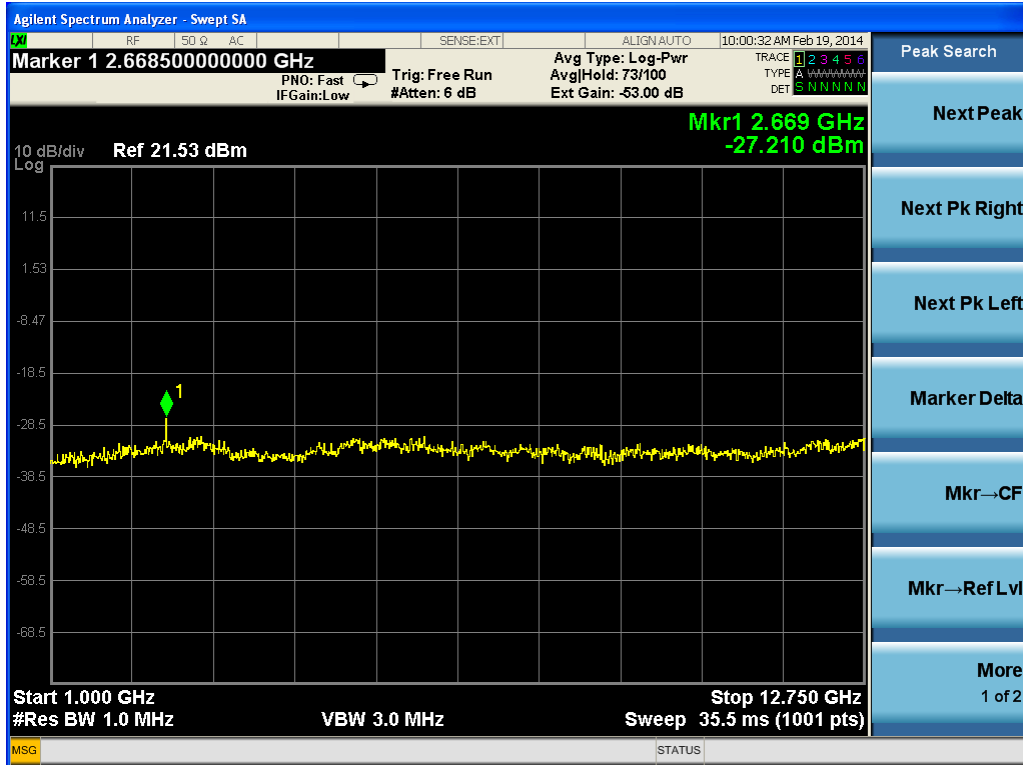


One carrier (working in bottom frequency)




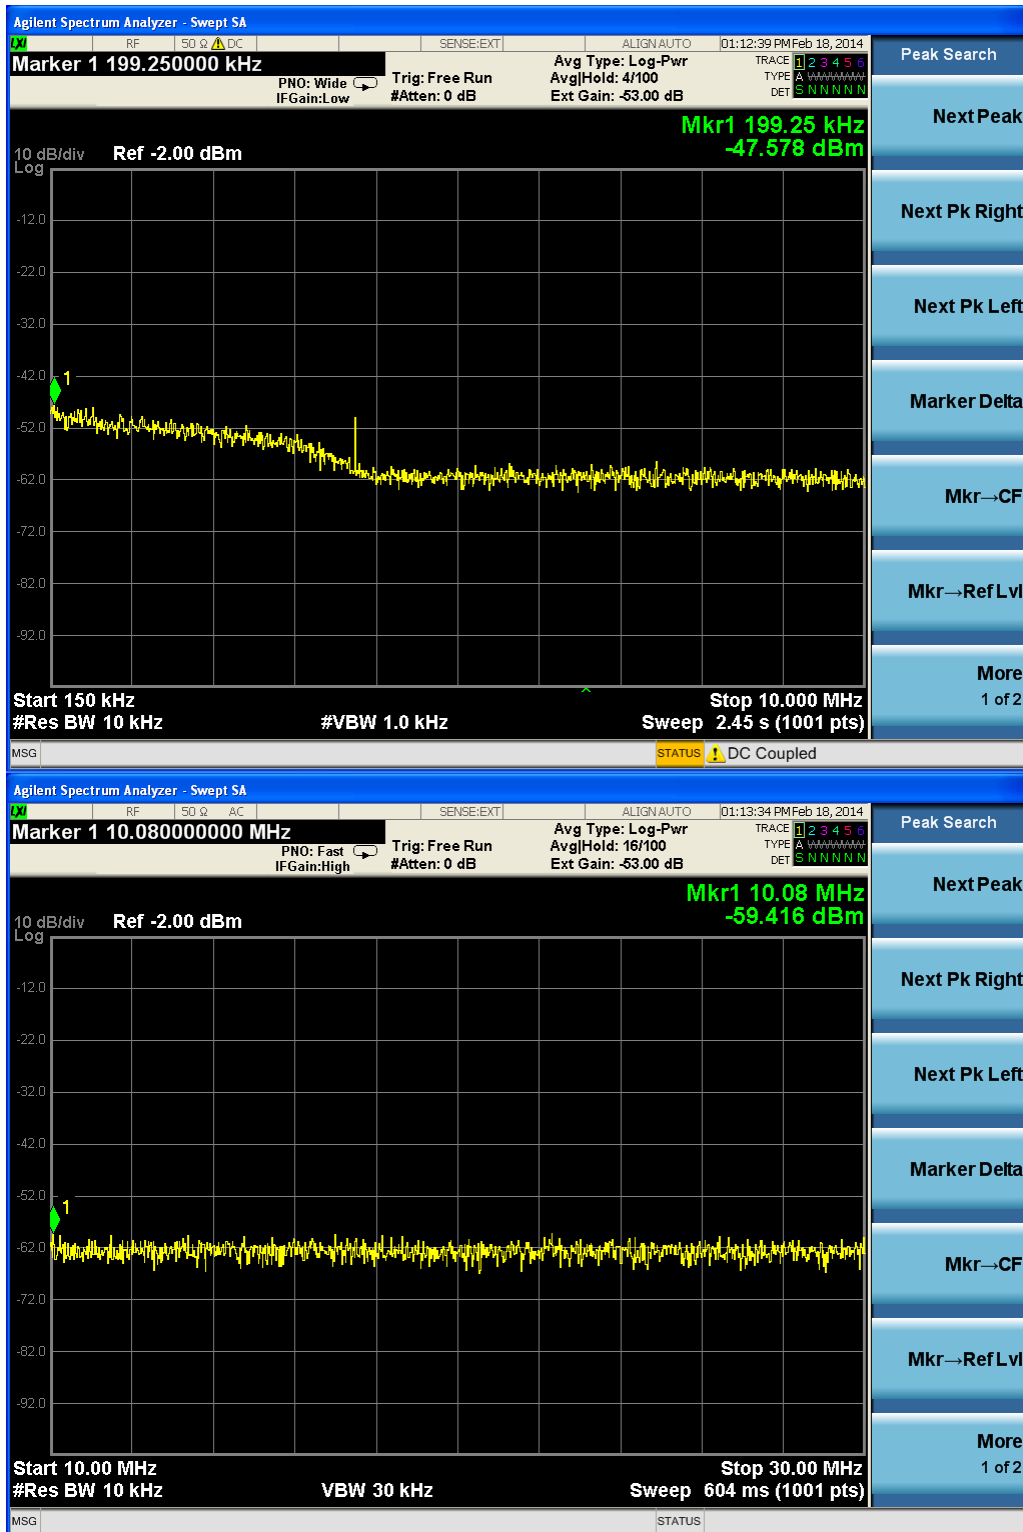


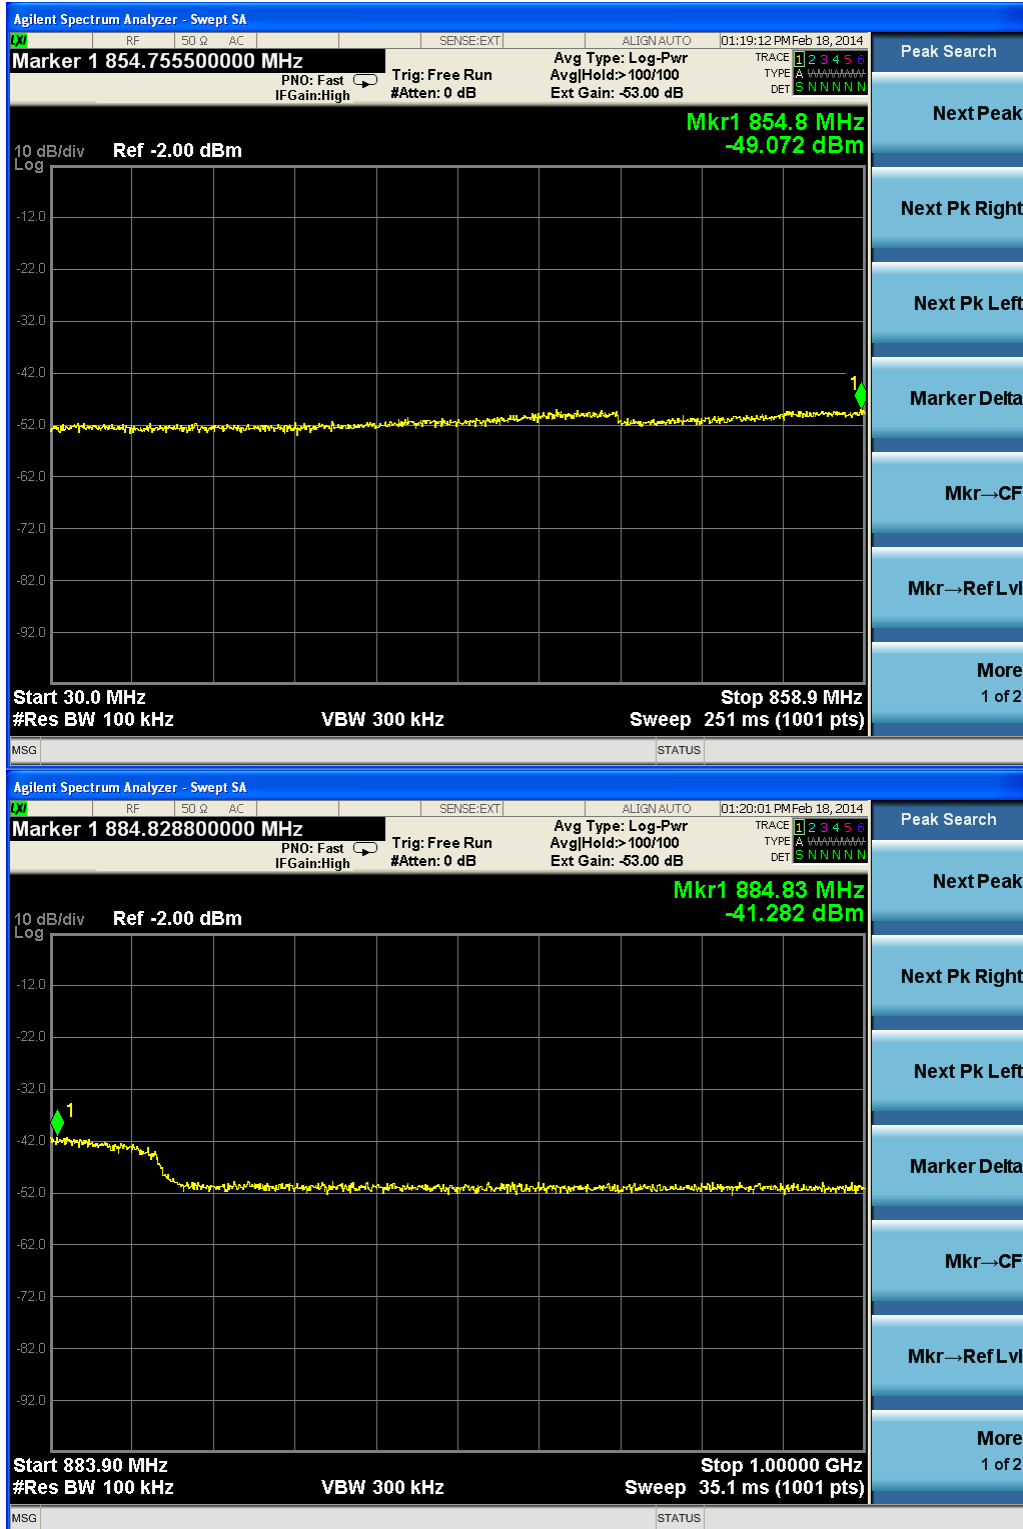


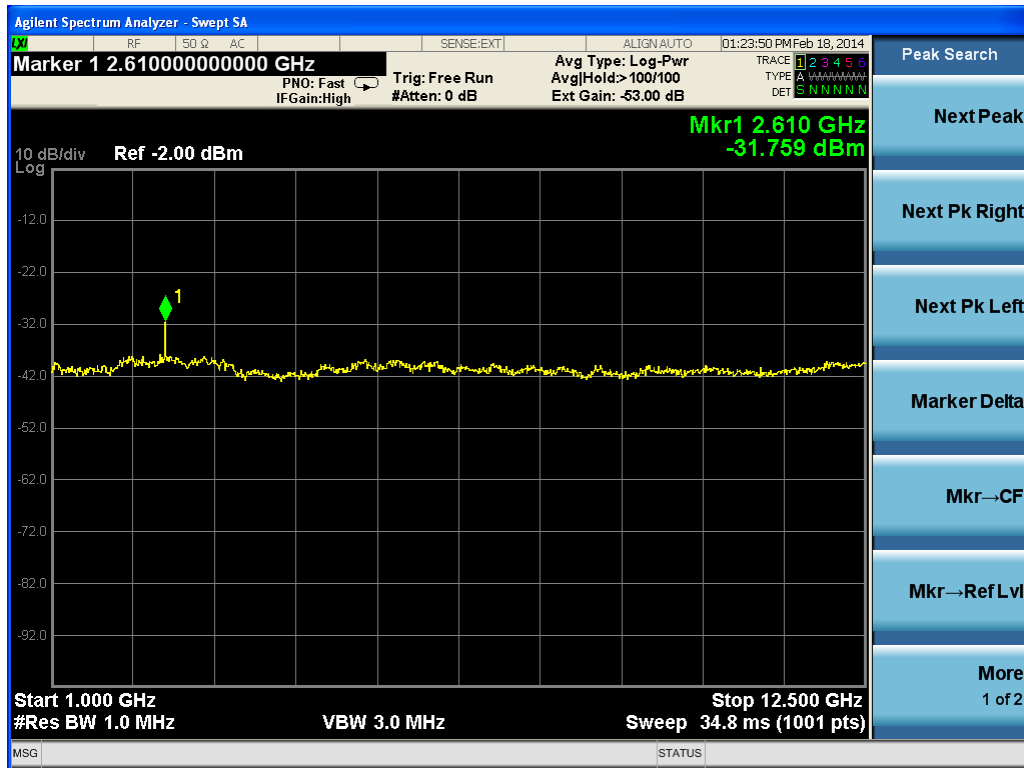


One carrier (working in middle frequency)

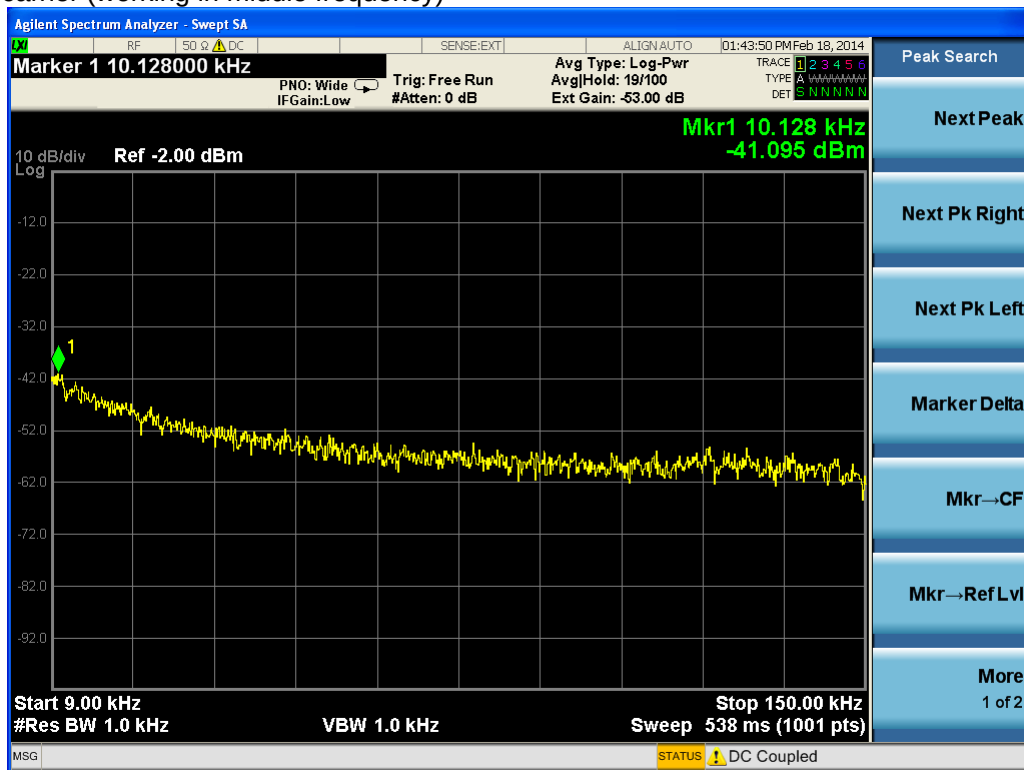

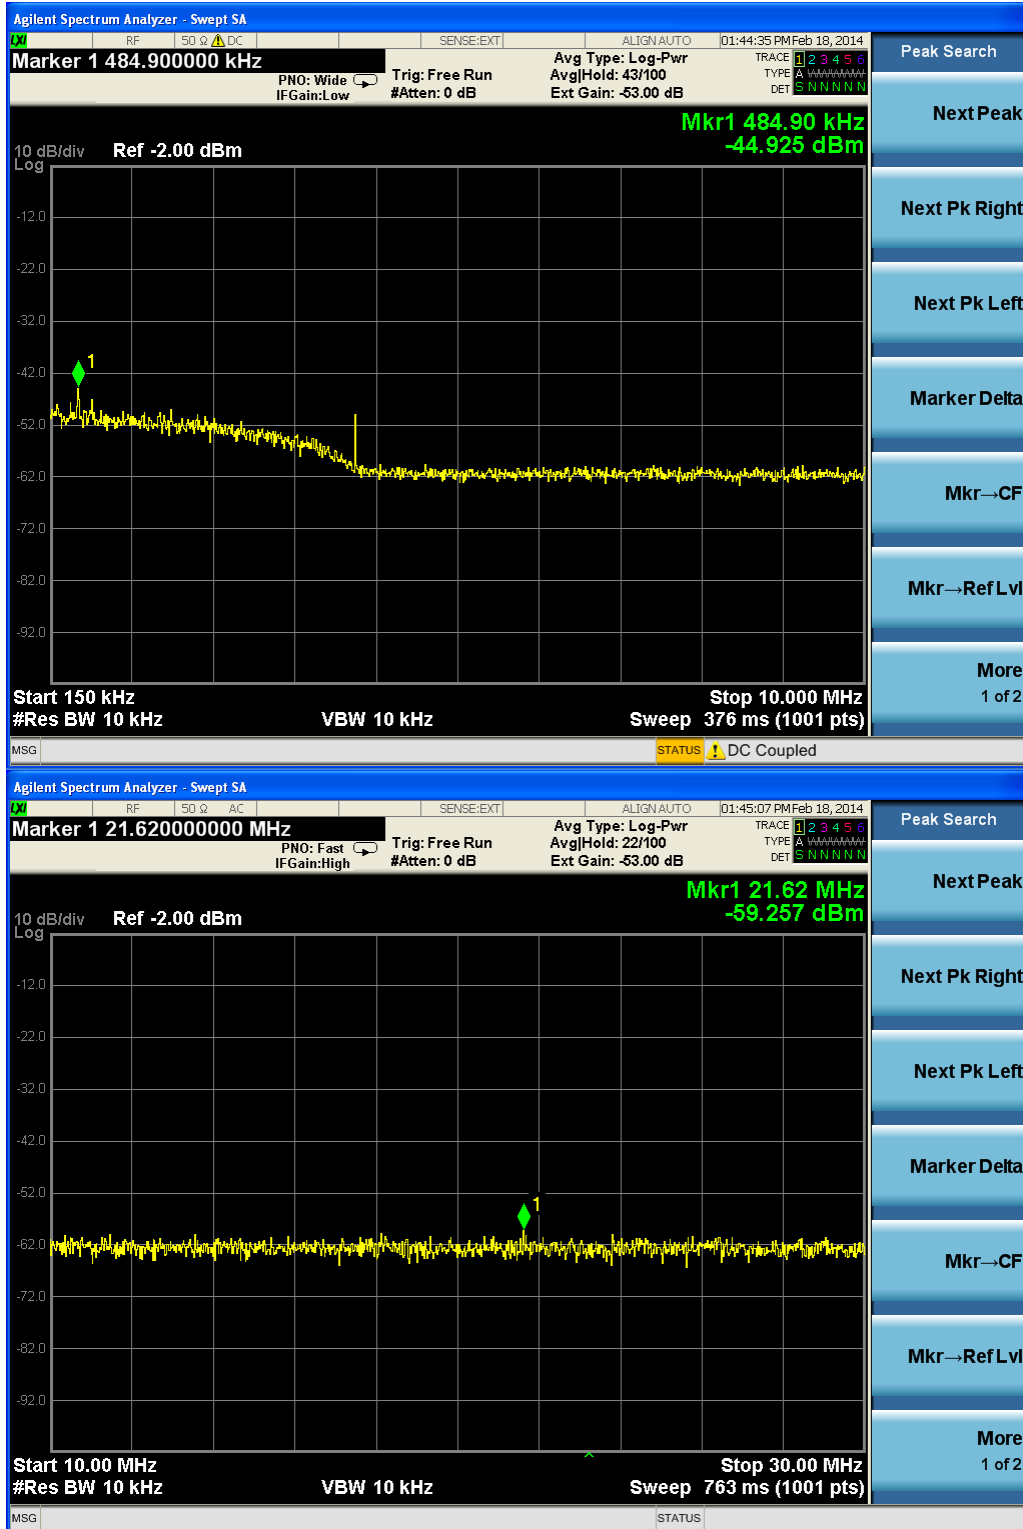

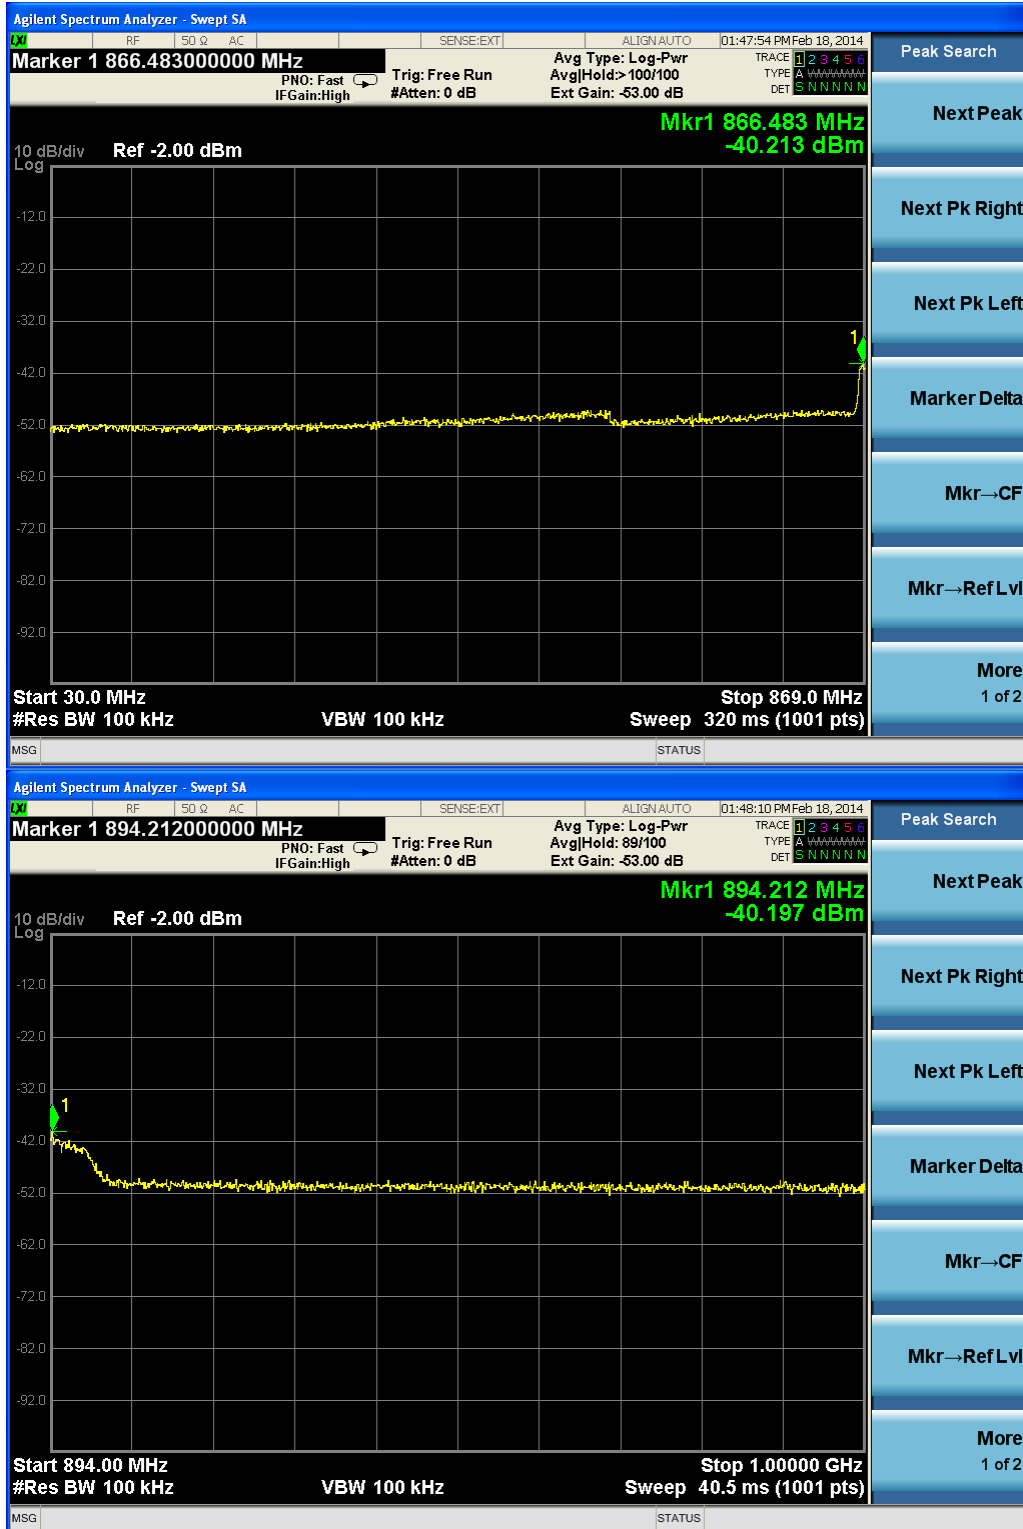


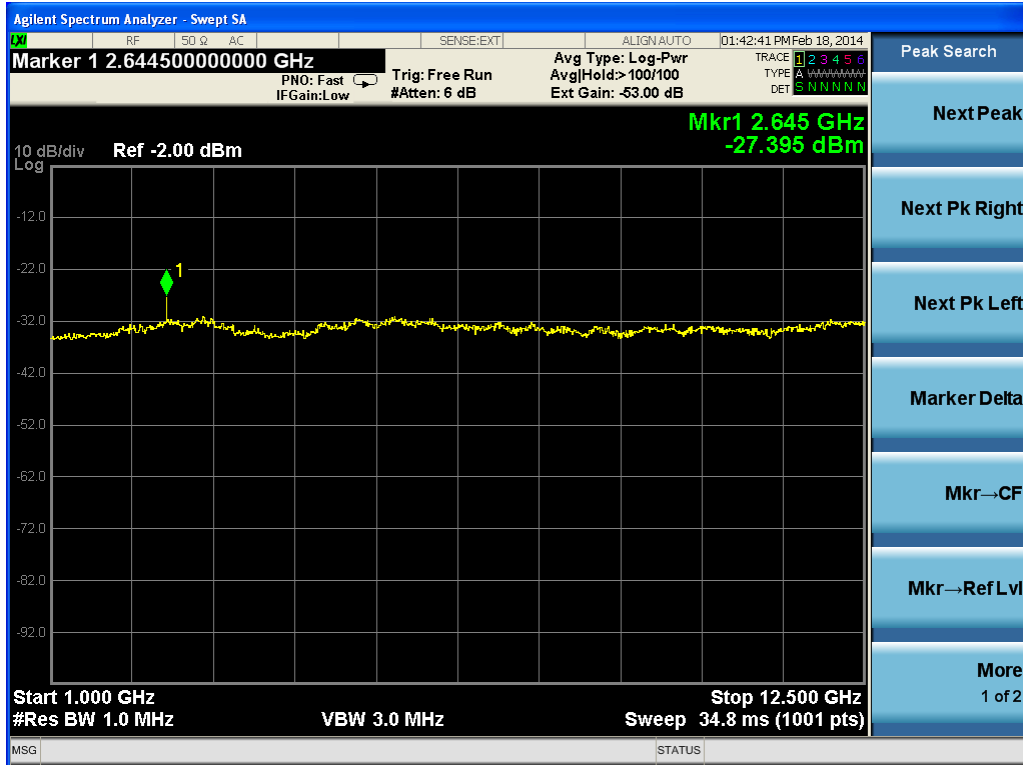


One carrier (working in top frequency)





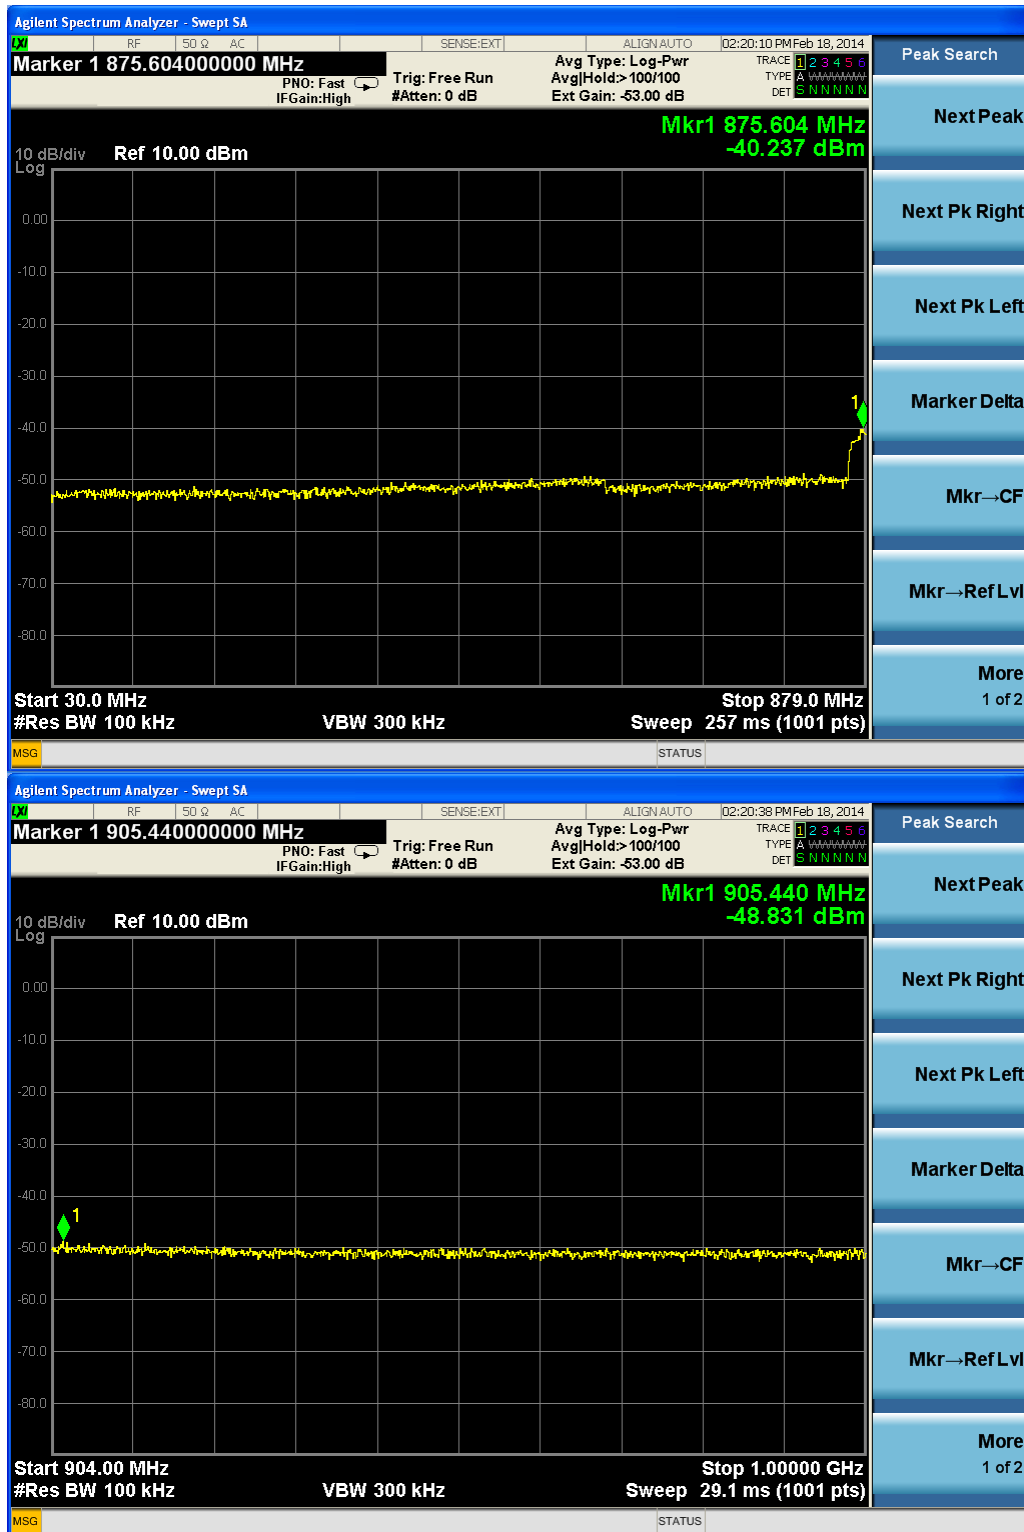

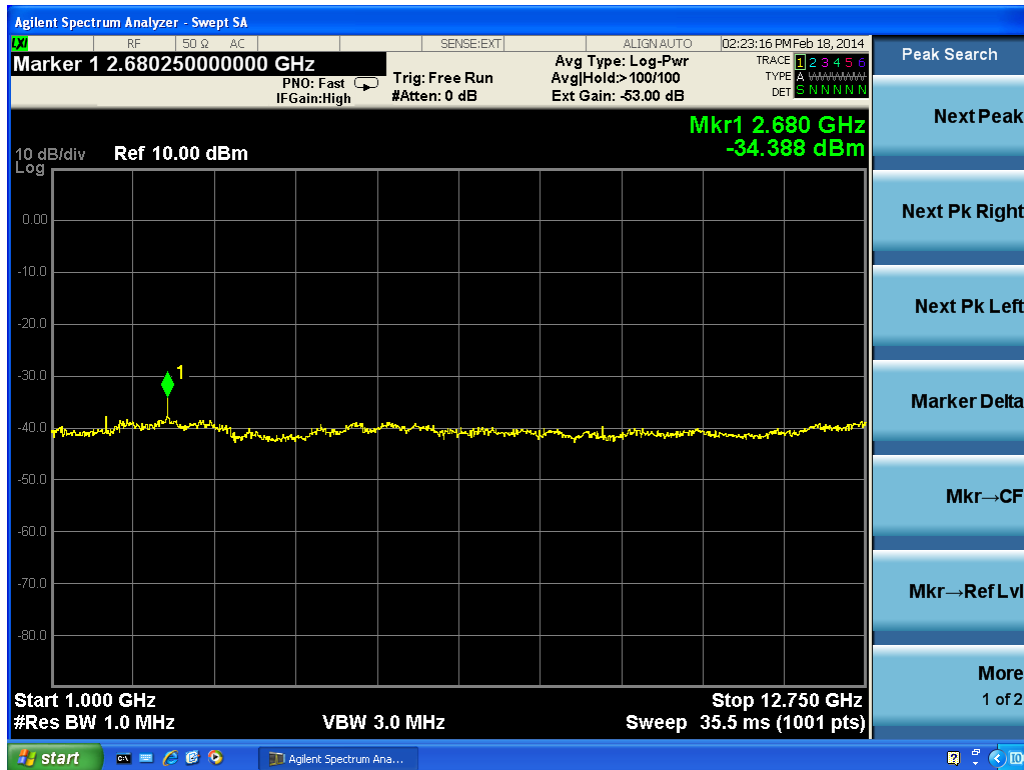

3.6 OCCUPIED BANDWIDTH

Applicable Standard: FCC §2.1049 §22.917

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9020A	MY51160170	2014-6-16	2015-6-16
Atten	40dB Attenuator	ATSI150-4-40	11300100204204	2014-4-8	2015-4-8
Forstar	Forstar RF Cable	002	1034	2014-4-8	2015-4-8


***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements, traceable to NIST.


Test Procedure

The RF out of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation. 99%Power bandwidth was recorded.

Environmental Conditions

Temperature:	20 ° C
Relative Humidity:	53%
ATM Pressure:	1009mbar

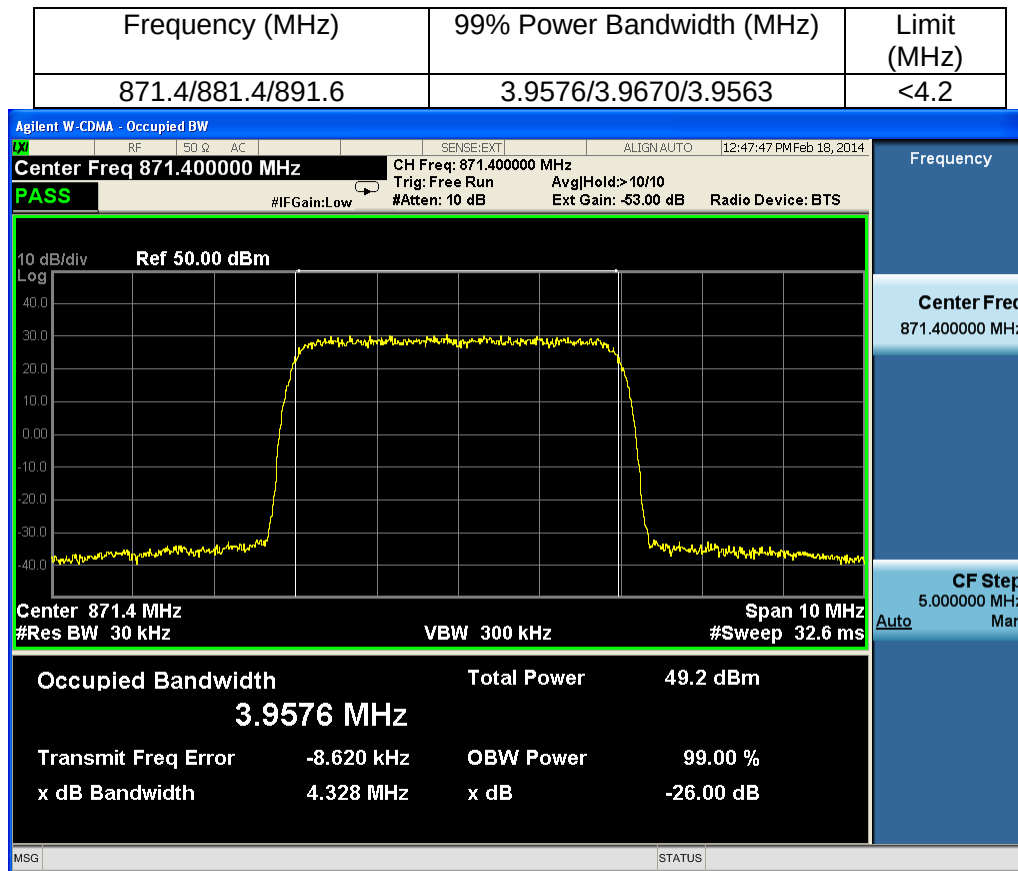Test Result: Pass**Test Mode:** Transmitting UMTS**Test Data**

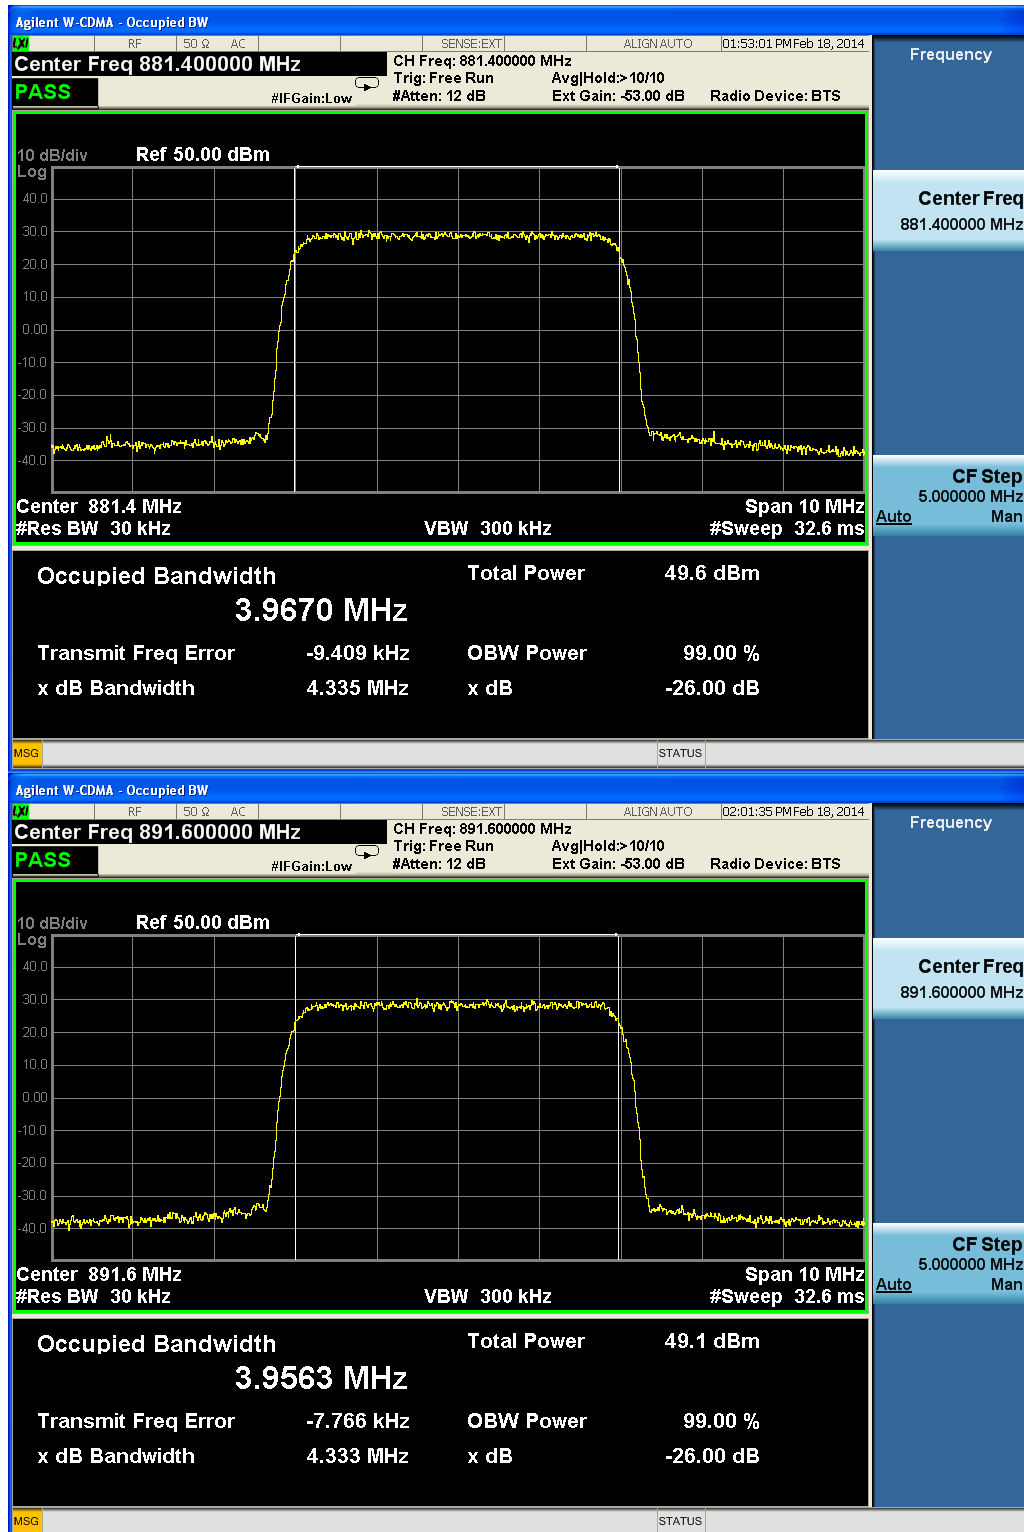

3.7 BAND EDGES

Applicable Standard: FCC §2.1051

According to §2.1051, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (p) by a factor of at least $43 + 10 \log(p)$ dB. The limit (dBm) should $< P - (43 + 10 \log(P)) = -13 \text{ dBm}$.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9020A	MY51160170	2014-6-16	2015-6-16
Atten	40dB Attenuator	ATSI150-4-40	11300100204204	2014-4-8	2015-4-8
Forstar	Forstar RF Cable	002	1034	2014-4-8	2015-4-8

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements , traceable to NIST.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.
The center of the spectrum analyzer was set to block edge frequency.


Test Data Environmental Conditions


Temperature:	20 °C
Relative Humidity:	53%
ATM Pressure:	1009mbar

Test Result: Pass**Test Mode:** Transmitting UMTS**Test Data**

For four carriers

Frequency channel	Max bandedge Emission (dBm)	Limit (dBm)
871.4/876.4/881.4/886.4	-27.733	-13.00
876.6/881.6/886.6/891.6	-28.356	-13.00

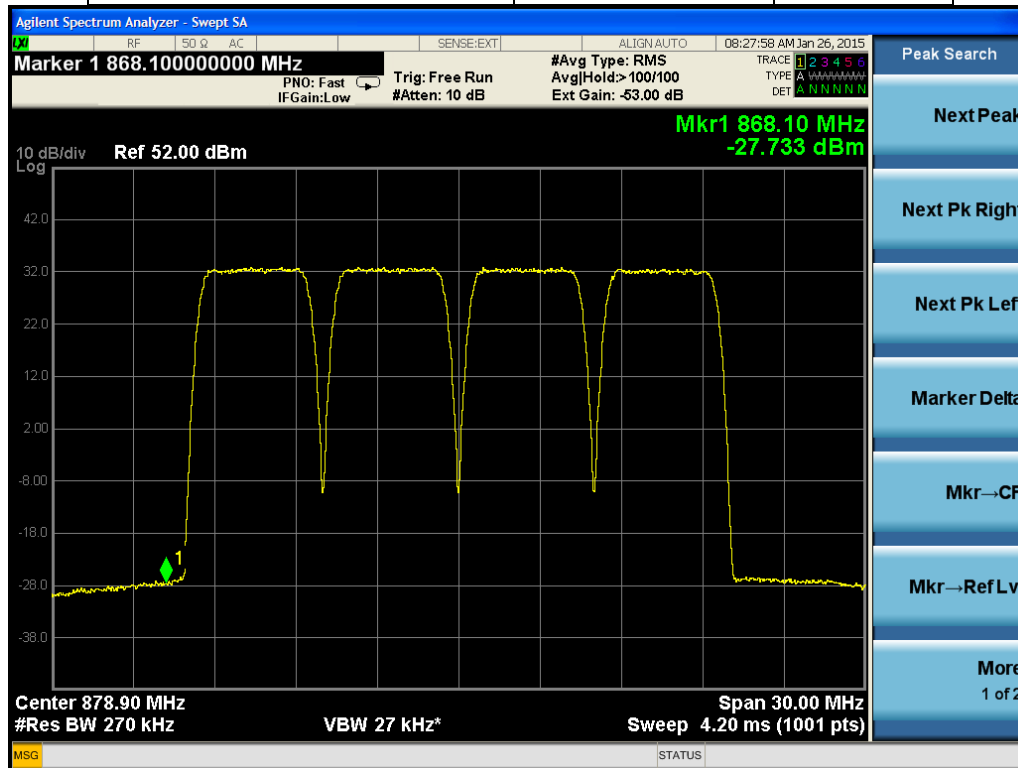

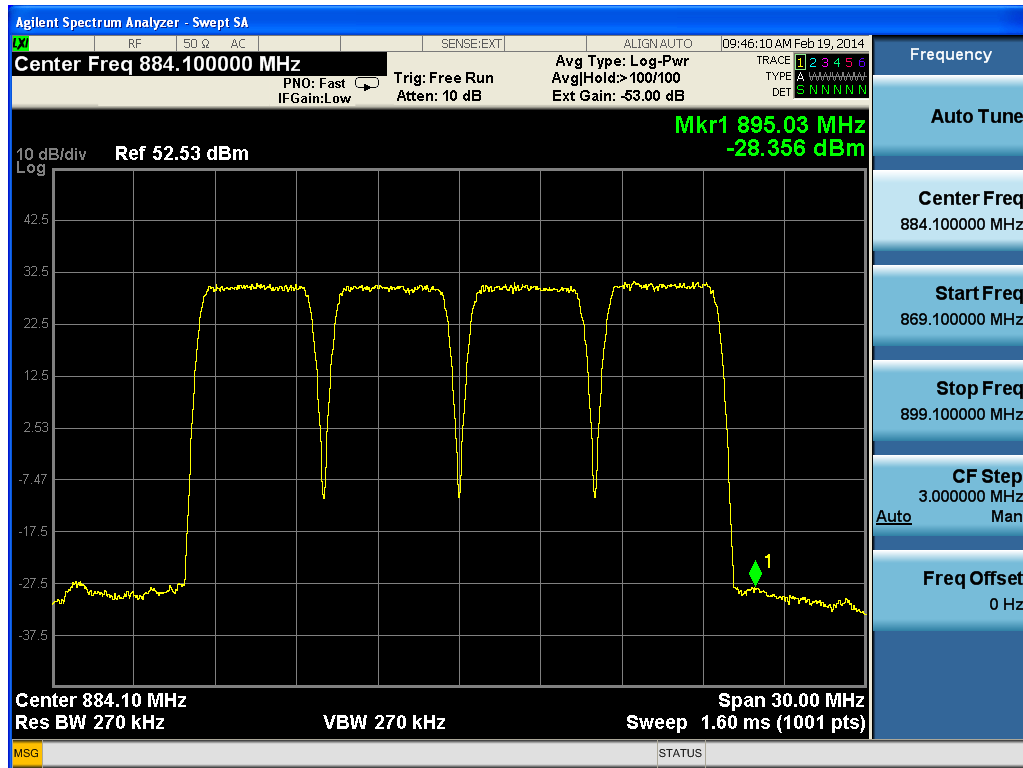


For three carriers


Frequency channel	Max bandedge Emission (dBm)	Limit (dBm)
871.4/876.4/881.4	-28.241	-13.00
876.4/881.4/886.4	-28.791	-13.00



For two carriers


Frequency channel	Max bandedge Emission (dBm)	Limit (dBm)
871.6/876.6	-31.325	-13.00
886.4/891.4	-30.768	-13.00

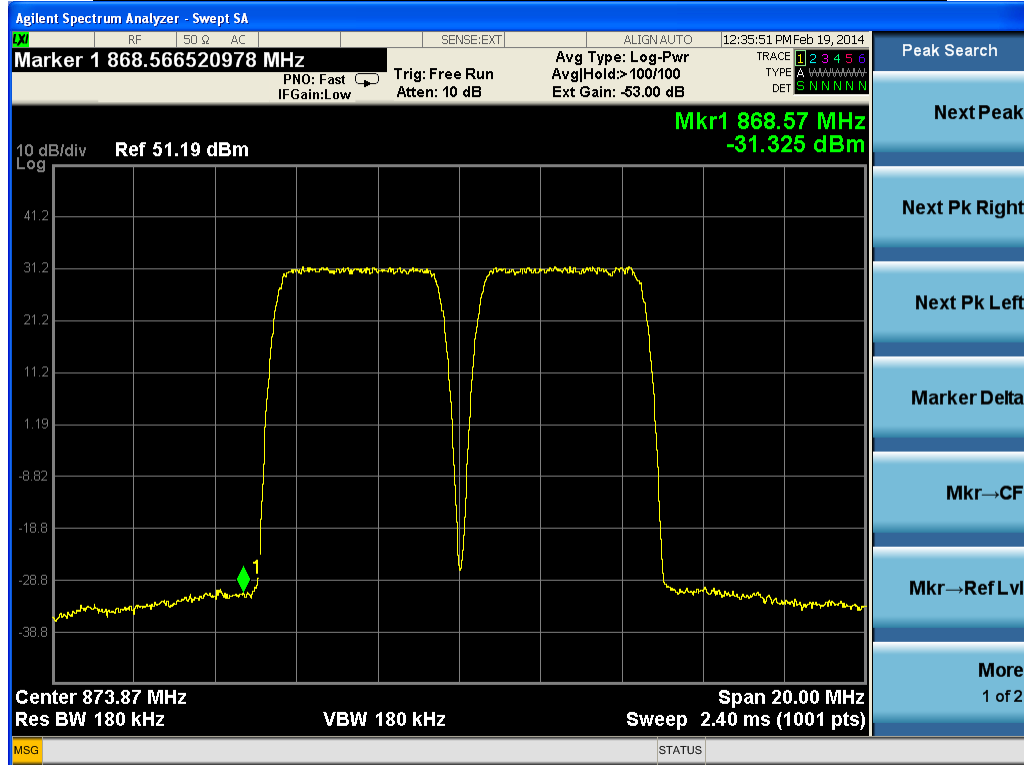

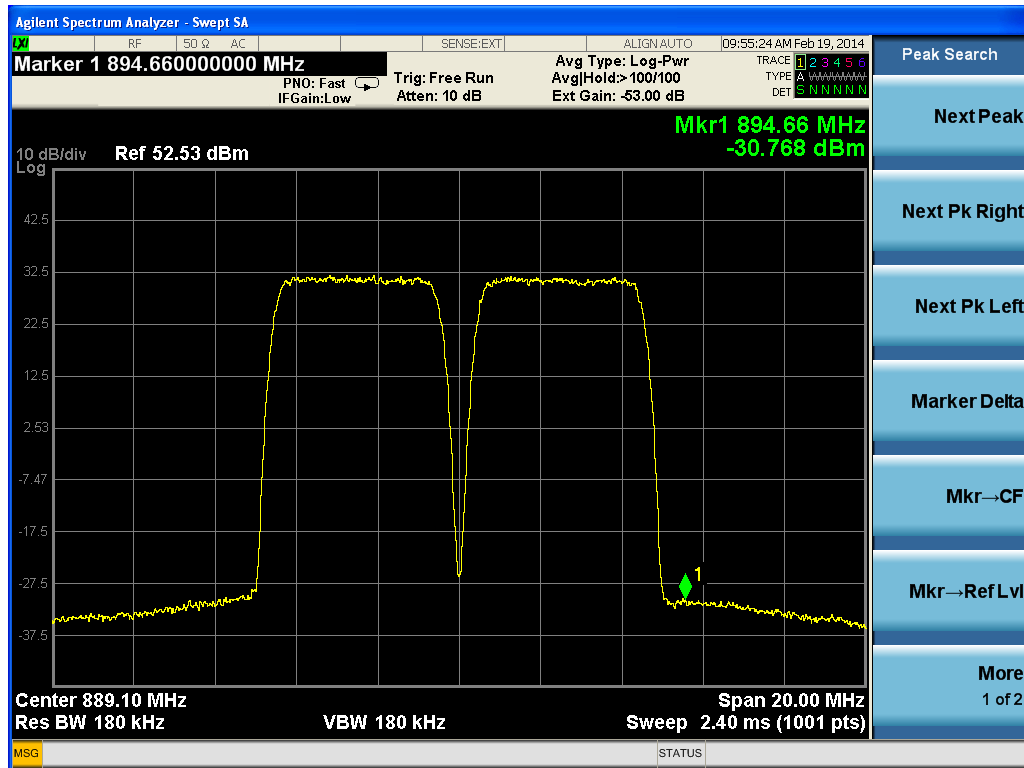

For One carrier

Frequency channel	Max bandedge Emission (dBm)	Limit (dBm)
871.4	-28.402	-13.00
891.6	-19.837	-13.00

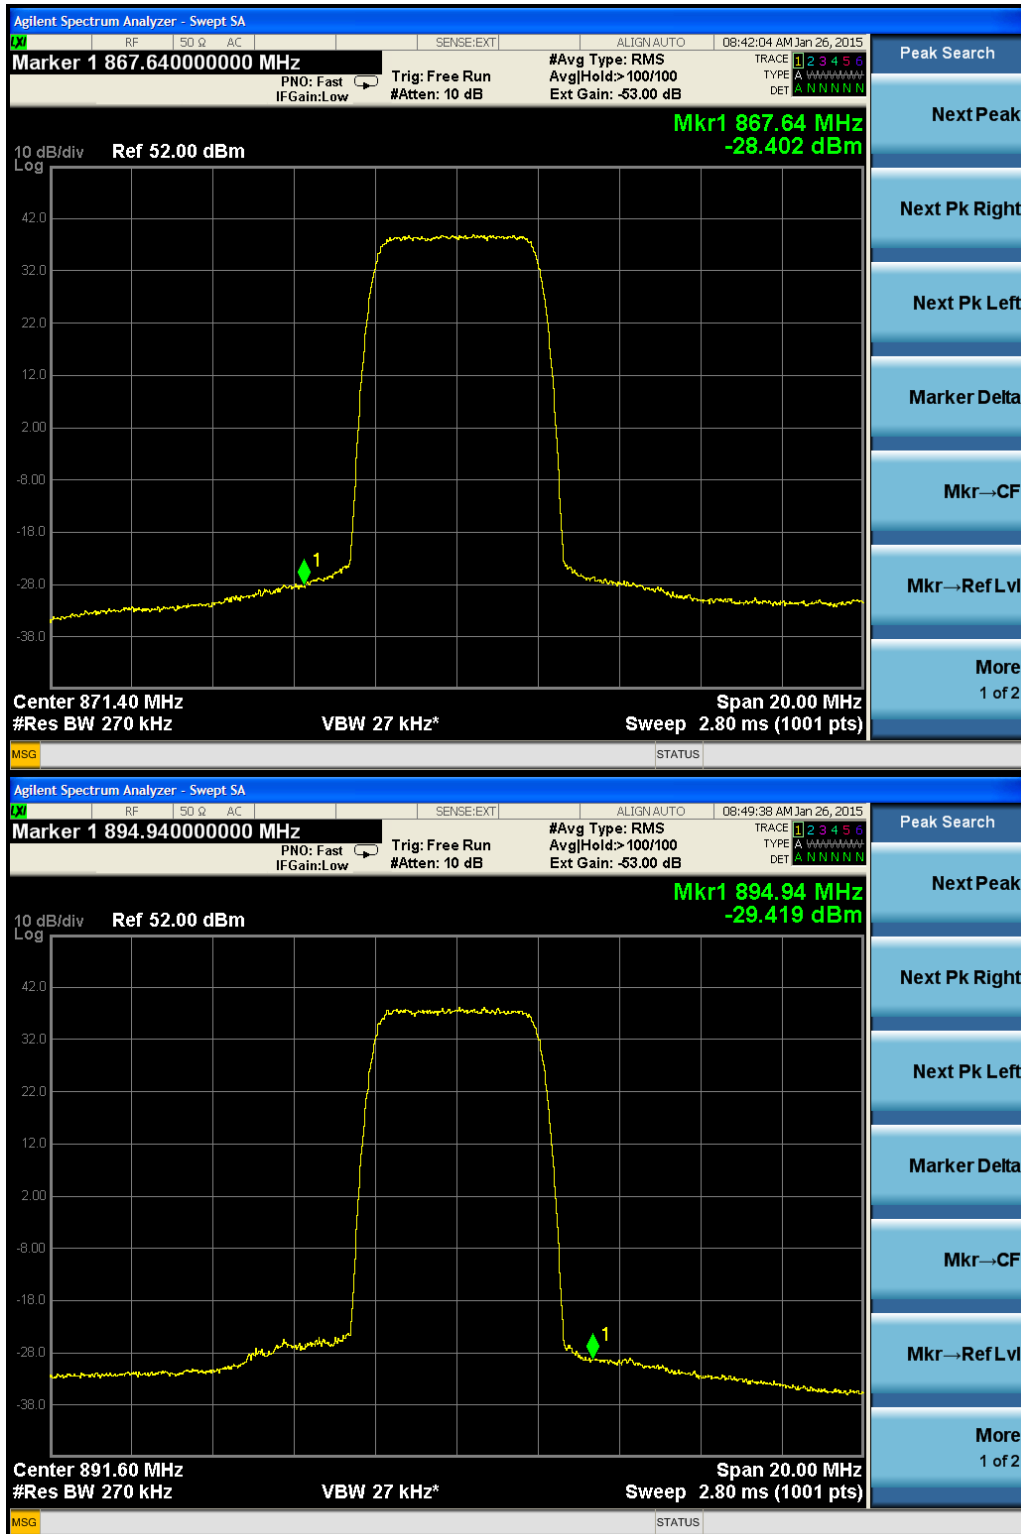

3.8 FREQUENCY STABILITY

Applicable Standard: FCC § 2.1055, § 22.355

Requirements: FCC § 2.1055 (a)(d), The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
GZ-ESPEC	Temperature Chamber	EW0470	06113028	2014-6-25	2015-6-25
Agilent	MXA Series Spectrum Analyzer	N9020A	MY51160170	2014-6-16	2015-6-16
Atten	40dB Attenuator	ATSI150-4-40	11300100204204	2014-4-8	2015-4-8
Forstar	Forstar RF Cable	002	1034	2014-4-8	2015-4-8

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements, traceable to NIST.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to a Spectrum Analyzer via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 150 minutes, the frequency output was recorded from the counter.

Frequency Stability vs. Voltage: An external variable DC power supply Source. The voltage was set to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the end point. The output frequency was recorded for each voltage.

Environmental Conditions

Normal condition:	25° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

Test Result: Pass**Test Mode:** Transmitting UMTS**Test Data****Frequency Stability Versus Temperature**

Frequency Stability vs Temperature					
Temperature (°C)	Power Supplied (V _{dc})	Frequency Measure Error (Hz)	Error (ppm)	Limit (ppm)	Result
B(871.4MHz)					
-40	-48	3.4	0.0039	0.02	PASS
-30	-48	-2.1	-0.0024	0.02	PASS
-20	-48	-4.3	-0.0049	0.02	PASS
-10	-48	2.7	0.0031	0.02	PASS
0	-48	-3.2	-0.0037	0.02	PASS
10	-48	2.9	0.0034	0.02	PASS
20	-48	3.1	0.0036	0.02	PASS
30	-48	2.9	0.0033	0.02	PASS
40	-48	-1.9	-0.0022	0.02	PASS
50	-48	-4.2	-0.0048	0.02	PASS
55	-48	4.1	0.0047	0.02	PASS
M(881.4MHz)					
-40	-48	3.7	0.0042	0.02	PASS
-30	-48	2.9	0.0033	0.02	PASS
-20	-48	-2.8	-0.0032	0.02	PASS
-10	-48	4.3	0.0049	0.02	PASS
0	-48	-2.8	-0.0032	0.02	PASS
10	-48	4.4	0.0049	0.02	PASS
20	-48	-2.8	-0.0032	0.02	PASS
30	-48	-3.7	-0.0042	0.02	PASS

40	-48	-3.6	-0.0041	0.02	PASS
50	-48	4.7	0.0053	0.02	PASS
55	-48	4.2	0.00477	0.02	PASS
T(891.6MHz)					
-40	-48	-4.6	-0.0052	0.02	PASS
-30	-48	-4.9	-0.0055	0.02	PASS
-20	-48	3.2	0.0036	0.02	PASS
-10	-48	3.2	0.0036	0.02	PASS
0	-48	2.5	0.0028	0.02	PASS
10	-48	2.9	0.0033	0.02	PASS
20	-48	-2.3	-0.0026	0.02	PASS
30	-48	-2.7	-0.0030	0.02	PASS
40	-48	3.5	0.0039	0.02	PASS
50	-48	4.3	0.0048	0.02	PASS
55	-48	3.2	0.0036	0.02	PASS

Frequency Stability Versus Voltage

Frequency Stability vs. Voltage					
VoltageV _{dc}	Temperature °C	Frequency Measure Error Hz	Error ppm	Limit ppm	Result
B(871.4MHz)					
40	20	2.7	0.0031	0.02	PASS
44	20	-2.4	-0.0028	0.02	PASS
47	20	-3.9	-0.0045	0.02	PASS
50	20	-4.1	-0.0047	0.02	PASS
53	20	-3.7	-0.0043	0.02	PASS
56	20	-1.7	-0.0019	0.02	PASS
57	20	2.4	0.0028	0.02	PASS
M(881.4MHz)					
40	20	2.4	0.0027	0.02	PASS
44	20	-2.7	-0.0031	0.02	PASS
47	20	-2.3	-0.0026	0.02	PASS
50	20	3.8	0.0043	0.02	PASS
53	20	-2.8	-0.0032	0.02	PASS
56	20	-3.9	-0.0044	0.02	PASS

57	20	4.5	0.0051	0.02	PASS
T(891.6MHz)					
40	20	2.3	0.0026	0.02	PASS
44	20	-2.5	-0.0028	0.02	PASS
47	20	3.8	0.0043	0.02	PASS
50	20	-2.8	-0.0031	0.02	PASS
53	20	-2.7	-0.0030	0.02	PASS
56	20	4.2	0.0047	0.02	PASS
57	20	3.1	0.0035	0.02	PASS

4 GSM MODE TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§2.1046 ,§22.913	Transmitter output Power	Compliant
§2.1091 ,§1.1310	RF Exposure	Compliant
§2.1047	Modulation Characteristic	Compliant
§2.1053, §22.917	Spurious Radiated Emissions	Compliant
§2.1051, §22.917	Spurious Emissions AT Antenna Terminals	Compliant
§2.1049 §22.917	Occupied Bandwidth	Compliant
§2.1051, §22.917	Band Edge	Compliant
§ 2.1055, §22.355	Frequency stability	Compliant

4.1 TRANSMITTER OUTPUT POWER

Applicable Standard: FCC §2.1046 §22.913


According to FCC §2.1046 & §22.913, the ERP (equivalent radiated power) must not exceed 500 Watts.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9020A	MY51160170	2014-6-16	2015-6-16
Atten	40dB Attenuator	ATSI150-4-40	11300100204204	2014-4-8	2015-4-8
Forstar	Forstar RF Cable	002	1034	2014-4-8	2015-4-8

***statement of traceability:** ZTE Corporation Reliability Testing Center attests that all calibration has been performed per the NVLAP requirements, traceable to NIST.

Test Procedure

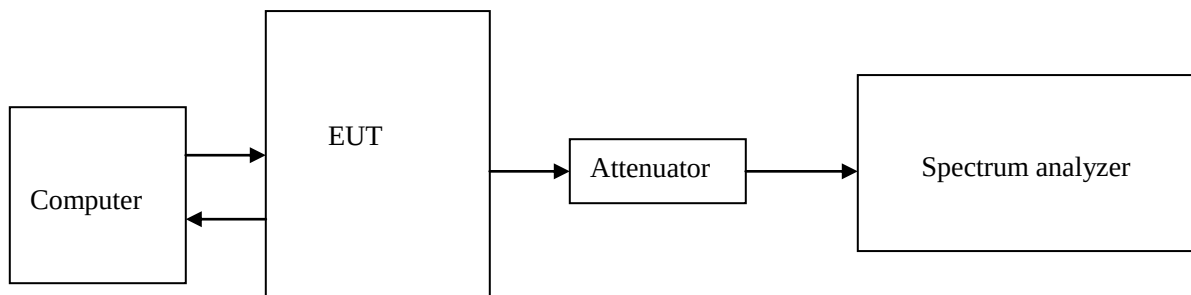

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation. External attenuation Loss is 30dB, Cable Loss is about 2dB

Environmental Conditions

Temperature:	20 °C
Relative Humidity:	53 %
ATM Pressure:	1009 mbar


Test Result: Pass



Test Mode: Transmitting GSM

Test Data:


Six carriers



modulation	Center Freq. (MHz)	Frequency (MHz)	Max output Power in dBm
8PSK	870.7	869.2/869.8/ 870.4 /871 /871.6/ 872.2	46.93
	882.9	881.4/882/882.6/883.2/883.8/884.4	47.07
	892.3	890.8/891.4/892/892.6/893.2/893.8	47.00

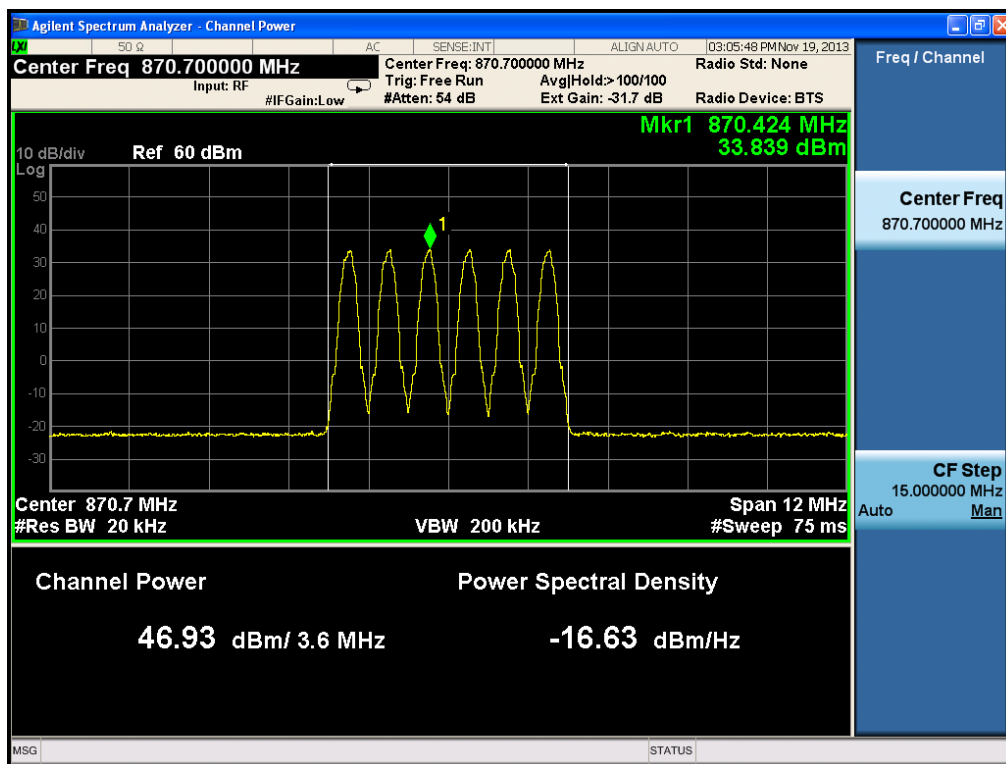

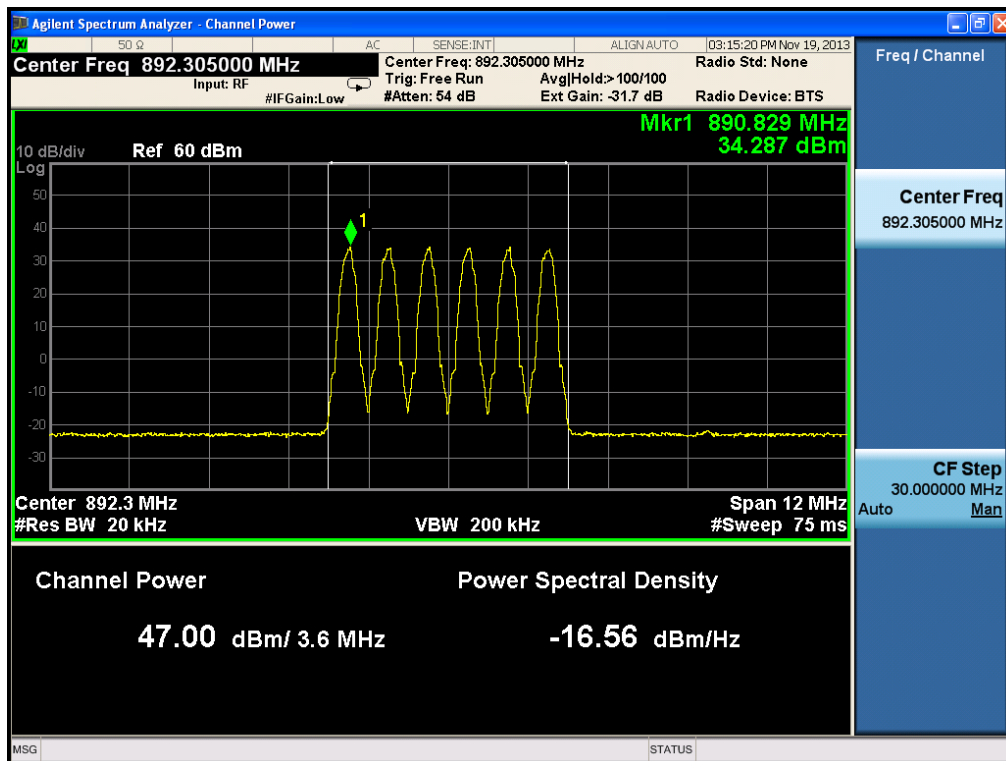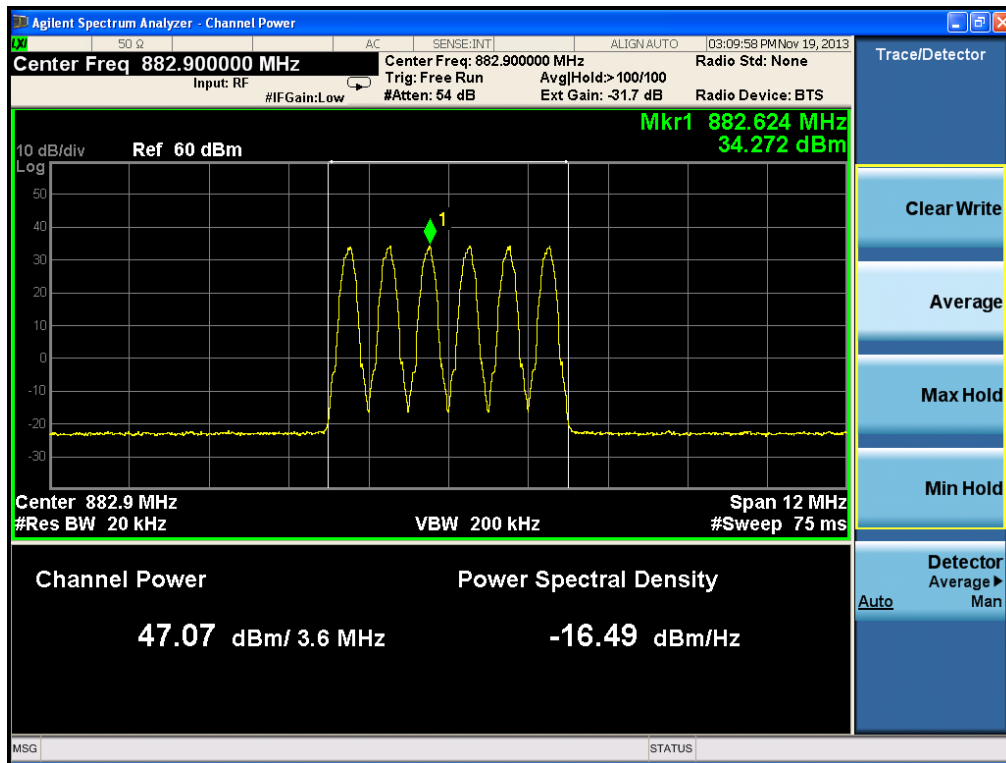


modulation	Center Freq. (MHz)	Frequency (MHz)	Max output Power in dBm
GMSK	870.7	869.2/869.8/ 870.4 /871 /871.6/ 872.2	48.96
	882.9	881.4/882/882.6/883.2/883.8/884.4	49.09
	892.3	890.8/891.4/892/892.6/893.2/893.8	48.99


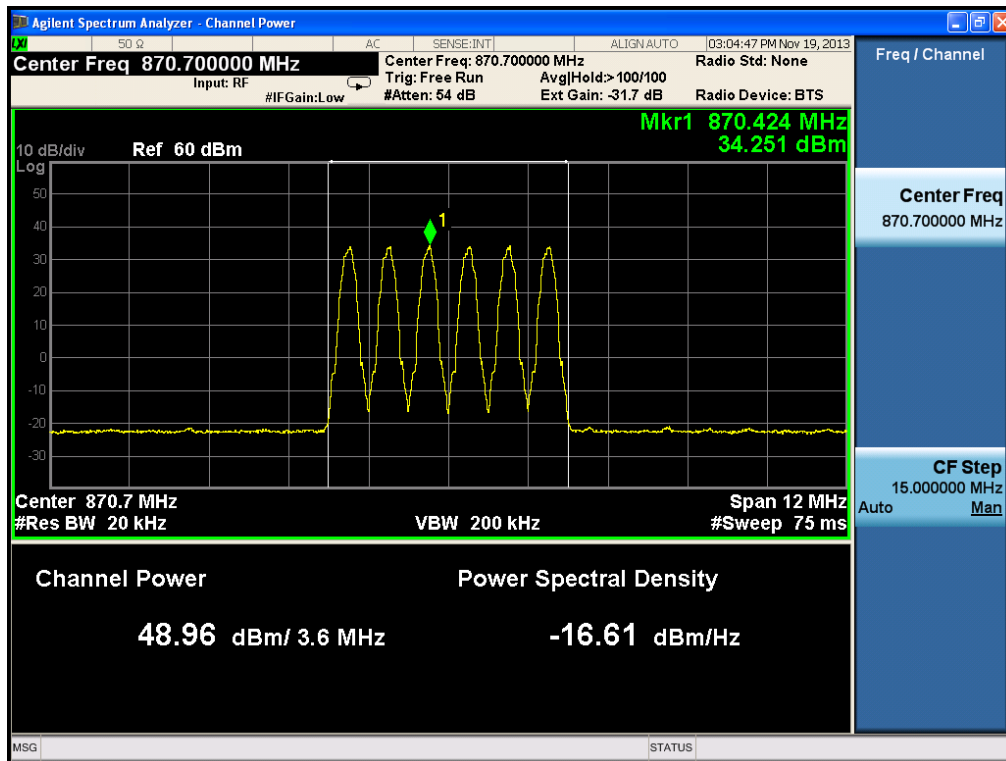


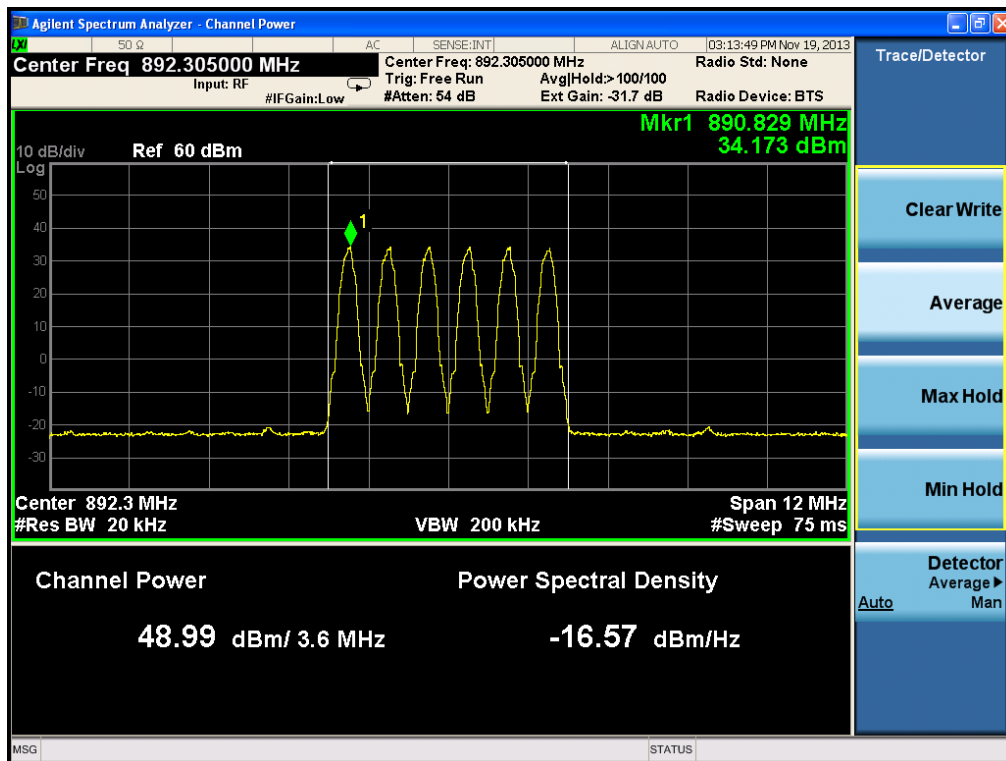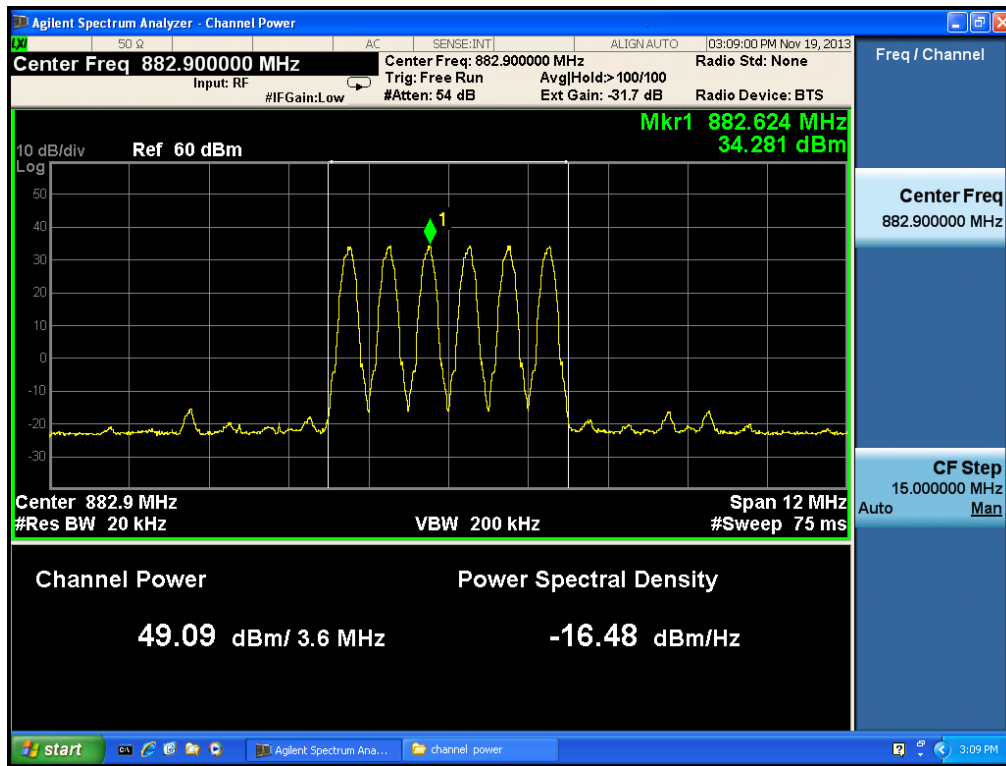


Five carriers



modulation	Center Freq. (MHz)	Frequency (MHz)	Max output Power in dBm
8PSK	870.4	869.2/869.8/ 870.4 /871 /871.6	46.95
	882.6	881.4/882/882.6/883.2/883.8	47.13
	892.6	891.4/892/892.6/893.2/893.8	47.06

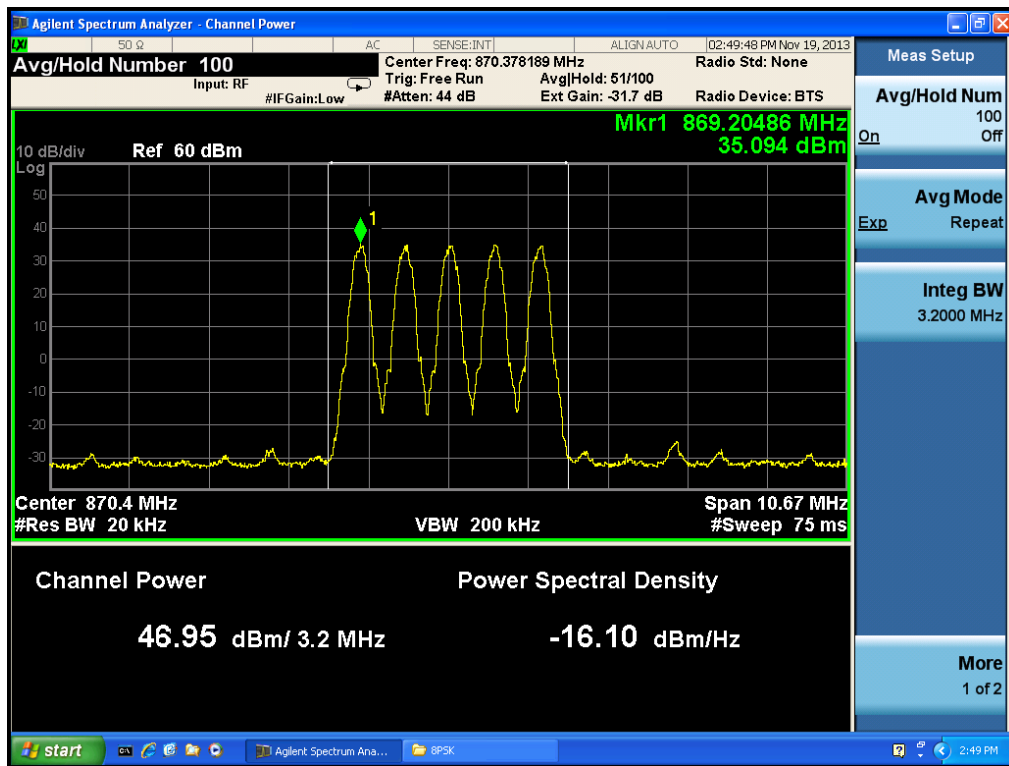

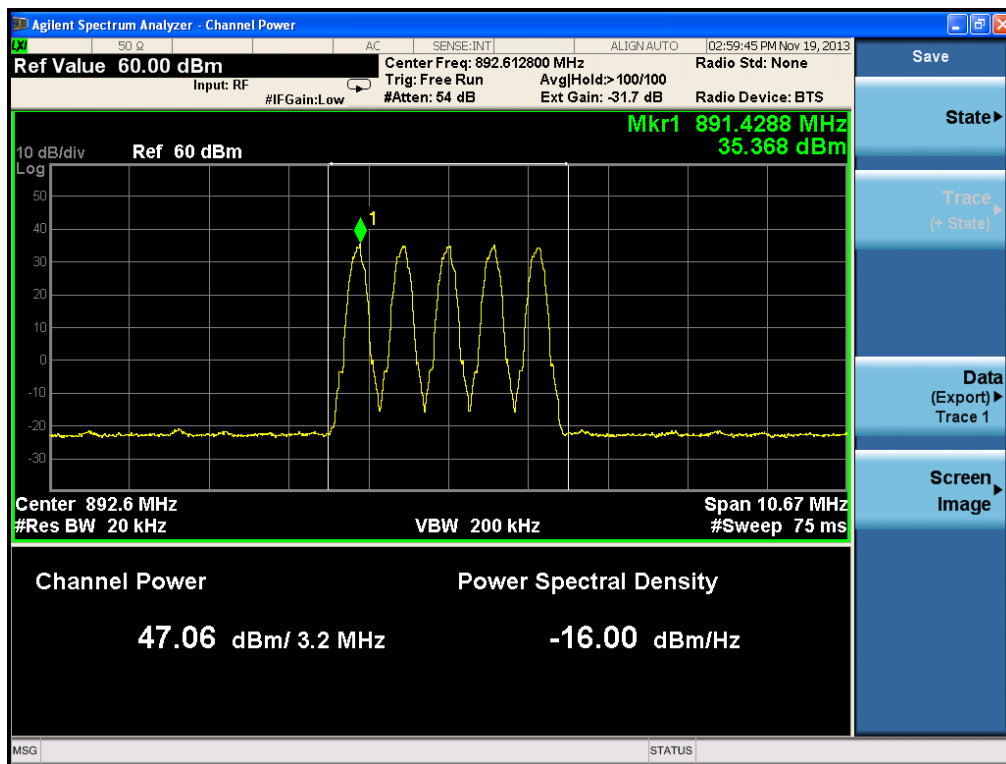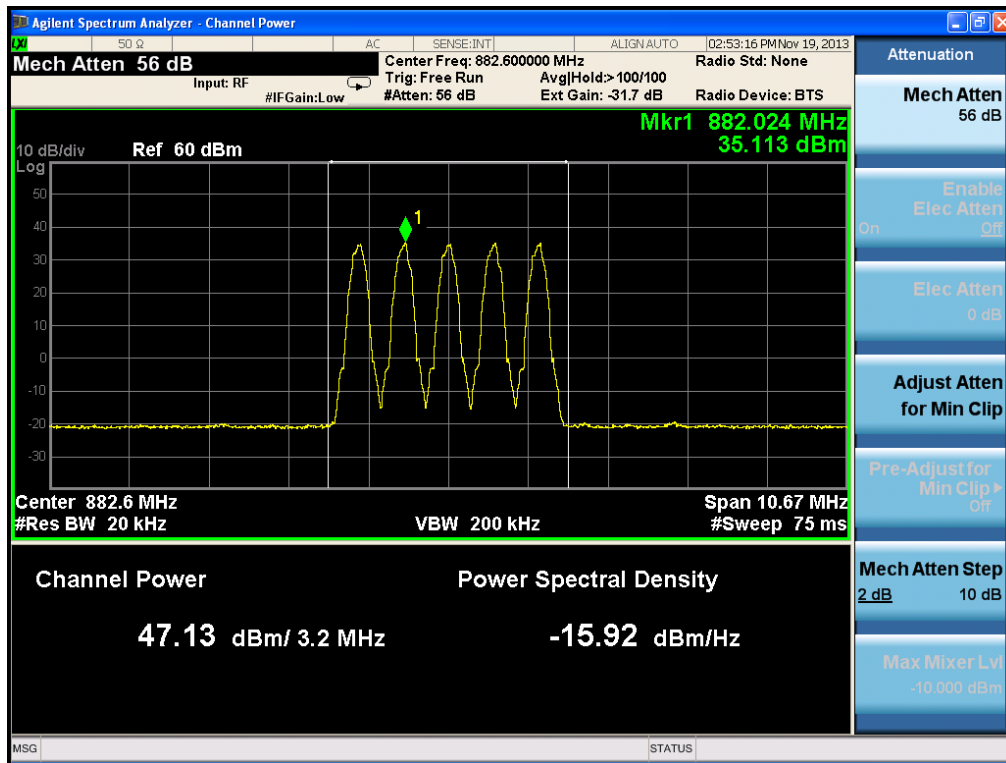

modulation	Center Freq. (MHz)	Frequency (MHz)	Max output Power in dBm
GMSK	870.4	869.2/869.8/ 870.4 /871 /871.6	48.94
	882.6	881.4/882/882.6/883.2/883.8	49.14
	892.6	891.4/892/892.6/893.2/893.8	49.05

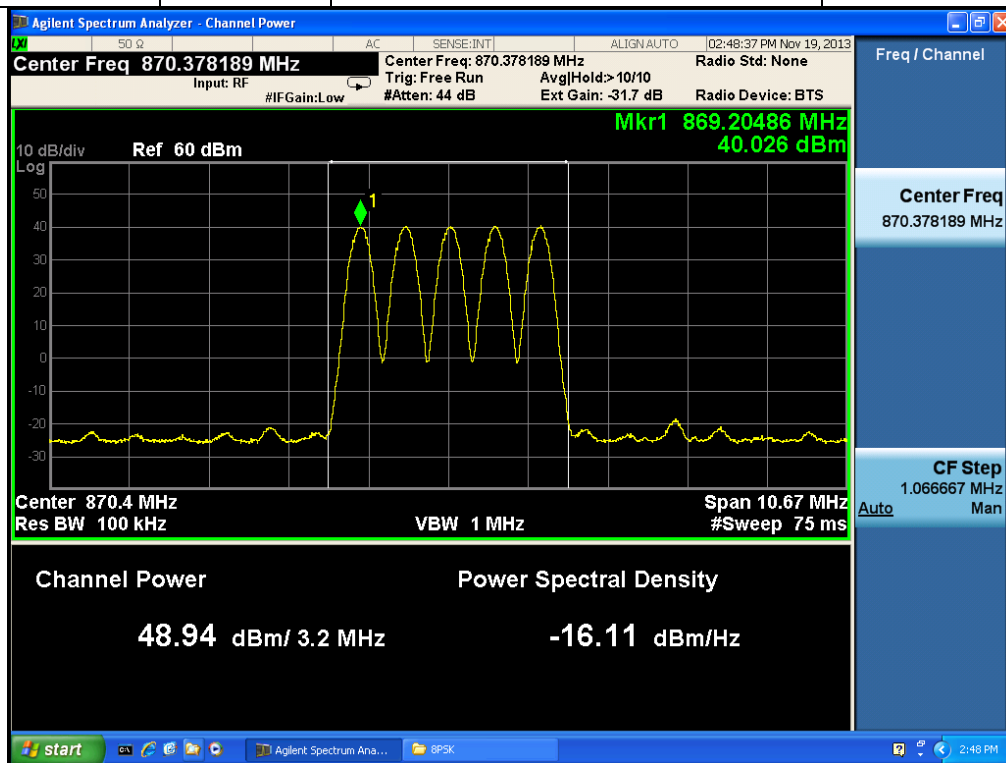

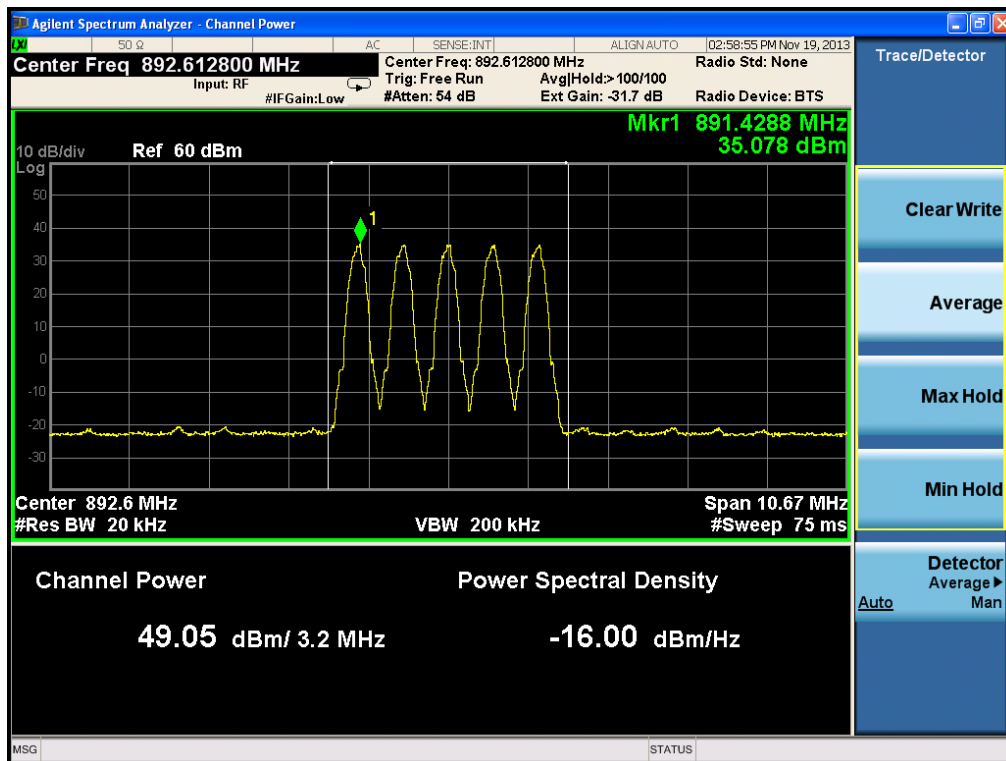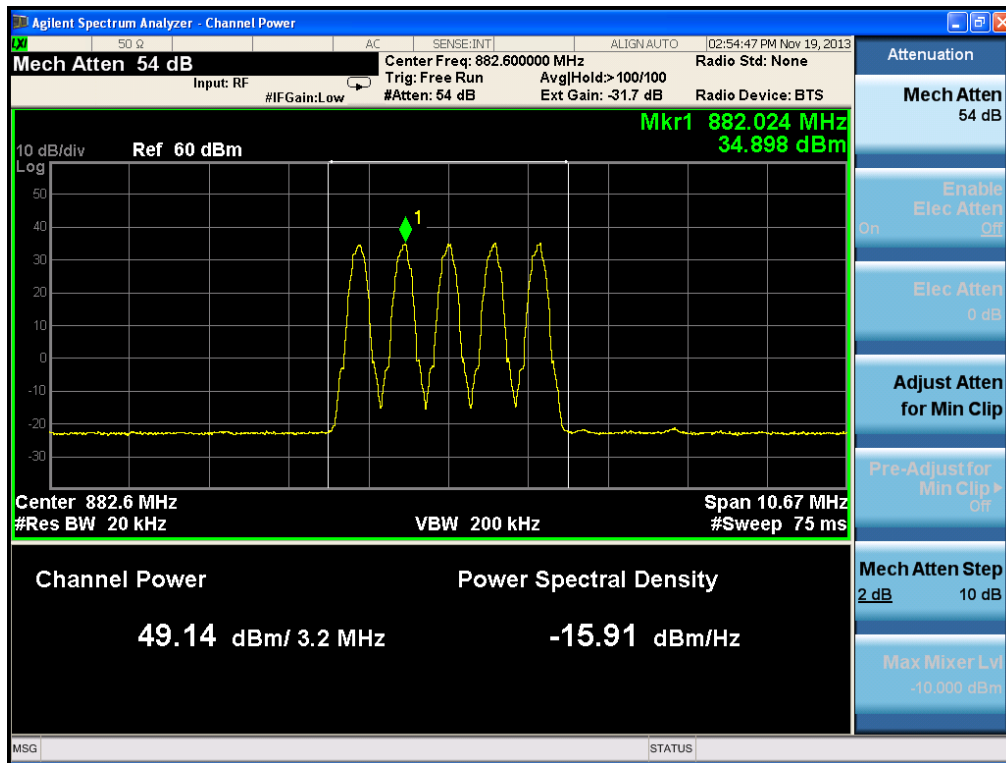

Four carriers

modulation	Center Freq. (MHz)	Frequency (MHz)	Max output Power in dBm
8PSK	870.1	869.2/869.8/ 870.4 /871	46.96
	882.3	881.4/882/882.6/883.2	47.03
	892.9	892/892.6/893.2/893.8	47.09

