

FCC Test Report

Report No.: AGC13779250302FR01

FCC ID : Z63-HOLA87USB

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: WIRELESS MECHANICAL KEYBOARD-USB RECEIVER

BRAND NAME : AUSDOM

MODEL NAME : Hola87 USB

APPLICANT: SHENZHEN AONI ELECTRONIC CO., LTD.

DATE OF ISSUE : Apr. 17, 2025

STANDARD(S) : FCC Part 15 Subpart C §15.247

REPORT VERSION: V1.0

Attestation Of Global Compliance (Shenzhen) Co., Ltd



Page 2 of 53

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes	
V1.0	/	Apr. 17, 2025	Valid	Initial Release	




Table of Contents

1. General Information	5
2. Product Information	6
2.1 Product Technical Description	6
2.2 Test Frequency List	6
2.3 Related Submittal(S) / Grant (S)	6
2.4 Test Methodology	7
2.5 Special Accessories	7
2.6 Equipment Modifications	7
2.7 Antenna Requirement	7
3. Test Environment	8
3.1 Address of the Test Laboratory	8
3.2 Test Facility	8
3.3 Environmental Conditions	9
3.4 Measurement Uncertainty	9
3.5 List of Equipment Use	10
4.System Test Configuration	12
4.1 EUT Configuration	12
4.2 EUT Exercise	12
4.3 Configuration of Tested System	12
4.4 Equipment Used In Tested System	12
4.5 Summary of Test Results	13
5. Description of Test Modes	14
6. Duty Cycle Measurement	15
7. RF Output Power Measurement	16
7.1 Provisions Applicable	16
7.2 Measurement Procedure	16
7.3 Measurement Setup (Block Diagram of Configuration)	16
7.4 Measurement Result	17
8. 6dB Bandwidth Measurement	20
8.1 Provisions Applicable	20
8.2 Measurement Procedure	20
8.3 Measurement Setup (Block Diagram of Configuration)	20
8.4 Measurement Results	21
9. Power Spectral Density Measurement	25
9.1 Provisions Applicable	25
9.2 Measurement Procedure	25
9.3 Measurement Setup (Block Diagram of Configuration)	25
9.4 Measurement Results	26
10. Conducted Band Edge and Out-of-Band Emissions	28
10.1 Provisions Applicable	28


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Web: http://www.agccert.com/





10.2 Measur	rement Procedure	28
10.3 Measur	rement Setup (Block Diagram of Configuration)	28
	rement Results	
11. Radiated Sp	purious Emission	35
11.1 Measur	rement Limit	35
	rement Procedure	
11.3 Measur	rement Setup (Block Diagram of Configuration)	38
11.4 Measur	rement Result	39
12. AC Power L	ine Conducted Emission Test	48
12.1 Measur	rement Limit	48
12.2 Measur	rement Setup (Block Diagram of Configuration)	48
12.3 Prelimi	nary Procedure of Line Conducted Emission Test	49
12.4 Final P	rocedure of Line Conducted Emission Test	49
12.5 Measur	rement Result	49
Appendix I: Ph	otographs of Test Setup	52
Appendix II: P	hotographs of Test EUT	52






1. General Information

Address No.5, Bldg., Honghui Industrial Park, 2nd Liuxian Road, Xin'An streets, Bao'an District, ShenZhen, China Manufacturer SHENZHEN AONI ELECTRONIC CO., LTD. No.5, Bldg., Honghui Industrial Park, 2nd Liuxian Road, Xin'An streets, Bao'an District, ShenZhen, China Factory SHENZHEN AONI ELECTRONIC CO., LTD. No.5, Bldg., Honghui Industrial Park, 2nd Liuxian Road, Xin'An streets, Bao'an District, ShenZhen, China Product Designation WIRELESS MECHANICAL KEYBOARD-USB RECEIVER Brand Name AUSDOM Test Model Hola87 USB Series Model N/A Declaration of Difference N/A Date of receipt of test item Apr. 14, 2025 Apr. 14, 2025-Apr. 17, 2025 Deviation from Standard Normal Test Result Pass		,
District, ShenZhen, China Manufacturer SHENZHEN AONI ELECTRONIC CO., LTD. No.5,Bldg., Honghui Industrial Park, 2nd Liuxian Road, Xin'An streets, Bao'an District, ShenZhen, China Factory SHENZHEN AONI ELECTRONIC CO., LTD. No.5,Bldg., Honghui Industrial Park, 2nd Liuxian Road, Xin'An streets, Bao'an District, ShenZhen, China Product Designation WIRELESS MECHANICAL KEYBOARD-USB RECEIVER Brand Name AUSDOM Test Model Hola87 USB Series Model N/A Declaration of Difference N/A Date of receipt of test item Apr. 14, 2025 Deviation from Standard No any deviation from the test method Condition of Test Sample Normal Test Result Pass	Applicant	SHENZHEN AONI ELECTRONIC CO., LTD.
Address No.5,Bldg., Honghui Industrial Park, 2nd Liuxian Road, Xin'An streets, Bao'an District, ShenZhen, China Factory SHENZHEN AONI ELECTRONIC CO., LTD. No.5,Bldg., Honghui Industrial Park, 2nd Liuxian Road, Xin'An streets, Bao'an District, ShenZhen, China Product Designation WIRELESS MECHANICAL KEYBOARD-USB RECEIVER Brand Name AUSDOM Test Model Hola87 USB Series Model N/A Declaration of Difference N/A Date of receipt of test item Apr. 14, 2025 Date of Test Apr. 14, 2025-Apr. 17, 2025 Deviation from Standard No any deviation from the test method Condition of Test Sample Test Result Pass	Address	
District, ShenZhen, China Factory SHENZHEN AONI ELECTRONIC CO., LTD. No.5,Bldg., Honghui Industrial Park, 2nd Liuxian Road, Xin'An streets, Bao'an District, ShenZhen, China Product Designation WIRELESS MECHANICAL KEYBOARD-USB RECEIVER Brand Name AUSDOM Test Model Hola87 USB Series Model N/A Declaration of Difference N/A Date of receipt of test item Apr. 14, 2025 Date of Test Apr. 14, 2025-Apr. 17, 2025 Deviation from Standard No any deviation from the test method Condition of Test Sample Test Result Pass	Manufacturer	SHENZHEN AONI ELECTRONIC CO., LTD.
Address No.5,Bldg., Honghui Industrial Park, 2nd Liuxian Road, Xin'An streets, Bao'an District, ShenZhen, China Product Designation WIRELESS MECHANICAL KEYBOARD-USB RECEIVER Brand Name AUSDOM Test Model Hola87 USB Series Model N/A Declaration of Difference N/A Date of receipt of test item Apr. 14, 2025 Date of Test Apr. 14, 2025~Apr. 17, 2025 Deviation from Standard No any deviation from the test method Condition of Test Sample Test Result Pass	Address	
District, ShenZhen, China Product Designation WIRELESS MECHANICAL KEYBOARD-USB RECEIVER Brand Name AUSDOM Test Model Hola87 USB Series Model N/A Declaration of Difference N/A Date of receipt of test item Apr. 14, 2025 Date of Test Apr. 14, 2025-Apr. 17, 2025 Deviation from Standard No any deviation from the test method Condition of Test Sample Normal Test Result Pass	Factory	SHENZHEN AONI ELECTRONIC CO., LTD.
Brand Name AUSDOM Test Model Hola87 USB Series Model N/A Declaration of Difference N/A Date of receipt of test item Apr. 14, 2025 Date of Test Apr. 14, 2025~Apr. 17, 2025 Deviation from Standard No any deviation from the test method Condition of Test Sample Normal Test Result Pass	Address	
Test Model Hola87 USB Series Model N/A Declaration of Difference N/A Date of receipt of test item Apr. 14, 2025 Date of Test Apr. 14, 2025~Apr. 17, 2025 Deviation from Standard No any deviation from the test method Condition of Test Sample Normal Test Result Pass	Product Designation	WIRELESS MECHANICAL KEYBOARD-USB RECEIVER
Series Model N/A Declaration of Difference N/A Date of receipt of test item Apr. 14, 2025 Date of Test Apr. 14, 2025~Apr. 17, 2025 Deviation from Standard No any deviation from the test method Condition of Test Sample Test Result Pass	Brand Name	AUSDOM
Declaration of Difference N/A Date of receipt of test item Apr. 14, 2025 Date of Test Apr. 14, 2025~Apr. 17, 2025 Deviation from Standard No any deviation from the test method Condition of Test Sample Normal Test Result Pass	Test Model	Hola87 USB
Date of receipt of test item Apr. 14, 2025 Date of Test Apr. 14, 2025~Apr. 17, 2025 Deviation from Standard No any deviation from the test method Condition of Test Sample Normal Test Result Pass	Series Model	N/A
Date of Test Apr. 14, 2025~Apr. 17, 2025 Deviation from Standard No any deviation from the test method Condition of Test Sample Normal Test Result Pass	Declaration of Difference	N/A
Deviation from Standard No any deviation from the test method Condition of Test Sample Normal Test Result Pass	Date of receipt of test item	Apr. 14, 2025
Condition of Test Sample Normal Test Result Pass	Date of Test	Apr. 14, 2025~Apr. 17, 2025
Test Result Pass	Deviation from Standard	No any deviation from the test method
	Condition of Test Sample	Normal
Test Report Form No AGCER-FCC-BLE-V1	Test Result	Pass
	Test Report Form No	AGCER-FCC-BLE-V1

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By	Jouk bai	
	Jack Gui (Project Engineer)	Apr. 17, 2025
Reviewed By	Calvin Liu	
	Calvin Liu (Reviewer)	Apr. 17, 2025
Approved By	Angole li	
	Angela Li (Authorized Officer)	Apr. 17, 2025





2. Product Information

2.1 Product Technical Description

Technology Type	Custom for 2.4GHz
Frequency Band	2400MHz-2483.5MHz
Operation Frequency Range	2405MHz-2475MHz
Modulation Type	GFSK
Number of channels	16Channels
Maximum Transmitter Power	-1.407dBm
Hardware Version	BK2481 V7.0
Software Version	B02E3310
Antenna Designation	PCB Antenna
Antenna Gain	-1.66dBi
Power Supply	DC 5V by PC

2.2 Test Frequency List

Frequency Band	Channel Number	Frequency	Channel Number	Frequency
	1	2405 MHz	9	2414 MHz
	2	2463 MHz	10	2471 MHz
	3	2441 MHz	11	2459 MHz
2400 2402 FMI	4	2426 MHz	12	2436 MHz
2400~2483.5MHz	5	2408 MHz	13	2419 MHz
	6	2466 MHz	14	2475 MHz
	7	2445 MHz	15	2453 MHz
	8	2422 MHz	16	2439 MHz



Page 7 of 53

2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **Z63-HOLA87USB**, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.4 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules

2.5 Special Accessories

Not available for this EUT intended for grant.

2.6 Equipment Modifications

Not available for this EUT intended for grant.

2.7 Antenna Requirement

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

EUT Antenna

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is -1.66dBi.



Page 8 of 53

3. Test Environment

3.1 Address of the Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories).

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 9 of 53


3.3 Environmental Conditions

	Normal Conditions
Temperature range (°C)	15 - 35
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106
Power supply	DC 5V

3.4 Measurement Uncertainty

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty		
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$		
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$		
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$		
Uncertainty of total RF Power, Conducted	$U_c = \pm 0.8 \text{ dB}$		
Uncertainty of RF Power Density, Conducted	$U_c = \pm 2.6 \text{ dB}$		
Uncertainty of Spurious Emissions, Conducted	$U_c = \pm 2 \%$		
Uncertainty of Occupied Channel Bandwidth	U _c = ±2 %		
Uncertainty of Dwell Time	U _c = ±2 %		





3.5 List of Equipment Use

• F	RF Conducted Test System								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)		
\boxtimes	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2024-05-24	2025-05-23		
\boxtimes	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2025-01-14	2026-01-13		
\boxtimes	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2025-01-14	2026-01-13		
\boxtimes	AGC-ER-A007	6dB Fixed Attenuator	Mini circuits	BW-S6-2W263A+	N/A	2025-01-30	2026-01-29		
\boxtimes	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2024-05-23	2025-05-22		
\boxtimes	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A		
	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A		

• F	Radiated Spurious Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
\boxtimes	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2025-01-14	2026-01-13	
	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2024-05-24	2025-05-23	
\boxtimes	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27	
\boxtimes	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04	
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10	
	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2024-05-24	2025-05-23	
\boxtimes	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23	
\boxtimes	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2024-07-24	2026-07-23	
\boxtimes	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2024-05-23	2025-05-22	
\boxtimes	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	

A	AC Power Line Conducted Emission						
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2024-05-28	2025-05-27
\boxtimes	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2024-02-01	2026-01-31
	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2024-05-28	2025-05-27



Page 11 of 53

• Tes	Test Software					
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information	
\boxtimes	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71	
\boxtimes	AGC-EM-S003	RE Test System	FARA	EZ-EMC	VRA-03A	
\boxtimes	AGC-ER-S012	BT/WIFI Test System	Tonscend	JS1120-2	2.6	
\boxtimes	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0	



Page 12 of 53

4. System Test Configuration

4.1 EUT Configuration


The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT Exercise


The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 Configuration of Tested System

Radiated Emission Configure:



Conducted Emission Configure:



4.4 Equipment Used In Tested System

The following peripheral devices and interface cables were connected during the measurement:

- ☐ Test Accessories Come From The Laboratory
- ☐ Test Accessories Come From The Manufacturer


No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1	Laptop	Redmi	RMA2201-AG		
2	Adapter	Redmi	AD651	Input:100-240V~1.7A 50-60HZ Output:5V2A/12V2A/15V3A/9V2A/20V3.25A 65W	1.4m, unshielded
3	Control Box	USB-TTL			



Page 13 of 53

4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203&15.247(b)(4)	Antenna Equipment	Pass
2	§15.247 (b)(3)	RF Output Power	Pass
3	§15.247 (a)(2)	6 dB Bandwidth	Pass
4	§15.247 (e)	Power Spectral Density	Pass
5	§15.247 (d)	Conducted Band Edge and Out-of-Band Emissions	Pass
6	§15.209	Radiated Emission& Band Edge	Pass
7	§15.207	AC Power Line Conducted Emission	Pass






5. Description of Test Modes

	Summary Table of Test Cases			
Test Item	Data Rate / Modulation			
rest item	SRD 2.4G /GFSK			
Radiated & Conducted Test Cases	Mode 1: SRD 2.4G TX CH1_2405 MHz(Power by Laptop) Mode 2: SRD 2.4G TX CH3_2441 MHz(Power by Laptop)			
	Mode 3: SRD 2.4G TX CH14_2475 MHz(Power by Laptop)			
AC Conducted Emission	Mode 1: SRD 2.4G Link + Laptop			

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.

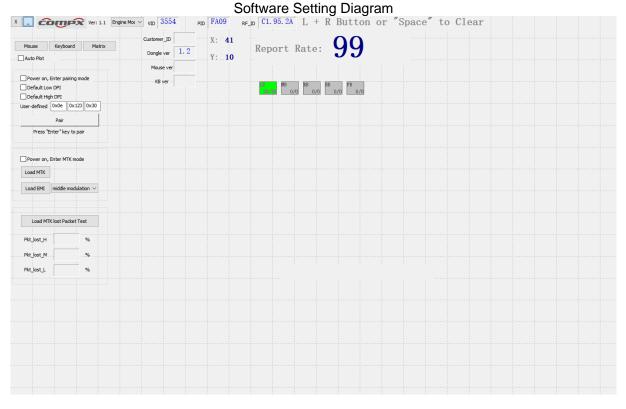



Page 15 of 53


6. Duty Cycle Measurement

The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = Peak. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Operating mode	T(µs)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/ T Minimum VBW (kHz)
SRD-2.4G	135	2	16.99	7.41

Remark:

- Duty Cycle factor = 10 * log (1/ Duty cycle)
- The duty cycle of each frequency band mode reflects the determination requirements of the low channel measurement value
- The test plots as follows:

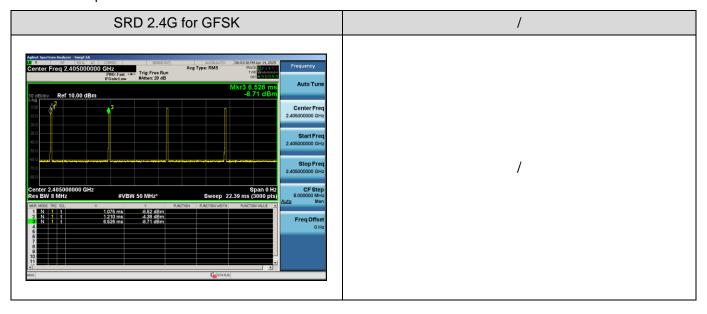



Page 16 of 53

7. RF Output Power Measurement

7.1 Provisions Applicable


For DTSs employing digital modulation techniques operating in the bands 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W.

7.2 Measurement Procedure

- For Peak Power, the testing follows ANSI C63.10 Section 11.9.1.1 Method Max peak power:
- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the RBW≥DTS bandwidth
- 3. Set the VBW≥[3 × RBW].
- 4. Span≥[3 × RBW].
- 5. Sweep= auto couple.
- 6. Detector Function= Peak.
- 7. Trace mode= Max hold.
- 8. Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.
- ☐ For Average power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G:
- 1. The RF output of EUT was connected to the power meter by RF cable and attenuator.
- 2. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- Measure the conducted output power and record the results in the test report.

7.3 Measurement Setup (Block Diagram of Configuration)


☐ For Average power test setup

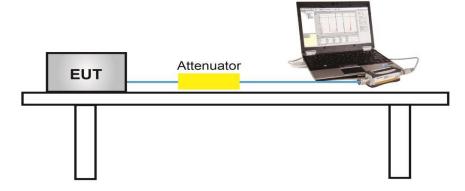




Page 17 of 53

⊠For peak power test setup

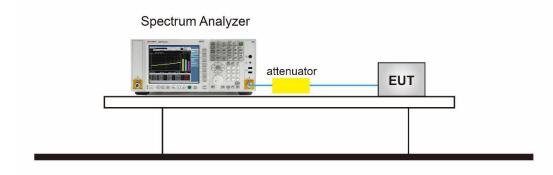


7.4 Measurement Result

Test Data of Conducted Output Power				
Test Mode	Test Frequency (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail
	2405	-1.407	≤30	Pass
GFSK	2441	-1.687	≤30	Pass
	2475	-2.109	≤30	Pass












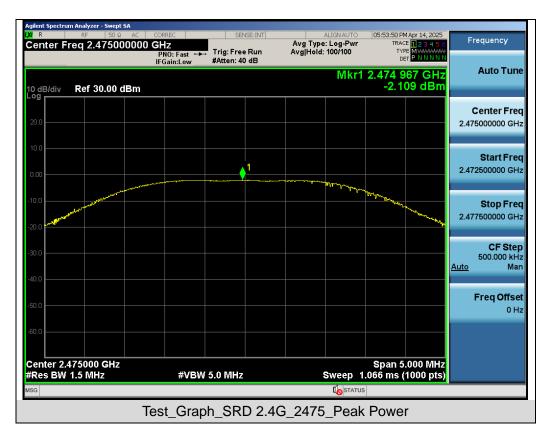



Page 20 of 53

8. 6dB Bandwidth Measurement


8.1 Provisions Applicable


The minimum 6dB bandwidth shall be 500 kHz.

8.2 Measurement Procedure

- The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss
 was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
- For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the OBW and set the Video bandwidth (VBW) ≥ 3 * RBW.
- 5. Measure and record the results in the test report.

8.3 Measurement Setup (Block Diagram of Configuration)

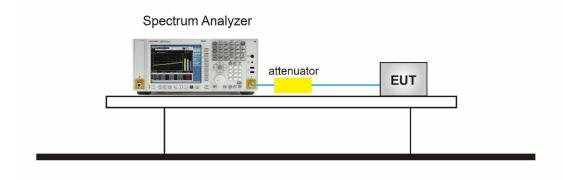







8.4 Measurement Results

Test Data of Occupied Bandwidth and DTS Bandwidth					
Test Mode	Test Frequency (MHz)	Occupied Bandwidth (MHz)	DTS BW (MHz)	DTS BW Limits	Pass or Fail
	2405	2.116	1.433	≥0.5	Pass
GFSK	2441	2.116	1.467	≥0.5	Pass
	2475	2.118	1.446	≥0.5	Pass


Test Graphs of Occupied Bandwidth

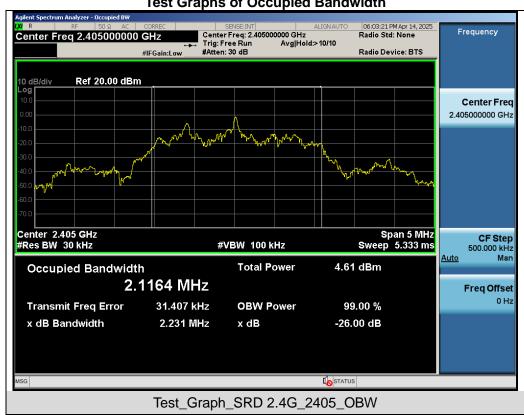















Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/





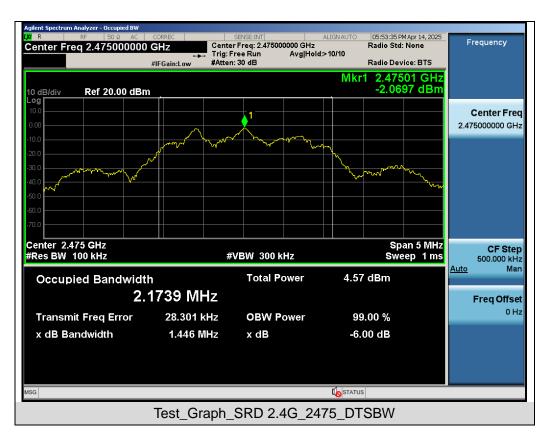



Page 25 of 53

9. Power Spectral Density Measurement


9.1 Provisions Applicable

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

9.2 Measurement Procedure

- The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
- 1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz in order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
- 4. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
- 5. Measure and record the results in the test report.
- The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

9.3 Measurement Setup (Block Diagram of Configuration)

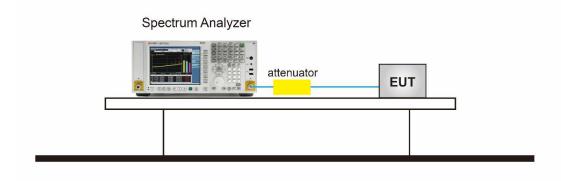




9.4 Measurement Results


Test Data of Conducted Output Power Spectral Density				
Test Mode	Test Frequency (MHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail
	2405	-11.796	≤8	Pass
GFSK_1Mbps	2441	-12.824	≪8	Pass
	2475	-12.217	≪8	Pass

Test Graphs of Conducted Output Power Spectral Density







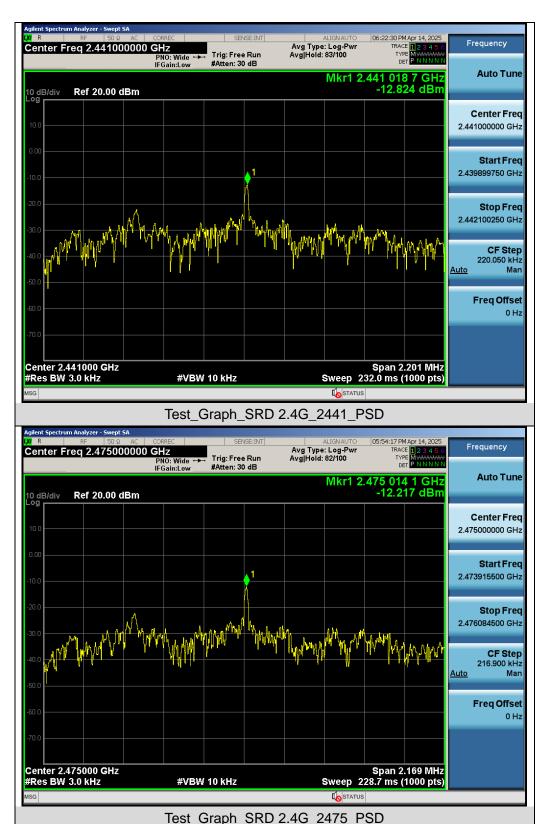



Page 28 of 53

10. Conducted Band Edge and Out-of-Band Emissions


10.1 Provisions Applicable


The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure.

10.2 Measurement Procedure

- Reference level measurement
- 1. Set instrument center frequency to DTS channel center frequency
- 2. Set the span to ≥ 1.5 times the DTS bandwidth
- 3. Set the RBW = 100 kHz
- Set the VBW ≥ 3 x RBW
- 5. Detector = peak
- 6. Sweep time = auto couple
- 7. Trace mode = max hold
- 8. Allow trace to fully stabilize
- Emission level measurement
- 1. Set the center frequency and span to encompass frequency range to be measured
- 2. RBW = 100kHz
- 3. VBW = 300kHz
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep time = auto couple
- 7. The trace was allowed to stabilize

10.3 Measurement Setup (Block Diagram of Configuration)

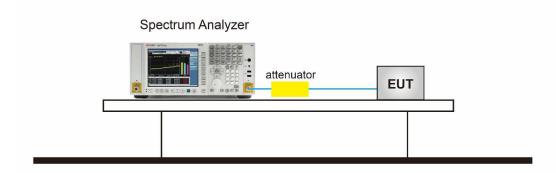








10.4 Measurement Results








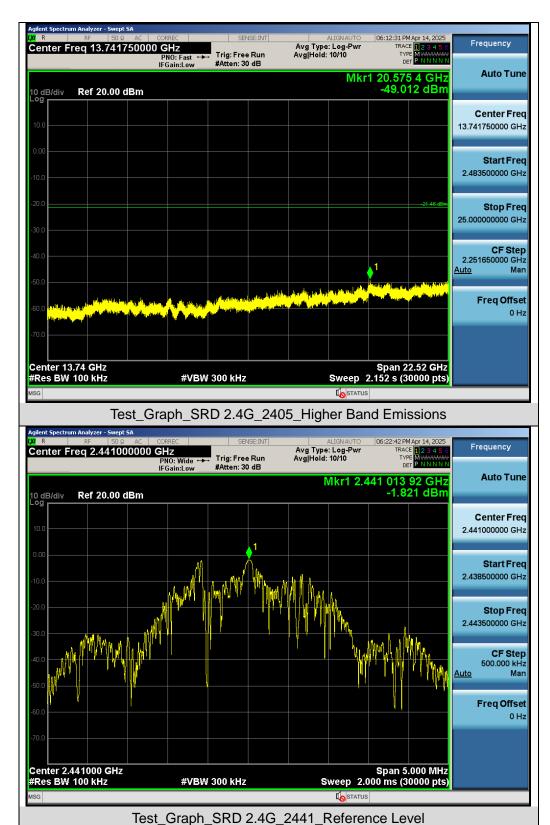






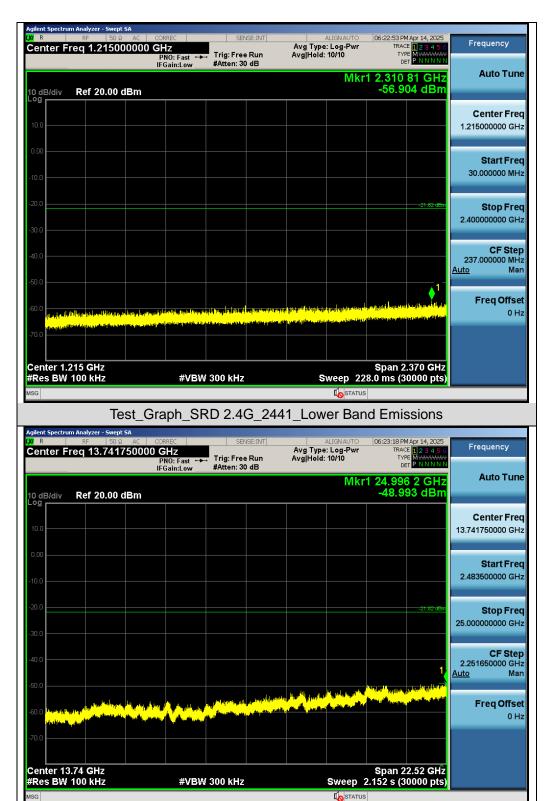


Test_Graph_SRD 2.4G_2441_Higher Band Emissions









Test Graph SRD 2.4G 2475 Lower Band Emissions





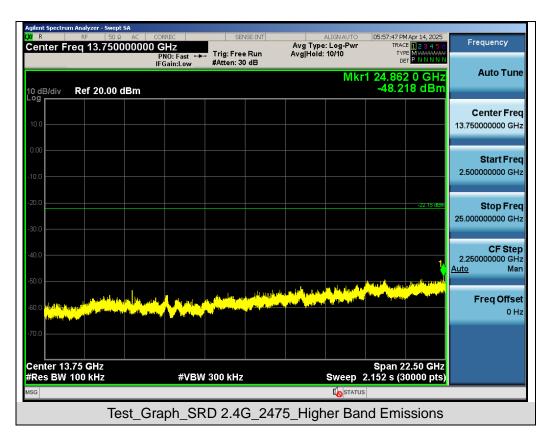





Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_SRD 2.4G_2475_Higher Band Edge Emissions



Page 35 of 53

11. Radiated Spurious Emission

11.1 Measurement Limit

FCC Part 15.209 Limit in the below table to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

11.2 Measurement Procedure

- The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- The height of the broadband receiving antenna was varied between one meter and four meters above 3. ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.



Report No.: AGC13779250302FR01 Page 36 of 53

8. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 9. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 10. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 11. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9kHz~150kHz/RB 200Hz for QP
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/3MHz for Peak, 1MHz/3MHz for Average

Receiver Parameter	Setting
Start ~Stop Frequency	9kHz~150kHz/RB 200Hz for QP
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP



Page 37 of 53

Quasi-Peak Measurements below 1GHz


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

Peak Measurements above 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize

Average Measurements above 1GHz


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW ≥ [3 × RBW]
- 4. Detector = Power averaging (rms)
- 5. Averaging type = power (i.e., rms)
- 6. Sweep time = auto
- 7. Perform a trace average of at least 100 traces.
- 8. The applicable correction factor is [10*log (1 / D)], where D is the duty cycle. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.






11.3 Measurement Setup (Block Diagram of Configuration)


Radiated Emission Test Setup 9kHz-30MHz

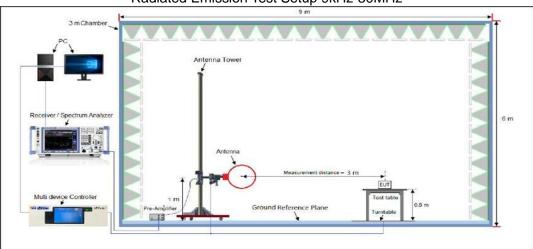


Radiated Emission Test Setup 30MHz-1000MHz

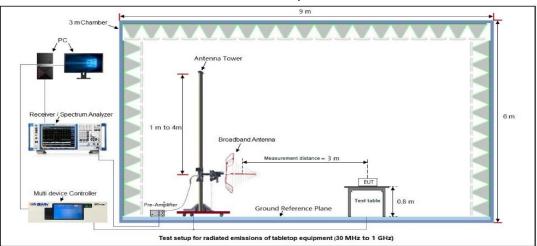

Radiated Emission Test Setup Above 1000MHz

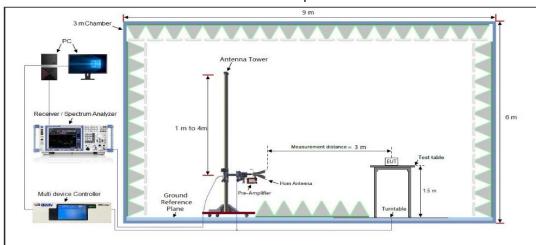






11.4 Measurement Result


Radiated Emission Below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

Radiated Emission Test Results at 30MHz-1GHz					
EUT Name	WIRELESS MECHANICAL KEYBOARD-USB RECEIVER	Model Name	Hola87 USB RECEIVER		
Temperature	21.2℃	Relative Humidity	65.6 %		
Pressure	960hPa	Test Voltage	Normal Voltage		
Test Mode	Mode 1	Antenna Polarity	Horizontal		

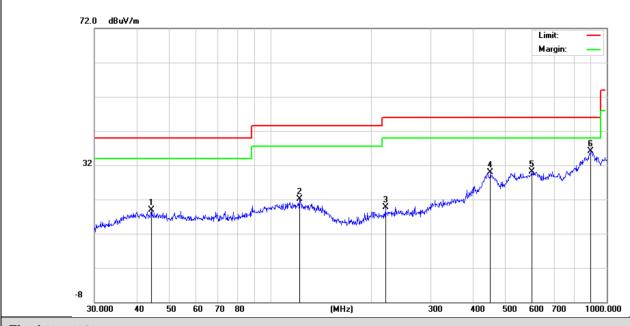


Final I	Data List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	44.2752	18.87	13.60	40.00	21.13	100	160	Horizontal
2	121.9755	22.15	16.28	43.50	21.35	100	170	Horizontal
3	219.8449	19.62	14.40	46.00	26.38	100	90	Horizontal
4	451.1350	30.00	24.71	46.00	16.0	100	220	Horizontal
5	599.3212	30.09	25.07	46.00	15.91	100	160	Horizontal
6	896.9965	36.03	31.42	46.00	9.97	100	140	Horizontal





Radiated Emission Test Results at 30MHz-1GHz					
EUT Name	WIRELESS MECHANICAL KEYBOARD-USB RECEIVER	Model Name	Hola87 USB RECEIVER		
Temperature	21.2℃	Relative Humidity	65.6 %		
Pressure	960hPa	Test Voltage	Normal Voltage		
Test Mode	Mode 1	Antenna Polarity	Vertical		

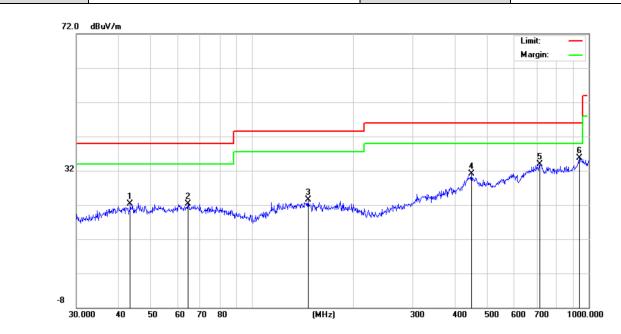

Final Data List Limit Freq. Level Factor Margin Height Angle NO. **Polarity** [MHz] [dBµV/m] [dB] [dBµV/m] [dB] [cm] [°]1 43.3534 22.27 16.93 40.00 17.73 100 160 Vertical 22.33 2 17.06 170 64.4331 40.00 17.67 100 Vertical 3 23.55 18.20 43.50 19.95 100 90 Vertical 146.3735 31.13 25.74 4 447.9822 46.00 14.87 100 220 Vertical 5 714.1734 33.92 28.60 46.00 12.08 100 160 Vertical 6 938.8326 35.61 30.84 46.00 10.39 100 140 Vertical

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. All test modes had been pre-tested. The mode 1 is the worst case and recorded in the report.



Page 41 of 53

Radiated Emissions Test Results for Above 1GHz

EUT Name	WIRELESS MECHANICAL KEYBOARD-USB RECEIVER	Model Name	Hola87 USB RECEIVER
Temperature	21.2℃	Relative Humidity	65.6 %
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Horizontal

Frequency	Meter R ading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
4810.000	50.58	0.08	50.66	74.00	-23.34	peak
4810.000	40.69	0.08	40.77	54.00	-13.23	AVG
7215.000	49.99	2.21	52.2	74.00	-21.80	peak
7215.000	40.12	2.21	42.33	54.00	-11.67	AVG
Pomark:						<u> </u>

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT Name	WIRELESS MECHANICAL KEYBOARD-USB RECEIVER	Model Name	Hola87 USB RECEIVER
Temperature	21.2℃	Relative Humidity	65.6 %
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Vertical

Meter Reading	Factor	Emission Level	Limits	Margin	Value
(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
51.33	80.0	51.41	74.00	-22.59	peak
40.74	80.0	40.82	54.00	-13.18	AVG
49.51	2.21	51.72	74.00	-22.28	peak
40.96	2.21	43.17	54.00	-10.83	AVG
	Reading (dBµV) 51.33 40.74 49.51	Reading (dBµV) (dB) 51.33 0.08 40.74 0.08 49.51 2.21	Reading Factor Level (dBμV) (dB) (dBμV/m) 51.33 0.08 51.41 40.74 0.08 40.82 49.51 2.21 51.72	Reading Level Limits (dBμV) (dB) (dBμV/m) (dBμV/m) 51.33 0.08 51.41 74.00 40.74 0.08 40.82 54.00 49.51 2.21 51.72 74.00	Reading Factor Level Limits Margin (dBμV) (dB) (dBμV/m) (dBμV/m) (dB) 51.33 0.08 51.41 74.00 -22.59 40.74 0.08 40.82 54.00 -13.18 49.51 2.21 51.72 74.00 -22.28

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: PASS



Page 42 of 53

Radiated Emissions Test Results for Above 1GHz

EUT Name	WIRELESS MECHANICAL KEYBOARD-USB RECEIVER	Model Name	Hola87 USB RECEIVER
Temperature	21.2℃	Relative Humidity	65.6 %
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
4882.000	50.22	0.14	50.36	74.00	-23.64	peak
4882.000	39.89	0.14	40.03	54.00	-13.97	AVG
7323.000	48.69	2.36	51.05	74.00	-22.95	peak
7323.000	41.63	2.36	43.99	54.00	-10.01	AVG
Remark:						

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	WIRELESS MECHANICAL KEYBOARD-USB RECEIVER	Model Name	Hola87 USB RECEIVER
Temperature	21.2℃	Relative Humidity	65.6 %
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
4882.000	51.63	0.14	51.77	74.00	-22.23	peak
4882.000	39.87	0.14	40.01	54.00	-13.99	AVG
7323.000	49.63	2.36	51.99	74.00	-22.01	peak
7323.000	40.51	2.36	42.87	54.00	-11.13	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: Pass



Page 43 of 53

Radiated Emissions Test Results for Above 1GHz

EUT Name	WIRELESS MECHANICAL KEYBOARD-USB RECEIVER	Model Name	Hola87 USB RECEIVER
Temperature	21.2℃	Relative Humidity	65.6 %
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Horizontal

Meter Reading	Factor	Emission Level	Limits	Margin	Value
(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
50.36	0.22	50.58	74.00	-23.42	peak
41.33	0.22	41.55	54.00	-12.45	AVG
49.85	2.64	52.49	74.00	-21.51	peak
40.15	2.64	42.79	54.00	-11.21	AVG
	Reading (dBµV) 50.36 41.33 49.85	Reading Factor (dBμV) (dB) 50.36 0.22 41.33 0.22 49.85 2.64	Reading Factor Level (dBμV) (dB) (dBμV/m) 50.36 0.22 50.58 41.33 0.22 41.55 49.85 2.64 52.49	Reading Factor Level Limits (dBμV) (dB) (dBμV/m) (dBμV/m) 50.36 0.22 50.58 74.00 41.33 0.22 41.55 54.00 49.85 2.64 52.49 74.00	Reading Factor Level Limits Margin (dBμV) (dB) (dBμV/m) (dBμV/m) (dB) 50.36 0.22 50.58 74.00 -23.42 41.33 0.22 41.55 54.00 -12.45 49.85 2.64 52.49 74.00 -21.51

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	WIRELESS MECHANICAL KEYBOARD-USB RECEIVER	Model Name	Hola87 USB RECEIVER
Temperature	21.2℃	Relative Humidity	65.6 %
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
4950.000	51.58	0.22	51.80	74.00	-22.20	peak
4950.000	40.58	0.22	40.80	54.00	-13.20	AVG
7425.000	49.74	2.64	52.38	74.00	-21.62	peak
7425.000	41.33	2.64	43.97	54.00	-10.03	AVG
Remark:						-

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: Pass


Note:

- The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit. 2.
- The "Factor" value can be calculated automatically by software of measurement system.




EUT Name	WIRELESS MECHANICAL KEYBOARD-USB RECEIVER	Model Name	Hola87 USB RECEIVER
Temperature	25℃	Relative Humidity	41%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Horizontal


Test Graph for Peak Measurement

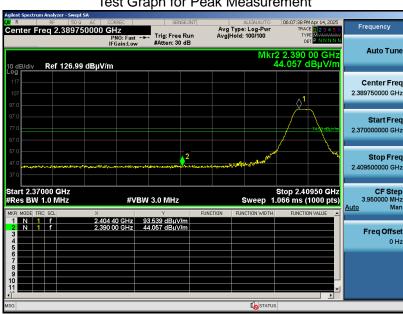

Test Graph for Average Measurement

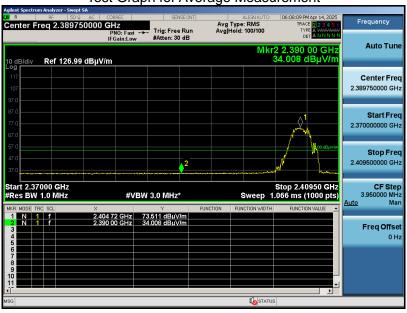


RESULT: PASS






EUT Name	WIRELESS MECHANICAL KEYBOARD-USB RECEIVER	Model Name	Hola87 USB RECEIVER
Temperature	25℃	Relative Humidity	41%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Vertical


Test Graph for Peak Measurement

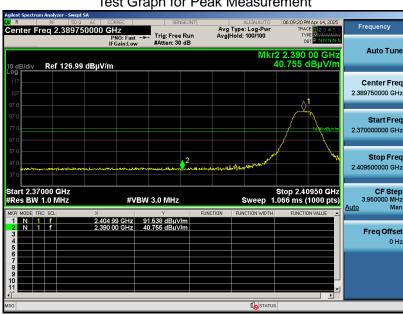

Test Graph for Average Measurement

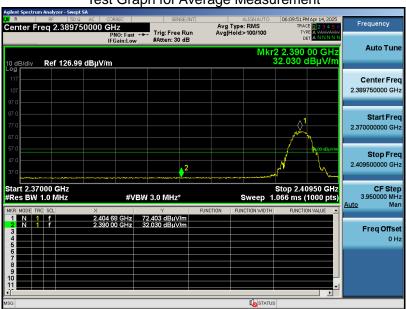


RESULT: PASS





EUT Name	WIRELESS MECHANICAL KEYBOARD-USB RECEIVER	Model Name	Hola87 USB RECEIVER
Temperature	25℃	Relative Humidity	41%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

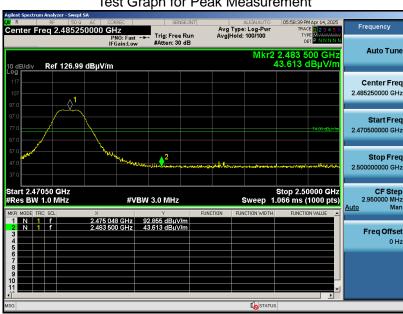

Test Graph for Average Measurement



RESULT: PASS



EUT Name	WIRELESS MECHANICAL KEYBOARD-USB RECEIVER	Model Name	Hola87 USB RECEIVER
Temperature	25℃	Relative Humidity	41%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: PASS

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.



12. AC Power Line Conducted Emission Test


12.1 Measurement Limit

F	Maximum RF Line Voltage			
Frequency	Q.P. (dBμV)	Average (dBμV)		
150kHz~500kHz	66-56	56-46		
500kHz~5MHz	56	46		
5MHz~30MHz	60	50		

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

12.2 Measurement Setup (Block Diagram of Configuration)

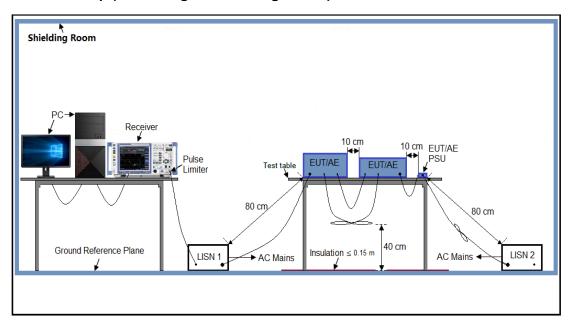



Report No.: AGC13779250302FR01 Page 49 of 53

12.3 Preliminary Procedure of Line Conducted Emission Test


- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from laptop which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side).
- 7. Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 8. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 9. During the above scans, the emissions were maximized by cable manipulation.
- 10. The test mode(s) were scanned during the preliminary test.
- 11. Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4 Final Procedure of Line Conducted Emission Test

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.
- 3. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 4. The test data of the worst case condition(s) was reported on the Summary Data page.
- 5. A conducted emission is calculated by the following equation:
 - Measurement Level (dBμV) = Receiver reading (dBμV) + Transd (dB)
 - Transd (dB)= AMN Factor(dB)+Cable Loss(dB)+Attenuation(dB)
 - Margin= Limit-Level

12.5 Measurement Result



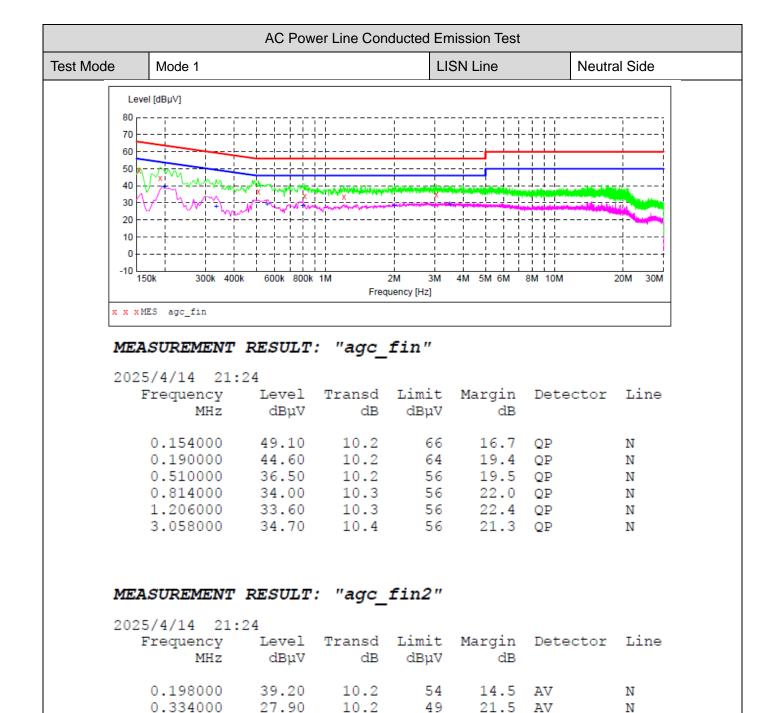

RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

10.2

10.3

10.3

10.4

46

46

46

46

16.8

17.9

17.5

16.7

ΑV

ΑV

ΑV

ΑV

Ν

Ν

Ν

0.558000

0.798000

2.002000

3.494000


29.20

28.10

28.50

29.30



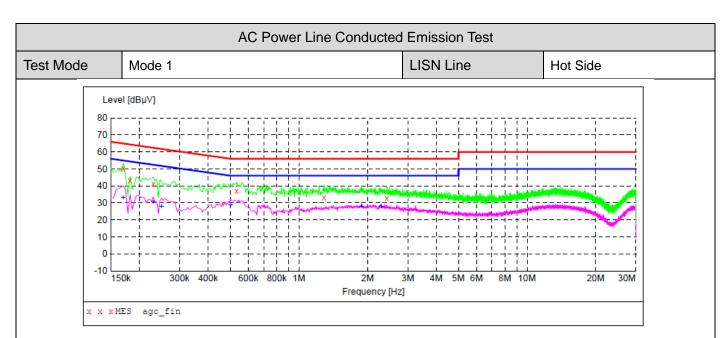

MEASUREMENT RESULT: "agc fin"

2025/4/14 21:22

2025/4/14 21:	44					
Frequency MHz	Level dBµV		Limit dBµV	Margin dB	Detector	Line
0.170000	50.40	10.2	65	14.6	QP	L1
0.182000	43.20	10.2	64	21.2	QP	L1
0.230000	40.90	10.2	62	21.5	QP	L1
0.534000	37.10	10.2	56	18.9	QP	L1
1.290000	33.10	10.3	56	22.9	QP	L1
2.426000	32.90	10.3	56	23.1	OP	L1

MEASUREMENT RESULT: "agc fin2"

2025/4/14 21:22

2023/4/.	14 21.	44					
Frequ	uency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.23 0.23 0.50	70000 30000 50000 02000 82000	33.20 30.40 27.80 28.60 27.90	10.2 10.2 10.2 10.2 10.3	55 52 52 46 46	24.0 17.4	AV AV	L1 L1 L1 L1 L1
	86000	27.70	10.3	46	18.3		L1

RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Page 52 of 53

Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC13779250302AP01

Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC13779250302AP02



Page 53 of 53

Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders. 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations. 7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.

