


ICOM



CALL

CH

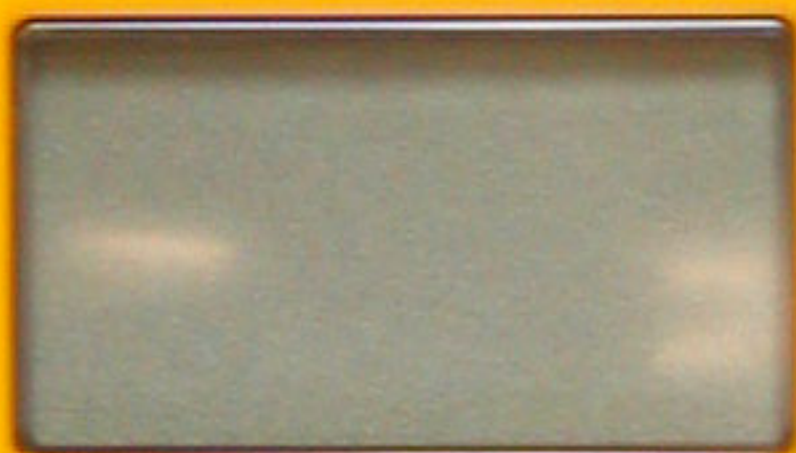

16

Hi/Low



GMDSS

VHF MARINE TRANSCEIVER

IC-GM1600

ICOM

IC-GM1600

FCC ID: AFJ279521

COMPASS SAFE DISTANCE 0.9m



ATTENTION!

Restricted to occupational use to satisfy FCC RF exposure limits. See user manual for operating requirements.

Icom Inc. MADE IN JAPAN

SERIAL NO. 0000001

Complies with the
FCC requirements for
survival craft two-way
radiotelephone equipment.

Operating Instructions

1. FULLY ROTATE [POWER/VOL] CLOCKWISE TO TURN POWER ON.
2. PUSH AND HOLD [SQL] TO MONITOR, THEN ROTATE [VOL] TO SET THE AUDIO OUTPUT LEVEL.
3. PUSH [CH]+[▲]/[▼] TO SELECT THE DESIRED CHANNEL.
4. PUSH AND HOLD [PTT] TO TRANSMIT, THEN SPEAK INTO THE MICROPHONE.
5. RELEASE [PTT] TO RECEIVE.







VOI

MIC
/SP

Icom

