

# **FCC Test Report**

FCC ID	:	ZQ6-AP6234A
Equipment	:	Wifi Dual Band + BT combo module
Model No.	:	AP6234A
Brand Name	:	Ampak
Applicant	:	Ampak Technology Inc
Address	:	No.1 Jen Al Road, Hsinchu Industrial Park, Hukou, Hsinchu, Taiwan, 30352
Standard	:	47 CFR FCC Part 15.247
<b>Received Date</b>	:	Apr. 01, 2014
Tested Date	:	Apr. 22 ~ May 07, 2014

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:

Gary Chang / Manager





# **Table of Contents**

1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	Local Support Equipment List	7
1.3	Test Setup Chart	7
1.4	The Equipment List	8
1.5	Test Standards	9
1.6	Measurement Uncertainty	9
2	TEST CONFIGURATION	10
2.1	Testing Condition	10
2.2	The Worst Test Modes and Channel Details	10
3	TRANSMITTER TEST RESULTS	11
3.1	Conducted Emissions	11
3.2	6dB and Occupied Bandwidth	14
3.3	RF Output Power	17
3.4	Power Spectral Density	19
3.5	Unwanted Emissions into Restricted Frequency Bands	21
3.6	Unwanted Emissions into Non-Restricted Frequency Bands	41
4	TEST LABORATORY INFORMATION	50



# **Release Record**

Report No.	Version	Description	Issued Date
FR440102AI	Rev. 01	Initial issue	May 15, 2014



FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.152MHz 47.27 (Margin -8.60dB) - AV	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]:3856.00MHz 51.49 (Margin -2.51dB) - AV	Pass
15.247(b)(3)	Fundamental Emission Output Power	Power [dBm]: 11a: 22.13 HT20: 22.24 HT40: 22.37	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

# Summary of Test Results



# 1 General Description

# 1.1 Information

### **1.1.1** Specification of the Equipment under Test (EUT)

RF General Information								
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Transmit Chains (N <sub>⊤x</sub> )	Data Rate / MCS				
5725-5850	а	5745-5825	149-165 [5]	1	6-54 Mbps			
5725-5850	n (HT20)	5745-5825	149-165 [5]	1	MCS 0-7			
5725-5850	n (HT40)	5755-5795	151-159 [2]	1	MCS 0-7			

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.

Note 2: 802.11a/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.

#### 1.1.2 Antenna Details

Ant. No.	Tuno	Operating Frequency (MHz) / Gain (dBi)					Connector
Ant. NO.	Туре	2400~2483.5	5150~5250	5250~5350	5470~5725	5725~5850	Connector
1	Dipole	2	3	3	3	3	UFL

### **1.1.3** Power Supply Type of Equipment under Test (EUT)

Power Supply Type   3.3Vdc from host.	
---------------------------------------	--

#### 1.1.4 Accessories

N/A



### 1.1.5 Channel List

Frequency	band (MHz)	5725~5850		
802.11	a / HT20	802.11n HT40		
Channel	Channel Frequency(MHz)		Frequency(MHz)	
149	5745	151	5755	
153	5765	159	5795	
157	5785			
161	5805			
165	5825			

# 1.1.6 Test Tool and Duty Cycle

Test Tool	MP tool, V2.0.1.1					
	Mode	Duty cycle (%)	Duty factor (dB)			
Duty Cycle and Duty Factor	11a	99.51%	0.02			
	HT20	99.26%	0.03			
	HT40	98.21%	0.08			




## 1.1.7 Power Setting

Modulation Mode	Test Frequency (MHz)	Power Set
11a	5745	92
11a	5785	92
11a	5825	92
HT20	5745	92
HT20	5785	92
HT20	5825	92
HT40	5755	92
HT40	5795	92

# **1.2 Local Support Equipment List**

	Support Equipment List							
No.	Equipment	Brand	Model	S/N	FCC ID	Signal cable / Length (m)		
1	Notebook	DELL	E6430		DoC	USB 1.0m shielded cable w/o core.		

# 1.3 Test Setup Chart

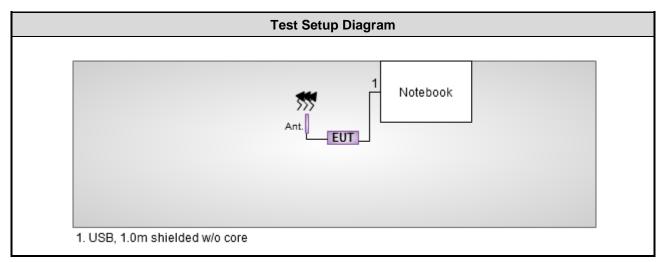



# 1.4 The Equipment List

Conducted Emission								
Conduction room 1 / (CO01-WS)								
Manufacturer Model No. Serial No. Calibration Date Calibration Until								
R&S	ESCS 30	100169	Oct. 15, 2013	Oct. 14, 2014				
SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 23, 2013	Nov. 22, 2014				
SCHWARZBECK	Schwarzbeck 8127	8127-666	Dec. 04, 2013	Dec. 03, 2014				
Woken	CFD200-NL	CFD200-NL-001	Apr. 23, 2014	Apr. 22, 2015				
NA	50	04	Apr. 18, 2014	Apr. 17, 2015				
	Manufacturer R&S SCHWARZBECK SCHWARZBECK Woken	Conduction room 1 / (CO01-WS)   Manufacturer Model No.   R&S ESCS 30   SCHWARZBECK Schwarzbeck 8127   SCHWARZBECK Schwarzbeck 8127   Woken CFD200-NL	Manufacturer Model No. Serial No.   R&S ESCS 30 100169   SCHWARZBECK Schwarzbeck 8127 8127-667   SCHWARZBECK Schwarzbeck 8127 8127-666   Woken CFD200-NL CFD200-NL-001	Conduction room 1 / (CO01-WS)ManufacturerModel No.Serial No.Calibration DateR&SESCS 30100169Oct. 15, 2013SCHWARZBECKSchwarzbeck 81278127-667Nov. 23, 2013SCHWARZBECKSchwarzbeck 81278127-666Dec. 04, 2013WokenCFD200-NLCFD200-NL-001Apr. 23, 2014				

Test Item	Radiated Emission										
Test Site	966 chamber1 / (03C	966 chamber1 / (03CH01-WS)									
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until						
Spectrum Analyzer	R&S	FSV40	101498	Jan. 25, 2014	Jan. 24, 2015						
Receiver	R&S	ESR3	101658	Jan. 10, 2014	Jan. 09, 2015						
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jan. 02, 2014	Jan. 01, 2015						
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Feb. 13, 2014	Feb. 12, 2015						
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Dec. 27, 2013	Dec. 26, 2014						
Preamplifier	Burgeon	BPA-530	SN:100219	Nov. 28, 2013	Nov. 27, 2014						
Preamplifier	Agilent	83017A	MY39501308	Dec. 16, 2013	Dec. 15, 2014						
Preamplifier	EM	EM18G40G	060572	Jun. 20, 2013	Jun. 19, 2014						
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Dec. 16, 2013	Dec. 15, 2014						
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Dec. 16, 2013	Dec. 15, 2014						
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16139/4	Dec. 16, 2013	Dec. 15, 2014						
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Dec. 16, 2013	Dec. 15, 2014						
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-002	Dec. 16, 2013	Dec. 15, 2014						
Note: Calibration Interval of instruments listed above is one year.											

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until				
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 15, 2012	Nov. 14, 2014				
Note: Calibration Interval of instruments listed above is two year.									

Test Item	RF Conducted									
Test Site	(TH01-WS)	(TH01-WS)								
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until					
Spectrum Analyzer	R&S	FSV40	101063	Feb. 17, 2014	Feb. 16, 2015					
Power Meter	Anritsu	ML2495A	1241002	Oct. 24, 2013	Oct. 23, 2014					
Power Sensor	Anritsu	MA2411B	1207366	Oct. 24, 2013	Oct. 23, 2014					
Note: Calibration Interval of instruments listed above is one year.										



### 1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247 ANSI C63.10-2009 FCC KDB 558074 D01 DTS Meas Guidance v03r01

Note: The EUT has been tested and complied with FCC part 15B requirement. FCC Part 15B test results are issued to another report.

# **1.6 Measurement Uncertainty**

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty							
Parameters	Uncertainty						
Bandwidth	±34.134 Hz						
Conducted power	±0.808 dB						
Frequency error	±34.134 Hz						
Power density	±0.463 dB						
Conducted emission	±2.670 dB						
AC conducted emission	±2.92 dB						
Radiated emission < 1GHz	±3.26 dB						
Radiated emission > 1GHz	±4.94 dB						
Time	±0.1%						



# 2 Test Configuration

# 2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	22°C / 68%	Skys Huang
Radiated Emissions 03CH01-WS		23-24°C / 63-65%	Haru Yang Brad Wu
RF Conducted	TH01-WS	24°C / 62%	Mark Liao

➢ FCC site registration No.: 657002

➢ IC site registration No.: 10807A-1

# 2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Data Rate (Mbps) / MCS	Test Configuration
Conducted Emissions	HT40	5755	MCS 0	
Radiated Emissions ≤1GHz	HT40	5755	MCS 0	
Radiated Emissions >1GHz RF Output Power 6dB bandwidth Power spectral density	11a HT20 HT40	5745 / 5785 / 5825 5745 / 5785 / 5825 5755 / 5795	6 Mbps MCS 0 MCS 0	

NOTE:

1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **Y-plane** results were found as the worst case and were shown in this report.



# **3** Transmitter Test Results

### 3.1 Conducted Emissions


#### 3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit								
Frequency Emission (MHz) Quasi-Peak Average								
0.15-0.5	66 - 56 *	56 - 46 *						
0.5-5	56	46						
5-30	60	50						
Note 1: * Decreases with the logarithm of the frequency.								

#### 3.1.2 Test Procedures

- 1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
- The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
- 3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
- 4. This measurement was performed with AC 120V / 60Hz.


#### 3.1.3 Test Setup

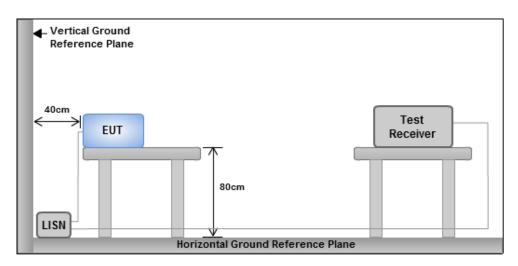

Note: 1. Support units were connected to second LISN.


2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes



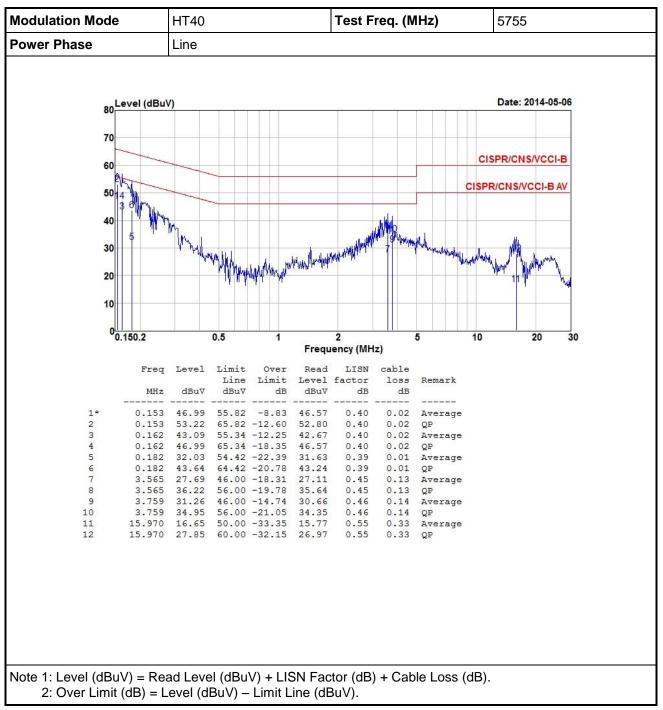

### 3.1.4 Test Result of Conducted Emissions



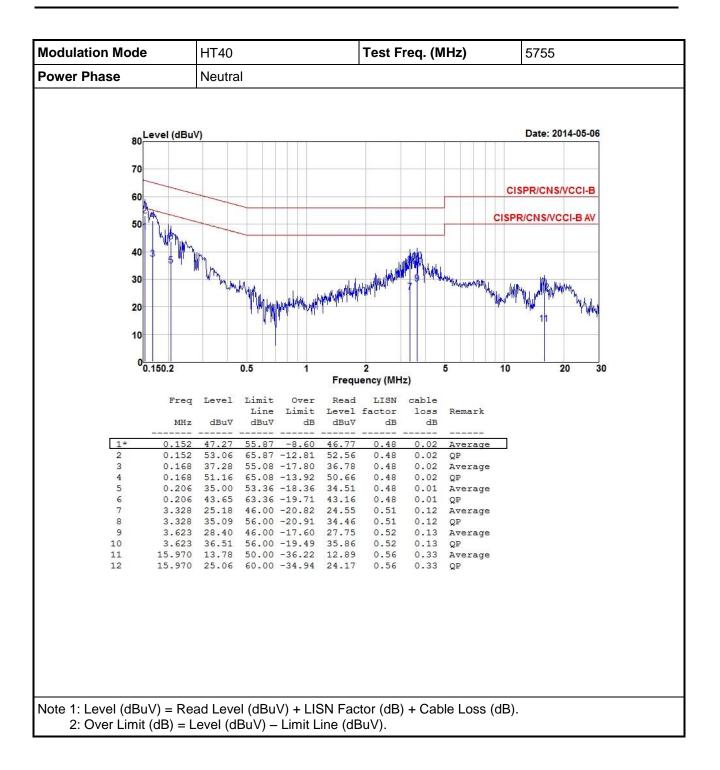



# 3.2 6dB and Occupied Bandwidth


#### 3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

#### 3.2.2 Test Procedures

- 1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
- 2. Detector = Peak, Trace mode = max hold.
- 3. Sweep = auto couple, Allow the trace to stabilize.
- 4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.


#### 3.2.3 Test Setup





Modulation	N		6dB Bandwidth (MHz)				Limit (kHz)
Mode	N <sub>TX</sub>	Freq. (MHz)	Chain 0	Chain 1	Chain 2	Chain 3	
11a	1	5745	14.38				500
11a	1	5785	14.72				500
11a	1	5825	15.59				500
HT20	1	5745	15.07				500
HT20	1	5785	14.14				500
HT20	1	5825	15.07				500
HT40	1	5755	35.13				500
HT40	1	5795	35.25				500

#### 3.2.4 Test Result of 6dB and Occupied Bandwidth

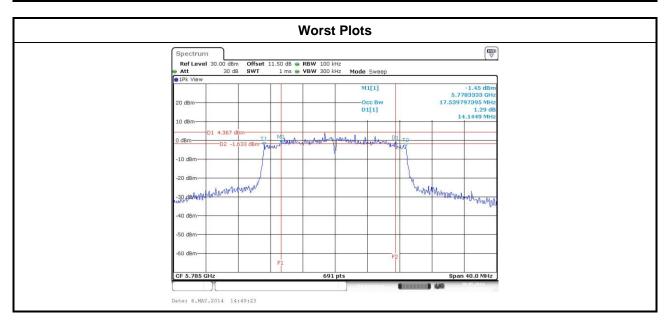



Modulation				99% Occupied E	Bandwidth (MHz)	1
Mode	N <sub>TX</sub>	Freq. (MHz)	Chain 0	Chain 1	Chain 2	Chain 3
11a	1	5745	16.68			
11a	1	5785	16.61			
11a	1	5825	16.61			
HT20	1	5745	17.58			
HT20	1	5785	17.55			
HT20	1	5825	17.58			
HT40	1	5755	36.40			
HT40	1	5795	36.53			





### 3.3 **RF Output Power**

#### 3.3.1 Limit of RF Output Power

Conducted power shall not exceed 1Watt.

- Antenna gain <= 6dBi, no any corresponding reduction is in output power limit.
- Antenna gain > 6dBi
  - Non Fixed, point to point operations.

The conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dB

Fixed, point to point operations

Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point Operations, maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 5725–5850 MHz band that are used exclusively for fixed, point-to-point operations ,no any corresponding reduction is in transmitter peak output power

#### 3.3.2 Test Procedures

Maximum Peak Conducted Output Power

- Spectrum analyzer
  - 1. Set RBW = 1MHz, VBW = 3MHz, Detector = Peak.
  - 2. Sweep time = auto, Trace mode = max hold, Allow trace to fully stabilize.
  - 3. Use the spectrum analyzer channel power measurement function with the band limits set equal to the DTS bandwidth edges.


#### Power meter

- 1. A broadband Peak RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.
- Maximum Conducted Output Power (For reference only)

#### Power meter

1. A broadband Average RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

#### 3.3.3 Test Setup





Modulation Mode	Ντχ	Freq. (MHz)	Peak conducted output power (dBm)			Total Power		Limit	
Wode		(11172)	Chain 0	Chain 1	Chain 2	Chain 3	(mW)	(dBm)	(dBm)
11a	1	5745	22.13				163.305	22.13	30.00
11a	1	5785	22.05				160.325	22.05	30.00
11a	1	5825	21.71				148.252	21.71	30.00
HT20	1	5745	22.24				167.494	22.24	30.00
HT20	1	5785	22.08				161.436	22.08	30.00
HT20	1	5825	21.67				146.893	21.67	30.00
HT40	1	5755	22.37				172.584	22.37	30.00
HT40	1	5795	22.26				168.267	22.26	30.00

# 3.3.4 Test Result of Maximum Output Power

Modulation Mode	Ντχ	Freq. (MHz)	Conducted (average) output power (dBm)			(dPm)	Total Power	Total Power	Limit
Wode		(11172)	Chain 0	Chain 1	Chain 2	Chain 3	(mW)	(dBm)	(dBm)
11a	1	5745	15.26				33.574	15.26	30.00
11a	1	5785	15.04				31.915	15.04	30.00
11a	1	5825	14.76				29.923	14.76	30.00
HT20	1	5745	15.21				33.189	15.21	30.00
HT20	1	5785	14.94				31.189	14.94	30.00
HT20	1	5825	14.63				29.040	14.63	30.00
HT40	1	5755	15.34				34.198	15.34	30.00
HT40	1	5795	15.18				32.961	15.18	30.00

Note: Conducted average output power is for reference only.



## 3.4 **Power Spectral Density**


#### 3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

#### 3.4.2 Test Procedures

- Maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit.
  - 1. Set the RBW = 3kHz, VBW = 10kHz.
  - 2. Detector = Peak, Sweep time = auto couple.
  - 3. Trace mode = max hold, allow trace to fully stabilize.
  - 4. Use the peak marker function to determine the maximum amplitude level.
- Maximum (average) conducted output power was used to demonstrate compliance to the fundamental output power limit.
  - 1. Set the RBW = 100kHz, VBW = 300 kHz.
  - 2. Detector = RMS, Sweep time = auto couple.
  - 3. Set the sweep time to: ≥ 10 x (number of measurement points in sweep) x (maximum data rate per stream).
  - 4. Perform the measurement over a single sweep.
  - 5. Use the peak marker function to determine the maximum amplitude level.\


#### 3.4.3 Test Setup





Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	Total Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
11a	1	5745	-8.71	8
11a	1	5785	-8.58	8
11a	1	5825	-10.48	8
HT20	1	5745	-8.90	8
HT20	1	5785	-9.30	8
HT20	1	5825	-10.12	8
HT40	1	5755	-10.34	8
HT40	1	5795	-12.26	8

### 3.4.4 Test Result of Power Spectral Density

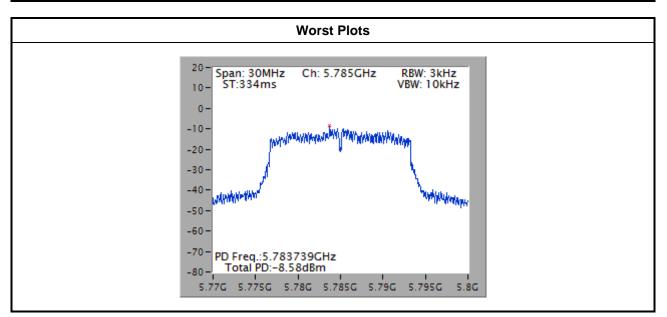



# 3.5 Unwanted Emissions into Restricted Frequency Bands

#### 3.5.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit										
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)							
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300							
0.490~1.705	24000/F(kHz)	33.8 - 23	30							
1.705~30.0	30	29	30							
30~88	100	40	3							
88~216	150	43.5	3							
216~960	200	46	3							
Above 960	500	54	3							

#### Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit **Note 2:** 

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

#### 3.5.2 Test Procedures


- 1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at a height of 0.8 m test table above the ground plane.
- 2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


- 1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
- 2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
- 3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.



#### 3.5.3 Test Setup

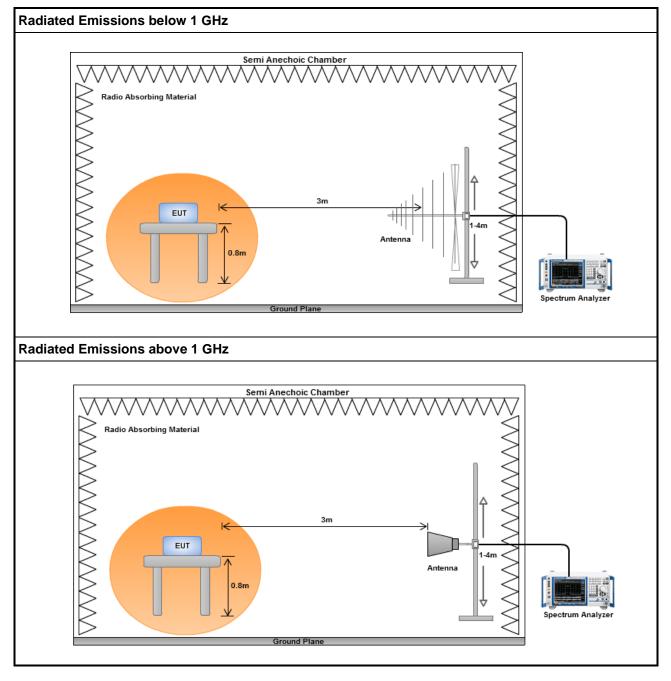



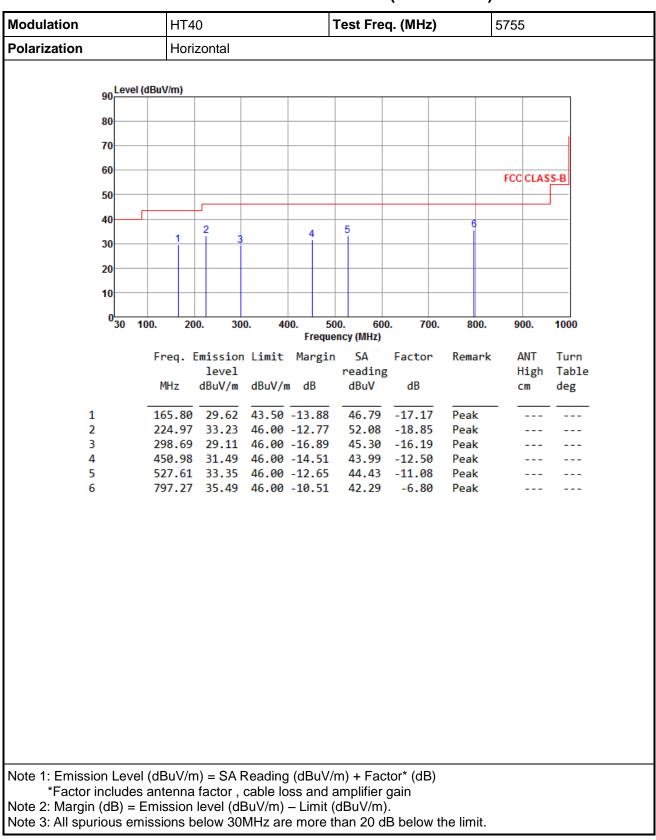


#### 3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)




Modulation		HT40			1	est Fre	q. (MHz)	5755		
Polarization		Vertical								
	Lovol (	dBu\//m)								
9	OLEVEI	dBuV/m)								
8	0									
7	0									
6	0									
									FCC CL	ASS-B
5	0							4	5	
4	0							2	Ĭ	6
3	0				1					
2	0									
	0									
	0 <mark></mark> 301	00. 20	0. 30	0. 40	00. 50		0. 700.	800.	900.	1000
					-	ncy (MHz)	<b>-</b> .			<b>-</b>
		Freq. 1	mission level	Limit	Margin	SA reading	Factor	Remark	c ANT Hig	
		MHz	dBuV/m	dBuV/n	n dB	dBuV	dB		cm	deg
1		409 51	28.36	46.00	17 64	39.94	11 50	Deals		
1 2			28.36 34.05			39.94 41.24	-11.58 -7.19	Peak Peak		
3		774.96	37.09	46.00	-8.91	44.09		Peak		
4 5			41.94		-4.06 -5.60	48.74 46.65		Peak Peak		
6					-15.81		-0.25	Peak		
	امیندا			) o o olim -		~), <b>Г</b> а-	tor* (-10)			
Note 1: Emission Factor ine										
Note 2: Margin (d	dB) = E	Emission	level (dE	BuV/m)	– Limit (d	dBuV/m)				
Note 3: All spurio	us em	issions b	elow 30l	MHz ar	e more tr	nan 20 d	B below t	he limit.		



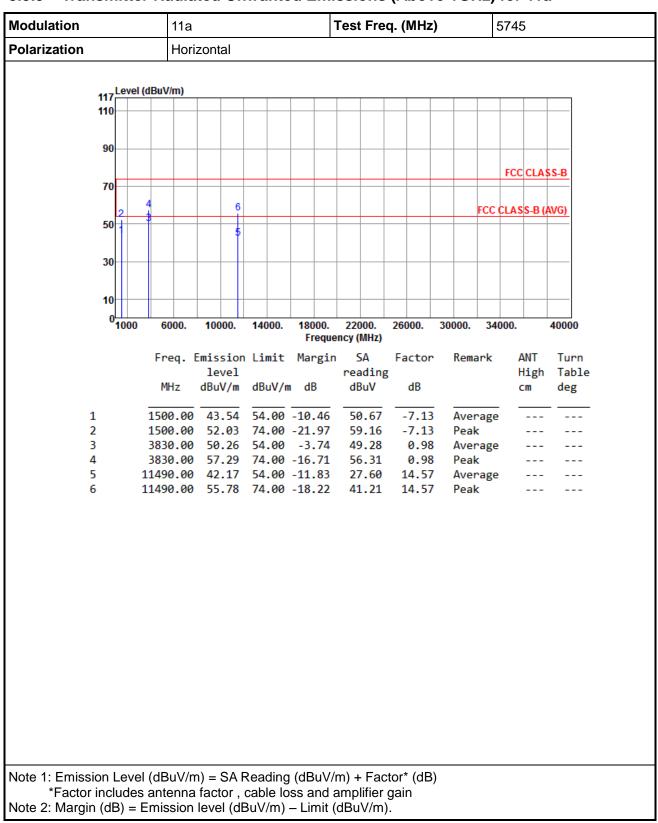


### 3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11a




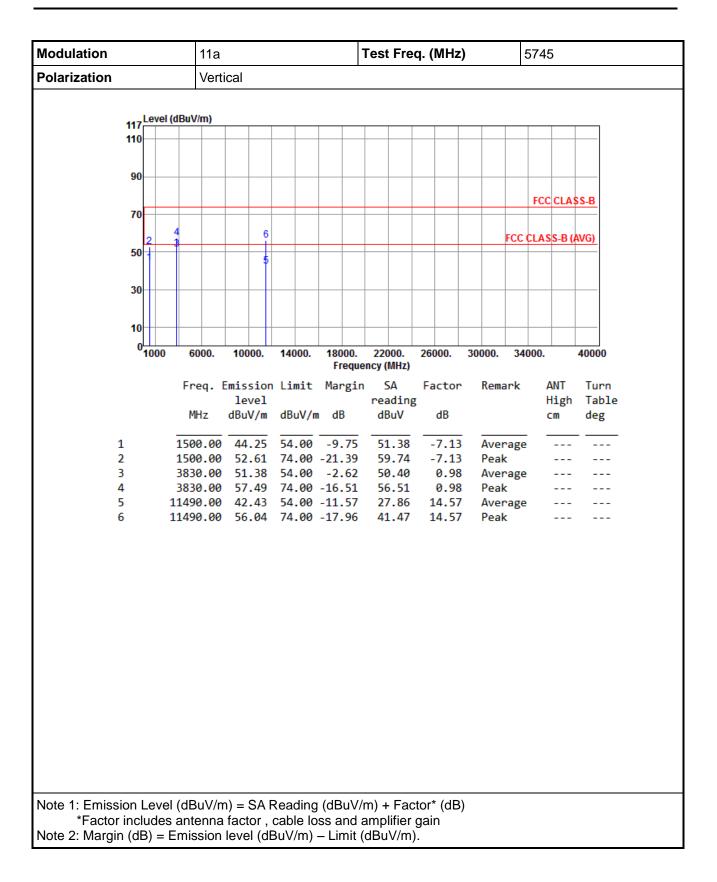




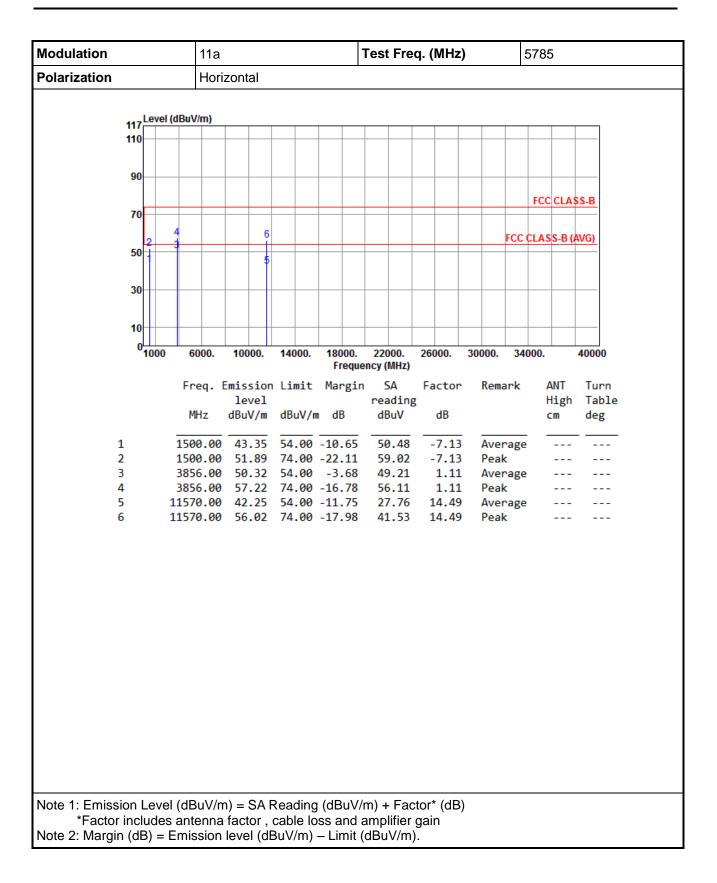




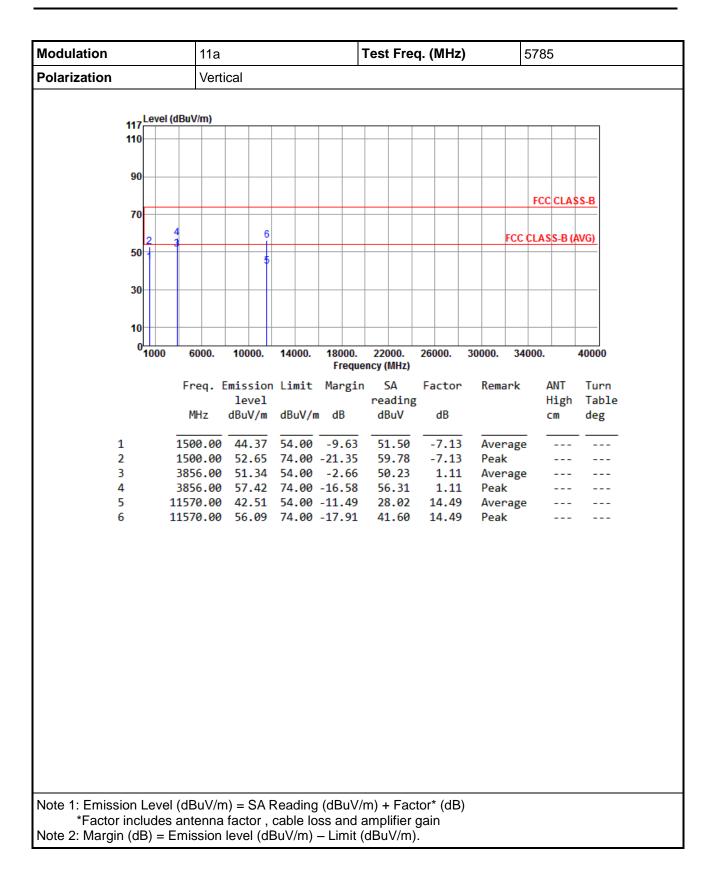




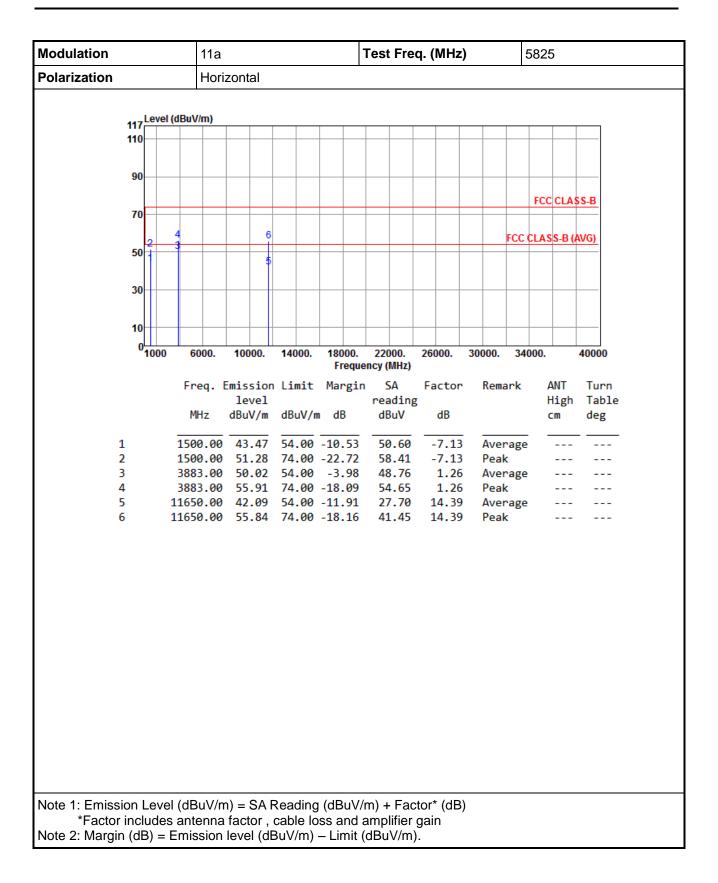



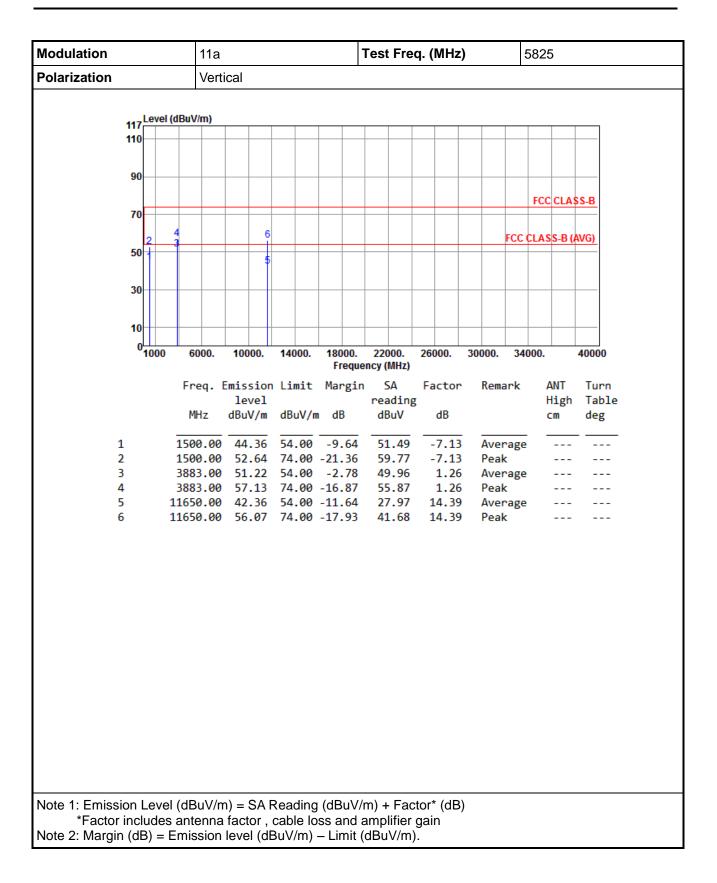




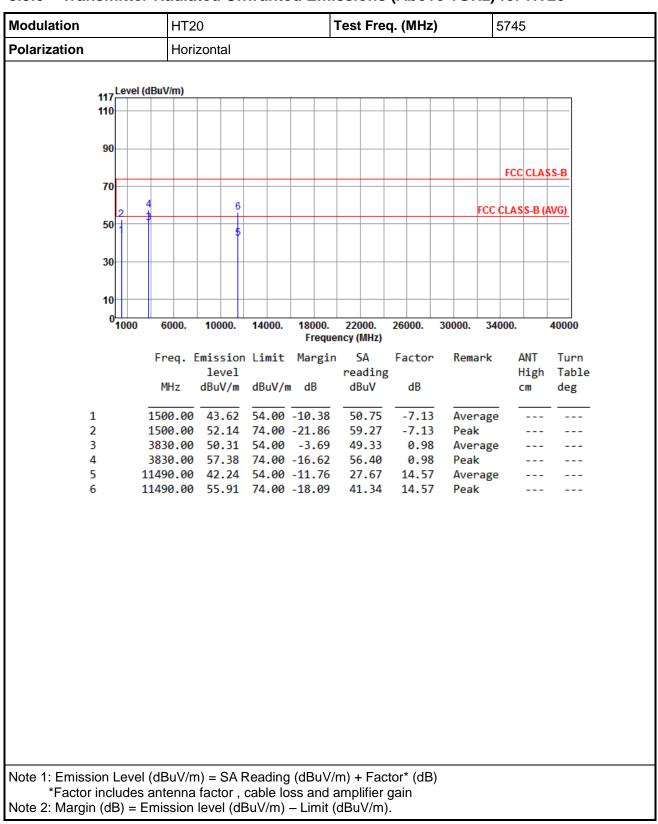


### 3.5.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT20




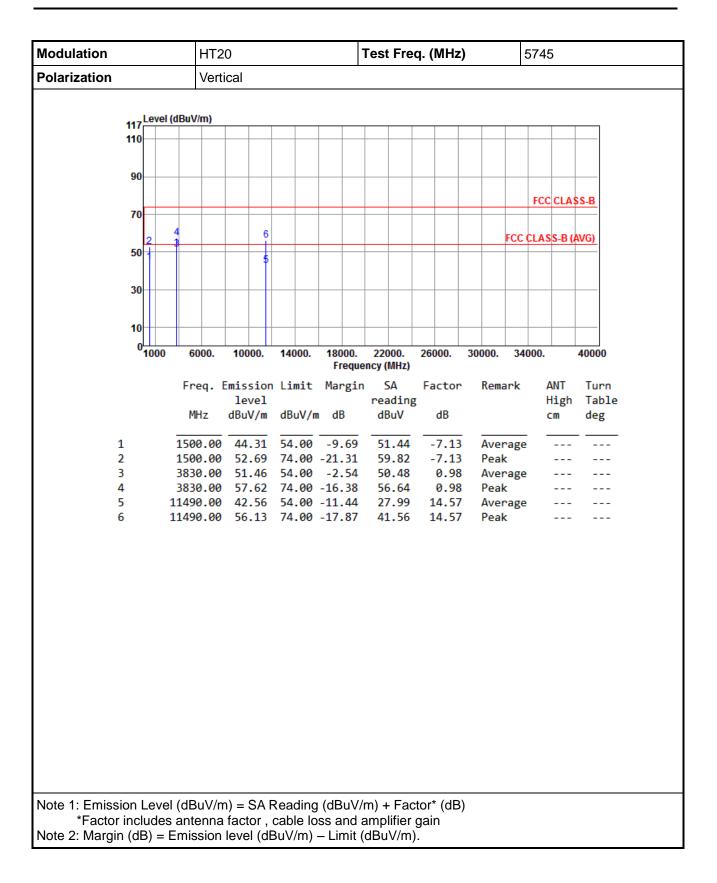




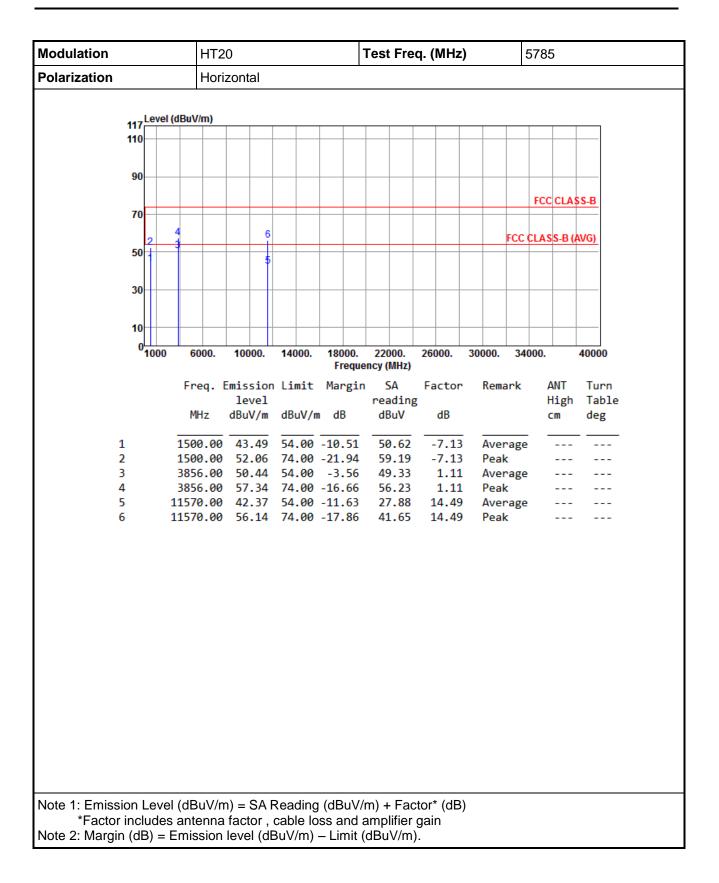




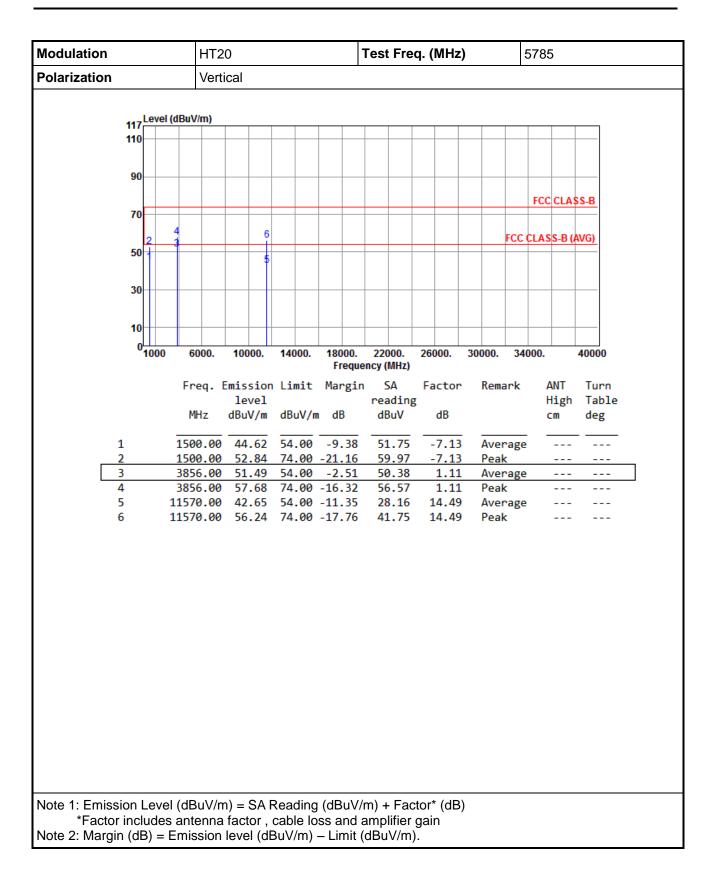




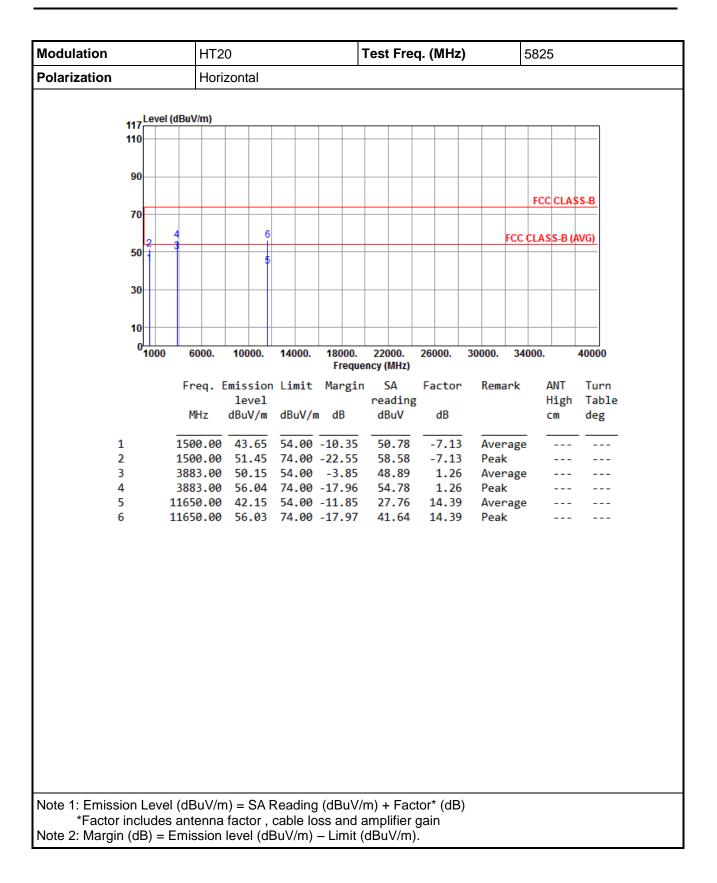



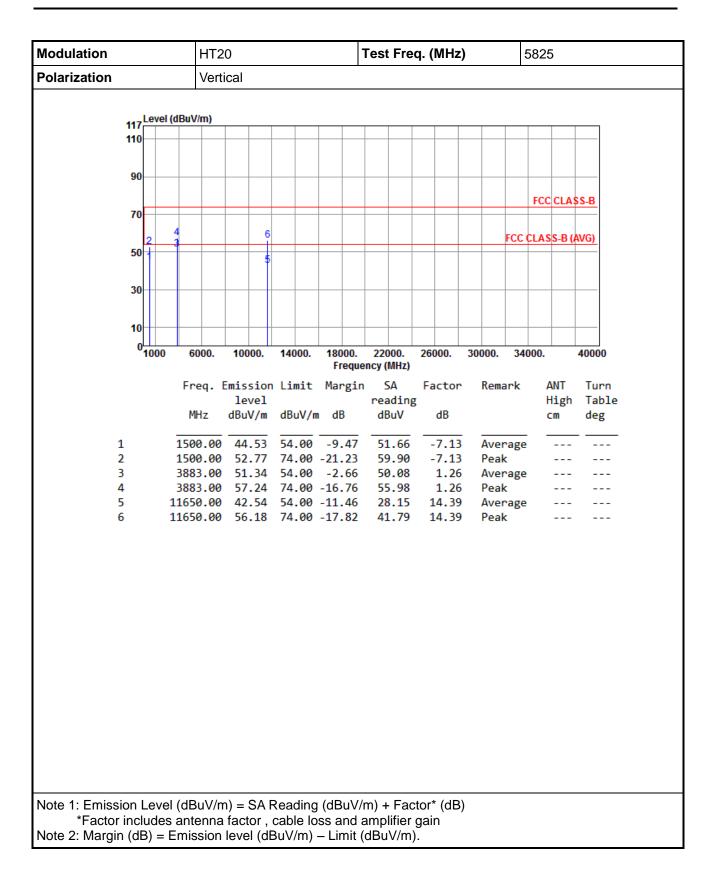




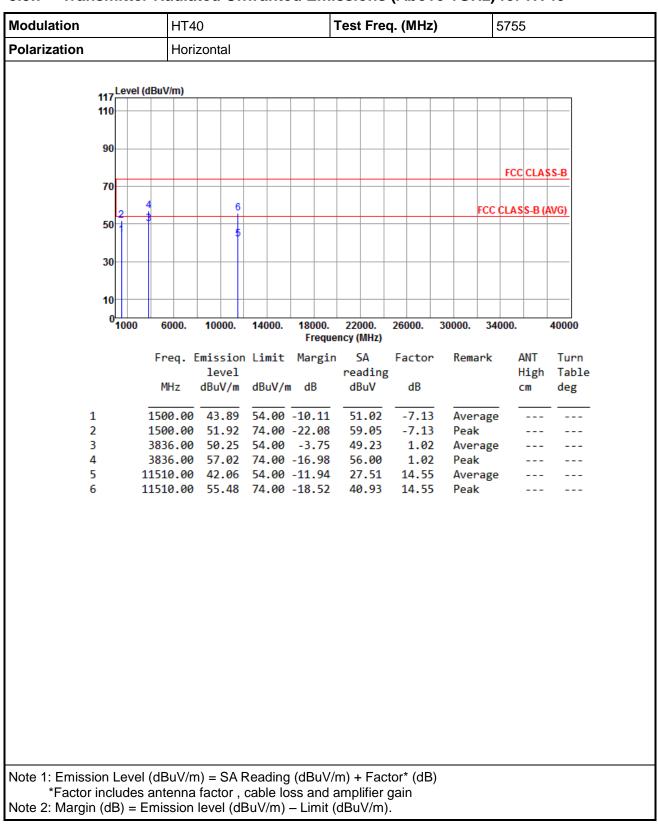


# 3.5.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT40




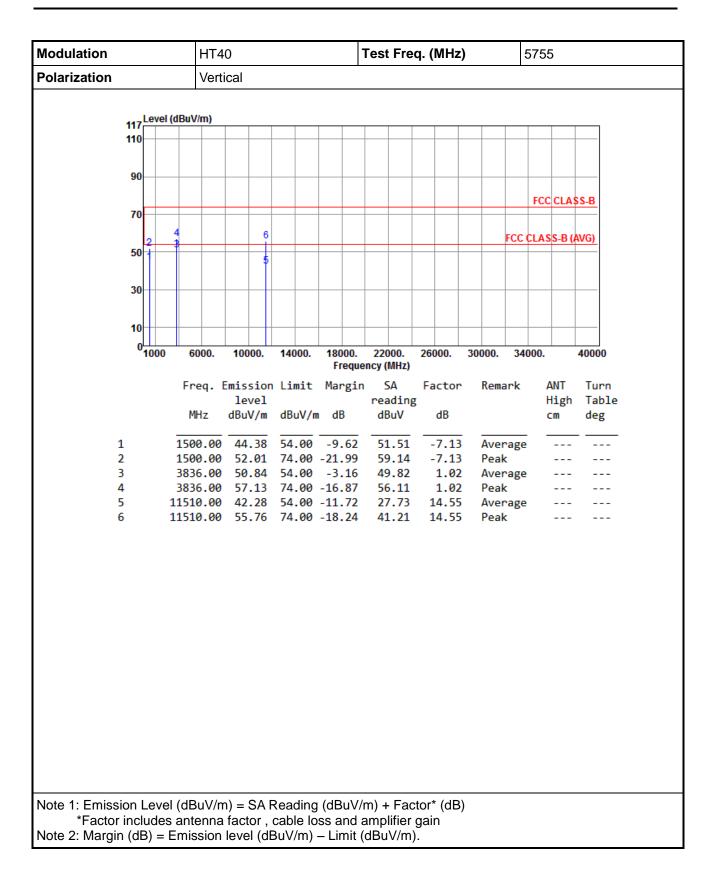



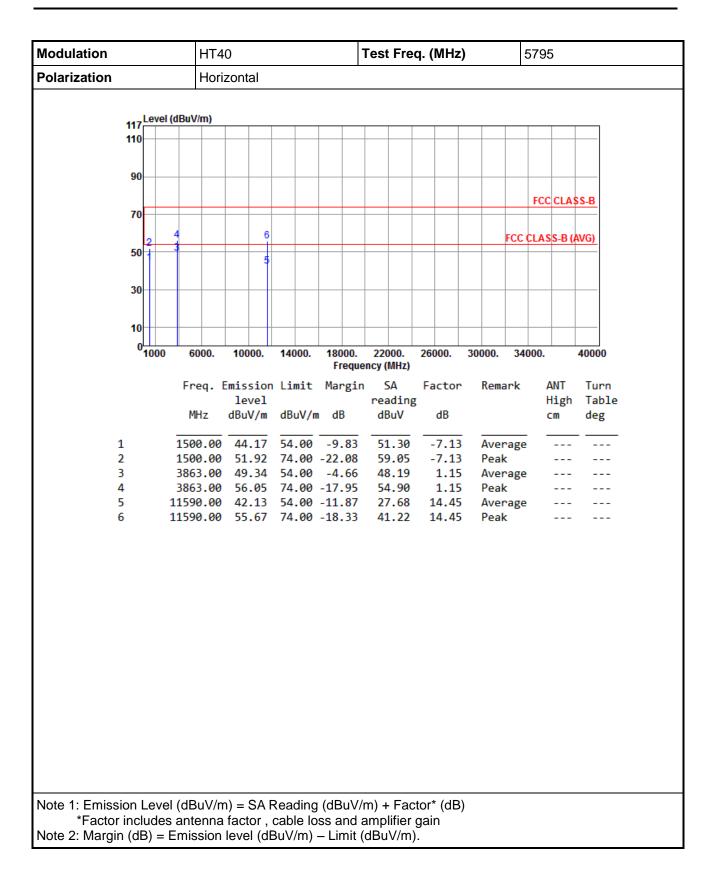



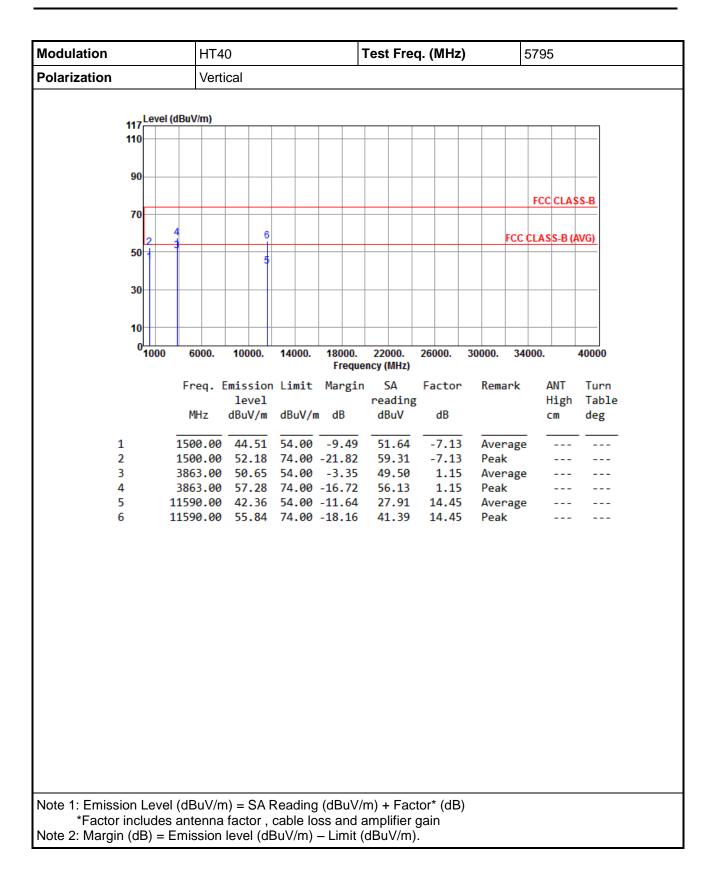



# 3.6 Unwanted Emissions into Non-Restricted Frequency Bands

## 3.6.1 Limit of Unwanted Emissions into Non-Restricted Frequency Bands

The peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

# 3.6.2 Test Procedures


#### **Reference Level Measurement**

- 1. Set the RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
- 2. Set Sweep time = auto couple, Trace mode = max hold.
- 3. Allow trace to fully stabilize.
- 4. Use the peak marker function to determine the maximum amplitude level.

## **Unwanted Emissions Level Measurement**

- 1. Set RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
- 2. Trace Mode = max hold, Sweep = auto couple.
- 3. Allow the trace to stabilize.
- 4. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.


## 3.6.3 Test Setup






# 3.6.4 Unwanted Emissions into Non-Restricted Frequency Bands


### 802.11a

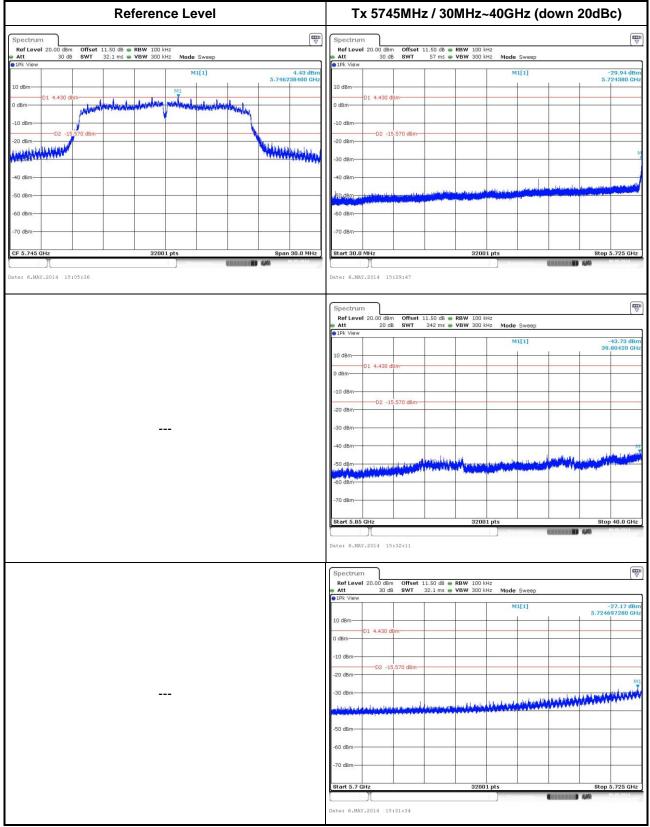



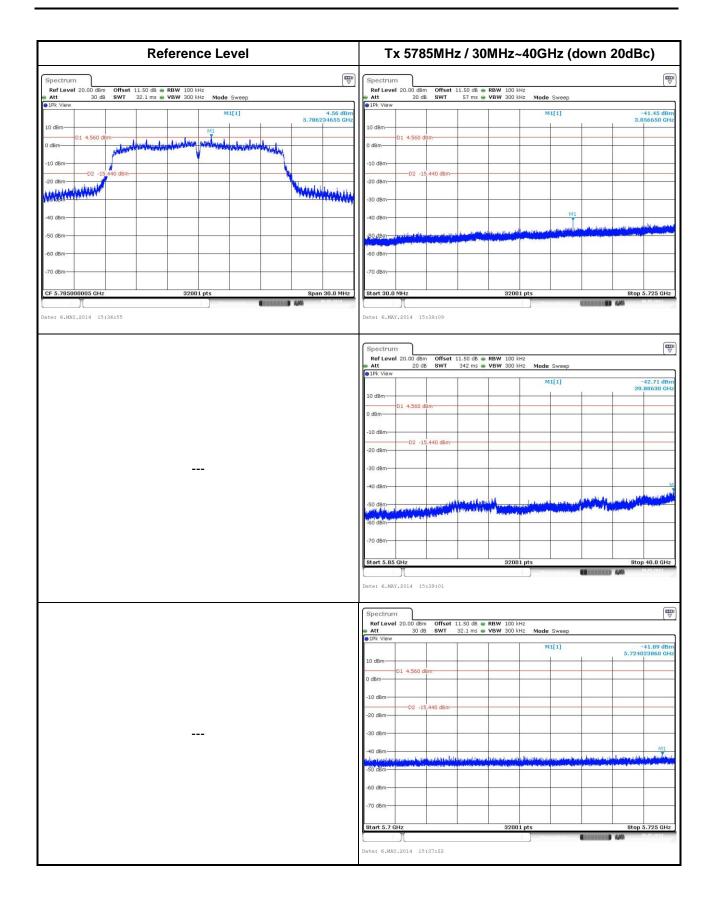




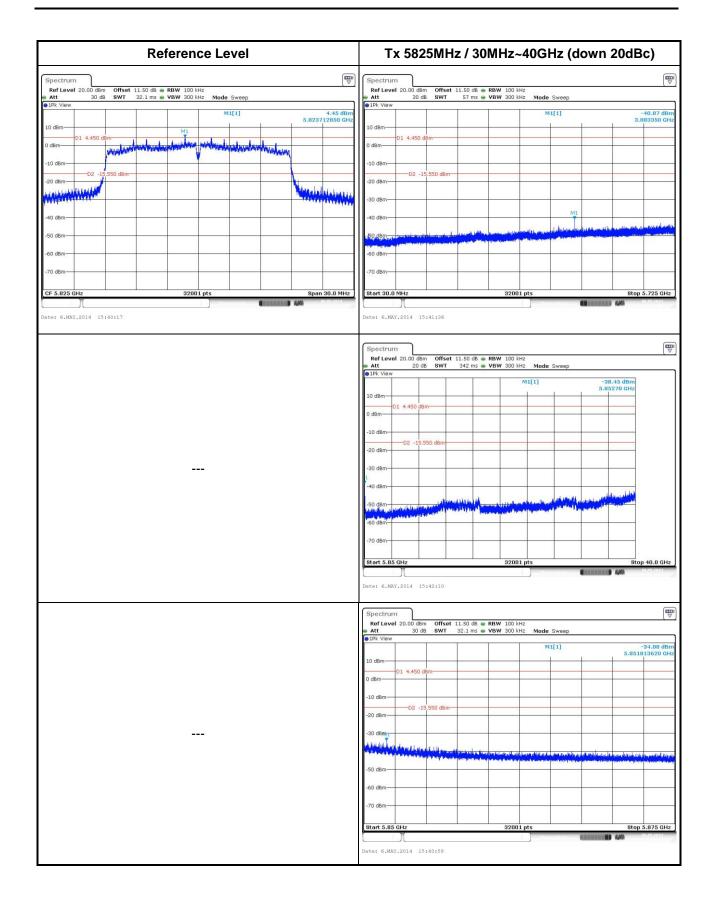





#### 802.11n HT20

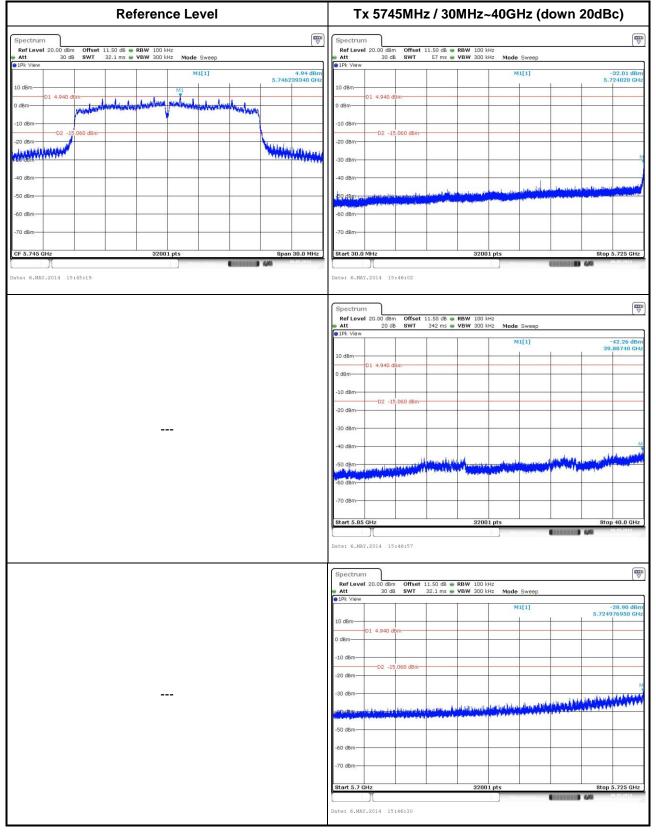



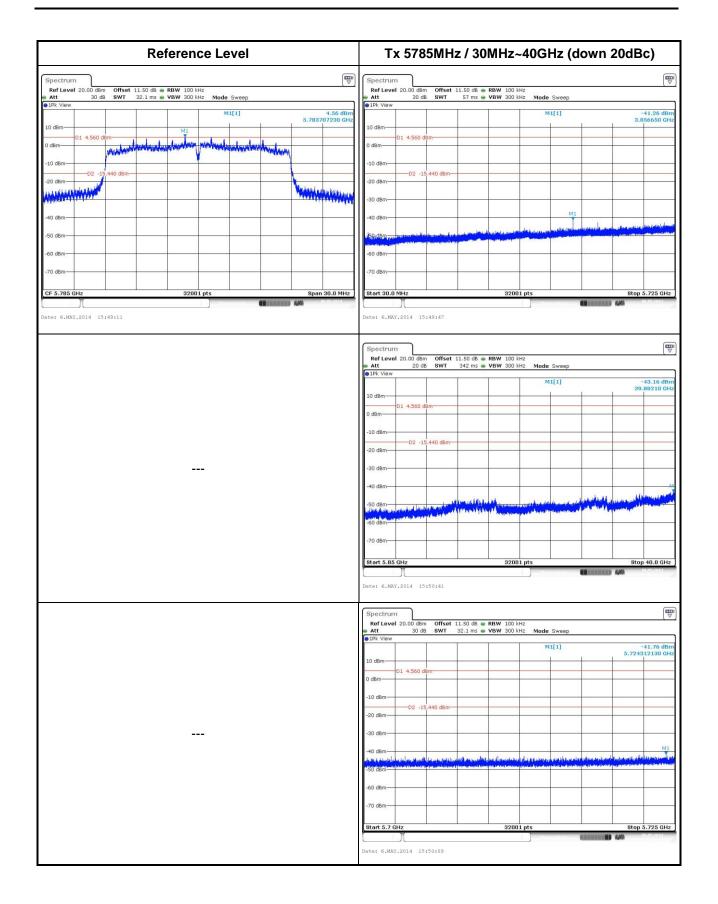




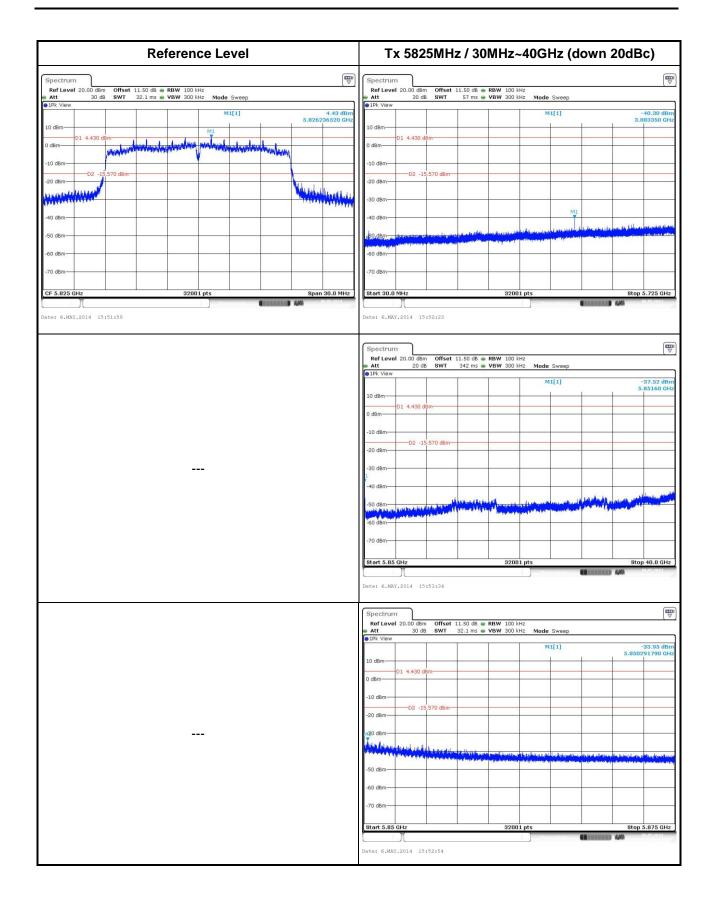




#### 802.11n HT40

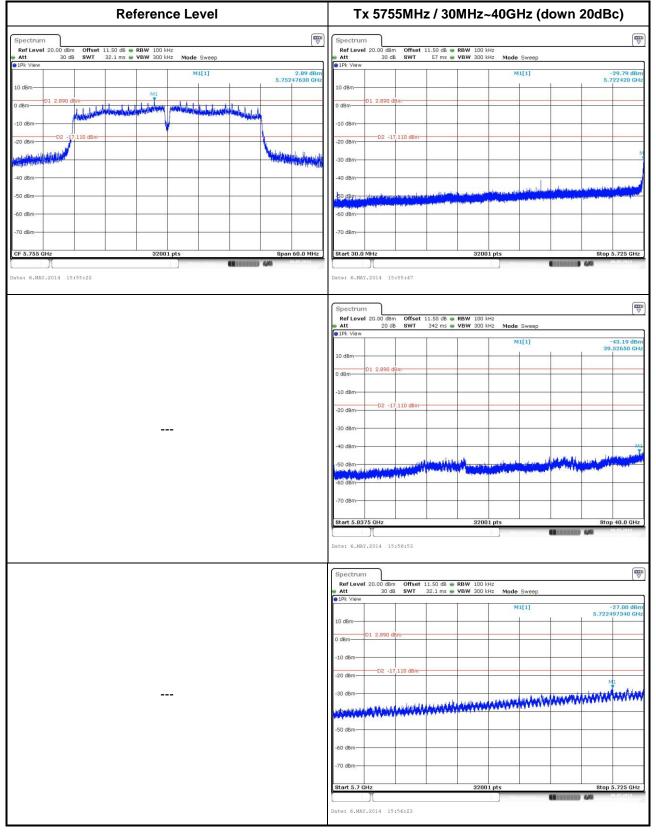



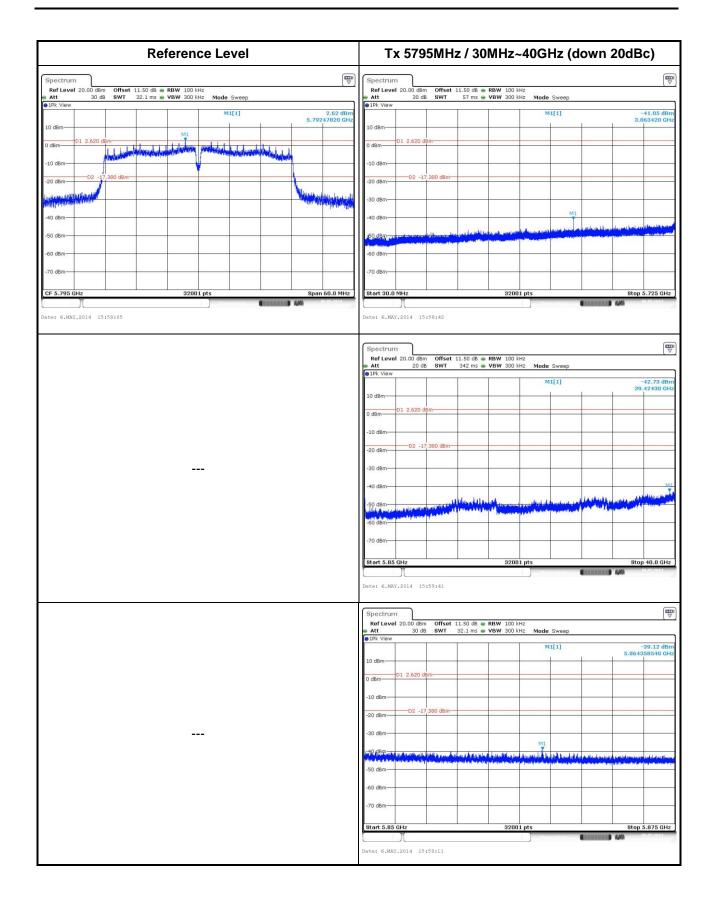



# 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp, it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website <u>http://www.icertifi.com.tw</u>.

Linkou	Kwei Shan
Tel: 886-2-2601-1640	Tel: 886-3-271-8666
No. 30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City, Taiwan, R.O.C.	No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666 Fax: 886-3-318-0155 Email: ICC\_Service@icertifi.com.tw

==END===