

FCC Test Report

Report No.: AGC11758240103FR02

FCC ID : 2A482-EA10

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: Baseus True Wireless Earphones

BRAND NAME: baseus

MODEL NAME: Baseus Bowie 30, Baseus Bowie 35

APPLICANT: Shenzhen Baseus Technology Co., Ltd.

DATE OF ISSUE: Mar. 27, 2024

STANDARD(S) : FCC Part 15 Subpart C §15.247

REPORT VERSION: V1.0

Attestation Of Global Concellance (Shenzhen) Co., Ltd



Page 2 of 75


Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes	
V1.0	/	Mar. 27, 2024	Valid	Initial Release	




Table of Contents

1. General Information	5
2. Product Information	6
2.1 Product Technical Description	6
2.2 Test Frequency List	6
2.3 Related Submittal(S) / Grant (S)	7
2.4 Test Methodology	7
2.5 Special Accessories	7
2.6 Equipment Modifications	7
2.7 Antenna Requirement	7
3. Test Environment	8
3.1 Address of the Test Laboratory	8
3.2 Test Facility	8
3.3 Environmental Conditions	9
3.4 Measurement Uncertainty	9
3.5 List of Equipment Use	10
4.System Test Configuration	12
4.1 EUT Configuration	12
4.2 EUT Exercise	12
4.3 Configuration of Tested System	12
4.4 Equipment Used In Tested System	12
4.5 Summary of Test Results	
5. Description of Test Modes	
6. Duty Cycle Measurement	15
7. RF Output Power Measurement	16
7.1 Provisions Applicable	16
7.2 Measurement Procedure	16
7.3 Measurement Setup (Block Diagram of Configuration)	16
7.4 Measurement Result	17
8. 6dB Bandwidth Measurement	25
8.1 Provisions Applicable	25
8.2 Measurement Procedure	25
8.3 Measurement Setup (Block Diagram of Configuration)	25
8.4 Measurement Results	26
9. Power Spectral Density Measurement	33
9.1 Provisions Applicable	33
9.2 Measurement Procedure	33
9.3 Measurement Setup (Block Diagram of Configuration)	33
9.4 Measurement Results	34
10. Conducted Band Edge and Out-of-Band Emissions	38





10.1 Provisions Applicable	38
10.2 Measurement Procedure	38
10.3 Measurement Setup (Block Diagram of Configuration)	38
10.4 Measurement Results	39
11. Radiated Spurious Emission	50
11.1 Measurement Limit	50
11.2 Measurement Procedure	50
11.3 Measurement Setup (Block Diagram of Configuration)	53
11.4 Measurement Result	54
12. AC Power Line Conducted Emission Test	72
12.1 Measurement Limit	72
12.2 Measurement Setup (Block Diagram of Configuration)	72
12.3 Preliminary Procedure of Line Conducted Emission Test	
12.4 Final Procedure of Line Conducted Emission Test	73
12.5 Measurement Results	73
Appendix I: Photographs of Test Setup	74
Appendix II: Photographs of Test EUT	





1. General Information

	,
Applicant	Shenzhen Baseus Technology Co., Ltd.
Address	2nd Floor, Building B, Baseus Intelligence Park, No.2008, Xuegang Rd, Gangtou Community, Bantian Street, Longgang District, Shenzhen, China
Manufacturer	Shenzhen Baseus Technology Co., Ltd.
Address	2nd Floor, Building B, Baseus Intelligence Park, No.2008, Xuegang Rd, Gangtou Community, Bantian Street, Longgang District, Shenzhen, China
Factory	N/A
Address	N/A
Product Designation	Baseus True Wireless Earphones
Brand Name	baseus
Test Model	Baseus Bowie 30
Series Model(s)	Baseus Bowie 35
Difference Description	All the same except for the model name and the charging case plastic appearance and screen printing.
Date of receipt of test item	Jan. 15, 2024
Date of Test	Jan. 15, 2024 to Mar. 27, 2024
Deviation from Standard	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Test Report Form No	AGCER-FCC-BLE-V1

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By	Thea Huang	
	Thea Huang (Project Engineer)	Mar. 27, 2024
Reviewed By	Calvin Liu	
	Calvin Liu (Reviewer)	Mar. 27, 2024
Approved By	Max Zhang	
	Max Zhang (Authorized Officer)	Mar. 27, 2024



AGC®

Report No.: AGC11758240103FR02 Page 6 of 75

2. Product Information

2.1 Product Technical Description

2400MHz-2483.5MHz
2402MHz-2480MHz
V5.3
BLE ⊠GFSK 1Mbps ⊠GFSK 2Mbps
40
40 Channels (37 hopping + 3 advertising channels)
2 MHz
Left headset: BLE GFSK 1Mbps: 5.239dBm BLE GFSK 2Mbps: 5.248dBm
V1.1_01
V1.0
FPC Antenna
2.92dBi
DC 3.85V by battery or DC 5V by adapter
N/A

Note:

The EUT includes left and right channel earphones, the schematic diagram is the same, but the PCB Layout is different. The RF output power and radiated emission below 30MHz of each earphone has been tested and recorded in the report. For other test items, due to the higher power, the left headset has been tested and recorded in this report, which is the worst case.

2.2 Test Frequency List

Channel Number	Frequency		
0	2402 MHz		
1	2404 MHz		
:	:		
19	2440MHz		
:	:		
38	2478 MHz		
39	2480 MHz		
	0 1 : 19 : 38		



Page 7 of 75

2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **2A482-EA10**, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.4 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules

2.5 Special Accessories

Not available for this EUT intended for grant.

2.6 Equipment Modifications

Not available for this EUT intended for grant.

2.7 Antenna Requirement

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is 2.92dBi.



Page 8 of 75

3. Test Environment

3.1 Address of the Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories).

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 9 of 75


3.3 Environmental Conditions

	Normal Conditions
Temperature range (°C)	15 - 35
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106
Power supply	DC 3.85V

3.4 Measurement Uncertainty

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty		
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$		
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$		
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$		
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$		
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$		
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$		
Uncertainty of Occupied Channel Bandwidth	U _c = ±2 %		





3.5 List of Equipment Use


• R	RF Conducted Test System							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
\boxtimes	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2023-06-01	2024-05-31	
\boxtimes	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2023-03-03	2024-03-02	
\boxtimes	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2024-02-01	2025-01-31	
\boxtimes	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2023-03-03	2024-03-02	
\boxtimes	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2024-02-01	2025-01-31	
\boxtimes	AGC-EM-A152	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08	
\boxtimes	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A	
\boxtimes	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A	

• F	Radiated Spurious Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2023-02-18	2024-02-17	
\boxtimes	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31	
	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2023-06-03	2024-06-02	
\boxtimes	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2023-06-01	2024-05-31	
\boxtimes	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2022-03-12	2024-03-11	
\boxtimes	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04	
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10	
\boxtimes	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2023-03-23	2025-03-22	
\boxtimes	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23	
\boxtimes	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2022-08-04	2024-08-03	
\boxtimes	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2023-06-01	2024-05-31	
\boxtimes	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08	
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08	

• A	AC Power Line Conducted Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2023-06-03	2024-06-02	
	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2023-06-03	2024-06-02	
Any repor	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ having not been stam	2023-06-09 ped by the "Dedicate	2024-06-08 d Testing/Inspection	

Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/





• Tes	Test Software						
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information		
	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71		
\boxtimes	AGC-EM-S003	RE-Test System	FARA	EZ-EMC	VRA-03A		
\boxtimes	AGC-ER-S012	BT/WIFI-Test System	Tonscend	JS1120-2	2.6		
\boxtimes	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0		



Page 12 of 75

4.System Test Configuration

4.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 Configuration of Tested System

Radiated Emission Configure:



4.4 Equipment Used In Tested System

The following peripheral devices and interface cables were connected during the measurement:

☐ Test Accessories Come From The Laboratory

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable
1	Control Box	USB-TTL			-

No.	Equipment	Model No.	Manufacturer Specification Information		Cable
1	Baseus True Wireless Earphones	Baseus Bowie 30	Shenzhen Baseus Technology Co., Ltd.	2A482-EA10	



Page 13 of 75

4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203&15.247(b)(4)	Antenna Equipment	Pass
2	§15.247 (b)(3)	RF Output Power	Pass
3	§15.247 (a)(2)	6 dB Bandwidth	Pass
4	§15.247 (e)	Power Spectral Density	Pass
4	§15.247 (d)	Conducted Band Edge and Out-of-Band Emissions	Pass
5	§15.209	Radiated Emission& Band Edge	Pass
6	§15.207	AC Power Line Conducted Emission	Not applicable

Note: The BT function cannot transmit when charging.





5. Description of Test Modes

	Summary Table of Test Cases			
	Data Rate / Modulation			
Test Item	Bluetooth – LE(1Mbps/2Mbps) / GFSK			
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps(Battery powered)			
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps(Battery powered)			
Radiated & Conducted	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps(Battery powered)			
Test Cases	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps(Battery powered)			
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps(Battery powered)			
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps(Battery powered)			
AC Conducted Emission	Not applicable			

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. The battery is full-charged during the test.
- 3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 4. For Conducted Test method, a temporary antenna connector is provided by the manufacture.

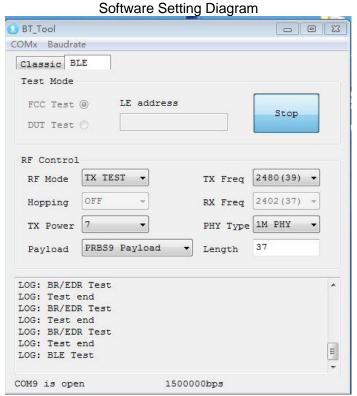





6. Duty Cycle Measurement


The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = Peak. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:


Operating mode	T(µs)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/ T Minimum VBW (kHz)
BLE_1Mbps	400	63.19	1.99	2.5
BLE_2Mbps	216	34.12	4.67	4.63

Remark:

- Duty Cycle factor = 10 * log (1/ Duty cycle)
- 2. The duty cycle of each frequency band mode reflects the determination requirements of the low channel measurement value

The test plots as follows:

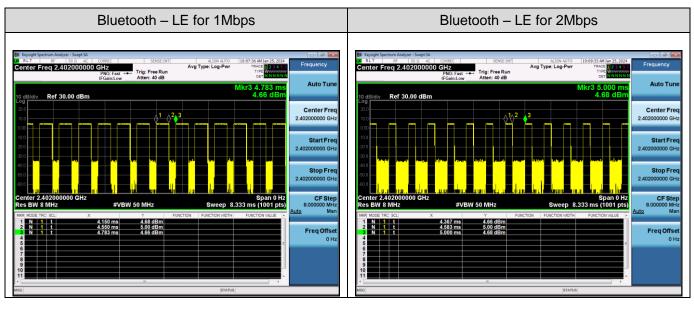





7. RF Output Power Measurement


7.1 Provisions Applicable

For DTSs employing digital modulation techniques operating in the bands 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W.

7.2 Measurement Procedure


- ☑ For Peak Power, the testing follows ANSI C63.10 Section 11.9.1.1 Method Max peak power:
- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the RBW ≥ DTS bandwidth
- 3. Set the VBW \geq [3 x RBW].
- 4. Span ≥ [3 x RBW].
- 5. Sweep= auto couple.
- 6. Detector Function= Peak.
- 7. Trace mode= Max hold.
- 8. Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.
- For Average power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G:
- The RF output of EUT was connected to the power meter by RF cable and attenuator.
- 2. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Measure the conducted output power and record the results in the test report.

7.3 Measurement Setup (Block Diagram of Configuration)

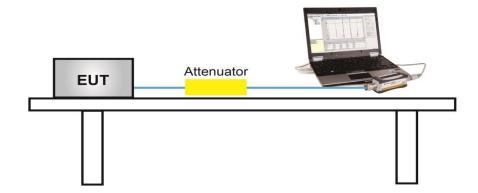



Page 17 of 75

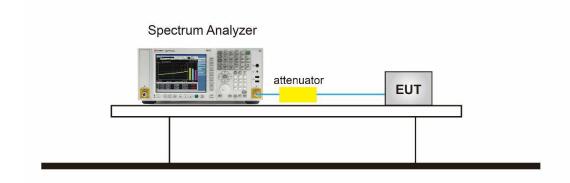


7.4 Measurement Result

Left headset:


Ecit ficadoct.						
Test Data of Conducted Output Power						
Test Mode	Test Frequency (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail		
GFSK_1Mbps	2402	5.044	≤30	Pass		
	2440	4.804	≤30	Pass		
	2480	5.239	≤30	Pass		
	2402	5.012	≤30	Pass		
GFSK_2Mbps	2440	4.811	≤30	Pass		
	2480	5.248	≤30	Pass		


Test Result of Average Output Power (Reporting Only)

Test Data of Conducted Output Power						
Test Mode	Test Frequency (MHz)	Average Power (dBm)	Limits (dBm)	Pass or Fail		
	2402	3.125	≤30	Pass		
GFSK_1Mbps	2440	2.744	≤30	Pass		
	2480	3.362	≤30	Pass		
	2402	3.425	≤30	Pass		
GFSK_2Mbps	2440	2.756	≤30	Pass		
	2480	3.189	≤30	Pass		







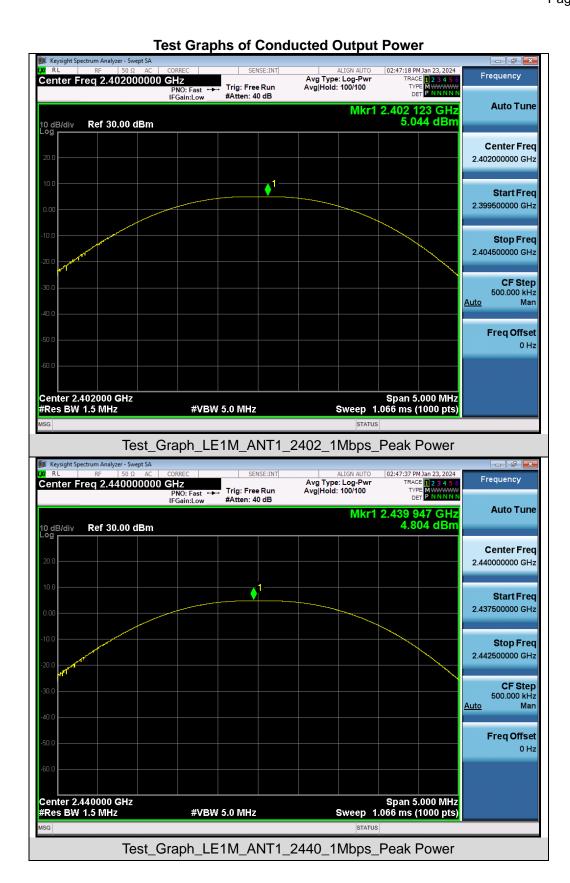






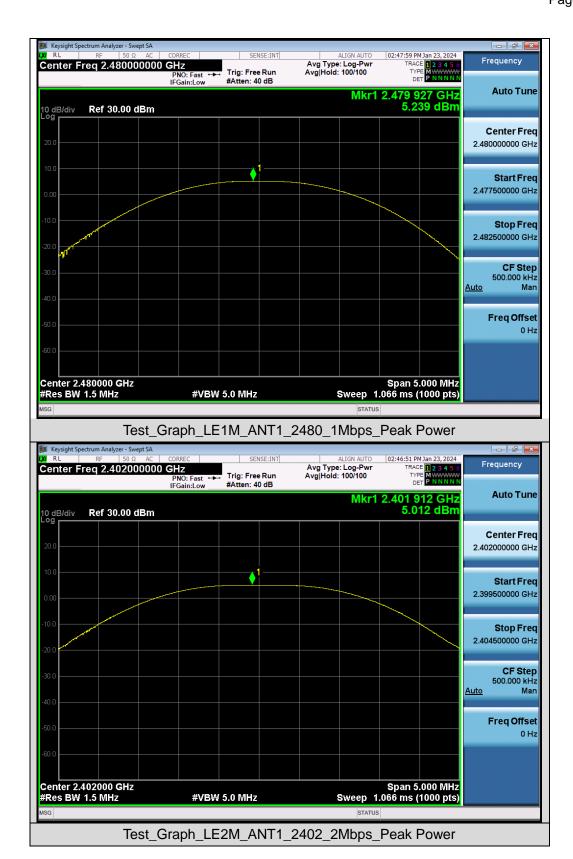





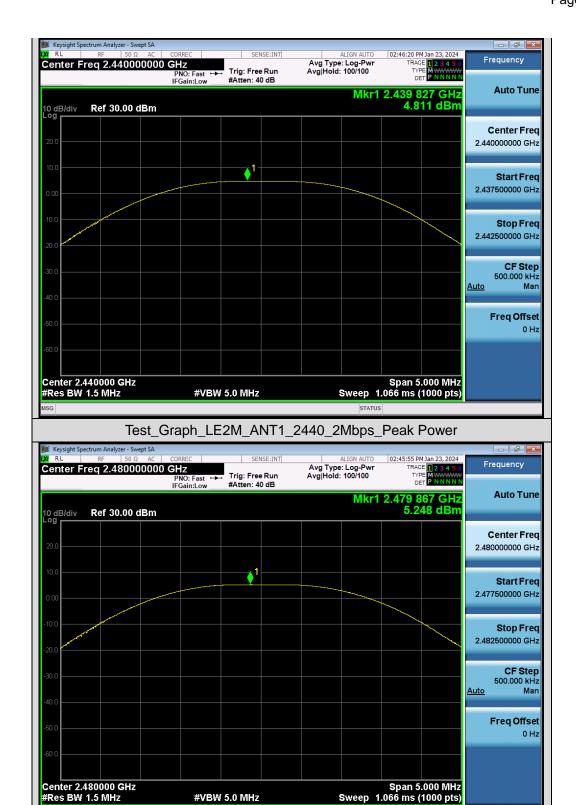

Test_Graph_LE2M_ANT1_2480_2Mbps_Peak Power

#VBW 5.0 MHz




Page 21 of 75

Right headset:


Test Data of Conducted Output Power						
Test Mode	Test Frequency (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail		
	2402	4.209	≤30	Pass		
GFSK_1Mbps	2440	3.913	≤30	Pass		
	2480	4.269	≤30	Pass		
	2402	4.172	≤30	Pass		
GFSK_2Mbps	2440	3.945	≤30	Pass		
	2480	4.326	≤30	Pass		


Test Result of Average Output Power (Reporting Only)

rest Result of Average Output I ower (Reporting Only)						
Test Data of Conducted Output Power						
Test Mode	Test Frequency (MHz)	Average Power (dBm)	Limits (dBm)	Pass or Fail		
	2402	2.314	≤30	Pass		
GFSK_1Mbps	2440	1.887	≤30	Pass		
	2480	2.452	≤30	Pass		
	2402	2.239	≤30	Pass		
GFSK_2Mbps	2440	1.915	≤30	Pass		
	2480	2.467	≤30	Pass		







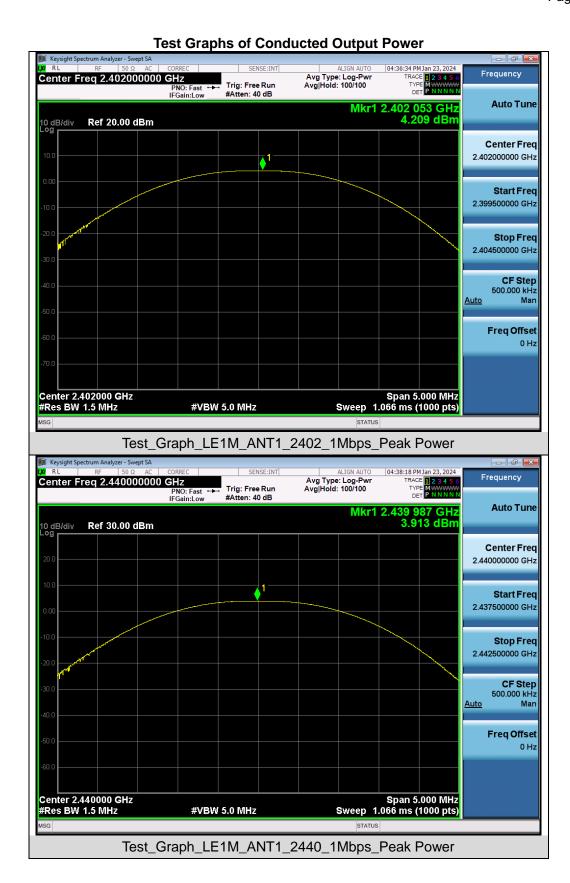






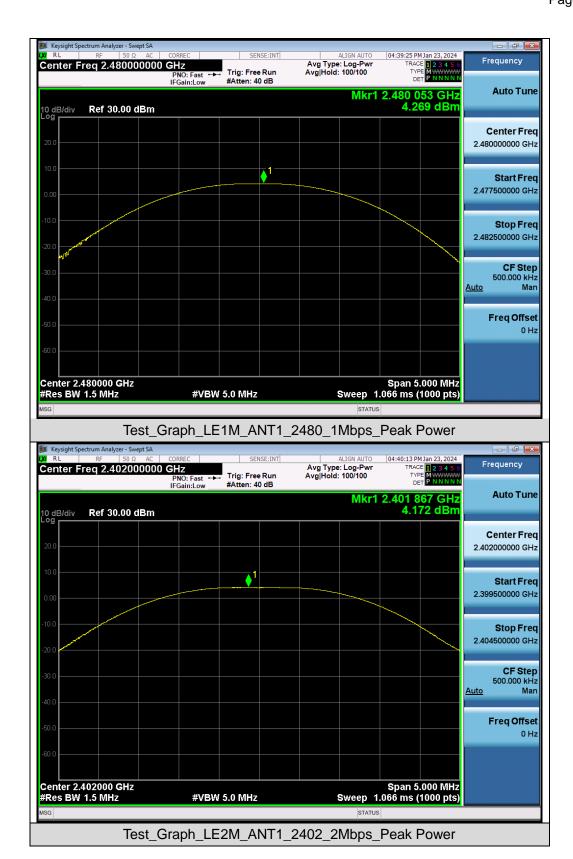





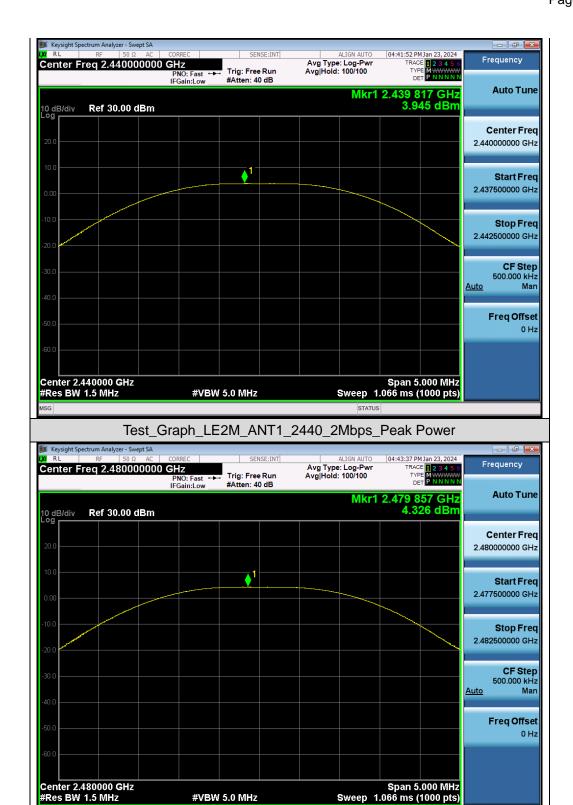

Test_Graph_LE2M_ANT1_2480_2Mbps_Peak Power



Page 25 of 75

8. 6dB Bandwidth Measurement

8.1 Provisions Applicable


The minimum 6 dB bandwidth shall be 500 kHz.

8.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).

- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss
 was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
- For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the OBW and set the Video bandwidth (VBW) ≥ 3 * RBW.
- 5. Measure and record the results in the test report.

8.3 Measurement Setup (Block Diagram of Configuration)

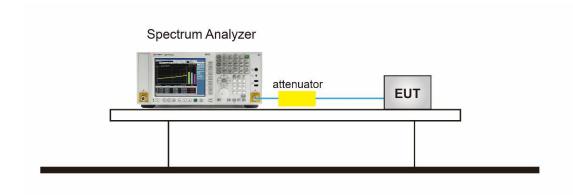





8.4 Measurement Results


Test Data of Occupied Bandwidth and DTS Bandwidth							
Test Mode	Test Frequency (MHz)	Occupied Bandwidth (MHz)	DTS BW (MHz)	DTS BW Limits	Pass or Fail		
GFSK_1Mbps	2402	0.900	0.515	≥0.5	Pass		
	2440	0.897	0.514	≥0.5	Pass		
	2480	0.900	0.516	≥0.5	Pass		
GFSK_2Mbps	2402	1.732	0.887	≥0.5	Pass		
	2440	1.733	0.884	≥0.5	Pass		
	2480	1.743	0.886	≥0.5	Pass		

Test Graphs of Occupied Bandwidth

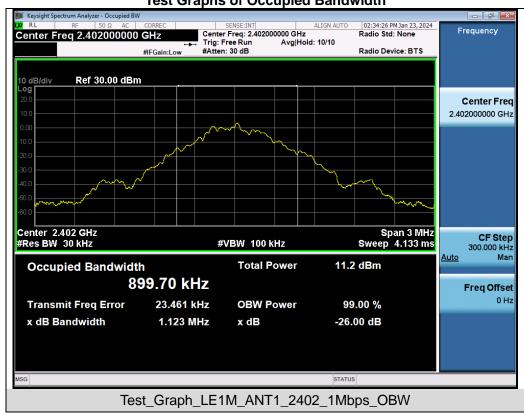







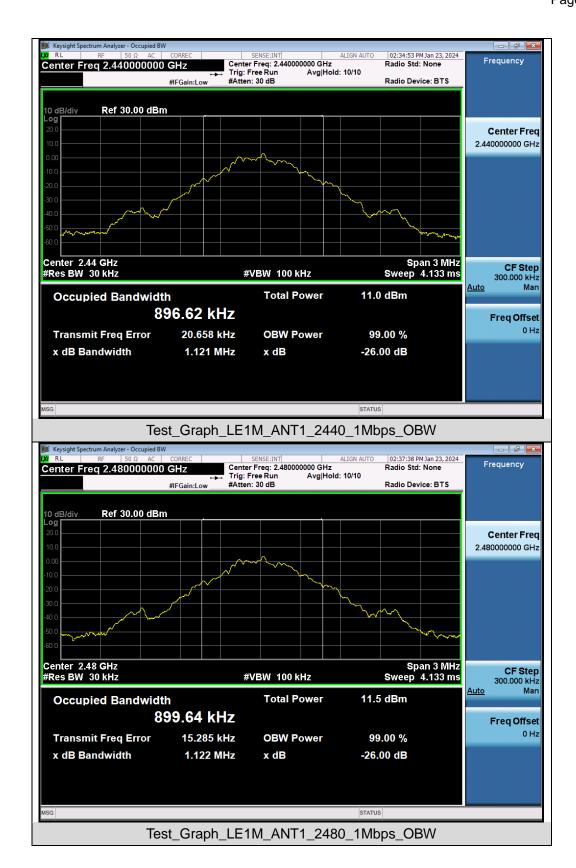






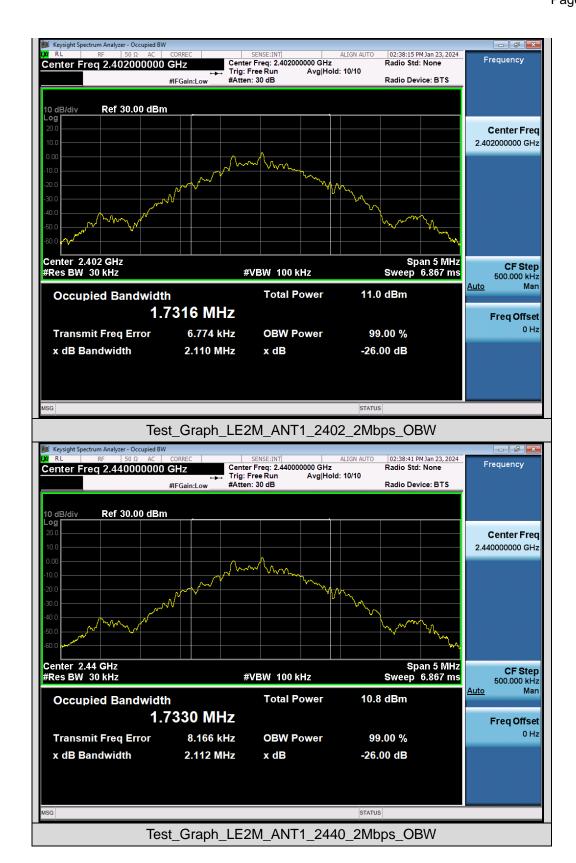








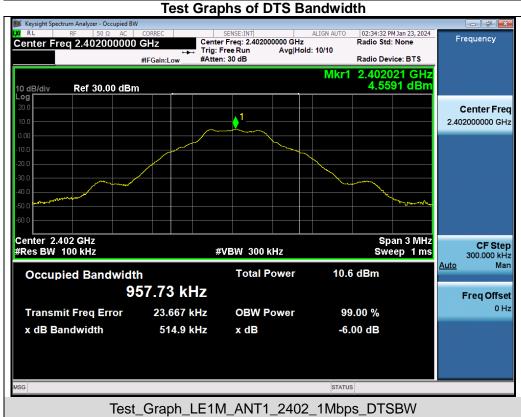


Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/















Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/





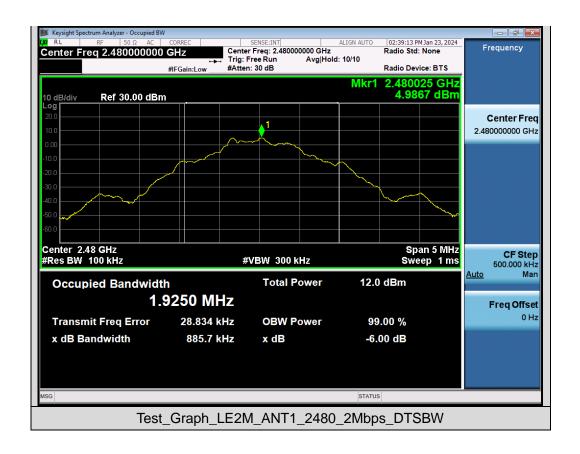



Page 33 of 75

9. Power Spectral Density Measurement

9.1 Provisions Applicable


The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

9.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.

- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss
 was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz in order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
- 4. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
- 5. Measure and record the results in the test report.
- 6. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

9.3 Measurement Setup (Block Diagram of Configuration)

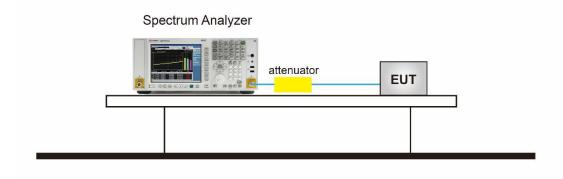




9.4 Measurement Results


Test Data of Conducted Output Power Spectral Density				
Test Mode	Test Frequency (MHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail
GFSK_1Mbps	2402	-7.687	≤8	Pass
	2440	-7.852	≤8	Pass
	2480	-7.445	≤8	Pass
GFSK_2Mbps	2402	-10.047	≤8	Pass
	2440	-10.323	≤8	Pass
	2480	-9.948	≤8	Pass


Test Graphs of Conducted Output Power Spectral Density









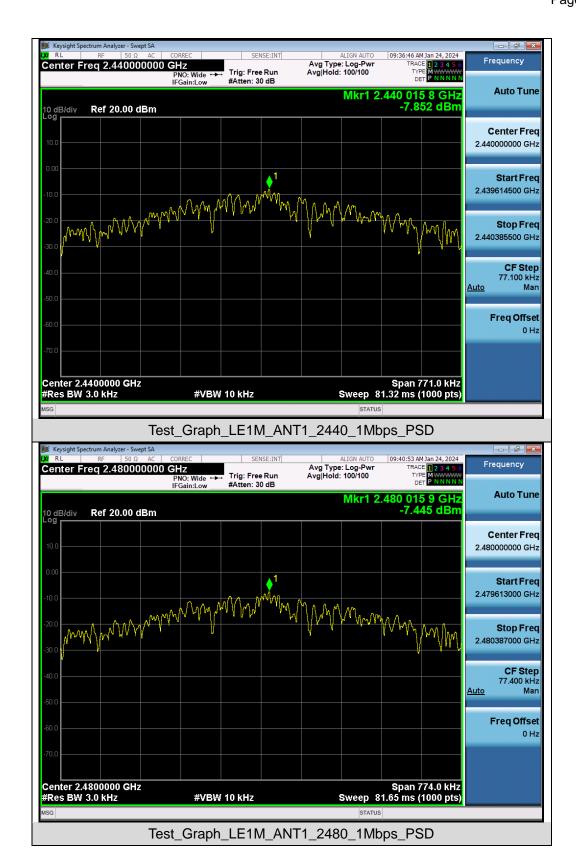






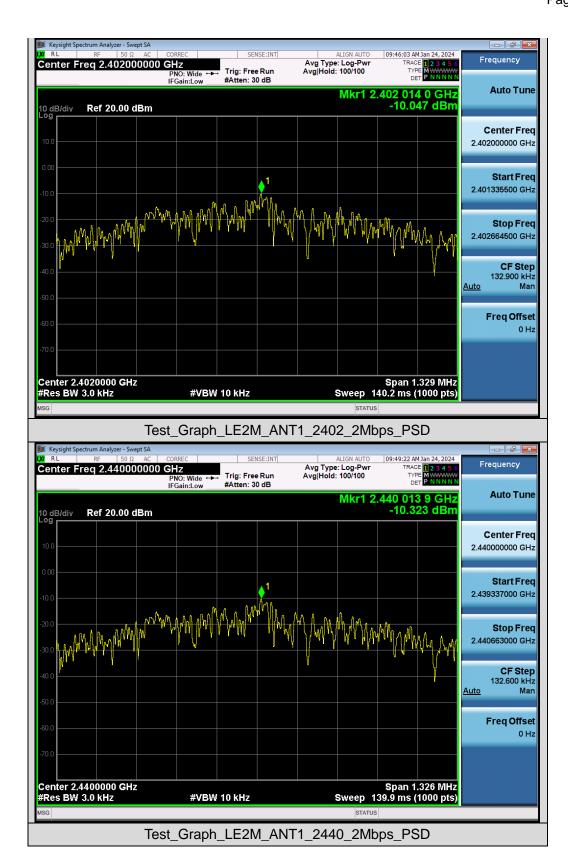





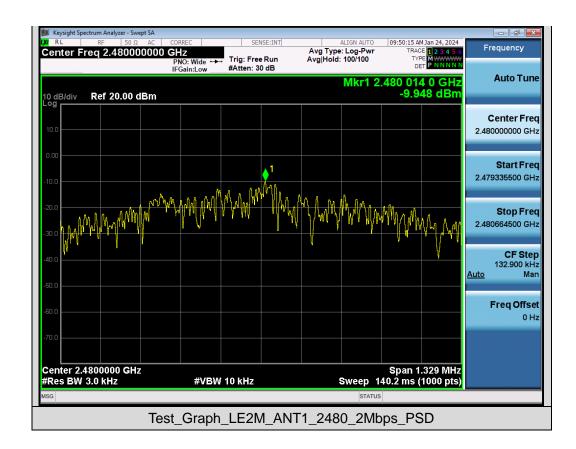



Page 38 of 75

10. Conducted Band Edge and Out-of-Band Emissions


10.1 Provisions Applicable


The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure.

10.2 Measurement Procedure

- Reference level measurement
- 1. Set instrument center frequency to DTS channel center frequency
- 2. Set the span to ≥ 1.5 times the DTS bandwidth
- 3. Set the RBW = 100 kHz
- Set the VBW ≥ 3 x RBW
- 5. Detector = peak
- 6. Sweep time = auto couple
- Trace mode = max hold
- 8. Allow trace to fully stabilize
- Emission level measurement
- 1. Set the center frequency and span to encompass frequency range to be measured
- 2. RBW = 100kHz
- 3. VBW = 300kHz
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep time = auto couple
- 7. The trace was allowed to stabilize

10.3 Measurement Setup (Block Diagram of Configuration)

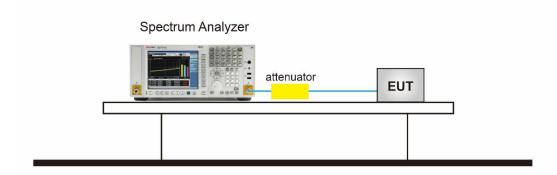







10.4 Measurement Results


Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands

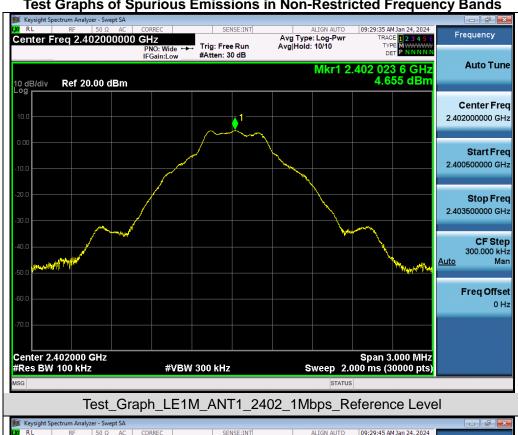

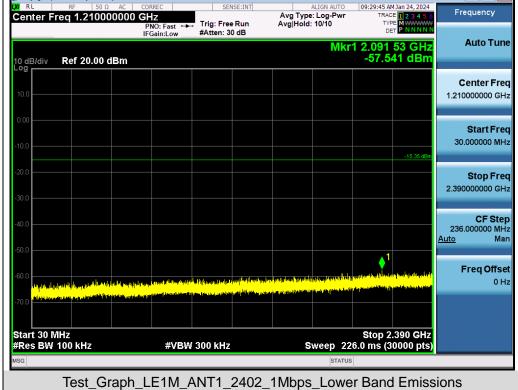



Any report having not been signe Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. $Further\ enquiry\ of\ validity\ or\ verification\ of\ the\ test\ report\ should\ be\ addressed\ to\ AGC\ by\ agc 01@agccert.com.$

Web: http://www.agccert.com/







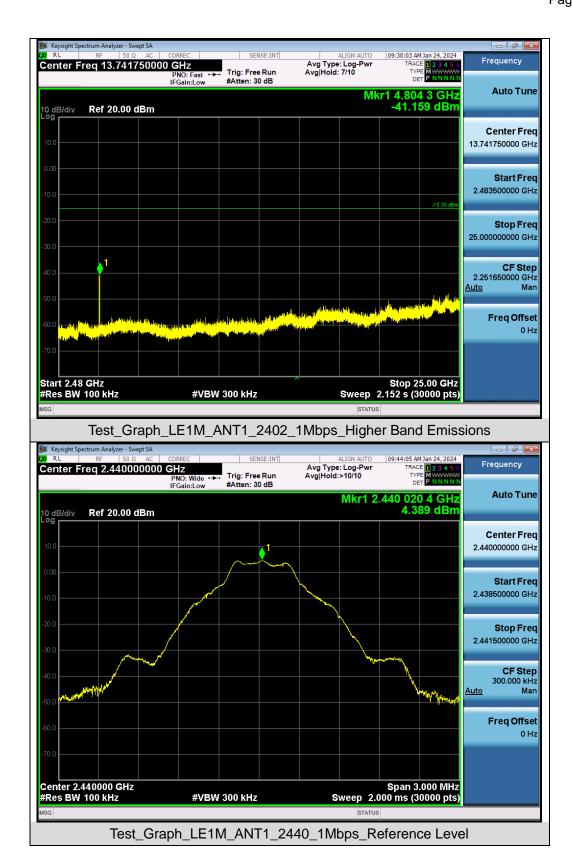






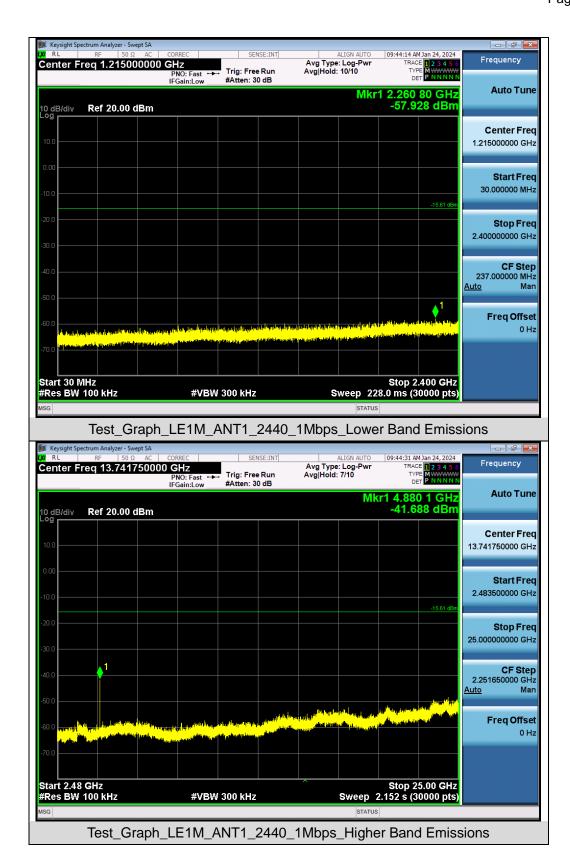














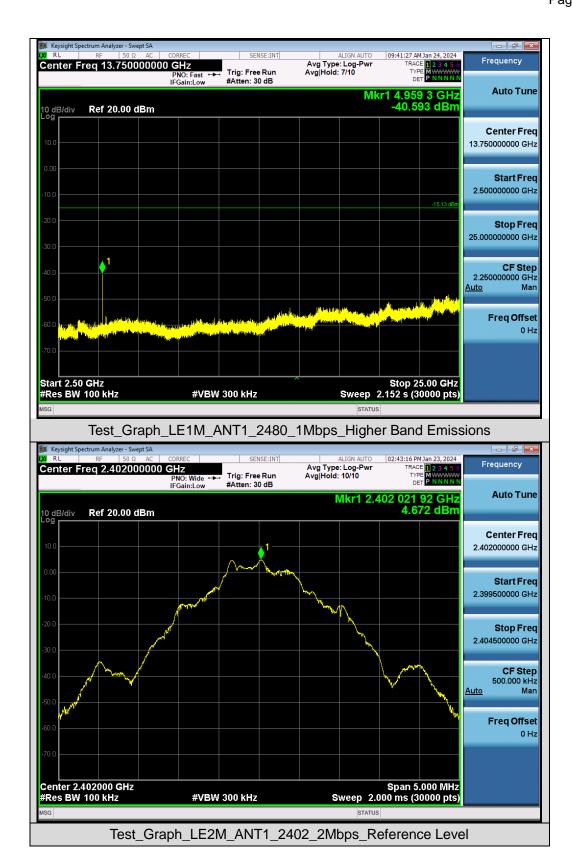






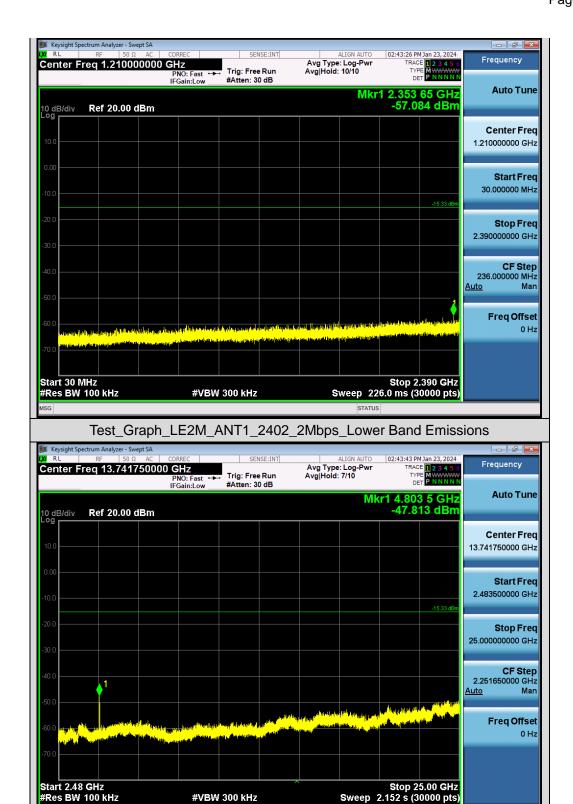


Test_Graph_LE2M_ANT1_2402_2Mbps_Higher Band Emissions













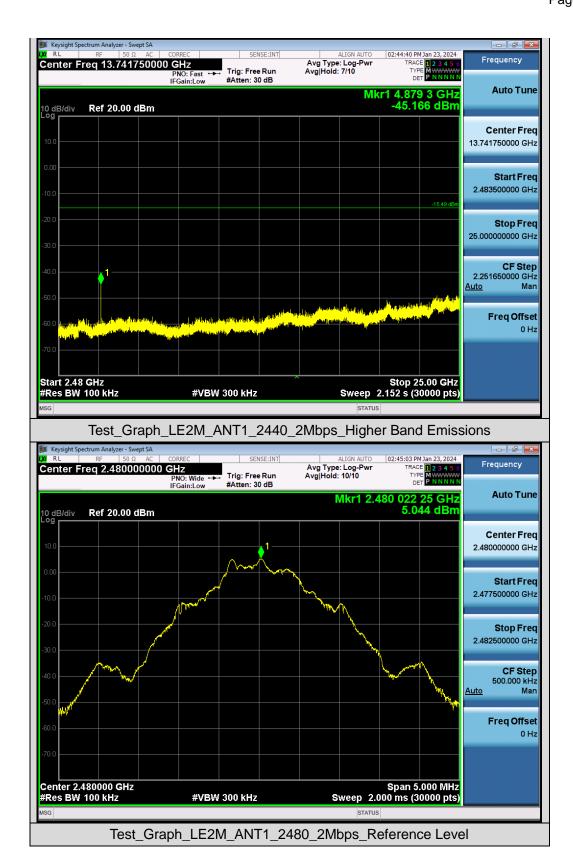




0 Hz

Stop 25.00 GHz

Sweep 2.152 s (30000 pts)



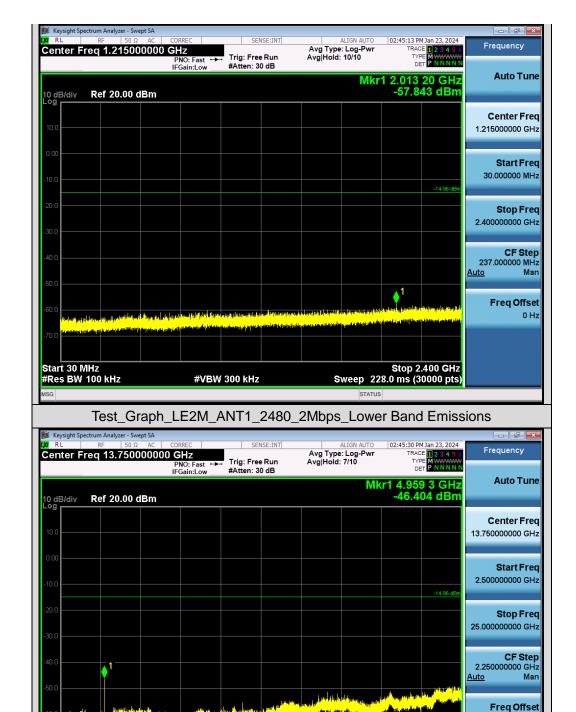

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Test_Graph_LE2M_ANT1_2480_2Mbps_Higher Band Emissions

#VBW 300 kHz


Start 2.50 GHz #Res BW 100 kHz





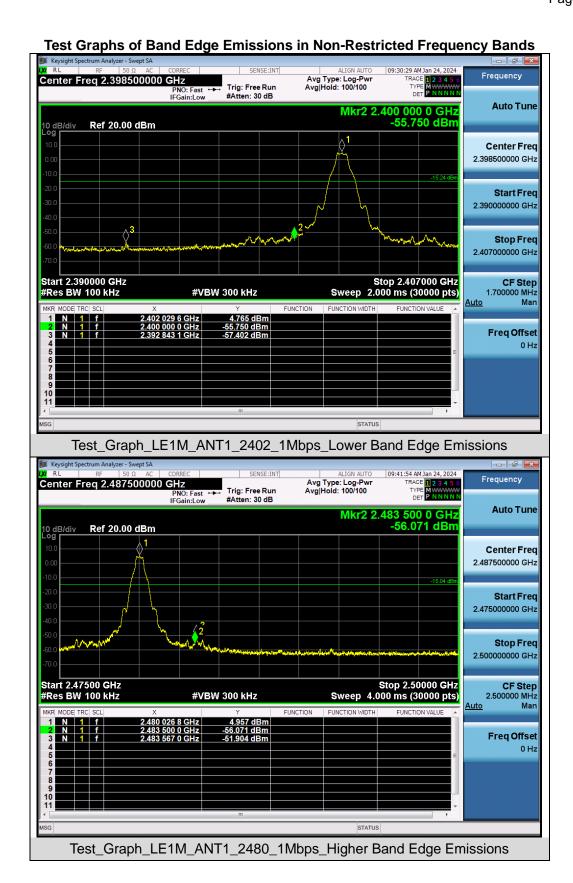



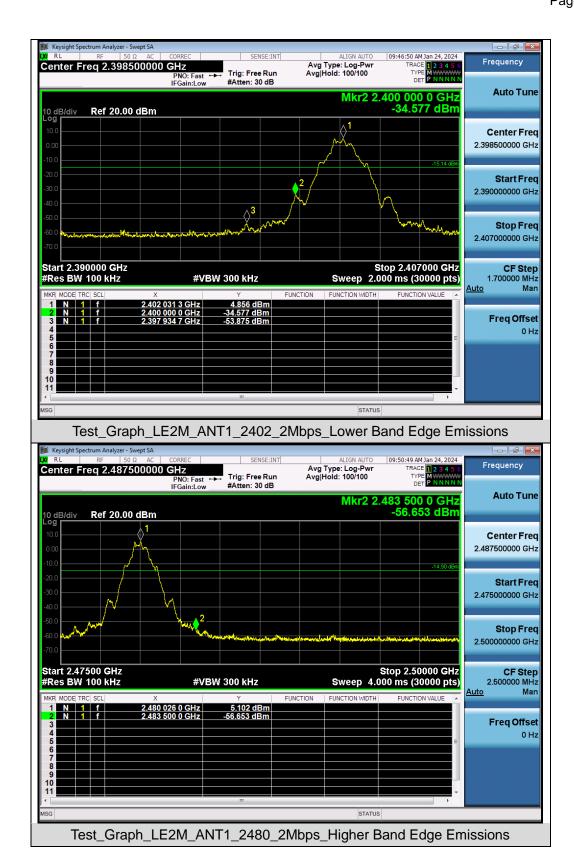



Page 50 of 75

11. Radiated Spurious Emission

11.1 Measurement Limit

FCC Part 15.209 Limit in the below table to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

11.2 Measurement Procedure

- The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.



Page 51 of 75

As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9kHz~150kHz/RB 200Hz for QP
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/3MHz for Peak, 1MHz/3MHz for Average

Receiver Parameter	Setting
Start ~Stop Frequency	9kHz~150kHz/RB 200Hz for QP
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP



Report No.: AGC11758240103FR02 Page 52 of 75

Quasi-Peak Measurements below 1GHz


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

• Peak Measurements above 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW setting requirements are as follows:
- 4. If the EUT is configured to transmit with duty cycle ≥ 98%, set VBW = 10 Hz.
- 5. If the EUT duty cycle is < 98%, set VBW $\ge 1/T$. T is the minimum transmission duration.
- 6. Detector = Peak
- 7. Sweep time = auto
- 8. Trace mode = max hold
- 8. Trace was allowed to stabilize






11.3 Measurement Setup (Block Diagram of Configuration)


Radiated Emission Test Setup 9KHz-30MHz

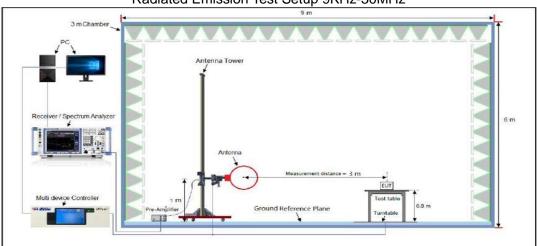

Radiated Emission Test Setup 30MHz-1000MHz

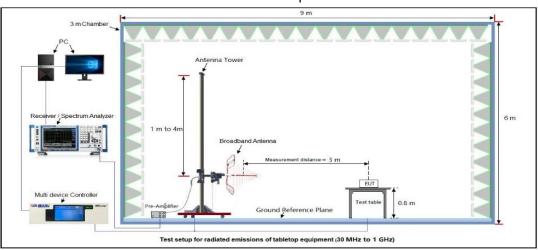


Radiated Emission Test Setup Above 1000MHz

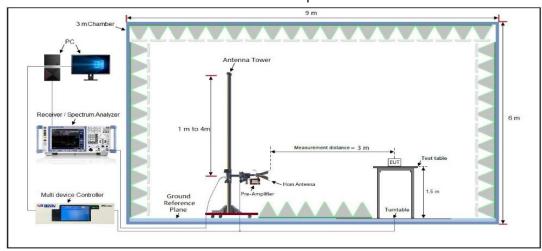

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/






11.4 Measurement Result

Radiated Emission Below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.


Left headset:

Radiated Emission Test Results at 30MHz-1GHz					
EUT NameBaseus True Wireless EarphonesModel NameBaseus Bowie 30					
Temperature	23.4℃	Relative Humidity	58.7%		
Pressure	960hPa	Test Voltage	Normal Voltage		
Test Mode	Mode 6	Antenna Polarity	Horizontal		

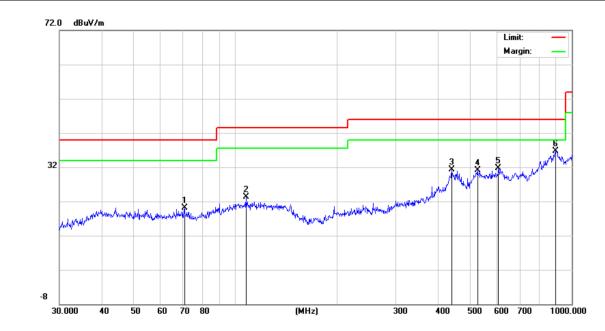


Final Data List

	1		1	1		1	1	1
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	70.5836	20.02	12.82	40.00	19.98	100	130	Horizontal
2	107.5100	23.26	16.27	43.50	20.24	100	160	Horizontal
3	440.1963	31.29	25.09	46.00	14.71	100	100	Horizontal
4	524.5540	31.17	24.90	46.00	14.83	100	200	Horizontal
5	605.6592	31.73	25.13	46.00	14.27	100	190	Horizontal
6	896.9964	36.76	31.42	46.00	9.24	100	140	Horizontal






Radiated Emission Test Results at 30MHz-1GHz					
EUT NameBaseus True Wireless EarphonesModel NameBaseus Bowie 30					
Temperature	23.4℃	Relative Humidity	58.7%		
Pressure	960hPa	Test Voltage	Normal Voltage		
Test Mode	Mode 6	Antenna Polarity	Vertical		

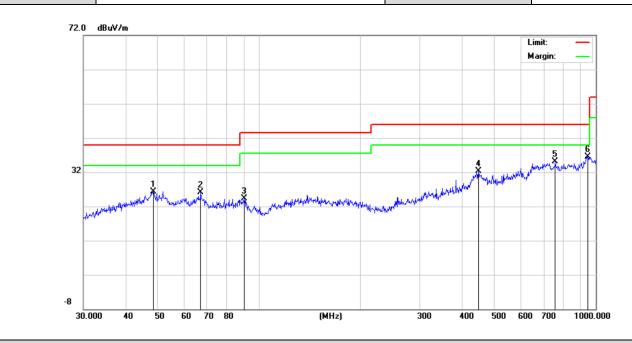

Final Data List Freq. Level Factor Limit Margin Height Angle NO. **Polarity** [MHz] [dBµV/m] [dB] [dBµV/m] [dB] [cm] [°] 26.27 170 1 48.3318 16.98 40.00 13.73 100 Vertical 2 66.9669 26.16 17.03 40.00 13.84 100 190 Vertical 3 90.2205 24.31 15.52 43.50 19.19 100 140 Vertical 32.24 25.74 4 447.9822 46.00 13.76 100 240 Vertical 5 758.0408 35.02 28.07 46.00 10.98 100 180 Vertical 36.60 46.00 9.4 6 948.7610 30.65 100 150 Vertical


RESULT: Pass






Right headset:

Radiated Emission Test Results at 30MHz-1GHz					
EUT Name	Baseus True Wireless Earphones	Model Name	Baseus Bowie 30		
Temperature	23.4℃	Relative Humidity	58.7%		
Pressure	960hPa	Test Voltage	Normal Voltage		
Test Mode	Mode 6	Antenna Polarity	Horizontal		

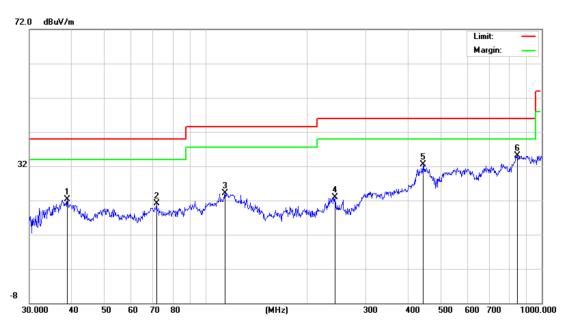


Final D	Data List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	38.8878	22.29	13.42	40.00	17.71	100	150	Horizontal
2	71.5806	21.14	12.85	40.00	18.86	100	110	Horizontal
3	114.5146	24.18	16.34	43.50	19.32	100	160	Horizontal
4	243.3771	22.81	15.30	46.00	23.19	100	230	Horizontal
5	443.2943	32.44	24.98	46.00	13.56	100	140	Horizontal
6	848.0562	35.11	28.38	46.00	10.89	100	180	Horizontal





Radiated Emission Test Results at 30MHz-1GHz					
EUT NameBaseus True Wireless EarphonesModel NameBaseus Bowie 30					
Temperature	23.4℃	Relative Humidity	58.7%		
Pressure	960hPa	Test Voltage	Normal Voltage		
Test Mode	Mode 6	Antenna Polarity	Vertical		

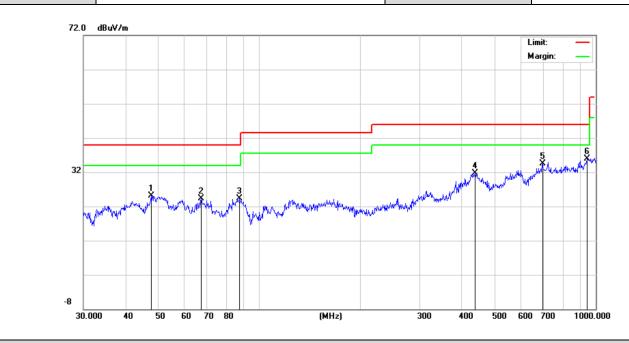

Final [Final Data List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	47.6584	25.09	16.98	40.00	14.91	100	130	Vertical
2	67.2022	24.22	17.03	40.00	15.78	100	190	Vertical
3	87.1115	24.27	15.94	40.00	15.73	100	120	Vertical
4	438.6553	31.68	25.88	46.00	14.32	100	210	Vertical
5	694.4174	34.47	27.99	46.00	11.53	100	140	Vertical
6	942.1304	35.95	30.91	46.00	10.05	100	160	Vertical

RESULT: Pass

Note: 1. Factor=Antenna Factor + Cable loss, Margin= Limit-Level.

2. All test modes had been pre-tested. The mode 6 is the worst case and recorded in the report.



Page 58 of 75

Radiated Emissions Test Results for Above 1GHz

EUT Name	Baseus True Wireless Earphones	Model Name	Baseus Bowie 30
Temperature	23.4℃	Relative Humidity	58.7%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	45.71	0.08	45.79	74	-28.21	peak
4804.000	36.95	0.08	37.03	54	-16.97	AVG
7206.000	40.82	2.21	43.03	74	-30.97	peak
7206.000	31.47	2.21	33.68	54	-20.32	AVG
Remark:						

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	T Name Baseus True Wireless Earphones		Baseus Bowie 30
Temperature	23.4℃	Relative Humidity	58.7%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	45.66	0.08	45.74	74	-28.26	peak
4804.000	36.32	0.08	36.4	54	-17.6	AVG
7206.000	40.85	2.21	43.06	74	-30.94	peak
7206.000	31.95	2.21	34.16	54	-19.84	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: Pass



Page 59 of 75

Radiated Emissions Test Results for Above 1GHz

EUT Name	Baseus True Wireless Earphones	Model Name	Baseus Bowie 30
Temperature	23.4℃	Relative Humidity	58.7%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna Polarity	Horizontal

Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
45.46	0.14	45.6	74	-28.4	peak
37.85	0.14	37.99	54	-16.01	AVG
42.48	2.36	44.84	74	-29.16	peak
32.51	2.36	34.87	54	-19.13	AVG
	(dBµV) 45.46 37.85 42.48	(dBµV) (dB) 45.46 0.14 37.85 0.14 42.48 2.36	(dBμV) (dB) (dBμV/m) 45.46 0.14 45.6 37.85 0.14 37.99 42.48 2.36 44.84	(dBμV) (dB) (dBμV/m) (dBμV/m) 45.46 0.14 45.6 74 37.85 0.14 37.99 54 42.48 2.36 44.84 74	(dBμV) (dB) (dBμV/m) (dBμV/m) (dBμV/m) 45.46 0.14 45.6 74 -28.4 37.85 0.14 37.99 54 -16.01 42.48 2.36 44.84 74 -29.16

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	Baseus True Wireless Earphones		Baseus Bowie 30
Temperature	23.4℃	Relative Humidity	58.7%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	\/alua Tina
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	- Value Type
4880.000	45.44	0.14	45.58	74	-28.42	peak
4880.000	37.73	0.14	37.87	54	-16.13	AVG
7320.000	42.62	2.36	44.98	74	-29.02	peak
7320.000	32.49	2.36	34.85	54	-19.15	AVG

|Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: Pass



Page 60 of 75

Radiated Emissions Test Results for Above 1GHz

EUT Name	Baseus Earphones	True	Wireless	Model Name	Baseus Bowie 30
Temperature	23.4℃			Relative Humidity	58.7%
Pressure	960hPa			Test Voltage	Normal Voltage
Test Mode	Mode 3			Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	46.36	0.22	46.58	74	-27.42	peak
4960.000	37.52	0.22	37.74	54	-16.26	AVG
7440.000	42.41	2.64	45.05	74	-28.95	peak
7440.000	32.75	2.64	35.39	54	-18.61	AVG
				·		

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT Name	Baseus Earphones	True Wireless	Model Name	Baseus Bowie 30
Temperature	23.4 ℃		Relative Humidity	58.7%
Pressure	960hPa		Test Voltage	Normal Voltage
Test Mode	Mode 3		Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	46.46	0.22	46.68	74	-27.32	peak
4960.000	37.39	0.22	37.61	54	-16.39	AVG
7440.000	41.95	2.64	44.59	74	-29.41	peak
7440.000	32.88	2.64	35.52	54	-18.48	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RESULT: Pass



Page 61 of 75

Radiated Emissions Test Results for Above 1GHz

EUT Name	Baseus True Wireless Earphones		Baseus Bowie 30
Temperature	23.4℃	Relative Humidity	58.7%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	46.37	0.08	46.45	74	-27.55	peak
4804.000	37.56	0.08	37.64	54	-16.36	AVG
7206.000	41.48	2.21	43.69	74	-30.31	peak
7206.000	32.59	2.21	34.8	54	-19.2	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT Name	Baseus True Wireless Earphones	Model Name	Baseus Bowie 30
Temperature	23.4℃	Relative Humidity	58.7%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	45.62	0.08	45.7	74	-28.3	peak
4804.000	36.54	0.08	36.62	54	-17.38	AVG
7206.000	42.47	2.21	44.68	74	-29.32	peak
7206.000	32.19	2.21	34.4	54	-19.6	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: Pass



Page 62 of 75

Radiated Emissions Test Results for Above 1GHz

EUT Name	Baseus True Wireless Earphones	Model Name	Baseus Bowie 30
Temperature	23.4℃	Relative Humidity	58.7%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 5	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4880.000	46.16	0.14	46.3	74	-27.7	peak
4880.000	38.45	0.14	38.59	54	-15.41	AVG
7320.000	40.79	2.36	43.15	74	-30.85	peak
7320.000	33.62	2.36	35.98	54	-18.02	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	Baseus True Wireless Earphones	Model Name	Baseus Bowie 30
Temperature	23.4℃	Relative Humidity	58.7%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 5	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4880.000	46.27	0.14	46.41	74	-27.59	peak
4880.000	38.59	0.14	38.73	54	-15.27	AVG
7320.000	40.41	2.36	42.77	74	-31.23	peak
7320.000	33.76	2.36	36.12	54	-17.88	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: Pass



Page 63 of 75

Radiated Emissions Test Results for Above 1GHz

EUT Name	Baseus Earphones	True	Wireless	Model Name	Baseus Bowie 30
Temperature	23.4℃			Relative Humidity	58.7%
Pressure	960hPa			Test Voltage	Normal Voltage
Test Mode	Mode 6			Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	─ Value Type
4960.000	46.59	0.22	46.81	74	-27.19	peak
4960.000	39.62	0.22	39.84	54	-14.16	AVG
7440.000	37.55	2.64	40.19	74	-33.81	peak
7440.000	31.78	2.64	34.42	54	-19.58	AVG
				-		
_		_				

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT Name	Baseus True Wireless Earphones	Model Name	Baseus Bowie 30
Temperature	23.4℃	Relative Humidity	58.7%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna Polarity	Vertical

(MHz) 4960.000 4960.000	(dBµV) 46.49	(dB) 0.22	(dBµV/m) 46.71	(dBµV/m) 74	(dB)	- Value Type
	46.49	0.22	46.71	7.1	27.00	
4060 000				14	-27.29	peak
4900.000	39.68	0.22	39.9	54	-14.1	AVG
7440.000	37.71	2.64	40.35	74	-33.65	peak
7440.000	31.52	2.64	34.16	54	-19.84	AVG


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RESULT: Pass

Note:


- 1. The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.






EUT Name	Baseus True Wireless Earphones	Model Name	Baseus Bowie 30
Temperature	23.4℃	Relative Humidity	58.7%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Horizontal


Test Graph for Peak Measurement

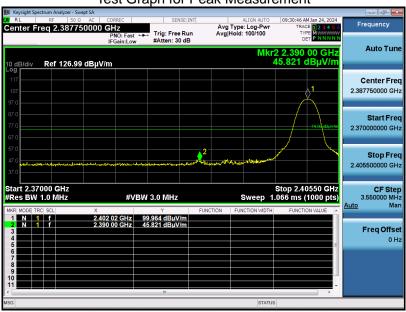



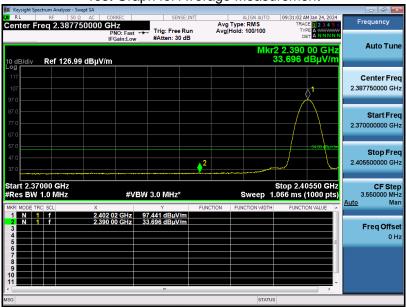


RESULT: Pass






EUT Name	Baseus True Wireless Earphones	Model Name	Baseus Bowie 30
Temperature	23.4℃	Relative Humidity	58.7%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Vertical

Test Graph for Peak Measurement

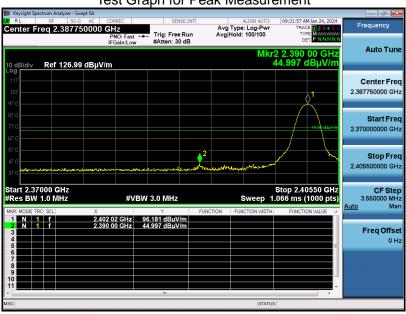




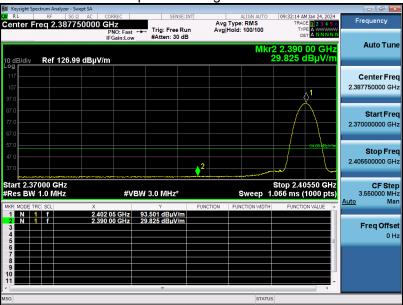

RESULT: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Web: http://www.agccert.com/






EUT Name	Baseus True Wireless Earphones	Model Name	Baseus Bowie 30
Temperature	23.4℃	Relative Humidity	58.7%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Horizontal


Test Graph for Peak Measurement

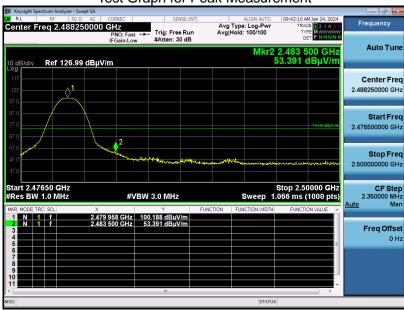



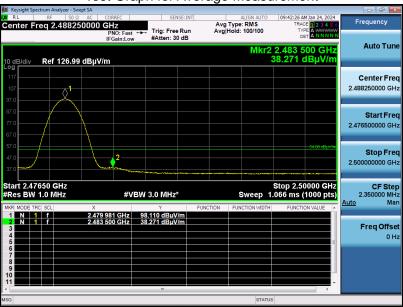

RESULT: Pass






EUT Name	Baseus True Wireless Earphones	Model Name	Baseus Bowie 30
Temperature	23.4℃	Relative Humidity	58.7%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Vertical


Test Graph for Peak Measurement





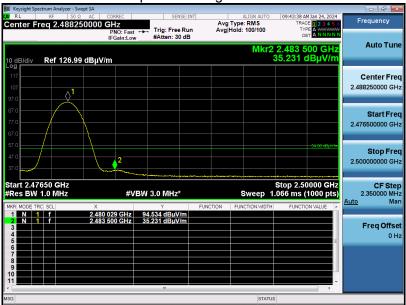


RESULT: Pass






EUT Name	Baseus True Wireless Earphones	Model Name	Baseus Bowie 30
Temperature	23.4℃	Relative Humidity	58.7%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

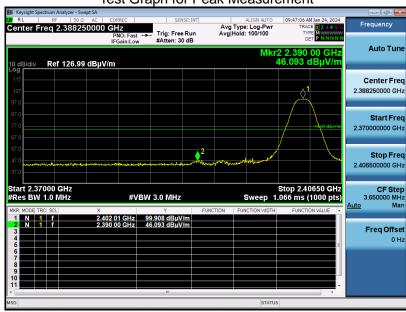



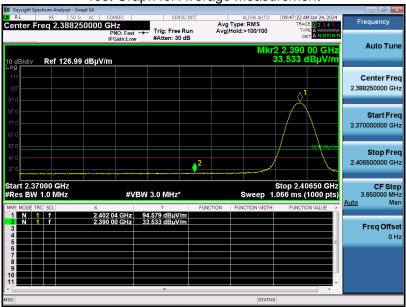

RESULT: Pass