

RR051-14-104796-1-A Ed. 0

RADIO test report

According to the standards:
CFR 47, FCC Part 15

Equipment under test:
Kit M24LR-Discovery

FCC ID: YCPDEMOCR95HF

Company:
STMICROELECTRONICS GRAND OUEST SAS

DISTRIBUTION: Mr LECLUSE

(Company: STMICROELECTRONICS GRAND OUEST SAS)

Number of pages: 34 with 7 appendixes

Ed.	Date	Modified pages	Written by		Technical Verification and Quality Approval	
			Name	Visa	Name	Visa
0	01-DEC-2014	Creation	T. LEDRESSEUR	T.L		

Duplication of this test report is only permitted for an integral photographic facsimile. It includes the number of pages referenced here above.
This document is the result of testing a specimen or a sample of the product submitted. It does not imply an assessment of the conformity of the whole manufactured products of the tested sample.



DESIGNATION OF PRODUCT: Kit M24LR-Discovery

Serial number (S/N): MB1054 A-01

Reference / model (P/N): CR95HF

Software version: Not communicated

MANUFACTURER: STMICROELECTRONICS GRAND OUEST SAS

COMPANY SUBMITTING THE PRODUCT:

Company: STMICROELECTRONICS GRAND OUEST SAS

Address: 10 Rue de Jouannet
E.PARK
35700 RENNES
FRANCE

Responsible: Mr LECLUSE

Persons presents during the tests: Mr LECLUSE

DATES OF TEST: 18-NOV-2014 and 19-NOV-2014

TESTING LOCATION: EMITECH ANGERS laboratory at JUIGNE SUR LOIRE (49) FRANCE
EMITECH ANGERS open area test site in JUIGNE SUR LOIRE (49)
FRANCE
21 rue de la Fuye
49610 Juigne sur Loire
France
FCC 2.948 Listed Site Registration Number: 90469
FCC Accredited under US-EU MRA Designation Number: FR0009
Test Firm Registration Number: 873677

TESTED BY: T. LEDRESSEUR

CONTENTS

<i>TITLE</i>	<i>PAGE</i>
1. INTRODUCTION	4
2. PRODUCT DESCRIPTION	4
3. NORMATIVE REFERENCE	4
4. TEST METHODOLOGY	5
5. TEST EQUIPMENT CALIBRATION DATES	6
6. TESTS RESULTS SUMMARY	7
7. MEASUREMENT OF THE CONDUCTED DISTURBANCES	9
8. RADIATED EMISSION LIMITS	12
9. MEASUREMENT OF THE CONDUCTED DISTURBANCES	14
10. ADDITIONAL PROVISIONS TO THE GENERAL RADIATED EMISSION LIMITATIONS	17
11. OPERATION WITHIN THE BAND 13.110 – 14.010 MHz	18
12. FIELD STRENGTH OUTSIDE THE BAND 13.110-14.010 MHZ	20

APPENDIX 1: Photos of the equipment under test

APPENDIX 2: Test set up

APPENDIX 3: Test equipment list

APPENDIX 4: 6 dB bandwidth

APPENDIX 5: 20 dB bandwidth

APPENDIX 6: Band edge

APPENDIX 7: Spectrum mask

1. INTRODUCTION

This report presents the results of radio test carried out on the following equipment: **Kit M24LR-Discovery** , in accordance with normative reference.

2. PRODUCT DESCRIPTION

Class:	B (Residential use)
Utilization:	RFID Card
Antenna type and gain:	loops antenna, unknown gain
Operating frequency range:	band from 13.110 MHz to 14.010 MHz
Number of channels:	1
Channel spacing:	not concerned
Frequency generation:	Crystal
Modulation:	RFID type A
Power source:	5Vdc by USB port of a computer powered in 120 Vac – 60Hz (Computer HP Elitebook 8440p Serial number: CZC0442CGY is used for tests)

Power level, frequency range and channels characteristics are not user adjustable.
The details pictures of the product and the circuit boards are joined with this file.

3. NORMATIVE REFERENCE

The standards and testing methods related throughout this report are those listed below.
They are applied on the whole test report even though the extensions (version, date and amendment) are not repeated.

CFR 47 FCC Part 15 (2014) Radio Frequency Devices

ANSI C63.4 (2009) Methods of Measurement of Radio-Noise Emissions from Low- voltage
Electrical and Electronics Equipment in the range
of 9 kHz to 40 GHz.

4. TEST METHODOLOGY

Radio performance tests procedures given in CFR 47 part 15:

Subpart B –Unintentional Radiators

Paragraph 107: Conducted limits

Paragraph 109: Radiated emission limits

Subpart C – Intentional Radiators

Paragraph 203: Antenna requirement

Paragraph 205: Restricted bands of operation

Paragraph 207: Conducted limits

Paragraph 209: Radiated emission limits; general requirements

Paragraph 215: Additional provisions to the general radiated emission limitations

Paragraph 225: Operation within the band 13.110-14.010 MHz

5. TEST EQUIPMENT CALIBRATION DATES

Emitech Number	Model	Type	Last verification	Next verification	Validity
0	BAT-EMC V3.6.0.32	Software	/	/	/
1211	HP 8901B	Modulation analyzer	03/05/2013	03/05/2015	03/07/2015
1406	Cadre Emco 6502	Antenna	26/03/2013	26/03/2015	26/05/2015
4088	R&S FSP40	Spectrum analyser	22/08/2013	22/08/2015	22/10/2015
7001	R&S FSBS	Spectrum analyzer	04/12/2012	04/12/2014	04/02/2015
7045	Climatic chamber F0-100	MPC	20/04/2013	30/04/2015	20/06/2015
8508	Power source 1251RP	California instruments	22/08/2014	22/08/2015	22/10/2015
8511	HP 8447D	Low noise preamplifier	20/08/2014	20/08/2015	20/10/2015
8524	HP 8591EM	Test receiver	30/07/2013	30/07/2015	30/09/2015
8526	Schwarzbeck VHBB 9124	Biconical antenna	12/06/2012	12/06/2016	12/08/2016
8528	Schwarzbeck VHA 9103	Biconical antenna	24/09/2013	24/09/2017	24/11/2017
8530	CHASE CBL6112A	Bi-log antenna	05/03/2013	05/03/2017	05/05/2017
8533	R&S HFH2-Z2	Loop antenna	11/02/2014	11/02/2016	11/04/2016
8543	Schwarzbeck UHALP 9108A	Log periodic antenna	12/06/2012	12/06/2016	12/08/2016
8593	SIDT Cage 2	Full anechoic room	/	/	/
8635	High-pass filter EZ-25	Rohde & Schwarz	05/08/2014	05/08/2016	05/10/2016
8675	AOIP MN5102B	Multimeter	15/01/2013	15/01/2015	15/03/2015
8707	R&S ESI7	Test receiver	03/10/2012	03/10/2014	03/12/2014
8719	Thurbly Thandar Instruments 1600	LISN	23/06/2014	23/06/2016	23/08/2016
8732	Emitech	OATS	23/08/2013	23/08/2016	23/10/2016
8749	La Crosse Technology WS-9232	Meteo station	03/09/2014	03/09/2016	03/11/2016
8750	La Crosse Technology WS-9232	Meteo station	03/09/2014	03/09/2016	03/11/2016
8893	Emitech	Outside room Hors cage	/	/	/
8896	ACQUISYS GPS8	Satellite synchronized frequency standard	/	/	/
9489	Absorber sheath current	Emitech	08/10/2014	08/10/2016	08/12/2016

6. TESTS RESULTS SUMMARY

6.1 unintentional radiator (subpart B)

Test procedure	Description of test	Respected criteria?				Comment
		Yes	No	NAP	NAs	
FCC Part 15.107	CONDUCTED LIMITS	X				
FCC Part 15.109	RADIATED EMISSION LIMITS	X				

NAP: Not Applicable

NAs: Not Asked

6.2 intentional radiator (subpart C)

Test procedure	Description of test	Respected criteria?				Comment
		Yes	No	NAP	NAs	
FCC Part 15.203	ANTENNA REQUIREMENT	X				Note 1
FCC Part 15.205	RESTRICTED BANDS OF OPERATION	X				
FCC Part 15.207	CONDUCTED LIMITS	X				
FCC Part 15.209	RADIATED EMISSION LIMITS; general requirements	X				Note 2
FCC part 15.215	ADDITIONAL PROVISIONS TO THE GENERAL RADIATED EMISSION LIMITATIONS					
	(a) Alternative to general radiated emission limits	X				
	(b) Unwanted emissions outside of §15.225 frequency bands	X				Note 3
	(c) 20 dB bandwidth and band-edge compliance	X				
FCC Part 15.225	OPERATION WITHIN THE BAND 13.110-14.010 MHZ					
	(a) Field strength within the band 13.553-13.567 MHz	X				
	(b) Field strength within the bands 13.410-13.553 MHz and 13.567-13.710 MHz	X				
	(c) Field strength within the bands 13.110-13.410 MHz and 13.710-14.010 MHz	X				
	(d) Field strength outside the band 13.110-14.010 MHz	X				
	(e) Carrier frequency tolerance	X				
	(f) Powered tags	X				

NAP: Not Applicable

NAs: Not Asked

Note 1: *Integral antenna. Professionally installed equipment.*

Note 2: *See FCC part 15.225 (d).*

Note 3: *See FCC part 15.209. Unwanted emissions levels are all below the fundamental emission field strength level.*

« To declare, or not, the compliance with the specifications, it was not explicitly taken into account of uncertainty associated with the results »

7. MEASUREMENT OF THE CONDUCTED DISTURBANCES

Standard: FCC Part 15

Test procedure: Paragraph 15.107

Limits: Class B

Software used: BAT-EMC V3.6.0.32

Test set up:

The EUT is isolated and placed on a wooden table, 0.8 m over a horizontal reference plane and 0.4 m from a vertical reference plane. It is powered by an artificial main network placed on the ground reference plane. The equipment is powered with the AC power operating voltage of 120 V / 60 Hz.

See photos in appendix 2

Frequency range: 150 kHz - 30 MHz

Detection mode: Peak / Average

Bandwidth: 10 kHz / 9 kHz

Equipment under test operating condition:

The equipment alternate between read and write mode.

Results:


Ambient temperature (°C): 22.5
Relative humidity (%): 41

Sample N° 1:


Measurement on the mains power supply:

The measurement is first realized with Peak detector.

Curve N° 1: measurement on the Neutral with peak detector

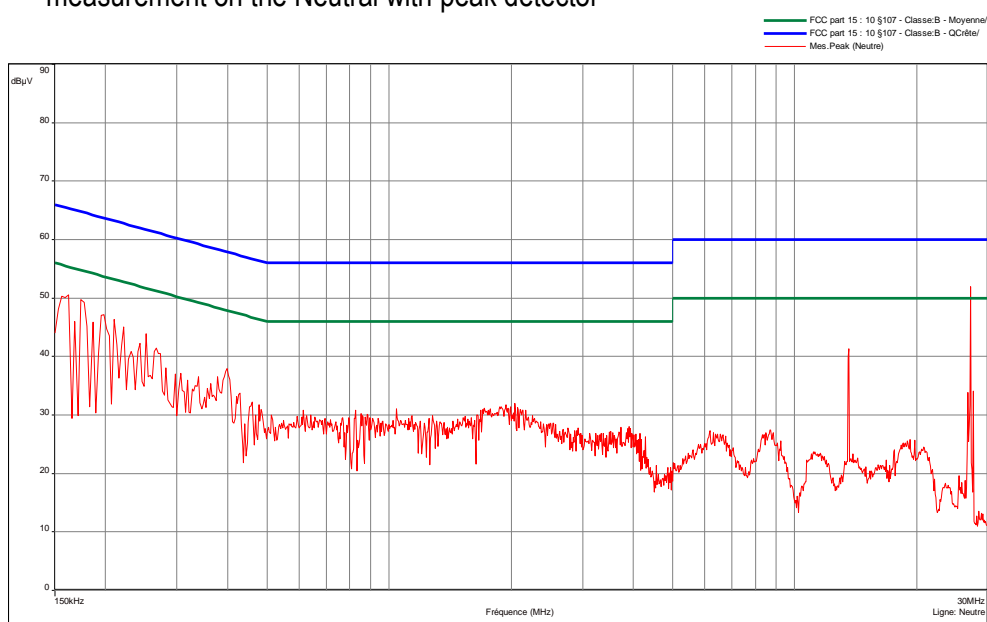


Curve N° 2: measurement on the Line with peak detector

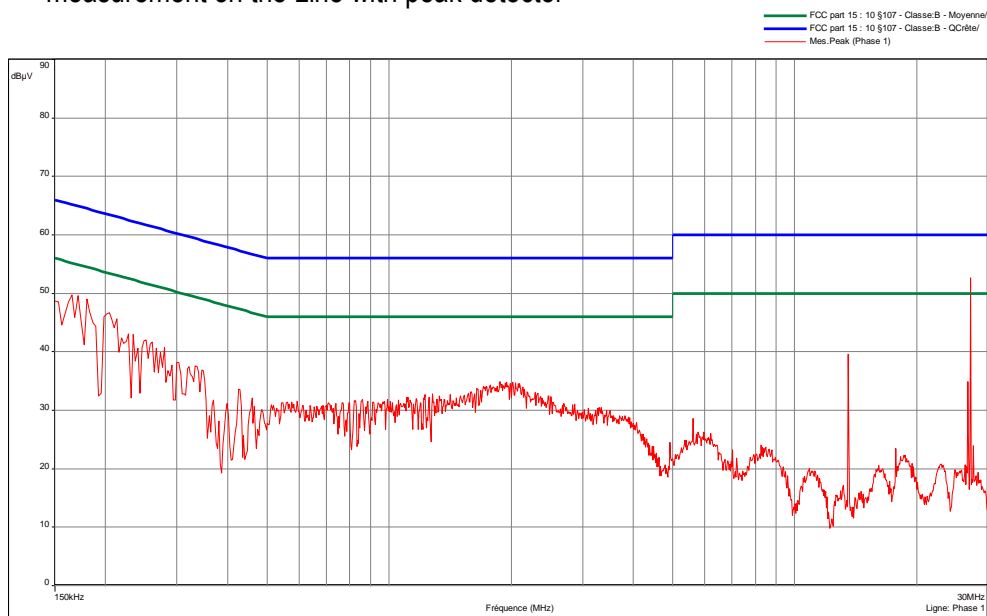


The frequencies which are not 6 dB under the Average limit are then analyzed with Average detector.

Curve N° 3: average measurement on the neutral, for the frequency range:

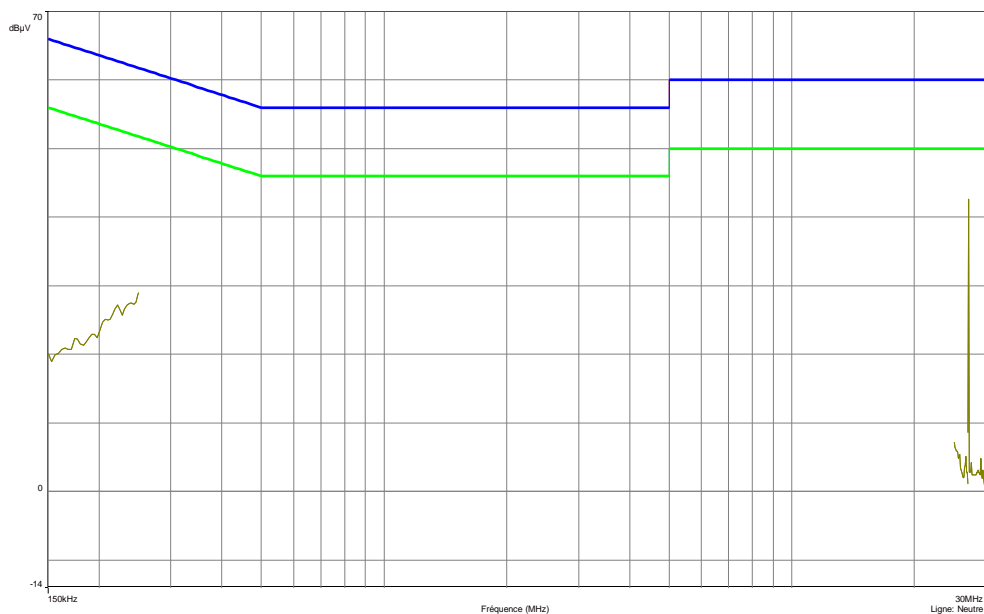

Curve N° 4: average measurement on the line, for the frequency range:

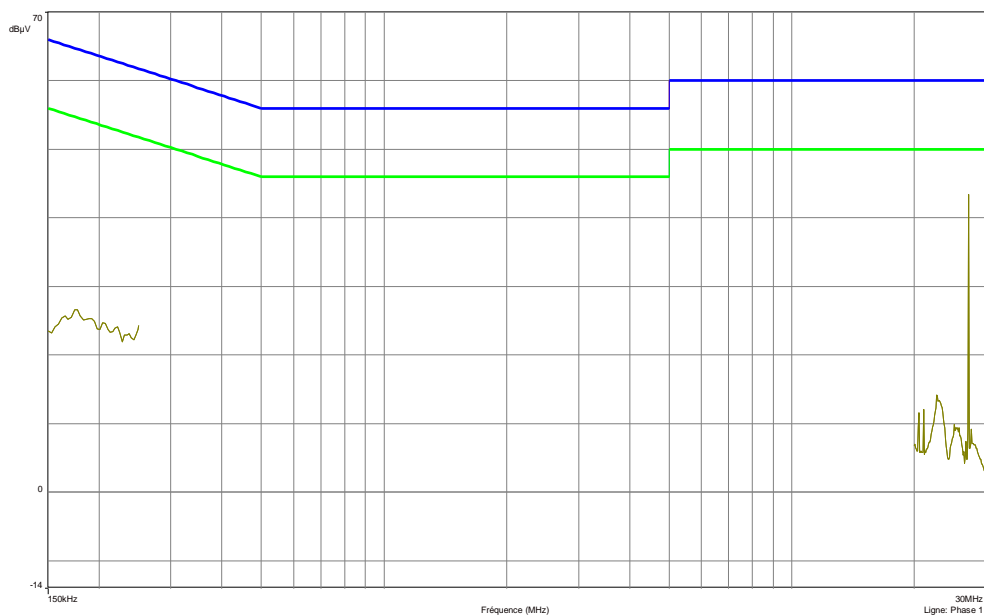

Test conclusion:

RESPECTED STANDARD

8. RADIATED EMISSION LIMITS

Standard: FCC Part 15

Test procedure: paragraph 109

Limit class: Class B

Test set up:

The measure is realized on open area test site under 1 GHz.

The system is tested in an open area test site (OATS). The EUT is placed on a rotating table, 0.8m from a ground plane.

Zero degree azimuths correspond to the front of the device under test.

See photos in appendix 2.

Frequency range: From 30 MHz to 1000 MHz

Detection mode: Quasi-peak ($F < 1$ GHz)

Bandwidth: 120 kHz ($F < 1$ GHz)

Distance of antenna: 10 meters (in open area test site)

Antenna height: 1 to 4 meters (in open area test site)

Antenna polarization: vertical and horizontal (only the highest level is recorded)

Equipment under test operating condition:

The equipment alternate between read and write mode.

Results:

Ambient temperature (°C): 22.5
Relative humidity (%): 41

Power source: 5Vdc by USB port of a computer powered in 120 Vac – 60Hz

Sample N° 1:

FREQUENCIES (MHz)	Detector P: Peak QP: Quasi- Peak	Antenna height (cm)	Azimuth (degree)	Polarization H: Horizontal V: Vertical	Field strength (dBμV/m)	Limits (dBμV/m)	Margin (dB)
74.020	QP	400	178	H	38.27	40	-1.73
134.980	QP	243	321	H	34.16	43.5	-9.34
180.020	QP	195	301	H	39.45	43.5	-4.05

Applicable limits: for $30 \text{ MHz} \leq F \leq 88 \text{ MHz}$: 40 dBμV/m at 3 meters
for $88 \text{ MHz} < F \leq 216 \text{ MHz}$: 43.5 dBμV/m at 3 meters
for $216 \text{ MHz} < F \leq 960 \text{ MHz}$: 46 dBμV/m at 3 meters
Above 960 MHz : 54 dBμV/m at 3 meters

Note: any spurious which has more than 20 dB of margin compared to the applicable limit is not necessarily reported.

Test conclusion:

RESPECTED STANDARD

9. MEASUREMENT OF THE CONDUCTED DISTURBANCES

Standard: FCC Part 15

Test procedure: Paragraph 15.207

Software used: BAT-EMC V3.6.0.32

Test set up:

The EUT is isolated and placed on a wooden table, 0.8 m over an horizontal reference plane and 0.4 m from a vertical reference plane. It is powered by an artificial main network placed on the ground reference plane. The equipment is powered with the AC power operating voltage of 120 V / 60 Hz.

See photos in appendix 2

Frequency range: 150 kHz - 30 MHz

Detection mode: Peak / Average

Bandwidth: 10 kHz

Equipment under test operating condition:

The equipment under test is blocked in continuous modulated transmission mode, at the highest output power level at which the transmitter is intended to operate.

Results:


Ambient temperature (°C): 22.5
Relative humidity (%): 41

Sample N° 1:


Measurement on the mains power supply:

The measurement is first realized with peak detector.

Curve N° 5: measurement on the Neutral with peak detector

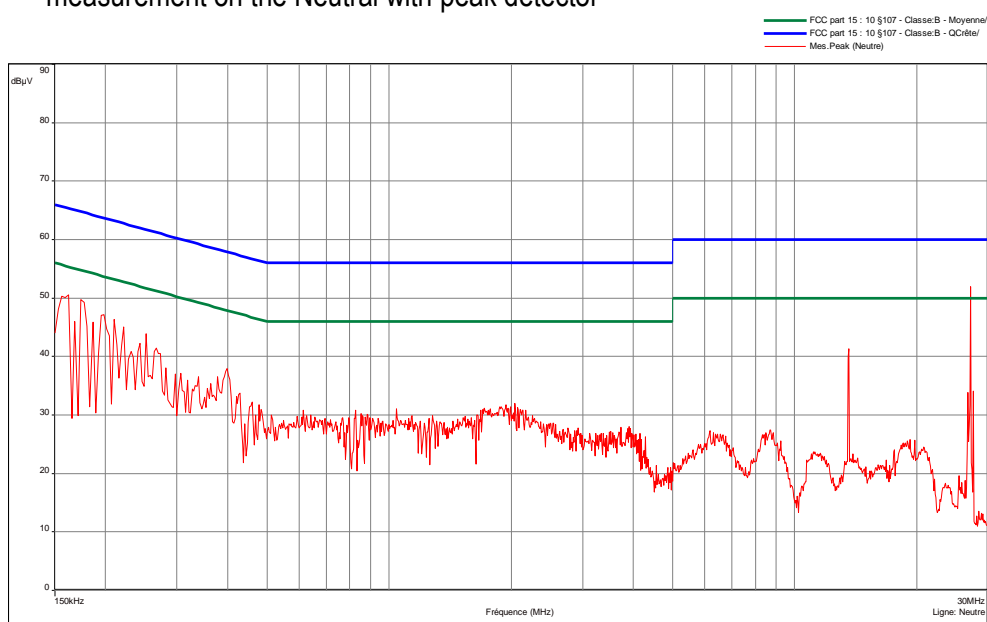


Curve N° 6: measurement on the Line with peak detector

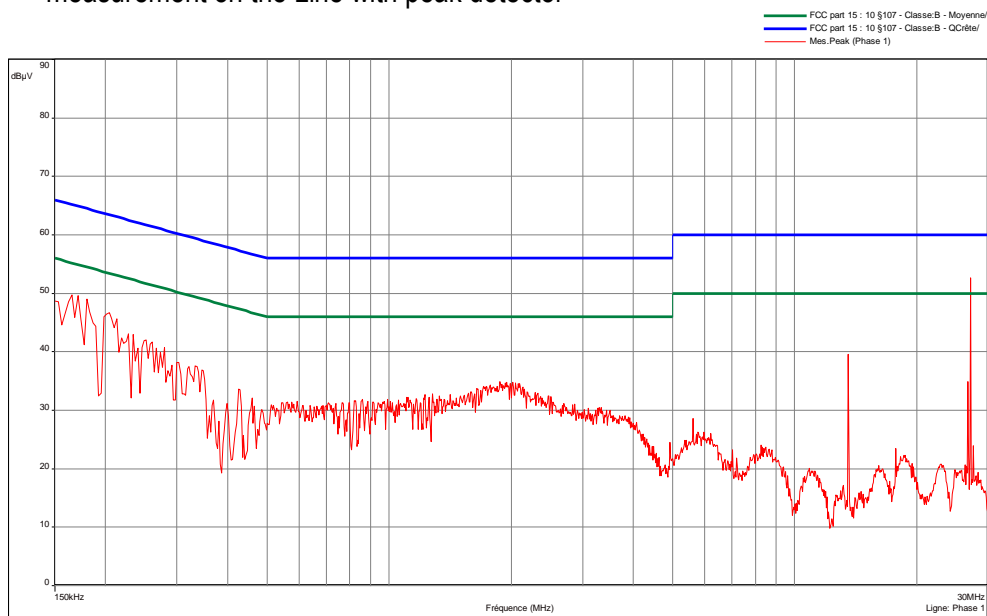


The frequencies which are not 6 dB under the Average limit are then analyzed with Average detector.

Curve N° 7: average measurement on the neutral, for the frequency range:

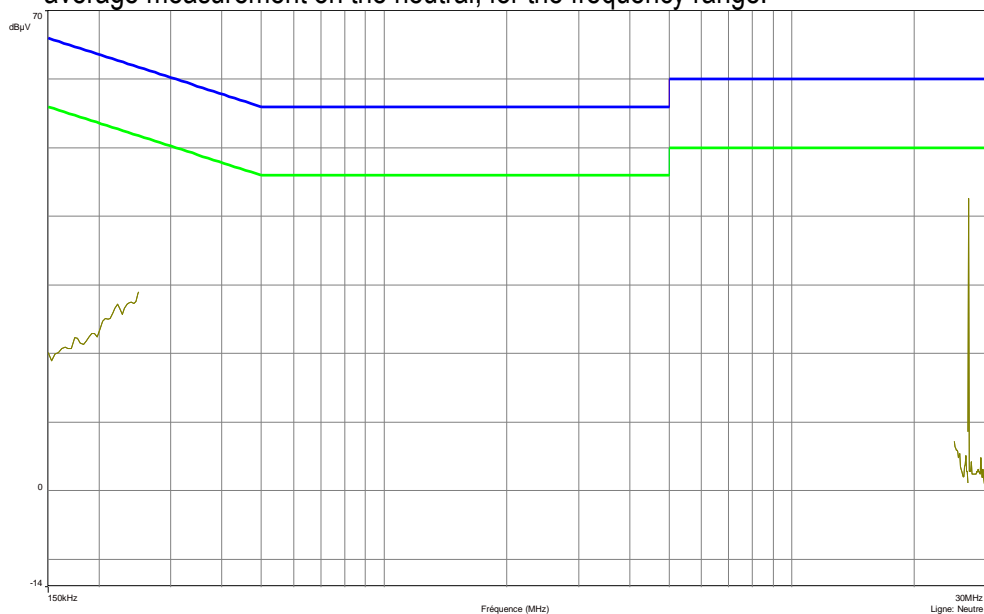

Curve N° 8: average measurement on the line, for the frequency range:

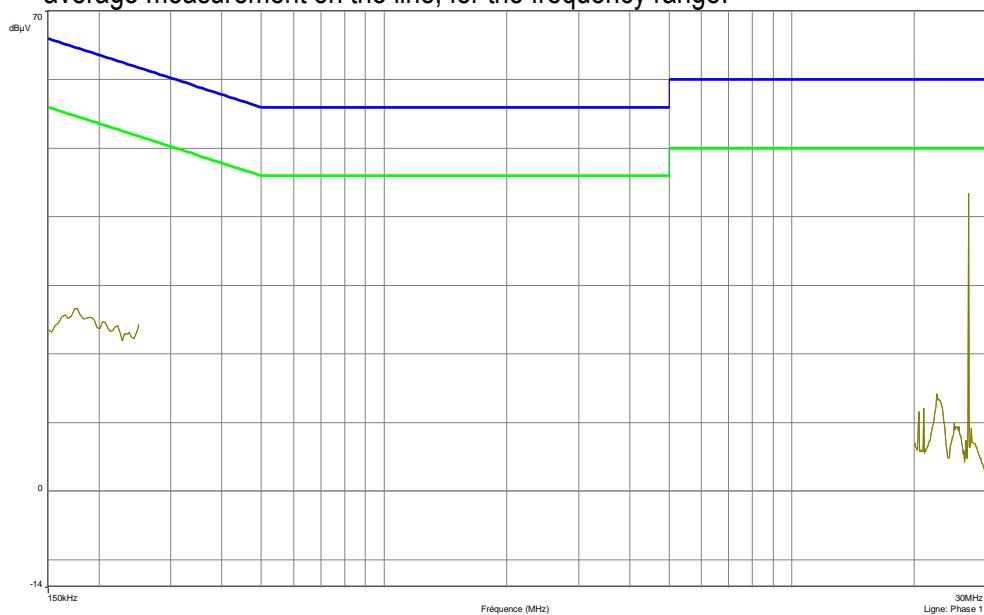

Test conclusion:

RESPECTED STANDARD

10. ADDITIONAL PROVISIONS TO THE GENERAL RADIATED EMISSION LIMITATIONS

Standard: FCC Part 15

Test procedure: Paragraph 15.215

Test set up:

Test realized in near field. All field strength measurements are correlated with the radiated maximum peak output power

Test operating condition of the equipment:

The equipment under test is blocked in continuous modulated transmission mode, at the highest output power level at which the transmitter is intended to operate.

Results:

Ambient temperature (°C): 22.5
Relative humidity (%): 41

Power source: 5Vdc by USB port of a computer powered in 120 Vac – 60Hz

Lower Band Edge: from 13.090 MHz to 13.110 MHz
Upper Band Edge: from 14.010 MHz to 14.030 MHz

Sample N° 1:

<u>FUNDAMENTAL FREQUENCY (MHZ)</u>	<u>FIELD STRENGTH LEVEL OF FUNDAMENTAL (DBμV/M)</u>	<u>DETECTOR (PEAK OR AVERAGE)</u>	<u>FREQUENCY OF MAXIMUM BAND- EDGES EMISSION (MHZ)</u>	<u>DELTA MARKER (DB)*</u>	<u>CALCULATED MAX OUT-OF- BAND EMISSION LEVEL (DBμV/M)</u>	<u>LIMIT (DBμV/M)</u>	<u>MARGIN (DB)</u>
13.56022	52.31	Peak	13.10836	42.72	9.59**	29.54	19.95
13.56022	52.31	Peak	14.01198	41.98	10.33**	29.54	19.21

* Marker-Delta method

** The peak level is lower than the quasi-peak limit (29.54 dBμV/m).

20 dB bandwidth curves are given in appendix 5 ; band-edge curves are given in appendix 6.

Test conclusion:

RESPECTED STANDARD

11. OPERATION WITHIN THE BAND 13.110 – 14.010 MHz

Standard: FCC Part 15

Test procedure: paragraph 15.225 (a), (b), (c), (e)

Test set up:

The system is tested in an open area test site (OATS). The EUT is placed on a rotating table, 0.8 m from a ground plane. Zero degree azimuth corresponds to the front of the equipment under test.

See photos in appendix 2

The frequency tolerance measure is realized in near-field.

Detection mode: Quasi-peak ($F < 1 \text{ GHz}$)

Bandwidth: 9 kHz ($150 \text{ kHz} < F < 30 \text{ MHz}$)

Distance of antenna: 10 meters

Antenna height: 1 meter

Antenna polarization: oriented in the vertical plane. The lowest point of the loop is 1m above ground level.

Equipment under test operating condition:

The equipment under test is blocked in continuous modulated transmission mode, at the highest output power level at which the transmitter is intended to operate.

Results:

Carrier field strength

Ambient temperature (°C): 22.5
Relative humidity (%): 41

Power source: 5Vdc by USB port of a computer powered in 120 Vac – 60Hz

Sample N° 1:

	Field strength (dBμV/m) at frequency: 13.56 MHz
Normal test conditions	49.72
Limits (dBμV/m)	84
Margin (dB)	34.28

Polarization of test antenna: perpendicular (height: 100 cm)

Position of equipment: see photo in appendix 2 use position (azimuth: 250 degrees)

Frequency stability

			Measured frequency difference (ppm)	Limits (ppm)
Normal test conditions	Temperature (°C): 20 Humidity (%): 41	Minimal power source (V): 102	-33.92	±100
		Maximal power source (V): 138	13.57	
Extreme test conditions	Minimal temperature (°C): -20	Nominal power source (V): 120	27.14	
	Maximal temperature (°C): +55	Nominal power source (V): 120	13.57	

Field strength within the band 13.110-14.010 MHz

See spectrum mask in appendix 8

Test conclusion:

RESPECTED STANDARD

12. FIELD STRENGTH OUTSIDE THE BAND 13.110-14.010 MHZ

Standard: FCC Part 15

Test procedure: paragraph 209
paragraph 15.225 (d)

Test set up:

The measure is realized on open area test site under 1 GHz

The system is tested in an open area test site (OATS). The EUT is placed on a rotating table, 0.8m from a ground plane.

When the system is tested in anechoic chamber. The EUT is placed on a rotating table, 1.5m from a ground plane.

Zero degree azimuths correspond to the front of the device under test.

See photos in appendix 2.

Frequency range: From 9 kHz to 10th harmonic of the highest fundamental frequency (13.56 MHz)

Detection mode: Quasi-peak ($F < 1$ GHz)

Bandwidth: 200Hz ($9 \text{ kHz} < F < 150\text{kHz}$)
9 kHz ($150 \text{ kHz} < F < 30\text{MHz}$)
120 kHz ($30 \text{ MHz} < F < 1 \text{ GHz}$)

Distance of antenna: 10 meters

Antenna height: 1 to 4 meters (in open area test site)

Antenna polarization: vertical and horizontal (only the highest level is recorded)

Equipment under test operating condition:

The equipment under test is blocked in continuous modulated transmission mode, at the highest output power level at which the transmitter is intended to operate.

Results:

Ambient temperature (°C): 22.5
Relative humidity (%): 41

Power source: 5Vdc by USB port of a computer powered in 120 Vac – 60Hz

Sample N° 1:

FREQUENCIES (MHz)	Detector P: Peak QP: Quasi- Peak	Antenna height (cm)	Azimuth (degree)	Polarization H: Horizontal V: Vertical	Field strength (dBμV/m)	Limits (dBμV/m)	Margin (dB)
27.120	QP	100	282	//	31.87	40	-8.13
40.700	QP	100	206	V	33.88	40	-6.12
54.220	QP	100	313	V	40	40	0
67.820	QP	400	361	H	30.63	40	-9.37
74.020	QP	400	178	H	38.27	40	-1.73
81.340	QP	400	195	H	40	40	0
108.460	QP	100	268	V	36.18	43.5	-7.32
134.980	QP	243	321	H	34.16	43.5	-9.34
180.020	QP	195	301	H	39.45	43.5	-4.05



Note: any spurious which has more than 20 dB of margin compared to the applicable limit is not necessarily reported.



Test conclusion:


RESPECTED STANDARD

□□□ End of report, 7 appendixes to be forwarded □□□

APPENDIX 1: Photos of the equipment under test

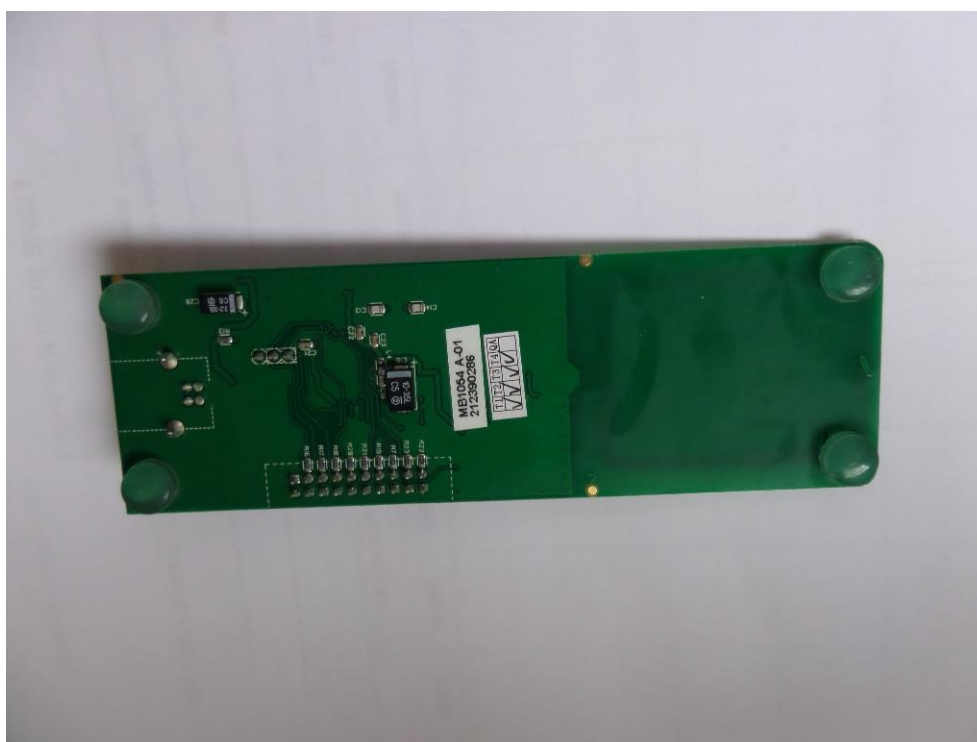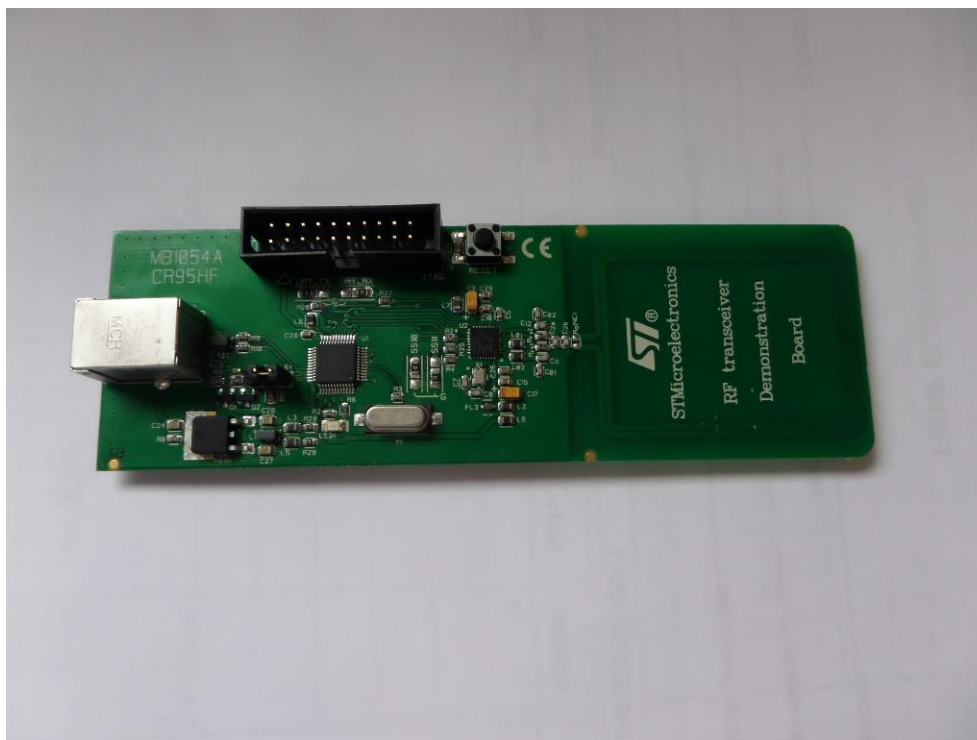


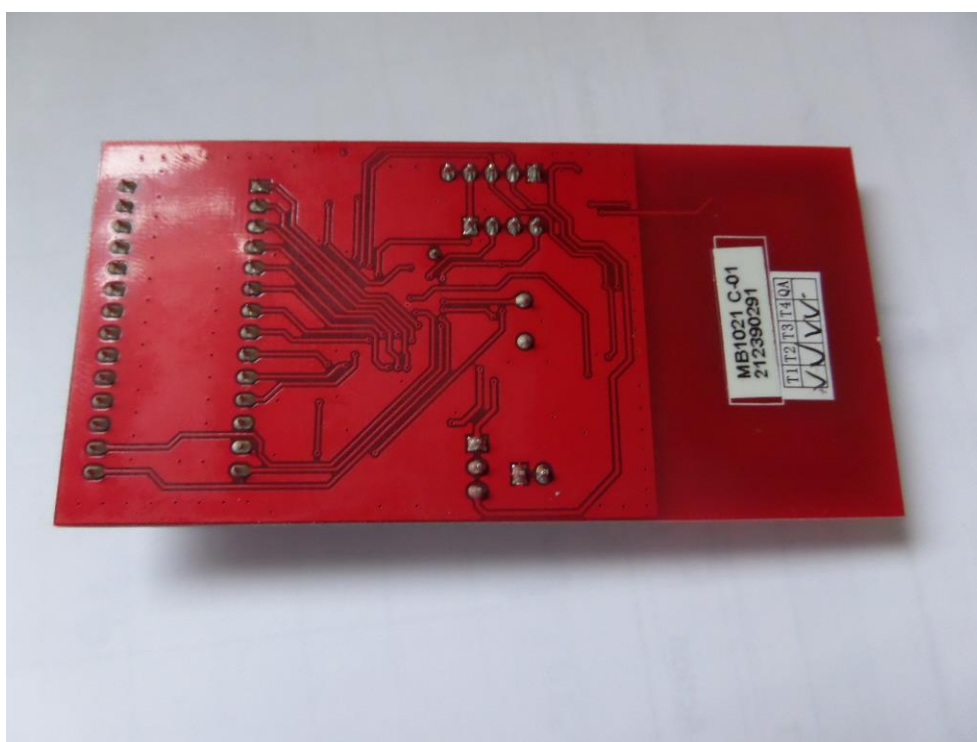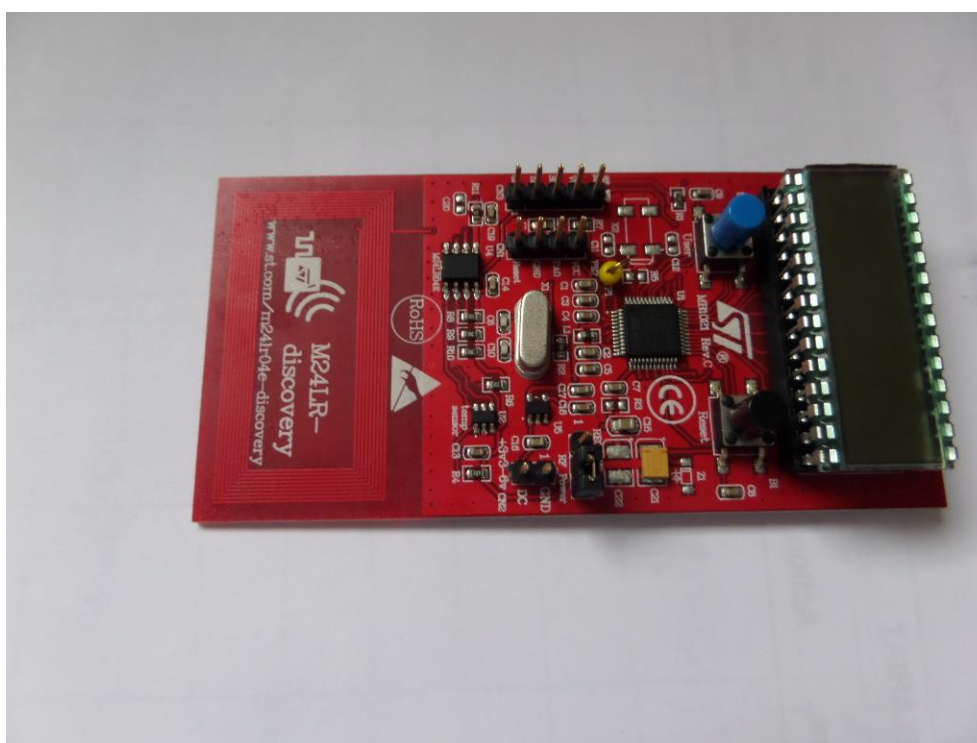

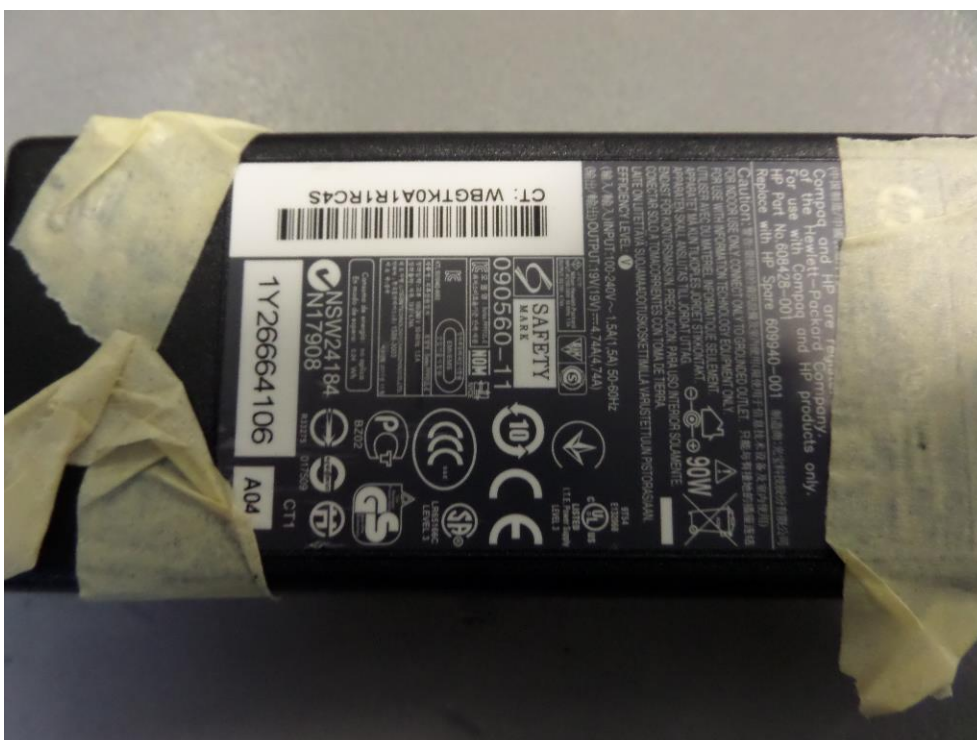

APPENDIX 2: Test set up

Open area test site

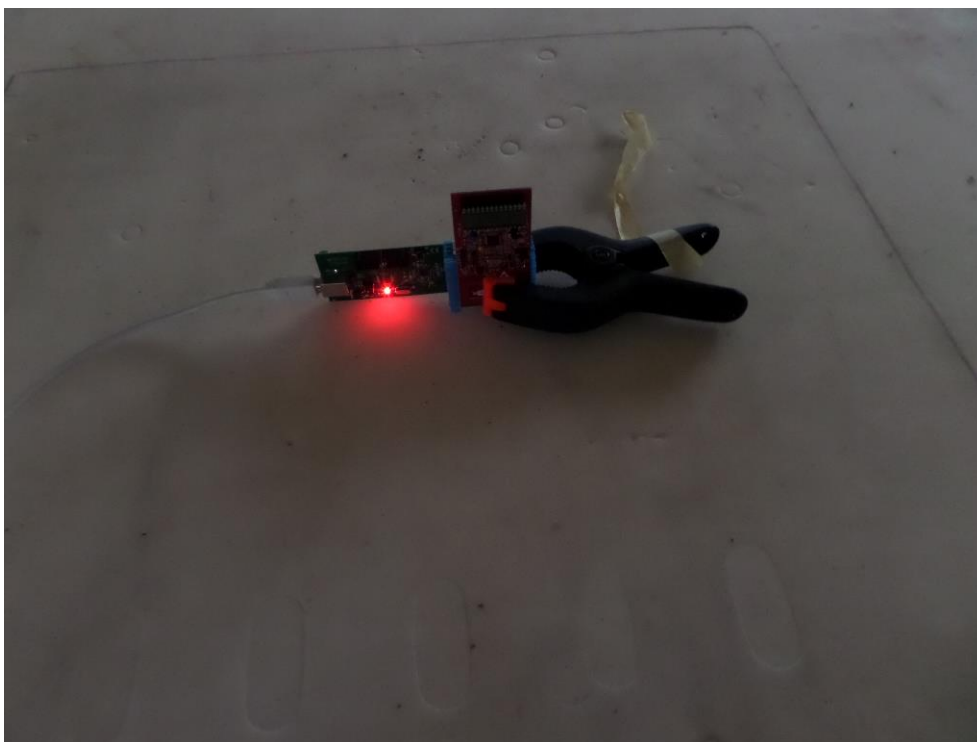

Conducted emission



APPENDIX 3: Test equipment list

Measurement of the conducted disturbances

TYPE	MANUFACTURER	EMITECH NUMBER
Outside room Hors cage	Emitech	8893
Satellite synchronized frequency standard GPS8	ACQUISYS	8896
Test receiver HP 8591EM	Hewlett Packard	8524
LISN 1600	Thurbly Thandar Instruments	8719
High-pass filter EZ-25	Rohde & Schwarz	8635
Absorber sheath current	Emitech	9489
Power source 1251RP	California instruments	8508
Multimeter MN5102B	AOIP	8675
Meteo station WS-9232	La Crosse Technology	8750
Software	BAT-EMC V3.6.0.32	0000

Radiated emission limits

TYPE	MANUFACTURER	EMITECH NUMBER
Open test site	EMITECH	8732
Anechoic Chamber	EMITECH	8593
Satellite synchronized frequency standard GPS8	ACQUISYS	8896
Test receiver ESI7	Rohde & Schwarz	8707
Spectrum Analyzer FSP40	Rohde & Schwarz	4088
Biconical antenna VHBB 9124	Schwarzbeck	8526
Bi-log antenna CBL6112A	CHASE	8530
Log periodic antenna UHALP 9108A	Schwarzbeck	8543
Low-noise amplifier 8447D	Hewlett Packard	8511
Power source 1251RP	California instruments	8508
Multimeter MN5102B	AOIP	8675
Meteo station WS-9232	La Crosse Technology	8749
Software	BAT-EMC V3.6.0.32	0000

Measurement of the conducted disturbances

TYPE	MANUFACTURER	EMITECH NUMBER
Outside room Hors cage	Emitech	8893
Satellite synchronized frequency standard GPS8	ACQUISYS	8896
Test receiver HP 8591EM	Hewlett Packard	8524
LISN 1600	Thurbly Thandar Instruments	8719
High-pass filter EZ-25	Rohde & Schwarz	8635
Absorber sheath current	Emitech	9489
Power source 1251RP	California instruments	8508
Multimeter MN5102B	AOIP	8675
Meteo station WS-9232	La Crosse Technology	8750
Software	BAT-EMC V3.6.0.32	0000

Additional provisions to the general radiated emission limitations

TYPE	MANUFACTURER	EMITECH NUMBER
Anechoic Chamber	EMITECH	8593
Satellite synchronized frequency standard GPS8	ACQUISYS	8896
Spectrum Analyzer FSP40	Rohde & Schwarz	4088
Active loop antenna 6502	Emco	1406
Power source 1251RP	California instruments	8508
Multimeter MN5102B	AOIP	8675
Meteo station WS-9232	La Crosse Technology	8750
Software	GPIBSHOT V2.4	/


Operation within the band 13.110 – 14.010 MHz

TYPE	MANUFACTURER	EMITECH NUMBER
Open test site	EMITECH	8732
Modulation analyzer HP 8901B	Hewlett Packard	1211
Satellite synchronized frequency standard GPS8	ACQUISYS	8896
Test receiver ESI7	Rohde & Schwarz	8707
Spectrum Analyzer FSBS	Rohde & Schwarz	7001
Active loop antenna 6502	Emco	1406
Climatic chamber F0-100	MPC	7045
Power source 1251RP	California instruments	8508
Multimeter MN5102B	AOIP	8675
Meteo station WS-9232	La Crosse Technology	8749
Software	BAT-EMC V3.6.0.32	0000

Field strength outside the band 13.110-14.010 MHz


TYPE	MANUFACTURER	EMITECH NUMBER
Open test site	EMITECH	8732
Anechoic Chamber	EMITECH	8593
Satellite synchronized frequency standard GPS8	ACQUISYS	8896
Test receiver ESI7	Rohde & Schwarz	8707
Spectrum Analyzer FSP40	Rohde & Schwarz	4088
Active loop antenna 6502	Emco	1406
Biconical antenna VHBB 9124	Schwarzbeck	8526
Bi-log antenna CBL6112A	CHASE	8530
Log periodic antenna UHALP 9108A	Schwarzbeck	8543
Low-noise amplifier 8447D	Hewlett Packard	8511
Power source 1251RP	California instruments	8508
Multimeter MN5102B	AOIP	8675
Meteo station WS-9232	La Crosse Technology	8749
Software	BAT-EMC V3.6.0.32	0000

APPENDIX 4: 6 dB bandwidth

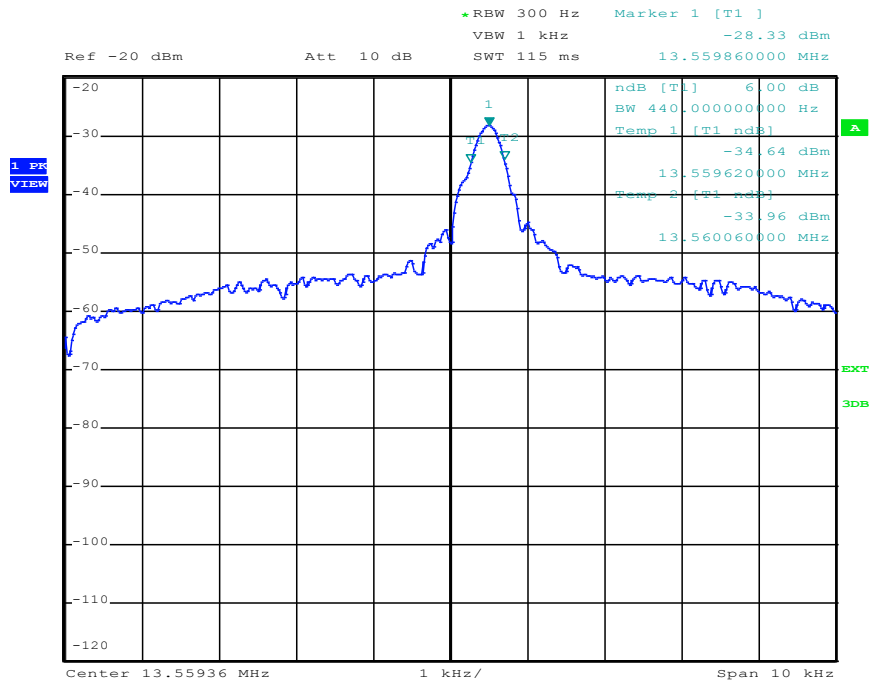


Date: 19.NOV.2014 08:41:38

APPENDIX 5: 20 dB bandwidth

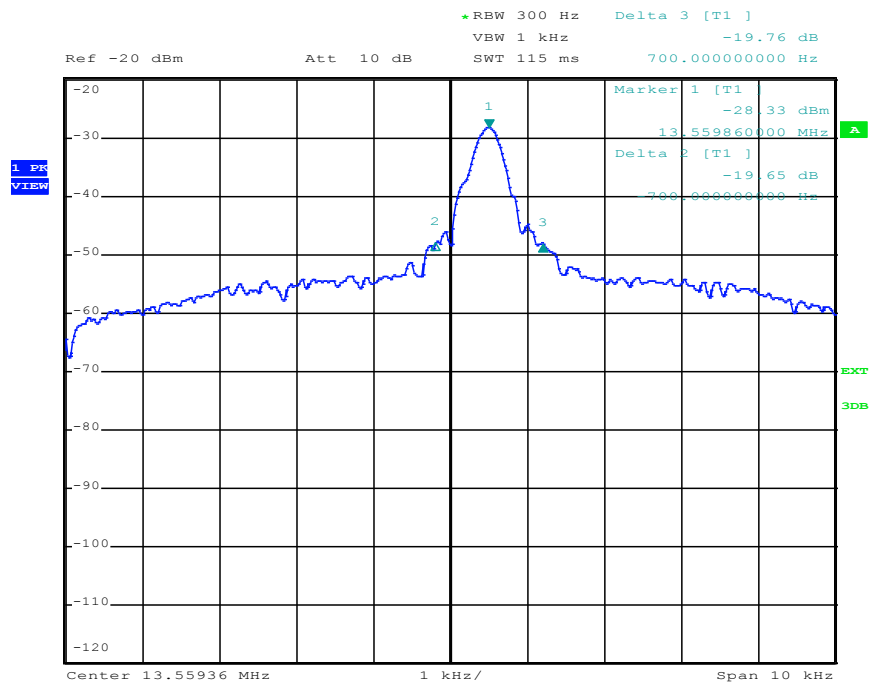

Date: 19.NOV.2014 08:42:14

APPENDIX 6: Band edge

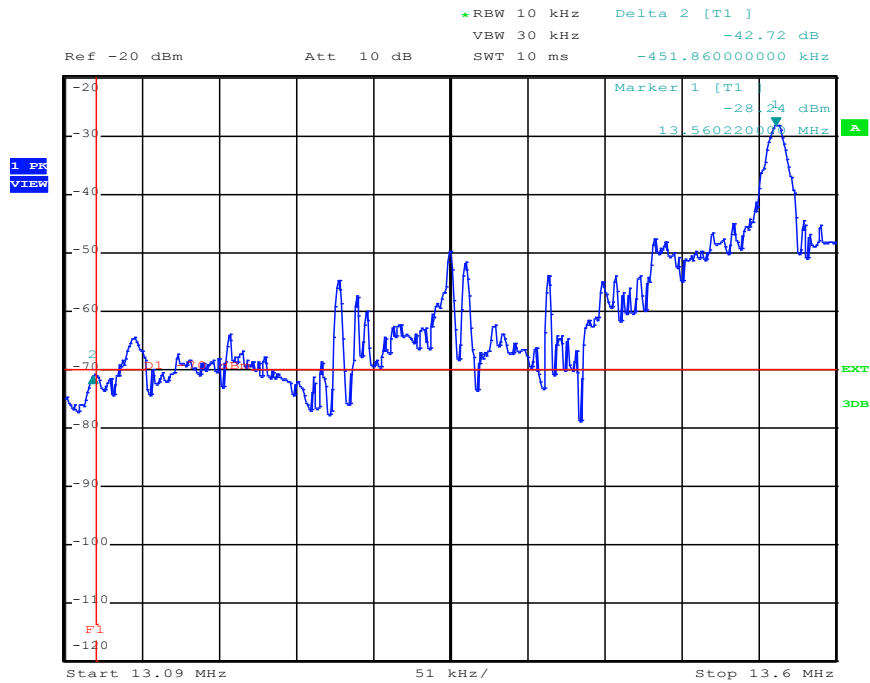


Date: 19.NOV.2014 08:39:57




Date: 19.NOV.2014 08:40:52


APPENDIX 7: Spectrum mask

MASK +20°C, 102 Vac

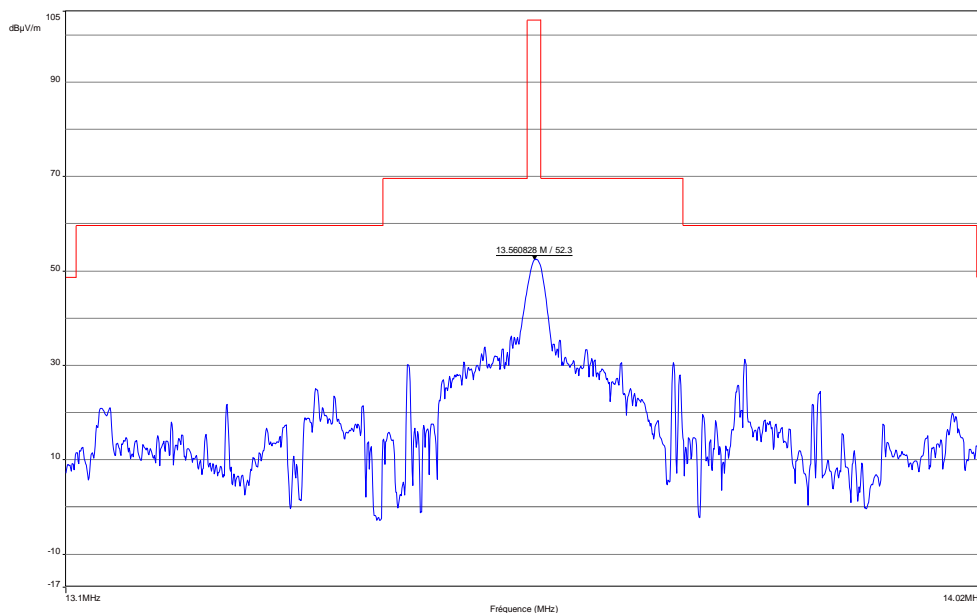

MASK +20°C, 138 Vac

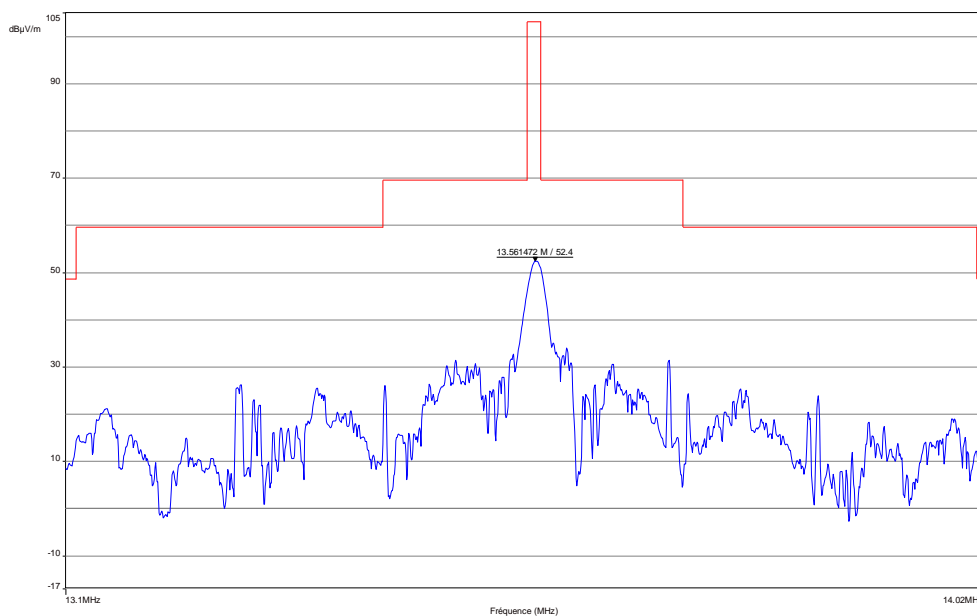

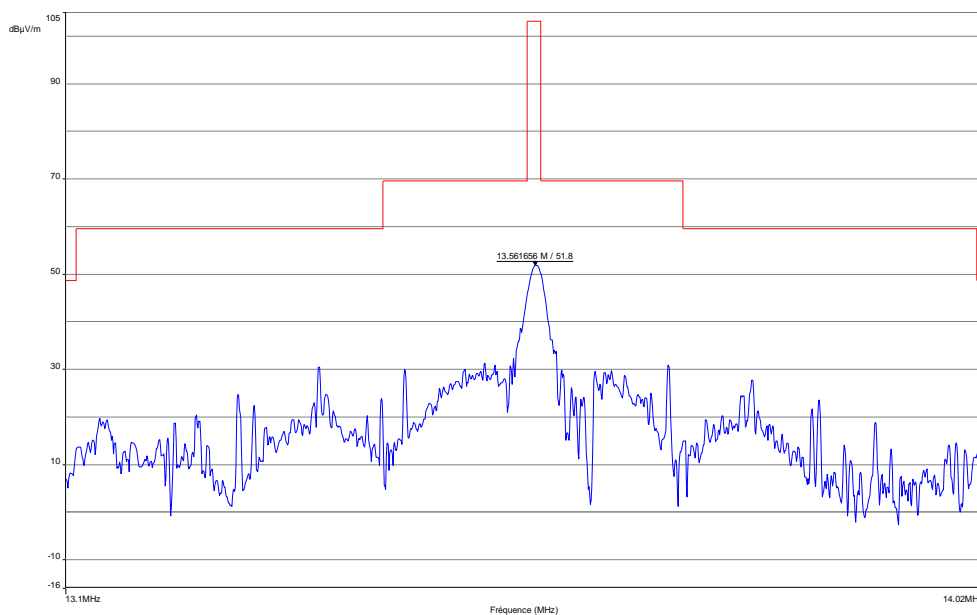MASK -20°C, 120 Vac

MASK +50°C, 120 Vac
