

Page: 1 of 36

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO **FCC PART 15 SUBPART C REQUIREMENT**

OF

Brand Name: Sony

FCC ID: PY7-46331W

ER/2017/20024 Report No.:

Issue Date: Aug. 30, 2017

FCC Rule §15.225

Sony Mobile Communications Inc.

Prepared for: 4-12-3, Higashi-Shinagawa, Shinagawa-ku,

Tokyo, 140-0002 Japan

SGS Taiwan Ltd.

Electronics & Communication Laboratory

No.134, Wu Kung Road, New Taipei Industrial Prepared by:

Park, Wuku District, New Taipei City, Taiwan

24803





0513

Note: This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279



Page: 2 of 36

VERIFICATION OF COMPLIANCE

Sony Mobile Communications Inc. **Applicant:**

4-12-3, Higashi-Shinagawa, Shinagawa-ku, Tokyo, 140-0002 Japan

Brand Name: Sony

PY7-46331W FCC ID:

File Number: ER/2016/C0038

Dec. 12, 2016 ~ Jul. 13, 2017 Date of Test:

Aug, 15, 2017 (AC Line Conducted Emission)

Date of EUT Received: Dec. 12, 2016

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits.

The test results of this report relate only to the tested sample identified in this report.

Aug. 30, 2017 Test By: Date: Louis Chen / Engineer Prepared By: Date: Aug. 30, 2017 Violetta Tang / Clerk Approved By: Date: Aug. 30, 2017 Jim Chang / Asst. Manager

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

<mark>SGS Taiwan Ltd.</mark> No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279



Page: 3 of 36

Revision History

Report Number	Revision	Description	Issue Date
ER/2017/20024	Rev.00	Initial creation of document	Feb. 21, 2017
ER/2017/20024	Rev.01	Update general information, description on page 17~34 & add OATS data.	Mar. 16, 2017
ER/2017/20024	Rev.02	Update description, measurement plots & setup photo.	Jul. 13, 2017
ER/2017/20024	Rev.03	Update description, measurement plots and configuration of test system.	Aug. 15, 2017
ER/2017/20024	Rev.04	Update test equipment list and test date of measurement plots.	Aug. 21, 2017
ER/2017/20024	Rev.05	Add description for the test mode; update configuration & setup photos of test system.	Aug. 30, 2017

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client an information contained in release the Company's and the interest of the instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, WuKungRoad, NewTaipeiIndustrialPark, WukuDistrict, NewTaipeiCity, Taiwan24803/新北市五股區新北產業園區五工路134號



Page: 4 of 36

Contents

1	GENERAL INFORMATION	5
2	SYSTEM TEST CONFIGURATION	7
3	SUMMARY OF TEST RESULTS	9
4	DESCRIPTION OF TEST MODES	9
5	MEASUREMENT UNCERTAINTY	10
6	CONDUCTED EMISSION TEST	11
7	RADIATED TEST ITEMS	15
8	FREQUENCY STABILITY	29
9	20 DB OCCUPIED BANDWIDTH MEASUREMENT	34
10	ANTENNA RECUIREMENT	36

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client an information contained in release the Company's and the interest of the instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, WuKungRoad, NewTaipeiIndustrialPark, WukuDistrict, NewTaipeiCity, Taiwan24803/新北市五股區新北產業園區五工路134號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488

www.tw.sgs.com



Page: 5 of 36

GENERAL INFORMATION

1.1 Product Description

General:

Brand Name:	Sony		
Hardware Version:	A		
Software Version:	0.5		
Data Cable (USB):	Model No.: UCB20, Supplier: Sony, Length: 100cm		
	3.8Vdc		
Power Supply:	Battery: Model No.: N/A, Supplier: N/A		
	Adapter : Model No.: ACH10E, Supplier: Sony		

NFC:

Operating Frequency:	13.56MHz
Transmit Power:	< 30uV/m at 30m.
Number of Channels:	1
Antenna Type:	Loop Antenna
Modulation Type:	ASK

1.2 Product Feature of Equipment Under Test

The equipment under Test (Hereafter Called: FUT) supports below functions

The equipment under rest (hereafter sailed: Est) supports below functions.			
Product Feature			
Bluetooth Version V4.2 dual mode			
Wi-Fi- Specification 802.11a/b/g/n/ac			
NFC Specification NFC			

Note: The above EUT information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



Page: 6 of 36

1.3 Test Methodology of Applied Standards

FCC Part 15, Subpart C §15.225 ANSI C63.10:2013

Note:

All test items have been performed and record as per the above standards.

1.4 Test Facility

SGS Taiwan Ltd. Electronics & Communication Laboratory No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803 (TAF code 0513)

OATS: SGS Far East Limited Taiwan EMC Laboratory

No.34-2, Dingfu, Linkou Dist., New Taipei City 24442, Taiwan (R.O.C.)

FCC Registration Numbers are: 509634 Canada Registration Number: 4620A-5.

1.5 Special Accessories

There is no special accessory used while test was conducted.

1.6 Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or

appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488

www.tw.sqs.com



Page: 7 of 36

SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plan. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz,. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plan. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through one orthogonal axe and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



Page: 8 of 36

2.5 Configuration of Tested System

Fig. 2-1 Radiated Emission & AC Power Line Conducted Emission Configuration




Fig. 2-2 Radiated Emission & AC Power Line Conducted Emission Configuration




Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model / Type No.	Series No.	Data Cable	Power Cord
1.	NFC Test Software	N/A	N/A	N/A	N/A	N/A
2.	Notebook	Lenovo	R400	7440AV6	N/A	Un-shield
3.	Data Cable (USB)	Sony	UCB20	N/A	N/A	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

防非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留例天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, WuKungRoad, New Taipeilndustrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號

f (886-2) 2298-0488 www.tw.sgs.com



Page: 9 of 36

SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.207	AC Power Line Conducted Emission	Compliant
§15.225 (a)-(d)	Radiated Emission	Compliant
§15.209	Radiated Emission Limits, general requirement	Compliant
§15.225 (e)	Frequency Stability	Compliant
§2.1049 §15.215 (c)	20 dB OCCUPIED BANDWIDTH	Compliant
§15.203	Antenna Requirement	Compliant

DESCRIPTION OF TEST MODES

4.1 The Worst Test Modes and Channel Details

- 1. The EUT stay in continuous transmitting mode.
- 2. The frequency 13.56 MHz is the default channel to test, where it is the only manipulative channel as this application supports.
- 3. Investigation has been done on all the possible configurations for searching the worst case.

RADIATED EMISSION TEST					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION		
NFC	1	1	ASK		
	FREQUENCY STABILITY				
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION		
NFC	1	1	ASK		
20dB BANDWIDTH					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION		
NFC	1	1	ASK		

The field strength of spurious radiation emission was measured as NFC Transmitter for channel the worst case was reported.

Note:

The test result of test setup without the accessories is chosen as the worst case to be presented in the test report.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134, WuKungRoad, New TaipeiIndustrial Park, WukuDistrict, New TaipeiCity, Taiwan 24803/新北市五股區新北產業園區五工路134號



Page: 10 of 36

MEASUREMENT UNCERTAINTY

Test Items	Uncertainty
AC Power Line Conducted Emission	+/- 2.586 dB
Frequency Stability	+/- 51.33 Hz
20 dB OCCUPIED BANDWIDTH	+/- 51.33 Hz
Temperature	+/- 0.65 °C
Humidity	+/- 4.6 %
DC / AC Power Source	DC= +/- 0.13%, AC= +/- 0.2%

Radiated Spurious Emission:

	9kHz - 30MHz: +/- 2.87dB	
Measurement uncertainty	30MHz - 180MHz: +/- 3.37dB	
(Polarization : Vertical)	180MHz -417MHz: +/- 3.19dB	
	0.417GHz-1GHz: +/- 3.19dB	

	9kHz - 30MHz: +/- 2.87dB
Measurement uncertainty	30MHz - 167MHz: +/- 4.22dB
(Polarization : Horizontal)	167MHz -500MHz: +/- 3.44dB
	0.5GHz-1GHz: +/- 3.39dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

防非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留例天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



Page: 11 of 36

CONDUCTED EMISSION TEST

6.1 Standard Applicable:

Frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

Troqueries rainge warm reeta in to com in entre exceeded and him table de below.					
Frequency range	Limits dB(uV)				
MHz	Quasi-peak Average				
IVII IZ	Quasi-peak	Average			
0.15 to 0.50	66 to 56	56 to 46			
0.50 to 5	56	46			
5 to 30	60	50			

Note

- 1. The lower limit shall apply at the transition frequencies
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50

6.2 Measurement Equipment Used:

Conducted Emission Test Site									
EQUIPMENT	UIPMENT MFR MODEL SERIAL		LAST	CAL DUE.					
TYPE		NUMBER	NUMBER	CAL.					
EMI Test Receiver	R&S	ESCI7	100760	05/11/2017	05/10/2018				
LISN	SCHWARZBECK	NSLK 8127	8127-649	05/22/2017	05/21/2018				
LISN	MESS TEC	FCC-LISN-50/250 -25-2-01	4034	03/19/2017	03/18/2018				
Coaxial Cables	N/A	WK CE Cable	N/A	11/26/2016	11/25/2017				

6.3 EUT Setup:

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



Page: 12 of 36

6.4 Test SET-UP (Block Diagram of Configuration)

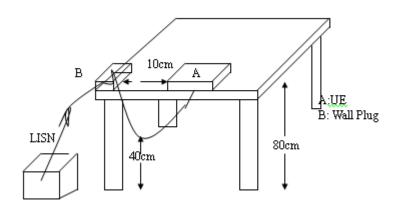

6.5 Measurement Procedure:

- 1. The EUT was placed on a table which is 0.8m above ground plan.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

6.6 Measurement Result:

Note: Refer to next page for measurement data and plots.

Note2: The * reveals the worst-case results that closet to the limit

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號




Page: 13 of 36

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode:	Operation mode		Test Date:	Aug. 15, 2017	
Temperature:	20	Humidity:	Test By:	Louis	
				Phase:	L1 / N

Site Conduction Room Phase: Temperature: 20 % Limit: FCC Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 58 %

Mode: Operation Mode

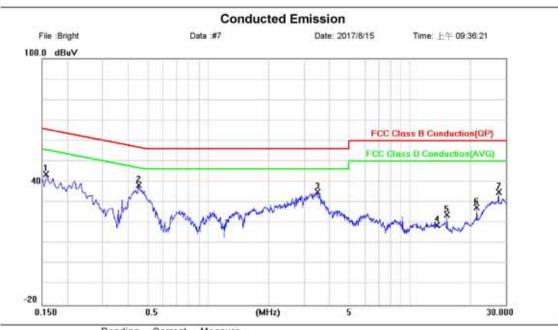

No.	Mk.	Freq.	Reading Level	Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1580	43.61	0.07	43.68	65.57	-21.89	peak	
2	•	0.4540	38.41	0.08	38.49	56.80	-18.31	peak	
3		3.5020	34.90	0.18	35.08	56.00	-20.92	peak	
4		13.5600	18.49	0.40	18.89	60.00	-41.11	peak	
5		15.3620	23.58	0.43	24.01	60.00	-35.99	peak	
6		21.5060	27.18	0.52	27.70	60.00	-32.30	peak	
7		27,6500	34.39	0.62	35.01	60.00	-24.99	peak	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, WuKungRoad, New Taipeilndustrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號



Page: 14 of 36

Temperature: Site Conduction Room Phase: N AC 120V/60Hz Humidity: 58 % Limit: FCC Class B Conduction(QP) Power:

Mode: Operation Mode

Conducted Emission Date: 2017/8/15 File :Bright Data #8 Time: 1:4-09:40:02 100.0 dBuV FCC Class B Conduction(QP) FCC Class B Conduction(AVG) With Whyman of My -20 30.000 0.150 (MHz)

Mk.	Freq.	Level	Factor	ment	Limit	Over			
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment	
	0.1900	45.41	0.07	45.48	64.04	-18.56	peak		
	0.2220	44.51	0.07	44.58	62.74	-18.16	peak		
•	0.4620	39.19	0.08	39.27	56.66	-17.39	peak		
	3.2180	36.55	0.17	36.72	56.00	-19.28	peak		
	5.7780	32.18	0.27	32.45	60.00	-27.55	peak		
	10.9420	27.37	0.36	27.73	60.00	-32.27	peak		
	13.5060	25.85	0.40	26.25	60.00	-33.75	peak		
	•	MHz 0.1900 0.2220 • 0.4620 3.2180 5.7780 10.9420	MHz dBuV 0.1900 45.41 0.2220 44.51 • 0.4620 39.19 3.2180 36.55 5.7780 32.18 10.9420 27.37	Mk. Freq. Level Factor MHz dBuV dB 0.1900 45.41 0.07 0.2220 44.51 0.07 0.4620 39.19 0.08 3.2180 36.55 0.17 5.7780 32.18 0.27 10.9420 27.37 0.36	Mk. Freq. Level Factor ment MHz dBuV d8 dBuV 0.1900 45.41 0.07 45.48 0.2220 44.51 0.07 44.58 0.4620 39.19 0.08 39.27 3.2180 36.55 0.17 36.72 5.7780 32.18 0.27 32.45 10.9420 27.37 0.36 27.73	Mk. Freq. Level Factor ment Limit MHz dBuV dB dBuV dBuV 0.1900 45.41 0.07 45.48 64.04 0.2220 44.51 0.07 44.58 62.74 * 0.4620 39.19 0.08 39.27 56.66 3.2180 36.55 0.17 36.72 56.00 5.7780 32.18 0.27 32.45 60.00 10.9420 27.37 0.36 27.73 60.00	Mk. Freq. Level Factor ment Limit Over MHz dBuV dB dBuV dBuV dB dB dBuV dB <	Mk. Freq. Level Factor ment Limit Over MHz dBuV dB dBuV dBuV dB Detector 0.1900 45.41 0.07 45.48 64.04 -18.56 peak 0.2220 44.51 0.07 44.58 62.74 -18.16 peak * 0.4620 39.19 0.08 39.27 56.66 -17.39 peak 3.2180 36.55 0.17 36.72 56.00 -19.28 peak 5.7780 32.18 0.27 32.45 60.00 -27.55 peak 10.9420 27.37 0.36 27.73 60.00 -32.27 peak	Mk. Freq. Level Factor ment Limit Over MHz dBuV dB dBuV dB UV dB Detector Comment 0.1900 45.41 0.07 45.48 64.04 -18.56 peak 0.2220 44.51 0.07 44.58 62.74 -18.16 peak * 0.4620 39.19 0.08 39.27 56.66 -17.39 peak 3.2180 36.55 0.17 36.72 56.00 -19.28 peak 5.7780 32.18 0.27 32.45 60.00 -27.55 peak 10.9420 27.37 0.36 27.73 60.00 -32.27 peak

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



Page: 15 of 36


RADIATED TEST ITEMS

7.1 Measurement Procedure


- 1. Configure the EUT according to ANSI C63.10.
- 2. The EUT was placed on a turn table which is 0.8m above ground plan.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission.
- 5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 7. Repeat above procedures until all default test channel measured were completed.

7.2 Test SET-UP

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

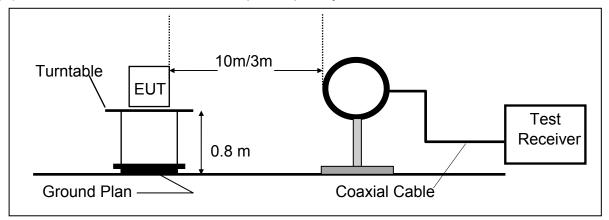

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

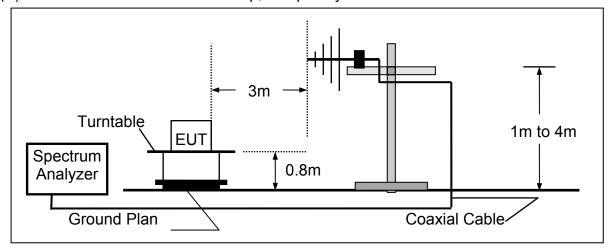

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

<mark>SGS Taiwan Ltd.</mark> No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



Page: 16 of 36

Measurement Equipment Used

	<u> </u>	SGS SAC-II	I		
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
EMI Test Receiver	R&S	ESCI7	100760	05/10/2016	05/09/2017
Spectrum Analyzer	Agilent	E4446A	MY51100003	01/29/2017	01/28/2018
Loop Antenna	ETS-Lindgren	6502	148045	09/20/2016	09/19/2017
Bilog Antenna	SCHWAZBECK	VULB9168	378	12/19/2016	12/18/2017
Horn Antenna	Schwarzbeck	BBHA9120D	1441	08/01/2016	07/31/2017
Pre-Amplifier	Agilent	8447D	2944A07676	01/05/2017	01/04/2018
Pre-Amplifier	Pre-Amplifier EMC Instruments Corp.		980038	01/05/2017	01/04/2018
Turn Table	HD	DT420	N/A	N.C.R	N.C.R
Antenna Tower	ChamPro	AM-BS-4500-B	060776-ABS	N.C.R	N.C.R
Controller	ChamPro	EM1000	60776	N.C.R	N.C.R
Low Loss Cable	Huber Suhner	966_RX	9	01/05/2017	01/04/2018
3m Site NSA	SGS	966 chamber	N/A	07/01/2016	06/30/2017
Low Loss Cable	Huber Suhner	966 TX	1	01/05/2017	01/04/2018
Horn Antenna	Schwarzbeck	BBHA9170	184	12/12/2016	12/11/2017
Pre-Amplifier	EMC Instruments Corp.	EMC184045	980135	01/05/2017	01/04/2018

Note: N.C.R refers to Not Calibrated Required.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client an information contained in release the Company's and the interest of the instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, WuKungRoad, NewTaipeiIndustrialPark, WukuDistrict, NewTaipeiCity, Taiwan24803/新北市五股區新北產業園區五工路134號



Page: 17 of 36

Open Area Test Site

	SGS Open Area Test Site No.1										
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.						
TYPE		NUMBER	NUMBER	CAL.							
EMI Test Receiver	R&S	ESCI 3	101342	12/21/2016	12/20/2017						
Pre Amplifier	EMC Instruments	EMC330	980122	06/09/2016	06/08/2017						
Broadband Antenna	TESEQ	CBL 6112D	23189	05/23/2016	05/22/2017						
Coaxial Cable	Huber+Suhner	RG 214	30m	06/22/2016	06/21/2017						
Turn Table	Chance Most	N/A	N/A	N.C.R.	N.C.R.						
Antenna Tower	Chance Most	N/A	N/A	N.C.R.	N.C.R.						
Controller	Chance Most	N/A	N/A	N.C.R.	N.C.R.						
Site NSA	SGS	OATS 1	N/A	06/13/2016	06/12/2017						
Test S/W	Farad	EZ-EMC	Ver. SGS-03A2	N.C.R.	N.C.R.						
Loop Antenna	ETS-Lindgren	6502	148045	09/20/2016	09/19/2017						

7.4 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	<u> </u>	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

The limit of the emission level is expressed in dBuV/m, which converts 20*log(uV/m) Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB) Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

Note:

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



Page: 18 of 36

7.5 Field Strength of Fundamental Emissions and Mask Measurement

7.5.1 Standard Applicable

I imit:

Rules and specifiactions	specifiactions CFR 47 Part 15 section 15.225(a)-(d)					
Frequency of Emission (MHz)	Field Strength (μV/m)at 30m	Field Strength (dBµV/m)at 30m	Field Strength (dBµV/m)at 3m			
1.705~13.110	30	29.5	69.5			
13.110~13.410	106	40.5	80.5			
13.410~13.553	334	50.5	90.47			
13.553~13.567	15848	84	123.9			
13.567~13.710	334	50.5	90.47			
13.710~14.010	106	40.5	80.5			
14.010~30.00	30	29.5	69.5			

Field strength of fundamental emissions limit:

The field strength of fundamental emissions shall not exceed 15848 micorvolts/meter at 30 meters. The Limit is converted to 124.00dBuV/m by offsetting the distance extrapolation factor as measurement distance is taken place at 3 meters.

30m to 3m

Distance extrapolation = 40 * log (30/3) = 40 dB

Limit is re-adjusted in terms of limit taken in 3m = 20 *log (15848 uV/m) + 40 = 124.00dBuV/m

30m to 10m

Distance extrapolation = 40 * log (30/10) = 19.08 dB

Limit is re-adjusted in terms of limit taken in 3m = 20 *log (15848 uV/m) + 19.08 = 103.08dBuV/m

10m to 3m

Distance extrapolation = 40 * log (10/3) = 20.92 dB

Limit is re-adjusted in terms of limit taken in 3m = 20 *log (15848 uV/m) + 20.92 = 104.92dBuV/m

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134, WuKungRoad, New TaipeiIndustrial Park, WukuDistrict, New TaipeiCity, Taiwan 24803/新北市五股區新北產業園區五工路134號



Page: 19 of 36

- 1. Emission level in dBuV/m=20 log (μV/m)
- 2. Distance extrapolation factor = 40 log (required distance/ test distance) (dB)
- 3. The lower limit shall apply at the transition frequencies.
- 4. The measurement was undertaken in closer distance below 30MHz at 10m and above 30MHz at 3m, where extrapolation factor is offset to convert the limit of the measurement.
- 5. KDB 414788 OATS and 3m semi-anechoic chamber Justification: Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. OATS and 3m SAC chamber testing had been performed and OATS measured test result is the worst case test result.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, WuKungRoad, New TaipeiIndustrial Park, WukuDistrict, New TaipeiCity, Taiwan 24803/新北市五股區新北產業園區五工路134號



Page: 20 of 36


7.5.2 Field Strength of Fundamental Emission Measurement Result OATS:

RFID Test Date: Operation Mode: 03/15/2017

Fundamental Frequency: 13.56 MHz Temp. / Humi.: 22 deg_C/69 RH

Operation Band: Main Test Engineer: Mike

EUT Pol.: H Plane Measurement Antenna Pol.: **VERTICAL**

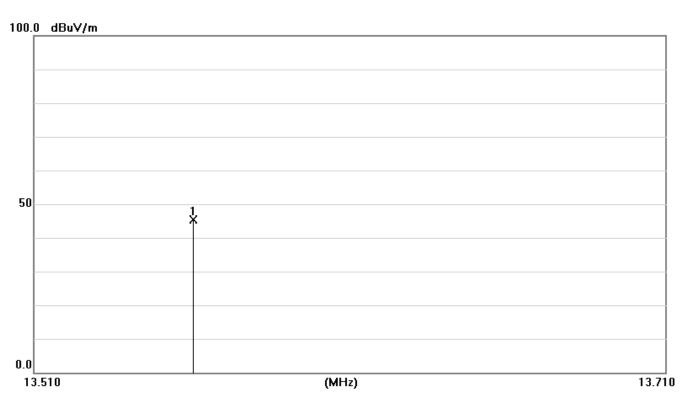

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	13.5600	33.18	12.20	45.38	103.08	-57.70	Peak

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

防非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留例天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



Page: 21 of 36

OATS:

Operation Mode: **RFID** Test Date: 03/15/2017

Fundamental Frequency: 13.56 MHz Temp. / Humi.: 22 deg_C/69 RH

Operation Band: Test Engineer: Main Mike

EUT Pol.: E2 Plane Measurement Antenna Pol.: **HORIZONTAL**

100.0 dBuV/m 50 0.0 13.510 (MHz) 13.710

	No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
		(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
Ī	1	13.5600	31.57	12.20	43.77	103.08	-59.31	Peak

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

防非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留例天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



Page: 22 of 36

7.5.3 Mask Measurement Result


OATS:

RFID Test Date: 03/15/2017 Operation Mode:

Fundamental Frequency: 13.56 MHz Temp. / Humi.: 22 deg_C/69 RH

Operation Band: Mask Test Engineer: Mike

EUT Pol.: H Plane Measurement Antenna Pol.: VERTICAL

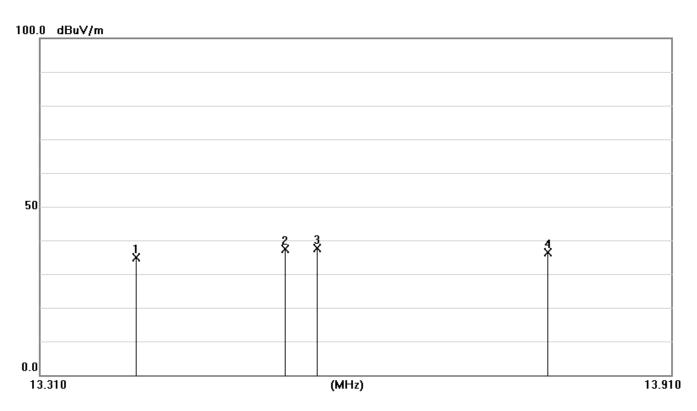

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	13.4000	22.66	12.20	34.86	59.58	-24.72	Peak
2	13.5400	25.14	12.20	37.34	69.58	-32.24	Peak
3	13.5700	25.46	12.20	37.66	69.58	-31.92	Peak
4	13.7900	24.10	12.20	36.30	59.58	-23.28	Peak

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

防非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留例天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



Page: 23 of 36


OATS:

Operation Mode: **RFID** Test Date: 03/15/2017

Fundamental Frequency: 13.56 MHz Temp. / Humi.: 22 deg_C/69 RH

Operation Band: Test Engineer: Mask Mike

EUT Pol.: H Plane Measurement Antenna Pol.: **HORIZONTAL**

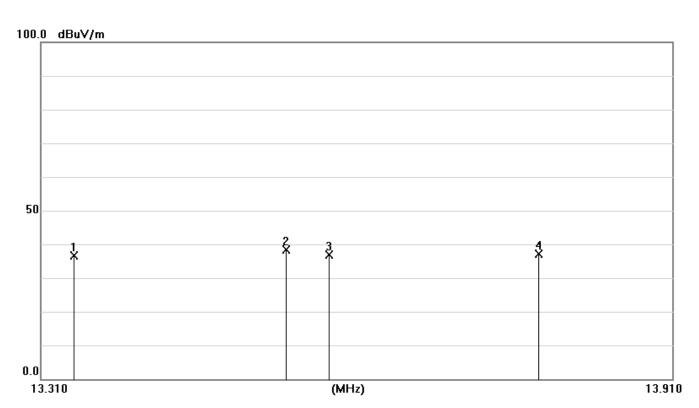

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	13.3400	24.51	12.20	36.71	59.58	-22.87	Peak
2	13.5400	26.25	12.20	38.45	69.58	-31.13	Peak
3	13.5800	24.61	12.20	36.81	69.58	-32.77	Peak
4	13.7800	24.91	12.20	37.11	59.58	-22.47	Peak

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

防非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留例天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

<mark>SGS Taiwan Ltd.</mark> No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



Page: 24 of 36

7.6 Radiated Emission Measurement

7.6.1 Standard Applicable

The field strength of any emission which appear outside of 13.553~13.567MHz Band shall not exceed the general radiated emissions limits.

Frequency (MHz)	Field strength (μV/m)	Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

- Emission level in dB_μV/m=20 log (μV/m)
- 2. Distance extrapolation factor = 40 log (required distance/ test distance) (dB)
- 3. The lower limit shall apply at the transition frequencies.
- 4. The measurement was undertaken in closer distance at 3m, where extrapolation factor is offset to convert the limit of the measurement.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, WuKungRoad, New TaipeiIndustrial Park, WukuDistrict, New TaipeiCity, Taiwan 24803/新北市五股區新北產業園區五工路134號



Page: 25 of 36


OATS:

Operation Mode: **RFID** Test Date: 03/15/2017

Fundamental Frequency: 13.56 MHz Temp. / Humi.: 22 deg_C/69 RH

Operation Band: Test Engineer: Tx CH MID Mike

EUT Pol.: H Plane Measurement Antenna Pol.: **VERTICAL**

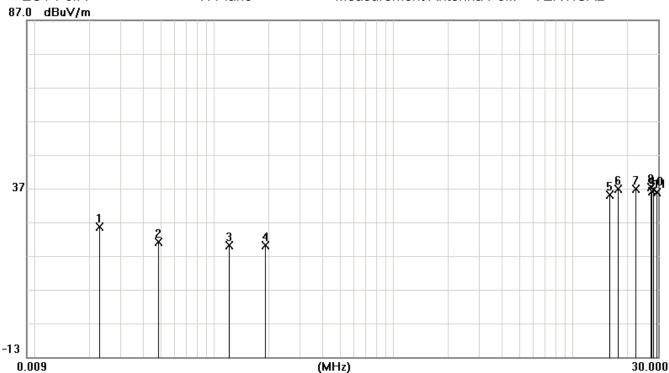

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	0.0227	9.84	15.77	25.61	99.56	-73.95	Peak
2	0.0486	8.49	12.62	21.11	92.95	-71.84	Peak
3	0.1197	8.30	11.87	20.17	85.12	-64.95	Peak
4	0.1931	8.48	11.76	20.24	80.97	-60.73	Peak
5	15.9600	22.86	12.20	35.06	48.62	-13.56	Peak
6	17.8800	24.68	12.20	36.88	48.62	-11.74	Peak
7	22.5700	25.31	11.68	36.99	48.62	-11.63	Peak
8	27.1000	26.58	10.78	37.36	48.62	-11.26	Peak
9	27.6600	25.41	10.66	36.07	48.62	-12.55	Peak
10	27.9000	26.11	10.62	36.73	48.62	-11.89	Peak
11	29.3200	25.54	10.34	35.88	48.62	-12.74	Peak

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

SGS Taiwan Ltd. No.134, WuKungRoad, New Taipeilndustrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號

防非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留例天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 26 of 36


OATS:

Operation Mode: **RFID** Test Date: 03/15/2017

Fundamental Frequency: 13.56 MHz Temp. / Humi.: 22 deg_C/69 RH

Operation Band: Test Engineer: Tx CH MID Mike

EUT Pol.: H Plane Measurement Antenna Pol.: **HORIZONTAL**

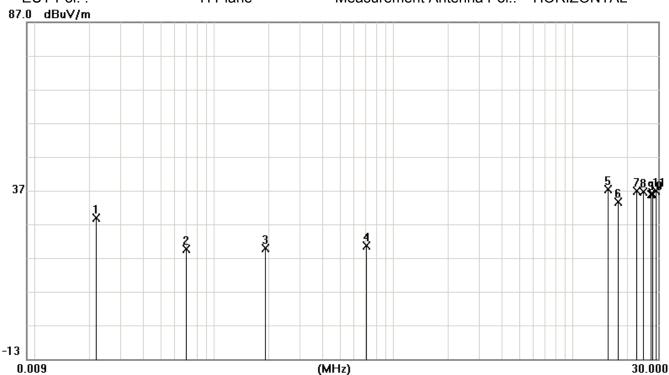

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	0.0218	12.84	15.96	28.80	99.91	-71.11	Peak
2	0.0694	7.38	12.27	19.65	89.86	-70.21	Peak
3	0.1916	8.22	11.76	19.98	81.04	-61.06	Peak
4	0.7072	8.90	11.62	20.52	49.69	-29.17	Peak
5	15.5900	25.10	12.20	37.30	48.62	-11.32	Peak
6	17.9600	21.33	12.20	33.53	48.62	-15.09	Peak
7	22.6600	25.18	11.66	36.84	48.62	-11.78	Peak
8	24.5600	25.30	11.29	36.59	48.62	-12.03	Peak
9	27.3400	25.10	10.74	35.84	48.62	-12.78	Peak
10	27.7400	25.31	10.65	35.96	48.62	-12.66	Peak
11	29.1300	26.41	10.37	36.78	48.62	-11.84	Peak

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

防非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留例天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, WuKungRoad, New Taipeilndustrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號




Page: 27 of 36

RFID Operation Mode: Test Date: 02/08/2017

Fundamental Frequency: 13.56 MHz Temp. / Humi.: 23.8 deg_C/59 RH

Operation Band: Tx Test Engineer: Kane

H Plane EUT Pol.: Measurement Antenna Pol.: VERTICAL

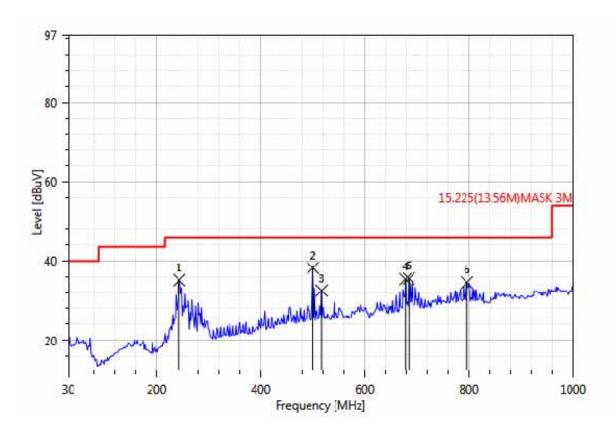

Freq.	Note	Decetor	Actual	Spectrum	Factor	Limit	Margin
		Mode	Reading Level	FS		@3m	
MHz	F/H/E/S	QP/AV/PK	dΒμV/m	dΒμV/m	dB	dBuV/m	dB
243.40	S	Peak	35.16	43.19	-8.03	46.00	-10.84
500.45	S	Peak	38.22	40.91	-2.69	46.00	-7.78
516.94	S	Peak	32.51	34.45	-1.94	46.00	-13.49
677.96	S	Peak	35.41	34.62	0.79	46.00	-10.59
684.75	S	Peak	35.55	34.27	1.29	46.00	-10.45
796.30	S	Peak	34.58	31.57	3.01	46.00	-11.42

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

防非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留例天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

<mark>SGS Taiwan Ltd.</mark> No.134,WuKungRoad,NewTaipeilndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號




Page: 28 of 36

RFID Operation Mode: Test Date: 02/08/2017

Fundamental Frequency: 13.56 MHz Temp. / Humi.: 23.8 deg_C/59 RH

Operation Band: Tx Test Engineer: Kane

H Plane EUT Pol.: Measurement Antenna Pol.: HORIZONTAL

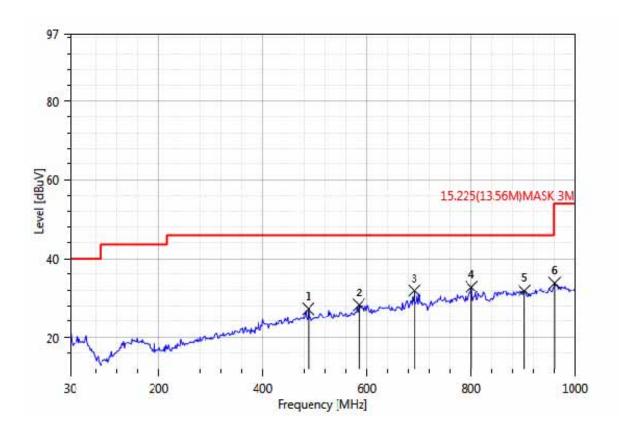

Freq.	Note	Decetor	Actual	Spectrum	Factor	Limit	Margin
		Mode	Reading Level	FS		@3m	
MHz	F/H/E/S	QP/AV/PK	dΒμV/m	dBµV/m	dB	dBuV/m	dB
487.84	S	Peak	27.25	29.60	-2.34	46.00	-18.75
584.84	S	Peak	28.23	28.29	-0.05	46.00	-17.77
691.54	S	Peak	31.85	30.39	1.47	46.00	-14.15
801.15	S	Peak	32.80	29.68	3.11	46.00	-13.20
903.00	S	Peak	31.87	27.07	4.81	46.00	-14.13
961.20	S	Peak	33.81	27.83	5.97	54.00	-20.19

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

防非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留例天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



Page: 29 of 36

FREQUENCY STABILITY

8.1 Standard Applicable

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Carrier frequency stability shall be maintained to ±0.01% (±100 ppm).


For licence-exempt radio apparatus, the frequency stability shall be measured at temperatures of -20°C (-4°F), +20°C (+68°F) and +50°C (+122°F).

8.2 Measurement Procedure

- 1. The EUT was placed inside temperature chamber and powered and powered by nominal DC voltage.
- 2. Set EUT as normal operation.
- 3. Turn the EUT on and couple its output to spectrum.
- 4. Turn the EUT off and set the chamber to the highest temperature specified.
- 5. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT and measure the operating frequency after 2, 5, and 10 minutes.
- 6. Repeat step with the temperature chamber set to the lowest temperature.
- 7. Set spectrum Center Frequency = fundamental frequency, RBW, VBW= 10 kHz, Span =100 kHz, Detector =Max hold, Mark peak.

8.3 Test SET-UP

Temperature Chamber

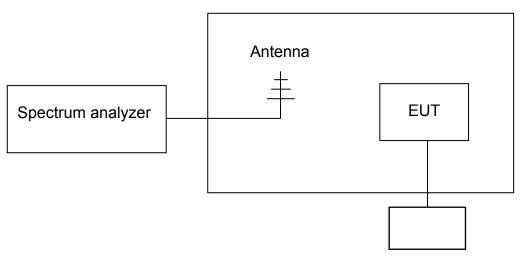

Variable AC Power Supply

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



Page: 30 of 36

Test Date: 07/13/2017

8.4 Measurement Equipment Used

	SGS Conducted Room								
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.				
TYPE		NUMBER	NUMBER	CAL.					
Power Meter	Anritsu	ML2495A	1005007	12/15/2016	12/14/2017				
Power Sensor	Anritsu	MA2411B	917032	12/15/2016	12/14/2017				
EXA Spectrum Analyzer	Agilent	N9030A	MY53120760	03/21/2017	03/20/2018				
DC Block	Mini-Circuits	BLK-18-S+	1	01/05/2017	01/04/2018				
Coaxial Cable	HUBER+SUHNER	SUCOFLEX 102	23670/2	01/05/2017	01/04/2018				
Attenuator	Mini-Circuit	BW-S10W2+	2	01/05/2017	01/04/2018				
Splitter	Agilent	11636B	N/A	01/05/2017	01/04/2018				
DC Power Supply	Agilent	E3640A	MY52410006	11/21/2016	11/20/2017				
Temperature Chamber	TERCHY	MHG-120LF	911009	05/19/2017	05/18/2018				

8.5 Measurement Results:

Startup:

A. Temperature Variation

Power Supply	Environment	Frequency		
Vdc	Temperature ()	(MHz)	Delta (Hz)	Limit (kHz)
3.8	-20	13.56017321	-173.21000	+/- 1.356
3.8	-10	13.56023219	-232.19000	+/- 1.356
3.8	0	13.56043131	-431.31000	+/- 1.356
3.8	10	13.56057192	-571.92000	+/- 1.356
3.8	20	13.56	0.00000	+/- 1.356
3.8	30	13.56033651	-336.51000	+/- 1.356
3.8	40	13.56021692	-216.92000	+/- 1.356
3.8	50	13.56031431	-314.31000	+/- 1.356

B. Supply Voltage Variation

Power Supply	Environment	Frequency		
Vdc	Temperature ()	(MHz)	Delta (Hz)	Limit (kHz)
3.6	20	13.56027934	-279.34100	+/- 1.356
3.8	20	13.56	0.00000	+/- 1.356
4	20	13.56033984	-339.84100	+/- 1.356

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



Page: 31 of 36

2 minutes:

A. Temperature Variation

Power Supply	Environment	Frequency		
Vdc	Temperature ()	(MHz)	Delta (Hz)	Limit (KHz)
3.8	-20	13.56016521	-165.21000	+/- 1.356
3.8	-10	13.56017521	-175.21000	+/- 1.356
3.8	0	13.56016821	-168.21000	+/- 1.356
3.8	10	13.56016821	-168.21000	+/- 1.356
3.8	20	13.56	0.00000	+/- 1.356
3.8	30	13.56016521	-165.21000	+/- 1.356
3.8	40	13.56016921	-169.21000	+/- 1.356
3.8	50	13.56016321	-163.21000	+/- 1.356

B. Supply Voltage Variation

Power Supply	Environment	Frequency		
Vdc	Temperature ()	(MHz)	Delta (Hz)	Limit (KHz)
4.2	20	13.56028934	-289.34100	+/- 1.356
3.8	20	13.56	0.00000	+/- 1.356
3.2	20	13.56034684	-346.84100	+/- 1.356

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client an information contained in release the Company's and the interest of the instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, WuKungRoad, NewTaipeiIndustrialPark, WukuDistrict, NewTaipeiCity, Taiwan24803/新北市五股區新北產業園區五工路134號



Page: 32 of 36

5 minutes:

A. Temperature Variation

Power Supply	Environment	Frequency		
Vdc	Temperature ()	(MHz)	Delta (Hz)	Limit (KHz)
3.8	-20	13.56017221	-172.21000	+/- 1.356
3.8	-10	13.56017021	-170.21000	+/- 1.356
3.8	0	13.56017221	-172.21000	+/- 1.356
3.8	10	13.56017021	-170.21000	+/- 1.356
3.8	20	13.56	0.00000	+/- 1.356
3.8	30	13.56018321	-183.21000	+/- 1.356
3.8	40	13.56017921	-179.21000	+/- 1.356
3.8	50	13.56017521	-175.21000	+/- 1.356

B. Supply Voltage Variation

Power Supply	Environment	Frequency		
Vdc	Temperature ()	(MHz)	Delta (Hz)	Limit (KHz)
4.2	20	13.56027434	-274.34100	+/- 1.356
3.8	20	13.56	0.00000	+/- 1.356
3.2	20	13.56034184	-341.84100	+/- 1.356

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client an information contained in release the Company's and the interest of the instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, WuKungRoad, NewTaipeiIndustrialPark, WukuDistrict, NewTaipeiCity, Taiwan24803/新北市五股區新北產業園區五工路134號



Page: 33 of 36

10 minutes:

A. Temperature Variation

Power Supply	Environment	Frequency			
Vdc	Temperature ()	(MHz)	Delta (Hz)	Limit (KHz)	
3.8	-20	13.56018021	-180.21000	+/- 1.356	
3.8	-10	13.56016721	-167.21000	+/- 1.356	
3.8	0	13.56017421	-174.21000	+/- 1.356	
3.8	10	13.56017121	-171.21000	+/- 1.356	
3.8	20	13.56	0.00000	+/- 1.356	
3.8	30	13.56017321	-173.21000	+/- 1.356	
3.8	40	13.56017821	-178.21000	+/- 1.356	
3.8	50	13.56017621	-176.21000	+/- 1.356	

B. Supply Voltage Variation

Power Supply	Environment	Frequency			
Vdc	Temperature ()	(MHz)	Delta (Hz)	Limit (KHz)	
4.2	20	13.56028334	-283.34100	+/- 1.356	
3.8	20	13.56	0.00000	+/- 1.356	
3.2	20	13.56034684	-346.84100	+/- 1.356	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client an information contained in release the Company's and the interest of the instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, WuKungRoad, NewTaipeiIndustrialPark, WukuDistrict, NewTaipeiCity, Taiwan24803/新北市五股區新北產業園區五工路134號

f (886-2) 2298-0488 www.tw.sgs.com



Page: 34 of 36

20 dB OCCUPIED BANDWIDTH MEASUREMENT

9.1 Standard Applicable:

The 20 dB bandwidth shall be specified in operating frequency band.

9.2 Limit:

None

Test Set-up 9.3



9.4 Measurement Procedure

- 1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak mode.
- 2. 20dB & 99% Bandwidth the resolution bandwidth of 1 kHz and the video bandwidth of 3 kHz were used.
- 3. Measured the spectrum width with power higher than 20dB below carrier.
- 4. Because the measured signal is CW adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW and the result will be approximately twice the RBW.

9.5 Measurement Equipment Used

SGS Conducted Room								
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.			
TYPE		NUMBER	NUMBER	CAL.				
Power Meter	Anritsu	ML2495A	1005007	12/15/2016	12/14/2017			
Power Sensor	Anritsu	MA2411B	917032	12/15/2016	12/14/2017			
EXA Spectrum Analyzer	Agilent	N9030A	MY53120760	02/26/2016	02/25/2017			
DC Block	Mini-Circuits	BLK-18-S+	1	01/05/2017	01/04/2018			
Coaxial Cable	HUBER+SUHNER	SUCOFLEX 102	23670/2	01/05/2017	01/04/2018			
Attenuator	Mini-Circuit	BW-S10W2+	2	01/05/2017	01/04/2018			
Splitter	Agilent	11636B	N/A	01/05/2017	01/04/2018			
DC Power Supply	Agilent	E3640A	MY52410006	11/21/2016	11/20/2017			
Temperature Chamber	TERCHY	MHG-120LF	911009	05/17/2016	05/16/2017			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



Page: 35 of 36

Measurement Result

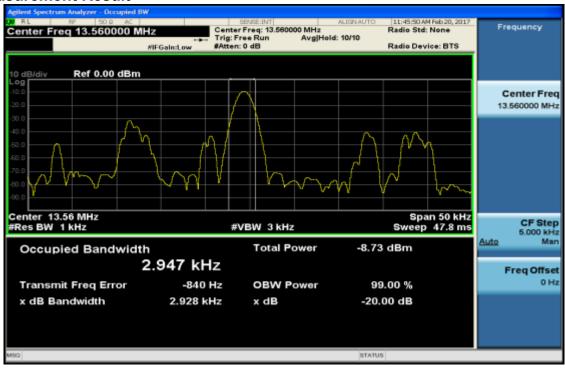

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

防非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留例天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, WuKungRoad, New Taipeilndustrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號



Page: 36 of 36

10 ANTENNA REQUIREMENT

10.1. Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer.

For transmitters of RF output power of 10 milliwatts or less, only the portion of the antenna gain that is in excess of 6 dBi (6 dB above isotropic gain) shall be added to the measured RF output power to demonstrate compliance with the radiated power limits specified in the applicable standard. For transmitters of output power greater than 10 milliwatts, the total antenna gain shall be added to the measured RF output power to demonstrate compliance to the specified radiated power limits.

10.2. Antenna Connected Construction

An embedded-in antenna design is used.

The antenna is designed as permanently attached and no consideration of replacement. Please see EUT photo and antenna spec. for details.

The antenna gain is less than 6dBi. Therefore, it is not necessary to reduce maximum output power limit.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號