



# RF EXPOSURE REPORT

Product Name: TPMS Relearn Tool  
FCC ID: 2A5A7-S508  
Trademark: OBDResource  
Model Number: Super EL50448, EL50448, EL50449, Super EL50448 Ultra, U508, T508  
Prepared For: OBDResource Electronics Co.,Ltd  
Address: RM17A Unit4 Building2, JindiMeilongzhen, Meilong Rd, Longhua District, Shenzhen, China  
Manufacturer: OBDResource Electronics Co.,Ltd  
Address: RM17A Unit4 Building2, JindiMeilongzhen, Meilong Rd, Longhua District, Shenzhen, China  
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.  
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China  
Sample Received Date: Apr. 02, 2025  
Sample tested Date: Apr. 02, 2025 to Apr. 17, 2025  
Issue Date: Apr. 17, 2025  
Report No.: CTB25040206401RF02  
Test Standards: FCC CFR 47 part1, 1.1307(b), 1.1310, 47 CFR§2.1091; KDB 680106 D01 Wireless Power Transfer v04  
Test Results: PASS  
Remark: This is 125K EMF report.

Compiled by:

Reviewed by:

Approved by:

Zhou kui

Arron Liu

Bin Mei

Zhou Kui

Arron Liu

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "\*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

Table of Contents	Page
1 . GENERAL INFORMATION	3
1.1 . Test Supporting System	3
2 .LIST OF TEST AND MEASUREMENT INSTRUMENTS	4
2.1 . For conducted emission at the mains terminals test	4
3. METHOD OF MEASUREMENT	5
3. 1.Applicable Standard	5
4. TEST RESULT	6
4.1. Conducted Emission at the Mains Terminals Test	6
4.2. E and H field Strength	7

## 1. GENERAL INFORMATION

### 1.1. Test Supporting System

#### Adapter

Description: Adapter

Model No. : HP18A-0902000-AU

Power Input: AC100-240V~ 1.0A 50/60Hz

Output: 9V  $\overline{\text{---}}$  2.0A

DC Line: Unshielded, Detachable 1.2m



## 2.LIST OF TEST AND MEASUREMENT INSTRUMENTS

### 2.1. For conducted emission at the mains terminals test

Item	Equipment	Brand	Model No.	Frequency Range	Last calibration	Calibrated until
1	EMF TESTER	Wavecontrol	SMP600/WP40 0-3	15SN0164/21W P1200029	2024.10.28	2025.10.27


### 3. METHOD OF MEASUREMENT

#### 3. 1.Applicable Standard

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines. According to §1.1310 and §2.1091 RF exposure is calculated. According to KDB 680106 D01 Wireless Power Transfer v04.

## 4. TEST RESULT

### 4.1. Conducted Emission at the Mains Terminals Test

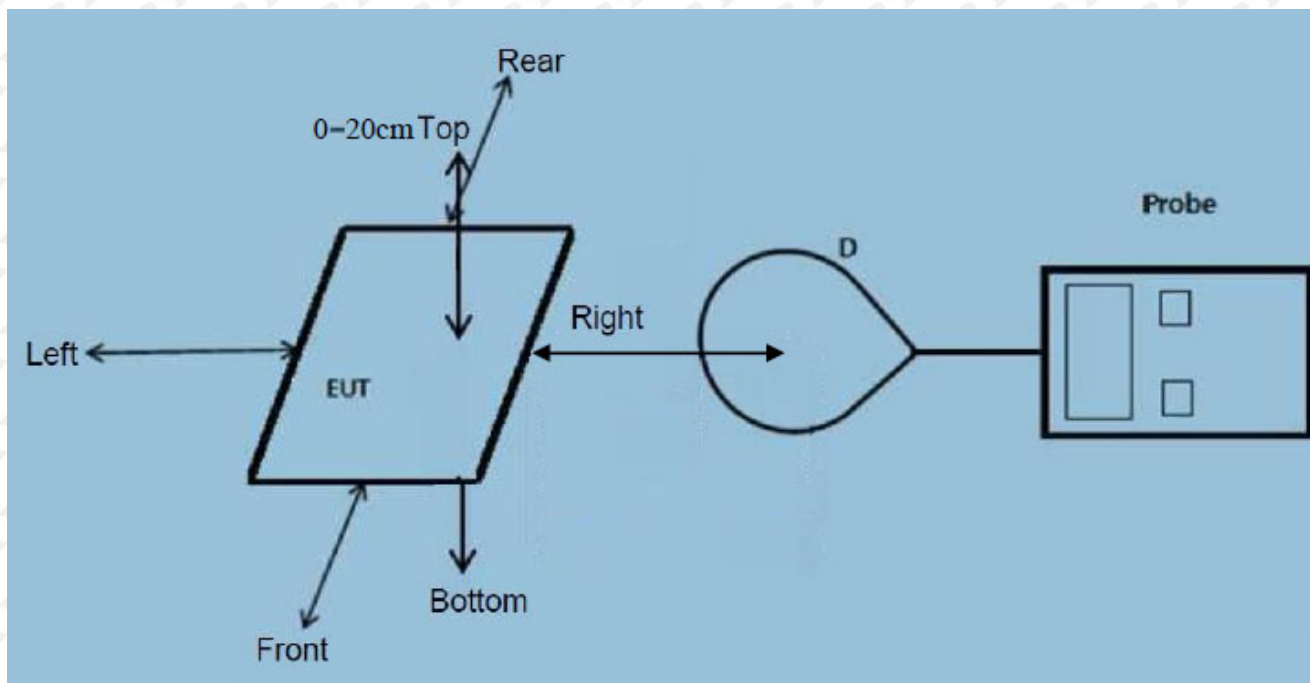

Note: Measurements should be made from all sides and the top of the primary/client pair, with the 20 cm-0cm measured from the center of the top, and 20cm-0cm measured from the center of the rest

#### Test Procedure:

- The RF exposure test was performed on 360 degree turn table in anechoic chamber.
- 20 cm-0cm measured from the center of the top, and 20cm-0cm measured from the center of the rest sides.
- The turn table was rotated 360d degree to search of highest strength.
- The highest emission level was recorded and compared with limit as soon as measurement of each points were completed.
- The EUT were measured according to the dictates of KDB 680106 D01 Wireless Power Transfer v04.



## 4.2. E and H field Strength

H-Filed Strength at 20 cm from the edges surrounding the EUT (A/m)

Frequency Range (KHz)	Test Position A	Test Position B	Test Position C	Test Position D	Limits (A/m)
125KHz	0.20	0.18	0.19	0.16	1.63

H-Filed Strength at 20 cm from the top of the EUT (A/m)

Frequency Range (KHz)	Test Position E	Limits (A/m)
125KHz	0.20	1.63

H-Filed Strength at 18 cm from the edges surrounding the EUT (A/m)

Frequency Range (KHz)	Test Position A	Test Position B	Test Position C	Test Position D	Limits (A/m)
125KHz	0.24	0.25	0.22	0.22	1.63

H-Filed Strength at 18 cm from the top of the EUT (A/m)

Frequency Range (KHz)	Test Position E	Limits (A/m)
125KHz	0.25	1.63

H-Filed Strength at 16 cm from the edges surrounding the EUT (A/m)

Frequency Range (KHz)	Test Position A	Test Position B	Test Position C	Test Position D	Limits (A/m)
125KHz	0.26	0.27	0.28	0.28	1.63

H-Filed Strength at 16 cm from the top of the EUT (A/m)

Frequency Range (KHz)	Test Position E	Limits (A/m)
125KHz	0.28	1.63

## H-Filed Strength at 14 cm from the edges surrounding the EUT (A/m)

Frequency Range (KHz)	Test Position A	Test Position B	Test Position C	Test Position D	Limits (A/m)
125KHz	0.33	0.31	0.35	0.33	1.63

## H-Filed Strength at 14 cm from the top of the EUT (A/m)

Frequency Range (KHz)	Test Position E	Limits (A/m)
125KHz	0.35	1.63

## H-Filed Strength at 12 cm from the edges surrounding the EUT (A/m)

Frequency Range (KHz)	Test Position A	Test Position B	Test Position C	Test Position D	Limits (A/m)
125KHz	0.34	0.39	0.36	0.38	1.63

## H-Filed Strength at 12 cm from the top of the EUT (A/m)

Frequency Range (KHz)	Test Position E	Limits (A/m)
125KHz	0.39	1.63

## H-Filed Strength at 10 cm from the edges surrounding the EUT (A/m)

Frequency Range (KHz)	Test Position A	Test Position B	Test Position C	Test Position D	Limits (A/m)
125KHz	0.45	0.43	0.46	0.49	1.63

## H-Filed Strength at 10 cm from the top of the EUT (A/m)

Frequency Range (KHz)	Test Position E	Limits (A/m)
125KHz	0.49	1.63



## H-Filed Strength at 8 cm from the edges surrounding the EUT (A/m)

Frequency Range (KHz)	Test Position A	Test Position B	Test Position C	Test Position D	Limits (A/m)
125KHz	0.54	0.56	0.57	0.52	1.63

## H-Filed Strength at 8 cm from the top of the EUT (A/m)

Frequency Range (KHz)	Test Position E	Limits (A/m)
125KHz	0.57	1.63

## H-Filed Strength at 6 cm from the edges surrounding the EUT (A/m)

Frequency Range (KHz)	Test Position A	Test Position B	Test Position C	Test Position D	Limits (A/m)
125KHz	0.65	0.62	0.60	0.64	1.63

## H-Filed Strength at 6 cm from the top of the EUT (A/m)

Frequency Range (KHz)	Test Position E	Limits (A/m)
125KHz	0.65	1.63

## H-Filed Strength at 4 cm from the edges surrounding the EUT (A/m)

Frequency Range (KHz)	Test Position A	Test Position B	Test Position C	Test Position D	Limits (A/m)
125KHz	0.66	0.68	0.71	0.67	1.63

## H-Filed Strength at 4 cm from the top of the EUT (A/m)

Frequency Range (KHz)	Test Position E	Limits (A/m)
125KHz	0.71	1.63

H-Filed Strength at 2 cm from the edges surrounding the EUT (A/m)

Frequency Range (KHz)	Test Position A	Test Position B	Test Position C	Test Position D	Limits (A/m)
125KHz	0.78	0.79	0.73	0.74	1.63

H-Filed Strength at 2 cm from the top of the EUT (A/m)

Frequency Range (KHz)	Test Position E	Limits (A/m)
125KHz	0.79	1.63

The probe center is 1.65cm from the coil surface, according to KDB 680106, data at 0cm must be estimated through a model, and then the model must be validated with the actual measurements at 2cm.

Using Biot-Savart Law, the value of 2cm can be estimated through the test result of 4cm

H-Filed Strength at 2 cm from the edges surrounding the EUT (A/m)

Frequency Range (KHz)	Test Position A	Test Position B	Test Position C	Test Position D	Limits (A/m)
125KHz	0.71	0.78	0.72	0.70	1.63

H-Filed Strength at 2 cm from the top of the EUT (A/m)

Frequency Range (KHz)	Test Position E	Limits (A/m)
125KHz	0.76	1.63

Using Biot-Savart Law, the value of 0cm can be estimated through the test result of 2cm

H-Filed Strength at 0 cm from the edges surrounding the EUT (A/m)

Frequency Range (KHz)	Test Position A	Test Position B	Test Position C	Test Position D	Limits (A/m)
125KHz	0.85	0.84	0.82	0.86	1.63

H-Filed Strength at 0 cm from the top of the EUT (A/m)

Frequency Range (KHz)	Test Position E	Limits (A/m)
125KHz	0.86	1.63

The difference between measurements and estimates is no more than 30%

So the estimates in 0cm is ok

※※※※THE END※※※※