



Product	Smart Display		
Test Item	Power Density		
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230		
Date of Test	2021/05/20	Test Site	SR12-H
Temperature (°C)	24.0	Humidity (%RH)	56.0

IEEE 802.11n(40M)(ANT 0+1)				
Channel No.	Frequency (MHz)	Measure Level (dBm/10kHz)	Limit (dBm/3kHz)	Result
3	2422	-17.070	≤ 8	Pass
6	2437	-13.900	≤ 8	Pass
9	2452	-15.750	≤ 8	Pass


Channel 3 (2422MHz)

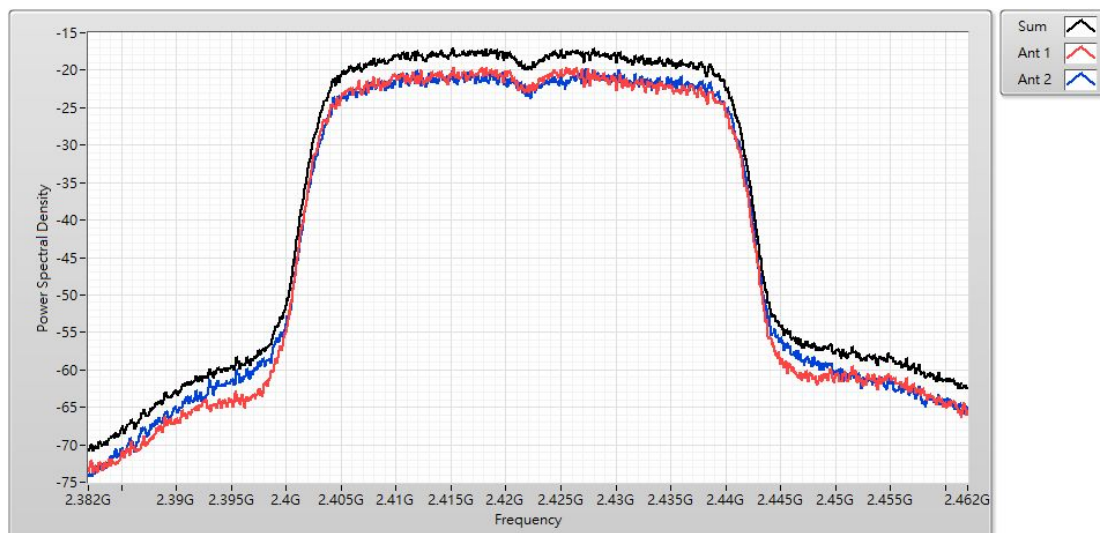

Channel 6 (2437MHz)

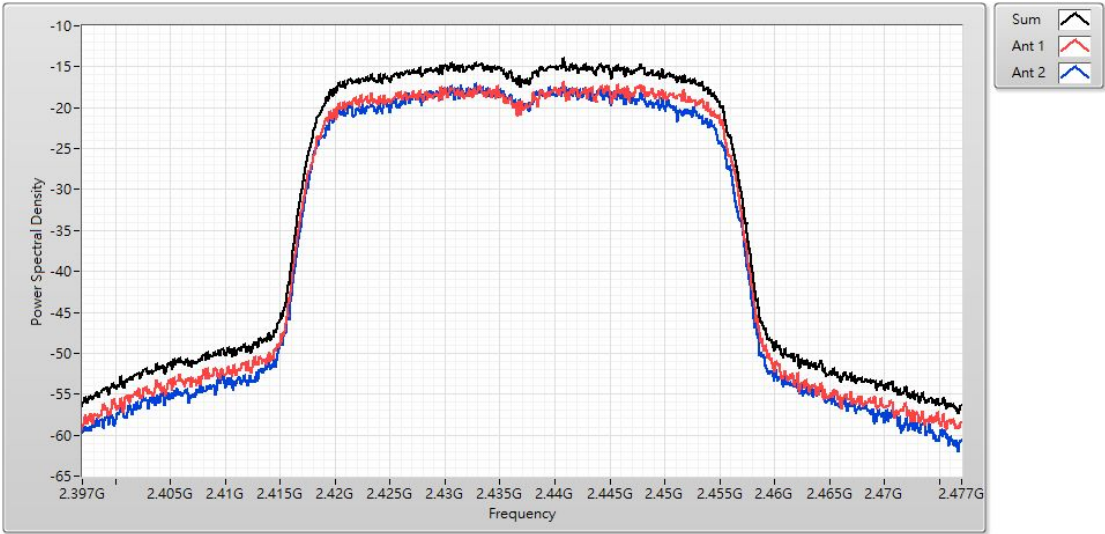

Channel 9 (2452MHz)

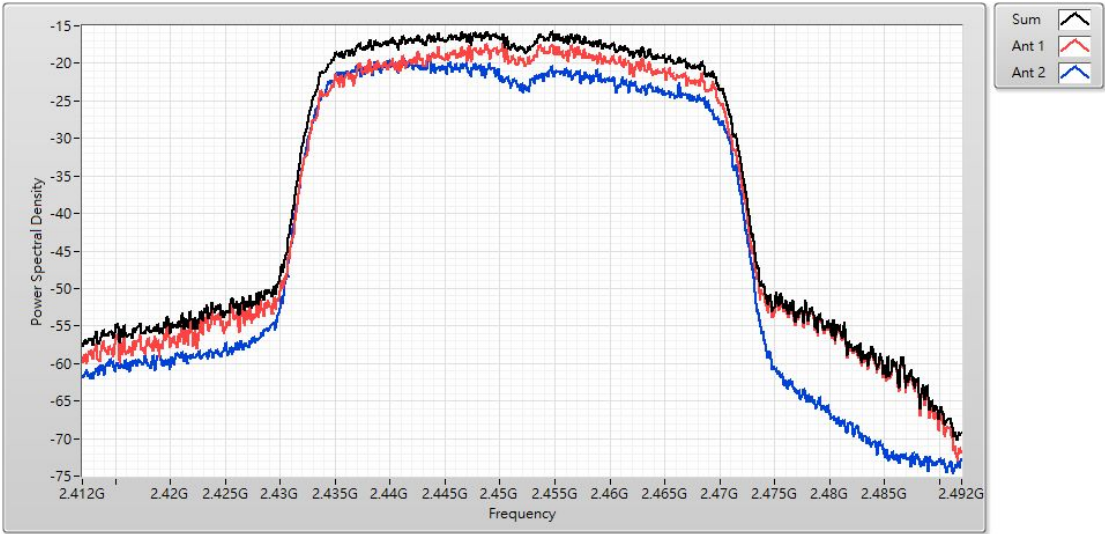

Attachment 2

➤ Radiated Emission Co-location