

FCC Test Report

Report No.: AGC12845220803FE03

FCC ID : 2A2LL-AT2

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: FJDynamics AT2 Auto Steer System

BRAND NAME : FJDynamics

MODEL NAME : AT2

APPLICANT: FJ Dynamics Co., Ltd.

DATE OF ISSUE : Sep. 27, 2022

STANDARD(S) : FCC Part 15.247

REPORT VERSION: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd





Page 2 of 41

REPORT REVISE RECORD


Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Sep. 27, 2022	Valid	Initial Release



TABLE OF CONTENTS


1. GENERAL INFORMATION	5
2. PRODUCT INFORMATION	6
2.1 PRODUCT TECHNICAL DESCRIPTION	6
2.2 TEST FREQUENCY LIST	6
2.3 RELATED SUBMITTAL(S) / GRANT (S)	7
2.4 TEST METHODOLOGY	7
2.5 SPECIAL ACCESSORIES	7
2.6 EQUIPMENT MODIFICATIONS	7
2.7 ANTENNA REQUIREMENT	7
3. TEST ENVIRONMENT	8
3.1 ADDRESS OF THE TEST LABORATORY	8
3.2 TEST FACILITY	8
3.3 ENVIRONMENTAL CONDITIONS	9
3.4 MEASUREMENT UNCERTAINTY	9
3.5 LIST OF EQUIPMENTS USED	10
4.SYSTEM TEST CONFIGURATION	11
4.1 EUT CONFIGURATION	11
4.2 EUT EXERCISE	11
4.3 CONFIGURATION OF TESTED SYSTEM	11
4.4 EQUIPMENT USED IN TESTED SYSTEM	11
4.5 SUMMARY OF TEST RESULTS	12
5. DESCRIPTION OF TEST MODES	13
6. RF OUTPUT POWER	14
6.1 MEASUREMENT PROCEDURE	14
6.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	14
6.3 MEASUREMENT RESULT	15
7. 6 DB BANDWIDTH	17
7.1 MEASUREMENT PROCEDURE	17
7.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	17
7.3 MEASUREMENT RESULTS	18
8. POWER SPECTRAL DENSITY	20
8.1 MEASUREMENT PROCEDURE	20
8.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	20
8.3 MEASUREMENT RESULTS	21
9. CONDUCTED SPURIOUS EMISSION. report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection"	23

Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.





9.1 MEASUREMENT LIMIT	23
9.2 MEASUREMENT PROCEDURE	23
9.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	23
9.4 MEASUREMENT RESULTS	24
10. RADIATED EMISSION	27
10.1 LIMITS OF RADIATED EMISSION TEST	27
10.2 MEASUREMENT PROCEDURE	27
10.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	29
10.4 MEASUREMENT RESULT	30
11. AC POWER LINE CONDUCTED EMISSION TEST	39
11.1 LIMITS OF LINE CONDUCTED EMISSION TEST	39
11.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	39
11.3 PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	40
11.4 FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	40
11.5 MEASUREMENT RESULTS	40
APPENDIX I: PHOTOGRAPHS OF TEST SETUP	41
APPENDIX II: PHOTOGRAPHS OF TEST EUT	41






1. GENERAL INFORMATION

Applicant	FJ Dynamics Co., Ltd.
Address	1709, WeiXing Building 61 GaoXin South 9th Rd, Nanshan District, Shenzhen, China
Manufacturer	FJ Dynamics Co., Ltd.
Address	4F, Building 2, Nangang No.2 Industrial Park, No.1026, Songbai Road, Xili Street, Nanshan District, Shenzhen, China
Factory	FJ Dynamics Co., Ltd.
Address	4F, Building 2, Nangang No.2 Industrial Park, No.1026, Songbai Road, Xili Street, Nanshan District, Shenzhen, China
Product Designation	FJDynamics AT2 Auto Steer System
Brand Name	FJDynamics
Test Model	AT2
Deviation from Standard	No any deviation from the test method
Date of Receipt	Aug. 12, 2022
Date of Test	Aug. 12, 2022-Sep. 17, 2022
Test Result	Pass
Test Report Form No	AGCTR-ER-FCC-LoRaV1.0

Prepared By	Alan Duan	
	Alan Duan (Project Engineer)	Sep. 17, 2022
Reviewed By	Calin Lin	
	Calvin Liu (Reviewer)	Sep. 17, 2022
Approved By	Max Zhang	
	Max Zhang (Authorized Officer)	Sep. 17, 2022





2. PRODUCT INFORMATION

2.1 PRODUCT TECHNICAL DESCRIPTION

Equipment Type	Lora WAN
Hardware Version	V 1.1
Software Version	V 1.1
Frequency Band	902MHz-928MHz
Operation Frequency Range	903MHz-927MHz
Modulation Type	GFSK
Number of channels	60 Channels
Support bandwidth	500 KHz
Maximum Transmitter Power	25.939dBm
Antenna Designation	Monopole Antenna
Antenna Gain	2.15dBi
Power Supply	DC 9V-36V by battery
Adapter Information	N/A

Note: The product is a custom Lora protocol.

2.2 TEST FREQUENCY LIST

Frequency Band	Channel Number	Frequency		
	0	903.0 MHz		
	1	903.4 MHz		
	2	903.8 MHz		
		:		
000 007 4MH-	31	915.0 MHz		
903~927.4MHz	32	915.4 MHz		
		:		
	61	926.2 MHz		
	62	926.6 MHz		
	63	927.0 MHz		
Note: $f = 903.0 + 0.4*k$ MHz, $k = 0,, 60$; (f is the operating frequency (MHz); k is the operating channel.)				



Page 7 of 41

2.3 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID**: **2A2LL-AT2**, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.4 TEST METHODOLOGY

The tests were performed according to following standards:

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules

2.5 SPECIAL ACCESSORIES

Not available for this EUT intended for grant.

2.6 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2.7 ANTENNA REQUIREMENT

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antennathat uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a brokenantenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmittingantennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

EUT Antenna:

The SMA-detachable antenna inside the device cannot be replaced by the user at will, and the antenna port has the uniqueness of RF performance. The gain of the antenna is 2.15 dBi.



Page 8 of 41

3. TEST ENVIRONMENT

3.1 ADDRESS OF THE TEST LABORATORY

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 9 of 41

3.3 ENVIRONMENTAL CONDITIONS

	NORMAL CONDITIONS	EXTREME CONDITIONS		
Temperature range (°C)	15 - 35	-20 - 50		
Relative humidty range	20 % - 75 %	20 % - 75 %		
Pressure range (kPa)	86 - 106	86 - 106		
Power supply DC 12V DC 12V				
Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer.				

3.4 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 3.1 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 4.0 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.8 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	U _c = ±2 %
Uncertainty of Occupied Channel Bandwidth	U _c = ±2 %



Page 10 of 41

3.5 LIST OF EQUIPMENTS USED

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Mar. 28, 2022	Mar. 27, 2023
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Nov. 17, 2021	Nov. 16, 2022
2.4GHz Fliter	Micro-tronics	087	N/A	Mar. 23, 2022	Mar. 22, 2024
Attenuator	Weinachel Corp	58-30-33	N/A	Sep. 03, 2020	Sep. 02, 2022
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Oct. 31, 2021	Oct. 30, 2023
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	00034609	Mar. 12, 2022	Mar. 11, 2024
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Apr. 23, 2021	Apr. 22, 2023
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Sep. 03, 2020	Sep. 02, 2022
ANTENNA	SCHWARZBECK	VULB9168	D69250	Jan. 08, 2021	Jan. 07, 2023
Test software	Tonscend	JS32-RE (Ver.2.5)	N/A	N/A	N/A



Page 11 of 41

4.SYSTEM TEST CONFIGURATION

4.1 EUT CONFIGURATION


The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT EXERCISE

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 CONFIGURATION OF TESTED SYSTEM

Conducted Emission Configure:



4.4 EQUIPMENT USED IN TESTED SYSTEM

The Following Peripheral Devices And Interface Cables Were Connected During The Measurement:

☐ Test Accessories Come From The Laboratory

Item	Equipment	Model No.	Identifier	Note
1	Battery			Accessories

☐ Test Accessories Come From The Manufacturer


Item	Equipment	Model No.	Identifier	Note
1	FJDynamics AT2 Auto	AT2	2A2LL-AT2	EUT



Page 12 of 41

4.5 SUMMARY OF TEST RESULTS

Item	FCC Rules	Description Of Test	Result
1	§15.203&15.247(b)(4)	Antenna Equipment	Pass
2	§15.247 (b)(1)	Peak Output Power	Pass
3	§15.247 (a)(1)	6 dB Bandwidth	Pass
4	§15.247 (e)	Power Spectral Density	Pass
4	§15.247 (d)	Conducted Spurious Emission	N/A
5	§15.209	Radiated Emission& Band Edge	Pass
6	§15.207	AC Power Line Conducted Emission	N/A






5. DESCRIPTION OF TEST MODES

Summary table of Test Cases						
	Equipment Specifications / Modulation					
Test Item	Lora WAN – GFSK					
Radiated&Conducted Test Cases	Mode 1: Lora WAN Tx CH00_903.0 MHz Mode 2: Lora WAN Tx CH31_915.0 MHz Mode 3: Lora WAN Tx CH63_927.0 MHz					

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. The battery is full-charged during the test.
- 3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 4. For Conducted Test method, a temporary antenna connector is provided by the manufacture.

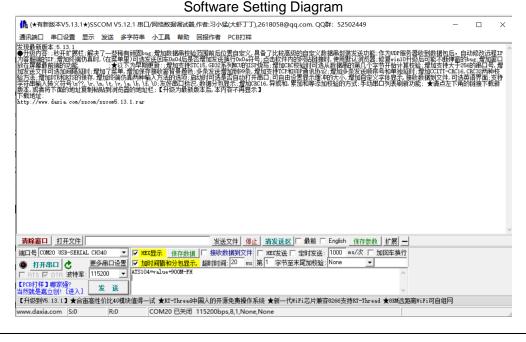



Page 14 of 41

6. RF OUTPUT POWER


6.1 MEASUREMENT PROCEDURE


For peak power test:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. RBW ≥ DTS bandwidth
- 3. VBW≥3*RBW.
- 4. SPAN≥VBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.

Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

6.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

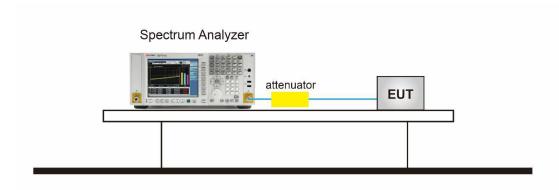






6.3 MEASUREMENT RESULT


Test Data of Conducted Output Power							
Test Mode Test Channel Peak Power Limits (MHz) (dBm) Pass or Fa							
	903.0	25.081	≤30	Pass			
LoRa 500K BW	915.0	25.066	≤30	Pass			
	927.0	25.939	≤30	Pass			

Test Graphs of Conducted Output Power Keysight Spectrum Analyzer - Swept SA Avg Type: Log-Pwr Avg|Hold:>100/100

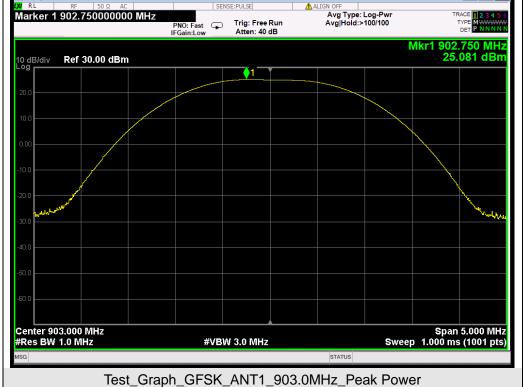

Span 5.000 MHz Sweep 1.000 ms (1001 pts)



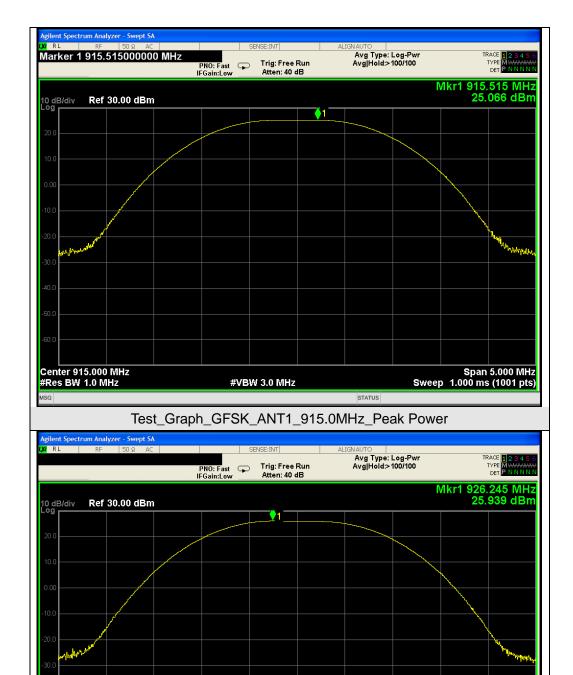

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

#VBW 3.0 MHz

Test_Graph_GFSK_ANT1_927.0MHz_Peak Power

STATUS

Center 927.000 MHz #Res BW 1.0 MHz

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/




Page 17 of 41


7. 6 DB BANDWIDTH

7.1 MEASUREMENT PROCEDURE

- 1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
- 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
- 5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) ≥ 3 * RBW.
- 6. Measure and record the results in the test report.

7.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

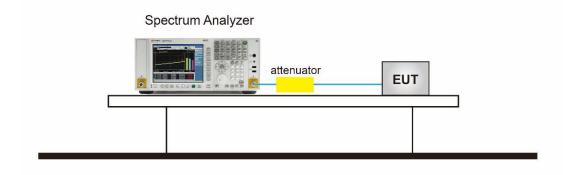







7.3 MEASUREMENT RESULTS


Test Mode	Test Channel (MHz)	-6dB Bandwidth (MHz)	Limits (MHz)	Pass or Fail
	903.0	634.7	≥0.5	Pass
LoRa 500K BW	915.0	637.6	≥0.5	Pass
	927.0	638.7	≥0.5	Pass

Test Graphs of Occupied Bandwidth

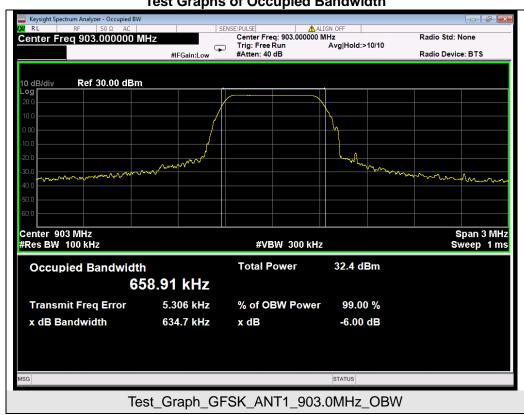





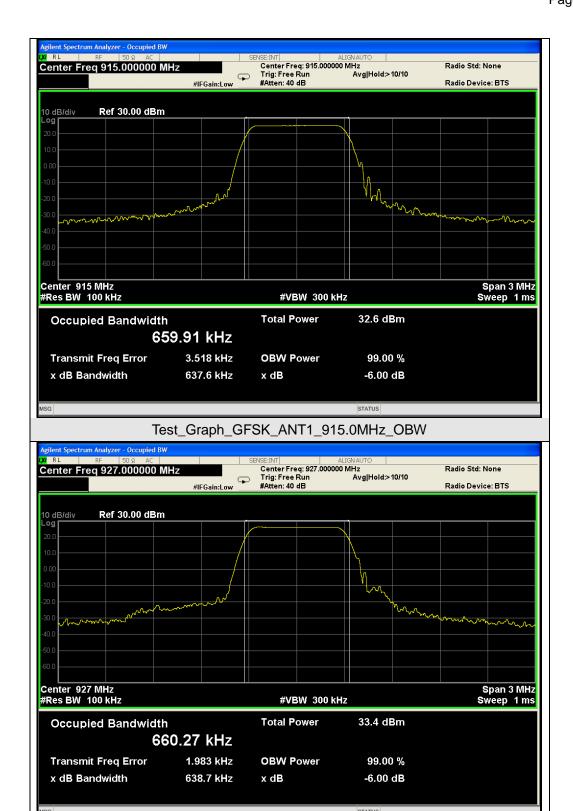

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_GFSK_ANT1_927.0MHz_OBW

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/




Page 20 of 41


8. POWER SPECTRAL DENSITY

8.1 MEASUREMENT PROCEDURE

- 1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
- 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
- 5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
- 6. Measure and record the results in the test report.
- 7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

8.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

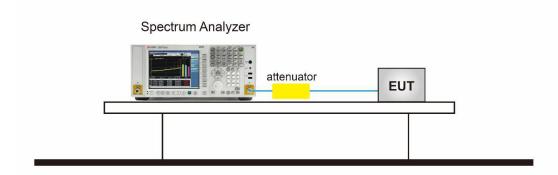






8.3 MEASUREMENT RESULTS


Test Data of Conducted Output Power Spectral Density							
Test Mode Test Channel Power density Limit (MHz) (dBm/3kHz) Pass or Fail							
	903.0	7.327	≤8	Pass			
LoRa 500K BW	915.0	7.499	≤8	Pass			
	927.0	6.568	≪8	Pass			


Test Graphs of Conducted Output Power Spectral Density

| Kgright Spectrum Analyzer - Sweet SA | SENSE PULSE | ALLOW PF | Avg Type: RMS | Avg






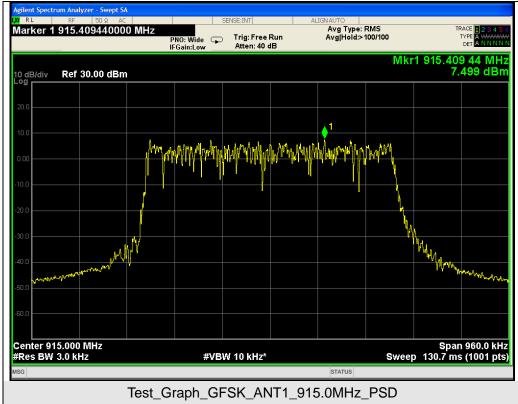

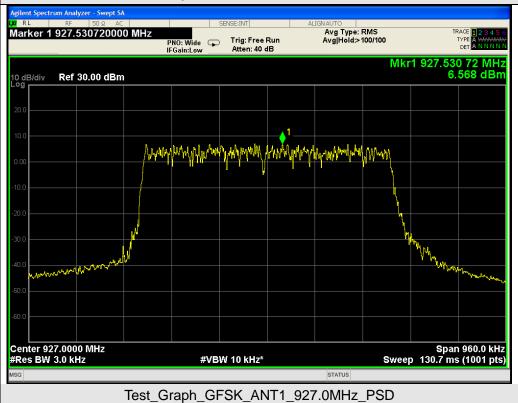

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/





9. CONDUCTED SPURIOUS EMISSION


9.1 MEASUREMENT LIMIT


LIMITS AND MEASUREMENT RESULT						
Amplicable Limite	Measurement Result					
Applicable Limits	Test Data	Criteria				
In any 100 kHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in	Specified on the BOTTOM Channel	PASS				
100KHz bandwidth within the band that contains the highest level of the desired power. In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a))	At least -20dBc than the limit Specified on the TOP Channel	PASS				

9.2 MEASUREMENT PROCEDURE

- Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the Middle and the bottom operation frequency individually.
- 3. Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.
- 4. RBW = 100 kHz; VBW= 300 kHz; Sweep = auto; Detector function = peak.
- 5. Set SPA Trace 1 Max hold, then View.


9.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

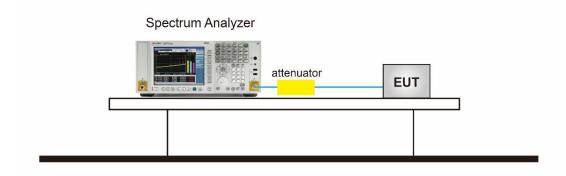






9.4 MEASUREMENT RESULTS

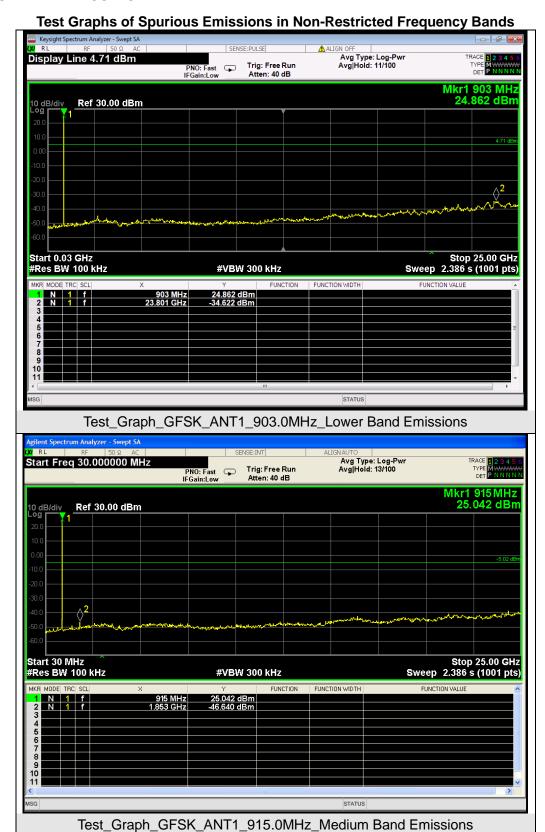



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/






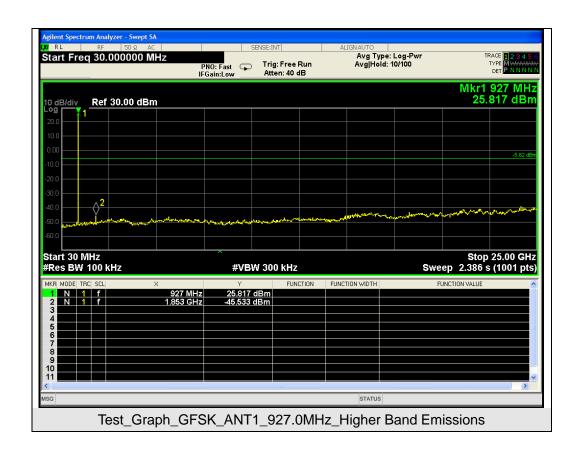






Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands

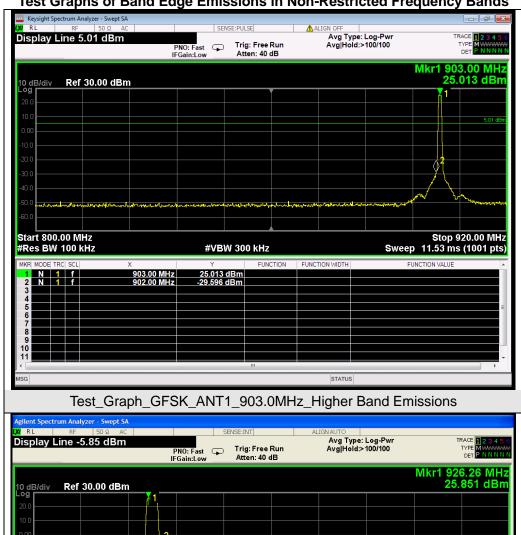

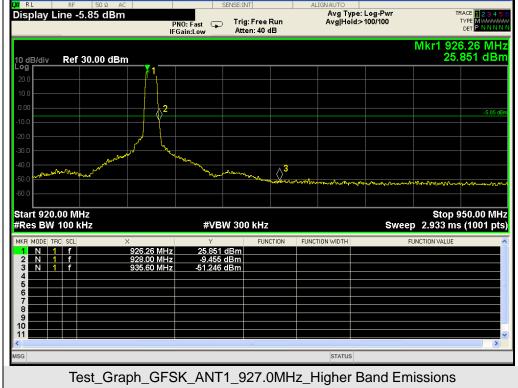

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Web: http://www.agccert.com/



Page 27 of 41

10. RADIATED EMISSION

10.1 LIMITS OF RADIATED EMISSION TEST

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

10.2 MEASUREMENT PROCEDURE

- The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.




Page 28 of 41

- pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting		
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP		
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP		
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP		
Start ~Stop Frequency	1GHz~26.5GHz		
Start ~Stop i requency	1MHz/3MHz for Peak, 1MHz/3MHz for Average		


Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP






10.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)


RADIATED EMISSION TEST SETUP 9KHz-30MHz

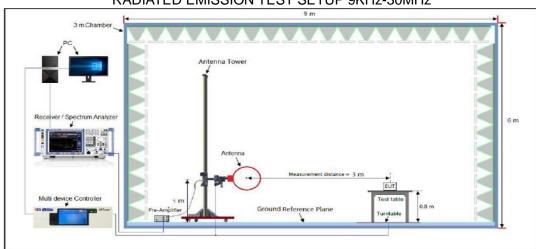


RADIATED EMISSION TEST SETUP 30MHz-1000MHz

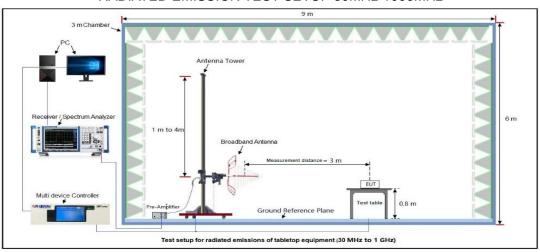

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

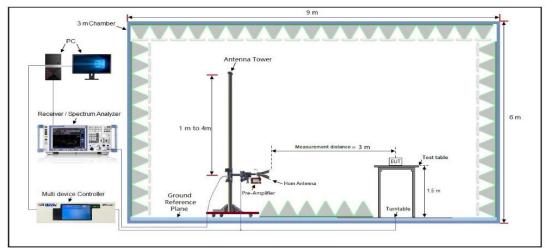





10.4 MEASUREMENT RESULT

Radiated Emission Below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

Radiated Emission from 30MHz to 1000MHz

FJDynamics AT2 Auto Steer System			Model Na	ıme	AT2			
Tempera	nperature 24.5° C Relative Humidity 58%							
Pressure	•	960hPa			Test Volta	age	Normal Voltage	
Test Mod	le	Mode 1			Antenna	enna Horizontal		ntal
	130			FCC Part 1	5C			
	120							
	110							
	90							
-	80							
m//√µ/∈	70							
Level[dBµV/m]	50							
_	40							* 6
	30	*¹^		* ² * ³	<u>**</u> 4		and anythrough the light	berg the Enduction of the Contraction
	10	_//h	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	and the state of t	war war of the same of the sam	The transfer of the same of th		
	0							
	-10 30M		100M					1G
Sucno	— QP Limit * QP Detector	— Horizontal PK		Frequency	[Hz]			
Suspe								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	49.4	23.56	11.61	40.00	16.44	100	150	Horizontal
2	125.06	23.52	14.57	43.50	19.98	100	340	Horizontal
3	141.55	22.81	17.65	43.50	20.69	100	220	Horizontal
4	237.58	21.70	13.35	46.00	24.30	100	20	Horizontal
5	719.67	29.96	25.06	46.00	16.04	100	190	Horizontal
—					l	1		†

RESULT: PASS

880.69

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

46.00

10.23

100


90

Horizontal

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/


35.77

30.29





EUT	FJDynamics AT2 Auto Steer System Model Name		AT2
Temperature	24.5° C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

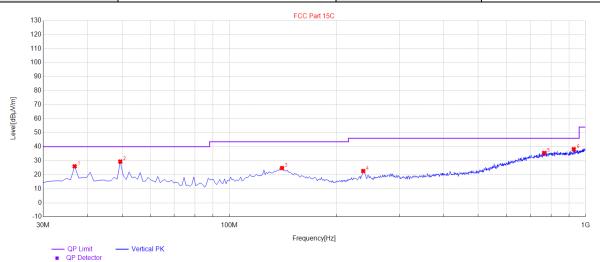

Suspe	Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	
1	36.79	26.02	10.73	40.00	13.98	100	180	Vertical	
2	49.4	29.43	11.61	40.00	10.57	100	310	Vertical	
3	140.58	24.75	19.74	43.50	18.75	100	170	Vertical	
4	237.58	22.64	13.59	46.00	23.36	100	10	Vertical	
5	765.26	35.52	30.62	46.00	10.48	100	250	Vertical	
6	927.25	38.24	32.27	46.00	7.76	100	150	Vertical	

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. All test modes had been pre-tested. The mode 1 is the worst case and recorded in the report.



Page 32 of 41


Radiated Emission Above 1GHz

14444444 = 1114444						
EUT	FJDynamics AT2 Auto Steer System	Model Name	AT2			
Temperature	24.5° C	Relative Humidity	58%			
Pressure	960hPa	Test Voltage	Normal Voltage			
Test Mode	Mode 1	Antenna	Horizontal			

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Tura	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type	
1806.000	44.26	0.08	44.34	74	-29.66	peak	
1806.000	37.13	0.08	37.21	54	-16.79	AVG	
2709.000	40.57	2.21	42.78	74	-31.22	peak	
2709.000	32.81	2.21	35.02	54	-18.98	AVG	
Remark:							
Factor = Antenna Factor + Cable Loss – Pre-amplifier.							

EUT	FJDynamics AT2 Auto Steer System	Model Name	AT2
Temperature	24.5° C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
1806.000	43.96	0.08	44.04	74	-29.96	peak
1806.000	36.44	0.08	36.52	54	-17.48	AVG
2709.000	40.03	2.21	42.24	74	-31.76	peak
2709.000	31.51	2.21	33.72	54	-20.28	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						





EUT	FJDynamics AT2 Auto Steer System	Model Name	AT2
Temperature	24.5° C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Volue Type		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type		
1806.000	45.77	0.14	45.91	74	-28.09	peak		
1806.000	38.19	0.14	38.33	54	-15.67	AVG		
2709.000	41.63	2.36	43.99	74	-30.01	peak		
2709.000	34.25	2.36	36.61	54	-17.39	AVG		
Remark:								
Factor - Ante	eactor - Antenna Factor + Cable Loss - Pre-amplifier							


Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT	FJDynamics AT2 Auto Steer System	Model Name	AT2
Temperature	24.5° C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Time
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
1806.000	45.29	0.14	45.43	74	-28.57	peak
1806.000	37.62	0.14	37.76	54	-16.24	AVG
2709.000	40.95	2.36	43.31	74	-30.69	peak
2709.000	33.79	2.36	36.15	54	-17.85	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.





EUT	FJDynamics AT2 Auto Steer System	Model Name	AT2
Temperature	24.5° C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Time
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
1854.000	46.59	0.22	46.81	74	-27.19	peak
1854.000	38.43	0.22	38.65	54	-15.35	AVG
2781.000	41.27	2.64	43.91	74	-30.09	peak
2781.000	32.88	2.64	35.52	54	-18.48	AVG
Remark:						
Factor = Antenna Factor + Cable Loss - Pre-amplifier.						

EUT	FJDynamics AT2 Auto Steer System	Model Name	AT2
Temperature	24.5° C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Volue Ture
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
1854.000	46.12	0.22	46.34	74	-27.66	peak
1854.000	38.54	0.22	38.76	54	-15.24	AVG
2781.000	40.79	2.64	43.43	74	-30.57	peak
2781.000	31.92	2.64	34.56	54	-19.44	AVG
Remark:						
Factor = Ante	enna Factor + Ca	able Loss – I	Pre-amplifier.			

RESULT: PASS

Note


The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Margin=Measure result-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/







Test result for band edge emission at restricted bands

restriction band ongo chinosion at restriction bands			
EUT	FJDynamics AT2 Auto Steer System	Model Name	AT2
Temperature	24.5° C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

Test Graph for Peak Measurement

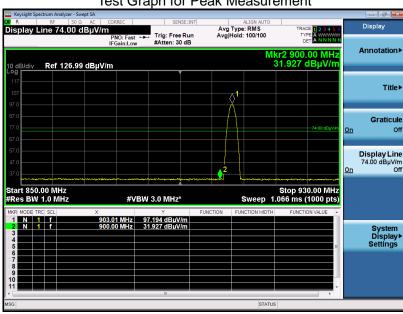


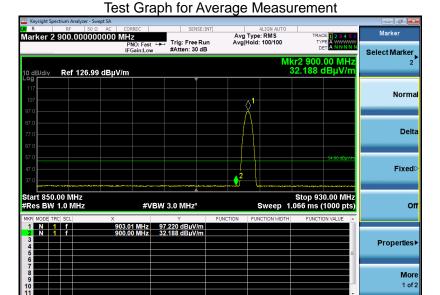

RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/







EUT	FJDynamics AT2 Auto Steer System	Model Name	AT2
Temperature	24.5° C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical


Test Graph for Peak Measurement

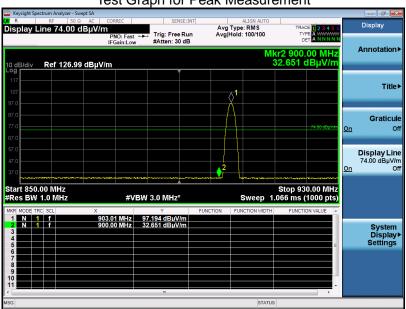



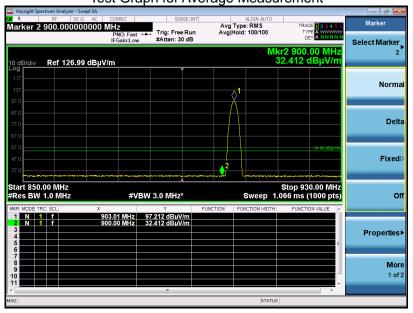



RESULT: PASS





EUT	FJDynamics AT2 Auto Steer System	Model Name	AT2
Temperature	24.5° C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

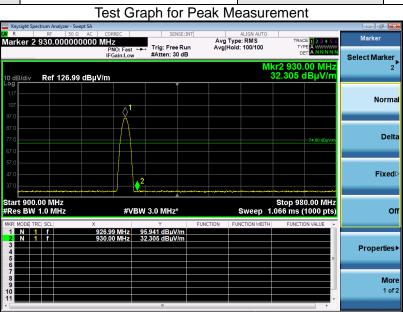


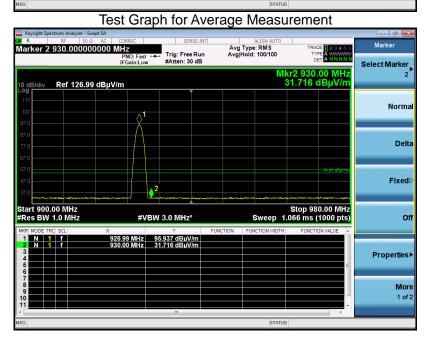

RESULT: PASS


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/







EUT	FJDynamics AT2 Auto Steer System	Model Name	AT2
Temperature	24.5° C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical



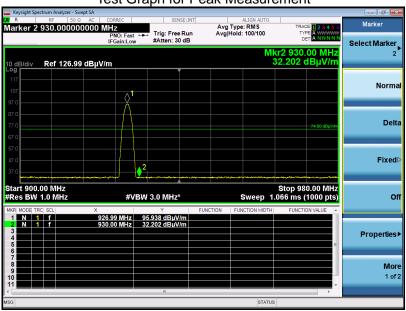




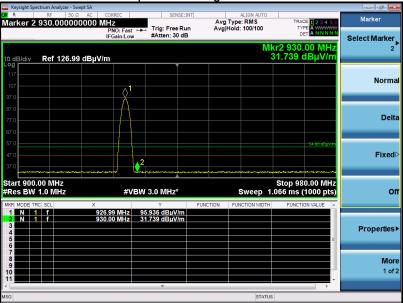

RESULT: PASS

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.





11. AC POWER LINE CONDUCTED EMISSION TEST


11.1 LIMITS OF LINE CONDUCTED EMISSION TEST

Francisco	Maximum RF Line Voltage		
Frequency	Q.P. (dBμV)	Average (dBμV)	
150kHz~500kHz	66-56	56-46	
500kHz~5MHz	56	46	
5MHz~30MHz	60	50	

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

11.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

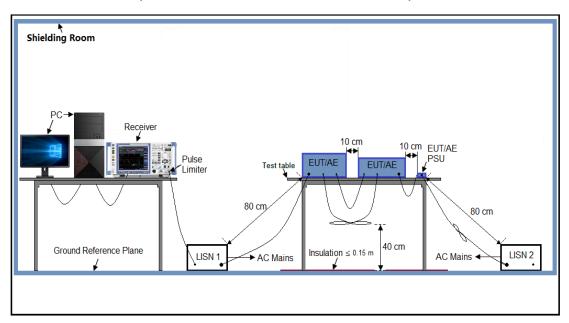



Page 40 of 41

11.3 PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 9V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

11.4 FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

11.5 MEASUREMENT RESULTS

N/A

Note: The product is powered by DC, no conduction test is performed.



Page 41 of 41

APPENDIX I: PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.:AGC12845220803AP01 **APPENDIX II: PHOTOGRAPHS OF TEST EUT**

Refer to the Report No.: AGC12845220803AP02

----END OF REPORT----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd. (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.