


Port dipping treatment



Wire diameter  $\phi 0.5$ ,  
Around 4 times,  
Ensure coil inductance  $2.7\mu\text{H}$ , Quality factor 0.07

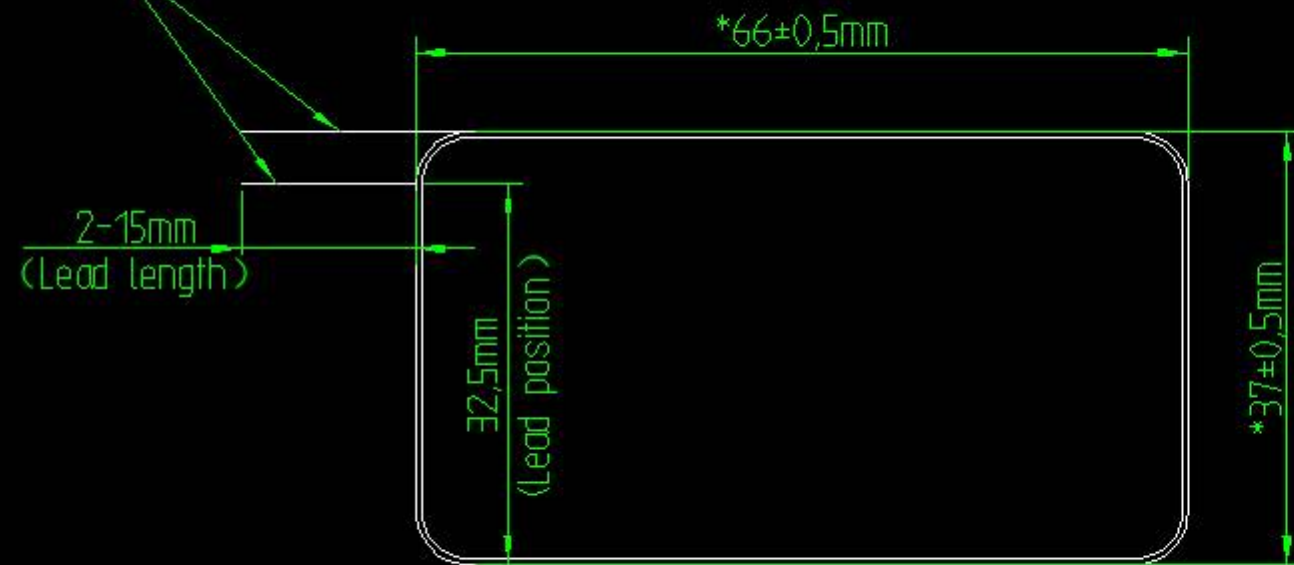