



**Technical Report to the FCC Regarding
Johnson Controls Interiors, L.L.C. Homelink© III
Model: SJAAHL3
FCC ID: CB2SJAAHL3
Form 731 Confirmation #: EA345899
8/5/2004**

A report concerning a request for certification of CB2SJAAHL3.

Please issue grant immediately upon review.

Confidentiality applied to the following sections according to 47 CFR 0.459:

Circuit Block Diagrams, attachment "hl_block_diag.pdf"

Theory/Description of Operation "theory_op.pdf"

Schematics attachment "schematics.pdf"

Measurements Made by:

A handwritten signature in cursive script, appearing to read "Bolay Elgersma".

Bolay Elgersma
RF Test Site Technician
Johnson Controls Interiors, LLC.

Measurements Observed by:

A handwritten signature in cursive script, appearing to read "Jeremy Bos".

Jeremy Bos
RF Test Site Manager
Johnson Controls Interiors, LLC.

A handwritten signature in cursive script, appearing to read "Jeremy Bos".

Report and Application Prepared by
Jeremy Bos
RF Test Site Manager
Johnson Controls Interiors, LLC.

1. General Information

1.1. Product Description:

The Johnson Controls Interiors HomeLink® HL3 Universal Garage Door Opener is a low-power transceiver OEM device that is installed into an overhead console of the automobile. The installation is provided by trained technicians during the course of the manufacture of the automobile. It is powered by the 12volt system of the automobile.

This Universal Garage Door Opener has the capability to

1. Learn the frequency and bit code format of the user's existing garage door remote control devices and
2. Reproduce and transmit the frequency and bit code format to remotely operate the user's garage door.

The unit is designed for the periodic operation of a control signal, which typically activates a garage door opener receiver.

The unit is supplied to the automobile manufacturer without harness. For testing purposes a typical assembly and 2-conductor cable harness were used to power to the unit.

The unit is only operational when the user depresses the control button. It becomes inactive after release of the control button.

The three-button HomeLink® unit replaces up to three hand-held transmitters. In addition to the typical operation of the garage door, the unit will learn the radio frequency codes of other transmitter types to activate entry door locks, estate gates, security systems, and home or office lighting.

The antenna system is an integral part of the unit. It cannot be altered nor replaced by the user. Service of this system is only available from the Automobile Manufacturer's Dealerships and Johnson Controls Interiors, LLC.

1.2. Related Grants

This report applies to a request for a new certification for the CB2SJAAHL3.

1.3. Test Methodology

Radiated Emissions testing was done according to ANSI C63.4-1992. The power source for this product is a 12V automotive vehicle battery, thus conducted emissions measurements are not required.

The unit is supplied to the automobile manufacturer without harness. For testing purposes a 2-conductor cable harness was used to interface to the unit.

1.4. Test Facility

The Open Area Test Site where these measurements were taken, is located on the grounds of Johnson Controls Automotive Interiors System's Edgar D. Prince Technical Campus, in the city of Holland, county of Ottawa, state of Michigan, United States of America. The site is a fully enclosed 10m weather-protected OATS. All structure materials above the conducting ground-plane are non-metallic and consist of: wood, laminated lumber, fiberglass, glue, plastic, or fiberglass reinforced plastic. The site contains a 15-foot diameter turntable capable of supporting large cars and light trucks under test. Tabletop testing was conducted on a smaller 3m turntable described in the site recertification report. The test site has been fully described in a reports filled with the FCC and Industry Canada. The report filled with the FCC is dated October 19, 1999, was accepted by the FCC in a letter dated December, 20 1999. The report filled with Industry Canada, dated January 31, 2000, was accepted via a letter dated February 29, 2000. The site was re-certified with the FCC on December 27, 2002 and with the IC on January 27, 2003. Our OATS is registered with the IC under file number IC 3593.

2. Product Labeling

The FCC Identifier assigned is FCC ID: CB2SJAHL3. The Industry Canada certification number is 279B-SJAHL3. These identifiers will be embossed on the product housing.

The label will be placed on the exterior of the HL3 housing using an acrylic adhesive that will permanently affix the label.

Because of the small size of the device and because the installation is inside a portion of the automobile, the following statements will appear in the user's manual. Refer to attachment "user_man.pdf" for the entire text of the user's manual.

"This device complies with Part 15 of the FCC rules and with RSS-210 of the Industry Canada. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference,
- (2) This device must accept any interference that may be received including interference that may cause undesired operation.

WARNING: The transmitter has been tested and complies with FCC and Industry Canada rules. Changes or modifications not expressly approved by the party responsible for the compliance could void the user's authority to operate the device."

2.1. Label Drawing and Location on Product.

The label drawing as well as a sketch of the label location on product packaging is available in "label.pdf"

3. Test Configuration

Radiated Emissions measurements presented in the report were made in accordance with ANSI C63.4-1992 Figure 9(c). The EUT was placed on a 1 x 1.5m non-metallic table elevated 80cm above a conducting ground plane. The harness was run to the long edge of the table and dropped to a power supply sitting at base of the table.

A picture of the radiated test setup is available as an attachment named "test_setup.jpg"

4. Block Diagram

For system block diagram please refer to attachment named "hl_block_diag.pdf"

5. Test Setup Photographs

For test setup photos please refer to attachment named "test_setup_end.jpg"

For test setup photos please refer to attachment named "test_setup_side.jpg"
 For test setup photos please refer to attachment named "test_setup_flat.jpg"

6. Conducted Emissions Measurements

Conducted Measurements are not required for this product.

7. Radiated Emissions Data

7.1. Summary of Results

- Measurements of the transmit output field strength were taken with the DUT trained to 288, 310, and 418 MHz at 30, 50 and 80% duty cycles. A **worst-case emission of 79.3 dBuV/m** occurred with the DUT trained to 310 MHz, 50% duty cycle. The worst-case emission remained **2.0dB below the FCC limit** (75.3 dBuV/m) for this type of device.
- The **worst-case harmonic measurement of 67.8 dBuV/m** was found at 836 MHz, the second harmonic of 418 MHz at 30% duty cycle. **A margin of 2.9 dB to the prescribed FCC limit was noted.**
- This module exhibits pulsed operation characteristics.
- Measurements were taken of the 20dB occupied bandwidth. The transmitter had a maximum occupied bandwidth of 77 kHz when the DUT is trained to 418 MHz, 80% duty cycle.
- This device has no measurable Class B emissions.
- The output power of the DUT varied by no more than 0.2dB when the input voltage was varied from 6 to 18 Volts. The device does not operate when the input voltage is below 8V.
- The device was found to be incapable of operating in restricted bands.
- The device deactivated immediately after the activation button is depressed. Less than 5 sec.
- The device uses coarse and fine pulses to tune the transmit antenna. At 418 MHz, 30% duty cycle the field strength of the pulses average 4908 uV/m over 100 msec. This represents a margin on 4.9 dB to the FCC limit.

7.2. Test Equipment Used

<u>Description</u>	<u>Model #</u>	<u>Serial Number</u>	<u>Last Cal Date</u>	<u>Cal Due</u>
EMCO Biconical Antenna (20- 300 MHz)	3110B	9906-3309	10/21/03	10/21/05
EMCO LPA Antenna (200- 2000MHz)	3148	9908-1076	10/21/03	10/21/05
Electro-metrics Double Ridged Guide (1- 18GHz)	RGA-60	6147	10/21/03	10/21/05
Agilent E- series EMC Analyzer	E4407B	US41192569	10/16/03	10/16/04
HP Preamp	8447D	1937A03135	10/09/03	10/09/04
Rohde & Schwarz EMI	EMI 7	1088.749.07	7/20/04	7/20/05

Test Receiver 7GHz				
-------------------------------------	--	--	--	--

7.3. Test Equipment Setup and Procedure

Spectrum Analyzer Settings:

Detector Function: Peak

Resolution Bandwidth: 120kHz (below 1GHz)

1MHz (above 1GHz)

Video Bandwidth: 300kHz (below 1GHz)

3MHz (above 1GHz)

For the testing, the EUT was placed at the center of a non-conducting table 80 cm above the ground plane pursuant to ANSI C63.4 for stand-alone equipment. The 2-conductor cable harness was routed to the edge of the long side of the table then down to the power supply located on the turntable base.

Equipment is placed in one of the three orthogonal orientations, End, Side, and Flat. These orientations are described below in Figure 7.3.1.

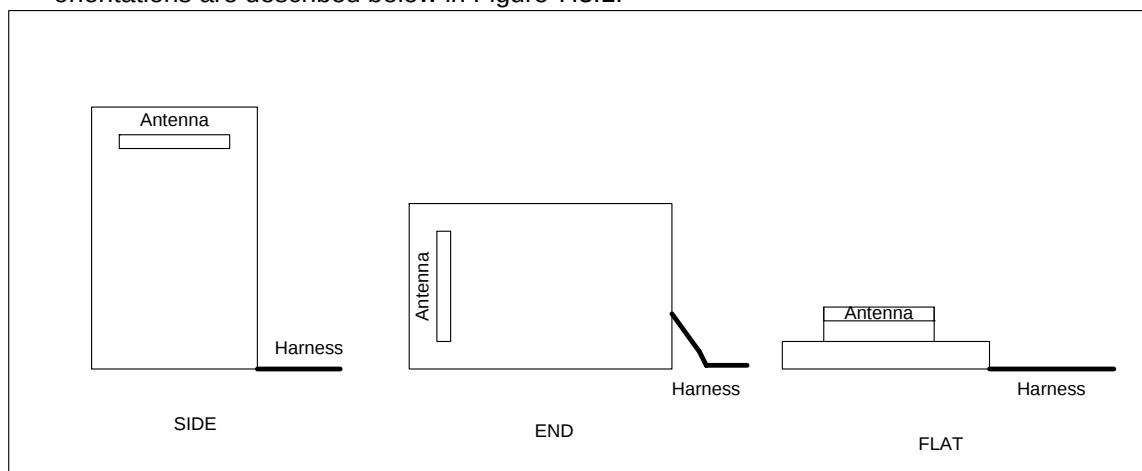


Figure 7.3.1 EUT Orthogonal Orientations

While in the prescribed orientation, the vertical antenna positioner sweeps in elevation from 1 to 4m in height until the operator finds the peak. The 3m turntable is then rotated through 360 degrees until a peak is found. The table is stopped at the peak location and the peak in elevation re-verified. Procedure is repeated for applicable orientations/measurement antenna polarizations.

7.4. Measured Data

7.4.1. Measurements of Fundamentals and Harmonics

Measurements described in this section were taken according to ANSI C63.4-1992 on the Johnson Controls 3m test table.

7.4.1.1. DUT Tuned to 288MHz (Fundamental)

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement* (dBuV/m)	Correction Factor (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Limit (dBuV/m)	Margin (dB)
288	Side	H	30	80.5	0	-10.5	70.0	73.8	3.8
288	Side	H	50	76	0	-6.0	70.0	73.8	3.9
288	Side	H	80	73	0	-1.9	71.1	73.8	2.8

* Measurements include Cable corrections and Antenna Factors

7.4.1.2. DUT Tuned to 310MHz (Fundamental)

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement* (dBuV/m)	Correction Factor (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Limit (dBuV/m)	Margin (dB)
310	Side	H	30	83.6	0	-10.5	73.1	75.3	2.2
310	Side	H	50	79.3	0	-6.0	73.3	75.3	2.0
310	Side	H	80	75.1	0	-1.9	73.2	75.3	2.2

* Measurements include Cable corrections and Antenna Factors

7.4.1.3. DUT Tuned to 418MHz (Fundamental)

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement* (dBuV/m)	Correction Factor (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Limit (dBuV/m)	Margin (dB)
418	Flat	V	30	88.2	0	-10.5	77.7	80.3	2.5
418	Flat	V	50	83.6	0	-6.0	77.6	80.3	2.7
418	Flat	V	80	78.4	0	-1.9	76.5	80.3	3.8

* Measurements include Cable corrections and Antenna Factors

7.4.1.4. 288MHz (Harmonics)

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement* (dBuV/m)	Correction Factor (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Limit (dBuV/m)	Margin (dB)
576	End	H	30	59.6	0	-10.5	49.1	53.8	4.7
576	Side	V	50	54.6	0	-6.0	48.6	53.8	5.3
576	End	H	80	47.8	0	-1.9	45.9	53.8	8.0
864	-	-	30	-	0	-10.5	N/A	53.8	N/A
864	-	-	50	-	0	-6.0	N/A	53.8	N/A
864	-	-	80	-	0	-1.9	N/A	53.8	N/A
1152	Flat	H	30	44	0	-10.5	33.5	53.8	20.3
1152	Flat	H	50	42.8	0	-6.0	36.8	53.8	17.1
1152	Flat	H	80	43	0	-1.9	41.1	53.8	12.8
1440	End	H	30	55.4	0	-10.5	44.9	53.8	8.9
1440	End	H	50	53.2	0	-6.0	47.2	53.8	6.7
1440	Side	H	80	52.4	0	-1.9	50.5	53.8	3.4
1728	End	H	30	48.3	0	-10.5	37.8	53.8	16.0
1728	End	H	50	47.6	0	-6.0	41.6	53.8	12.3
1728	End	H	80	47.9	0	-1.9	46.0	53.8	7.9
2016	End	H	30	48.7	0	-10.5	38.2	53.8	15.6
2016	End	H	50	47.7	0	-6.0	41.7	53.8	12.2
2016	End	H	80	47.1	0	-1.9	45.2	53.8	8.7
2304	Side	H	30	46.7	0	-10.5	36.2	53.8	17.6
2304	Side	H	50	46.7	0	-6.0	40.7	53.8	13.2
2304	Side	H	80	46.7	0	-1.9	44.8	53.8	9.1
2592	End	V	30	47.8	0	-10.5	37.3	53.8	16.5
2592	End	V	50	47.8	0	-6.0	41.8	53.8	12.1
2592	End	V	80	47.8	0	-1.9	45.9	53.8	8.0
2880	End	V	30	49.6	0	-10.5	39.1	53.8	14.7
2880	End	V	50	49.6	0	-6.0	43.6	53.8	10.3
2880	End	V	80	49.6	0	-1.9	47.7	53.8	6.2

Ambient

Noise Floor

* Measurements include Cable corrections and Antenna Factors

7.4.1.5. 310MHz (Harmonics)

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement* (dBuV/m)	Correction Factor (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Limit (dBuV/m)	Margin (dB)
620	Flat	H	30	59.7	0	-10.5	49.2	55.3	6.1
620	Flat	H	50	53.7	0	-6.0	47.7	55.3	7.6
620	Flat	V	80	47.8	0	-1.9	45.9	55.3	9.5
930	-	-	30	-	0	-10.5	N/A	55.3	N/A
930	-	-	50	-	0	-6.0	N/A	55.3	N/A
930	-	-	80	-	0	-1.9	N/A	55.3	N/A
1240	Flat	H	30	46.9	0	-10.5	36.4	54.0	17.6
1240	Flat	H	50	44.38	0	-6.0	38.4	54.0	15.6
1240	Flat	H	80	42.9	0	-1.9	41.0	54.0	13.0
1550	End	H	30	50.7	0	-10.5	40.2	54.0	13.8
1550	End	H	50	50.3	0	-6.0	44.3	54.0	9.7
1550	Side	H	80	49.2	0	-1.9	47.3	54.0	6.7
1860	Flat	H	30	49.2	0	-10.5	38.7	55.3	16.6
1860	Flat	H	50	49.2	0	-6.0	43.2	55.3	12.1
1860	Flat	H	80	49.2	0	-1.9	47.3	55.3	8.1
2170	Side	H	30	43.3	0	-10.5	32.8	55.3	22.5
2170	Flat	H	50	43.1	0	-6.0	37.1	55.3	18.2
2170	Flat	H	80	43.1	0	-1.9	41.2	55.3	14.2
2480	End	V	30	46.3	0	-10.5	35.8	55.3	19.5
2480	End	V	50	46.3	0	-6.0	40.3	55.3	15.0
2480	End	V	80	46.3	0	-1.9	44.4	55.3	11.0
2790	-	-	30	-	0	-10.5	N/A	54.0	N/A
2790	-	-	50	-	0	-6.0	N/A	54.0	N/A
2790	-	-	80	-	0	-1.9	N/A	54.0	N/A
3100	End	V	30	54	0	-10.5	43.5	55.3	11.8
3100	End	V	50	54	0	-6.0	48.0	55.3	7.3
3100	End	V	80	54	0	-1.9	52.1	55.3	3.3

Ambient Ambient too strong to take measurement at 930, cell tower.

* Measurements include Cable corrections and Antenna Factors

Noise

7.4.1.6. 418MHz (Harmonics)

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement* (dBuV/m)	Correction Factor (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Limit (dBuV/m)	Margin (dB)
836	Flat	H	30	67.8	0	-10.5	57.3	60.3	2.9
836	Flat	H	50	60.1	0	-6.0	54.1	60.3	6.2
836	Flat	H	80	54.1	0	-1.9	52.2	60.3	8.1
1254	Side	V	30	56.5	0	-10.5	46.0	60.3	14.2
1254	Side	H	50	55.7	0	-6.0	49.7	60.3	10.6
1254	Side	H	80	56.4	0	-1.9	54.5	60.3	5.8
1672	Side	V	30	59.9	0	-10.5	49.4	54.0	4.6
1672	Flat	H	50	58.3	0	-6.0	52.3	54.0	1.7
1672	Flat	H	80	52.1	0	-1.9	50.2	54.0	3.8
2090	End	H	30	39.9	0	-10.5	29.4	60.3	30.8
2090	End	V	50	39.3	0	-6.0	33.3	60.3	27.0
2090	End	V	80	39.5	0	-1.9	37.6	60.3	22.7
2508	Side	H	30	48.1	0	-10.5	37.6	60.3	22.6
2508	Side	H	50	47.7	0	-6.0	41.7	60.3	18.6
2508	Side	H	80	47.9	0	-1.9	46.0	60.3	14.3
2926	End	V	30	46	0	-10.5	35.5	60.3	24.7
2926	End	V	50	46	0	-6.0	40.0	60.3	20.3
2926	End	V	80	46	0	-1.9	44.1	60.3	16.2
3344	End	V	30	47	0	-10.5	36.5	60.3	23.7
3344	End	V	50	47	0	-6.0	41.0	60.3	19.3
3344	End	V	80	47	0	-1.9	45.1	60.3	15.2
3762	End	V	30	48	0	-10.5	37.5	54.0	16.5
3762	End	V	50	48	0	-6.0	42.0	54.0	12.0
3762	End	V	80	48	0	-1.9	46.1	54.0	7.9
4180	End	V	30	44	0	-10.5	33.5	54.0	20.5
4180	End	V	50	44	0	-6.0	38.0	54.0	16.0
4180	End	V	80	44	0	-1.9	42.1	54.0	11.9

Ambient**Noise**

* Measurements include Cable corrections and Antenna Factors


7.4.2. Pulsed Operation

The Homelink© transmitter tested here transmits pulses using amplitude modulation with varying duty cycle. Verification of pulse operation at 30, 50 and 80% duty cycles is provided here. Measurements were taken at 310MHz with the span set to zero on the E7407B spectrum analyzer.

7.4.2.1. 30% Duty Cycle


* Agilent 15:13:49 Aug 3, 2004


L

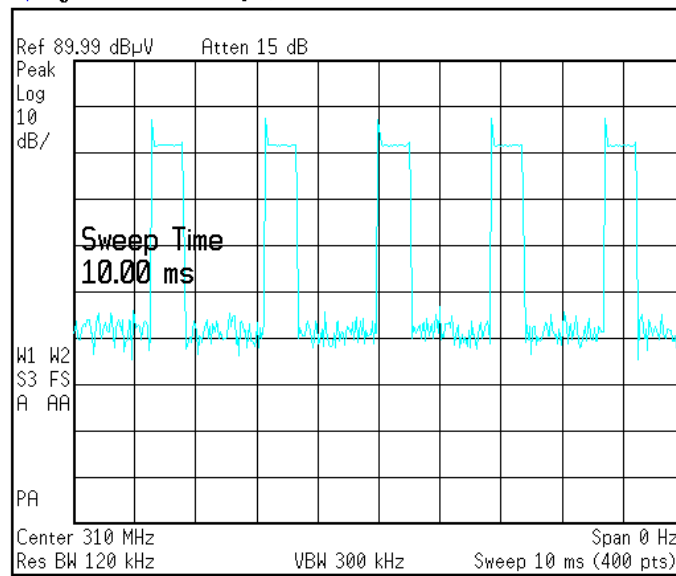**7.4.2.2. 50% Duty Cycle**

* Agilent 15:24:47 Aug 3, 2004

L

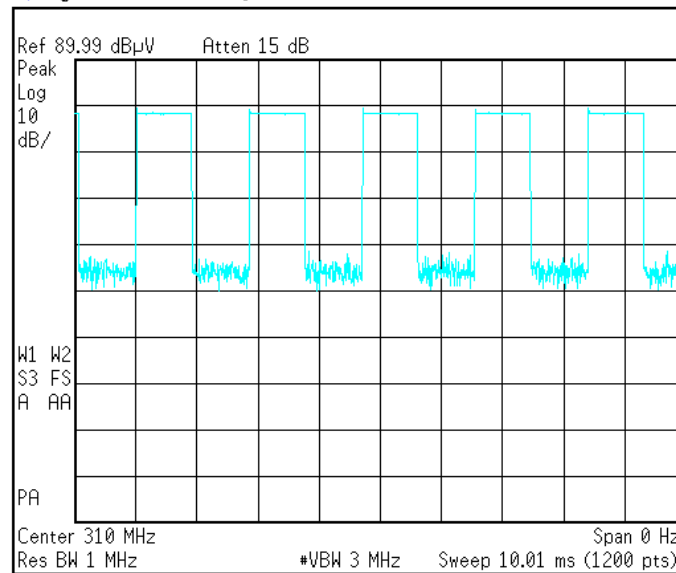

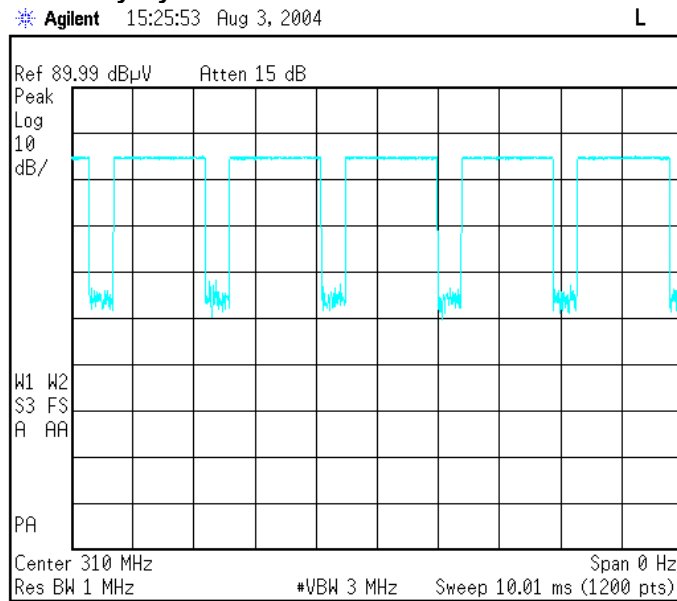7.4.2.3. 80% Duty Cycle**7.4.3. Occupied Bandwidth**


Occupied bandwidth measurements were taken at 288, 310, and 418 MHz. The occupied bandwidth was determined using the 20dB measurement method.

7.4.3.1. Occupied Bandwidth Measurement

Frequency (Mhz)	Duty Cycle (%)	Occupied BW (kHz)
288	30	28.1
	50	17.2
	80	20.4
310	30	37.4
	50	14.6
	80	21.7
418	30	20
	50	36
	80	77.1


7.4.3.2. Example of Occupied Bandwidth measurement (310MHz 50% Duty Cycle)

Agilent 19:12:41 Aug 4, 2004

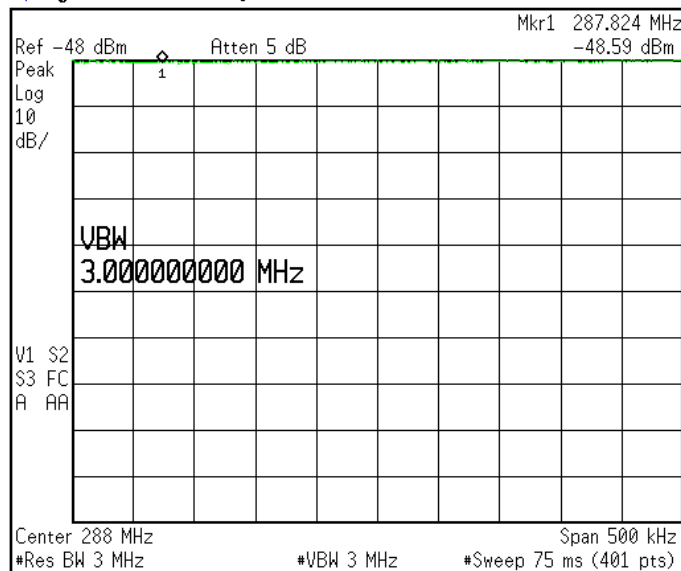

Determining Reference level.

Agilent 19:14:22 Aug 4, 2004

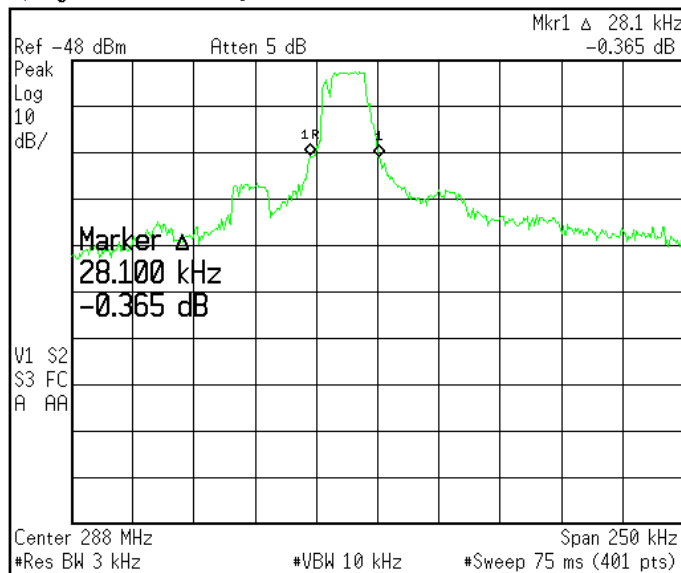

Measuring Occupied Bandwidth

7.4.4. Emission Spectrum

Prescan Measurements were taken inside a semi-anechoic chamber to investigate the possibility of other spurious emissions from the DUT. Screen captures presented below in sections 7.4.4.1-3 show the spurious emissions observed with the DUT trained to 288, 310, and 418MHz with a 30% Duty cycle. A relay was used to reset the DUT, the emissions of the relay (without DUT connected) are shown as the green trace.

Emissions were noted and measured on the JCI OATS, all measurements were found to be near or below the ambient noise level and well below the FCC limits for spurious emissions. A summary is presented below in section 7.4.4.4


Measurement settings:

Resolution BW 120kHz

Video Bandwidth: 300kHz


Detector: Peak

7.4.4.1. 288 MHz

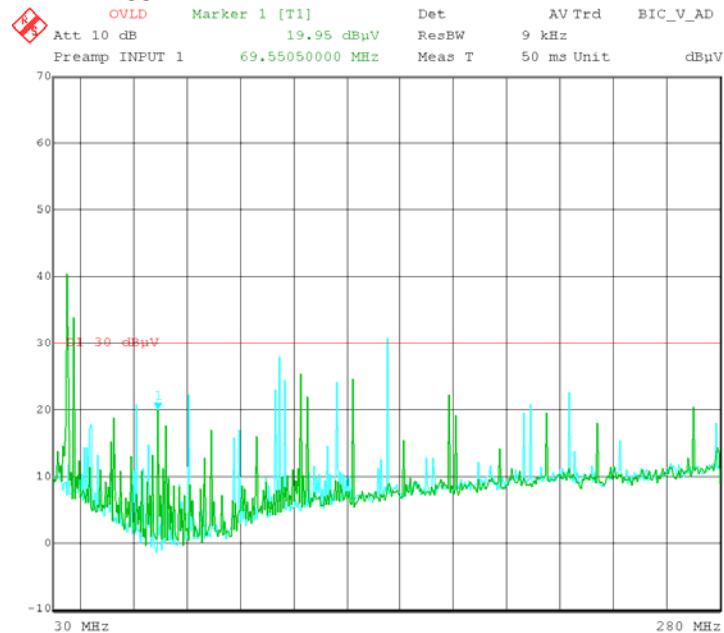


Title: DUT F2 / G6-7 w/ HL TX on Ch.3
Date: 4.AUG.2004 19:18:25

7.4.4.2. 310 MHz

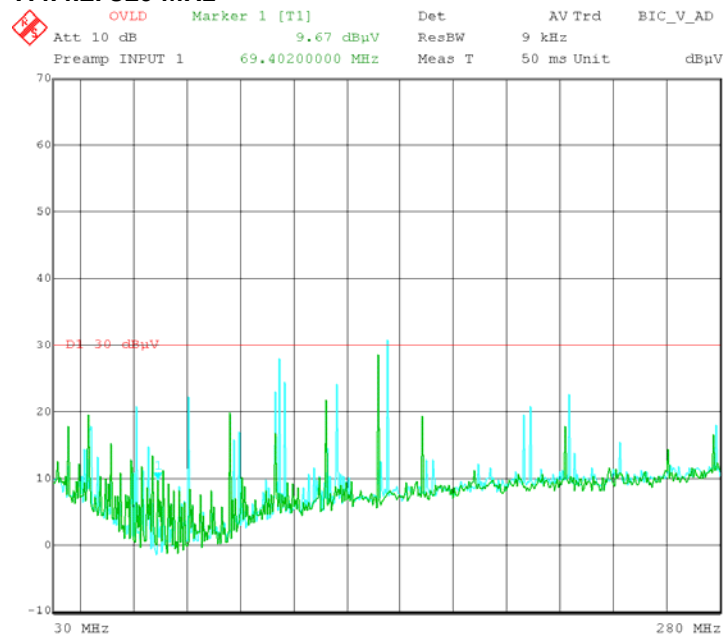

Title: DUT F2 / G6-7 w/ HL TX on Ch.3
Date: 4.AUG.2004 19:23:43

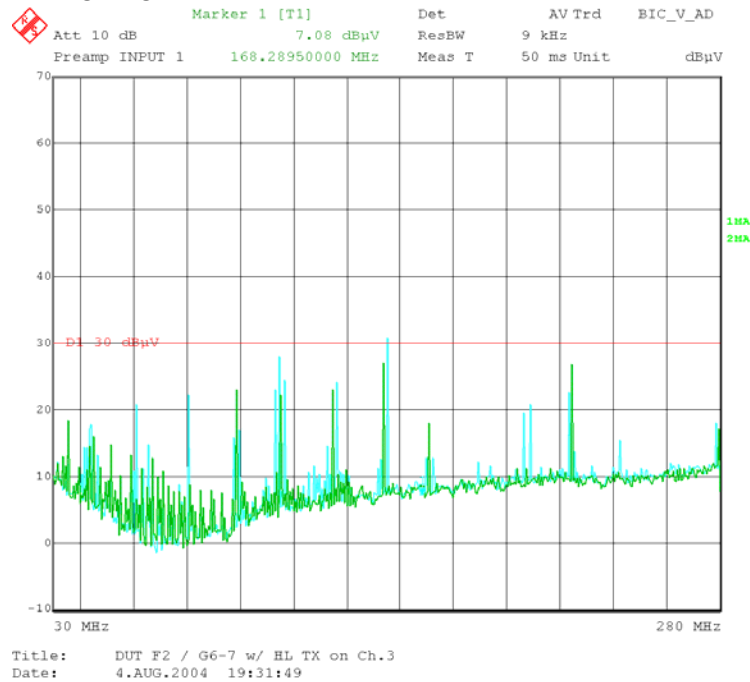7.4.4.3. 418 MHz

Note: Pre-scan measurements were made in a semi-anechoic chamber using a Rohde & Schwarz EMI Test Receiver 7GHz. The semi-anechoic chamber and test receiver are part of the Johnson Control Electronics Validation Group.

7.4.4.4. Summary of Emissions Measurements Taken on OATS


288 MHz 30% DC			
Freq.	dBuV	Limit	Notes
35.5	23.6	40	
37.9	22.9	40	
69.6	21.9	40	
123.8	28.9	43	ambient
142.3	25.6	43	
178.4	51.3	43	VHF TV High band chan. 7-13
310MHz 30% DC			
Freq.	dBuV	Limit	
43.0965	20.5	40	
96.5145	40.8	43	FM Radio Broadcast
132.69	22.3	43	
151.8465	23	43	
168.609	23.9	43	
418MHz 30% DC			
Freq.	dBuV	Limit	
35.69	29.2	40	
98.815	48.8	43	FM Radio Broadcast
135	32.6	43	Aeronautical Maritime
154.173	24	43	
224.463	22.7	46	

Measurements were made using a peak detector with Resolution BW of 120 kHz and Video BW of 300 kHz. Cable losses and correction factors included in measurement.

7.4.5. Variation of Supply Voltage

Measurements of the variation in output field strength due to variation in the supply voltage were taken in accordance with 15.31(e). The DUT was configured to transmit at 310MHz, 30% Duty Cycle.

7.4.5.1. Plot of output power over supply voltage

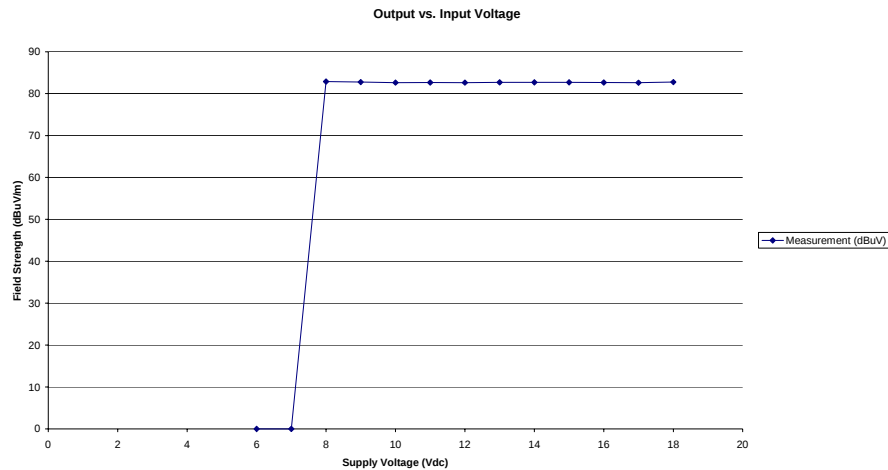

7.4.5.2. Output power as a function of supply voltage

Voltage	Measurement (dBuV)
6	No Op
7	No Op
8	82.87
9	82.74
10	82.64
11	82.65
12	82.63
13	82.69
14	82.7
15	82.68
16	82.67
17	82.61
18	82.74

7.4.6. Verification of Non-Operation in Restricted Bands



An exercise was undergone to verify that the device was not able to learn and thereby transmit in a restricted band. During this exercise it was found that the device firmware prevents the device from learning any frequency within 1MHz of any restricted band listed in 47 CFR 15.205.

7.4.7. Verification of De-activation after 5 seconds

This device stops transmitting once the activation button is depressed.


7.4.8. Tuning Pulse Measurements

This device uses pulses to tune the antenna prior to transmission. Measurements of these tuning pulses over 500 msec windows show that these pulses are below the FCC limits for operation in this band. A summary of measurements is presented in section 7.4.8.7. Tuning pulse measurements were taken at 288, 310, and 418 MHz at a duty cycle of 30%. Settings in the screen capture below were not used to make the measurements presented in section 7.4.8.7.

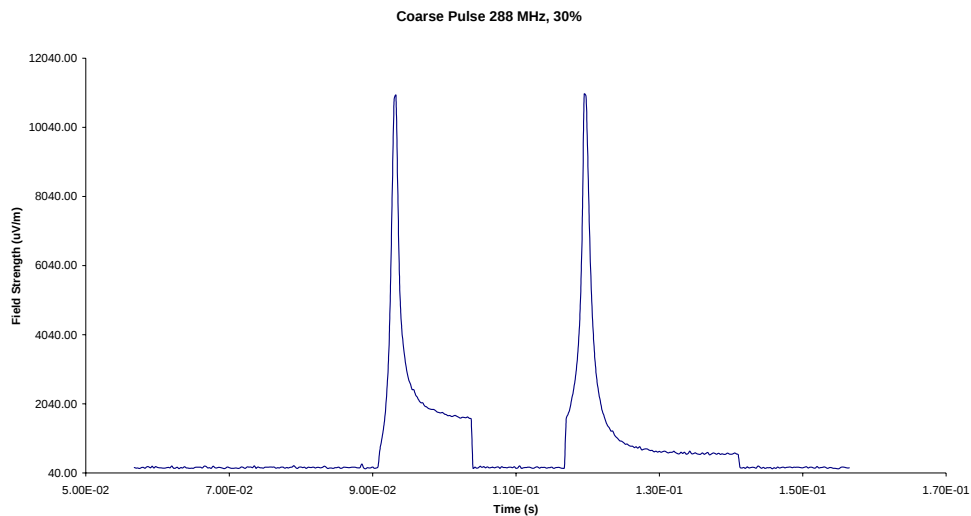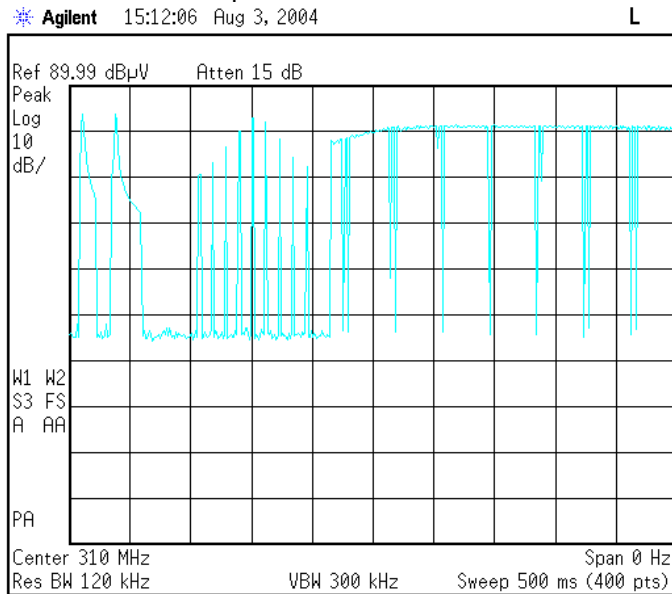


7.4.8.1. Coarse Tuning Pulse (288MHz)

7.4.8.2. Fine Tuning Pulse (288MHz)

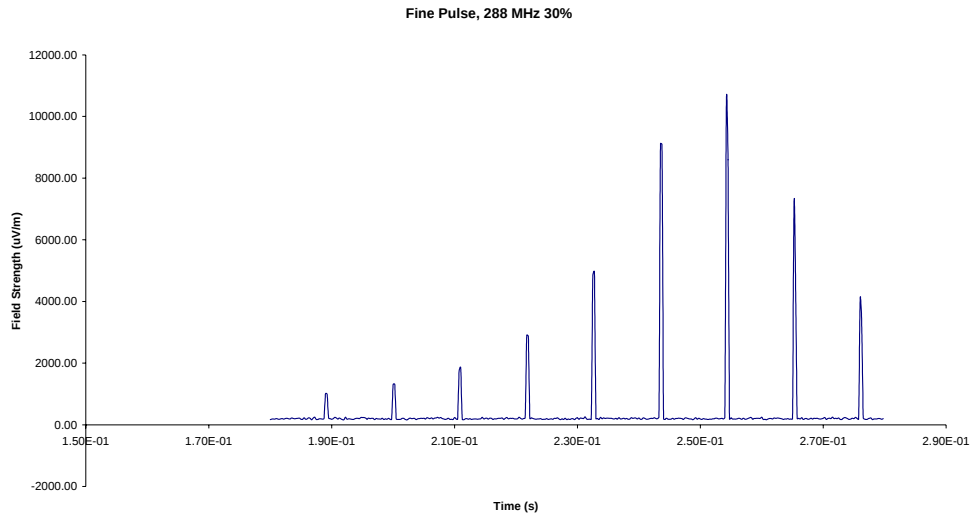


7.4.8.3. Coarse Tuning Pulse (310MHz)

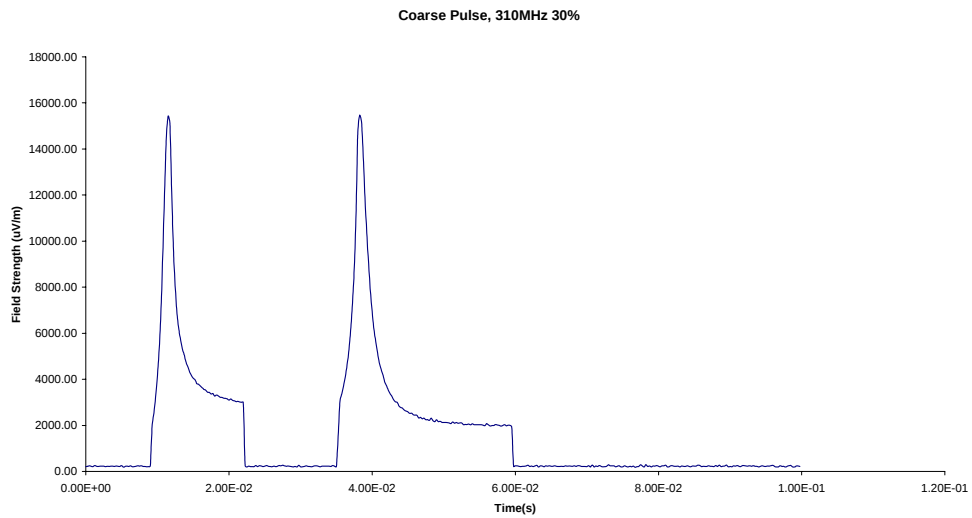


7.4.8.4. Fine Tuning Pulse (310MHz)


Fine Pulse, 310 MHz, 30%

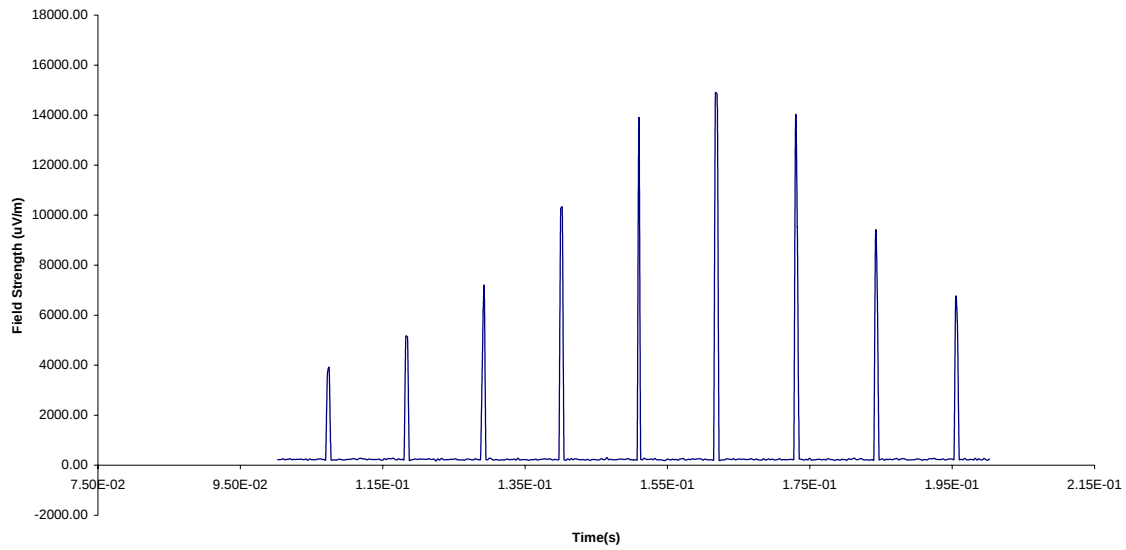**7.4.8.5. Coarse Tuning Pulse (418 MHz)**

Coarse Pulse, 418 MHz, 30%

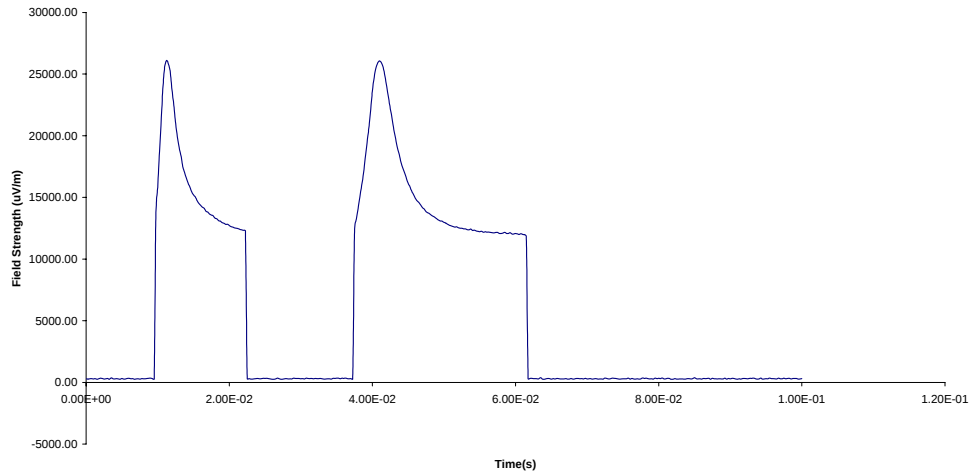

7.4.8.6. Fine Tuning Pulse (418MHz)

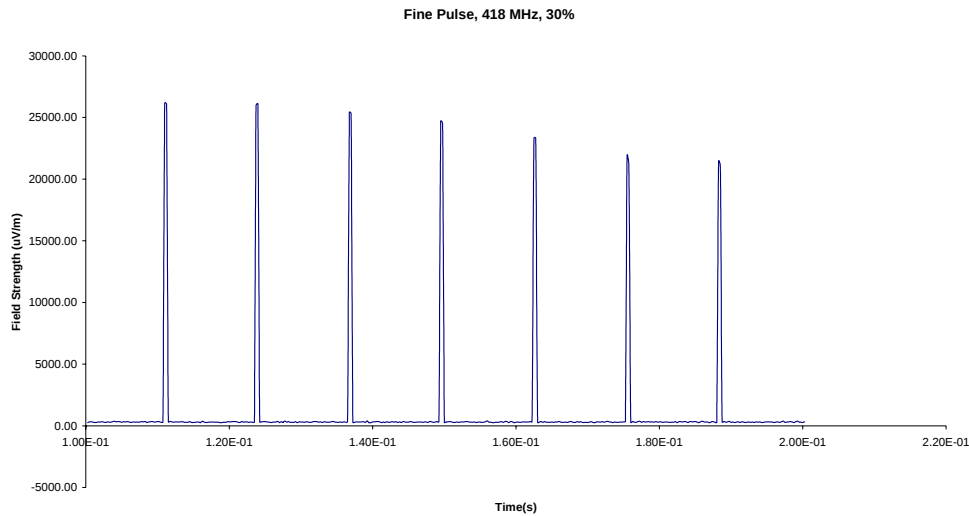

7.4.8.7. Summary of Tuning Pulse Measurements

Measurement Settings:

Resolution Bandwidth: 1MHz

Video Bandwidth: 3 MHz

Sweep Time: 300 msec.

For this measurement 1200 points were recorded and the values averaged over 100 msec. windows that captured either the coarse or fine tuning pulses.

Coarse	Frequency (MHz)	Average (uV/m)	Limit (uV/m)	Margin (dB)
	288	855	4917	15.2
	310	1708	5833	10.7
	418	5908	10333	4.9

Fine	Frequency (MHz)	Average (uV/m)	Limit (uV/m)	Margin (dB)
	288	389	4917	22.0
	310	582	5833	20.0
	418	907	10333	21.1

7.5. Formulas and Sample Calculations

7.5.1. Adjustment to account for duty cycle

The spectrum analyzers used for making the measurements in this report automatically corrects for cable correction and antenna factors using values stored in memory taken from the most recent calibration (in the case of antenna factors) and periodic cable loss measurements.

Formula 1: $FS(dBuV/m) = M(dBuV) + AF(dB/m) + CF(dB)$

The presented field strength is computed by the spectrum analyzer by taking the measured level and adding to it the antenna factor and cable loss corrections. The

measurement presented in gathered using the spectrum analyzer's peak-hold capability.

Formula 2: Average Level(dBuV/m) = Peak Level (dBuV/m) + duty cycle factor(dB).
The peak measurement is adjusted to an average level by a duty cycle described below.

The duty cycle factor to apply is determined for the duty cycles of 30%, 50%, and 80% as follows:

For 30% (0.30):	duty cycle factor(dB) = $20 \cdot \log(0.3) = -10.46$
For 50% (0.50):	duty cycle factor(dB) = $20 \cdot \log(0.5) = -6.02$
For 80% (0.80):	duty cycle factor(dB) = $20 \cdot \log(0.8) = -1.94$

Example calculation:

With the EUT programmed with a 30% duty cycle a measurement of 74 dBuV/m is taken (about 5000 uV/m), the adjusted level would be:

$$74 + (-10.46) = 63.54 \text{ dBuV/m (example)}$$

7.5.2. Calculation of FCC limits from 15.231.

The prescribed limit in the range of 260 MHz to 470 MHz is stated as a linear interpolation between 3750 uV/m and 12500 uV/m. The equation used to calculate the limit using this criteria is:

$$\text{FCC limit} = 41.67 \cdot f - 7083.33$$

(Where 'f' is the measurement frequency in MHz.)

The limit is dBuV/m is then:

$$\text{dB limit} = 20 \cdot \log_{10}(\text{FCC limit uV/m}) = 20 \cdot \log_{10}(41.67 \cdot f - 7083.33)$$

(log₁₀ is used to indicated the use of a base 10 logarithm)

This results in the following limits for the fundamentals:

288MHz	$20 \cdot \log_{10}(4917.6) = 73.8 \text{ dBuV/m}$
310MHz	$20 \cdot \log_{10}(5834.4) = 75.3 \text{ dBuV/m}$
390MHz	$20 \cdot \log_{10}(9168.0) = 79.2 \text{ dBuV/m}$
418MHz	$20 \cdot \log_{10}(10334.7) = 80.3 \text{ dBuV/m}$

8. Photos of Product Tested

8.1. Front View

Please refer to attachment named "front_view.jpg"

8.2. Rear View

Please refer to attachment named "rear_view.jpg"

8.3. Unit Disassembled

Please refer to attachment named "d_assym.jpg"

8.4. Homelink® Board

Please refer to attachment named "lx_front.jpg"

Please refer to attachment named "lx_back.jpg"

Please refer to attachment name "hl3.jpg" (Close-up of Homelink section of board).

9. Other Attachments and Description

9.1. User Manual

Please refer to attachment "user_manual.pdf".

9.2. Schematics/ Tuning Information

For schematics please refer to attachment "schematics.pdf".

For tuning information please refer to attachment "tuning.pdf".

9.3. Theory of Operation

For schematics please refer to attachment "theory_op.pdf"