

System Check_H2450


DUT: Dipole 2450 MHz; Type:D2450V2; SN:927

Communication System: CW; Frequency: 2450 MHz;Duty Cycle: 1:1
Medium: H2450 Medium parameters used: $f = 2450\text{ MHz}$; $\sigma = 1.78\text{ S/m}$; $\epsilon_r = 40.05$; $\rho = 1000\text{ kg/m}^3$
Ambient Temperature : $22.7\text{ }^\circ\text{C}$; Liquid Temperature : $22.5\text{ }^\circ\text{C}$

- DASY5 Configuration:
- Probe: EX3DV4 - SN7624; Calibrated: 2023/9/6;
 - Electronics: DAE4 Sn1286; Calibrated: 2024/2/22
 - Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
 - Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Pin=250mW/Area Scan (41x51x1): Interpolated grid: $dx=2.000\text{ mm}$, $dy=2.000\text{ mm}$
Maximum value of SAR (interpolated) = 25.3 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 112.8 V/m ; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 30.8 W/kg
SAR(1 g) = 13.12 W/kg ; SAR(10 g) = 6.10 W/kg
Maximum value of SAR (measured) = 23.2 W/kg

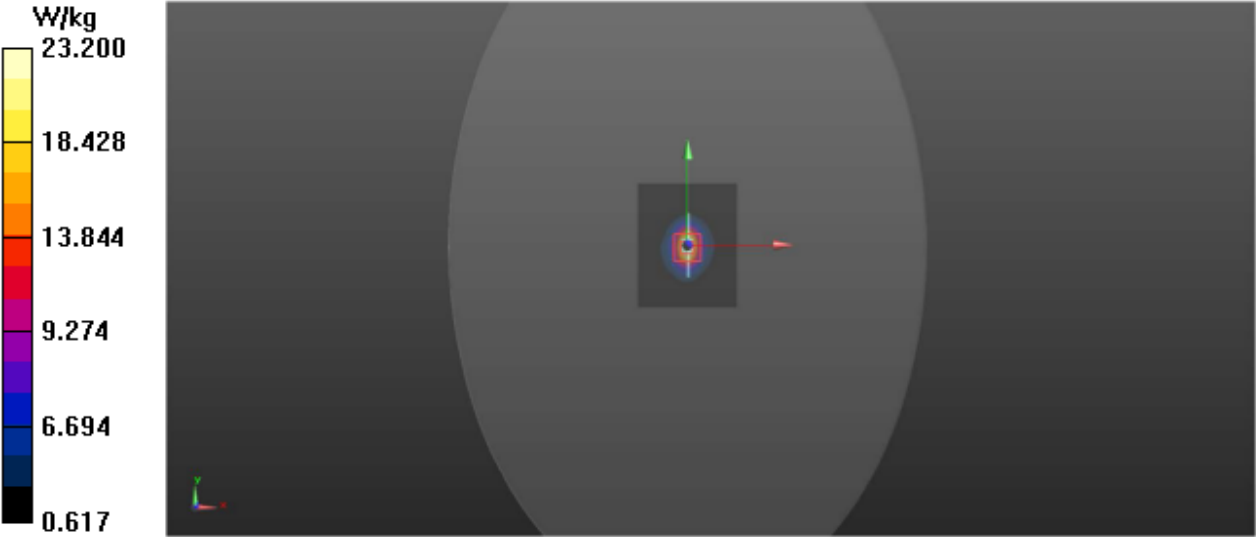

System Check_H5250


DUT: Dipole 5GHzV2;Type:D5GHzV2; SN:1169

Communication System: CW; Frequency: 5250 MHz;Duty Cycle: 1:1
Medium: H5G Medium parameters used: f = 5250 MHz; $\sigma = 4.74 \text{ S/m}$; $\epsilon_r = 36.52$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : 21.5 °C; Liquid Temperature : 21.3 °C

- DASY5 Configuration:
- Probe: EX3DV4 - SN7624; Calibrated: 2023/9/6;
 - Electronics: DAE4 Sn1286; Calibrated: 2024/2/22
 - Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
 - Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Pin=100mW/Area Scan (91x91x1): Interpolated grid: dx=2.000 mm, dy=2.000 mm
Maximum value of SAR (interpolated) = 22.1 W/kg

Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 57.178 V/m; Power Drift = 0.12 dB
Peak SAR (extrapolated) = 37.5 W/kg
SAR(1 g) =7.60 W/kg; SAR(10 g) = 2.12 W/kg
Maximum value of SAR (measured) = 23.3 W/kg

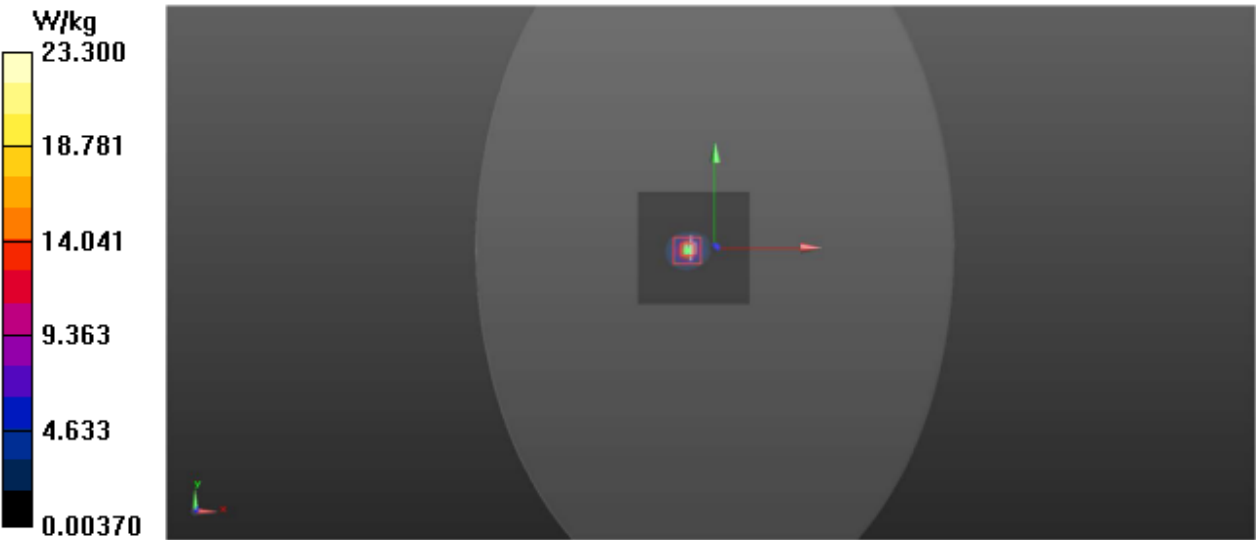

System Check_H5750

DUT: Dipole 5GHzV2;Type:D5GHzV2; SN:1169

Communication System: CW; Frequency: 5750 MHz;Duty Cycle: 1:1

Medium: H5G Medium parameters used: $f = 5750 \text{ MHz}$; $\sigma = 5.32 \text{ S/m}$; $\epsilon_r = 35.66$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $22.3 \text{ }^\circ\text{C}$; Liquid Temperature : $22.1 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; Calibrated: 2023/9/6;
- Electronics: DAE4 Sn1286; Calibrated: 2023/7/27
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Pin=100mW/Area Scan (91x91x1): Interpolated grid: $dx=2.000 \text{ mm}$, $dy=2.000 \text{ mm}$

Maximum value of SAR (interpolated) = 20.9 W/kg

Pin=100mW/Zoom Scan (7x7x5)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 50.982 V/m ; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 35.4 W/kg

SAR(1 g) = 7.55 W/kg ; SAR(10 g) = 2.13 W/kg

Maximum value of SAR (measured) = 21.5 W/kg

