

TEST REPORT

FCC Sub6 n38 Test for TFGMEIBBCD4
Class II Permissive Change

APPLICANT
LG Electronics Inc.

REPORT NO.
HCT-RF-2409-FC013-R1

DATE OF ISSUE
October 7, 2024

Tested by
Jung Ki Lim



Technical Manager
Jong Seok Lee



HCT CO., LTD.
Bongjai Huh
BongJai Huh / CEO

**HCT CO.,LTD.**

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea
Tel. +82 31 645 6300 Fax. +82 31 645 6401

TEST REPORT

REPORT NO.

HCT-RF-2409-FC013-R1

DATE OF ISSUE

October 07, 2024

Additional Model

TFGMEIBBCD5, TFGMEIBBCD6, TFGMEIBBCD7, TFGMEIBBCD8,
TFGMEIBBCD9, TFGMEIBBCDA, TFGMEIBBCDB, TFGMEIBBCDC

Applicant

LG Electronics Inc.

10, MagokJungang-ro, Gangseo-gu, Seoul 07796, Republic of Korea

Product Name

GM Onstar Gen38 ROW

Model Name

TFGMEIBBCD4

Date of Test

May 07, 2024 ~ September 26, 2024

Location of Test

☒ Permanent Testing Lab ☐ On Site Testing

(Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea)

FCC ID

BEJTFGMEIBBCD4

FCC Classification

PCS Licensed Transmitter (PCB)

Test Standard Used

FCC Rule Part(s) : § 27

Test Results

PASS

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	September 26, 2024	Initial Release
1	October 07, 2024	Added the Note (Page 21.)

Notice

Content

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section § 2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

The laboratory is not accredited for the test results marked *.

Information provided by the applicant is marked **.

Test results provided by external providers are marked ***.

When confirmation of authenticity of this test report is required, please contact www.hct.co.kr

The test results in this test report are not associated with the ((KS Q) ISO/IEC 17025) accreditation by KOLAS (Korea Laboratory Accreditation Scheme) / A2LA (American Association for Laboratory Accreditation) that are under the ILAC (International Laboratory Accreditation Cooperation) Mutual Recognition Agreement (MRA).

CONTENTS

1. GENERAL INFORMATION	5
1.1. MAXIMUM OUTPUT POWER.....	6
2. INTRODUCTION	7
2.1. DESCRIPTION OF EUT	7
2.2. MEASURING INSTRUMENT CALIBRATION.....	7
2.3. TEST FACILITY	7
3. DESCRIPTION OF TESTS.....	8
3.1 TEST PROCEDURE.....	8
3.2 CONDUCTED OUTPUT POWER	9
3.3 RADIATED TEST	10
3.3.1 RADIATED POWER	11
3.3.2 RADIATED SPURIOUS EMISSIONS	12
3.4 PEAK- TO- AVERAGE RATIO.....	14
3.5 OCCUPIED BANDWIDTH.	16
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	17
3.7 BAND EDGE	18
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE.....	20
3.9 WORST CASE(RADIATED TEST).....	21
3.10 WORST CASE(CONDUCTED TEST)	22
4. LIST OF TEST EQUIPMENT	23
5. MEASUREMENT UNCERTAINTY	25
6. SUMMARY OF TEST RESULTS.....	26
7. EMISSION DESIGNATOR	27
8. TEST DATA.....	28
8.1 Conducted Output Power.....	28
8.2 EQUIVALENT ISOTROPIC RADIATED POWER	29
8.2.1 External Antenna	29
8.2.2 Internal Antenna.....	30
8.3 RADIATED SPURIOUS EMISSIONS	31
8.3.1 External Antenna	31
8.3.2 Internal Antenna.....	32
8.4 PEAK-TO-AVERAGE RATIO.....	33
8.5 OCCUPIED BANDWIDTH	34
8.6 CONDUCTED SPURIOUS EMISSIONS.....	35
8.7 CHANNEL EDGE.....	36
8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE.....	37
9. TEST PLOTS	38
10. ANNEX A_ TEST SETUP PHOTO	60

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	LG Electronics Inc.
Address:	10, Magok Jungang-ro, Gangseo-gu, Seoul 07796, Republic of Korea
FCC ID:	BEJTFGMEIBBCD4
Application Type:	Class II Permissive Change
FCC Classification:	PCS Licensed Transmitter (PCB)
FCC Rule Part(s):	§ 27
EUT Type:	GM Onstar Gen38 ROW
Model(s):	TFGMEIBBCD4
Additional Model(s)	TFGMEIBBCD5, TFGMEIBBCD6, TFGMEIBBCD7, TFGMEIBBCD8, TFGMEIBBCD9, TFGMEIBBCDA, TFGMEIBBCDB, TFGMEIBBCDC
SCS(kHz):	30
Bandwidth(MHz):	20
Waveform:	CP-OFDM, DFT-S-OFDM
Modulation:	DFT-S-OFDM: PI/2 BPSK, QPSK, 16 QAM, 64 QAM, 256 QAM CP-OFDM: QPSK, 16 QAM, 64 QAM, 256 QAM
Tx Frequency:	2580 MHz – 2610 MHz (Sub6 n38 (20 MHz))
Date(s) of Tests:	May 07, 2024 ~ September 26, 2024
Serial number:	Radiated : EBR36018942k_#108 Conducted : EBR42280003K_#104
External Antenna Information	ANT5 : 86531607 ANT4 : 86575530 DUT4 : 85608774

1.1. MAXIMUM OUTPUT POWER

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP External Antenna		EIRP Internal Antenna	
				Max. Power (W)	Max. Power (dBm)	Max. Power (W)	Max. Power (dBm)
Sub6 n38 (20)	2580 – 2610	18M0G7D	PI/2 BPSK	0.298	24.74	1.159	30.64
		18M0G7D	QPSK	0.296	24.72	1.140	30.57
		18M0W7D	16 QAM	0.237	23.75	0.910	29.59
		17M9W7D	64 QAM	0.167	22.23	0.646	28.10
		17M9W7D	256 QAM	0.104	20.19	0.409	26.12

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a GM Onstar Gen38 ROW with GSM/GPRS/EGPRS/UMTS and LTE, Sub6.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY


The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Channel Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- KDB 971168 D01 v03r01 – Section 5.2
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 CONDUCTED OUTPUT POWER

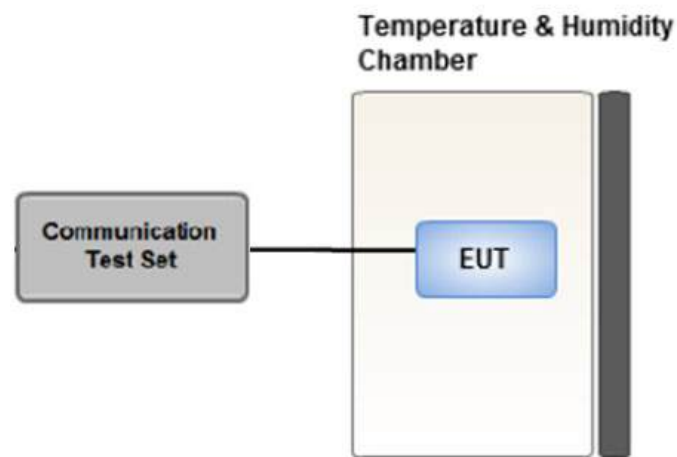

Test setup

Test Overview

When an average power meter is used to perform RF output power measurements, the fundamental condition that measurements be performed only over durations of active transmissions at maximum output power level applies.

Conducted Output Power was tested in accordance with KDB971168 D01 Power Meas License Digital Systems v03r01, Section 5.2.


3.3 RADIATED TEST

Test Overview


Radiated tests are performed in the semi-anechoic chamber. The equipment under test is placed on a non-conductive table on semi-anechoic chamber.

Test Configuration


Below 30 MHz

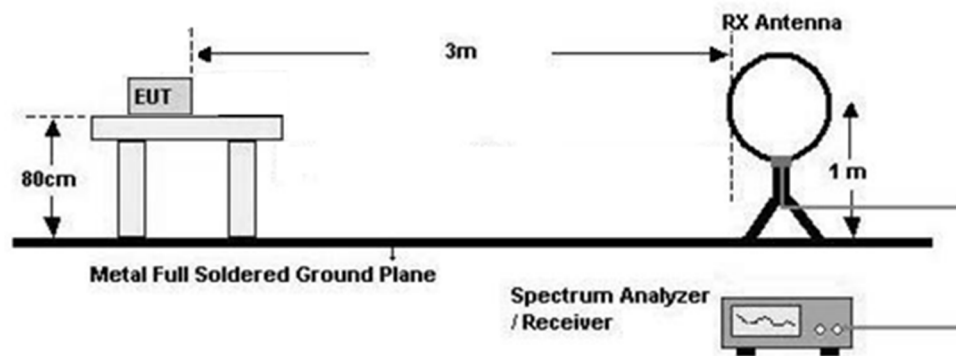

30 MHz - 1 GHz

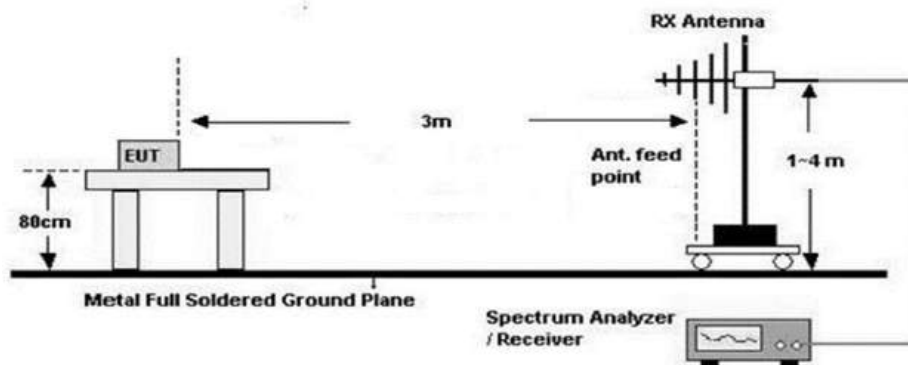

Above 1 GHz

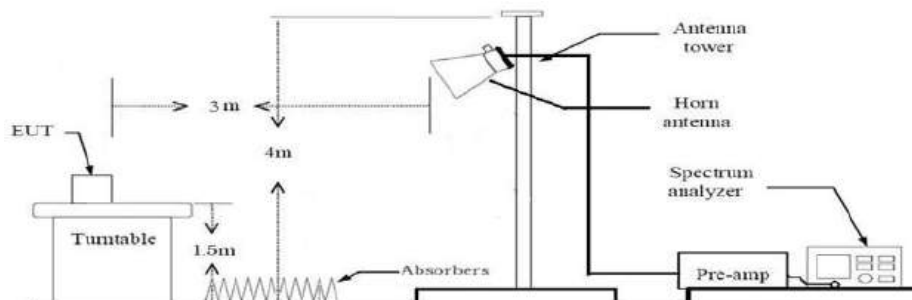

3.3.1 RADIATED POWER

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW $\geq$ 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points > 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The EUT is placed on a turntable, which is 0.8 m above ground plane. (Below 1 GHz)
2. The EUT is placed on a turntable, which is 1.5 m above ground plane. (Above 1 GHz)
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
6. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.
7. $\text{Total(dB}\mu\text{V/m)} = \text{Measured Value(dB}\mu\text{V)} + \text{Cable Loss(dB)} + \text{Antenna Factor(dB/m)} + \text{Distance Factor(D.F)}$
8. EIRP (dBm)
 $= \text{Total (dB}\mu\text{V/m)} + 20 \log D - 104.8$ (where D is the measurement distance in meters. D=3)
 $= \text{Total (dB}\mu\text{V/m)} - 95.2(\text{dB})$
9. $\text{EIRP(dBm)} = \text{EIRP(dBm)} - 2.15(\text{dB})$

3.3.2 RADIATED SPURIOUS EMISSIONS

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
2. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Below 30 MHz

1. The loop antenna was placed at a location 3 m from the EUT
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3 \text{ m}/300 \text{ m}) = - 80 \text{ dB}$
Measurement Distance : 3 m
6. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3 \text{ m}/30 \text{ m}) = - 40 \text{ dB}$
Measurement Distance : 3 m
7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
8. EIRP (dBm)
= Total (dB μ V/m) + $20 \log D - 104.8$ (where D is the measurement distance in meters. D=3)
= Total (dB μ V/m) - 95.2(dB)
9. EIRP(dBm) = EIRP(dBm) - 2.15(dB)

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.


Below 1 GHz

1. The EUT is placed on a turntable, which is 0.8 m above ground plane.
2. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)
7. Total(dBμV/m) = Measured Value(dBμV) + Cable Loss(dB) + Antenna Factor(dB/m) + Distance Factor(D.F)
8. EIRP (dBm)
= Total (dBμV/m) + 20 log D – 104.8 (where D is the measurement distance in meters. D=3)
= Total (dBμV/m) - 95.2(dB)
9. EIRP(dBm) = EIRP(dBm) - 2.15(dB)

Above 1 GHz

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. Total(dBμV/m) = Measured Value(dBμV) + Cable Loss(dB) + Antenna Factor(dB/m) + Distance Factor(D.F)
+ H.P.F(dB) - Amp Gain(dB)
8. EIRP (dBm)
= Total (dBμV/m) + 20 log D – 104.8 (where D is the measurement distance in meters. D=3)
= Total (dBμV/m) - 95.2(dB)

3.4 PEAK- TO- AVERAGE RATIO

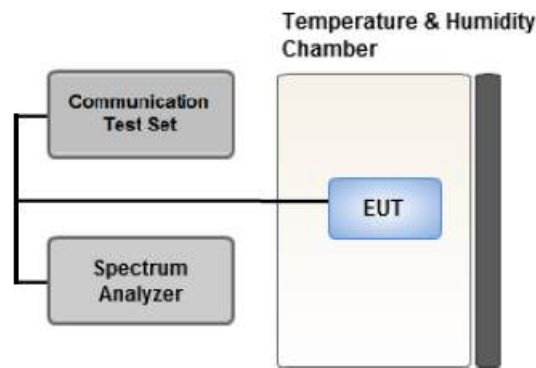

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - .- for continuous transmissions, set to 1 ms,
 - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

1. Set the RBW $\geq$ OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) $\times$ (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW $\geq$ OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \log (1/0.25)] = 6 \text{ dB}$ if the duty cycle is a constant 25 %.

3.5 OCCUPIED BANDWIDTH.

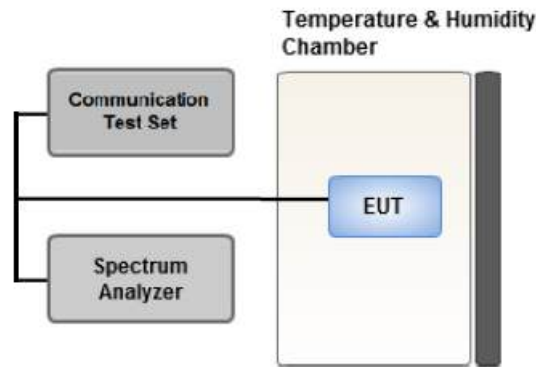

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. $RBW = 1 - 5 \%$ of the expected OBW
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within $1 - 5 \%$ of the 99 % occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

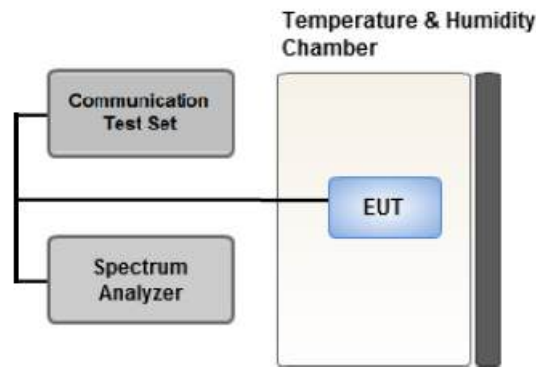

Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW $\geq$ 3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep $\geq$ 2 x Span / RBW

3.7 BAND EDGE

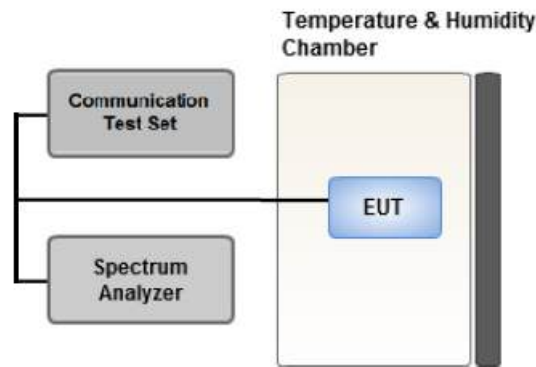

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings


1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Notes

1. The attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge,
2. $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge.
3. $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge.
4. The attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz.
5. $55 + 10 \log (P)$ dB at or below 2490.5 MHz.
6. X is the greater of 6MHz or the actual emission bandwidth
7. The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer

Where Margin < 1 dB the emission level is either corrected by $10 \log(1 \text{ MHz} / \text{RB})$ or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

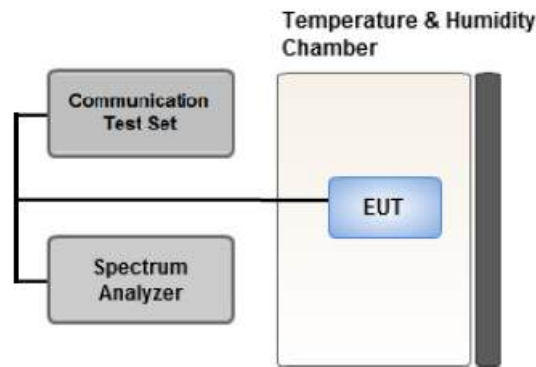

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.
- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter.
Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
Mode : SA, NSA
Worst case : SA
Mode : Internal Antenna, External Antenna (ANT 5, ANT 4, DUT 4)
Worst case : Internal Antenna, External Antenna (ANT 5)
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
- Please refer to the table below.
- TFGMEIBBCD4 & additional models were tested and the worst case results are reported.
(Worst case : TFGMEIBBCD4)
- Radiated Spurious emissions are measured while operating in EN-DC mode with Sub 6 NR carrier as well as an LTE carrier (anchor).
All EN-DC mode of operation (=anchor) were investigated and the test results were measured No Peak Found.
The test results which are attenuated more than 20 dB below the permissible value, so it was not reported.

[External Antenna Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Equivalent Isotropic Radiated Power	PI/2 BPSK, QPSK, 16 QAM, 64 QAM, 256 QAM	See Section 8.2.1		Only X
Radiated Spurious and Harmonic Emissions	PI/2 BPSK	See Section 8.3.1		Only X

[Internal Antenna Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Equivalent Isotropic Radiated Power	PI/2 BPSK, QPSK, 16 QAM, 64 QAM, 256 QAM	See Section 8.2.2		Z
Radiated Spurious and Harmonic Emissions	PI/2 BPSK	See Section 8.3.2		Y

3.10 WORST CASE(CONDUCTED TEST)

- Waveform : All Waveform of operation were investigated and the worst case configuration results are reported.
(Worst case: DFT-S-OFDM)
- Modulation : All Modulation of operation were investigated and the worst case configuration results are reported.
(Worst case: PI/2 BPSK)
- All modes of operation were investigated and the worst case configuration results are reported.
Mode: NSA, SA
Worst case: SA
- All RB sizes, offsets of operation were investigated and the worst case configuration results are reported.
Please refer to the table below.
- TFGMEIBBCD4 & additional models were tested and the worst case results are reported.
(Worst case : TFGMEIBBCD4)

[Worst case]					
Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth Peak- to- Average Ratio	PI/2 BPSK, QPSK, 16 QAM, 64 QAM, 256 QAM	20	Mid	Full RB	0
Channel Edge	PI/2 BPSK	20	Low	1	0
			High	1	50
			Low, Mid, High	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	PI/2 BPSK	20	Low, Mid, High	1	1

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Antenna Position Tower	MA4640/800-XP-ET	Innco systems	N/A	N/A	N/A
Turn Table	DS2000-S	Innco systems	N/A	N/A	N/A
Turn Table	Turn Table	Ets	N/A	N/A	N/A
Controller (Antenna mast & Turn Table)	CO3000	Innco systems	CO3000/1251/4 8920320/P	N/A	N/A
Amp & Filter Bank Switch Controller	FBSM-01B	TNM system	TM20090002	N/A	N/A
RF Switch System	TMX0132C	TNM System	TM21100002	N/A	N/A
RF Switch System	FBSR-04C(3G HPF+LNA)	TNM System	S4L1	04/11/2025	Annual
RF Switch System	FBSR-04C(LNA)	TNM System	S4L4	04/11/2025	Annual
RF Switch System	FBSR-04C(Thru)	TNM System	S4L6	04/11/2025	Annual
HIGHPASS FILTER	WHKX10-900-1000- 15000-40SS	WAINWRIGHT INSTRUMENTS	16	07/24/2025	Annual
HIGHPASS FILTER	WHNX6.0/26.5G- 6SS	WAINWRIGHT INSTRUMENTS	1	12/11/2024	Annual
Power Amplifier	CBL18265035	CERNEX	22966	11/17/2024	Annual
Power Amplifier	CBL26405040	CERNEX	25956	02/26/2025	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/07/2026	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120	Schwarzbeck	937	02/13/2025	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	09/20/2026	Biennial
Bilog Antenna	VULB9160	Schwarzbeck	3150	03/09/2025	Biennial
Hybrid Antenna	VULB9160	Schwarzbeck	760	02/24/2025	Biennial
Trilog Broadband Antenna	VULB 9168	Schwarzbeck	895	08/28/2026	Biennial
Chamber	SU-642	ESPEC	93008124	02/19/2025	Annual
Power Splitter(DC~26.5 GHz)	11667B	Hewlett Packard	11275	02/19/2025	Annual
DC Power Supply	E3632A	Agilent	MY40010147	08/06/2025	Annual
4-Way Divider	ZC4PD-K1844+	Mini-Circuits	942907	09/10/2025	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	04/17/2025	Annual
Spectrum Analyzer (10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	101733	09/19/2025	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/05/2025	Annual
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262287701	05/16/2025	Annual

Wideband Radio Communication Tester	MT8000A	Anritsu Corp.	6262302511	05/14/2025	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/26/2025	Annual
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	04/19/2025	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/17/2025	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ($\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.98 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.36 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.70 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.52 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.66 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.58 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §27.53(m)(4)	■ $< 40 + 10\log_{10} (P[\text{Watts}])$ at Channel edges ■ $< 43 + 10\log_{10} (P[\text{Watts}])$ between 5 and X MHz from Channel edges ■ $< 55 + 10\log_{10} (P[\text{Watts}])$ beyond X MHz beyond from Channel edges ■ $< 43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz	PASS
Conducted Output Power	§2.1046	N/A	PASS
Frequency stability / variation of ambient temperature	§2.1055, §27.54	Emission must remain in band	PASS

Note:

1. Conducted test were tested using 5G Wireless Tester.

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§27.50(h)(2)	< 2 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §27.53(m)(4)	$< 55 + 10\log_{10} (P[\text{Watts}])$	PASS

Note:

1. Radiated tests were tested using 5G Wireless Tester.

7. EMISSION DESIGNATOR

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 Conducted Output Power

Bandwidth	SCS(kHz)	OFDM	Modulation	RB Size	RB Offset	Max.Average Power (dBm)		
						501204	518598	535998
						2506.02 MHz	2592.99 MHz	2679.99 MHz
20 MHz	30	DFT-s	pi/2 BPSK	1	1	24.87	24.84	24.54
				1	26	24.64	24.50	24.22
				1	49	24.76	24.67	24.41
				25	0	24.25	24.22	24.07
				25	13	24.71	24.58	24.45
				25	26	24.18	24.04	23.91
				50	0	24.21	24.14	23.97
			QPSK	1	1	24.85	24.79	24.54
				1	26	24.55	24.39	24.34
				1	49	24.76	24.74	24.58
				25	0	23.79	23.69	23.59
				25	13	24.70	24.57	24.48
				25	26	23.67	23.58	23.57
				50	0	23.71	23.63	23.48
			16QAM	1	1	23.89	23.83	23.46
			64QAM	1	1	22.32	22.05	22.08
			256QAM	1	1	20.45	20.18	20.13
		CP	QPSK	1	1	23.23	23.13	22.96

8.2 EQUIVALENT ISOTROPIC RADIATED POWER

8.2.1 External Antenna

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBμV)	A.F+C.L+D.F (dB/m)	Total (dBμV/m)	Pol.	Limit	EIRP		RB	
							W	W	dBm	Size	Offset
2580.000	Sub6 n38/ 20 MHz [30 kHz]	PI/2 BPSK	85.53	32.93	118.46	V	< 2.00	0.212	23.26	1	1
		QPSK	85.44	32.93	118.37	V		0.207	23.17		
		16-QAM	84.54	32.93	117.47	V		0.169	22.27		
		64-QAM	82.98	32.93	115.91	V		0.118	20.71		
		256-QAM	80.94	32.93	113.87	V		0.074	18.67		
2595.000		PI/2 BPSK	85.79	33.13	118.92	V		0.236	23.72	1	1
		QPSK	85.59	33.13	118.72	V		0.225	23.52		
		16-QAM	84.65	33.13	117.78	V		0.181	22.58		
		64-QAM	83.16	33.13	116.29	V		0.129	21.09		
		256-QAM	81.19	33.13	114.32	V		0.082	19.12		
2610.000		PI/2 BPSK	86.94	33.00	119.94	V	0.298	24.74	1	1	
		QPSK	86.92	33.00	119.92	V	0.296	24.72			
		16-QAM	85.95	33.00	118.95	V	0.237	23.75			
		64-QAM	84.43	33.00	117.43	V	0.167	22.23			
		256-QAM	82.39	33.00	115.39	V	0.104	20.19			

8.2.2 Internal Antenna

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBμV)	A.F+C.L+D.F (dB/m)	Total (dBμV/m)	Pol.	Limit	EIRP		RB	
							W	W	dBm	Size	Offset
2580.000		PI/2 BPSK	92.91	32.93	125.84	V		1.159	30.64	1	49
		QPSK	92.84	32.93	125.77	V		1.140	30.57		
		16-QAM	91.85	32.93	124.78	V		0.908	29.58		
		64-QAM	90.37	32.93	123.30	V		0.646	28.10		
		256-QAM	88.25	32.93	121.18	V		0.396	25.98		
2595.000	Sub6 n38/ 20 MHz [30 kHz]	PI/2 BPSK	92.58	33.13	125.71	V		1.125	30.51	1	49
		QPSK	92.49	33.13	125.62	V		1.102	30.42		
		16-QAM	91.57	33.13	124.70	V	< 2.00	0.891	29.50		
		64-QAM	90.05	33.13	123.18	V		0.628	27.98		
		256-QAM	87.99	33.13	121.12	V		0.391	25.92		
2610.000		PI/2 BPSK	92.82	33.00	125.82	V		1.153	30.62	1	1
		QPSK	92.77	33.00	125.77	V		1.140	30.57		
		16-QAM	91.79	33.00	124.79	V		0.910	29.59		
		64-QAM	90.24	33.00	123.24	V		0.637	28.04		
		256-QAM	88.32	33.00	121.32	V		0.409	26.12		

8.3 RADIATED SPURIOUS EMISSIONS

8.3.1 External Antenna

- NR Band: N38
- Bandwidth: 20 MHz
- Modulation: PI/2 BPSK
- Distance: 3 meters
- SCS: 30 kHz

Ch	Freq (MHz)	<u>Measured</u>	<u>A.F+C.L+D.F+</u>	Total (dBμV/m)	Pol.	Result (dBm)	Limit (dBm)	RB	
		<u>Level</u> (dBμV)	<u>H.P.F-A.G</u> (dB/m)					Size	Offset
516000 (2580.00)	5 160.00	61.73	-1.41	60.32	V	-34.88	-25.00	1	1
	7 740.00	51.91	5.15	57.06	V	-38.14	-25.00		
	10 320.00	46.88	11.16	58.04	V	-37.16	-25.00		
519000 (2595.00)	5 190.00	62.66	-1.17	61.49	V	-33.71	-25.00	1	1
	7 785.00	52.93	4.62	57.55	V	-37.65	-25.00		
	10 380.00	47.64	10.98	58.62	V	-36.58	-25.00		
522000 (2610.00)	5 220.00	63.72	-2.50	61.22	V	-33.98	-25.00	1	1
	7 830.00	52.25	5.55	57.80	V	-37.40	-25.00		
	10 440.00	46.86	11.02	57.88	V	-37.32	-25.00		

8.3.2 Internal Antenna

■ NR Band:	<u>N38</u>
■ Bandwidth:	<u>20 MHz</u>
■ Modulation:	<u>PI/2 BPSK</u>
■ Distance:	<u>3 meters</u>
■ SCS:	<u>30 kHz</u>

Ch	Freq (MHz)	<u>Measured Level (dBμV)</u>	<u>A.F+C.L+D.F+ H.P.F-A.G (dB/m)</u>	Total (dBμV/m)	Pol.	Result (dBm)	Limit (dBm)	RB	
								Size	Offset
516000 (2580.00)	5 160.00	63.54	-1.41	62.13	H	-33.07	-25.00	1	49
	7 740.00	51.46	5.15	56.61	H	-38.59	-25.00		
	10 320.00	46.48	11.16	57.64	H	-37.56	-25.00		
519000 (2595.00)	5 190.00	66.01	-1.17	64.84	H	-30.36	-25.00	1	49
	7 785.00	51.56	4.62	56.18	H	-39.02	-25.00		
	10 380.00	45.88	10.98	56.86	V	-38.34	-25.00		
522000 (2610.00)	5 220.00	65.37	-2.50	62.87	H	-32.33	-25.00	1	1
	7 830.00	52.21	5.55	57.76	H	-37.44	-25.00		
	10 440.00	45.71	11.02	56.73	H	-38.47	-25.00		

8.4 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
Sub6 n38	20 MHz	2595.00	BPSK	25	0	3.97
			QPSK			4.65
			16-QAM			5.67
			64-QAM			6.17
			256-QAM			6.70

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 39 ~ 43.

8.5 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
Sub6 n38	20 MHz	2595.00	BPSK	25	0	17.957
			QPSK			17.934
			16-QAM			17.957
			64-QAM			17.934
			256-QAM			17.935

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 44 ~ 48.


8.6 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
Sub6 n38	20	2580.000	4.0345	37.190	-80.202	-43.012	-25.00
		2595.000	9.6770	37.805	-80.797	-42.992	
		2610.000	6.0080	37.805	-79.935	-42.130	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 49 ~ 54.
2. Duty Cycle factor already applied on the factor.

- Duty Cycle Factor(dB) = 6.990

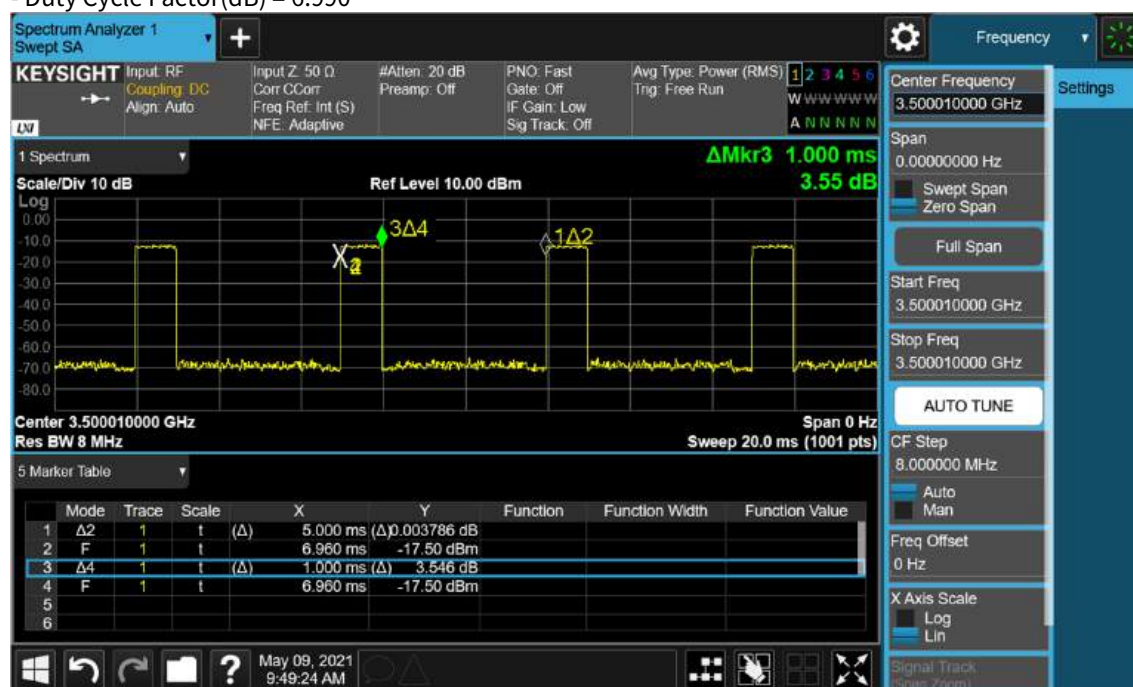

- Factor(dB) = Duty Cycle factor + Cable Loss + Ext. Attenuator + Power Splitter

- Result(dBm) = Reading + Factor

- ### 3. Factor(dB)

Frequency Range (GHz)	Factor [dB]
0.03 – 1	34.484
1 – 5	37.190
5 – 10	37.805
10 – 15	38.330
15 – 20	38.703
Above 20	39.345

8.7 CHANNEL EDGE

- Plots of the EUT's CHANNEL EDGE are shown Page 55 ~ 59.

8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

■ BandWidth: 20 MHz
 ■ Voltage(100 %): 13.500 VDC
 ■ Deviation Limit: Emission must remain in band


Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
2580.000	100%	+20(Ref)	2579 999 992	0.0	0.000 000	0.000
	100%	-30	2579 999 959	-32.4	-0.000 001	-0.013
	100%	-20	2579 999 980	-11.9	0.000 000	-0.005
	100%	-10	2579 999 980	-11.8	0.000 000	-0.005
	100%	0	2579 999 955	-36.9	-0.000 001	-0.014
	100%	+10	2579 999 976	-16.3	-0.000 001	-0.006
	100%	+30	2579 999 975	-16.8	-0.000 001	-0.007
	100%	+40	2579 999 975	-16.9	-0.000 001	-0.007
	100%	+50	2579 999 974	-18.0	-0.000 001	-0.007
	85%	+20	2579 999 934	-25.1	-0.000 001	-0.010
	115%	+20	2579 999 970	-21.4	-0.000 001	-0.008
2610.000	100%	+20(Ref)	2609 999 985	0.0	0.000 000	0.000
	100%	-30	2609 999 969	-16.1	-0.000 001	-0.006
	100%	-20	2609 999 971	-14.3	-0.000 001	-0.005
	100%	-10	2609 999 969	-16.0	-0.000 001	-0.006
	100%	0	2609 999 969	-16.7	-0.000 001	-0.006
	100%	+10	2609 999 971	-14.9	-0.000 001	-0.006
	100%	+30	2609 999 970	-15.8	-0.000 001	-0.006
	100%	+40	2609 999 970	-15.4	-0.000 001	-0.006
	100%	+50	2609 999 970	-15.9	-0.000 001	-0.006
	85%	+20	2609 999 955	-14.0	-0.000 001	-0.005
	115%	+20	2609 999 976	-9.0	0.000 000	-0.003

9. TEST PLOTS

NR38_20 M_PAR_Mid_BPSK_FullIRB



NR38_20 M_PAR_Mid_QPSK_FullRB

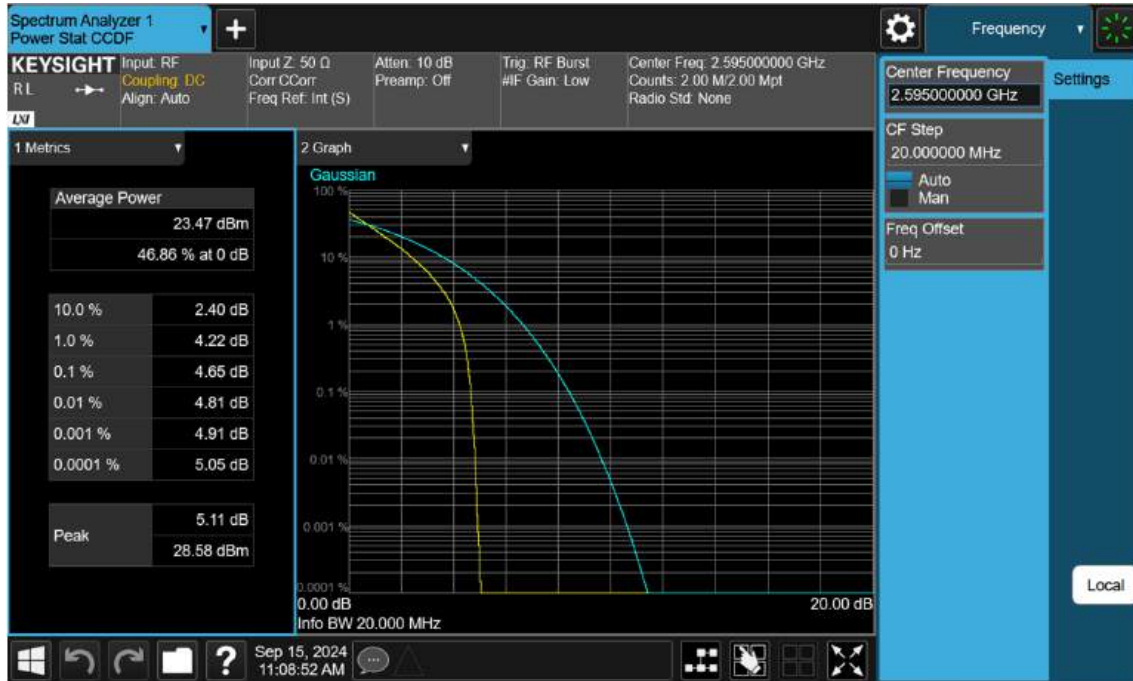

NR38_20 M_PAR_Mid_16QAM_FullRB



NR38_20 M_PAR_Mid_64QAM_FullRB



NR38_20 M_PAR_Mid_256QAM_FullRB




NR38_20 M_OBW_Mid_BPSK_FullRB



NR38_20 M_OBW_Mid_QPSK_FullIRB



NR38_20 M_OBW_Mid_16QAM_FullRB

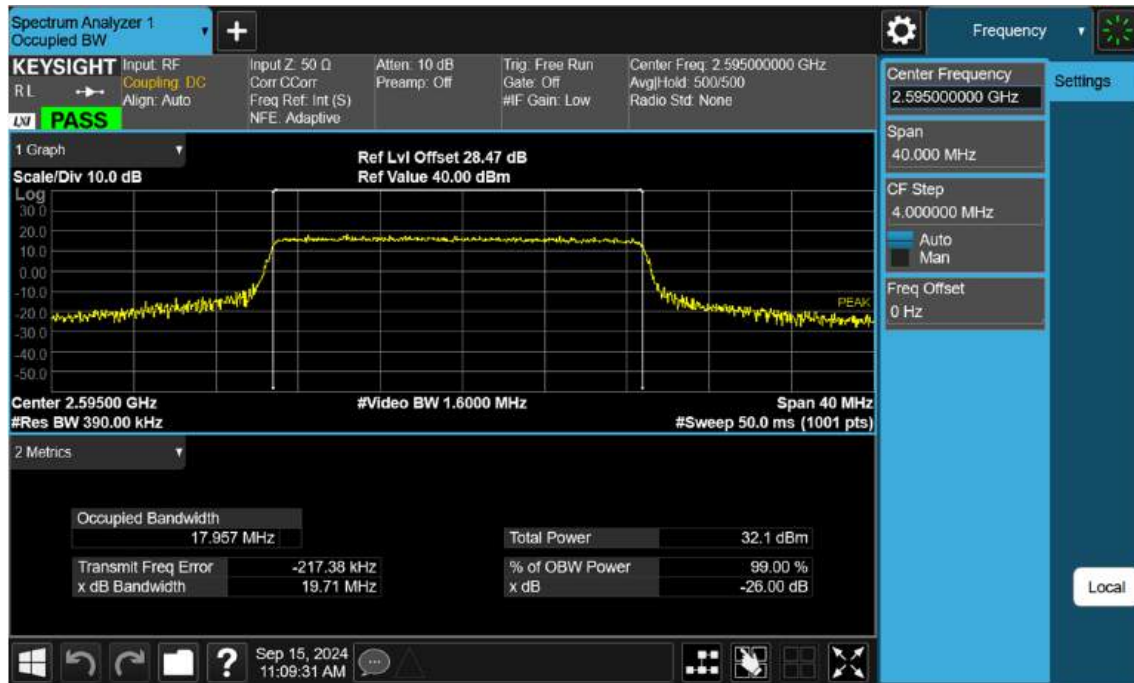


NR38_20 M_OBW_Mid_64QAM_FullRB




NR38_20 M_OBW_Mid_256QAM_FullRB



NR38_20 M_Conducted Spurious(30 M-10 G)_Low_BPSK_1RB

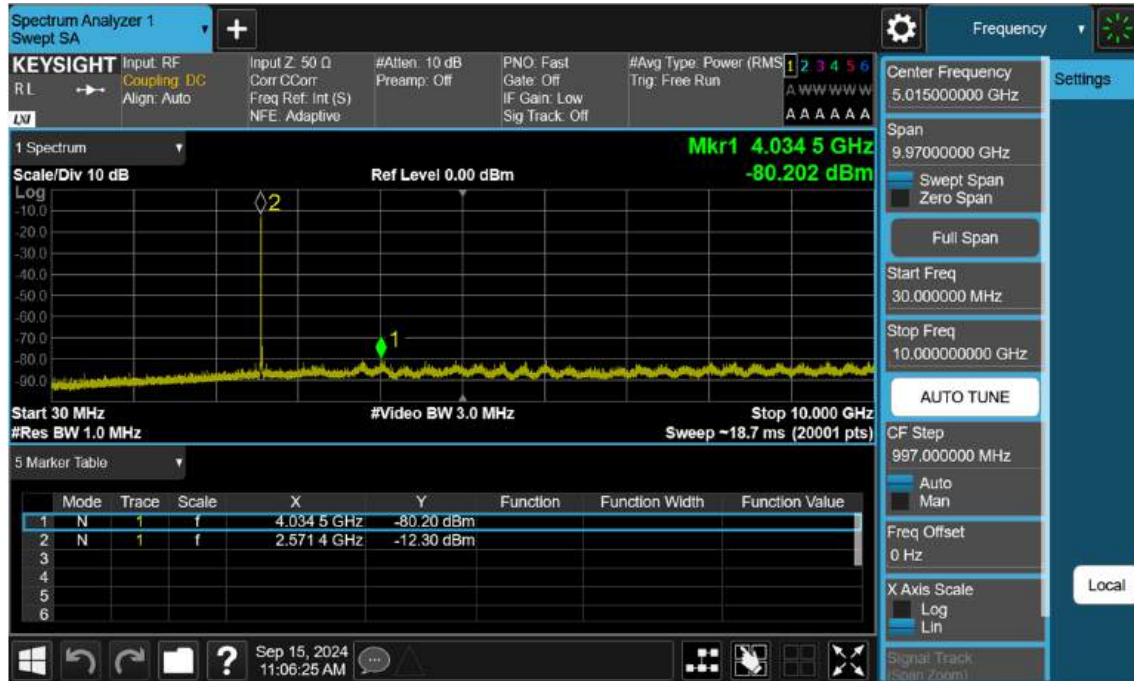


NR38_20 M_Conducted Spurious(30 M-10 G)_Mid_BPSK_FullIRB

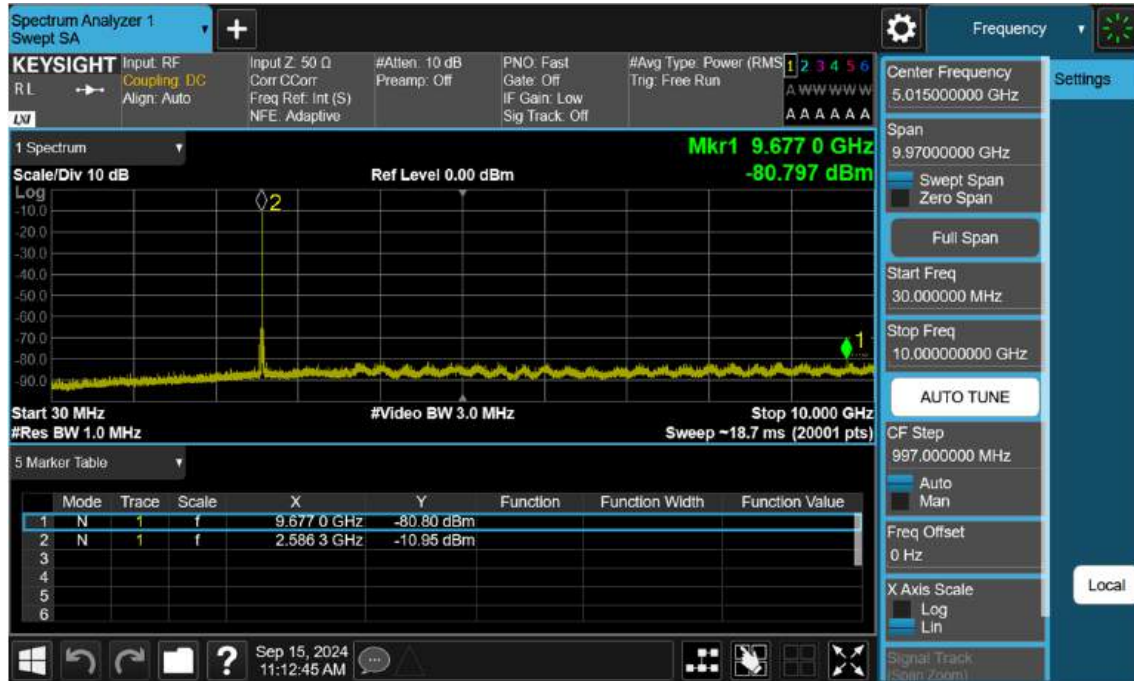


NR38_20 M_Conducted Spurious(30 M-10 G)_High_BPSK_1RB



NR38_20 M_Conducted Spurious(Above10 G)_Low_BPSK_1RB

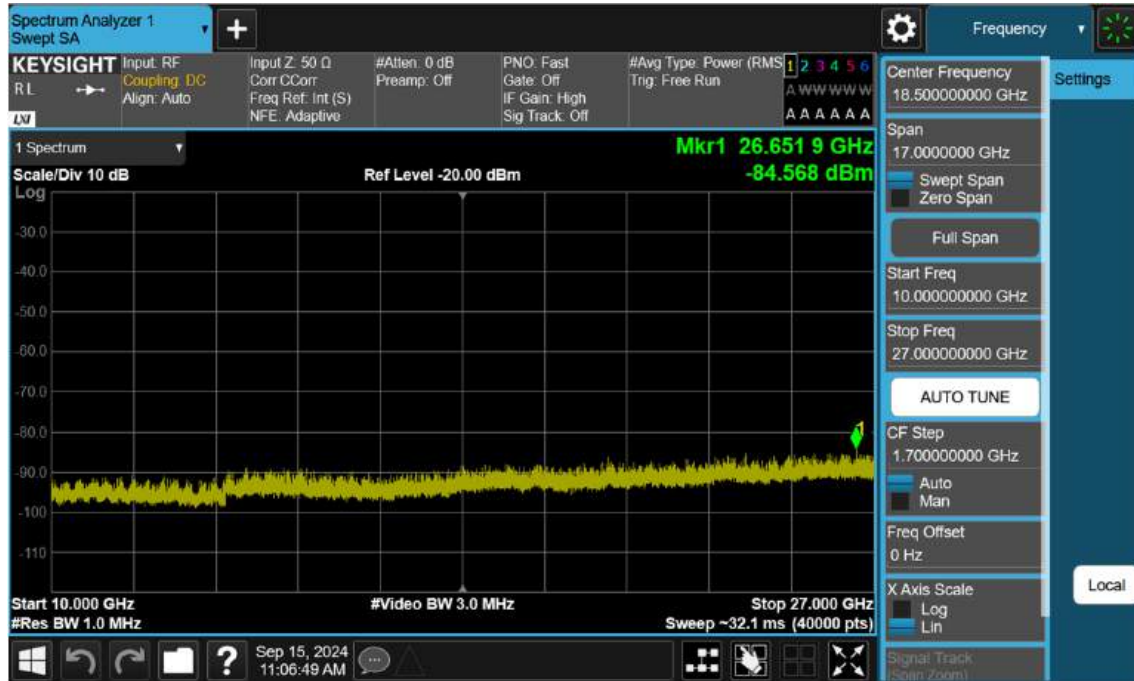


NR38_20 M_Conducted Spurious(Above10 G)_Mid_BPSK_1RB

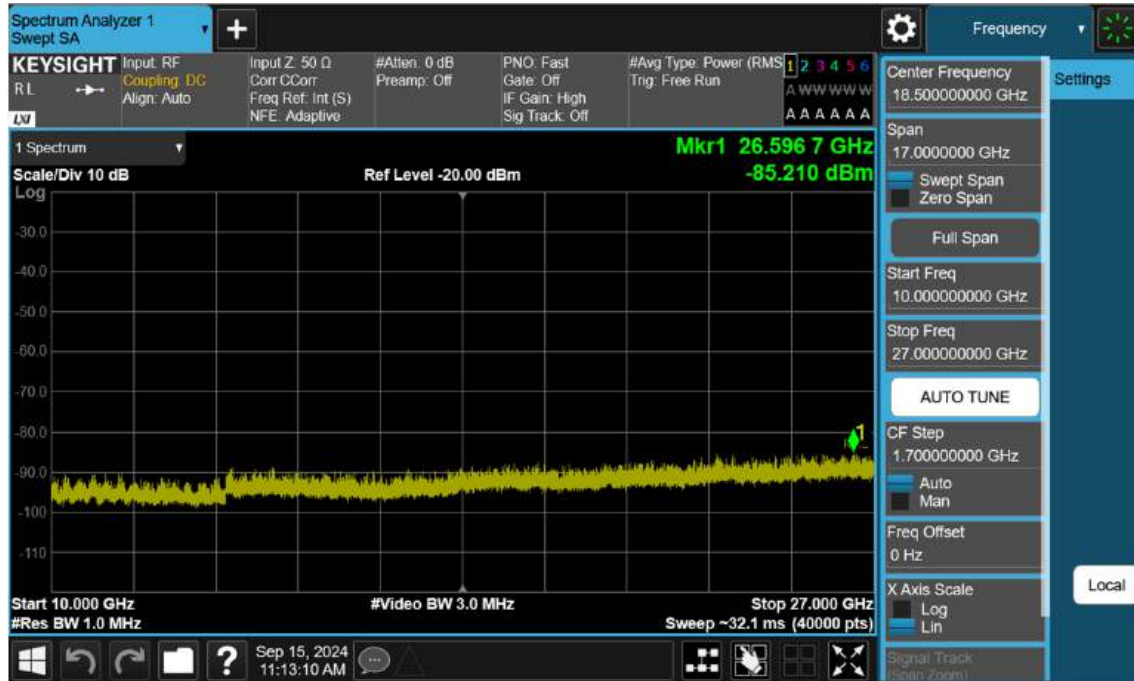

NR38_20 M_Conducted Spurious(Above10 G)_High_BPSK_1RB




NR38_20 M_Channel Edge_Low_BPSK_1RB

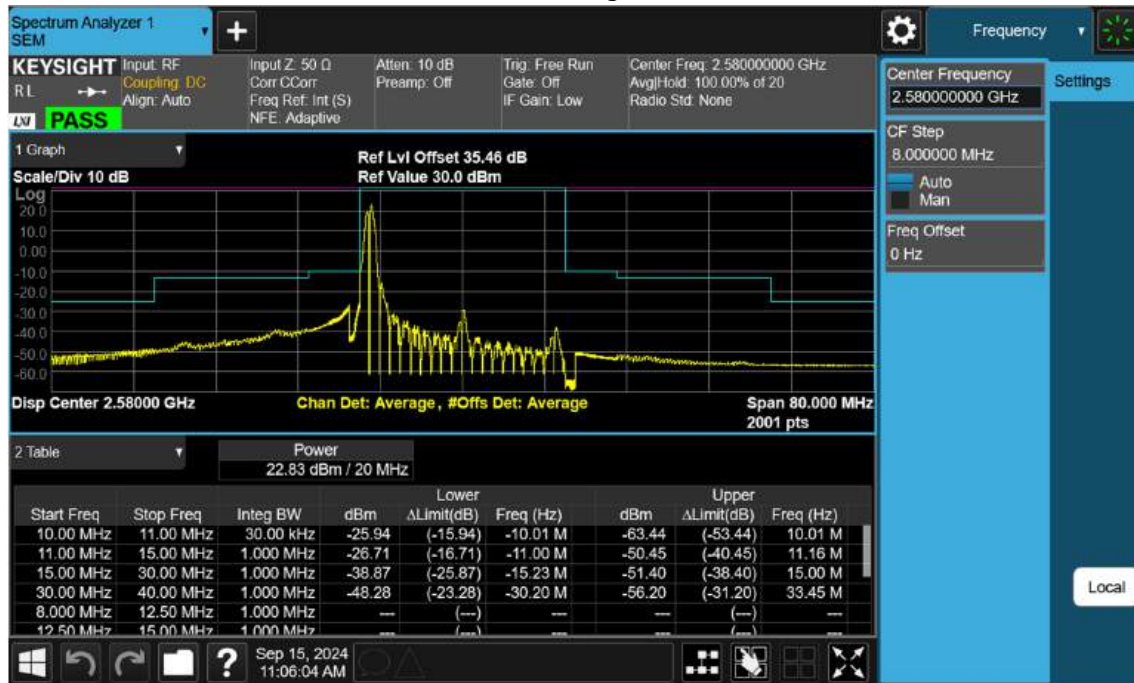

NR38_20 M_Channel Edge_Low_BPSK_FullRB



NR38_20 M_Channel Edge_Mid_BPSK_FullRB

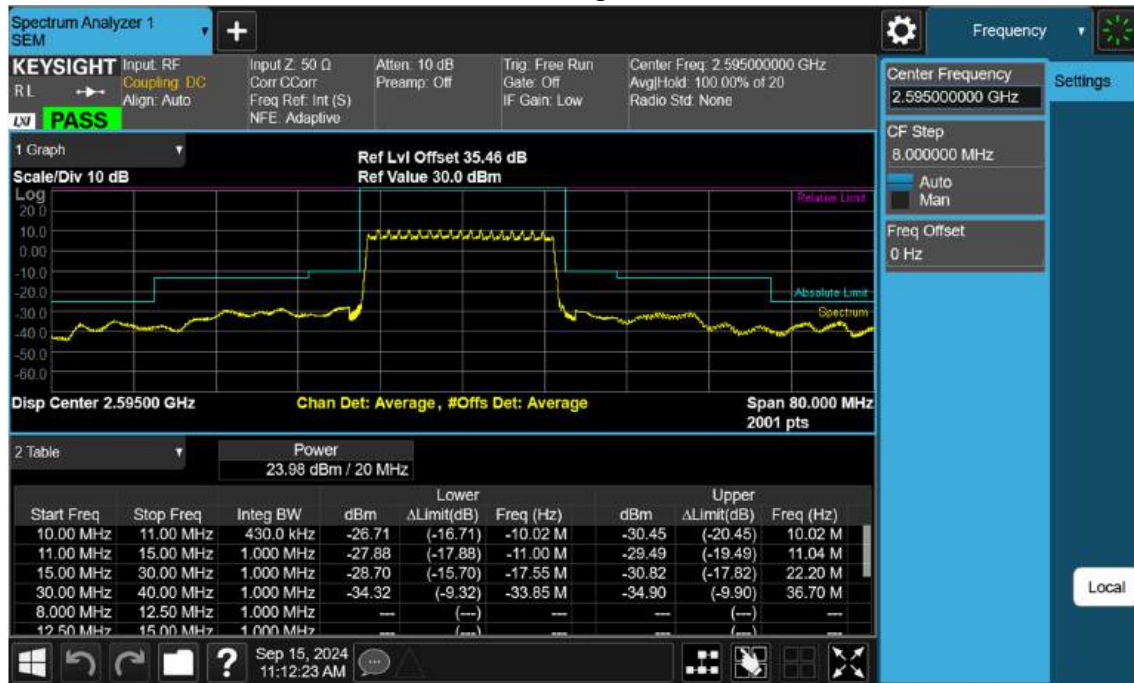

NR38_20 M_Channel Edge_High_BPSK_1RB



NR38_20 M_Channel Edge_High_BPSK_FullRB



10. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2409-FC013-P