



FCC RF Test Report

(NFC)

Report No.: JYTSZ-R12-2301746

Applicant: TECNO MOBILE LIMITED

Address of Applicant: FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE
19-25 SHAN MEI STREET FOTAN NT HONGKONG

Equipment Under Test (EUT)

Product Name: Mobile Phone

Model No.: CL6s

Trade Mark: TECNO

FCC ID: 2ADYY-CL6S

Applicable Standards: FCC CFR Title 47 Part 15C (§15.225)

Date of Sample Receipt: 23 Nov., 2023

Date of Test: 24 Nov., to 04 Jan., 2024

Date of Report Issue: 08 Jan., 2024

Test Result: PASS

Tested by:


Project Engineer

Date:

08 Jan., 2024


Reviewed by:


Senior Engineer

Date:

08 Jan., 2024

Approved by:


Manager

Date:

08 Jan., 2024

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in above the application standard version. Test results reported herein relate only to the item(s) tested.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

1 Version

Version No.	Date	Description
00	05 Jan., 2024	Original
01	08 Jan., 2024	1.Updated page 9 of the report

2 Contents

Page

Cover Page	1
1 Version	2
2 Contents	3
3 General Information	4
3.1 Client Information	4
3.2 General Description of E.U.T.	4
3.3 Test Mode and Environment	5
3.4 Description of Test Auxiliary Equipment	5
3.5 Measurement Uncertainty	5
3.6 Additions to, Deviations, or Exclusions From the Method	5
3.7 Laboratory Facility	5
3.8 Laboratory Location	5
3.9 Test Instruments List	5
4 Measurement Setup and Procedure	6
4.1 Test Setup	6
4.2 Test Procedure	8
5 Test Results	9
5.1 Summary	9
5.1.1 Clause and Data Summary	9
5.1.2 Test Limit	10

3 General Information

3.1 Client Information

Applicant:	TECNO MOBILE LIMITED
Address:	FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG
Manufacturer:	TECNO MOBILE LIMITED
Address:	FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG
Factory:	SHENZHEN TECNO TECHNOLOGY CO., LTD.
Address:	101, Building 24, Waijing Industrial Park, Fumin Community, Fucheng Street, Longhua District, Shenzhen City, P.R.China

3.2 General Description of E.U.T.

Product Name:	Mobile Phone
Model No.:	CL6s
Operation Frequency:	13.56MHz
Channel Numbers:	1
Modulation Type:	ASK
Antenna Type:	Induction Coil Antenna
Power Supply:	Rechargeable Li-ion Polymer Battery DC3.91V, 4900mAh
AC Adapter:	Model: U700TSA Input: AC100-240V, 50/60Hz, 2.0A Output: DC 5.0V, 3.0A 15.0W or 5.0V-10V, 7.0A or 11.0V, 6.4A or 4.0V-20.0V, 3.5A 70.0W
Test Sample Condition:	The test samples were provided in good working order with no visible defects.

3.3 Test Mode and Environment

Test Mode:	
Transmitting mode:	Keep the EUT in transmitting mode with modulation
Remark: Pre-scan The EUT was placed on three different polar directions tested: i.e. X axis, Y axis, Z axis, and found Y axis was worse case, so the report only reflects the worse axis tested data.	
Operating Environment:	
Temperature:	15°C ~ 35°C
Humidity:	20 % ~ 75 % RH
Atmospheric Pressure:	1008 mbar
Voltage:	Nominal: 3.91 Vdc, Extreme: Low 3.45 Vdc, High 4.50 Vdc
Test Engineer:	Lucas Ding (Conducted measurement) Robin Gu (Radiated measurement)

3.4 Description of Test Auxiliary Equipment

Manufacturer	Description	Model	Serial Number	FCC ID/DoC
Please refer to FCC ID: 2ADYY-CL6, report No.: JYTSZ-R12-2301641.				

3.5 Measurement Uncertainty

Please refer to FCC ID: 2ADYY-CL6, report No.: JYTSZ-R12-2301641.

3.6 Additions to, Deviations, or Exclusions From the Method

No

3.7 Laboratory Facility

<p>The test facility is recognized, certified, or accredited by the following organizations:</p> <ul style="list-style-type: none"> ● FCC - Designation No.: CN1211 JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551. ● ISED – CAB identifier.: CN0021 The 3m Semi-anechoic chamber and 10m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1. ● CNAS - Registration No.: CNAS L15527 JianYan Testing Group Shenzhen Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L15527. ● A2LA - Registration No.: 4346.01 This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: https://portal.a2la.org/scopepdf/4346-01.pdf
--

3.8 Laboratory Location

<p>JianYan Testing Group Shenzhen Co., Ltd. Address: No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China. Tel: +86-755-23118282, Fax: +86-755-23116366 Email: info-JYTee@lets.com, Website: http://jyt.lets.com</p>


3.9 Test Instruments List

Please refer to FCC ID: 2ADYY-CL6, report No.: JYTSZ-R12-2301641.

4 Measurement Setup and Procedure

4.1 Test Setup


1) Conducted emission measurement:

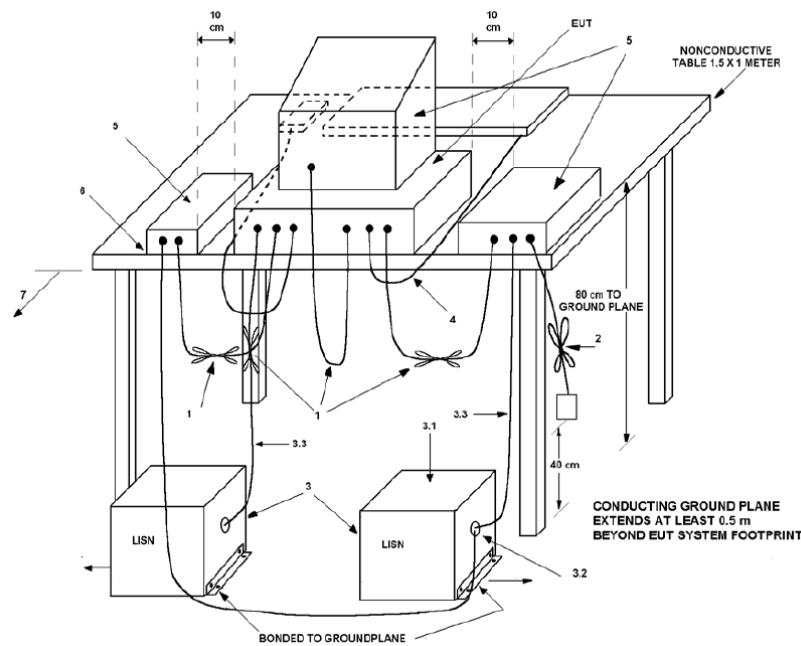


Note: The detailed descriptions please refer to Figure 8 of ANSI C63.4:2014.

2) Radiated emission measurement:


9kHz ~ 30 MHz (3m SAC)

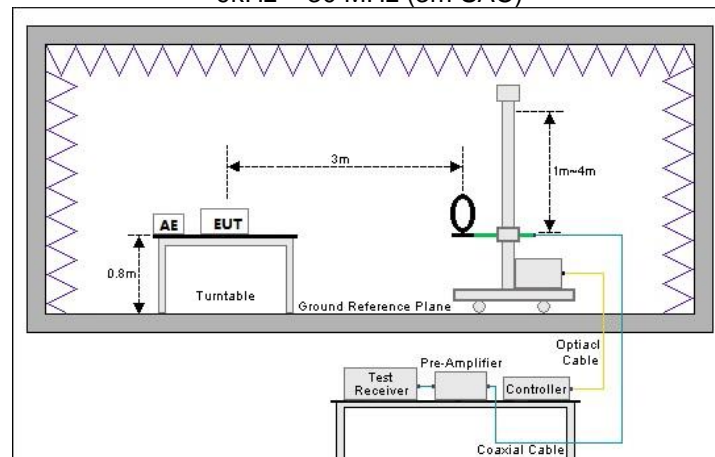

30 MHz ~ 1GHz (3m SAC)

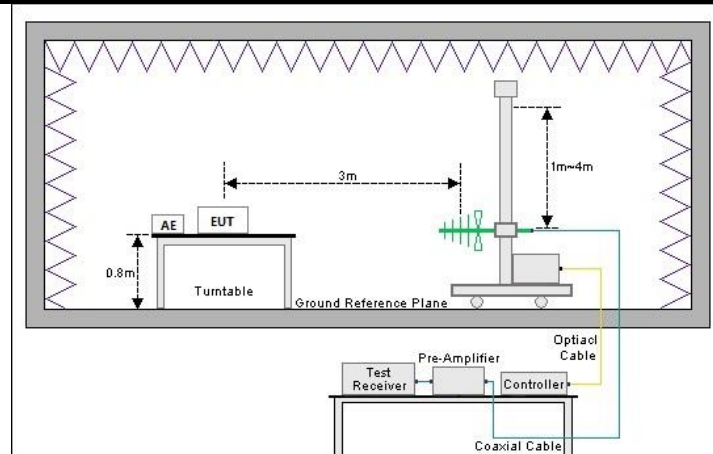

Conducted test method:

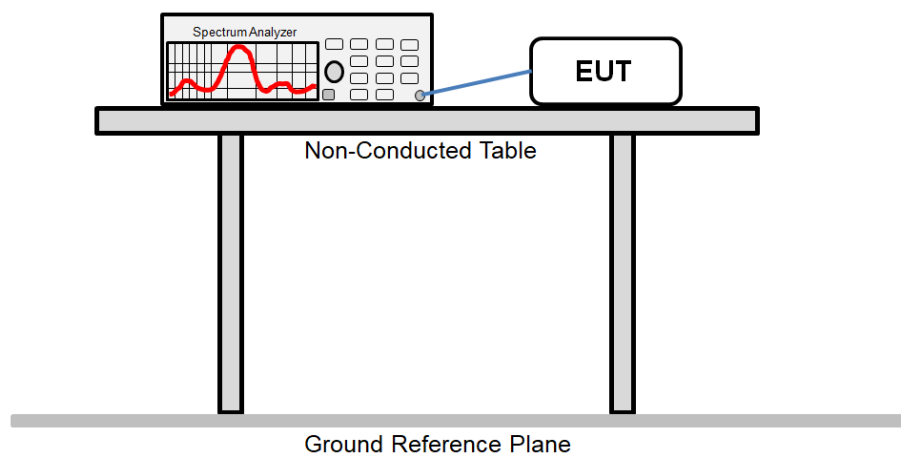

4.2 Test Procedure

Test method	Test step
Conducted emission	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
Radiated emission	<ol style="list-style-type: none"> 1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m. 2. EUT works in each mode of operation that needs to be tested, and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.
Conducted test method	<ol style="list-style-type: none"> 1. The antenna port of EUT was connected to the RF port of the spectrum analyzer through an RF cable. 2. The EUT is keeping in continuous transmission mode and tested in all modulation modes. 3. The test data is saved by the screenshot function of the spectrum analyzer.

5 Test Results

5.1 Summary

5.1.1 Clause and Data Summary

This report has been revised according to FCC ID: 2ADYY-CL6, report No.: JYTSZ-R12-2301641, issued by Shenzhen Jianyan Testing Group Co., Ltd. The difference between them is as follows: Add bands 13 and 26 by modifying software and changing component suppliers for U3220, U3204, U3228, so no need to retest.

Test items	Standard clause	Test data	Result
Antenna Requirement	15.203	Please refer to FCC ID: 2ADYY-CL6, report No.: JYTSZ-R12-2301641.	Please refer to FCC ID: 2ADYY-CL6, report No.: JYTSZ-R12-2301641.
AC Power Line Conducted Emission	15.207	Please refer to FCC ID: 2ADYY-CL6, report No.: JYTSZ-R12-2301641.	Please refer to FCC ID: 2ADYY-CL6, report No.: JYTSZ-R12-2301641.
20dB Bandwidth	15.215(c)	Please refer to FCC ID: 2ADYY-CL6, report No.: JYTSZ-R12-2301641.	Please refer to FCC ID: 2ADYY-CL6, report No.: JYTSZ-R12-2301641.
Field Strength of Fundamental	15.225 (a)(b)(c)	Please refer to FCC ID: 2ADYY-CL6, report No.: JYTSZ-R12-2301641.	Please refer to FCC ID: 2ADYY-CL6, report No.: JYTSZ-R12-2301641.
Field Strength of Spurious Emissions	15.209 15.225 (d)	Please refer to FCC ID: 2ADYY-CL6, report No.: JYTSZ-R12-2301641.	Please refer to FCC ID: 2ADYY-CL6, report No.: JYTSZ-R12-2301641.
Frequency Tolerance	15.225 (e)	Please refer to FCC ID: 2ADYY-CL6, report No.: JYTSZ-R12-2301641.	Please refer to FCC ID: 2ADYY-CL6, report No.: JYTSZ-R12-2301641.
Remark: 1. Please refer to FCC ID: 2ADYY-CL6, report No.: JYTSZ-R12-2301641 issued by JianYan Testing Group Shenzhen Co., Ltd. 2. N/A: Not Applicable.			
Test Method:	ANSI C63.4-2014 ANSI C63.10-2013		

5.1.2 Test Limit

Items	Limit																								
AC Power Line Conducted Emission	<table><tr><th rowspan="2">Frequency (MHz)</th><th colspan="2">Limit (dBμV)</th></tr><tr><th>Quasi-Peak</th><th>Average</th></tr><tr><td>0.15 – 0.5</td><td>66 to 56 <small>Note 1</small></td><td>56 to 46 <small>Note 1</small></td></tr><tr><td>0.5 – 5</td><td>56</td><td>46</td></tr><tr><td>5 – 30</td><td>60</td><td>50</td></tr></table> <p>Note 1: The limit level in dBμV decreases linearly with the logarithm of frequency. Note 2: The more stringent limit applies at transition frequencies.</p>	Frequency (MHz)	Limit (dBμV)		Quasi-Peak	Average	0.15 – 0.5	66 to 56 <small>Note 1</small>	56 to 46 <small>Note 1</small>	0.5 – 5	56	46	5 – 30	60	50										
Frequency (MHz)	Limit (dBμV)																								
	Quasi-Peak	Average																							
0.15 – 0.5	66 to 56 <small>Note 1</small>	56 to 46 <small>Note 1</small>																							
0.5 – 5	56	46																							
5 – 30	60	50																							
20dB Bandwidth	N/A																								
Field Strength of Fundamental	(a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters. (b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters. (c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters. (d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.																								
Field Strength of Spurious Emissions	<table><tr><th>Frequency (MHz)</th><th>Field strength (microvolts/meter)</th><th>Measurement distance (meters)</th></tr><tr><td>0.009 – 0.490</td><td>2400/F (kHz)</td><td>300</td></tr><tr><td>0.490 – 1.705</td><td>24000/F (kHz)</td><td>30</td></tr><tr><td>1.705 – 30.0</td><td>30</td><td>30</td></tr><tr><td>30 – 88</td><td>100**</td><td>3</td></tr><tr><td>88 – 216</td><td>150**</td><td>3</td></tr><tr><td>216 – 960</td><td>200**</td><td>3</td></tr><tr><td>Above 960</td><td>500</td><td>3</td></tr></table> <p>** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.</p>	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	0.009 – 0.490	2400/F (kHz)	300	0.490 – 1.705	24000/F (kHz)	30	1.705 – 30.0	30	30	30 – 88	100**	3	88 – 216	150**	3	216 – 960	200**	3	Above 960	500	3
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)																							
0.009 – 0.490	2400/F (kHz)	300																							
0.490 – 1.705	24000/F (kHz)	30																							
1.705 – 30.0	30	30																							
30 – 88	100**	3																							
88 – 216	150**	3																							
216 – 960	200**	3																							
Above 960	500	3																							
Frequency Tolerance	The frequency tolerance of the carrier signal shall be maintained within ±0.01% of the operating frequency over a temperature variation of ?20 degrees to + 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.																								

-----End of report-----