

# FCC Radio Test Report

**FCC ID: 2AC23-WCT3EM2611**

**FCC 47 CFR Part 15 Subpart C**

**Product :** WIFI Module

**Trade Name :** GSD

**Model Number :** WCT3EM2611

**Firmware Version Identification Number (FVIN):** 1.0

## **Issued for**

Hui Zhou Gaoshengda Technology Co.,LTD

NO.75 Zhongkai Development Area, Huizhou, Guangdong, China

## **Issued by**

Shenzhen ATL Testing Technology Co., Ltd.

F/4, Building 10, Dayuan Industrial Zone, Xili Town, Nanshan District, Shenzhen,  
China

Tel.: +86-0755-26909822 Fax.: +86-0755-61605504

Website: [www.atllab.org](http://www.atllab.org)

*Note: This report shall not be reproduced except in full, without the written approval of Shenzhen ATL Testing Technology Co., Ltd.. This document may be altered or revised by Shenzhen ATL Testing Technology Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample*

## TEST RESULT CERTIFICATION

Product ..... : WIFI Module  
Applicant..... : Hui Zhou Gaoshengda Technology Co.,LTD  
Address ..... : NO.75 Zhongkai Development Area, Huizhou, Guangdong, China  
Manufacturer..... : Hui Zhou Gaoshengda Technology Co.,LTD  
Address ..... : NO.75 Zhongkai Development Area, Huizhou, Guangdong, China  
Model No. .... : WCT3EM2611  
Standards ..... : FCC Part 15 Subpart C (15.247)  
Test Method..... : ANSI C63.10: 2014  
                              KDB 558074 D01 DTS Meas Guidance v03r05

The above equipment has been tested by Shenzhen ATL Testing Technology Co., Ltd. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

**Test**.....:

Date of receipt of test item ..... 2016-09-20

Date(s) of performance of test ..... 2016-09-21 to 2016-10-31

Test Result.....: Pass

Testing by

:

*Si fei fei*

(Si feifei)

Date

:

2016-10-31

Check by

:

*Xie Lingling*

(Xie Lingling)

Date

:

2016-11-04

Approved by

:

*Xu Peng*

(Xu Peng)

Date

:

2016-11-04

<b>Table of Contents</b>	<b>Page</b>
1 . TEST SUMMARY	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	8
2.3 DESCRIPTION OF TEST SETUP	9
2.4 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL	10
2.5 EUT Exercise Software	10
3 . CONDUCTED EMISSION TEST	11
3.1 CONDUCTED EMISSION MEASUREMENT (Frequency Range 150KHz-30MHz)	11
3.2 TEST PROCEDURE	11
3.3 TEST SETUP	12
3.4 TEST INSTRUMENTS	12
3.5 EUT OPERATING CONDITIONS	12
3.6 TEST RESULTS	13
4 . RADIATED EMISSION MEASUREMENT	15
4.1 RADIATED EMISSION LIMIT (Frequency Range 9KHz-1000MHz)	15
4.2 TEST PROCEDURE	15
4.3 TEST SETUP	16
4.4 TEST INSTRUMENTS	17
4.5 EUT OPERATING CONDITIONS	17
4.6 TEST RESULTS	18
5 . MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT	23
5.1 LIMITS	23
5.2 TEST PROCEDURE	23
5.3 TEST SETUP	23
5.4 TEST INSTRUMENTS	23
5.5 EUT OPERATING CONDITIONS	23
5.6 TEST RESULTS	23
6 . OCCUPIED BANDWIDTH MEASUREMENT	26
6.1 LIMITS	26
6.2 TEST PROCEDURE	26

<b>Table of Contents</b>	<b>Page</b>
6.3 TEST SETUP	26
6.4 TEST INSTRUMENTS	26
6.5 EUT OPERATING CONDITIONS	26
6.6 TEST RESULTS	26
7 . POWER SPECTRAL DENSITY	29
7.1 LIMITS	29
7.2 TEST PROCEDURE	29
7.3 TEST SETUP	29
7.4 TEST INSTRUMENTS	29
7.5 EUT OPERATING CONDITIONS	29
7.6 TEST RESULTS	29
8 . ANTENNA CONDUCTED SPURIOUS EMISSION	32
8.1 LIMITS	32
8.2 TEST PROCEDURE	32
8.3 TEST SETUP	32
8.4 TEST INSTRUMENTS	32
8.5 EUT OPERATING CONDITIONS	32
8.6 TEST RESULTS	32
9 . ANTENNA REQUIREMENT	37
9.1 REQUIREMENT	37
9.2 ANTENNA CONNECTOR CONSTRUCTION	37

## 1. TEST SUMMARY

Test procedures according to the technical standards:

FCC Part 15 Subpart C (15.247)/RSS 247 Issue 1: 2015				
Standard Section		Test Item	Judgment	Remark
FCC	IC			
15.207	RSS Gen	AC Power Conducted Emission	PASS	
15.247(d)	RSS 247 Section 5.5	Antenna Conducted Spurious Emissions	PASS	
15.247(b)(3)	RSS 247 Section 5.4(4)	Output Power	PASS	
15.247(a)(2)	RSS 247 Section 5.2(1)	6dB RF Bandwidth	PASS	
15.247(e)	RSS 247 Section 5.2(2)	Power Spectral Density	PASS	
15.209/ 15.205	RSS 247 Section 5.5 RSS Gen	Transmitter Radiated Emissions	PASS	
15.203	/	Antenna Requirement	PASS	

### NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

(2) The test results of this report relate only to the tested sample(s) identified in this report.

## 1.1 TEST FACILITY

Shenzhen ATL Testing Technology Co., Ltd.

Add. : F/4, Building 10, Dayuan Industrial Zone, Xili Town, Nanshan District, Shenzhen, China

## 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95** %.

### A. Conducted Emission :

The measurement uncertainty is evaluated as  $\pm 3.2$  dB.

### B. Radiated Measurement :

The measurement uncertainty is evaluated as  $\pm 3.7$  dB.

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	WIFI Module
Model Name	WCT3EM2611
Additional Model Number(s)	N/A
Model Difference	N/A
Frequency Range	2402~2480 MHz
Modulation Type	Bluetooth BLE: GFSK
Data Rate	Up to 3Mbps
RF Output Power	GFSK: 1.63 dBm
Antenna Type	PIFA Antenna (Max. Gain: 2.0 dBi)
Power Source	DC Powered by host system.
Power Rating	DC 5V from USB interference.
Remark	More details EUT technical specifications, please refer to the User's Manual.

**Note:**

- (1) This Test Report is FCC Part 15 Subpart C, 15.247 for Bluetooth BLE. And the Test procedure follows the FCC KDB 558074 D01 DTS Meas Guidance v03r05.
- (2) More information about the Wifi, please refer to other test report.
- (3) Transmitting mode with antennas

Mode	TX Antenna (s)
BLE	1

## 2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	BLE TX(GFSK) Mode

For Conducted Test	
Final Test Mode	Description
Mode 1	BLE TX(GFSK) Mode

For Radiated Test	
Final Test Mode	Description
Mode 1	BLE TX(GFSK) Mode


Note:

- (1) Software used to control the EUT for staying in continuous transmitting mode was programmed. After verification, all tests were carried out with the worst case test modes as shown below.
- (2) Bluetooth BLE Mode:  
Channel (2402/2440/2480MHz) with GFSK modulation were chosen for full testing.
- (3) By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.



## 2.3 DESCRIPTION OF TEST SETUP

### Radiated Emission

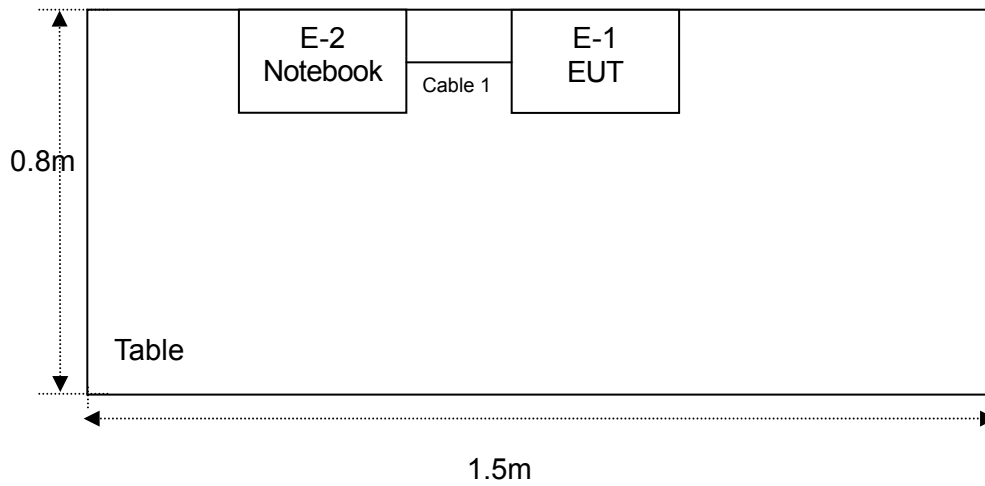

## 2.4 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	WIFI Module	GSD	WCT3EM2611	N/A	EUT
E-2	Notebook	LENOVO	P405	DOC	

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	15cm	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” means “shielded” “with core”; “NO” means “unshielded” “without core”.

## 2.5 EUT Exercise Software

Power Parameters for Testing			
Test Software Version	Media Tek BT Tool.exe		
Mode	Frequency/ Parameters		
BLE	2402 MHz	2442 MHz	2480 MHz
	DEF	DEF	DEF

### 3. CONDUCTED EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Quasi-peak	Average
	dBuV	dBuV
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

#### 3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 3.3 TEST SETUP

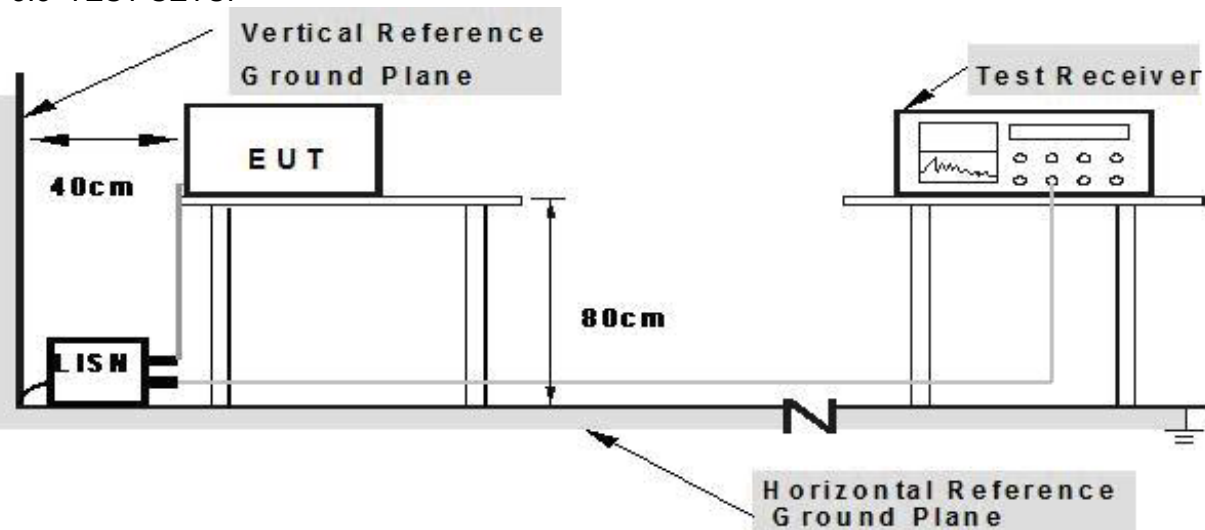

**Note: 1.Support units were connected to second LISN.**  
**2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes**

### 3.4 TEST INSTRUMENTS

Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
LISN	R&S	NSLK81	8126466	Jul. 04. 2016	Jul. 03. 2017	1 year
LISN	R&S	NSLK81	8126487	Dec. 23, 2015	Dec. 22, 2016	1 year
50Ω Switch	ANRITSU CORP	MP59B	6200983704	Jul. 04. 2016	Jul. 03. 2017	1 year
Test Cable	N/A	C01	N/A	Jul. 04. 2016	Jul. 03. 2017	1 year
Test Cable	N/A	C02	N/A	Jul. 04. 2016	Jul. 03. 2017	1 year
Test Cable	N/A	C03	N/A	Jul. 04. 2016	Jul. 03. 2017	1 year
EMI Test Receiver	R&S	ESCI	1166.595	Jul. 04. 2016	Jul. 03. 2017	1 year
Passive Voltage Probe	ESH2-Z3	R&S	100196	Jul. 04. 2016	Jul. 03. 2017	1 year


### 3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **2.3** Unless otherwise a special operating condition is specified in the follows during the testing.

### 3.6 TEST RESULTS


EUT :	WIFI Module	Model Name. :	WCT3EM2611
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Terminal:	Line
Test Mode :	BLE TX Mode (2402MHz)		
Test Voltage :	120V/ 60Hz		

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1500	31.41	9.92	41.33	66.00	-24.67	peak
2	*	0.4020	27.81	10.02	37.83	57.81	-19.98	peak
3		0.6660	19.88	10.10	29.98	56.00	-26.02	peak
4		1.2660	20.58	10.06	30.64	56.00	-25.36	peak
5		1.6580	20.01	10.06	30.07	56.00	-25.93	peak
6		2.6860	19.12	10.04	29.16	56.00	-26.84	peak

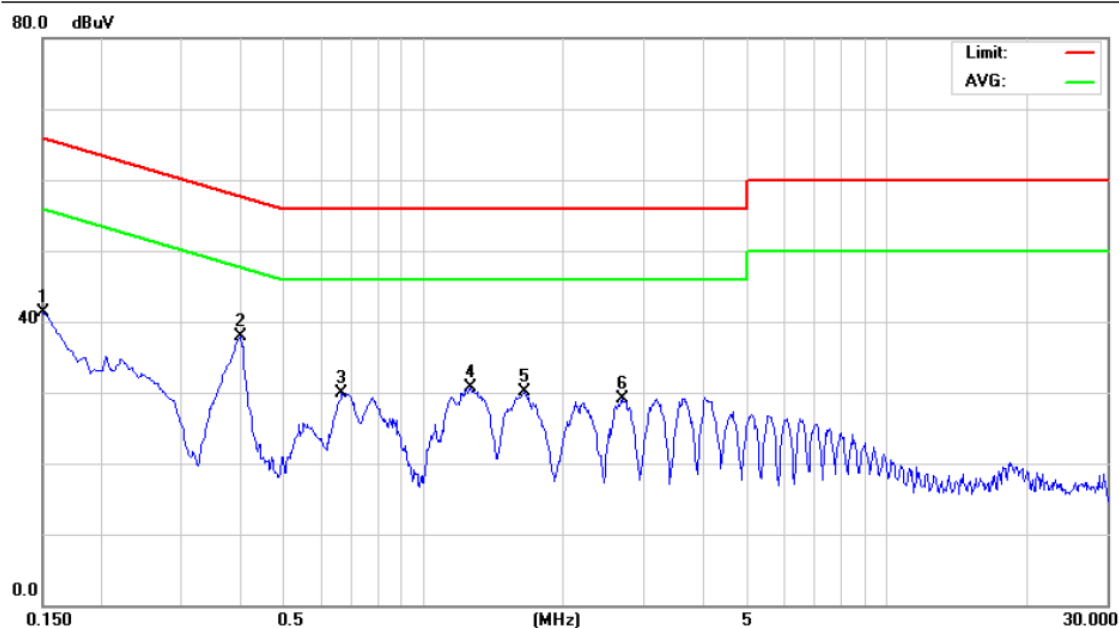

EUT :	WIFI Module	Model Name. :	WCT3EM2611
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Terminal:	Neutral
Test Mode :	BLE TX Mode (2402MHz)		
Test Voltage :	120V/ 60Hz		

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	0.1500	31.69	10.12	41.81	66.00	-24.19	peak
2 *	0.3980	27.29	10.05	37.34	57.90	-20.56	peak
3	0.6700	20.02	10.02	30.04	56.00	-25.96	peak
4	1.2700	20.32	10.13	30.45	56.00	-25.55	peak
5	2.7300	19.50	10.06	29.56	56.00	-26.44	peak
6	3.2060	19.62	10.06	29.68	56.00	-26.32	peak

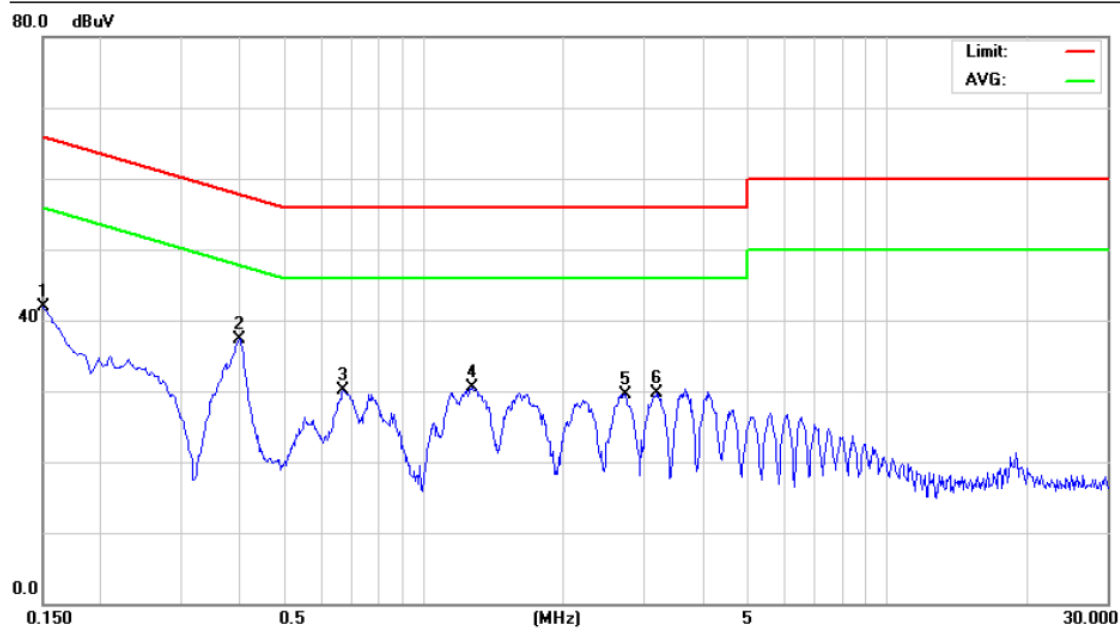

#### 4. RADIATED EMISSION MEASUREMENT

##### 4.1 RADIATED EMISSION LIMIT (Frequency Range 9KHz-1000MHz)

20 dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a) and RSS-210 Section 2.2&A8.5, then the 15.209(a) and RSS-General limit in the table below has to be followed.

FREQUENCY (MHz)	Field Strength (uV/m at meter)	Measurement Distance (meters)
0.009 -0.490	2400/F(KHz)	300
0.490 -1.705	24000/F(KHz)	30
1.705 -30.0	30	30
30 -88	100	3
88 -216	150	3
216~960	200	3
Above 960	500	3

##### RADIATED EMISSION LIMITS (Above 1000MHz)

FREQUENCY (MHz)	Class A (dBuV/m)(at 3 M)		Class B (dBuV/m)(at 3 M)	
	Peak	Average		Peak
Above 1000	80	60	74	54

Note:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (2) Emission Level(dBuV/m)=20log Emission Level(uV/m)

The following table is the setting of the receiver

Receiver Parameter	Setting
Attenuation	Auto
Start Frequency~ Stop Frequency	9kHz~150kHz/ RB 200Hz for QP
Start Frequency~ Stop Frequency	150kHz~30MHz/ RB 9kHz for QP
Start Frequency~ Stop Frequency	30MHz~1000MHz/ RB120kHz for QP

The following table is the setting of the spectrum

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10 <sup>th</sup> carrier harmonic
RB/ VB (emission in restricted band)	1MHz/ 3 MHz for Peak, 1MHz/ 10Hz for Average

##### 4.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.

- c. The height of the equipment or of the substitution antenna shall be 1.5 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured, above 1G Average detector mode will be instead.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.


Note:

Both horizontal and vertical antenna polarities were tested.


And performed pretest to three orthogonal axis. The worst case emissions were reported.

#### 4.3 TEST SETUP

##### (A) Radiated Emission Test Set-Up Frequency Below 30MHz

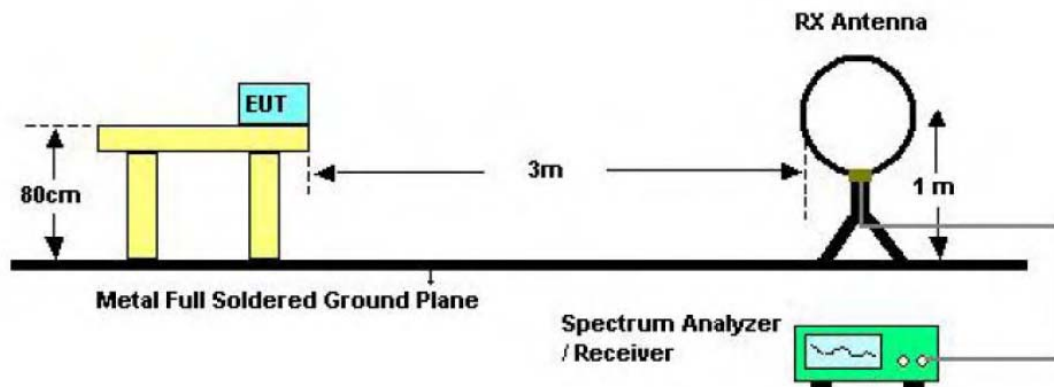


##### (B) Radiated Emission Test Set-Up Frequency Below 1 GHz

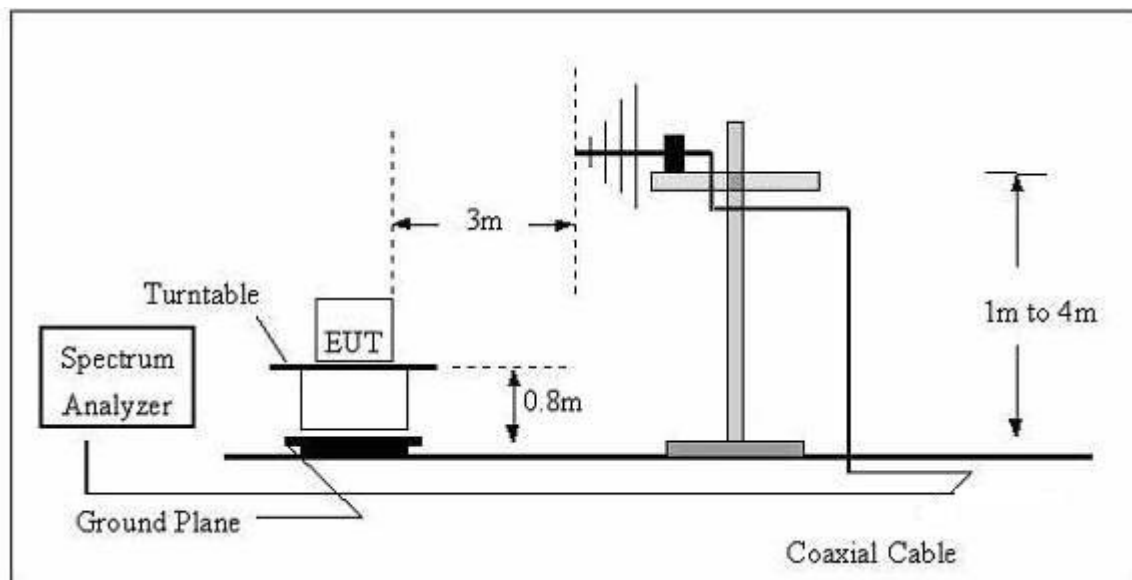



### (C) Radiated Emission Test Set-Up Frequency Above 1GHz

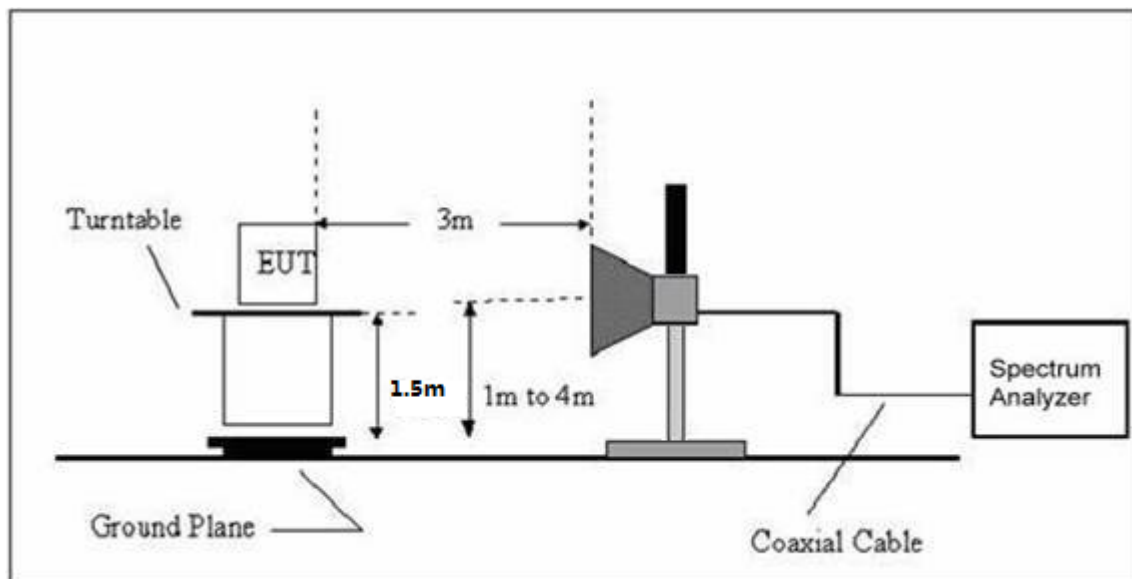

### 4.4 TEST INSTRUMENTS

Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
Broadband Antenna	R&S	VULB 9168	VULB 9168-456	Jul. 04. 2016	Jul. 03. 2017	1 year
Test Cable	N/A	R-01	N/A	Dec. 23, 2015	Dec. 22, 2016	1 year
Test Cable	N/A	R-02	N/A	Dec. 23, 2015	Dec. 22, 2016	1 year
EMI Test Receiver	R&S	ESCI	101324	Jul. 04. 2016	Jul. 03. 2017	1 year
Antenna Mast	EM	SC100_1	N/A	N/A	N/A	N/A
Turn Table	EM	SC100	060531	N/A	N/A	N/A
50Ω Switch	Anritsu Corp	MP59B	6200983705	Jul. 04. 2016	Jul. 03. 2017	1 year
Spectrum Analyzer	R&S	FSP40	100154	Jul. 04. 2016	Jul. 03. 2017	1 year
Horn Antenna	R&S	HF906	10029	Jul. 04. 2016	Jul. 03. 2017	1 year
Amplifier	EM	EM-30180	060538	Jul. 04. 2016	Jul. 03. 2017	1 year

### 4.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **2.3** Unless otherwise a special operating condition is specified in the follows during the testing.

## 4.6 TEST RESULTS


### 4.6.1 TEST RESULTS (Bellow 1GHz)

EUT :	WIFI Module	Model Name. :	WCT3EM2611
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Ant. Pol.:	Horizontal
Test Mode :	BLE TX Mode (2402MHz)		
Test Voltage :	DC 5V		

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dBuV/m	dB	
1	!	57.9992	56.40	-20.97	35.43	40.00	-4.57	peak
2	!	82.9385	57.39	-22.67	34.72	40.00	-5.28	peak
3		125.0066	56.34	-19.20	37.14	43.50	-6.36	peak
4		228.4901	58.63	-18.78	39.85	46.00	-6.15	peak
5	*	250.3010	60.69	-18.40	42.29	46.00	-3.71	peak
6	!	299.3158	58.84	-16.73	42.11	46.00	-3.89	peak

Remark:

Factor = Antenna Factor + Cable Loss.

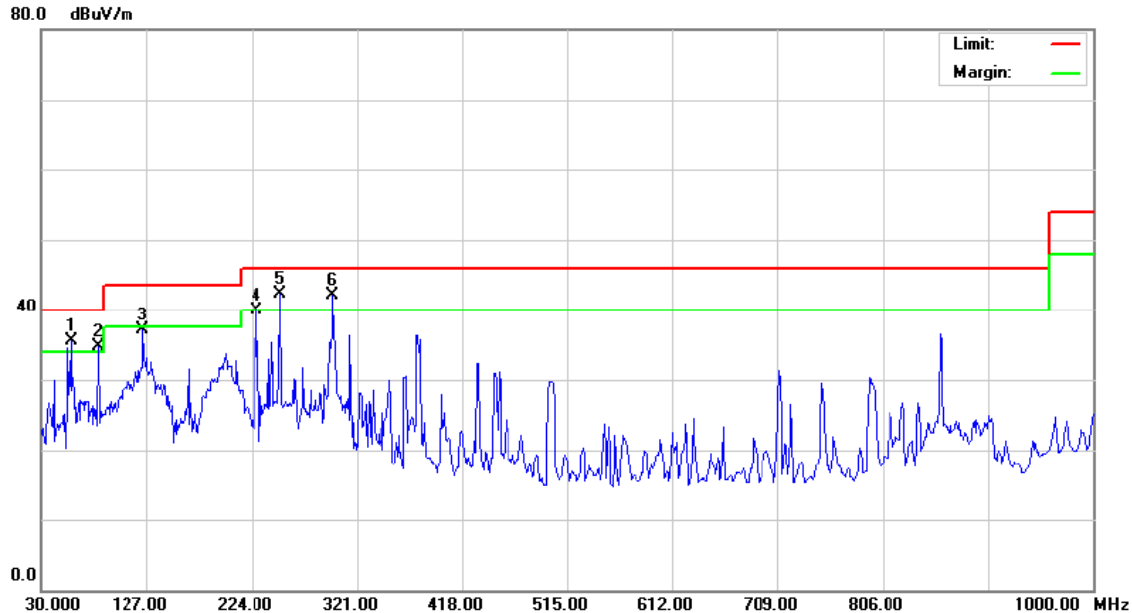


EUT :	WIFI Module	Model Name. :	WCT3EM2611
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Ant. Pol.:	Vertical
Test Mode :	BLE TX Mode (2402MHz)		
Test Voltage :	DC 5V		

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		183.8440	56.33	-19.00	37.33	43.50	-6.17	peak
2	!	243.3771	60.22	-18.56	41.66	46.00	-4.34	peak
3	*	299.3158	59.43	-16.73	42.70	46.00	-3.30	peak
4	!	333.6865	58.22	-16.34	41.88	46.00	-4.12	peak
5		377.2590	53.59	-15.92	37.67	46.00	-8.33	peak
6		432.5457	51.78	-15.28	36.50	46.00	-9.50	peak

Remark:

Factor = Antenna Factor + Cable Loss.

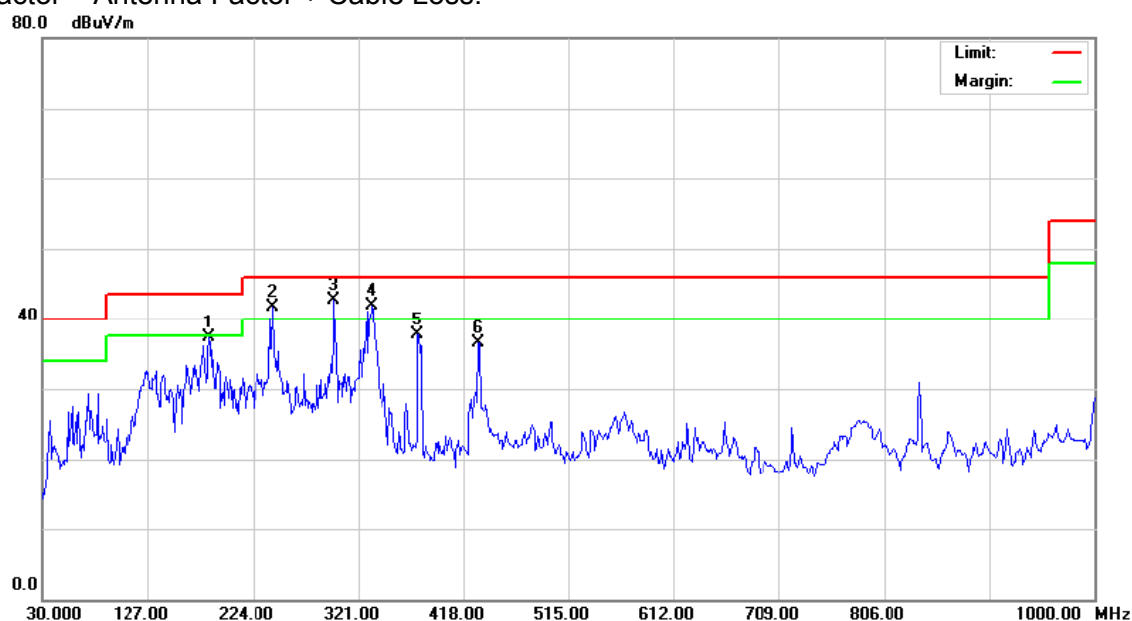

#### 4.6.2 TEST RESULTS (Above 1GHz)

EUT :	WIFI Module	Model Name. :	WCT3EM2611
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Ant. Pol.:	Horizontal
Test Mode :	BLE TX Mode (2402MHz)		
Test Voltage :	DC 5V		

No. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2390.000	46.62	0.77	47.39	74.00	-26.61	peak	
2	2390.000	34.67	0.77	35.44	54.00	-18.56	AVG	
3 X	2402.010	96.75	0.82	97.57	74.00	23.57	peak	FUNDAMENTAL FREQUENCY
4 *	2402.200	94.26	0.82	95.08	54.00	41.08	AVG	FUNDAMENTAL FREQUENCY

No. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	4804.018	42.90	13.44	56.34	74.00	-17.66	peak	
2 *	4804.020	33.79	13.44	47.23	54.00	-6.77	AVG	

Remark:

Factor = Antenna Factor + Cable Loss.

EUT :	WIFI Module	Model Name. :	WCT3EM2611
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Ant. Pol.:	Vertical
Test Mode :	BLE TX Mode (2402MHz)		
Test Voltage :	DC 5V		

No. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2390.000	46.01	0.77	46.78	74.00	-27.22	peak	
2	2390.000	34.31	0.77	35.08	54.00	-18.92	AVG	
3 *	2402.010	89.71	0.82	90.53	54.00	36.53	AVG	FUNDAMENTAL FREQUENCY
4 X	2402.100	93.42	0.82	94.24	74.00	20.24	peak	FUNDAMENTAL FREQUENCY

No. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	4804.006	43.17	13.44	56.61	74.00	-17.39	peak	
2 *	4804.006	33.54	13.44	46.98	54.00	-7.02	AVG	

Remark:

Factor = Antenna Factor + Cable Loss.

EUT :	WIFI Module	Model Name. :	WCT3EM2611
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Ant. Pol.:	Horizontal
Test Mode :	BLE TX Mode (2442MHz)		
Test Voltage :	DC 5V		

No. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	4884.078	43.03	13.92	56.95	74.00	-17.05	peak	
2 *	4884.085	34.06	13.92	47.98	54.00	-6.02	AVG	

Remark:

Factor = Antenna Factor + Cable Loss.

EUT :	WIFI Module	Model Name. :	WCT3EM2611
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Ant. Pol.:	Vertical
Test Mode :	BLE TX Mode (2442MHz)		
Test Voltage :	DC 5V		

No. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	4884.106	42.23	13.92	56.15	74.00	-17.85	peak	
2 *	4884.120	33.17	13.92	47.09	54.00	-6.91	AVG	

Remark:

Factor = Antenna Factor + Cable Loss.

EUT :	WIFI Module	Model Name. :	WCT3EM2611
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Ant. Pol.:	Horizontal
Test Mode :	BLE TX Mode (2480MHz)		
Test Voltage :	DC 5V		

No. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	2479.900	94.16	1.15	95.31	54.00	41.31	AVG	FUNDAMENTAL FREQUENCY
2 X	2480.100	97.50	1.15	98.65	74.00	24.65	peak	FUNDAMENTAL FREQUENCY
3	2483.500	60.68	1.17	61.85	74.00	-12.15	peak	
4	2483.500	48.54	1.17	49.71	54.00	-4.29	AVG	

No. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	4960.012	33.40	14.36	47.76	54.00	-6.24	AVG	
2	4960.027	42.72	14.36	57.08	74.00	-16.92	peak	

Remark:

Factor = Antenna Factor + Cable Loss.

EUT :	WIFI Module	Model Name. :	WCT3EM2611
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Ant. Pol.:	Vertical
Test Mode :	BLE TX Mode (2480MHz)		
Test Voltage :	DC 5V		

No. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 X	2480.010	95.37	1.15	96.52	74.00	22.52	peak	FUNDAMENTAL FREQUENCY
2 *	2480.100	90.94	1.15	92.09	54.00	38.09	AVG	FUNDAMENTAL FREQUENCY
3	2483.500	58.68	1.17	59.85	74.00	-14.15	peak	
4	2483.500	48.35	1.17	49.52	54.00	-4.48	AVG	

No. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	4960.013	33.69	14.36	48.05	54.00	-5.95	AVG	
2	4960.041	42.82	14.36	57.18	74.00	-16.82	peak	

Remark:

Factor = Antenna Factor + Cable Loss.

## 5. MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT

### 5.1 LIMITS


FCC Part 15.247, subpart C/ RSS 247 Section 5.4(4)	
Frequency Range (MHz)	2400~2483.5
Limits	30

### 5.2 TEST PROCEDURE

The measurement is according to section 9.1.2 of FCC KDB 558074 D01 DTS Meas Guidance v03r02.

The EUT was directly connected to the power meter and antenna output port as show in the block diagram as bellow.

### 5.3 TEST SETUP

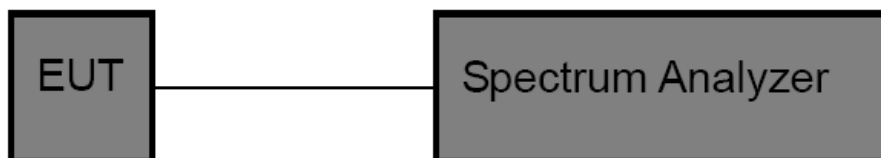

### 5.4 TEST INSTRUMENTS

Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
Spectrum Analyzer	R&S	FSP40	100154	Jul. 04. 2016	Jul. 03. 2017	1 year


### 5.5 EUT OPERATING CONDITIONS

The EUT was set to continuously transmitting in the maximum power during the test.

### 5.6 TEST RESULTS

Bluetooth BLE Mode			
GFSK			
Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)
01	2402 MHz	1.22	30
19	2440 MHz	0.65	
40	2480 MHz	1.63	


### BLE Mode 2402 MHz

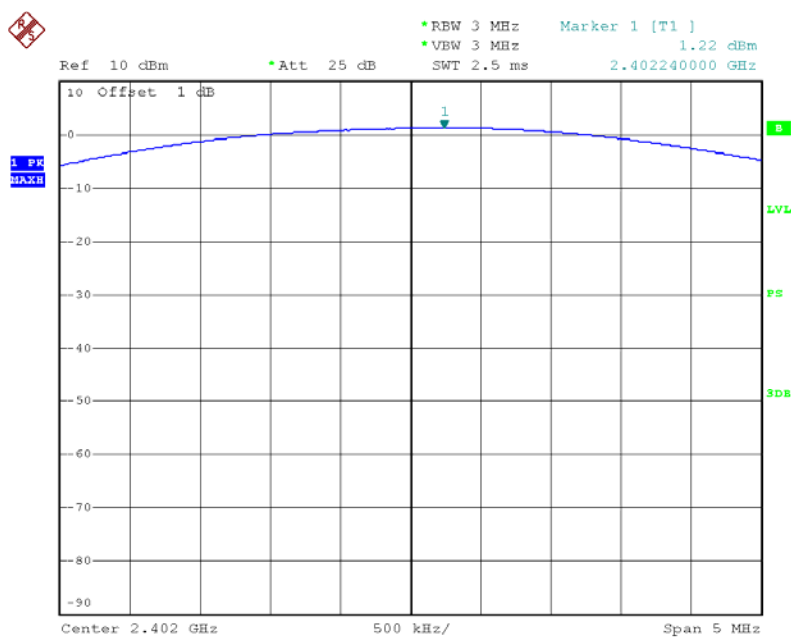

Date: 22.OCT.2016 19:03:01




### BLE Mode 2442 MHz

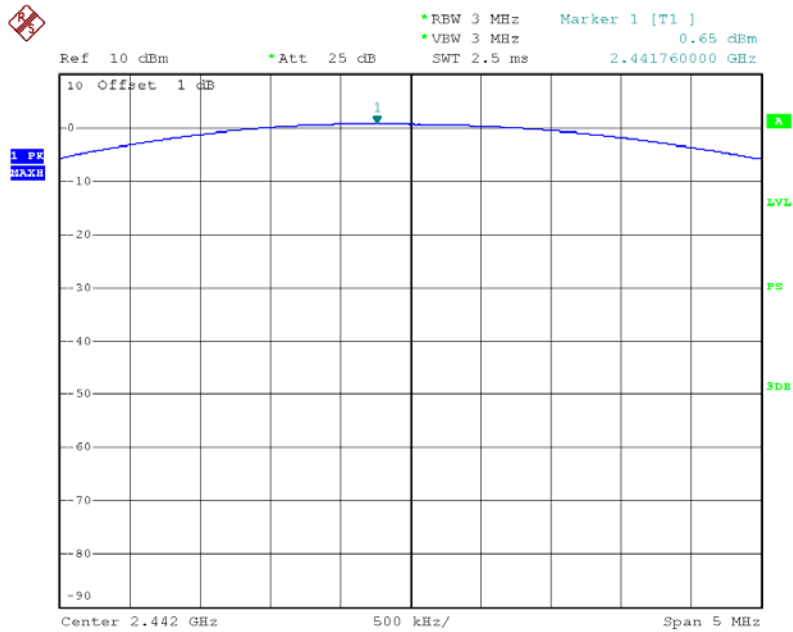

Date: 22.OCT.2016 19:01:34

### BLE Mode 2480 MHz

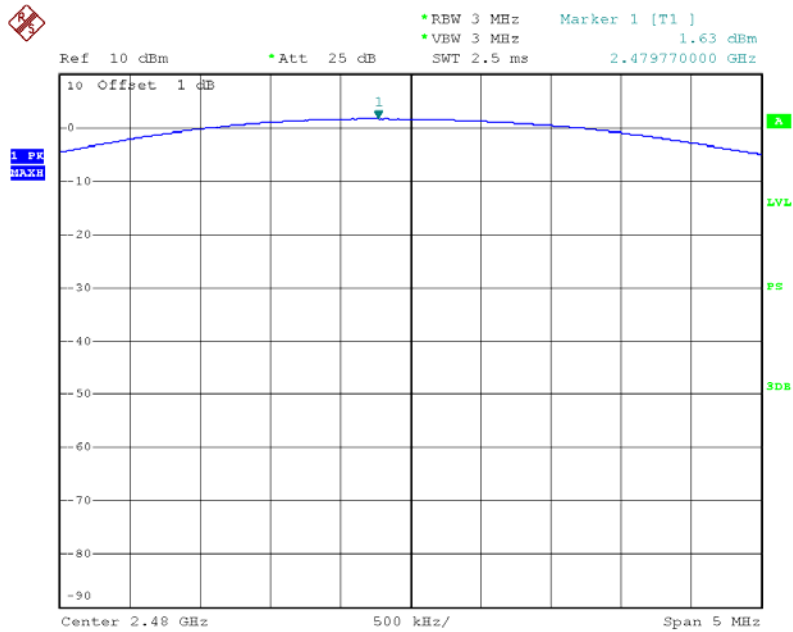

Date: 22.OCT.2016 19:02:01

## 6. OCCUPIED BANDWIDTH MEASUREMENT

### 6.1 LIMITS


FCC Part 15.247, subpart C/ RSS 247 Section 5.2(1)	
Frequency Range (MHz)	2400~2483.5
Limits	6 dB Bandwidth>500 KHz

### 6.2 TEST PROCEDURE

The EUT was directly connected to the power meter and antenna output port as show in the block diagram as below.

Spectrum Parameters	Setting
Attenuation	Auto
Span	>6 dB Bandwidth
RBW	100 kHz
VBW	$\geq 3\text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 6.3 TEST SETUP

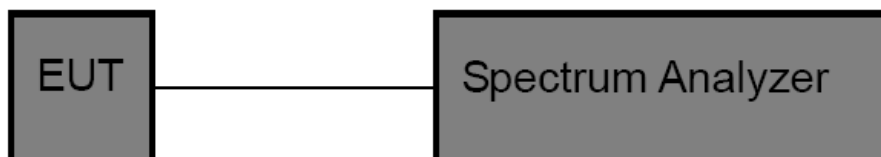

### 6.4 TEST INSTRUMENTS

Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
Spectrum Analyzer	R&S	FSP40	100154	Jul. 04. 2016	Jul. 03. 2017	1 year


### 6.5 EUT OPERATING CONDITIONS

The EUT was set to continuously transmitting in the maximum power during the test.

### 6.6 TEST RESULTS


Bluetooth BLE Mode			
Frequency (MHz)	6dB Bandwidth (kHz)	99% OBW (MHz)	Limit
2402	696.00	N/A	>=500 kHz
2440	696.00	N/A	
2480	696.00	N/A	

### BLE Mode 2402 MHz

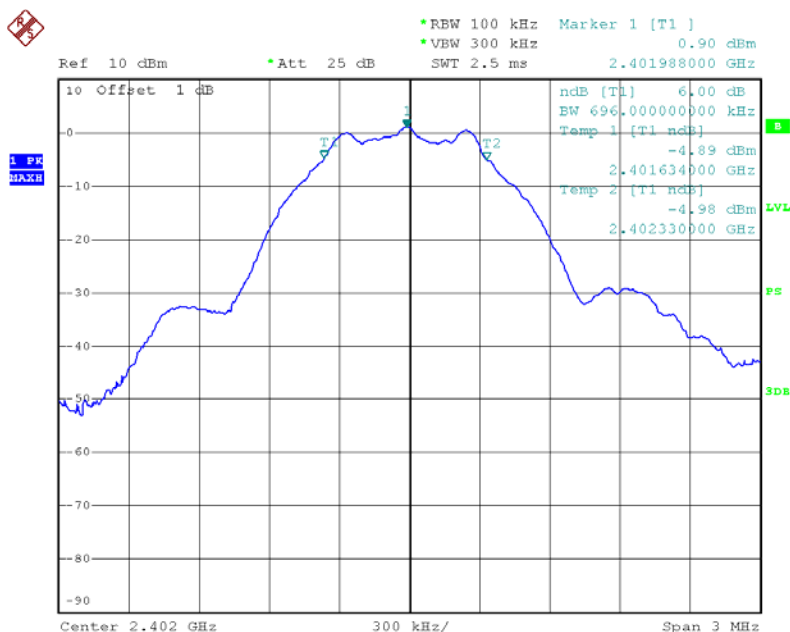


Date: 22.OCT.2016 19:04:36

### BLE Mode 2442 MHz

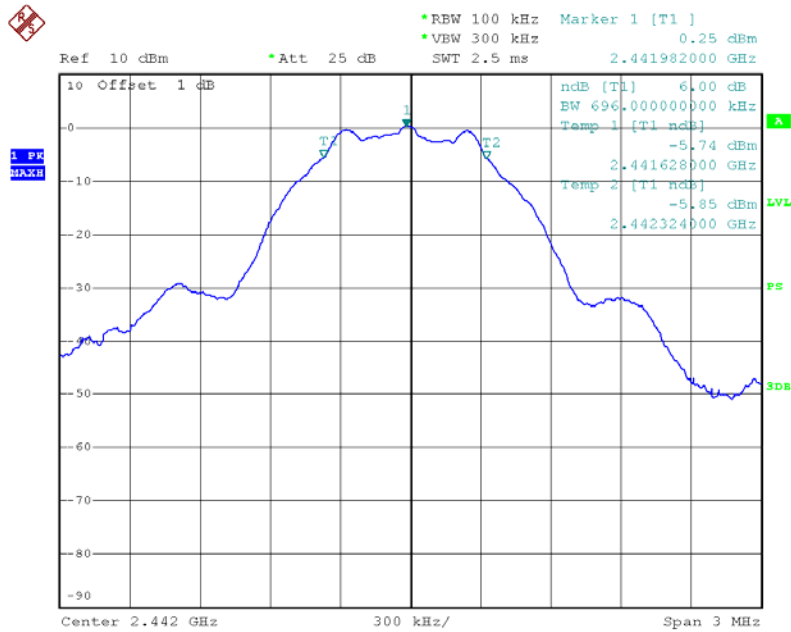

Date: 22.OCT.2016 19:05:24

### BLE Mode 2480 MHz

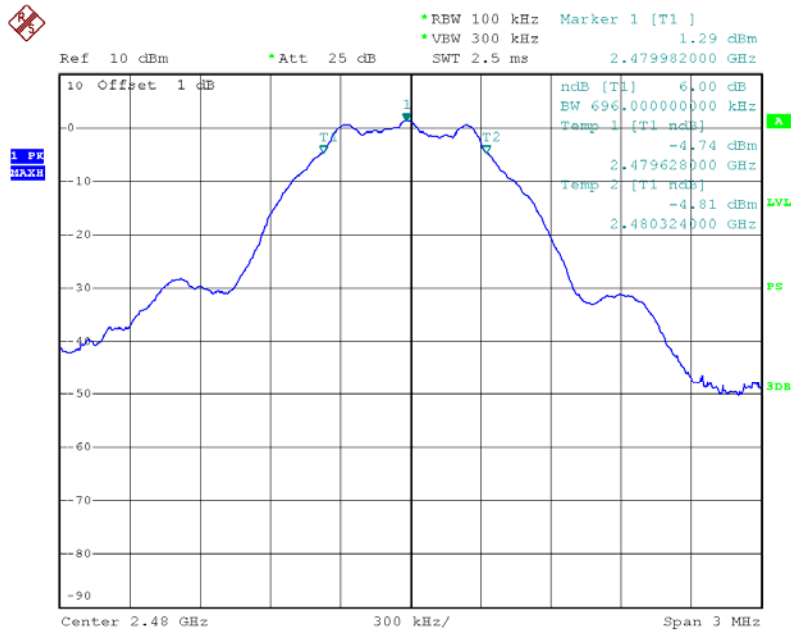

Date: 22.OCT.2016 19:05:51

## 7. POWER SPECTRAL DENSITY

### 7.1 LIMITS


FCC Part 15.247, Subpart C/ RSS 247 Section 5.2(2)	
Frequency Range (MHz)	2400~2483.5
99% Occupied Bandwidth	8 dBm in any 3 kHz

### 7.2 TEST PROCEDURE

The EUT was directly connected to the power meter and antenna output port as show in the block diagram as below.

Spectrum Parameters	Setting
Attenuation	Auto
Span	Set the span to 1.5 times the DTS channel bandwidth
RBW	3 kHz
VBW	$\geq 3\text{RBW}$
Detector	Reak
Trace	Max Hold
Sweep Time	Auto

### 7.3 TEST SETUP

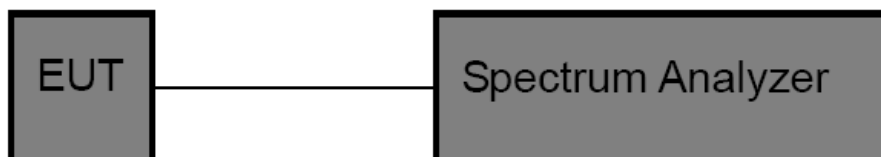

### 7.4 TEST INSTRUMENTS

Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
Spectrum Analyzer	R&S	FSP40	100154	Jul. 04. 2016	Jul. 03. 2017	1 year


### 7.5 EUT OPERATING CONDITIONS

The EUT was set to continuously transmitting in the maximum power during the test.

### 7.6 TEST RESULTS


Bluetooth BLE Mode			
Frequency (MHz)	Power Density (3 kHz/dBm)	Limit (dBm/3KHz)	Result
2402	-14.93	8	Pass
2440	-15.54		
2480	-14.36		

### BLE Mode 2402 MHz

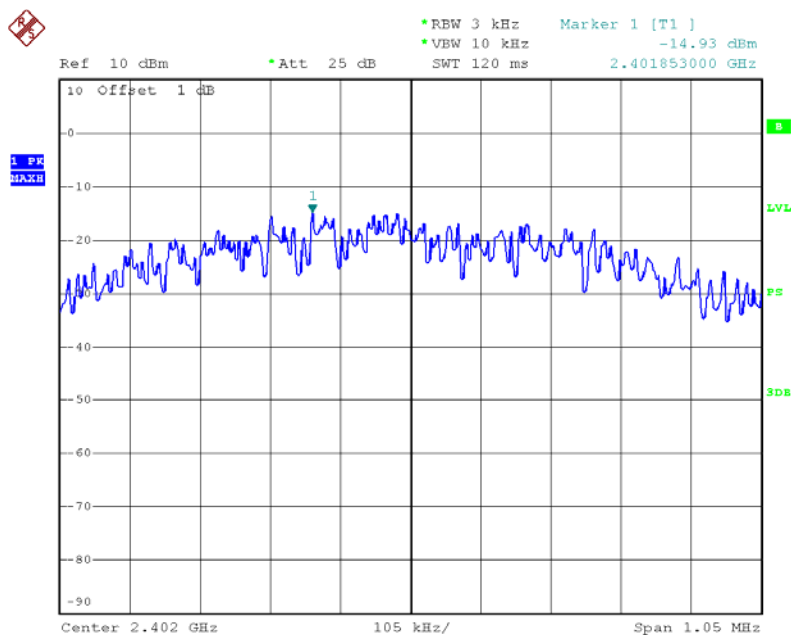


Date: 22.OCT.2016 19:09:58

### BLE Mode 2442 MHz

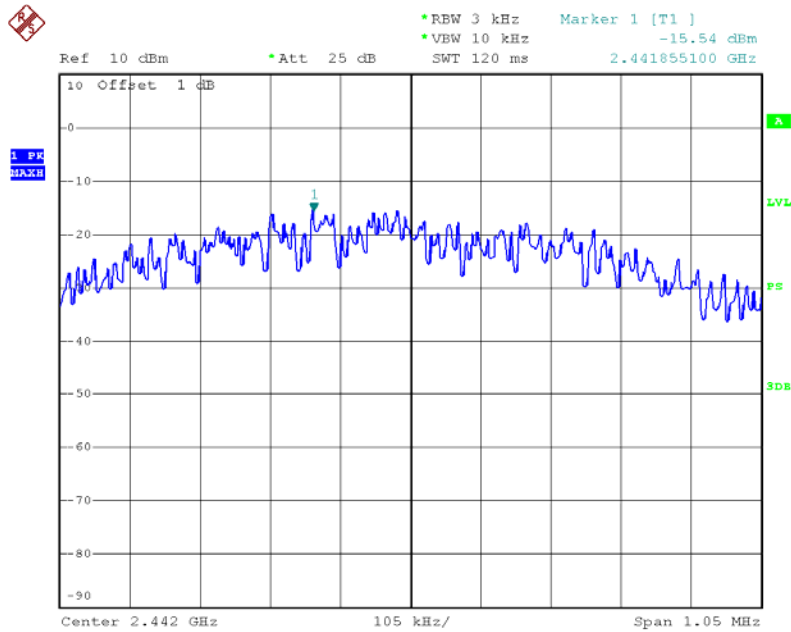

Date: 22.OCT.2016 19:08:53

### BLE Mode 2480 MHz

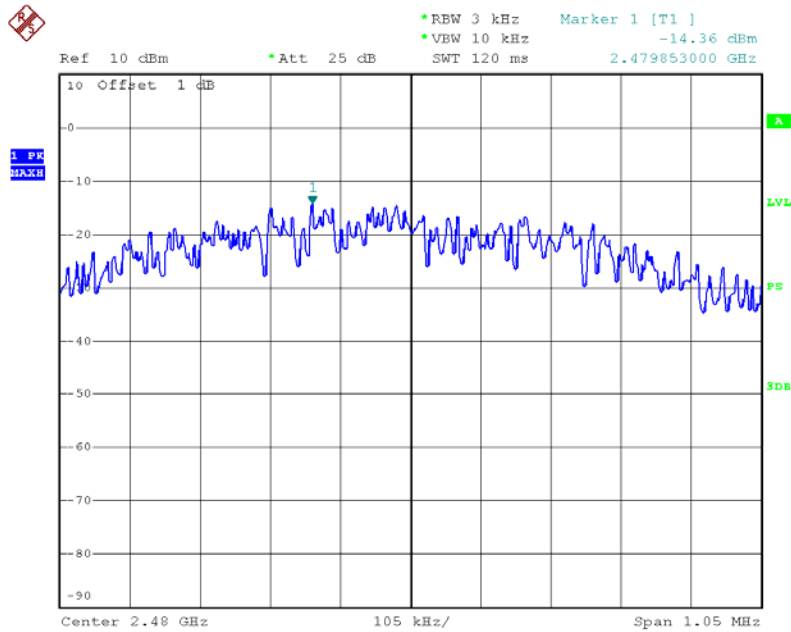

Date: 22.OCT.2016 19:08:33

## 8. ANTENNA CONDUCTED SPURIOUS EMISSION

### 8.1 LIMITS

FCC Part 15.247, Subpart C/ RSS 247 Section 5.5	
Frequency Range (MHz)	2400~2483.5
Limit	In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the desired power, based on either an RF conducted measurement, provide the transmitter demonstrates compliance with the peak conducted power limits.


### 8.2 TEST PROCEDURE

The EUT was directly connected to the power meter and antenna output port as show in the block diagram as bellow.

- Set frequency range to capture low band-edge from 2310 MHz up to 2390 MHz, and for up band-edge from 2483.5 MHz up to 2500 MHz
- For low band-edge set the equipment transmit at the lowest channel, and for up band-edge set the equipment transmit at the highest channel
- Set the VBW  $\geq 3$  RBW (100kHz/ 300kHz) for conducted measurement
- For radiated measurements the RBW set to 1 MHz, and the VBW set to 1 MHz for peak measurements and 10 Hz for average measurement

### 8.3 TEST SETUP

Conducted Emission Test Setup

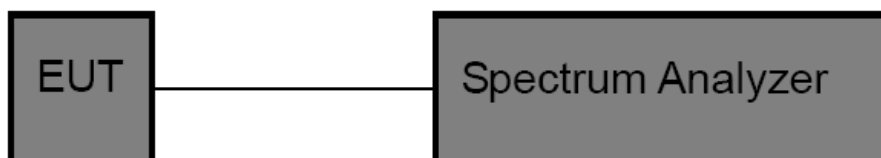

### 8.4 TEST INSTRUMENTS

Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
Spectrum Analyzer	R&S	FSP40	100154	Jul. 04. 2016	Jul. 03. 2017	1 year

### 8.5 EUT OPERATING CONDITIONS


The EUT was set to continuously transmitting in the maximum power during the test.

### 8.6 TEST RESULTS

Only showed the worst mode data of ANT 0 transmitting.




### BLE Mode Low CH

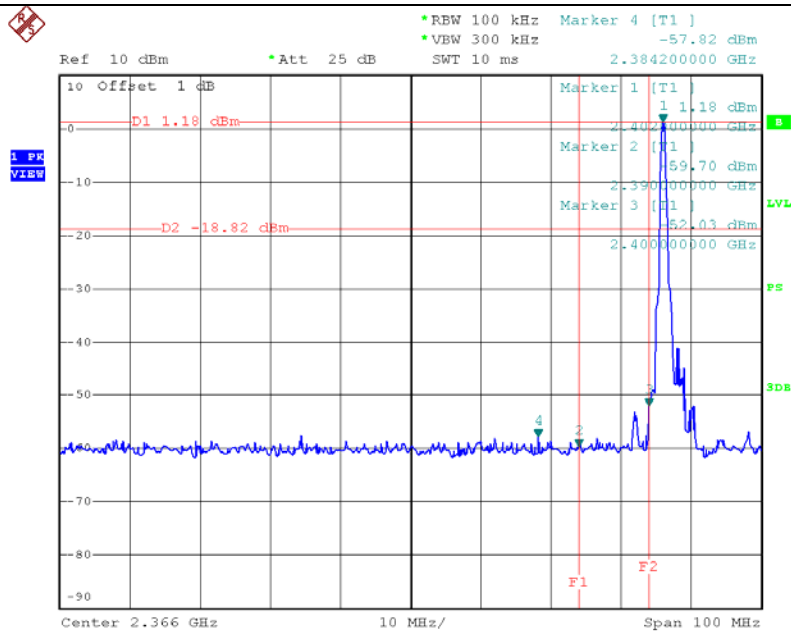


Date: 22.OCT.2016 19:11:18

### BLE Mode High CH

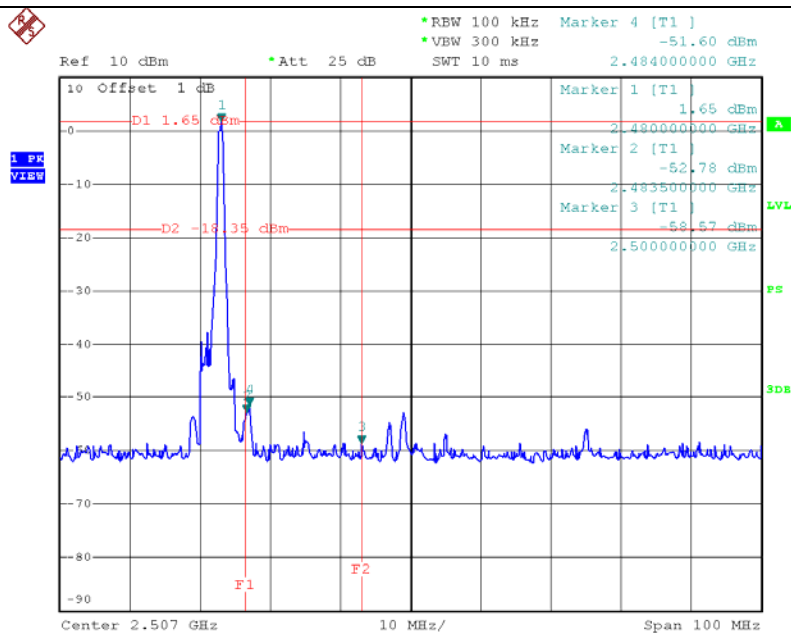


Date: 22.OCT.2016 19:12:31

### BLE Mode 2402 MHz Below 1 GHz

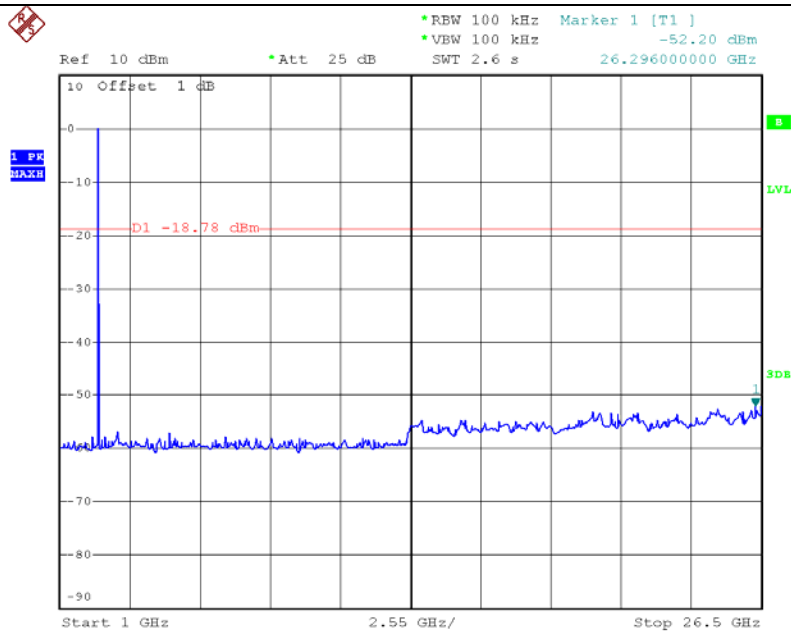


Date: 22.OCT.2016 19:30:29

### BLE Mode 2402 MHz Above 1 GHz

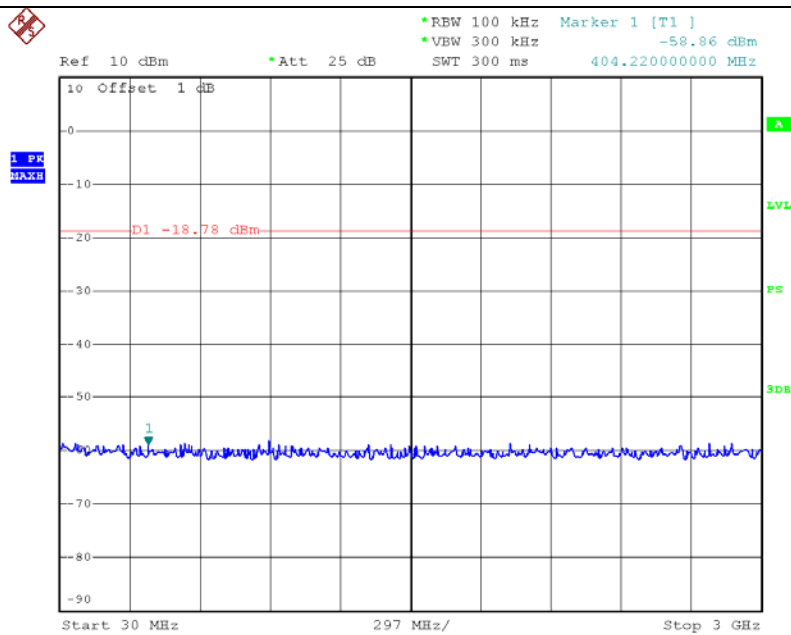


Date: 22.OCT.2016 19:15:17

### BLE Mode 2442 MHz Below 1 GHz

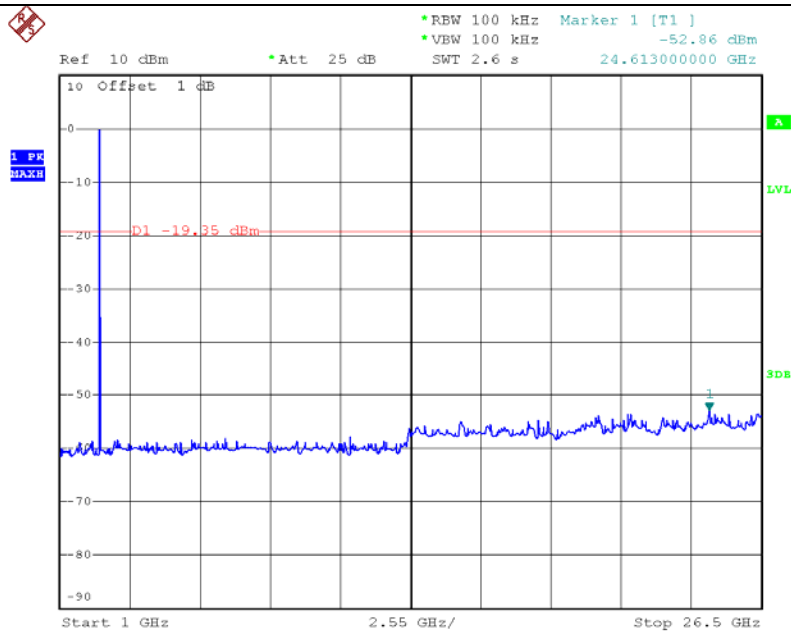


Date: 22.OCT.2016 19:33:51

### BLE Mode 2442 MHz Above 1 GHz

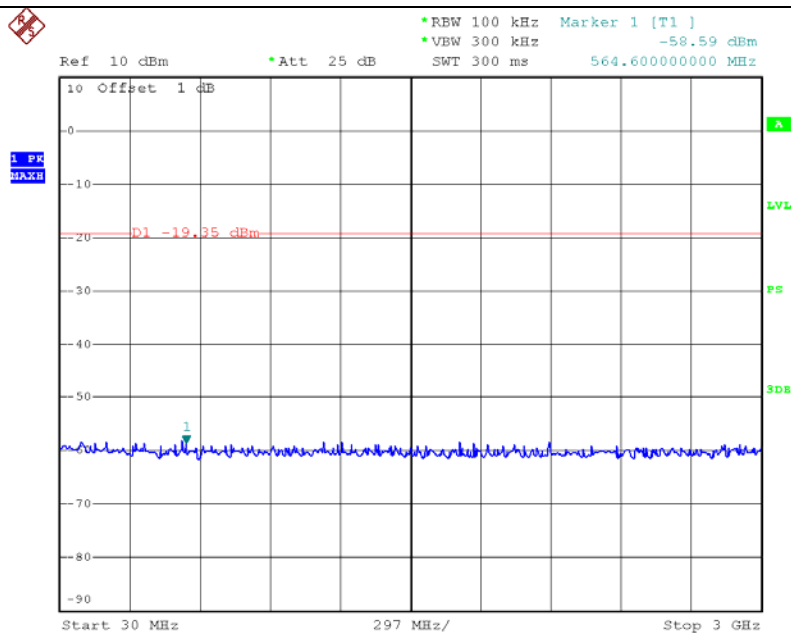


Date: 22.OCT.2016 19:16:03

### BLE Mode 2480 MHz Below 1 GHz

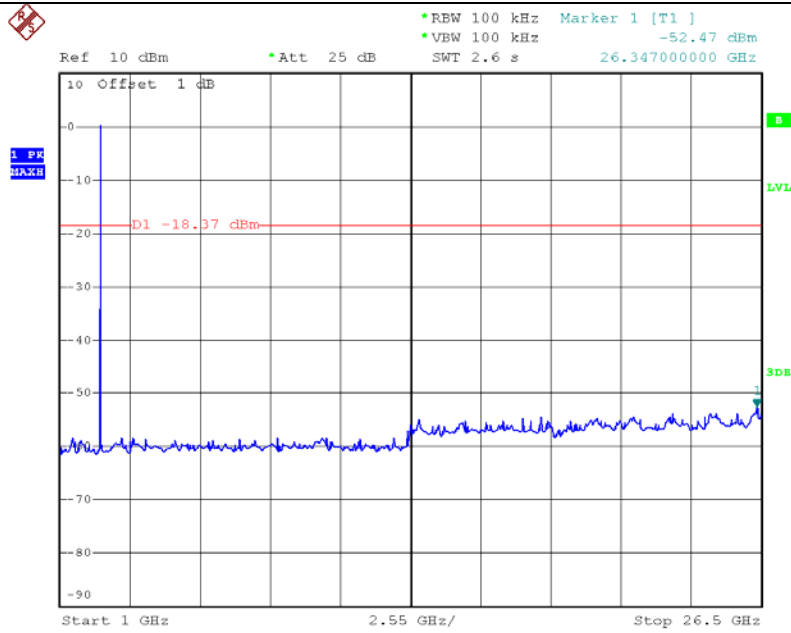

Date: 22.OCT.2016 19:40:43

### BLE Mode 2480 MHz Above 1 GHz

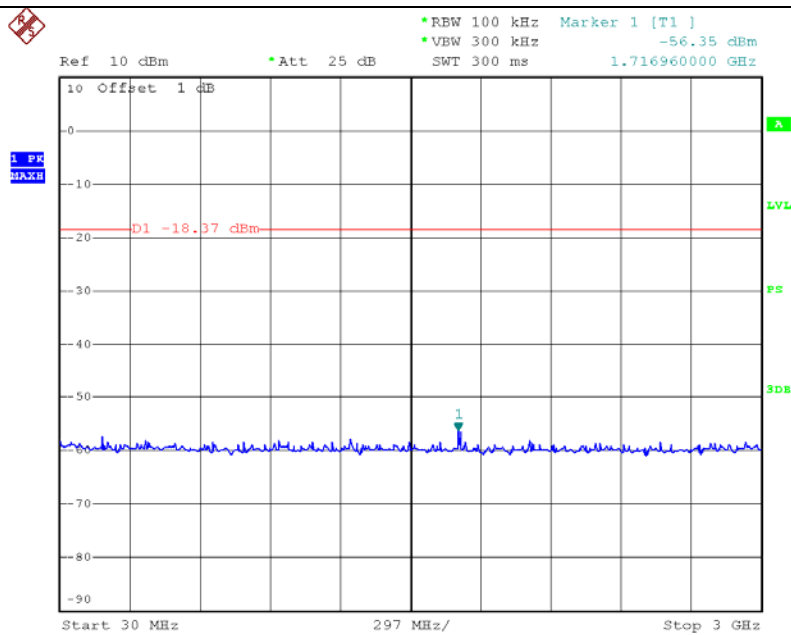

Date: 22.OCT.2016 19:14:45

## 9. ANTENNA REQUIREMENT

### 9.1 REQUIREMENT

Antenna Requirement (15.203)	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
Antenna Requirement (15.247)	If transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 9.2 ANTENNA CONNECTOR CONSTRUCTION

The EUT antenna is a PIFA Antenna. And the maximum gain of this antenna is 2.0 dBi. It complies with the standard requirement.