



Test Report

Product Name : Tablet PC System

Model No.: TTAB910

FCC ID.: BJM-TTAB910

Applicant : Tatung Company

Address : 22, Chungshan N. Rd., 3rd Sec. Taipei, Taiwan, 104, R.O.C.

Date of Receipt : Nov. 01, 2002

Date of Test : Nov. 04, 2002

Report No. : 02BL010FI

The test results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Test Report Certification

Test Date : Nov. 04, 2002

Report No. : 02BL010FI



Accredited by NIST (NVLAP)

NVLAP Lab Code: 200533-0

Product Name : Tablet PC System

Applicant : Tatung Company

Address : 22, Chungshan N. Rd., 3rd Sec. Taipei, Taiwan, 104, R.O.C.

Manufacturer : Tatung Company

Model No. : TTAB910

FCC ID. : BJM-TTAB910

Rated Voltage : AC 120V/60Hz

Trade Name : TATUNG

Measurement Standard : FCC Part 15 Subpart C Paragraph 15.247

Measurement Procedure : ANSI C63.4: 1992

Test Result : Complied



Test Results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Documented By : Chialin Chen
(Chialin Chen)

Tested By : Tony Hsieh
(Tony Hsieh)

Approved By : Gene Chang
(Gene Chang)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION.....	5
1.1. EUT Description.....	5
1.2. Operational Description	6
1.3. Tested System Details.....	7
1.4. Configuration of tested System	8
1.5. EUT Exercise Software	8
1.6. Test Facility	9
2. Conducted Emission.....	10
2.1. Test Equipment.....	10
2.2. Test Setup	10
2.3. Limits	10
2.4. Test Procedure	11
2.5. Test Result of Conducted Emission.....	12
3. Peak Power Output	13
3.1. Test Equipment.....	13
3.2. Test Setup	13
3.3. Limits	13
3.4. Test Result of Peak Power Output.....	14
4. RF Exposure Evaluation.....	15
4.1. Limits	15
4.2. Test Procedure	15
4.3. Test Result of RF Exposure Evaluation.....	16
5. Radiated Emission.....	17
5.1. Test Equipment.....	17
5.2. Test Setup	17
5.3. Limits	18
5.4. Test Procedure	19
5.5. Test Result of Radiated Emission.....	20
6. Band Edge	44
6.1. Test Equipment.....	44
6.2. Test Setup	44
6.3. Limits	45
6.4. Test Procedure	45
6.5. Test Result of Band Edge	46
7. Occupied Bandwidth.....	50
7.1. Test Equipment.....	50
7.2. Test Setup	50
7.3. Limits	50
7.4. Test Result of Occupied Bandwidth	51
8. Power Density	54

8.1.	Test Equipment.....	54
8.2.	Test Setup	54
8.3.	Limits	54
8.4.	Test Result of Power Density	55
9.	EMI Reduction Method During Compliance Testing	58

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs

1. GENERAL INFORMATION

1.1. EUT Description

Product Name : Tablet PC System
 Trade Name : TATUNG
 FCC ID. : BJM-TTAB910
 Model No. : TTAB910
 Frequency Range : 2412MHz to 2462MHz
 Channel Number : 11
 Chip Rate : 1Mbps, 2Mbps, 5.5Mbps, 11Mbps
 Type of Modulation : Direct Sequence Spread Spectrum
 Antenna type : Connector
 Antenna Gain : 3dBi
 Operator Selection of : By software
 Operating Frequency

EUT Configuration:

CPU	PIII 866MHz
PCB NO.	VT830MB, BN&HK-R00D, TT910BN
ADAPTER	HP-OD042D03 R1V:X01
BATTERY PACK	7.4V 3900/4300mAh
Mini PCI Modem	1456VQL1T(INT)
*Mini-PCI Module	WISTRON, EM9-NB
SO-DIMM 256MB PC133	MICRON, MT8LSDT3264HG-133 256MB SAMSUNG, M464S3323DN1-L7A 256MB (Final Test) INFINEON, HYS64V32220GDL-7.5 256MB
SO-DIMM 128MB PC133	MICRON, MT4LSDT1664HG-133 128MB SAMSUNG, M464S1724DTS-L7A 128MB INFINEON, HYS64V16220GDL-7.5 128MB
20GB HDD 2.5"×9.5mm	TOSHIBA, MK2018GAP(5V) (Final Test) IBM, IC25N020ATCS04(5V) FUJITSU, MHS2020AT(5V)
Power Adapter	MFR:H1PRO, M/N:HP-OD042D03 Cable IN: Non-Shielded, 1.8m Cable Out: Non-Shielded, 1.8m, one ferrite core bonded.
Mother Board	VT830MB, TATUNG
VGA Card	On Board
Sound Card	On Board
LAN Card	On Board

Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 1:	2412 MHz	Channel 5:	2432 MHz	Channel 9:	2452 MHz
Channel 2:	2417 MHz	Channel 6:	2437 MHz	Channel 10:	2457 MHz
Channel 3:	2422 MHz	Channel 7:	2442 MHz	Channel 11:	2462 MHz
Channel 4:	2427 MHz	Channel 8:	2447 MHz		

Note:

1. This device is a 2.4GHz Tablet PC System included a 2.4GHz receiving function, a 2.4GHz transmitting function.
2. Regards to the frequency band operation; two rate that were included the lowest 、middle and highest frequency of channel were selected to perform the test, then shown on this report.
3. These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.
4. This device is a composite device in accordance with Part 15 regulations. The function receiving was measured and made a test report that the report number is 02BL010F under Declaration of Conformity.

1.2. Operational Description

EUT is a Tablet PC System with wireless LAN adapter. This device provided 11 channels and four kind of transmitting speed 1,2,5.5 and 11Mbps. The device of RF carrier is DQPSK, DB PSK and CCK.

The device adapts direct sequence spread spectrum modulation. The Connector antenna was provides diversity function to improve the receiving function.

This Tablet PC System is an IEEE 802.11b Wireless LAN adapter. It allows your computer to connect to a wireless network and to share resources, such as files or printers without being bound to the network wires. Operation in 2.4GHz Direst Sequence Spread Spectrum (DSSS) radio transmission, the Tablet PC System transfers data at speeds up to 64/128-bit Wired Equivalent Protection (WEP) algorithm is used. In addition, its standard compliance ensures that it can communicate with any 802.11b network.

1.3. Tested System Details


The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	Serial No.	FCC ID.	Power Cord
(1)	Monitor	ADI	CM703	038054T10203875A	FCC DoC	Non-shielded, 1.8m
(2)	USB Keyboard	BTC	5200U	N/A	E5XKB5122U	N/A
(3)	Microphone & Earphone	TOKTO	SX-MI	N/A	FCC DoC	N/A
(4)	USB Mouse	Logitech	M-BE58	LZE11405150	FCC DoC	N/A
(5)	Notebook	DELL	PP01L	N/A	FCC DoC	Non-shielded, 1.8m
(6)	AP	ASUS	AC300	N/A	FCC DoC	Non-shielded, 1.8m

Signal Cable Type	Signal cable Description
A. Monitor Cable	Shielded, 1.8m, two ferrite cores bonded
B. USB Keyboard Cable	Shielded, 1.5m
C. Microphone & Earphone Cable	Non-Shielded, 1.8m
D. USB Mouse Cable	Shielded, 1.5m
E. Telecom Cable	Non-Shielded, 5m
F. LAN Cable	Non-Shielded, 6m
G. LAN Cable	Non-Shielded, 1m

1.4. Configuration of tested System

Tx & Rx

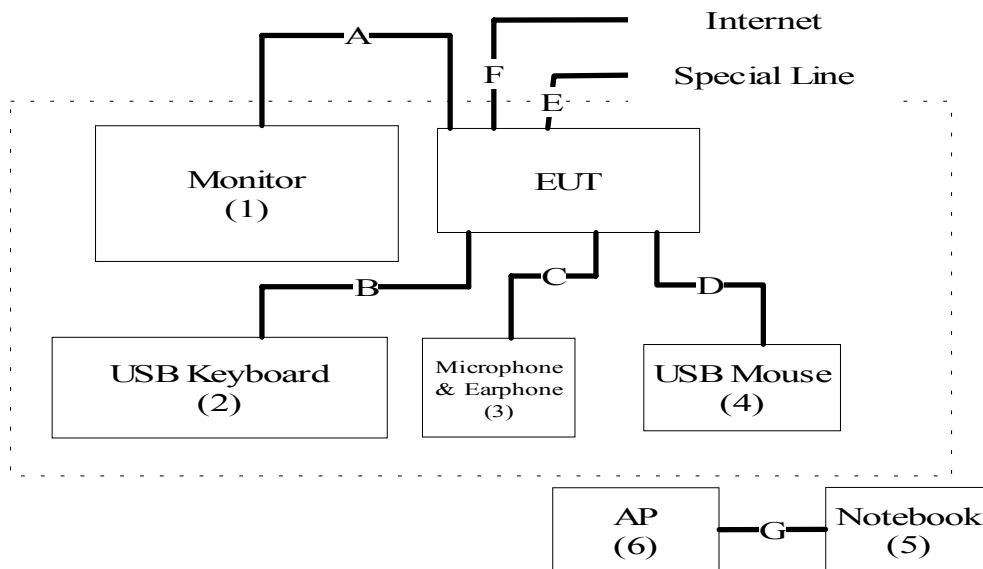

1.5. EUT Exercise Software

- (1) Setup the EUT and simulators as shown on 1.4
- (2) Turn on the power of all equipment.
- (3) Notebook PC reads data from disk.
- (4) Data will be transmitting and receiving through EUT.
- (5) The transmitted and receive status will be shown on the monitor.
- (6) Repeat the above procedure (3) to (5)

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

Site Description: June 22, 2001 File on
Federal Communications Commission
FCC Engineering Laboratory
7435 Oakland Mills Road
Columbia, MD 21046
Reference 31040/SIT1300F2



July 03, 2001 Accreditation on NVLAP
NVLAP Lab Code: 200533-0

Site Name: Quietek Corporation

Site Address: No. 5-22, Ruei-Shu Valley, Ruei-Ping Tsuen,
Lin-Kou Shiang, Taipei,
Taiwan, R.O.C.
TEL: 886-2-8601-3788 / FAX : 886-2-8601-3789
E-Mail : service@quietek.com

2. Conducted Emission


2.1. Test Equipment

The following test equipment are used during the conducted emission test:

Item	Instrument	Manufacturer	Type No./Serial No	Last Cal.	Remark
1	Test Receiver	R & S	ESCS 30/825442/17	May, 2002	
2	L.I.S.N.	R & S	ESH3-Z5/825016/6	May, 2002	EUT
3	L.I.S.N.	Kyoritsu	KNW-407/8-1420-3	May, 2002	Peripherals
4	Pulse Limiter	R & S	ESH3-Z2	N/A	
5	No.4 Shielded Room			N/A	

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

2.2. Test Setup

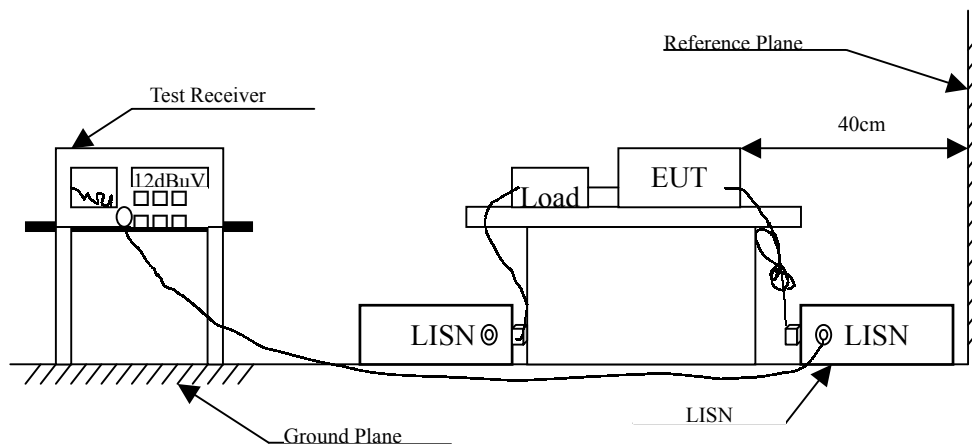

2.3. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit		
Frequency MHz	Limits	
	uV	dBuV
0.45 - 30	250	48.0

2.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4:1992 on conducted measurement.

Conducted emissions were invested over the frequency range from 0.45MHz to 30MHz using a receiver bandwidth of 9kHz.

2.5. Test Result of Conducted Emission

Product : Tablet PC System
Test Item : Conducted Emission Test
Test Mode : Normal Operation

Frequency MHz	Cable Loss dB	LISN Factor dB	Reading Level dBuV	Measurement Level dBuV	Limit s dBuV
------------------	---------------------	----------------------	--------------------------	------------------------------	-----------------

Line1

Quasi-Peak

0.162	0.21	0.10	38.62	38.93	48.00
0.235	0.21	0.10	33.34	33.65	48.00
* 0.548	0.21	0.10	31.12	31.43	48.00
1.805	0.09	0.13	27.55	27.76	48.00
3.063	0.23	0.15	24.43	24.81	48.00
7.543	0.33	0.19	27.36	27.88	48.00

Line2

Quasi-Peak

0.158	0.21	0.10	39.42	39.73	48.00
0.201	0.21	0.10	32.51	32.82	48.00
0.361	0.21	0.10	20.28	20.59	48.00
* 0.552	0.21	0.10	30.36	30.67	48.00
2.288	0.09	0.14	27.04	27.26	48.00
7.659	0.33	0.19	27.62	28.14	48.00

Remarks :

1. All Readings below 1GHz are Quasi-Peak value.
2. “ * ” means that this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable Loss.

3. Peak Power Output

3.1. Test Equipment


The following test equipments are used during the radiated emission tests:

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Spectrum Analyzer	Advantest	R3272 / 72421194	May, 2002

Note: 1. All equipment upon which need to calibrated are with calibration period of 1 year.
2. Mark "X" test instruments are used to measure the final test results.

3.2. Test Setup

Conduction Power Measurement

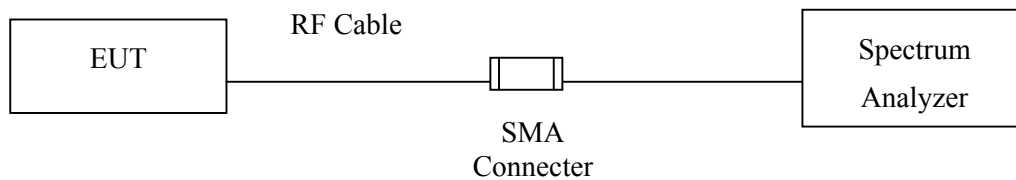

3.3. Limits

The maximum peak power shall be less 1 Watt.

3.4. Test Result of Peak Power Output

Product : Tablet PC System
 Test Item : Peak Power Output Data
 Test Site : No.2 OATS
 Test Mode : Normal Operation

Data Speed: 1Mbps

Channel No.	Frequency(MHz)	Measurement	Required Limit	Result
1	2412.0	8.94 dBm	1 Watt= 30 dBm	Pass
6	2437.0	8.17 dBm	1 Watt= 30 dBm	Pass
11	2462.0	9.65 dBm	1 Watt= 30 dBm	Pass

Data Speed: 11Mbps

Channel No.	Frequency (MHz)	Measurement	Required Limit	Result
1	2412.0	8.67dBm	1 Watt= 30 dBm	Pass
6	2437.0	10.45dBm	1 Watt= 30 dBm	Pass
11	2462.0	9.75dBm	1 Watt= 30 dBm	Pass

4. RF Exposure Evaluation

4.1. Limits

According to FCC 1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b)

LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time (Minutes)
(A) Limits for Occupational/ Control Exposures				
300-1500	--	--	F/300	6
1500-100,000	--	--	5	6
(B) Limits for General Population/ Uncontrolled Exposures				
300-1500	--	--	F/1500	6
1500-100,000	--	--	1	30

F= Frequency in MHz

Friis Formula

Friis transmission formula: $P_d = (P_{out} * G) / (4 * \pi * r^2)$

Where

P_d = power density in mW/cm²

P_{out} = output power to antenna in mW

G = gain of antenna in linear scale

π = 3.1416

R = distance between observation point and center of the radiator in cm

P_d is the limit of MPE, 1 mW/cm². If we know the maximum gain of the antenna and the total power input to the antenna, through the calculation, we will know the distance r where the MPE limit is reached.

4.2. Test Procedure

Software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel individually.

The temperature and related humidity: 18°C and 78% RH.

4.3. Test Result of RF Exposure Evaluation

Product : Tablet PC System
 Test Item : RF Exposure Evaluation Data
 Test Site : No.2 OATS
 Test Mode : Normal Operation

Antenna Gain

Antenna Gain: The maximum Gain measured in fully anechoic chamber is 3dBi or 2 in linear scale.

Output Power Into Antenna & RF Exposure Evaluation Distance:

Channel	Channel Frequency (MHz)	Output Power to Antenna (mW)	Minimum Allowable Distance ® From Skin(cm)
1 (1Mbps)	2412.9	7.8343	1.1153
1 (11Mbps)	2412.9	7.3621	1.0812
6 (1Mbps)	2437.9	6.5615	1.0207
6 (11Mbps)	2437.9	11.0917	1.3271
11 (1Mbps)	2462.9	9.2257	1.2103
11 (11Mbps)	2462.9	9.4406	1.2243

The distance r (4th column) calculated from the Fries transmission formula is far shorter than 20 cm separation requirement. So, RF exposure limit warning or SAR test are not required.

5. Radiated Emission


5.1. Test Equipment

The following test equipment are used during the radiated emission test:

Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Site # 1		Test Receiver	R & S	ESCS 30 / 825442/14	May, 2002
		Spectrum Analyzer	Advantest	R3261C / 71720140	May, 2002
		Pre-Amplifier	HP	8447D/3307A01812	May, 2002
		Bilog Antenna	Chase	CBL6112B / 12452	Sep., 2002
		Horn Antenna	EM	EM6917 / 103325	May, 2002
Site # 2	X	Test Receiver	R & S	ESCS 30 / 825442/17	May, 2002
	X	Spectrum Analyzer	Advantest	R3261C / 71720609	May, 2002
	X	Pre-Amplifier	HP	8447D/3307A01814	May, 2002
	X	Bilog Antenna	Chase	CBL6112B / 2455	Sep., 2002
	X	Horn Antenna	EM	EM6917 / 103325	May, 2002

- Note:
1. All equipments that need to calibrate are with calibration period of 1 year.
 2. Mark "X" test instruments are used to measure the final test results.

5.2. Test Setup

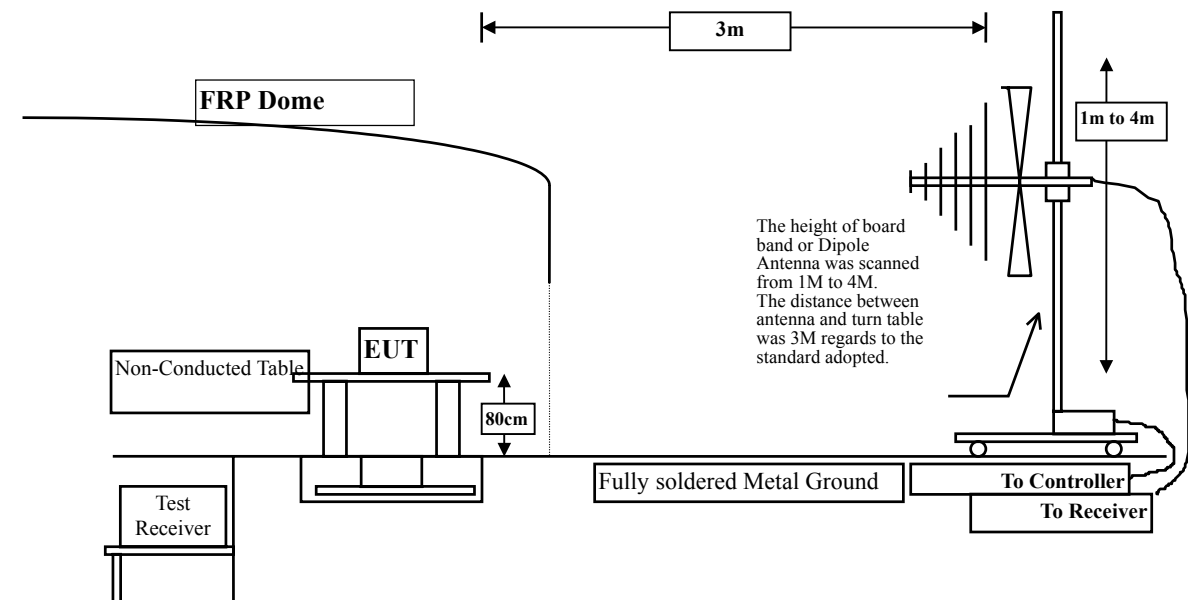

5.3. Limits

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209(a) Limits		
Frequency MHz	uV/m @3m	dBuV/m@3m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

- Remarks :
1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
 2. In the Above Table, the tighter limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

5.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4:1992 on radiated measurement.

The additional latch filter below 1GHz was used to measure the level of harmonics radiated emission during field strength of harmonics measurement.

The bandwidth below 1GHz setting on the field strength meter (R&S Test Receiver ESCS 30)is 120 kHz, above 1GHz are 1 MHz.

The frequency range from 30MHz to 10th harmonics is checked.

5.5. Test Result of Radiated Emission

Product : Tablet PC System
Test Item : Harmonic Radiated Emission Data
Test Site : No.2 OATS
Test Mode : Channel 1 (1Mbps)

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Peak	Average
MHz	Loss	Factor		Level	Level		Limit	Limit
	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m	dBuV/m

Horizontal

Peak Detector:

4825.619	6.17	33.64	19.50	29.30	49.61	24.39	74.00	54.00
7237.658	7.33	36.77	18.33	23.15	< 48.92	25.08	74.00	54.00
9651.207	8.73	38.24	15.86	19.34	< 50.44	23.56	74.00	54.00
12064.00	9.98	39.03	16.08	17.96	< 50.90	23.10	74.00	54.00
14476.68	10.65	40.46	17.43	17.40	< 51.09	22.91	74.00	54.00
16887.65	12.27	41.87	16.14	13.40	< 51.40	22.60	74.00	54.00
19302.38	12.72	37.96	18.02	19.14	< 51.80	22.20	74.00	54.00
21715.21	13.02	37.40	18.77	20.41	< 52.06	21.94	74.00	54.00
24126.97	13.65	39.24	19.06	18.38	< 52.20	21.80	74.00	54.00

Vertical

Peak Detector:

4825.614	6.17	33.64	19.50	27.50	47.81	26.19	74.00	54.00
7238.419	7.33	36.77	18.33	23.25	< 49.02	24.98	74.00	54.00
9651.158	8.73	38.24	15.86	20.20	< 51.30	22.70	74.00	54.00
12064.01	9.98	39.03	16.08	17.16	< 50.10	23.90	74.00	54.00
14476.78	10.65	40.46	17.43	17.19	< 50.88	23.12	74.00	54.00
16889.48	12.27	41.87	16.14	12.60	< 50.60	23.40	74.00	54.00
19302.38	12.72	37.96	18.02	18.74	< 51.40	22.60	74.00	54.00
21715.05	13.02	37.40	18.77	20.06	< 51.71	22.29	74.00	54.00
24126.99	13.65	39.24	19.06	18.88	< 52.70	21.30	74.00	54.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz °
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz °
4. Emission Level = Reading Level + Probe Factor + Cable Loss- PreAMP.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Tablet PC System
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.2 OATS
 Test Mode : Channel 6 (1Mbps)

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Peak	Average
MHz	Loss	Factor		Level	Level		Limit	Limit
	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m	dBuV/m

Horizontal

Peak Detector:

4875.431	6.20	33.77	19.50	27.92	48.40	25.60	74.00	54.00
7313.152	7.37	36.98	18.27	23.09	< 49.17	24.83	74.00	54.00
9750.799	8.87	38.35	15.81	19.18	< 50.60	23.40	74.00	54.00
12188.41	10.13	39.07	16.29	17.00	< 49.91	24.09	74.00	54.00
14626.21	10.67	40.02	17.87	17.57	< 50.38	23.62	74.00	54.00
17063.87	12.30	42.89	16.27	12.25	< 51.17	22.83	74.00	54.00
19501.62	12.76	37.97	18.18	19.07	< 51.61	22.39	74.00	54.00
21939.26	13.04	37.34	18.79	20.14	< 51.72	22.28	74.00	54.00
24377.02	13.72	39.37	19.09	18.08	< 52.07	21.93	74.00	54.00

Vertical

Peak Detector:

4875.341	6.20	33.77	19.50	28.06	48.54	25.46	74.00	54.00
7313.116	7.37	36.98	18.27	23.34	< 49.42	24.58	74.00	54.00
9750.674	8.87	38.35	15.81	18.41	< 49.83	24.17	74.00	54.00
12188.41	10.13	39.07	16.29	17.81	< 50.72	23.28	74.00	54.00
14626.10	10.67	40.02	17.87	17.22	< 50.03	23.97	74.00	54.00
17063.84	12.30	42.89	16.27	12.37	< 51.29	22.71	74.00	54.00
19501.57	12.76	37.97	18.18	19.23	< 51.77	22.23	74.00	54.00
21939.22	13.04	37.34	18.79	19.58	< 51.16	22.84	74.00	54.00
24376.89	13.72	39.37	19.09	18.72	< 52.71	21.29	74.00	54.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz °
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz °
4. Emission Level = Reading Level + Probe Factor + Cable Loss- PreAMP.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Tablet PC System
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.2 OATS
 Test Mode : Channel 11 (1Mbps)

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Peak	Average
MHz	Loss	Factor		Level	Level		Limit	Limit
	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m	dBuV/m

Horizontal

Peak Detector:

4924.241	6.26	33.90	19.49	28.45	49.12	24.88	74.00	54.00
7386.315	7.42	37.14	18.22	24.90	< 51.24	22.76	74.00	54.00
9848.411	8.97	38.47	15.70	18.38	< 50.12	23.88	74.00	54.00
12310.41	10.27	39.12	16.18	17.60	< 50.81	23.19	74.00	54.00
14772.54	10.68	39.53	17.01	17.71	< 50.91	23.09	74.00	54.00
17234.71	12.33	43.99	16.40	11.28	< 51.20	22.80	74.00	54.00
19696.74	12.79	37.97	18.32	19.23	< 51.67	22.33	74.00	54.00
22158.89	13.10	37.40	18.82	19.46	< 51.13	22.87	74.00	54.00
24621.01	13.78	39.50	19.12	17.65	< 51.81	22.19	74.00	54.00

Vertical

Peak Detector:

4924.246	6.26	33.90	19.49	28.20	48.87	25.13	74.00	54.00
7386.315	7.42	37.14	18.22	24.42	< 50.76	23.24	74.00	54.00
9848.381	8.97	38.47	15.70	17.85	< 49.59	24.41	74.00	54.00
12310.51	10.27	39.12	16.18	17.87	< 51.08	22.92	74.00	54.00
14772.56	10.68	39.53	17.01	17.74	< 50.94	23.06	74.00	54.00
17234.69	12.33	43.99	16.40	11.42	< 51.34	22.66	74.00	54.00
19696.80	12.79	37.97	18.32	18.96	< 51.40	22.60	74.00	54.00
22158.84	13.10	37.40	18.82	20.57	< 52.24	21.76	74.00	54.00
24621.00	13.78	39.50	19.12	18.00	< 52.16	21.84	74.00	54.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz °
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz °
4. Emission Level = Reading Level + Probe Factor + Cable Loss- PreAMP.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Tablet PC System
Test Item : Harmonic Radiated Emission Data
Test Site : No.2 OATS
Test Mode : Channel 1 (11Mbps)

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Peak	Average
MHz	Loss	Factor		Level	Level		Limit	Limit
	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m	dBuV/m

Horizontal

Peak Detector:

4825.598	6.17	33.64	19.50	28.71	49.02	24.98	74.00	54.00
7237.554	7.33	36.77	18.33	25.32	< 51.09	22.91	74.00	54.00
9651.348	8.73	38.24	15.86	18.70	< 49.80	24.20	74.00	54.00
12064.01	9.98	39.03	16.08	17.45	< 50.39	23.61	74.00	54.00
14476.69	10.65	40.46	17.43	16.92	< 50.61	23.39	74.00	54.00
16887.43	12.27	41.87	16.14	13.15	< 51.15	22.85	74.00	54.00
19302.28	12.72	37.96	18.02	19.13	< 51.79	22.21	74.00	54.00
21715.18	13.02	37.40	18.77	19.59	< 51.24	22.76	74.00	54.00
24126.75	13.65	39.24	19.06	18.66	< 52.48	21.52	74.00	54.00

Vertical

Peak Detector:

4825.602	6.17	33.64	19.50	28.71	49.02	24.98	74.00	54.00
7238.355	7.33	36.77	18.33	24.15	< 49.92	24.08	74.00	54.00
9651.127	8.73	38.24	15.86	19.56	< 50.66	23.34	74.00	54.00
12064.28	9.98	39.03	16.08	17.89	< 50.83	23.17	74.00	54.00
14476.64	10.65	40.46	17.43	17.41	< 51.10	22.90	74.00	54.00
16889.66	12.27	41.87	16.14	13.70	< 51.70	22.30	74.00	54.00
19302.34	12.72	37.96	18.02	18.23	< 50.89	23.11	74.00	54.00
21715.12	13.02	37.40	18.77	20.53	< 52.18	21.82	74.00	54.00
24126.88	13.65	39.24	19.06	17.81	< 51.63	22.37	74.00	54.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz °
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz °
4. Emission Level = Reading Level + Probe Factor + Cable Loss- PreAMP.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Tablet PC System
Test Item : Harmonic Radiated Emission Data
Test Site : No.2 OATS
Test Mode : Channel 6 (11Mbps)

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Peak	Average
MHz	Loss	Factor		Level	Level		Limit	Limit
	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m	dBuV/m

Horizontal

Peak Detector:

4875.446	6.20	33.77	19.50	27.71	48.19	25.81	74.00	54.00
7313.201	7.37	36.98	18.27	23.63	< 49.71	24.29	74.00	54.00
9750.814	8.87	38.35	15.81	18.20	< 49.62	24.38	74.00	54.00
12188.42	10.13	39.07	16.29	17.83	< 50.74	23.26	74.00	54.00
14626.16	10.67	40.02	17.87	18.23	< 51.04	22.96	74.00	54.00
17063.87	12.30	42.89	16.27	12.56	< 51.48	22.52	74.00	54.00
19500.99	12.76	37.97	18.18	18.50	< 51.04	22.96	74.00	54.00
21939.27	13.04	37.34	18.79	20.29	< 51.87	22.13	74.00	54.00
24377.00	13.72	39.37	19.09	17.27	< 51.26	22.74	74.00	54.00

Vertical

Peak Detector:

4875.299	6.20	33.77	19.50	28.79	49.27	24.73	74.00	54.00
7313.125	7.37	36.98	18.27	24.34	< 50.42	23.58	74.00	54.00
9750.598	8.87	38.35	15.81	18.18	< 49.60	24.40	74.00	54.00
12188.43	10.13	39.07	16.29	17.80	< 50.71	23.29	74.00	54.00
14626.14	10.67	40.02	17.87	18.63	< 51.44	22.56	74.00	54.00
17063.79	12.30	42.89	16.27	13.05	< 51.97	22.03	74.00	54.00
19501.58	12.76	37.97	18.18	19.53	< 52.07	21.93	74.00	54.00
21939.27	13.04	37.34	18.79	19.94	< 51.52	22.48	74.00	54.00
24376.88	13.72	39.37	19.09	18.16	< 52.15	21.85	74.00	54.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz °
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz °
4. Emission Level = Reading Level + Probe Factor + Cable Loss- PreAMP.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Tablet PC System
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.2 OATS
 Test Mode : Channel 11 (11Mbps)

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Peak	Average
MHz	Loss	Factor		Level	Level		Limit	Limit
	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m	dBuV/m

Horizontal

Peak Detector:

4924.257	6.26	33.90	19.49	28.67	49.34	24.66	74.00	54.00
7386.324	7.42	37.14	18.22	24.32	< 50.66	23.34	74.00	54.00
9848.315	8.97	38.47	15.70	18.45	< 50.19	23.81	74.00	54.00
12310.29	10.27	39.12	16.18	18.39	< 51.60	22.40	74.00	54.00
14772.61	10.68	39.53	17.01	18.07	< 51.27	22.73	74.00	54.00
17234.67	12.33	43.99	16.40	10.99	< 50.91	23.09	74.00	54.00
19696.75	12.79	37.97	18.32	19.82	< 52.26	21.74	74.00	54.00
22158.88	13.10	37.40	18.82	20.44	< 52.11	21.89	74.00	54.00
24621.10	13.78	39.50	19.12	17.41	< 51.57	22.43	74.00	54.00

Vertical

Peak Detector:

4924.217	6.26	33.90	19.49	29.34	50.01	23.99	74.00	54.00
7386.422	7.42	37.14	18.22	23.17	< 49.51	24.49	74.00	54.00
9848.617	8.97	38.47	15.70	19.29	< 51.03	22.97	74.00	54.00
12310.61	10.27	39.12	16.18	17.01	< 50.22	23.78	74.00	54.00
14772.44	10.68	39.53	17.01	18.19	< 51.39	22.61	74.00	54.00
17234.70	12.33	43.99	16.40	11.86	< 51.78	22.22	74.00	54.00
19696.45	12.79	37.97	18.32	18.94	< 51.38	22.62	74.00	54.00
22158.38	13.10	37.40	18.82	20.27	< 51.94	22.06	74.00	54.00
24621.67	13.78	39.50	19.12	18.02	< 52.18	21.82	74.00	54.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz °
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz °
4. Emission Level = Reading Level + Probe Factor + Cable Loss- PreAMP.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Tablet PC System
 Test Item : General Radiated Emission Data
 Test Site : No.2 OATS
 Test Mode : Channel 1 (1Mbps)

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Limit
	Loss	Factor		Level	Level		
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal:							
166.155	1.57	9.12	0.00	20.54	31.23	12.27	43.50
232.476	1.92	9.61	0.00	25.90	37.43	8.57	46.00
398.580	2.78	14.62	0.00	20.24	37.64	8.36	46.00
598.250	3.80	17.71	0.00	13.64	35.15	10.85	46.00
631.350	3.97	18.64	0.00	14.97	37.58	8.42	46.00
* 664.140	4.13	18.42	0.00	17.19	39.74	6.26	46.00

Vertical:							
64.241	1.04	6.13	0.00	19.34	26.52	13.48	40.00
132.475	1.40	10.55	0.00	17.54	29.49	14.01	43.50
232.660	1.92	10.01	0.00	20.08	32.01	13.99	46.00
* 398.570	2.78	16.13	0.00	20.08	38.99	7.01	46.00
455.057	3.06	16.66	0.00	17.66	37.37	8.63	46.00
664.680	4.14	17.63	0.00	15.18	36.95	9.05	46.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable Loss.

Product : Tablet PC System
 Test Item : General Radiated Emission Data
 Test Site : No.2 OATS
 Test Mode : Channel 6 (1Mbps)

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Limit
	Loss	Factor		Level	Level		
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m
=====							
Horizontal:							
67.924	1.07	5.99	0.00	20.37	27.43	12.57	40.00
112.647	1.29	12.01	0.00	17.46	30.76	12.74	43.50
167.995	1.59	8.99	0.00	18.30	28.87	14.63	43.50
220.995	1.85	8.63	0.00	19.34	29.82	16.18	46.00
* 398.611	2.78	14.62	0.00	21.74	39.14	6.86	46.00
532.588	3.45	16.61	0.00	16.70	36.76	9.24	46.00
Vertical:							
48.925	0.96	7.00	0.00	21.33	29.30	10.70	40.00
130.352	1.39	10.59	0.00	17.49	29.47	14.03	43.50
167.245	1.57	8.47	0.00	22.67	32.71	10.79	43.50
216.348	1.82	9.33	0.00	18.27	29.43	16.57	46.00
300.924	2.27	12.06	0.00	19.36	33.69	12.31	46.00
* 440.674	2.99	16.97	0.00	18.66	38.62	7.38	46.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable Loss.

Product : Tablet PC System
 Test Item : General Radiated Emission Data
 Test Site : No.2 OATS
 Test Mode : Channel 11 (1Mbps)

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Limit
	Loss	Factor		Level	Level		
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal:

86.992	1.16	9.46	0.00	22.34	32.96	7.04	40.00
144.511	1.45	10.66	0.00	18.84	30.95	12.55	43.50
200.365	1.74	8.40	0.00	21.54	31.68	11.82	43.50
240.674	1.96	10.57	0.00	19.33	31.86	14.14	46.00
362.847	2.59	13.83	0.00	17.33	33.76	12.24	46.00
* 631.350	3.97	18.64	0.00	16.74	39.35	6.65	46.00

Vertical:

132.360	1.40	10.59	0.00	16.79	28.78	14.72	43.50
209.748	1.80	8.85	0.00	21.39	32.03	11.47	43.50
298.355	2.25	12.14	0.00	18.64	33.03	12.97	46.00
* 398.557	2.78	16.13	0.00	20.34	39.25	6.75	46.00
482.662	3.20	16.53	0.00	18.37	38.10	7.90	46.00
664.160	4.13	17.70	0.00	16.75	38.58	7.42	46.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable Loss.

Product : Tablet PC System
 Test Item : General Radiated Emission Data
 Test Site : No.2 OATS
 Test Mode : Channel 1 (11Mbps)

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Limit
	Loss	Factor		Level	Level		
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal:

68.113	1.07	5.99	0.00	22.64	29.70	10.30	40.00
110.664	1.28	12.01	0.00	16.98	30.27	13.23	43.50
170.005	1.60	8.93	0.00	19.68	30.21	13.29	43.50
232.847	1.92	9.61	0.00	19.65	31.18	14.82	46.00
367.552	2.62	14.21	0.00	19.04	35.87	10.13	46.00
* 664.030	4.13	18.42	0.00	17.03	39.58	6.42	46.00

Vertical:

76.315	1.11	6.73	0.00	18.33	26.17	13.83	40.00
126.348	1.36	10.27	0.00	19.95	31.58	11.92	43.50
184.225	1.67	8.31	0.00	20.48	30.45	13.05	43.50
262.884	2.08	13.22	0.00	17.85	33.15	12.85	46.00
445.652	3.02	17.05	0.00	18.37	38.44	7.56	46.00
* 721.334	4.44	19.74	0.00	15.24	39.41	6.59	46.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable Loss.

Product : Tablet PC System
 Test Item : General Radiated Emission Data
 Test Site : No.2 OATS
 Test Mode : Channel 6 (11Mbps)

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Limit
	Loss	Factor		Level	Level		
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m
=====							
Horizontal:							
71.994	1.08	6.64	0.00	18.34	26.07	13.93	40.00
144.821	1.47	10.66	0.00	20.66	32.78	10.72	43.50
167.252	1.57	9.09	0.00	21.95	32.61	10.89	43.50
232.448	1.92	9.61	0.00	19.37	30.90	15.10	46.00
* 322.474	2.38	12.22	0.00	21.74	36.34	9.66	46.00
530.347	3.45	16.59	0.00	15.11	35.15	10.85	46.00
Vertical:							
50.364	0.98	6.60	0.00	17.68	25.26	14.74	40.00
120.445	1.33	10.36	0.00	21.57	33.26	10.24	43.50
162.240	1.55	8.53	0.00	16.30	26.37	17.13	43.50
200.015	1.74	8.40	0.00	19.24	29.38	14.12	43.50
398.580	2.78	16.13	0.00	19.68	38.59	7.41	46.00
* 631.362	3.97	18.65	0.00	16.34	38.96	7.04	46.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable Loss.

Product : Tablet PC System
 Test Item : General Radiated Emission Data
 Test Site : No.2 OATS
 Test Mode : Channel 11 (11Mbps)

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Limit
	Loss	Factor		Level	Level		
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal:

132.226	1.40	11.69	0.00	19.34	32.43	11.07	43.50
150.740	1.49	10.32	0.00	13.84	25.66	17.84	43.50
266.844	2.09	12.24	0.00	18.20	32.53	13.47	46.00
398.647	2.78	14.62	0.00	18.69	36.09	9.91	46.00
455.101	3.06	16.34	0.00	16.74	36.14	9.86	46.00
* 621.884	3.93	18.68	0.00	15.84	38.45	7.55	46.00

Vertical:

82.664	1.14	7.53	0.00	16.72	25.39	14.61	40.00
118.245	1.32	10.49	0.00	19.24	31.05	12.45	43.50
167.334	1.57	8.47	0.00	20.37	30.41	13.09	43.50
230.245	1.90	9.73	0.00	19.30	30.94	15.06	46.00
371.881	2.63	14.87	0.00	16.64	34.14	11.86	46.00
* 560.012	3.60	19.04	0.00	14.76	37.40	8.60	46.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable Loss.

Product : Tablet PC System
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.2 OATS
 Test Mode : Channel 1 (1Mbps) (Flat on Turntable)

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Peak	Average
MHz	Loss	Factor		Level	Level		Limit	Limit
	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m	dBuV/m

Horizontal

Peak Detector:

4825.713	6.17	33.64	19.50	30.19	50.50	23.50	74.00	54.00
7238.254	7.33	36.77	18.33	25.41	51.18	22.82	74.00	54.00
9651.096	8.73	38.25	15.86	20.72	51.84	22.16	74.00	54.00

Vertical

Peak Detector:

4825.773	6.17	33.64	19.50	32.10	52.41	21.59	74.00	54.00
7238.494	7.33	36.77	18.33	25.14	50.91	23.09	74.00	54.00
9651.381	8.73	38.25	15.86	20.75	51.87	22.13	74.00	54.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz °
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz °
4. Emission Level = Reading Level + Probe Factor + Cable Loss- PreAMP.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Tablet PC System
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.2 OATS
 Test Mode : Channel 6 (1Mbps) (Flat on Turntable)

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Peak	Average
MHz	Loss	Factor		Level	Level		Limit	Limit
	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m	dBuV/m

Horizontal

Peak Detector:

4874.647	6.21	33.77	19.50	29.86	50.35	23.65	74.00	54.00
7312.016	7.37	36.98	18.27	24.83	50.91	23.09	74.00	54.00
9749.324	8.87	38.35	15.82	20.19	51.59	22.41	74.00	54.00

Vertical

Peak Detector:

4874.639	6.21	33.77	19.50	29.84	50.33	23.67	74.00	54.00
7311.955	7.37	36.98	18.27	24.71	50.79	23.21	74.00	54.00
9749.264	8.87	38.35	15.82	20.32	51.72	22.28	74.00	54.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz °
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz °
4. Emission Level = Reading Level + Probe Factor + Cable Loss- PreAMP.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Tablet PC System
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.2 OATS
 Test Mode : Channel 11 (1Mbps) (Flat on Turntable)

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Peak	Average
MHz	Loss	Factor		Level	Level		Limit	Limit
	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m	dBuV/m

Horizontal

Peak Detector:

4924.751	6.23	33.90	19.49	29.72	50.37	23.63	74.00	54.00
7387.024	7.42	37.14	18.22	24.93	51.27	22.73	74.00	54.00
9849.352	8.97	38.44	15.70	20.45	52.16	21.84	74.00	54.00

Vertical

Peak Detector:

4924.871	6.23	33.90	19.49	31.07	51.72	22.28	74.00	54.00
7387.358	7.42	37.14	18.22	24.30	50.64	23.36	74.00	54.00
9849.711	8.97	38.44	15.70	19.68	51.39	22.61	74.00	54.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz °
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz °
4. Emission Level = Reading Level + Probe Factor + Cable Loss- PreAMP.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Tablet PC System
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.2 OATS
 Test Mode : Channel 1 (11Mbps) (Flat on Turntable)

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Peak	Average
MHz	Loss	Factor		Level	Level		Limit	Limit
	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m	dBuV/m

Horizontal

Peak Detector:

4824.749	6.17	33.64	19.50	29.18	49.49	24.51	74.00	54.00
7237.024	7.33	36.77	18.33	24.88	50.65	23.35	74.00	54.00
9649.350	8.73	38.25	15.86	20.81	51.93	22.07	74.00	54.00

Vertical

Peak Detector:

4824.748	6.17	33.64	19.50	29.97	50.28	23.72	74.00	54.00
7237.082	7.33	36.77	18.33	25.08	50.85	23.15	74.00	54.00
9649.339	8.73	38.25	15.86	21.25	52.37	21.63	74.00	54.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz °
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz °
4. Emission Level = Reading Level + Probe Factor + Cable Loss- PreAMP.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Tablet PC System
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.2 OATS
 Test Mode : Channel 6 (11Mbps) (Flat on Turntable)

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Peak	Average
MHz	Loss	Factor		Level	Level		Limit	Limit
	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m	dBuV/m

Horizontal

Peak Detector:

4877.773	6.21	33.77	19.50	29.88	50.37	23.63	74.00	54.00
7316.645	7.37	36.98	18.27	25.21	51.29	22.71	74.00	54.00
9755.498	8.87	38.35	15.82	20.21	51.61	22.39	74.00	54.00

Vertical

Peak Detector:

4876.450	6.21	33.77	19.50	29.09	49.58	24.42	74.00	54.00
7314.572	7.37	36.98	18.27	24.60	50.68	23.32	74.00	54.00
9752.750	8.87	38.35	15.82	20.32	51.72	22.28	74.00	54.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz °
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz °
4. Emission Level = Reading Level + Probe Factor + Cable Loss- PreAMP.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Tablet PC System
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.2 OATS
 Test Mode : Channel 11 (11Mbps) (Flat on Turntable)

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Peak	Average
MHz	Loss	Factor		Level	Level		Limit	Limit
	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m	dBuV/m

Horizontal

Peak Detector:

4924.090	6.23	33.90	19.49	29.52	50.17	23.83	74.00	54.00
7386.030	7.42	37.14	18.22	24.75	51.09	22.91	74.00	54.00
9848.024	8.97	38.44	15.70	20.45	52.16	21.84	74.00	54.00

Vertical

Peak Detector:

4924.030	6.23	33.90	19.49	29.18	49.83	24.17	74.00	54.00
7386.024	7.42	37.14	18.22	24.15	50.49	23.51	74.00	54.00
9848.010	8.97	38.44	15.70	19.71	51.42	22.58	74.00	54.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz °
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz °
4. Emission Level = Reading Level + Probe Factor + Cable Loss- PreAMP.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Tablet PC System
 Test Item : General Radiated Emission Data
 Test Site : No.2 OATS
 Test Mode : Channel 1 (1Mbps) (Flat on Turntable)

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Limit
	Loss	Factor		Level	Level		
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal:							
50.690	0.97	7.73	0.00	25.09	33.80	6.20	40.00
133.590	1.40	11.39	0.00	22.81	35.60	7.90	43.50
* 232.730	1.91	9.61	0.00	32.32	43.84	2.16	46.00
397.630	2.76	14.62	0.00	22.40	39.79	6.21	46.00
584.840	3.73	18.19	0.00	18.65	40.57	5.43	46.00
779.810	4.73	19.03	0.00	18.38	42.14	3.86	46.00
996.120	5.85	20.77	0.00	18.15	44.76	9.24	54.00
Vertical:							
66.350	1.05	5.86	0.00	30.68	37.59	2.41	40.00
133.250	1.40	10.55	0.00	23.29	35.24	8.26	43.50
232.730	1.91	10.01	0.00	30.77	42.69	3.31	46.00
398.600	2.77	16.13	0.00	20.58	39.48	6.52	46.00
597.450	3.79	19.42	0.00	19.66	42.88	3.12	46.00
* 779.810	4.73	19.88	0.00	19.37	43.98	2.02	46.00
997.090	5.85	19.97	0.00	21.78	47.59	6.41	54.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable Loss.

Product : Tablet PC System
 Test Item : General Radiated Emission Data
 Test Site : No.2 OATS
 Test Mode : Channel 6 (1Mbps) (Flat on Turntable)

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Limit
	Loss	Factor		Level	Level		
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m
=====							
Horizontal:							
66.320	1.05	5.66	0.00	28.49	35.21	4.79	40.00
133.650	1.40	11.39	0.00	22.47	35.26	8.24	43.50
231.760	1.91	9.57	0.00	32.28	43.76	2.24	46.00
299.660	2.26	12.53	0.00	22.93	37.72	8.28	46.00
398.600	2.77	14.62	0.00	21.45	38.84	7.16	46.00
* 597.450	3.79	17.71	0.00	22.28	43.79	2.21	46.00
779.810	4.73	19.03	0.00	17.88	41.64	4.36	46.00
996.120	5.85	20.77	0.00	18.42	45.03	8.97	54.00
Vertical:							
66.320	1.05	5.86	0.00	28.29	35.20	4.80	40.00
133.690	1.40	10.49	0.00	23.50	35.40	8.10	43.50
231.760	1.91	9.87	0.00	30.74	42.52	3.48	46.00
324.880	2.39	12.59	0.00	22.57	37.55	8.45	46.00
398.600	2.77	16.13	0.00	19.26	38.16	7.84	46.00
597.450	3.79	19.42	0.00	18.59	41.81	4.19	46.00
* 779.810	4.73	19.88	0.00	19.71	44.32	1.68	46.00
997.090	5.85	19.97	0.00	21.21	47.02	6.98	54.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable Loss.

Product : Tablet PC System
 Test Item : General Radiated Emission Data
 Test Site : No.2 OATS
 Test Mode : Channel 11 (1Mbps) (Flat on Turntable)

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Limit
	Loss	Factor		Level	Level		
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal:

66.350	1.05	5.66	0.00	28.68	35.40	4.60	40.00
133.650	1.40	11.39	0.00	22.47	35.26	8.24	43.50
* 232.730	1.91	9.61	0.00	33.39	44.91	1.09	46.00
398.600	2.77	14.62	0.00	22.58	39.97	6.03	46.00
598.420	3.80	17.65	0.00	22.79	44.24	1.76	46.00
779.810	4.73	19.03	0.00	17.82	41.58	4.42	46.00
997.090	5.85	20.77	0.00	17.71	44.32	9.68	54.00

Vertical:

66.390	1.06	5.96	0.00	28.18	35.20	4.80	40.00
133.650	1.40	10.49	0.00	24.30	36.20	7.30	43.50
* 232.730	1.91	10.01	0.00	31.00	42.92	3.08	46.00
398.600	2.77	16.13	0.00	20.83	39.73	6.27	46.00
597.450	3.79	19.42	0.00	18.13	41.35	4.65	46.00
779.810	4.73	19.88	0.00	15.54	40.15	5.85	46.00
996.120	5.85	19.97	0.00	21.63	47.44	6.56	54.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable Loss.

Product : Tablet PC System
 Test Item : General Radiated Emission Data
 Test Site : No.2 OATS
 Test Mode : Channel 1 (11Mbps) (Flat on Turntable)

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Limit
	Loss	Factor		Level	Level		
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal:

66.320	1.05	5.66	0.00	29.28	36.00	4.00	40.00
133.900	1.40	11.39	0.00	22.81	35.60	7.90	43.50
* 232.730	1.91	9.61	0.00	33.16	44.68	1.32	46.00
398.600	2.77	14.62	0.00	21.92	39.31	6.69	46.00
584.840	3.73	18.19	0.00	20.62	42.54	3.46	46.00
779.810	4.73	19.03	0.00	18.17	41.93	4.07	46.00
998.060	5.85	20.77	0.00	16.47	43.08	10.92	54.00

Vertical:

66.390	1.06	5.96	0.00	27.27	34.29	5.71	40.00
133.650	1.40	10.49	0.00	23.36	35.26	8.24	43.50
* 231.760	1.91	9.87	0.00	31.14	42.92	3.08	46.00
398.600	2.77	16.13	0.00	19.81	38.71	7.29	46.00
597.450	3.79	19.42	0.00	16.85	40.07	5.93	46.00
779.810	4.73	19.88	0.00	17.41	42.02	3.98	46.00
997.090	5.85	19.97	0.00	20.83	46.64	7.36	54.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable Loss.

Product : Tablet PC System
 Test Item : General Radiated Emission Data
 Test Site : No.2 OATS
 Test Mode : Channel 6 (11Mbps) (Flat on Turntable)

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Limit
	Loss	Factor		Level	Level		
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal:

66.390	1.06	5.96	0.00	28.88	35.90	4.10	40.00
133.580	1.40	11.39	0.00	21.47	34.26	9.24	43.50
* 231.760	1.91	9.57	0.00	32.49	43.97	2.03	46.00
398.600	2.77	14.62	0.00	23.40	40.79	5.21	46.00
597.450	3.79	17.71	0.00	19.65	41.16	4.84	46.00
779.810	4.73	19.03	0.00	17.95	41.71	4.29	46.00
996.120	5.85	20.77	0.00	15.91	42.52	11.48	54.00

Vertical:

66.380	1.05	5.86	0.00	28.79	35.70	4.30	40.00
133.870	1.40	10.49	0.00	22.12	34.02	9.48	43.50
* 232.730	1.91	10.01	0.00	32.94	44.86	1.14	46.00
398.600	2.77	16.13	0.00	20.62	39.52	6.48	46.00
779.810	4.73	19.88	0.00	17.50	42.11	3.89	46.00
997.090	5.85	19.97	0.00	20.59	46.40	7.60	54.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable Loss.

Product : Tablet PC System
 Test Item : General Radiated Emission Data
 Test Site : No.2 OATS
 Test Mode : Channel 11 (11Mbps) (Flat on Turntable)

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Limit
	Loss	Factor		Level	Level		
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal:

66.450	1.06	5.96	0.00	27.08	34.10	5.90	40.00
133.620	1.40	11.39	0.00	21.41	34.20	9.30	43.50
* 232.730	1.91	9.61	0.00	31.79	43.31	2.69	46.00
398.600	2.77	14.62	0.00	22.38	39.77	6.23	46.00
597.450	3.79	17.71	0.00	19.57	41.08	4.92	46.00
779.810	4.73	19.03	0.00	17.16	40.92	5.08	46.00
996.120	5.85	20.77	0.00	17.89	44.50	9.50	54.00

Vertical:

66.150	1.05	5.86	0.00	26.34	33.25	6.75	40.00
133.950	1.40	10.49	0.00	24.10	36.00	7.50	43.50
231.760	1.91	9.87	0.00	31.12	42.90	3.10	46.00
398.600	2.77	16.13	0.00	20.94	39.84	6.16	46.00
597.450	3.79	19.42	0.00	16.89	40.11	5.89	46.00
* 779.810	4.73	19.88	0.00	19.09	43.70	2.30	46.00
996.120	5.85	19.97	0.00	21.87	47.68	6.32	54.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable Loss.

6. Band Edge

6.1. Test Equipment


The following test equipments are used during the band edge tests:

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X Spectrum Analyzer	Advantest	R3272 / 72421194	May, 2002
X Test Receiver	R & S	ESCS 30 / 825442/14	May, 2002
X Spectrum Analyzer	Advantest	R3261C / 71720140	May, 2002
X Pre-Amplifier	HP	8447D/3307A01812	May, 2002
X Bilog Antenna	Chase	CBL6112B / 12452	Sep., 2002
X Horn Antenna	EM	EM6917 / 103325	May, 2002


Note: 1. All equipments that need to calibrate are with calibration period of 1 year.
2. Mark "X" test instruments are used to measure the final test results.

6.2. Test Setup

RF Conducted Measurement:

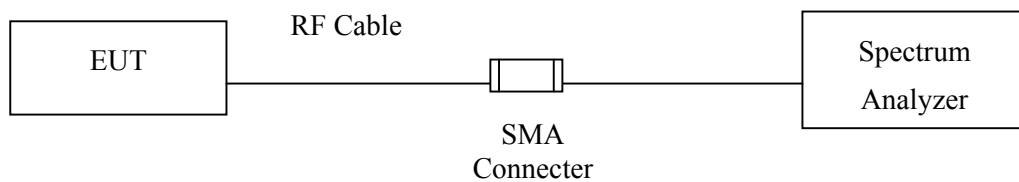

RF Radiated Measurement:

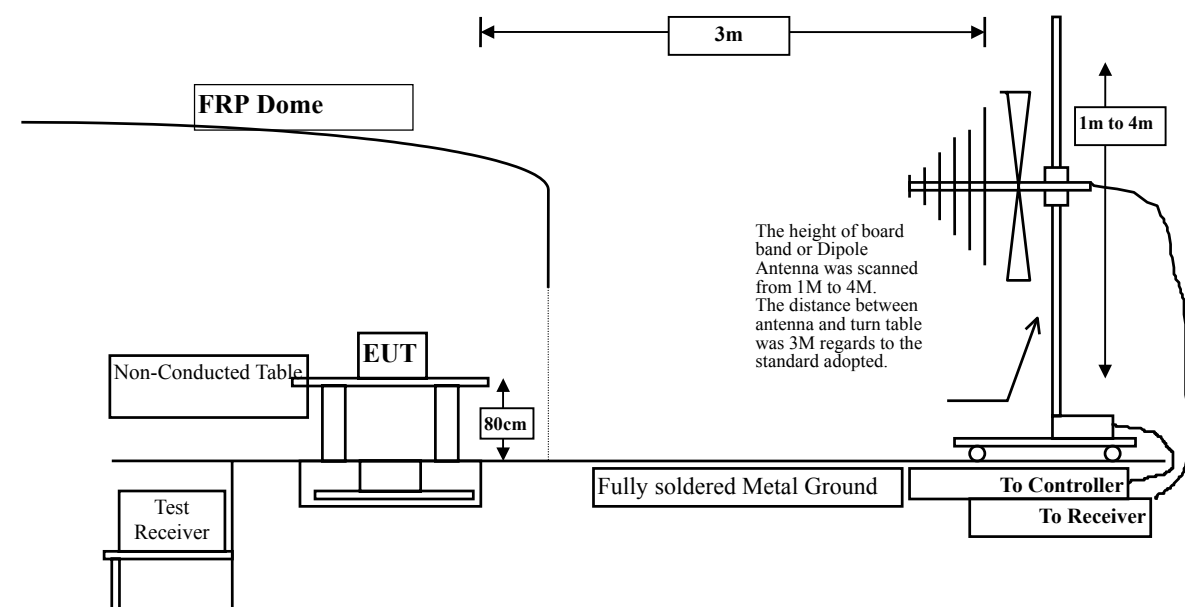

6.3. Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

6.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4:1992 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter (R&S Test Receiver ESCS 30)is 120 kHz, above 1GHz are 1 MHz.

6.5. Test Result of Band Edge

Product : Tablet PC System
 Test Item : Band Edge Data
 Test Site : No.2 OATS
 Test Mode : Channel 1 (1Mbps)

RF Radiated Measurement:

Channel No.	Frequency (MHz)	Required Limit (dBc)	Result
1 (Horizontal)	<2400	>20	Pass
1 (Vertical)	<2400	>20	Pass

Figure Channel 1: (Horizontal)


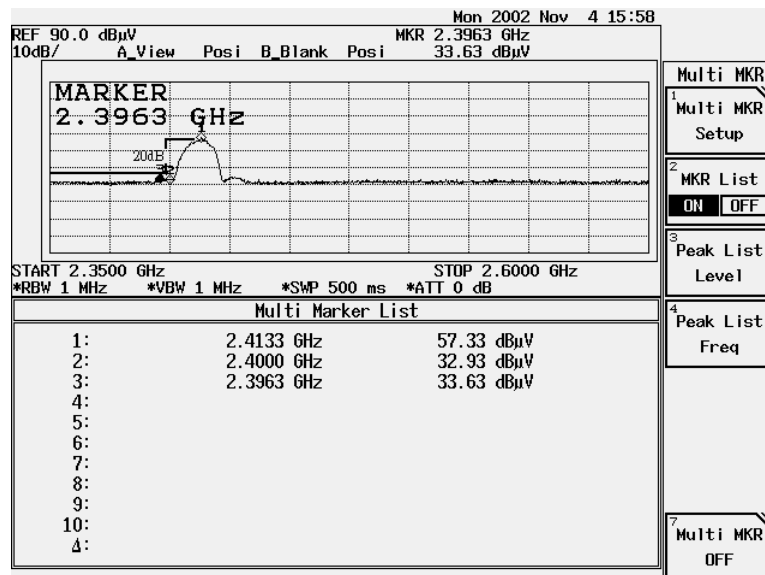


Figure Channel 1: (Vertical)

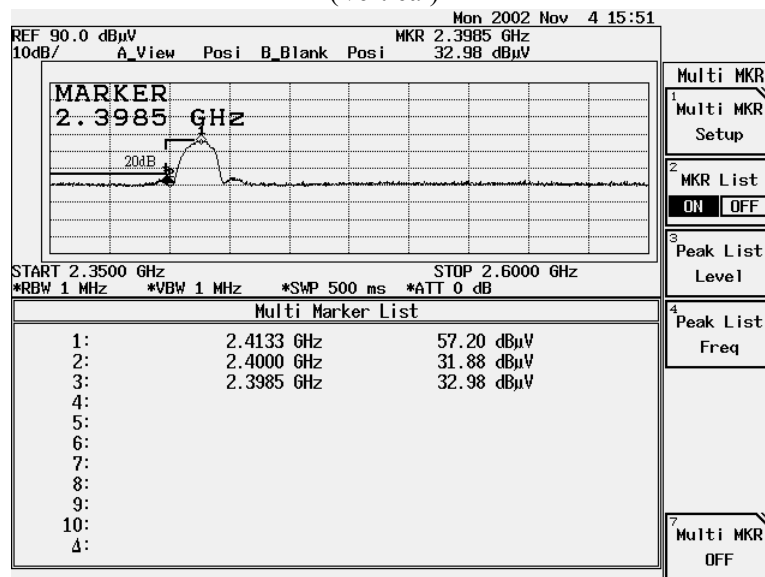

Product : Tablet PC System
 Test Item : Band Edge Data
 Test Site : No.2 OATS
 Test Mode : Channel 1 (11Mbps)

RF Radiated Measurement:

Channel No.	Frequency (MHz)	Required Limit (dBc)	Result
1 (Horizontal)	<2400	>20	Pass
1 (Vertical)	<2400	>20	Pass

Figure Channel 1: (Horizontal)


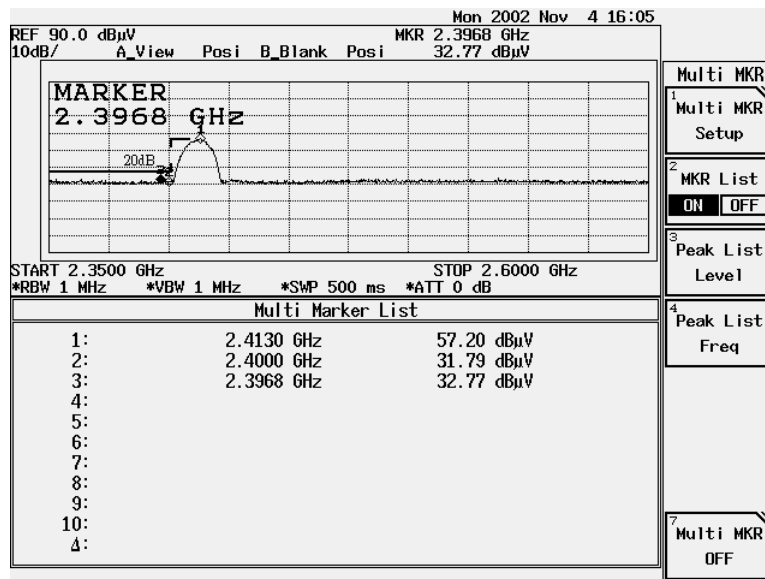


Figure Channel 1: (Vertical)

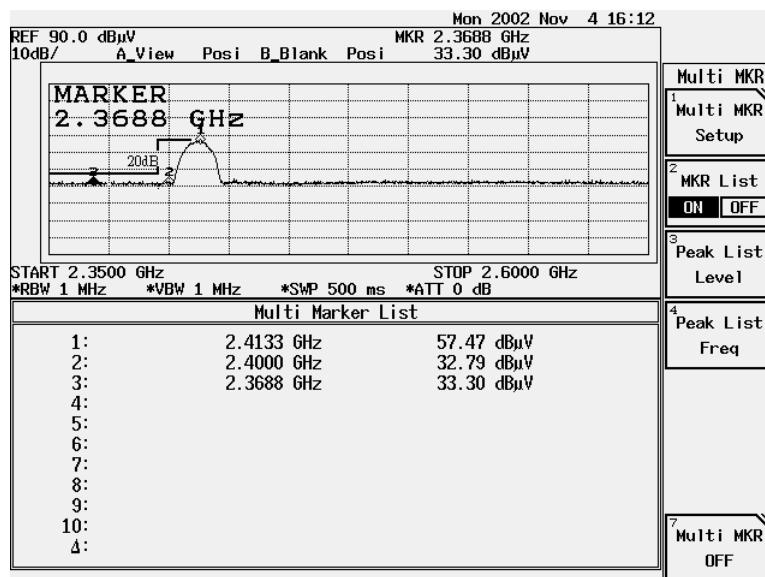

Product : Tablet PC System
 Test Item : Band Edge Data
 Test Site : No.2 OATS
 Test Mode : Channel 11 (1Mbps)

RF Radiated Measurement:

Channel No.	Frequency (MHz)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11(Horizontal)	2495.8	33.43	46.32	74	54	Pass
11(Vertical)	2488.5	33.04	45.81	74	54	Pass

Figure Channel 11: (Horizontal)


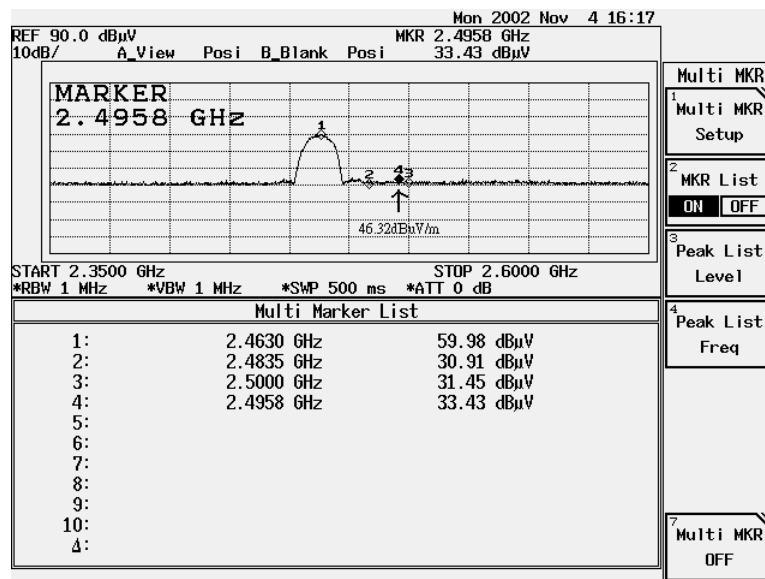


Figure Channel 11: (Vertical)

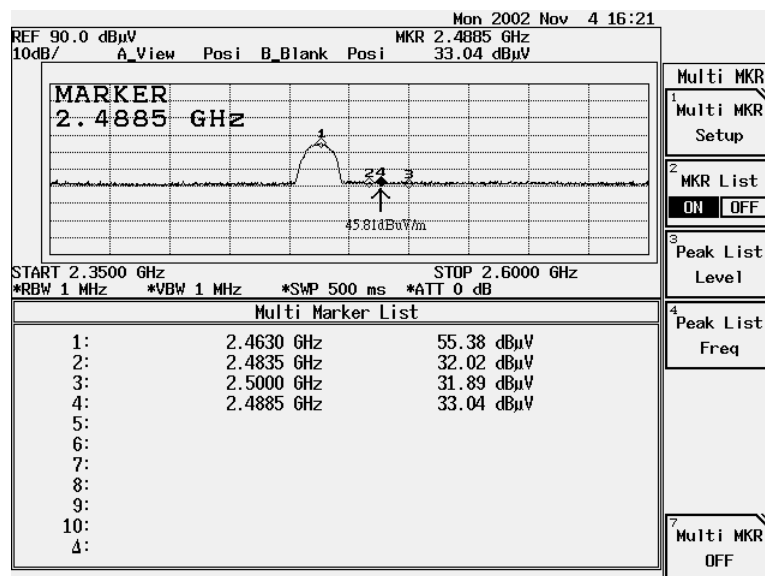

Note: The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Tablet PC System
 Test Item : Band Edge Data
 Test Site : No.2 OATS
 Test Mode : Channel 11 (11Mbps)

RF Radiated Measurement:

Channel No.	Frequency (MHz)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11(Horizontal)	2487.50	33.74	46.51	74	54	Pass
11(Vertical)	2494.50	33.38	44.16	74	54	Pass

Figure Channel 11: (Horizontal)


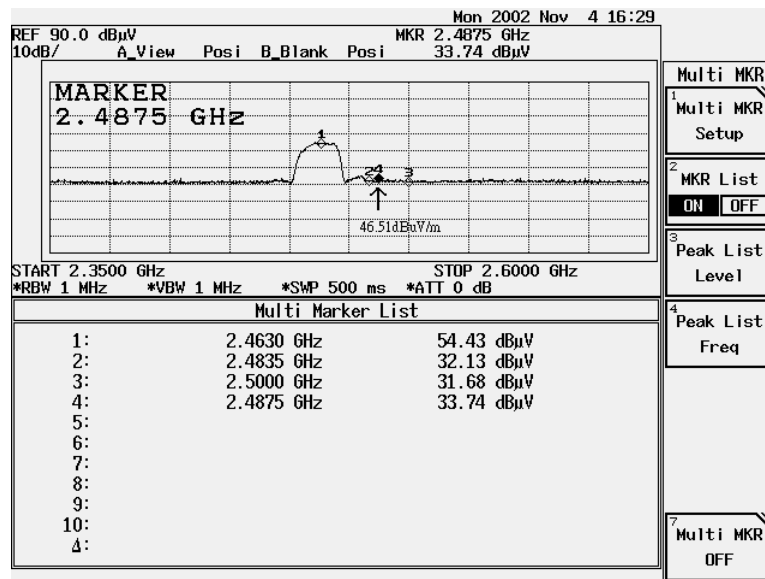


Figure Channel 11: (Vertical)

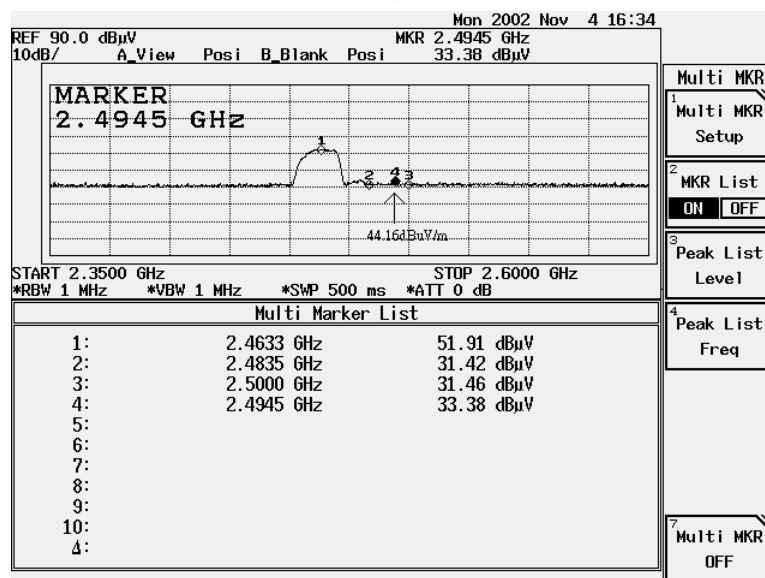

Note: The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

7. Occupied Bandwidth


7.1. Test Equipment

The following test equipments are used during the radiated emission tests:

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Spectrum Analyzer	Advantest	R3272 / 72421194	May, 2002

Note: 1. All equipment upon which need to calibrated are with calibration period of 1 year.
2. Mark "X" test instruments are used to measure the final test results.

7.2. Test Setup

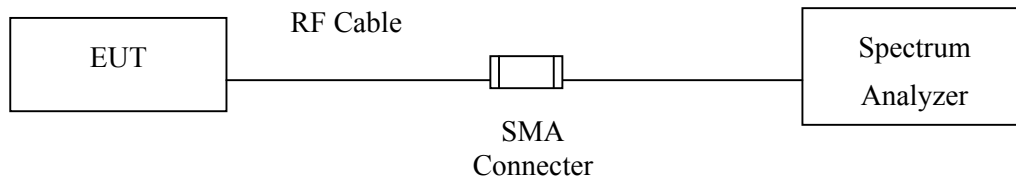

7.3. Limits

The minimum bandwidth shall be at least 500kHz.

7.4. Test Result of Occupied Bandwidth

Product : Tablet PC System
 Test Item : Occupied Bandwidth Data
 Test Site : No.2 OATS
 Test Mode : Channel 1

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
1 (1Mbps)	2412.60	10800	>500	Pass
1 (11Mbps)	2412.60	10400	>500	Pass

Figure Channel 1: 1Mbps


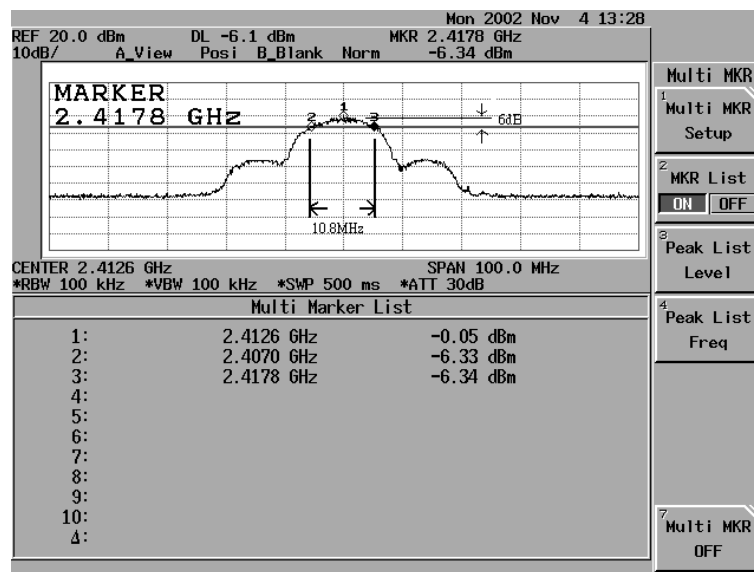


Figure Channel 1: 11Mbps

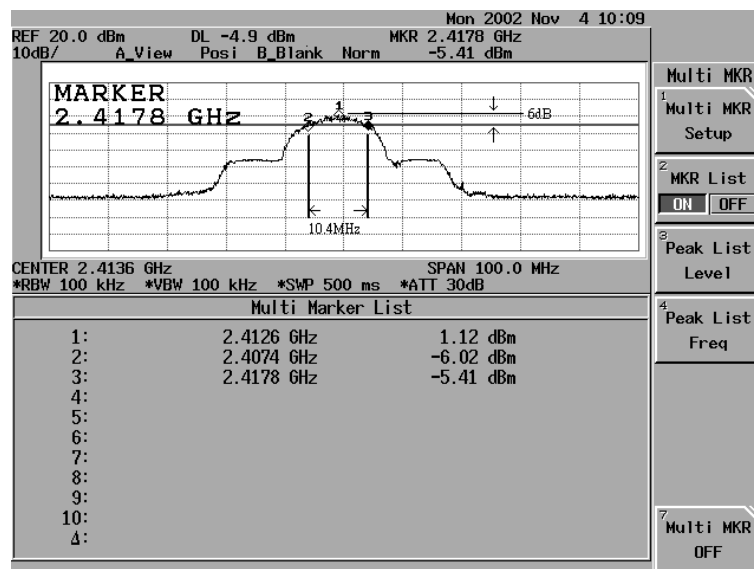

Product : Tablet PC System
 Test Item : Occupied Bandwidth Data
 Test Site : No.2 OATS
 Test Mode : Channel 6

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
6 (1Mbps)	2438.00	11700	>500	Pass
6 (11Mbps)	2437.20	11300	>500	Pass

Figure Channel 6:

1Mbps


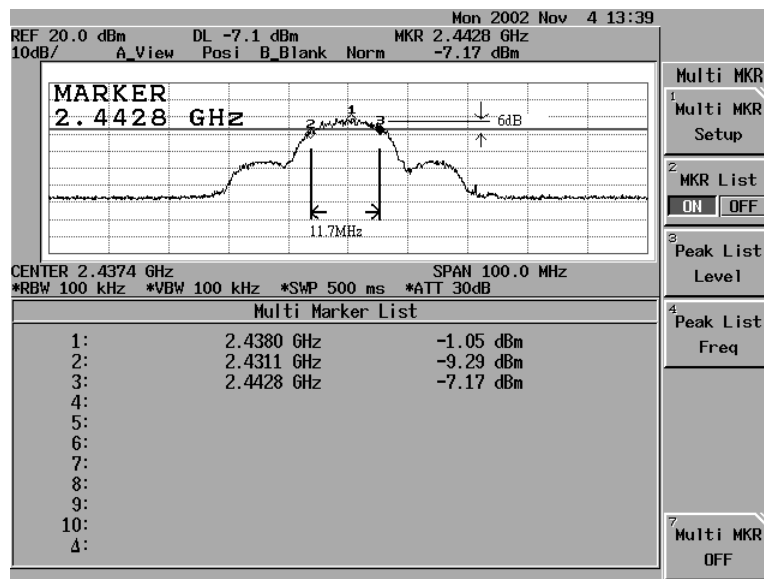


Figure Channel 6:

11Mbps

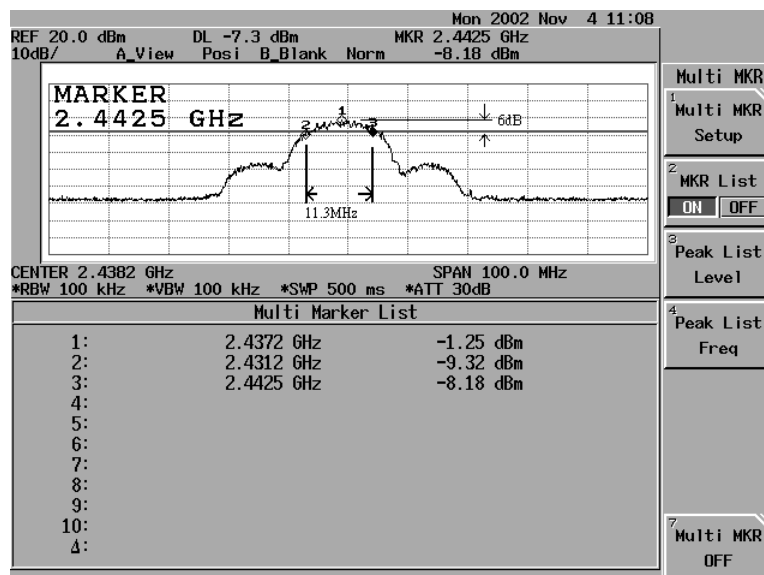

Product : Tablet PC System
 Test Item : Occupied Bandwidth Data
 Test Site : No.2 OATS
 Test Mode : Channel 11

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
11 (1Mbps)	2462.10	9500	>500	Pass
11 (11Mbps)	2462.10	9500	>500	Pass

Figure Channel 11:

1Mbps


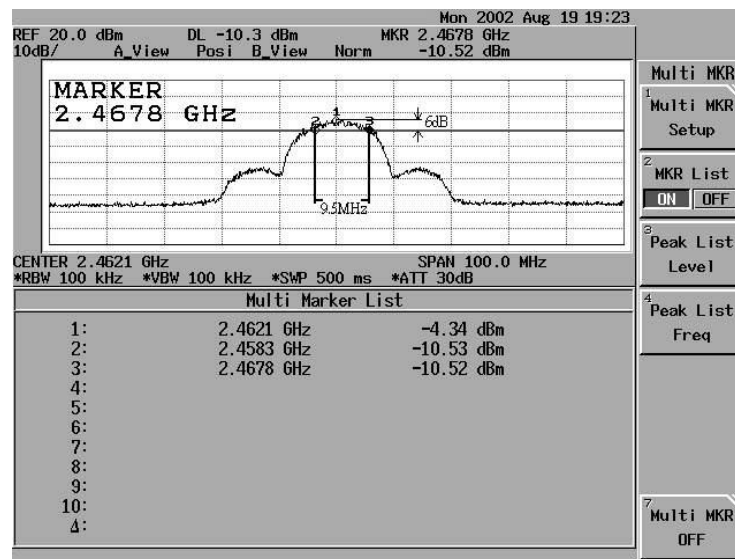


Figure Channel 11:

11Mbps

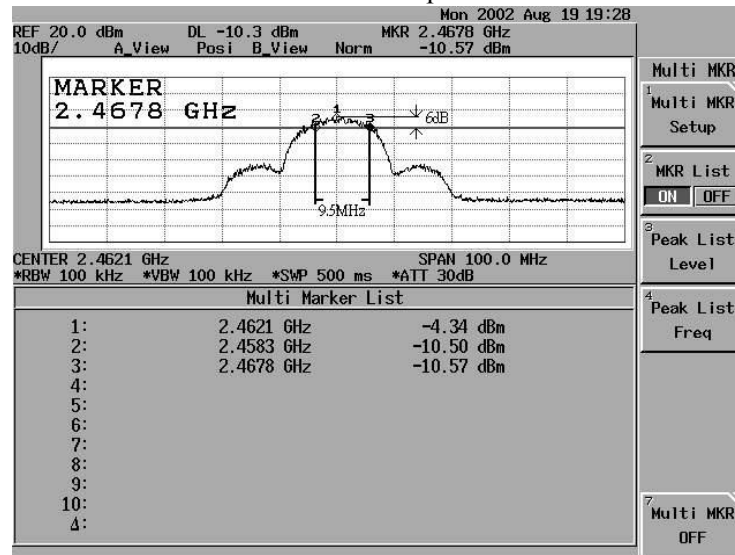

8. Power Density


8.1. Test Equipment

The following test equipments are used during the radiated emission tests:

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Spectrum Analyzer	Advantest	R3272 / 72421194	May, 2002

Note: 1. All equipment upon which need to calibrated are with calibration period of 1 year.
2. Mark "X" test instruments are used to measure the final test results.

8.2. Test Setup

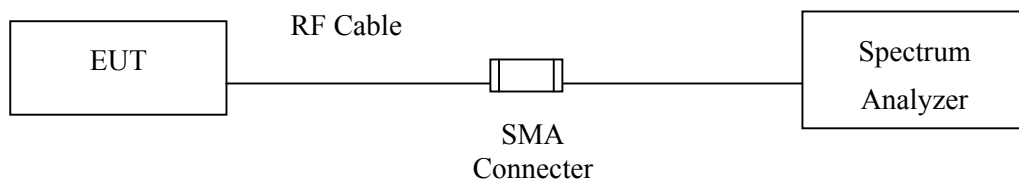

8.3. Limits

The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3kHz bandwidth.

8.4. Test Result of Power Density

Product : Tablet PC System
 Test Item : Power Density Data
 Test Site : No.2 OATS
 Test Mode : Channel 1

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
1 (1Mbps)	2412.449	-12.80	< 8dBm	Pass
1 (11Mbps)	2412.449	-12.51	< 8dBm	Pass

Figure Channel 1:


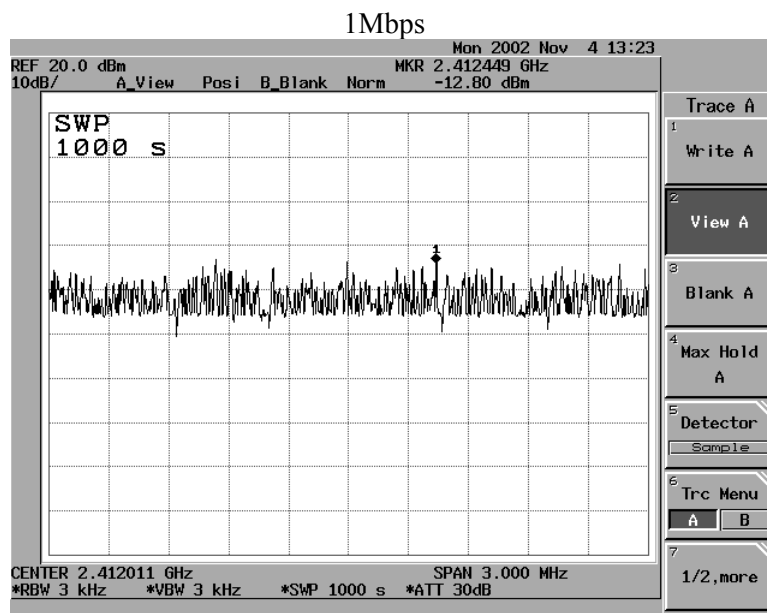


Figure Channel 1:

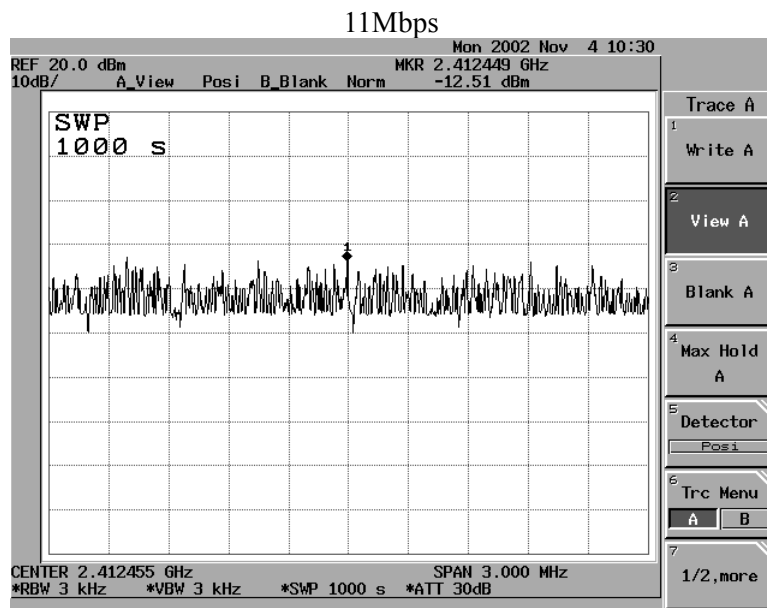

Product : Tablet PC System
 Test Item : Power Density Data
 Test Site : No.2 OATS
 Test Mode : Channel 6

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
6 (1Mbps)	2436.133	-14.83	< 8dBm	Pass
6 (11Mbps)	2436.132	-14.74	< 8dBm	Pass

Figure Channel 6:


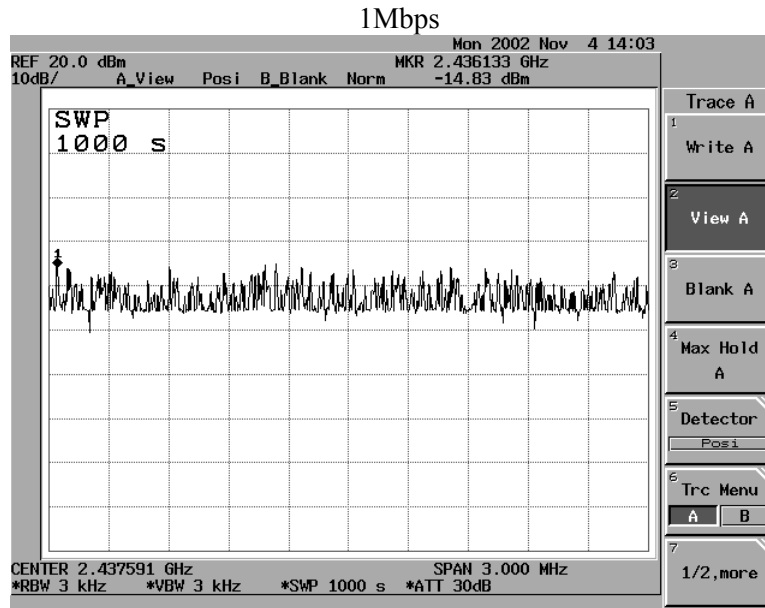


Figure Channel 6:

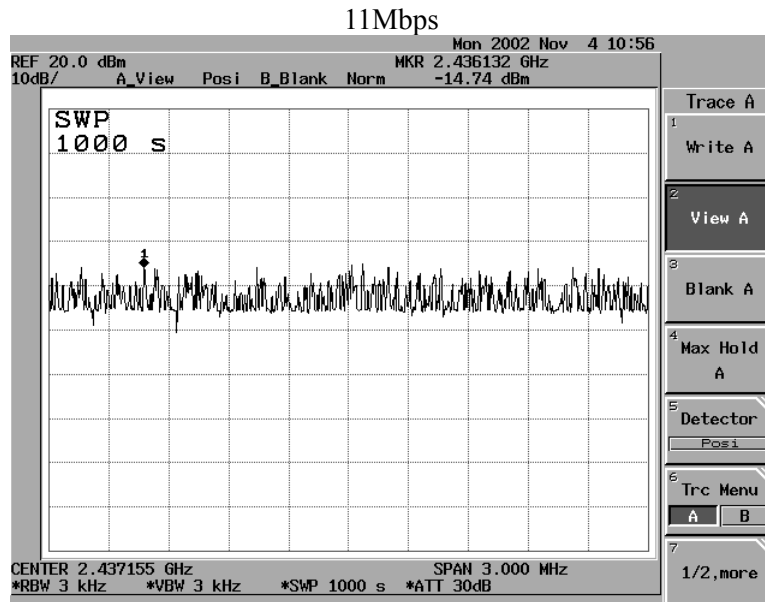

Product : Tablet PC System
 Test Item : Density Data
 Test Site : No.2 OATS
 Test Mode : Channel 11

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
11 (1Mbps)	2461.132	-15.76	< 8dBm	Pass
11 (11Mbps)	2461.132	-15.70	< 8dBm	Pass

Figure Channel 11:

1Mbps


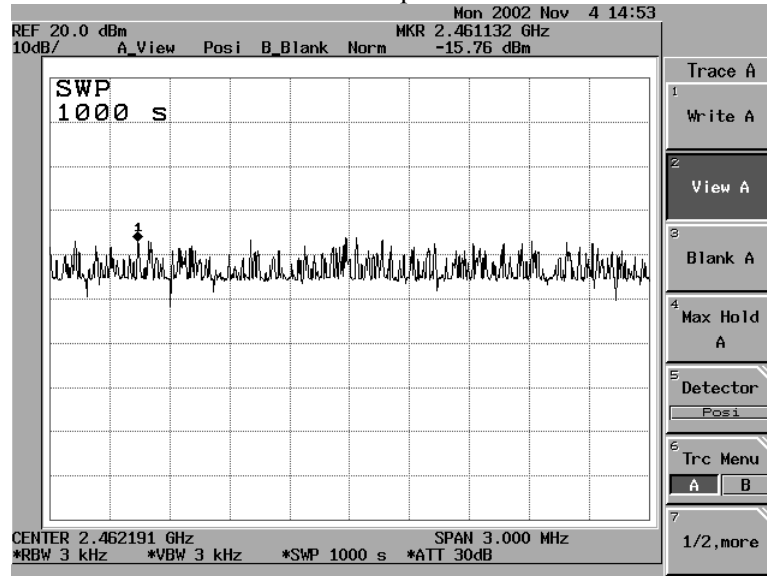


Figure Channel 11:

11Mbps

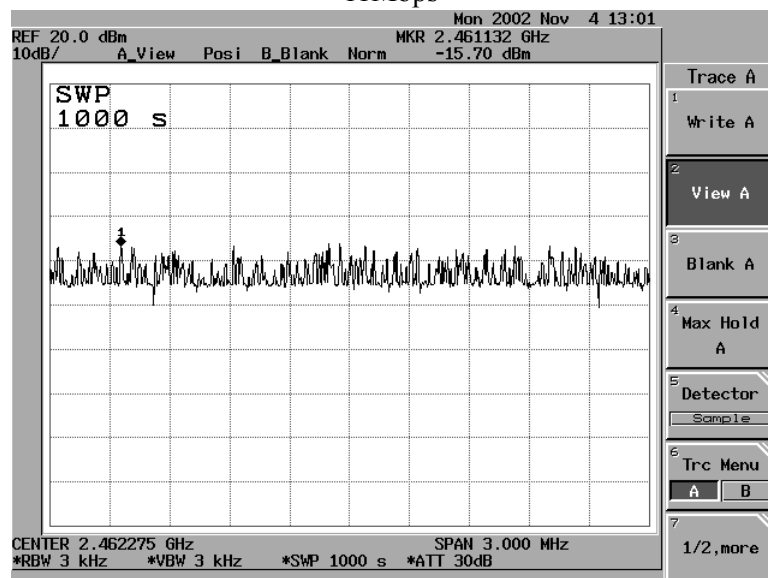

9. EMI Reduction Method During Compliance Testing

No modification was made during testing.


Attachment 1: EUT Test Photographs

Attachment 1: EUT Test Setup Photographs


Front View of Conducted Test (Mode 1)



Back View of Conducted Test (Mode 1)

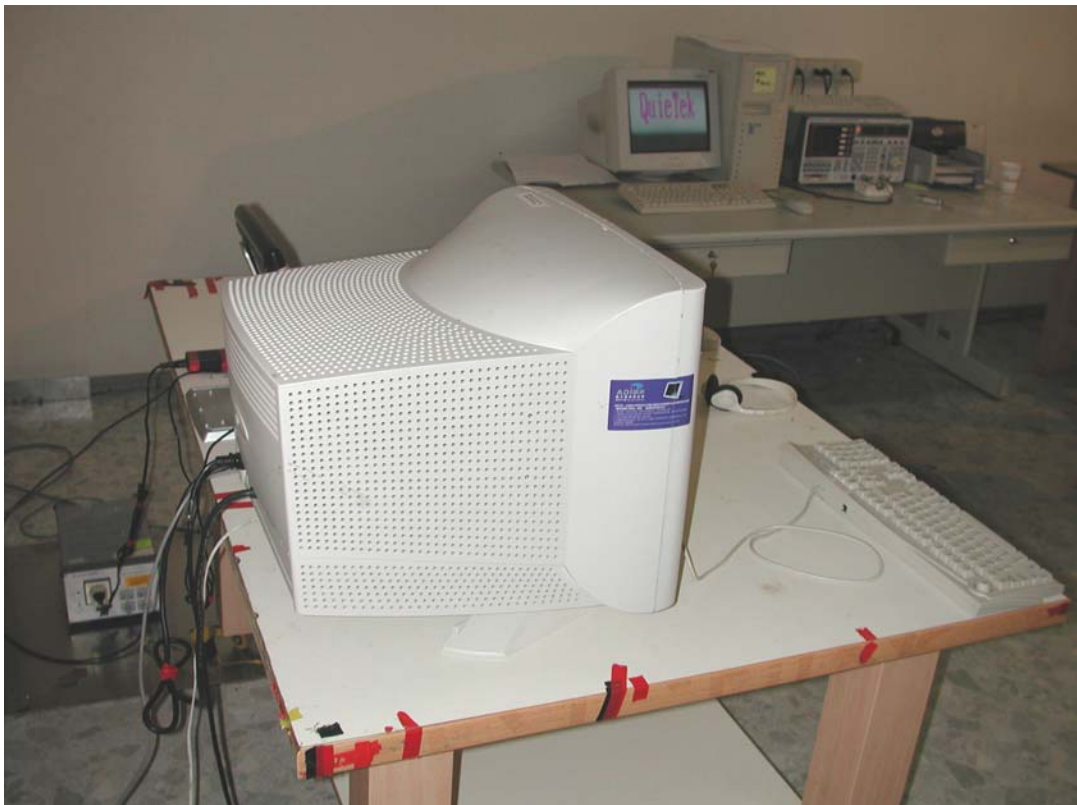

Front View of Radiated Test

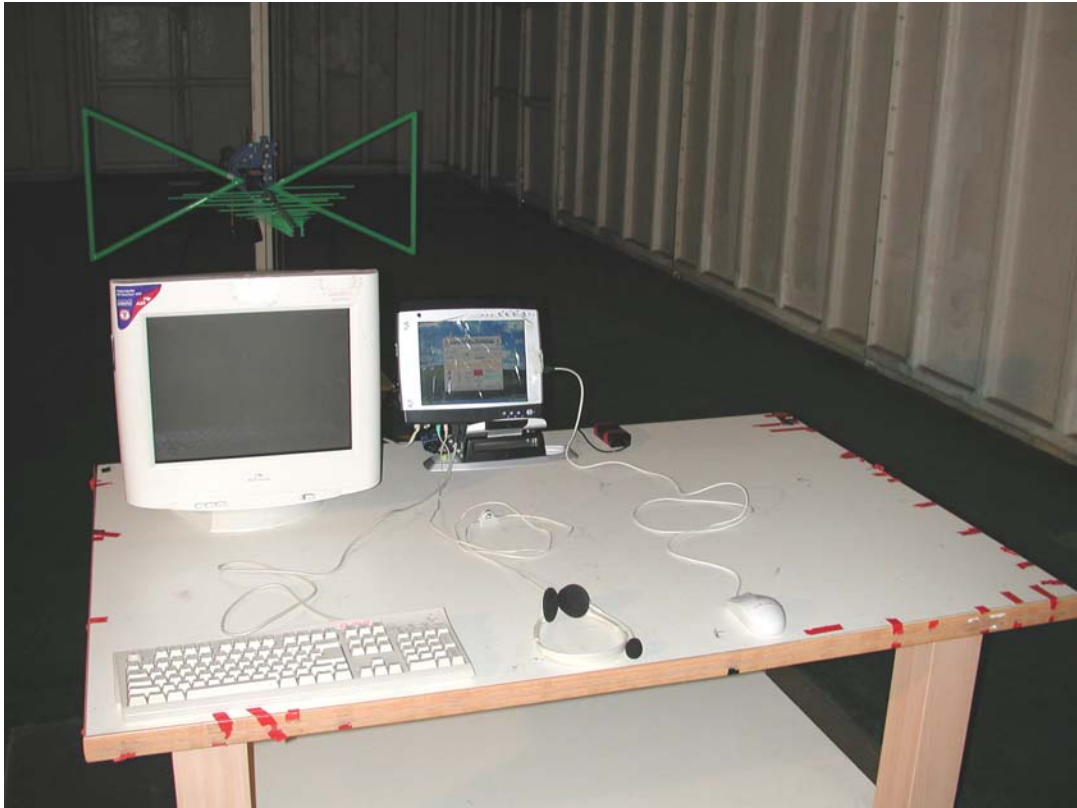

Back View of Radiated Test



Front View of High Frequency Radiated Test



Attachment 2: EUT Detailed Photographs

Attachment 2 : EUT Detailed Photographs

(1) EUT Photo



(2) EUT Photo



(3) EUT Photo



(4) EUT Photo



(5) EUT Photo



(6) EUT Photo




Figure 1 shows the disassembly of the HP Mini 110. The image displays the internal components of the laptop, including the motherboard, RAM, and hard drive, alongside the back cover and the bottom cover.

A detailed photograph of the internal components of a Sony VAIO laptop, showing the green motherboard, RAM modules, a 3.5-inch SATA hard drive, a DVD burner, a 3G/4G LTE modem, and various cables and connectors. The components are densely packed and connected by a complex network of wires and soldered joints. The laptop is open, revealing the underside of the display and the internal chassis. The background is a solid blue color.


(9) EUT Photo




(10) EUT Photo

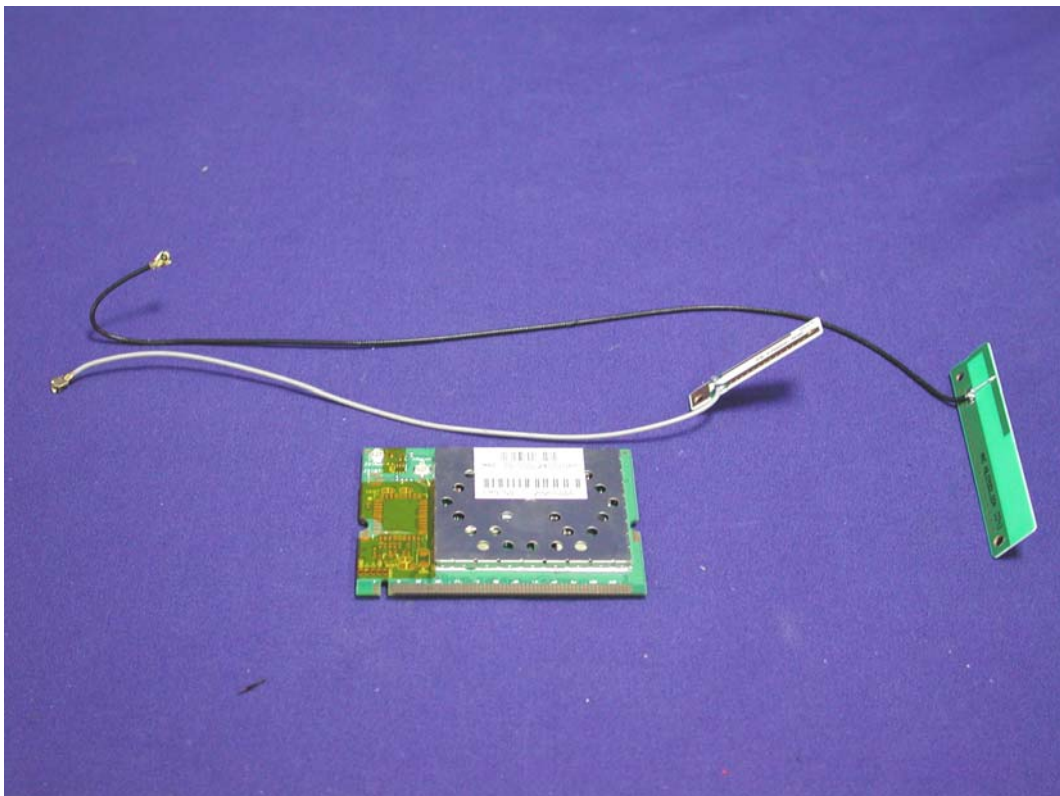


(11) EUT Photo

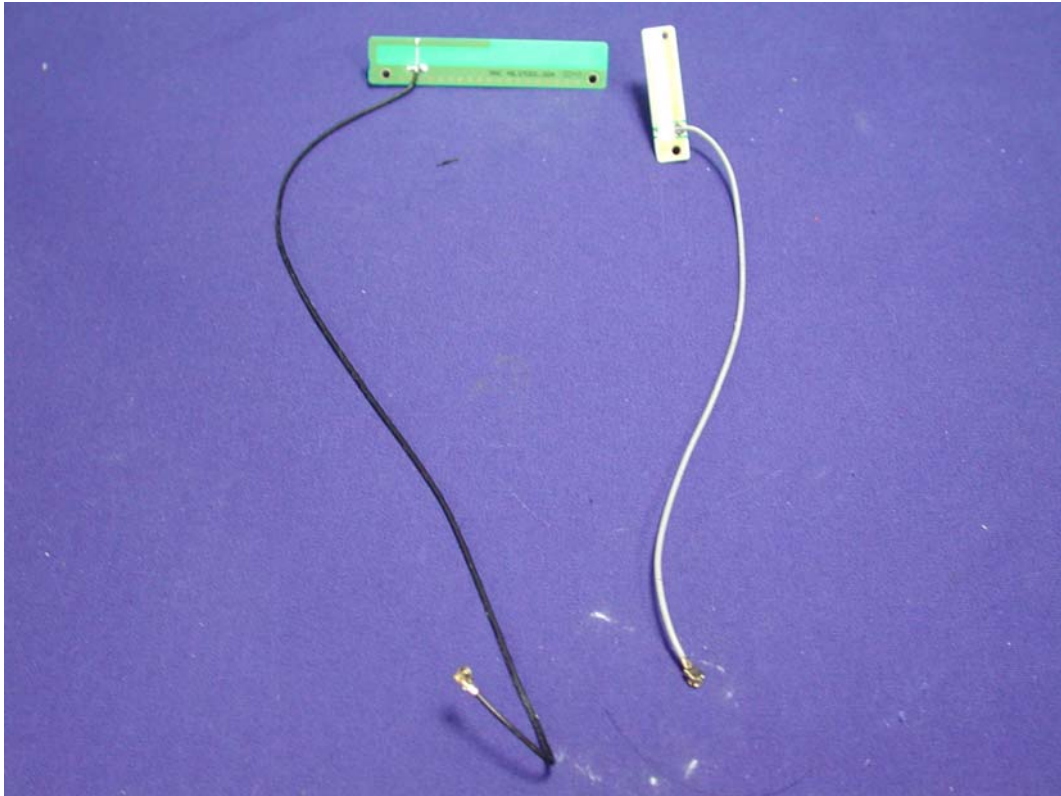


(12) EUT Photo

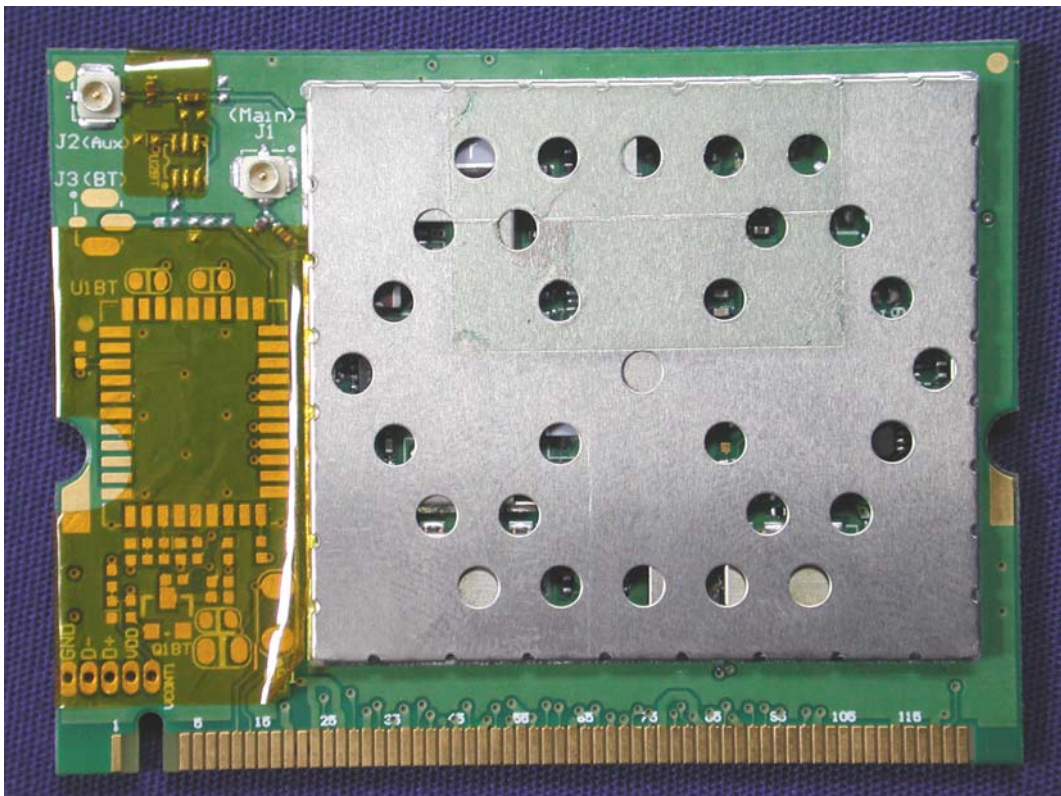


(13) EUT Photo

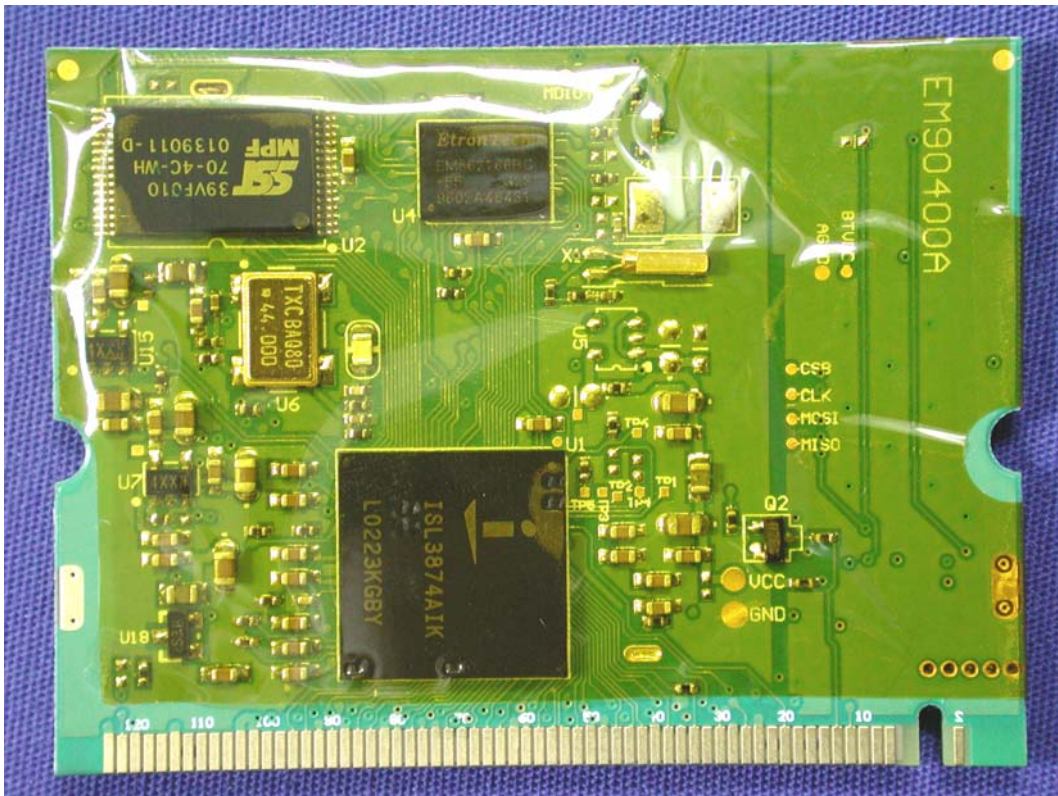


(14) EUT Photo

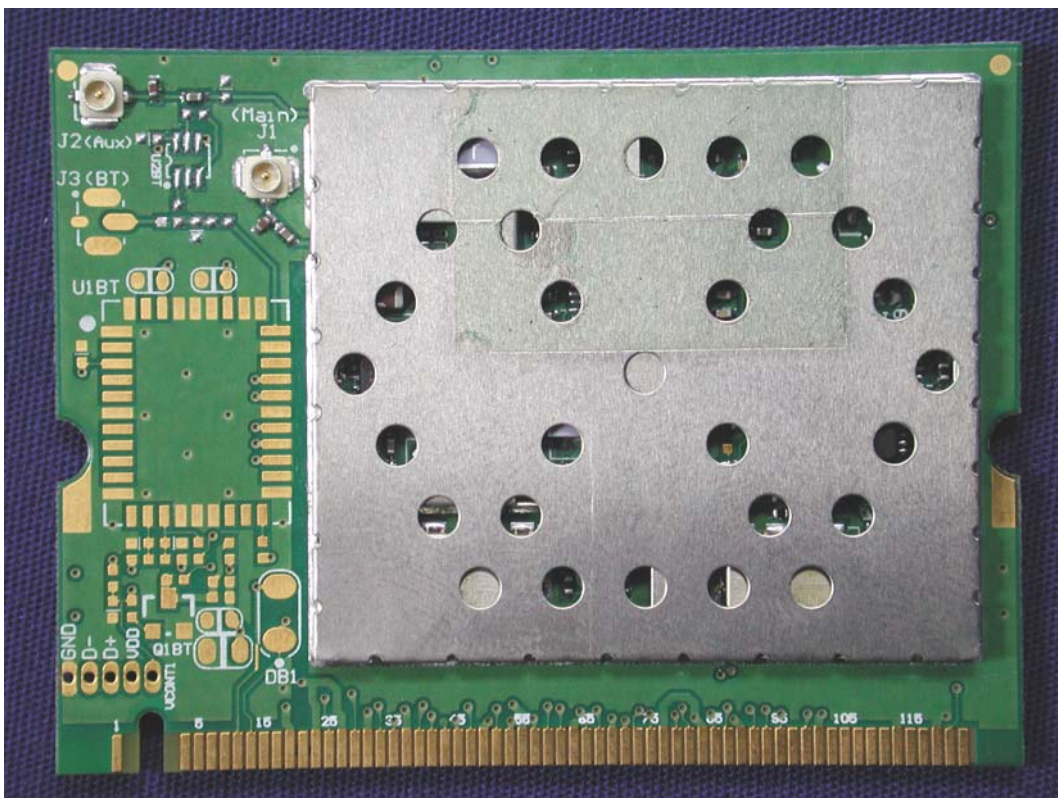


(15) EUT Photo

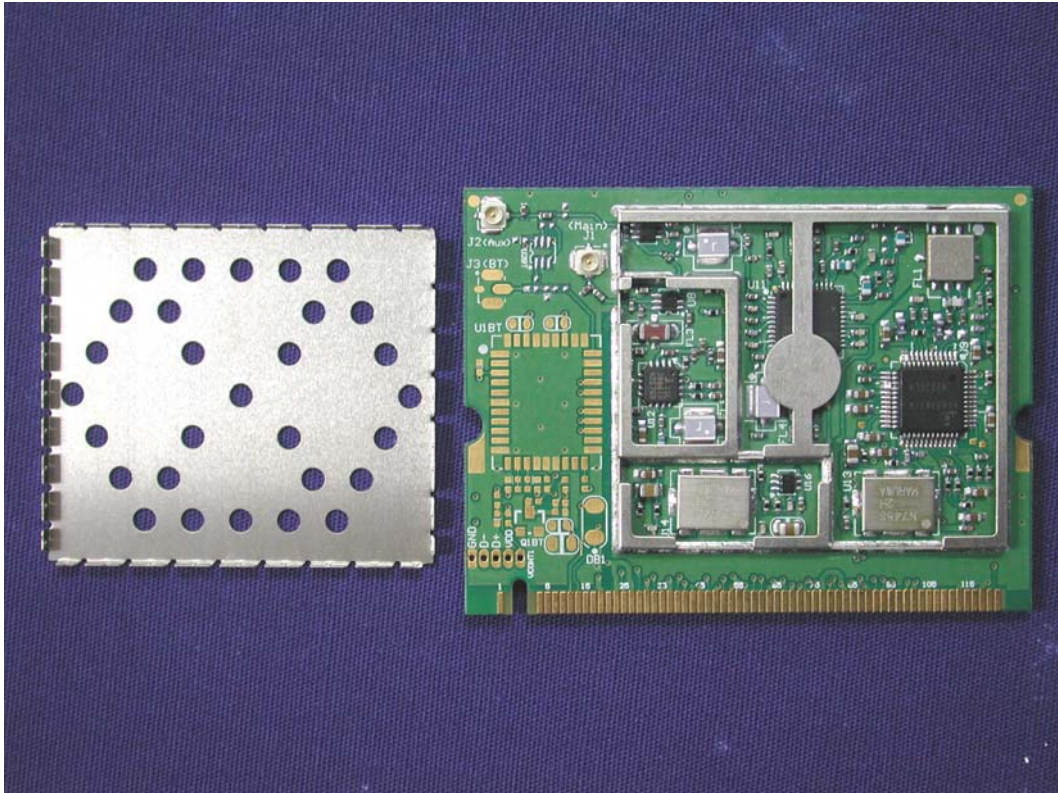

(16) EUT Photo

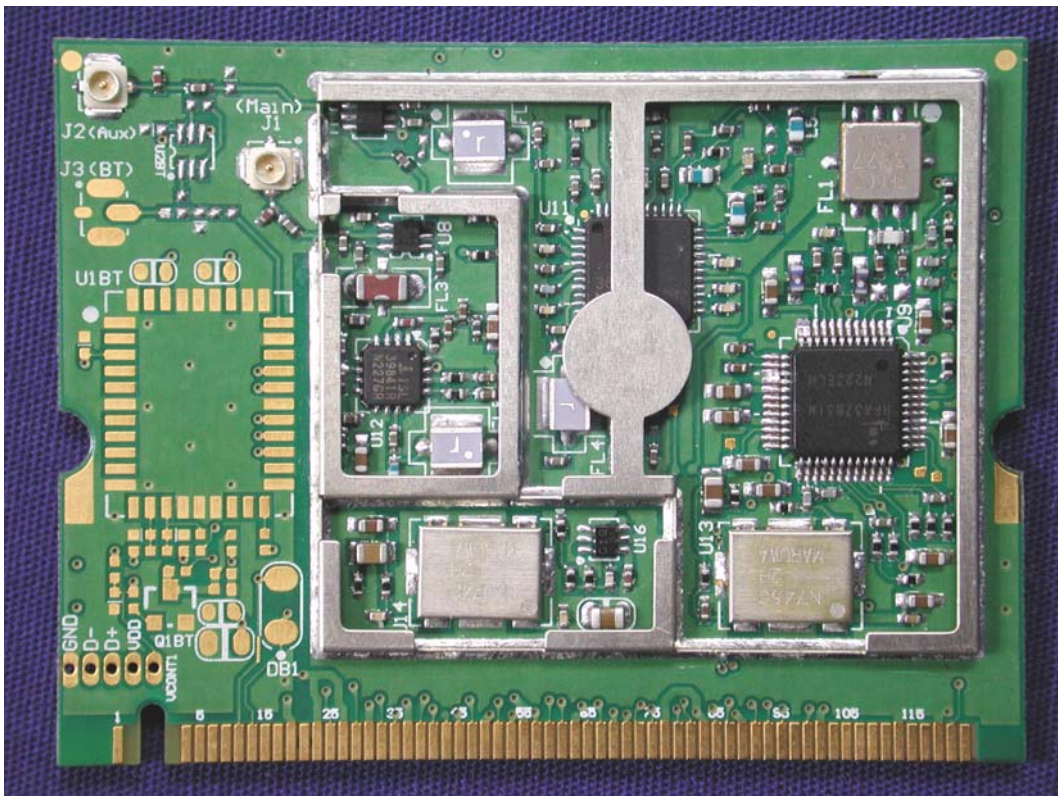


(17) EUT Photo

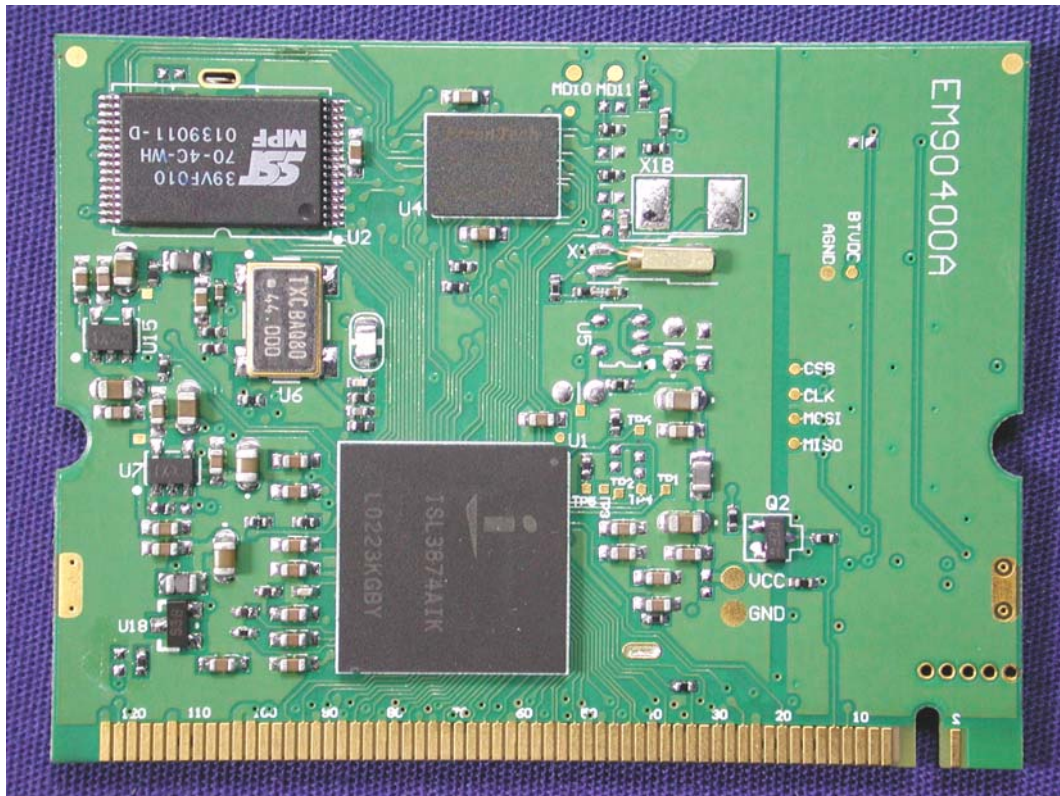

(18) EUT Photo




(19) EUT Photo

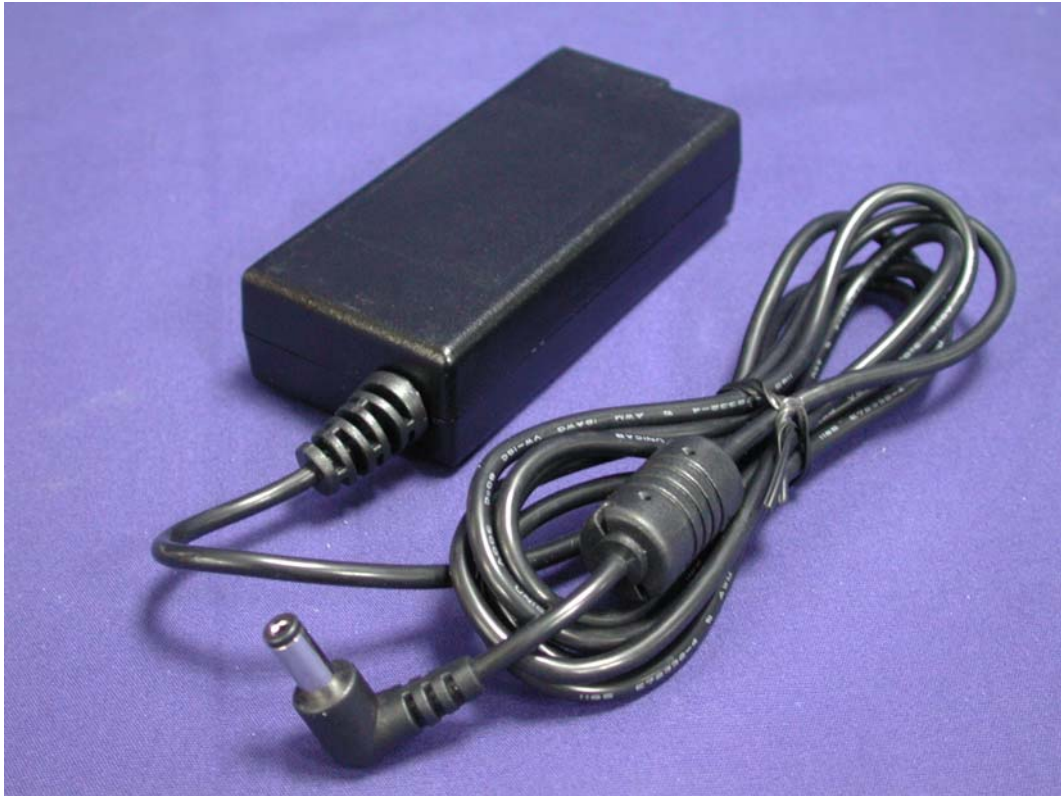

(20) EUT Photo




(21) EUT Photo

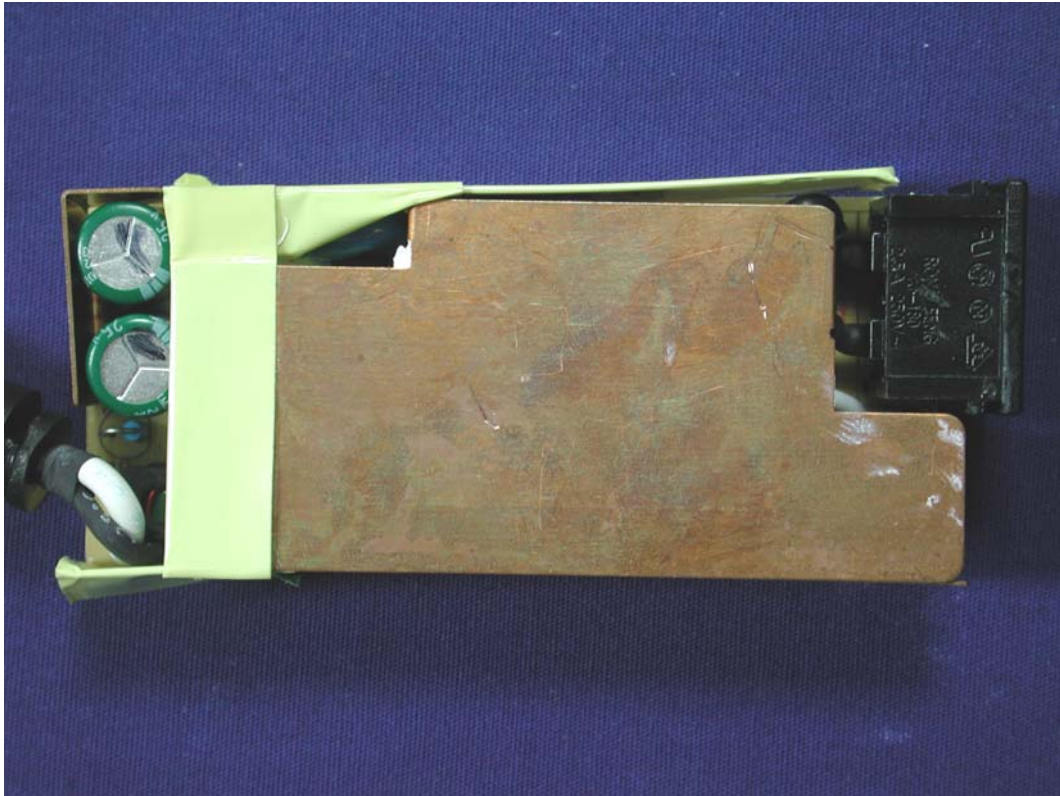

(22) EUT Photo



(23) EUT Photo

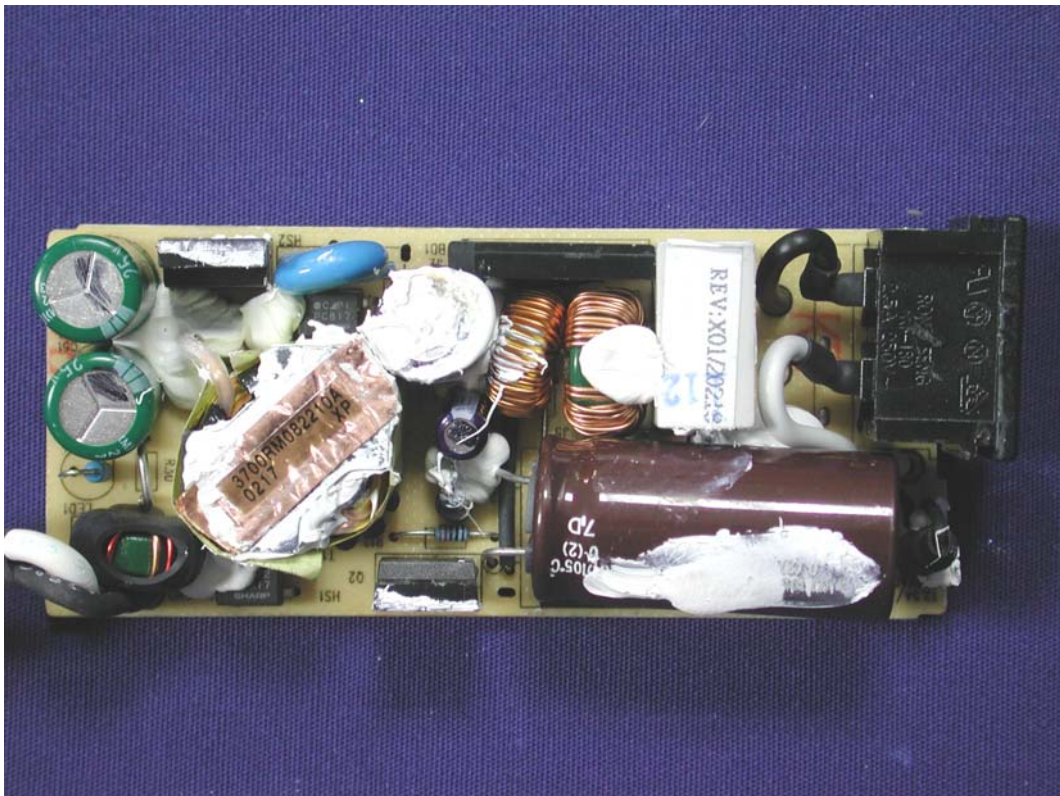

(24) EUT Photo

