

FCC Test Report

(PART 24)

Report No.: RF181123D01

FCC ID: P27-TPM540

Test Model: TPM540; TPM540G

Received Date: Nov. 23, 2018

Test Date: Dec. 04, 2018 ~ Dec. 27, 2018

Issued Date: Jan. 07, 2019

Applicant: Sercomm Corp.

Address: 8F, No. 3-1, YuanQu St., NanKang, Taipei 115, Taiwan, R.O.C. (NanKang Software Park)

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan (R.O.C)

Test Location: No. 19, Hwa Ya 2nd Rd, Wen Hwa Vil, Kwei Shan Dist., Taoyuan City 33383, Taiwan (R.O.C)

**FCC Registration /
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Test Site and Instruments	7
3 General Information	8
3.1 General Description of EUT	8
3.2 Configuration of System under Test	9
3.2.1 Description of Support Units	9
3.3 Test Mode Applicability and Tested Channel Detail	10
3.4 EUT Operating Conditions	12
3.5 General Description of Applied Standards	12
4 Test Types and Results	13
4.1 Output Power Measurement	13
4.1.1 Limits of Output Power Measurement	13
4.1.2 Test Procedures	13
4.1.3 Test Setup	14
4.1.4 Test Results	15
4.2 Modulation Characteristics Measurement	26
4.2.1 Limits of Modulation Characteristics	26
4.2.2 Test Setup	26
4.2.3 Test Procedure	26
4.2.4 Test Results	26
4.3 Frequency Stability Measurement	27
4.3.1 Limits of Frequency Stability Measurement	27
4.3.2 Test Procedure	27
4.3.3 Test Setup	27
4.3.4 Test Results	28
4.4 Occupied Bandwidth Measurement	34
4.4.1 Test Procedure	34
4.4.2 Test Setup	34
4.4.3 Test Result	35
4.5 Band Edge Measurement	38
4.5.1 Limits of Band Edge Measurement	38
4.5.2 Test Setup	38
4.5.3 Test Procedures	38
4.5.4 Test Results	39
4.6 Peak to Average Ratio	45
4.6.1 Limits of Peak to Average Ratio Measurement	45
4.6.2 Test Setup	45
4.6.3 Test Procedures	45
4.6.4 Test Results	46
4.7 Conducted Spurious Emissions	49
4.7.1 Limits of Conducted Spurious Emissions Measurement	49
4.7.2 Test Setup	49
4.7.3 Test Procedure	49
4.7.4 Test Results	50
4.8 Radiated Emission Measurement	68
4.8.1 Limits of Radiated Emission Measurement	68
4.8.2 Test Procedure	68
4.8.3 Deviation from Test Standard	68
4.8.4 Test Setup	69
4.8.5 Test Results	70

5 Pictures of Test Arrangements.....	88
Appendix – Information of the Testing Laboratories	89

Release Control Record

Issue No.	Description	Date Issued
RF181123D01	Original Release	Jan. 07, 2019

1 Certificate of Conformity

Product: Cat-M1 Module

Brand: Sercomm

Test Model: TPM540; TPM540G

Sample Status: Engineering Sample

Applicant: Sercomm Corp.

Test Date: Dec. 04, 2018 ~ Dec. 27, 2018

Standards: FCC Part 24, Subpart E

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Gina Liu, **Date:** Jan. 07, 2019
Gina Liu / Specialist

Approved by : Dylan Chiou, **Date:** Jan. 07, 2019
Dylan Chiou / Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 24 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 24.232	Effective Isotropic Radiated Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	Pass	Meet the requirement.
2.1046 24.232(d)	Peak to Average Ratio	Pass	Meet the requirement of limit.
2.1055 24.235	Frequency Stability	Pass	Meet the requirement of limit.
2.1049 24.238(b)	Occupied Bandwidth	Pass	Meet the requirement of limit.
24.238(a)	Band Edge Measurements	Pass	Meet the requirement of limit.
2.1051 24.238	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 24.238	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -9.54 dB at 7637.20 MHz.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent	N9038A	MY51210203	Mar. 16, 2018	Mar. 15, 2019
Spectrum Analyzer Agilent	N9010A	MY52220314	Dec. 13, 2018	Dec. 12, 2019
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Jan. 11, 2018	Jan. 10, 2019
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-969	Nov. 25, 2018	Nov. 24, 2019
HORN Antenna SCHWARZBECK	BBHA 9170	148	Nov. 25, 2018	Nov. 24, 2019
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Nov. 23, 2018	Nov. 22, 2019
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 16, 2018	Apr. 15, 2019
MXG Vector signal generator Agilent	N5182B	MY53050162	Jan. 10, 2018	Jan. 09, 2019
Preamplifier EMCI	EMC 184045	980116	Oct. 12, 2018	Oct. 11, 2019
Preamplifier EMCI	EMC 012645	980115	Oct. 12, 2018	Oct. 11, 2019
Preamplifier EMCI	EMC 330H	980112	Oct. 12, 2018	Oct. 11, 2019
RF Coaxial Cable HUBER+SUHNNER	EMC104-SM-SM-800 0&3000	140811+170717	Oct. 12, 2018	Oct. 11, 2019
RF Coaxial Cable HUBER+SUHNNER	SUCOFLEX 104	EMC104-SM-SM-1 000(140807)	Oct. 12, 2018	Oct. 11, 2019
RF Coaxial Cable Worken	8D-FB	Cable-Ch10-01	Oct. 12, 2018	Oct. 11, 2019
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Radio Communication Analyzer Anritsu	MT8821C	6201502978	Jul. 20, 2018	Jul. 19, 2019
Temperature & Humidity Chamber	GTH-120-40-CP-AR	MAA1306-019	Sep. 05, 2018	Sep. 04, 2019
DC Power Supply Topward	33010D	807748	N/A	N/A

- Note:
1. The calibration interval of the above test instruments is 12 / 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 10.
 3. The horn antenna and preamplifier (model: EMC 184045) are used only for the measurement of emission frequency above 1 GHz if tested.
 4. The IC Site Registration No. is 7450F-10.

3 General Information

3.1 General Description of EUT

Product	Cat-M1 Module	
Brand	Sercomm	
Test Model	TPM540; TPM540G	
Status of EUT	Engineering Sample	
Power Supply Rating	5.0 Vdc (adapter)	
Modulation Type	LTE	QPSK, 16QAM
Frequency Range	LTE Band 2 (Channel Bandwidth: 1.4 MHz)	1850.7 ~ 1909.3 MHz
	LTE Band 2 (Channel Bandwidth: 3 MHz)	1851.5 ~ 1908.5 MHz
	LTE Band 2 (Channel Bandwidth: 5 MHz)	1852.5 ~ 1907.5 MHz
	LTE Band 2 (Channel Bandwidth: 10 MHz)	1855.0 ~ 1905.0 MHz
	LTE Band 2 (Channel Bandwidth: 15 MHz)	1857.5 ~ 1902.5 MHz
	LTE Band 2 (Channel Bandwidth: 20 MHz)	1860.0 ~ 1900.0 MHz
Max. EIRP Power	LTE Band 2 (Channel Bandwidth: 1.4 MHz)	609.54 mW
	LTE Band 2 (Channel Bandwidth: 3 MHz)	578.10 mW
	LTE Band 2 (Channel Bandwidth: 5 MHz)	547.02 mW
	LTE Band 2 (Channel Bandwidth: 10 MHz)	516.42 mW
	LTE Band 2 (Channel Bandwidth: 15 MHz)	486.41 mW
	LTE Band 2 (Channel Bandwidth: 20 MHz)	459.20 mW
Emission Designator	LTE Band 2 (Channel Bandwidth: 1.4 MHz)	1M09G7D
	LTE Band 2 (Channel Bandwidth: 3 MHz)	1M09G7D
	LTE Band 2 (Channel Bandwidth: 5 MHz)	1M08G7D
	LTE Band 2 (Channel Bandwidth: 10 MHz)	1M09G7D
	LTE Band 2 (Channel Bandwidth: 15 MHz)	1M09G7D
	LTE Band 2 (Channel Bandwidth: 20 MHz)	1M09G7D
Antenna Type	Monopole (PCB) Antenna with 4.18 dBi gain	
Accessory Device	N/A	
Data Cable Supplied	N/A	

Note:


1. All models are listed as below.

Brand	Model	Difference
Sercomm	TPM540	Without GPS function
	TPM540G	With GPS function

* Above two models had been pre-tested, and the worst case was found on model TPM540. Therefore, only this model was chosen for the final test and presented in the test report.

2. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Configuration of System under Test

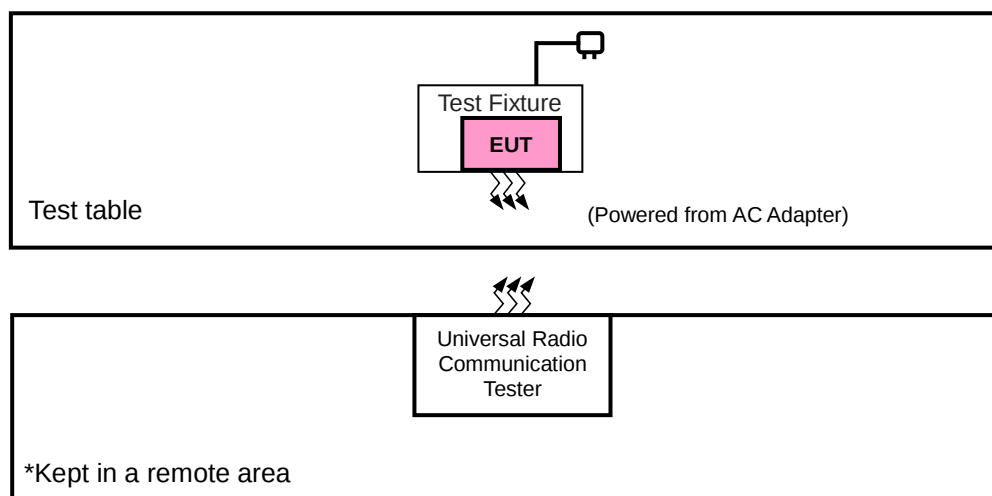

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1.	Adapter	Kted	KSA0050500100VUD	N/A	N/A
2.	Test Fixture	N/A	N/A	N/A	N/A

No.	Signal Cable Description Of The Above Support Units
1.	N/A
2.	N/A

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item 1-2 were provided by client.

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports.

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	EIRP	Radiated Emission
LTE Band 2	Z-plane	X-axis

LTE Band 2

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15 MHz	QPSK, 16QAM	3 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Modulation Characteristics	18700 to 19100	18900	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Frequency Stability	18607 to 19193	18607, 19193	1.4 MHz	QPSK	1 RB / 0 RB Offset
		18615 to 19185	18615, 19185	3 MHz	QPSK	1 RB / 0 RB Offset
		18625 to 19175	18625, 19175	5 MHz	QPSK	1 RB / 0 RB Offset
		18650 to 19150	18650, 19150	10 MHz	QPSK	1 RB / 0 RB Offset
		18675 to 19125	18675, 19125	15 MHz	QPSK	1 RB / 0 RB Offset
		18700 to 19100	18700, 19100	20 MHz	QPSK	1 RB / 0 RB Offset
-	Occupied Bandwidth	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
-	Peak to Average Ratio	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK, 16QAM	1 RB / 0 RB Offset

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	Band Edge	18607 to 19193	18607	1.4 MHz	QPSK	1 RB / 0 RB Offset
			19193	1.4 MHz	QPSK	6 RB / 0 RB Offset
		18615 to 19185	18615	3 MHz	QPSK	1 RB / 5 RB Offset
			19185	3 MHz	QPSK	6 RB / 0 RB Offset
		18625 to 19175	18625	5 MHz	QPSK	1 RB / 0 RB Offset
			19175	5 MHz	QPSK	6 RB / 0 RB Offset
		18650 to 19150	18650	10 MHz	QPSK	1 RB / 5 RB Offset
			19150	10 MHz	QPSK	6 RB / 0 RB Offset
		18675 to 19125	18675	15 MHz	QPSK	1 RB / 0 RB Offset
			19125	15 MHz	QPSK	6 RB / 0 RB Offset
		18700 to 19100	18700	20 MHz	QPSK	1 RB / 5 RB Offset
			19100	20 MHz	QPSK	6 RB / 0 RB Offset
-	Conducted Emission	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3 MHz	QPSK	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10 MHz	QPSK	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15 MHz	QPSK	3 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
EIRP	26 deg. C, 58 % RH	120 Vac, 60 Hz	Thomas Wei
Modulation Characteristics	26 deg. C, 58 % RH	120 Vac, 60 Hz	Getaz Yang
Frequency Stability	26 deg. C, 58 % RH	120 Vac, 60 Hz	Getaz Yang
Occupied Bandwidth	26 deg. C, 58 % RH	120 Vac, 60 Hz	Getaz Yang
Band Edge	26 deg. C, 58 % RH	120 Vac, 60 Hz	Getaz Yang
Peak to Average Ratio	26 deg. C, 58 % RH	120 Vac, 60 Hz	Getaz Yang
Conducted Emission	26 deg. C, 58 % RH	120 Vac, 60 Hz	Getaz Yang
Radiated Emission	25 deg. C, 65 % RH	120 Vac, 60 Hz	Thomas Wei

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 24

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-E 2016

ANSI 63.26-2015

NOTE: All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

Mobile / Portable station are limited to 2 watts e.i.r.p.

4.1.2 Test Procedures

EIRP / ERP Measurement:

- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 10 MHz for LTE mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G.
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.R.P \text{ power} - 2.15 \text{ dB}$.


Conducted Power Measurement:

The EUT was set up for the maximum power with LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


4.1.3 Test Setup

EIRP / ERP Measurement:

<Radiated Emission below or equal 1 GHz>

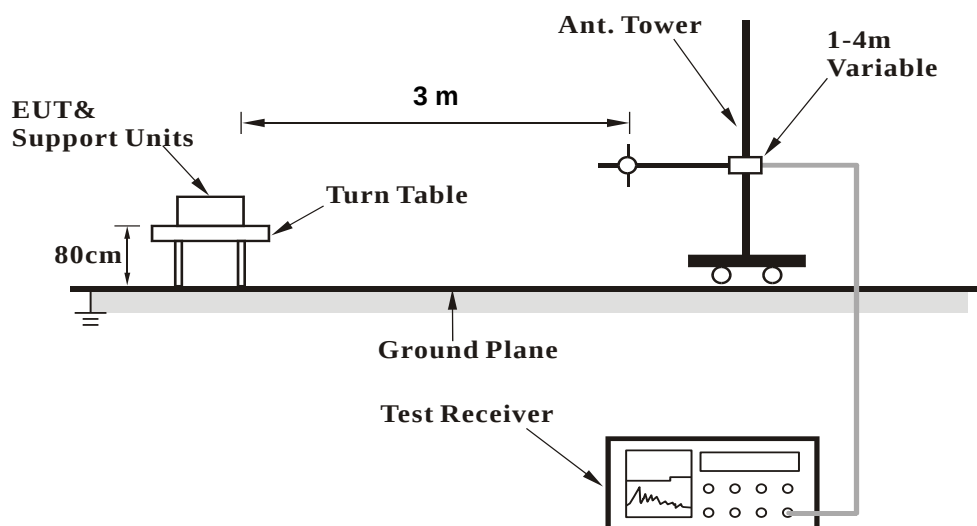


<Radiated Emission above 1 GHz>

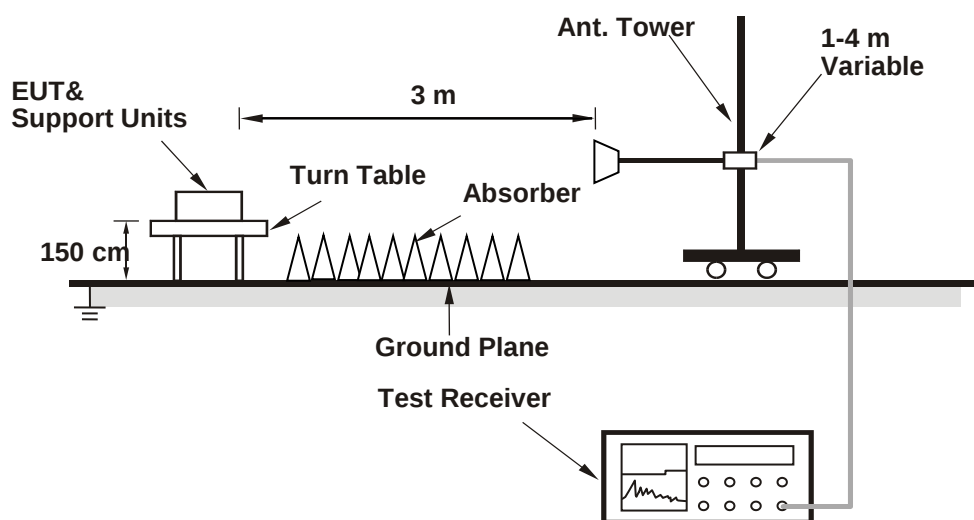

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Conducted Power Measurement:



4.1.4 Test Results

Conducted Output Power (dBm)

Band 2

BW(MHz):	1.4									
Test Frequency ID	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]	Test Configuration Initial of Power				EUT	
					Modulation	RB Size	RB Offset	Narrowband Index	Cell power (dBm/15kHz)	power (dBm)
Low Range	18607	1850.7	607	1930.7	QPSK	1	0	0	-85	23.15
					QPSK	1	5	0	-85	23.18
					QPSK	3	3	0	-85	21.93
					QPSK	6	0	0	-85	21.2
					16QAM	1	0	0	-85	22.4
					16QAM	1	5	0	-85	22.53
					16QAM	3	0	0	-85	21.51
Mid Range	18900	1880	900	1960	16QAM	5	0	0	-85	20.96
					QPSK	1	0	0	-85	23.26
					QPSK	1	5	0	-85	23.3
					QPSK	3	3	0	-85	21.9
					QPSK	6	0	0	-85	21.17
					16QAM	1	0	0	-85	22.46
					16QAM	1	5	0	-85	22.68
High Range	19193	1909.3	1193	1989.3	16QAM	3	0	0	-85	21.43
					16QAM	5	0	0	-85	20.92
					QPSK	1	0	0	-85	23.71
					QPSK	1	5	0	-85	23.64
					QPSK	3	3	0	-85	22.25
					QPSK	6	0	0	-85	21.5
					16QAM	1	0	0	-85	22.67
					16QAM	1	5	0	-85	22.81
					16QAM	3	0	0	-85	21.7
					16QAM	5	0	0	-85	21.16

BW(MHz):		3								
Test Frequency ID	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]	Test Configuration Initial of Power				EUT	
					Modulation	RB Size	RB Offset	Narrowband Index	Cell power (dBm/15kHz)	power (dBm)
Low Range	18615	1851.5	615	1931.5	QPSK	1	0	0	-85	23.44
					QPSK	1	5	0	-85	23.29
					QPSK	1	0	1	-85	23.42
					QPSK	1	5	1	-85	23.48
					QPSK	3	3	0	-85	22.14
					QPSK	3	3	1	-85	22.24
					QPSK	6	0	0	-85	21.28
					QPSK	6	0	1	-85	21.34
					16QAM	1	0	0	-85	22.18
					16QAM	1	5	0	-85	22.16
					16QAM	1	0	1	-85	22.22
					16QAM	1	5	1	-85	22.08
					16QAM	3	0	0	-85	21.64
					16QAM	3	3	1	-85	21.66
					16QAM	5	0	0	-85	21.31
					16QAM	5	0	1	-85	21.37
Mid Range	18900	1880	900	1960	QPSK	1	0	0	-85	23.52
					QPSK	1	5	0	-85	23.56
					QPSK	1	0	1	-85	23.41
					QPSK	1	5	1	-85	23.39
					QPSK	3	3	0	-85	22.15
					QPSK	3	3	1	-85	22.21
					QPSK	6	0	0	-85	21.25
					QPSK	6	0	1	-85	21.3
					16QAM	1	0	0	-85	22.09
					16QAM	1	5	0	-85	22.15
					16QAM	1	0	1	-85	22.15
					16QAM	1	5	1	-85	22.22
					16QAM	3	0	0	-85	21.68
					16QAM	3	3	1	-85	21.65
					16QAM	5	0	0	-85	21.37
					16QAM	5	0	1	-85	21.29
High Range	19185	1908.5	1185	1987.5	QPSK	1	0	0	-85	23.65
					QPSK	1	5	0	-85	23.66
					QPSK	1	0	1	-85	23.67
					QPSK	1	5	1	-85	23.7
					QPSK	3	3	0	-85	22.41
					QPSK	3	3	1	-85	22.41
					QPSK	6	0	0	-85	21.47
					QPSK	6	0	1	-85	21.51
					16QAM	1	0	0	-85	22.48
					16QAM	1	5	0	-85	22.43
					16QAM	1	0	1	-85	22.46
					16QAM	1	5	1	-85	22.48
					16QAM	3	0	0	-85	21.87
					16QAM	3	3	1	-85	21.8
					16QAM	5	0	0	-85	21.35
					16QAM	5	0	1	-85	21.38

BW(MHz):	5									
Test Frequency ID	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]	Test Configuration Initial of Power				EUT	
					Modulation	RB Size	RB Offset	Narrowband Index	Cell power (dBm/15kHz)	power (dBm)
Low Range	18625	1852.5	625	1932.5	QPSK	1	0	0	-85	23.25
					QPSK	1	5	0	-85	23.34
					QPSK	1	0	1	-85	22.89
					QPSK	1	5	1	-85	23.01
					QPSK	1	0	3	-85	23.06
					QPSK	1	5	3	-85	23.06
					QPSK	3	0	0	-85	22.36
					QPSK	3	3	3	-85	22.19
					QPSK	6	0	0	-85	22.32
					QPSK	6	0	1	-85	22.34
					QPSK	6	0	3	-85	22.27
					16QAM	1	0	0	-85	23.05
					16QAM	1	5	0	-85	22.93
					16QAM	1	0	1	-85	22.9
					16QAM	1	5	1	-85	22.85
					16QAM	1	0	3	-85	22.95
					16QAM	1	5	3	-85	22.78
					16QAM	3	0	0	-85	22.66
					16QAM	3	3	3	-85	22.57
					16QAM	5	0	0	-85	21.29
					16QAM	5	0	1	-85	21.46
					16QAM	5	0	3	-85	21.36
Mid Range	18900	1880	900	1960	QPSK	1	0	0	-85	23.41
					QPSK	1	5	0	-85	23.27
					QPSK	1	0	1	-85	23.27
					QPSK	1	5	1	-85	23.16
					QPSK	1	0	3	-85	23.15
					QPSK	1	5	3	-85	23.11
					QPSK	3	0	0	-85	22.38
					QPSK	3	3	3	-85	22.36
					QPSK	6	0	0	-85	22.27
					QPSK	6	0	1	-85	22.26
					QPSK	6	0	3	-85	22.25
					16QAM	1	0	0	-85	22.96
					16QAM	1	5	0	-85	23.12
					16QAM	1	0	1	-85	23.03
					16QAM	1	5	1	-85	22.89
					16QAM	1	0	3	-85	22.96
					16QAM	1	5	3	-85	22.88
					16QAM	3	0	0	-85	22.65
					16QAM	3	3	3	-85	22.52
					16QAM	5	0	0	-85	21.36
					16QAM	5	0	1	-85	21.49
					16QAM	5	0	3	-85	21.42

Test Frequency ID	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]	Test Configuration Initial of Power				EUT	
					Modulation	RB Size	RB Offset	Narrowband Index	Cell power (dBm/15kHz)	power (dBm)
High Range	19175	1907.5	1175	1987.5	QPSK	1	0	0	-85	23.55
					QPSK	1	5	0	-85	23.46
					QPSK	1	0	1	-85	23.32
					QPSK	1	5	1	-85	23.38
					QPSK	1	0	3	-85	23.46
					QPSK	1	5	3	-85	23.39
					QPSK	3	0	0	-85	22.51
					QPSK	3	3	3	-85	22.37
					QPSK	6	0	0	-85	22.48
					QPSK	6	0	1	-85	22.51
					QPSK	6	0	3	-85	22.44
					16QAM	1	0	0	-85	23.17
					16QAM	1	5	0	-85	23.09
					16QAM	1	0	1	-85	23.03
					16QAM	1	5	1	-85	22.96
					16QAM	1	0	3	-85	23.01
					16QAM	1	5	3	-85	22.94
					16QAM	3	0	0	-85	22.77
					16QAM	3	3	3	-85	22.56
					16QAM	5	0	0	-85	21.46
					16QAM	5	0	1	-85	21.44
					16QAM	5	0	3	-85	21.54

BW(MHz): 10

Test Frequency ID	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]	Test Configuration Initial of Power				EUT	
					Modulation	RB Size	RB Offset	Narrowband Index	Cell power (dBm/15kHz)	power (dBm)
Low Range	18650	1855	650	1935	QPSK	1	0	0	-85	23.52
					QPSK	1	5	0	-85	23.31
					QPSK	1	0	3	-85	23.18
					QPSK	1	5	3	-85	23.25
					QPSK	1	0	7	-85	23.16
					QPSK	1	5	7	-85	23.11
					QPSK	4	0	0	-85	23.28
					QPSK	4	2	7	-85	23.28
					QPSK	6	0	0	-85	22.26
					QPSK	6	0	7	-85	22.17
					16QAM	1	0	0	-85	23.48
					16QAM	1	5	0	-85	23.17
					16QAM	1	0	3	-85	23.06
					16QAM	1	5	3	-85	22.98
					16QAM	1	0	7	-85	22.9
					16QAM	1	5	7	-85	22.98
					16QAM	4	2	0	-85	22.07
					16QAM	4	2	7	-85	21.98
					16QAM	5	0	0	-85	22.34
					16QAM	5	0	7	-85	22.18

Test Frequency ID	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]	Test Configuration Initial of Power				EUT	
					Modulation	RB Size	RB Offset	Narrowband Index	Cell power (dBm/15kHz)	power (dBm)
Mid Range	18900	1880	900	1960	QPSK	1	0	0	-85	23.27
					QPSK	1	5	0	-85	22.9
					QPSK	1	0	3	-85	23.11
					QPSK	1	5	3	-85	22.95
					QPSK	1	0	7	-85	22.85
					QPSK	1	5	7	-85	23.03
					QPSK	4	0	0	-85	22.92
					QPSK	4	2	7	-85	23.07
					QPSK	6	0	0	-85	21.89
					QPSK	6	0	7	-85	21.94
					16QAM	1	0	0	-85	22.98
					16QAM	1	5	0	-85	22.87
					16QAM	1	0	3	-85	22.89
					16QAM	1	5	3	-85	22.77
					16QAM	1	0	7	-85	22.94
					16QAM	1	5	7	-85	22.86
					16QAM	4	2	0	-85	22.06
					16QAM	4	2	7	-85	21.88
					16QAM	5	0	0	-85	21.98
					16QAM	5	0	7	-85	21.85
High Range	19150	1905	1150	1985	QPSK	1	0	0	-85	23.41
					QPSK	1	5	0	-85	23.19
					QPSK	1	5	7	-85	23.06
					QPSK	1	0	3	-85	23.24
					QPSK	1	5	3	-85	23.07
					QPSK	1	0	7	-85	23.09
					QPSK	4	0	0	-85	23.18
					QPSK	4	2	7	-85	23.29
					QPSK	6	0	0	-85	22.27
					QPSK	6	0	7	-85	22.3
					16QAM	1	0	0	-85	23.09
					16QAM	1	5	0	-85	23.06
					16QAM	1	0	3	-85	22.93
					16QAM	1	5	3	-85	22.81
					16QAM	1	0	7	-85	22.98
					16QAM	1	5	7	-85	23.03
					16QAM	4	2	0	-85	22.13
					16QAM	4	2	7	-85	22.09
					16QAM	5	0	0	-85	22.28
					16QAM	5	0	7	-85	22.11

BW(MHz):	15									
Test Frequency ID	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]	Test Configuration Initial of Power				EUT	
					Modulation	RB Size	RB Offset	Narrowband Index	Cell power (dBm/15kHz)	power (dBm)
Low Range	18675	1857.5	675	1937.5	QPSK	1	0	0	-85	23.04
					QPSK	1	5	0	-85	22.81
					QPSK	1	0	5	-85	22.79
					QPSK	1	5	5	-85	22.88
					QPSK	1	0	11	-85	22.93
					QPSK	1	5	11	-85	22.87
					QPSK	3	0	0	-85	23.09
					QPSK	3	3	11	-85	22.86
					QPSK	6	0	0	-85	23.04
					QPSK	6	0	11	-85	22.97
					16QAM	1	0	0	-85	22.9
					16QAM	1	5	0	-85	22.77
					16QAM	1	0	5	-85	22.85
					16QAM	1	5	5	-85	22.83
					16QAM	1	0	11	-85	22.89
					16QAM	1	5	11	-85	22.86
					16QAM	3	0	0	-85	23.21
					16QAM	3	3	11	-85	22.77
					16QAM	5	0	0	-85	22.92
					16QAM	5	0	11	-85	22.89
Mid Range	18900	1880	900	1960	QPSK	1	0	0	-85	23.17
					QPSK	1	5	0	-85	22.9
					QPSK	1	0	5	-85	23
					QPSK	1	5	5	-85	23.05
					QPSK	1	0	11	-85	23.07
					QPSK	1	5	11	-85	23.13
					QPSK	3	0	0	-85	23.01
					QPSK	3	3	11	-85	23.15
					QPSK	6	0	0	-85	22.98
					QPSK	6	0	11	-85	23.1
					16QAM	1	0	0	-85	22.94
					16QAM	1	5	0	-85	22.83
					16QAM	1	0	5	-85	22.97
					16QAM	1	5	5	-85	22.92
					16QAM	1	0	11	-85	23.04
					16QAM	1	5	11	-85	22.99
					16QAM	3	0	0	-85	23.07
					16QAM	3	3	11	-85	23.37
					16QAM	5	0	0	-85	22.98
					16QAM	5	0	11	-85	22.9

BW(MHz): 15

Test Frequency ID	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]	Test Configuration Initial of Power				EUT	
					Modulation	RB Size	RB Offset	Narrowband Index	Cell power (dBm/15kHz)	power (dBm)
High Range	19125	1902.5	1125	1982.5	QPSK	1	0	0	-85	23.45
					QPSK	1	5	0	-85	23.33
					QPSK	1	0	5	-85	23.38
					QPSK	1	5	5	-85	23.4
					QPSK	1	0	11	-85	23.11
					QPSK	1	5	11	-85	23.29
					QPSK	3	0	0	-85	23.51
					QPSK	3	3	11	-85	23.02
					QPSK	6	0	0	-85	23.4
					QPSK	6	0	11	-85	23.13
					16QAM	1	0	0	-85	23.09
					16QAM	1	5	0	-85	22.97
					16QAM	1	0	5	-85	22.84
					16QAM	1	5	5	-85	23.01
					16QAM	1	0	11	-85	22.98
					16QAM	1	5	11	-85	23.01
					16QAM	3	0	0	-85	23.56
					16QAM	3	3	11	-85	23.41
					16QAM	5	0	0	-85	23.23
					16QAM	5	0	11	-85	23.14

BW(MHz): 20

Test Frequency ID	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]	Test Configuration Initial of Power				EUT	
					Modulation	RB Size	RB Offset	Narrowband Index	Cell power (dBm/15kHz)	power (dBm)
Low Range	18700	1860	700	1940	QPSK	1	0	0	-85	23
					QPSK	1	5	0	-85	23.01
					QPSK	1	0	7	-85	22.97
					QPSK	1	5	7	-85	22.89
					QPSK	1	0	15	-85	22.92
					QPSK	1	5	15	-85	22.93
					QPSK	3	0	0	-85	23.09
					QPSK	3	3	15	-85	22.95
					QPSK	6	0	0	-85	23.17
					QPSK	6	0	15	-85	22.69
					16QAM	1	0	0	-85	22.96
					16QAM	1	5	0	-85	22.88
					16QAM	1	0	7	-85	22.68
					16QAM	1	5	7	-85	22.74
					16QAM	1	0	15	-85	22.58
					16QAM	1	5	15	-85	22.63
					16QAM	3	0	0	-85	23.37
					16QAM	3	3	15	-85	22.81
					16QAM	5	0	0	-85	23.19
					16QAM	5	0	15	-85	22.84

Test Frequency ID	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]	Test Configuration Initial of Power				EUT	
					Modulation	RB Size	RB Offset	Narrowband Index	Cell power (dBm/15kHz)	power (dBm)
Mid Range	18900	1880	900	1960	QPSK	1	0	0	-85	23.15
					QPSK	1	5	0	-85	22.88
					QPSK	1	0	7	-85	23.05
					QPSK	1	5	7	-85	22.84
					QPSK	1	0	15	-85	23.08
					QPSK	1	5	15	-85	23.17
					QPSK	3	0	0	-85	22.94
					QPSK	3	3	15	-85	23.31
					QPSK	6	0	0	-85	22.91
					QPSK	6	0	15	-85	23.09
					16QAM	1	0	0	-85	22.99
					16QAM	1	5	0	-85	22.79
					16QAM	1	0	7	-85	22.81
					16QAM	1	5	7	-85	22.73
					16QAM	1	0	15	-85	22.94
					16QAM	1	5	15	-85	23.11
					16QAM	3	0	0	-85	23.23
					16QAM	3	3	15	-85	23.34
					16QAM	5	0	0	-85	22.95
					16QAM	5	0	15	-85	23.21
High Range	19100	1900	1100	1980	QPSK	1	0	0	-85	23.51
					QPSK	1	5	0	-85	23.4
					QPSK	1	0	7	-85	23.15
					QPSK	1	5	7	-85	23.12
					QPSK	1	0	15	-85	23
					QPSK	1	5	15	-85	22.93
					QPSK	3	0	0	-85	23.19
					QPSK	3	3	15	-85	23.04
					QPSK	6	0	0	-85	23.06
					QPSK	6	0	15	-85	22.91
					16QAM	1	0	0	-85	23
					16QAM	1	5	0	-85	23.15
					16QAM	1	0	7	-85	22.87
					16QAM	1	5	7	-85	23.04
					16QAM	1	0	15	-85	22.89
					16QAM	1	5	15	-85	22.96
					16QAM	3	0	0	-85	23.45
					16QAM	3	3	15	-85	22.86
					16QAM	5	0	0	-85	23.21
					16QAM	5	0	15	-85	22.9

EIRP Power (dBm)

LTE Band 2							
Channel Bandwidth: 1.4 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Z	18607	1850.7	-13.08	36.57	23.49	223.36	H
	18900	1880.0	-13.94	37.22	23.28	212.81	
	19193	1909.3	-13.53	37.18	23.65	231.74	
	18607	1850.7	-9.93	37.65	27.72	591.56	V
	18900	1880.0	-9.89	37.58	27.69	587.49	
	19193	1909.3	-9.63	37.48	27.85	609.54	
Channel Bandwidth: 1.4 MHz / 16QAM							
Z	18607	1850.7	-14.07	36.57	22.50	177.83	H
	18900	1880.0	-14.93	37.22	22.29	169.43	
	19193	1909.3	-14.52	37.18	22.66	184.50	
	18607	1850.7	-10.92	37.65	26.73	470.98	V
	18900	1880.0	-10.88	37.58	26.70	467.74	
	19193	1909.3	-10.62	37.48	26.86	485.29	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 2							
Channel Bandwidth: 3 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Z	18615	1851.5	-13.31	36.57	23.26	211.84	H
	18900	1880.0	-14.17	37.22	23.05	201.84	
	19185	1908.5	-13.76	37.18	23.42	219.79	
	18615	1851.5	-10.16	37.65	27.49	561.05	V
	18900	1880.0	-10.12	37.58	27.46	557.19	
	19185	1908.5	-9.86	37.48	27.62	578.10	
Channel Bandwidth: 3 MHz / 16QAM							
Z	18615	1851.5	-14.32	36.57	22.25	167.88	H
	18900	1880.0	-15.18	37.22	22.04	159.96	
	19185	1908.5	-14.77	37.18	22.41	174.18	
	18615	1851.5	-11.17	37.65	26.48	444.63	V
	18900	1880.0	-11.13	37.58	26.45	441.57	
	19185	1908.5	-10.87	37.48	26.61	458.14	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 2							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Z	18625	1852.5	-13.55	36.57	23.02	200.45	H
	18900	1880.0	-14.41	37.22	22.81	190.99	
	19175	1907.5	-14.00	37.18	23.18	207.97	
	18625	1852.5	-10.40	37.65	27.25	530.88	V
	18900	1880.0	-10.36	37.58	27.22	527.23	
	19175	1907.5	-10.10	37.48	27.38	547.02	
Channel Bandwidth: 5 MHz / 16QAM							
Z	18625	1852.5	-14.56	36.57	22.01	158.85	H
	18900	1880.0	-15.42	37.22	21.80	151.36	
	19175	1907.5	-15.01	37.18	22.17	164.82	
	18625	1852.5	-11.41	37.65	26.24	420.73	V
	18900	1880.0	-11.37	37.58	26.21	417.83	
	19175	1907.5	-11.11	37.48	26.37	433.51	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 2							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Z	18650	1855.0	-13.80	36.57	22.77	189.23	H
	18900	1880.0	-14.66	37.22	22.56	180.30	
	19150	1905.0	-14.25	37.18	22.93	196.34	
	18650	1855.0	-10.65	37.65	27.00	501.19	V
	18900	1880.0	-10.61	37.58	26.97	497.74	
	19150	1905.0	-10.35	37.48	27.13	516.42	
Channel Bandwidth: 10 MHz / 16QAM							
Z	18650	1855.0	-14.79	36.57	21.78	150.66	H
	18900	1880.0	-15.65	37.22	21.57	143.55	
	19150	1905.0	-15.24	37.18	21.94	156.31	
	18650	1855.0	-11.64	37.65	26.01	399.02	V
	18900	1880.0	-11.60	37.58	25.98	396.28	
	19150	1905.0	-11.34	37.48	26.14	411.15	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 2							
Channel Bandwidth: 15 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Z	18675	1857.5	-14.06	36.57	22.51	178.24	H
	18900	1880.0	-14.92	37.22	22.30	169.82	
	19125	1902.5	-14.51	37.18	22.67	184.93	
	18675	1857.5	-10.91	37.65	26.74	472.06	V
	18900	1880.0	-10.87	37.58	26.71	468.81	
	19125	1902.5	-10.61	37.48	26.87	486.41	
Channel Bandwidth: 15 MHz / 16QAM							
Z	18675	1857.5	-15.03	36.57	21.54	142.56	H
	18900	1880.0	-15.89	37.22	21.33	135.83	
	19125	1902.5	-15.48	37.18	21.70	147.91	
	18675	1857.5	-11.88	37.65	25.77	377.57	V
	18900	1880.0	-11.84	37.58	25.74	374.97	
	19125	1902.5	-11.58	37.48	25.90	389.05	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 2							
Channel Bandwidth: 20 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Z	18700	1860.0	-14.31	36.57	22.26	168.27	H
	18900	1880.0	-15.17	37.22	22.05	160.32	
	19100	1900.0	-14.76	37.18	22.42	174.58	
	18700	1860.0	-11.16	37.65	26.49	445.66	V
	18900	1880.0	-11.12	37.58	26.46	442.59	
	19100	1900.0	-10.86	37.48	26.62	459.20	
Channel Bandwidth: 20 MHz / 16QAM							
Z	18700	1860.0	-15.28	36.57	21.29	134.59	H
	18900	1880.0	-16.14	37.22	21.08	128.23	
	19100	1900.0	-15.73	37.18	21.45	139.64	
	18700	1860.0	-12.13	37.65	25.52	356.45	V
	18900	1880.0	-12.09	37.58	25.49	354.00	
	19100	1900.0	-11.83	37.48	25.65	367.28	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

4.2 Modulation Characteristics Measurement

4.2.1 Limits of Modulation Characteristics

N/A


4.2.2 Test Setup



4.2.3 Test Procedure

Connect the EUT to Communication Simulator via the antenna connector. The frequency band is set as EUT supported Modulation and Channels, the EUT output is matched with 50 ohm load, the waveform quality and constellation of the EUT was tested.

4.2.4 Test Results

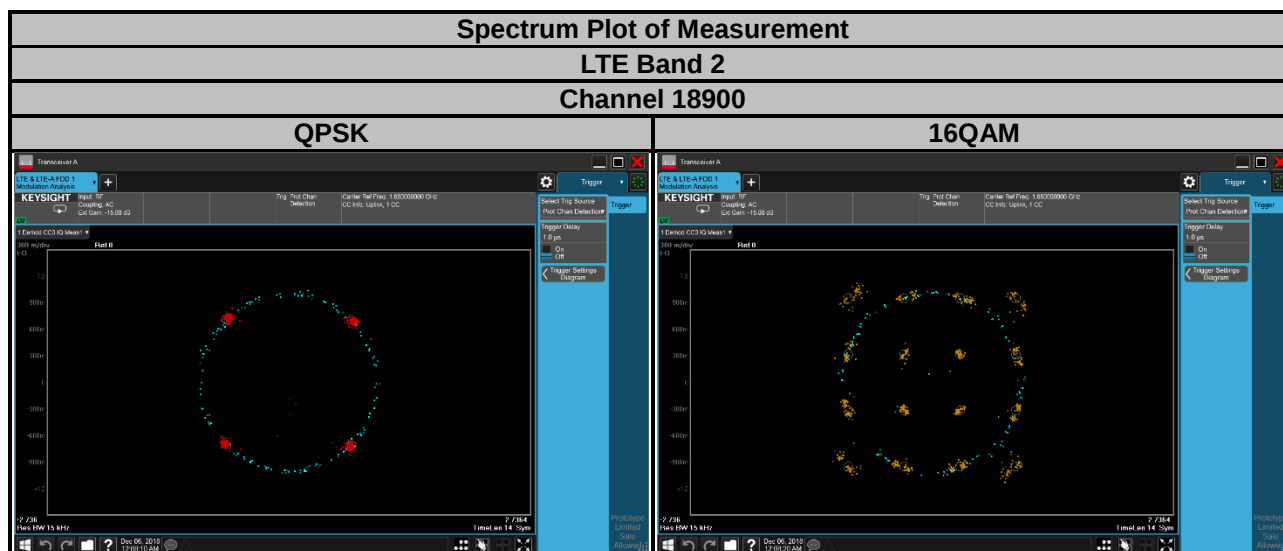

4.3 Frequency Stability Measurement

4.3.1 Limits of Frequency Stability Measurement


The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

4.3.2 Test Procedure

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the ± 0.5 °C during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.3.3 Test Setup

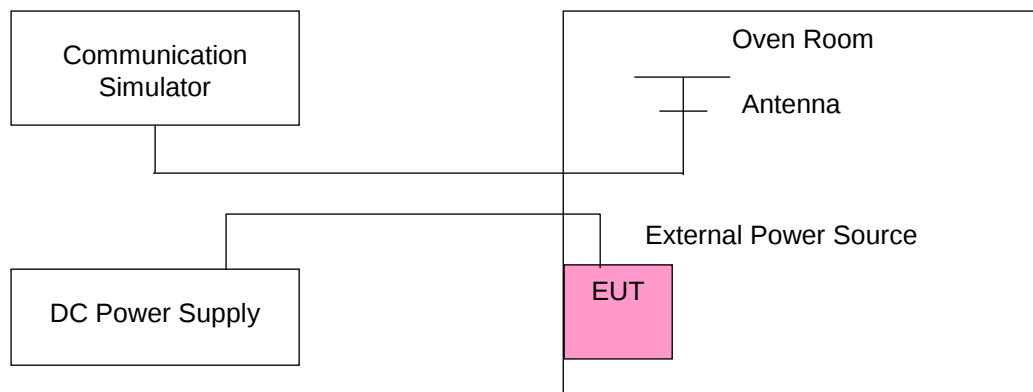

4.3.4 Test Results

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2			
	Channel Bandwidth: 1.4 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
5.00	1850.700002	0.001	1909.300000	0.001
4.25	1850.700001	0.001	1909.300003	0.002
5.75	1850.700002	0.001	1909.300004	0.002

Note: The applicant defined the normal working voltage of the adapter is from 4.25 Vdc to 5.75 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2			
	Channel Bandwidth: 1.4 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1850.700003	0.001	1909.300003	0.002
-20	1850.700004	0.002	1909.300002	0.001
-10	1850.700002	0.001	1909.300003	0.002
0	1850.700004	0.002	1909.300004	0.002
10	1850.700003	0.001	1909.300004	0.002
20	1850.699997	-0.002	1909.299999	-0.001
30	1850.699999	-0.001	1909.299996	-0.002
40	1850.699997	-0.001	1909.299996	-0.002
50	1850.699996	-0.002	1909.299998	-0.001

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2			
	Channel Bandwidth: 3 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
5.00	1850.700002	0.001	1909.300000	0.002
4.25	1850.700004	0.002	1909.300003	0.002
5.75	1850.700003	0.002	1909.300003	0.002

Note: The applicant defined the normal working voltage of the adapter is from 4.25 Vdc to 5.75 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2			
	Channel Bandwidth: 3 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1850.700002	0.001	1909.300002	0.001
-20	1850.700001	0.001	1909.300003	0.001
-10	1850.700004	0.002	1909.300003	0.001
0	1850.700003	0.002	1909.300003	0.002
10	1850.700003	0.001	1909.300001	0.001
20	1850.699999	-0.001	1909.299996	-0.002
30	1850.699997	-0.002	1909.299999	-0.001
40	1850.699999	-0.001	1909.299997	-0.002
50	1850.699999	-0.001	1909.299998	-0.001

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
5.00	1850.700001	0.001	1909.300000	0.001
4.25	1850.700004	0.002	1909.300001	0.001
5.75	1850.700002	0.001	1909.300001	0.001

Note: The applicant defined the normal working voltage of the adapter is from 4.25 Vdc to 5.75 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1850.700004	0.002	1909.300002	0.001
-20	1850.700002	0.001	1909.300003	0.001
-10	1850.700002	0.001	1909.300003	0.002
0	1850.700002	0.001	1909.300003	0.001
10	1850.700004	0.002	1909.300002	0.001
20	1850.699998	-0.001	1909.299997	-0.002
30	1850.699999	-0.001	1909.299999	-0.001
40	1850.699998	-0.001	1909.299997	-0.001
50	1850.699998	-0.001	1909.299997	-0.001

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
5.00	1850.700002	0.001	1909.300000	0.001
4.25	1850.700004	0.002	1909.300001	0.001
5.75	1850.700001	0.001	1909.300003	0.002

Note: The applicant defined the normal working voltage of the adapter is from 4.25 Vdc to 5.75 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1850.700002	0.001	1909.300002	0.001
-20	1850.700001	0.001	1909.300004	0.002
-10	1850.700002	0.001	1909.300003	0.002
0	1850.700003	0.002	1909.300004	0.002
10	1850.700002	0.001	1909.300002	0.001
20	1850.699998	-0.001	1909.299998	-0.001
30	1850.699998	-0.001	1909.299998	-0.001
40	1850.699997	-0.002	1909.299997	-0.002
50	1850.699998	-0.001	1909.299997	-0.002

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
5.00	1850.700003	0.002	1909.300000	0.002
4.25	1850.700003	0.002	1909.300003	0.001
5.75	1850.700003	0.002	1909.300004	0.002

Note: The applicant defined the normal working voltage of the adapter is from 4.25 Vdc to 5.75 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1850.700002	0.001	1909.300002	0.001
-20	1850.700002	0.001	1909.300002	0.001
-10	1850.700004	0.002	1909.300002	0.001
0	1850.700002	0.001	1909.300002	0.001
10	1850.700002	0.001	1909.300003	0.001
20	1850.699997	-0.002	1909.299997	-0.002
30	1850.699998	-0.001	1909.299996	-0.002
40	1850.699996	-0.002	1909.299997	-0.002
50	1850.699997	-0.002	1909.299997	-0.001

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
5.00	1850.700002	0.001	1909.300000	0.001
4.25	1850.700004	0.002	1909.300004	0.002
5.75	1850.700003	0.001	1909.300004	0.002

Note: The applicant defined the normal working voltage of the adapter is from 4.25 Vdc to 5.75 Vdc.

Frequency Error vs. Temperature


Temp. (°C)	LTE Band 2			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1850.700003	0.001	1909.300003	0.001
-20	1850.700003	0.001	1909.300001	0.001
-10	1850.700004	0.002	1909.300003	0.002
0	1850.700002	0.001	1909.300001	0.001
10	1850.700002	0.001	1909.300002	0.001
20	1850.699997	-0.002	1909.299997	-0.002
30	1850.699998	-0.001	1909.299999	-0.001
40	1850.699998	-0.001	1909.299998	-0.001
50	1850.699997	-0.002	1909.299999	-0.001

4.4 Occupied Bandwidth Measurement

4.4.1 Test Procedure


The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

4.4.2 Test Setup

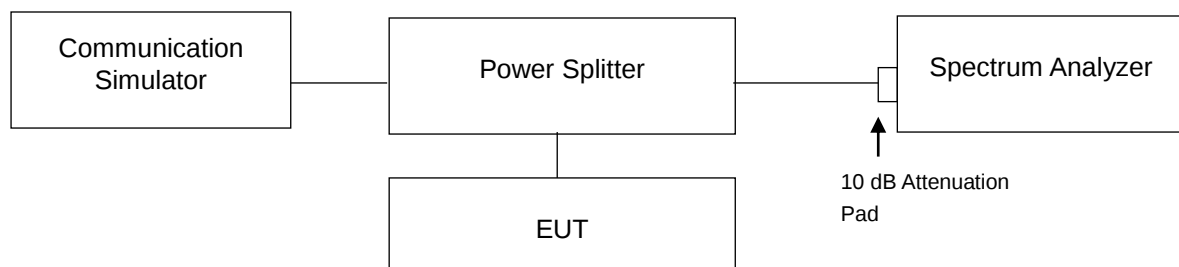

4.4.3 Test Result


LTE Band 2							
Channel Bandwidth: 1.4 MHz				Channel Bandwidth: 3 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
18607	1850.7	1.089	0.914	18615	1851.5	1.087	0.913
18900	1880.0	1.088	0.913	18900	1880.0	1.084	0.921
19193	1909.3	1.088	0.915	19185	1908.5	1.079	0.918

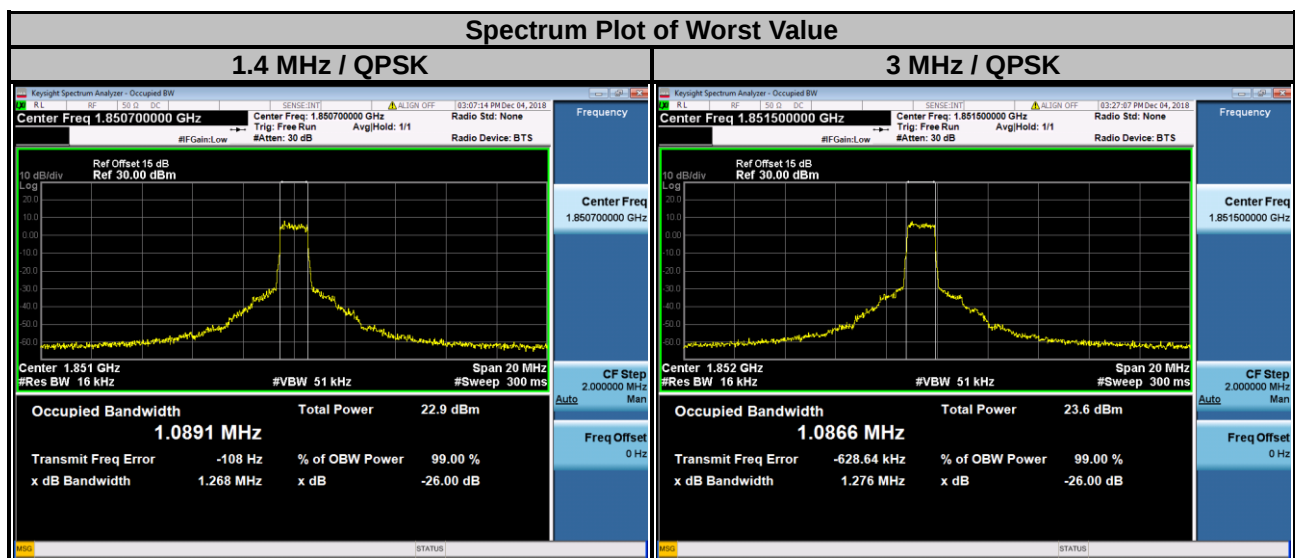

LTE Band 2

Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
18625	1852.5	1.078	0.916	18650	1855.0	1.085	0.916
18900	1880.0	1.081	0.915	18900	1880.0	1.089	0.915
19175	1907.5	1.081	0.917	19150	1905.0	1.089	0.913


Spectrum Plot of Worst Value

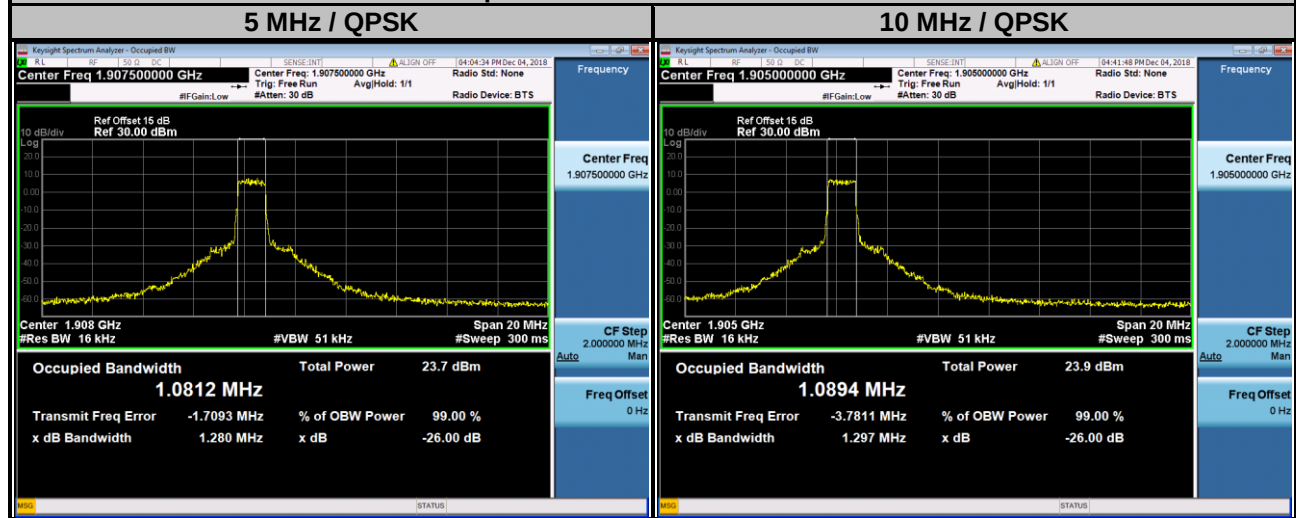

LTE Band 2

Channel Bandwidth: 15 MHz				Channel Bandwidth: 20 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
18675	1857.5	1.087	0.916	18700	1860.0	1.088	0.912
18900	1880.0	1.080	0.917	18900	1880.0	1.090	0.916
19125	1902.5	1.079	0.920	19100	1900.0	1.087	0.915

Spectrum Plot of Worst Value

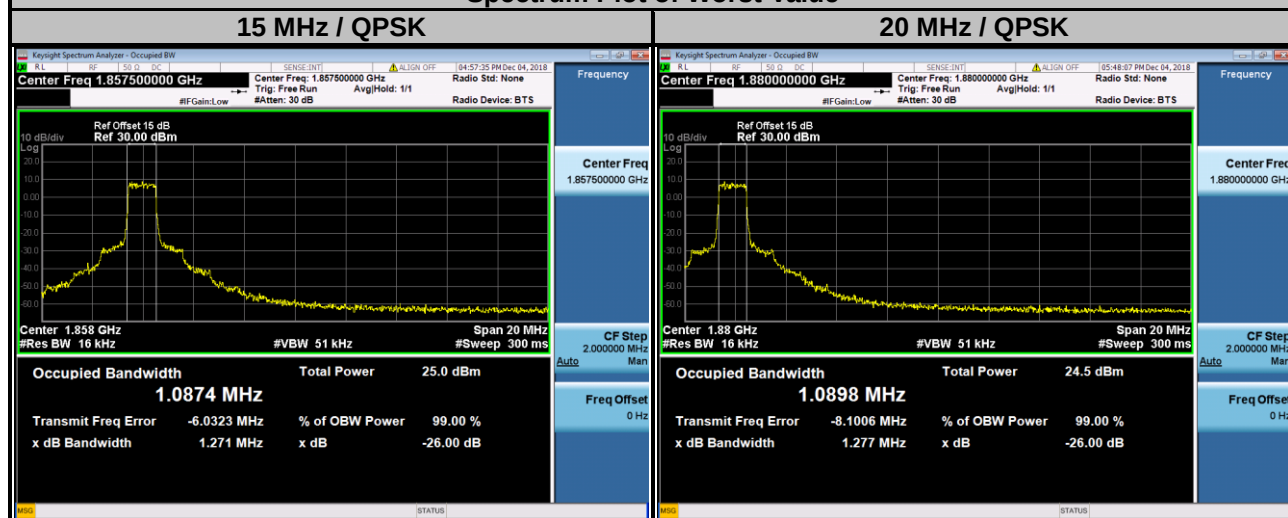


4.5 Band Edge Measurement

4.5.1 Limits of Band Edge Measurement

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.


4.5.2 Test Setup

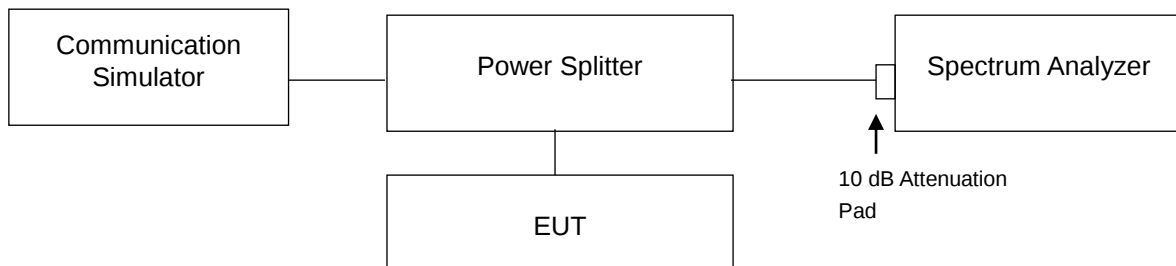

4.5.3 Test Procedures


- All measurements were done at low and high operational frequency range.
- The center frequency of spectrum is the band edge frequency and span is 5 MHz. RB of the spectrum is 16 kHz and VB of the spectrum is 51 kHz
- Record the max trace plot into the test report.


4.5.4 Test Results

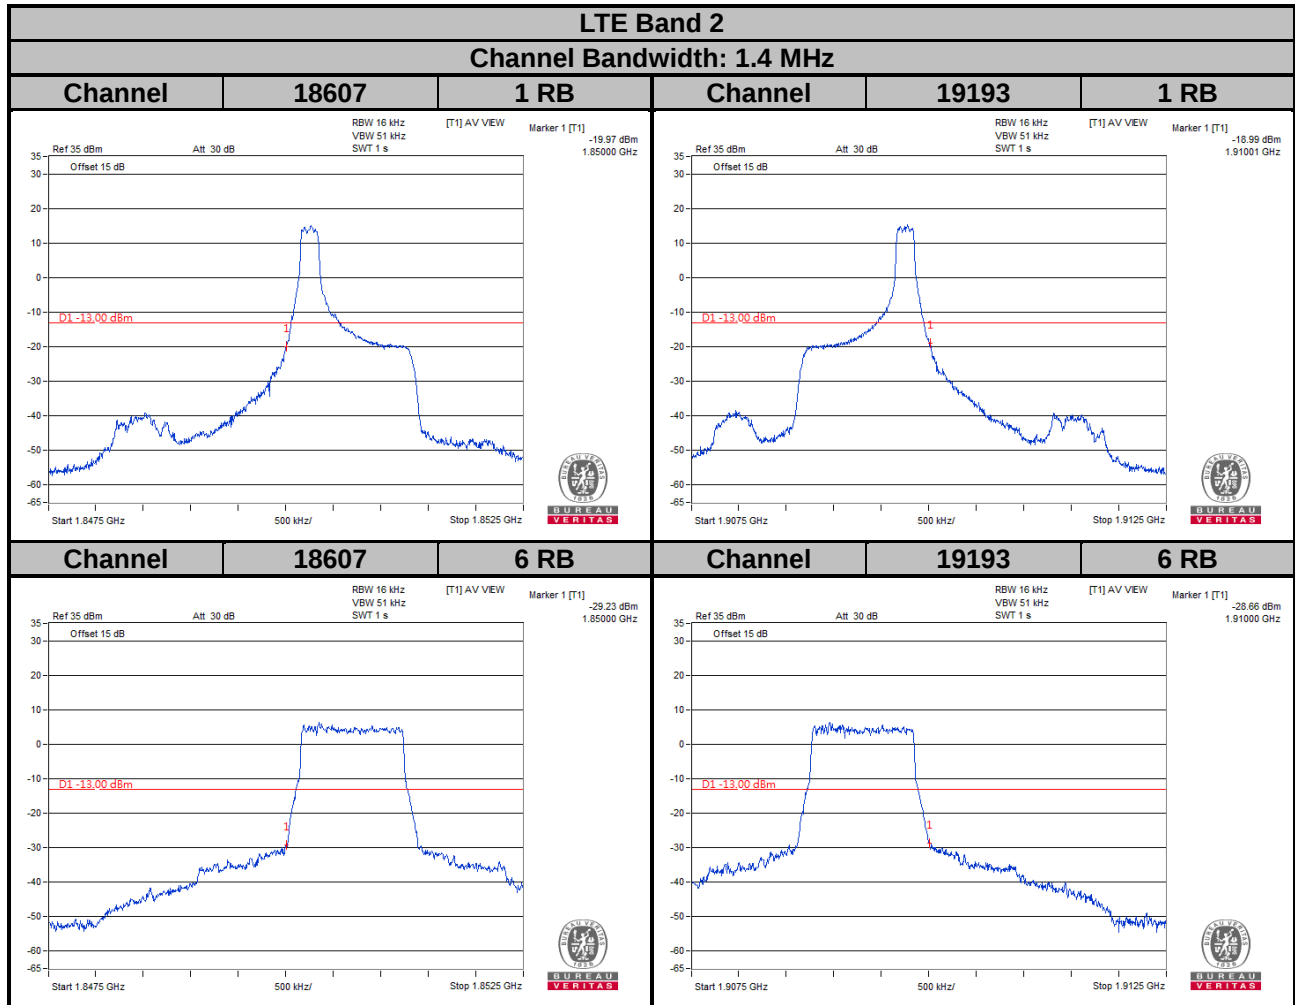


LTE Band 2

Channel Bandwidth: 3 MHz

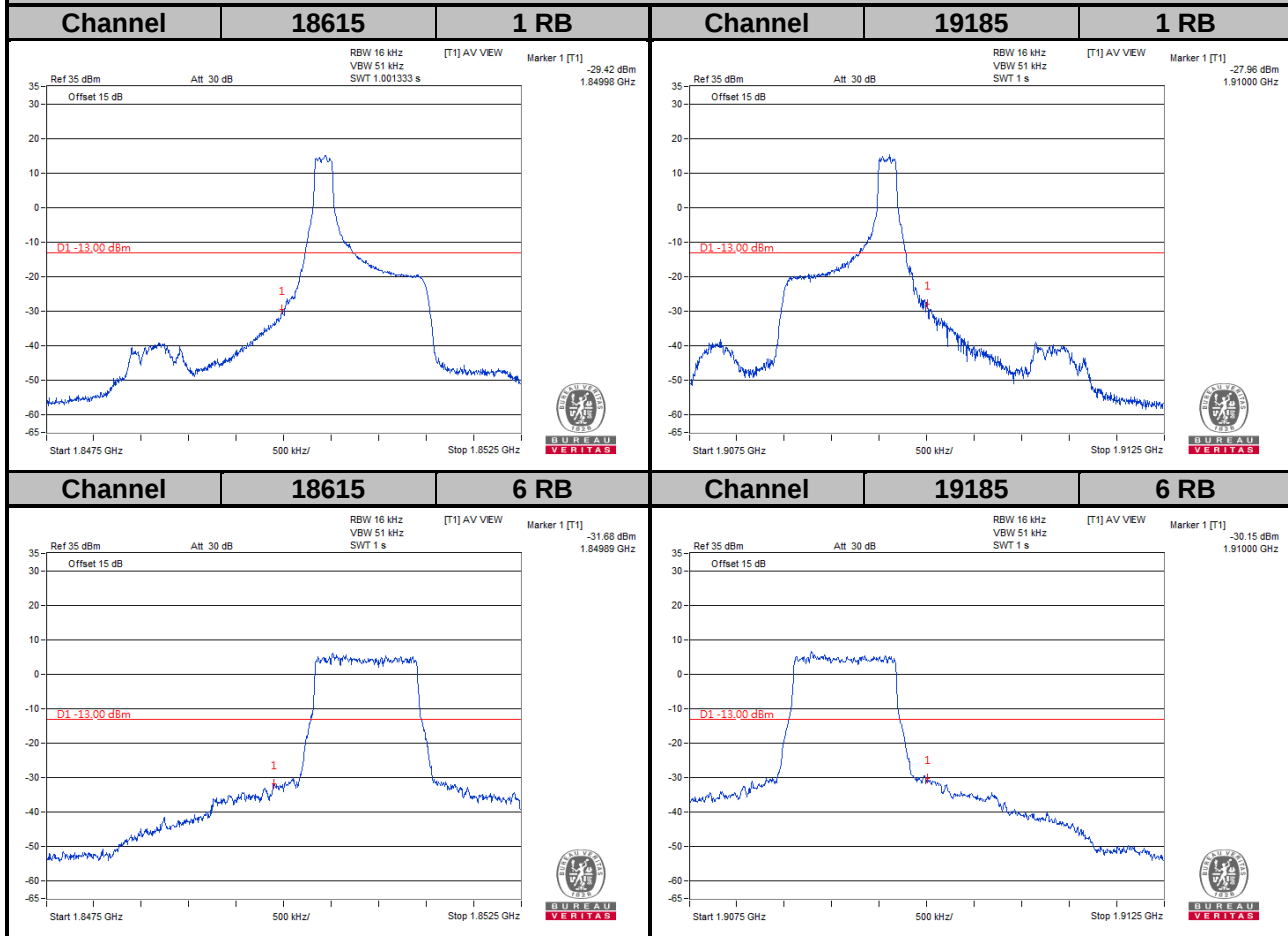


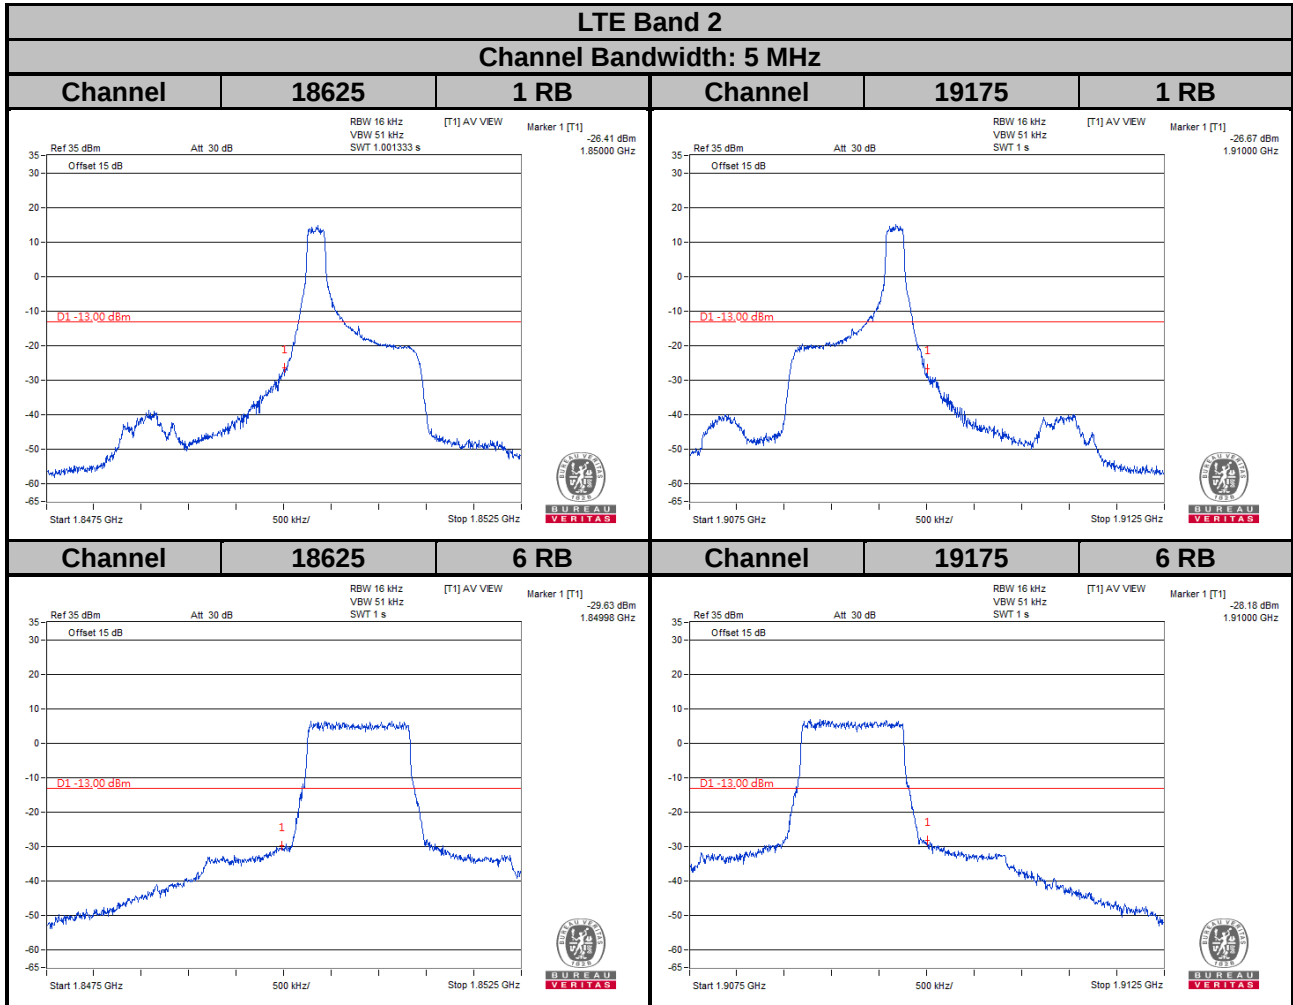


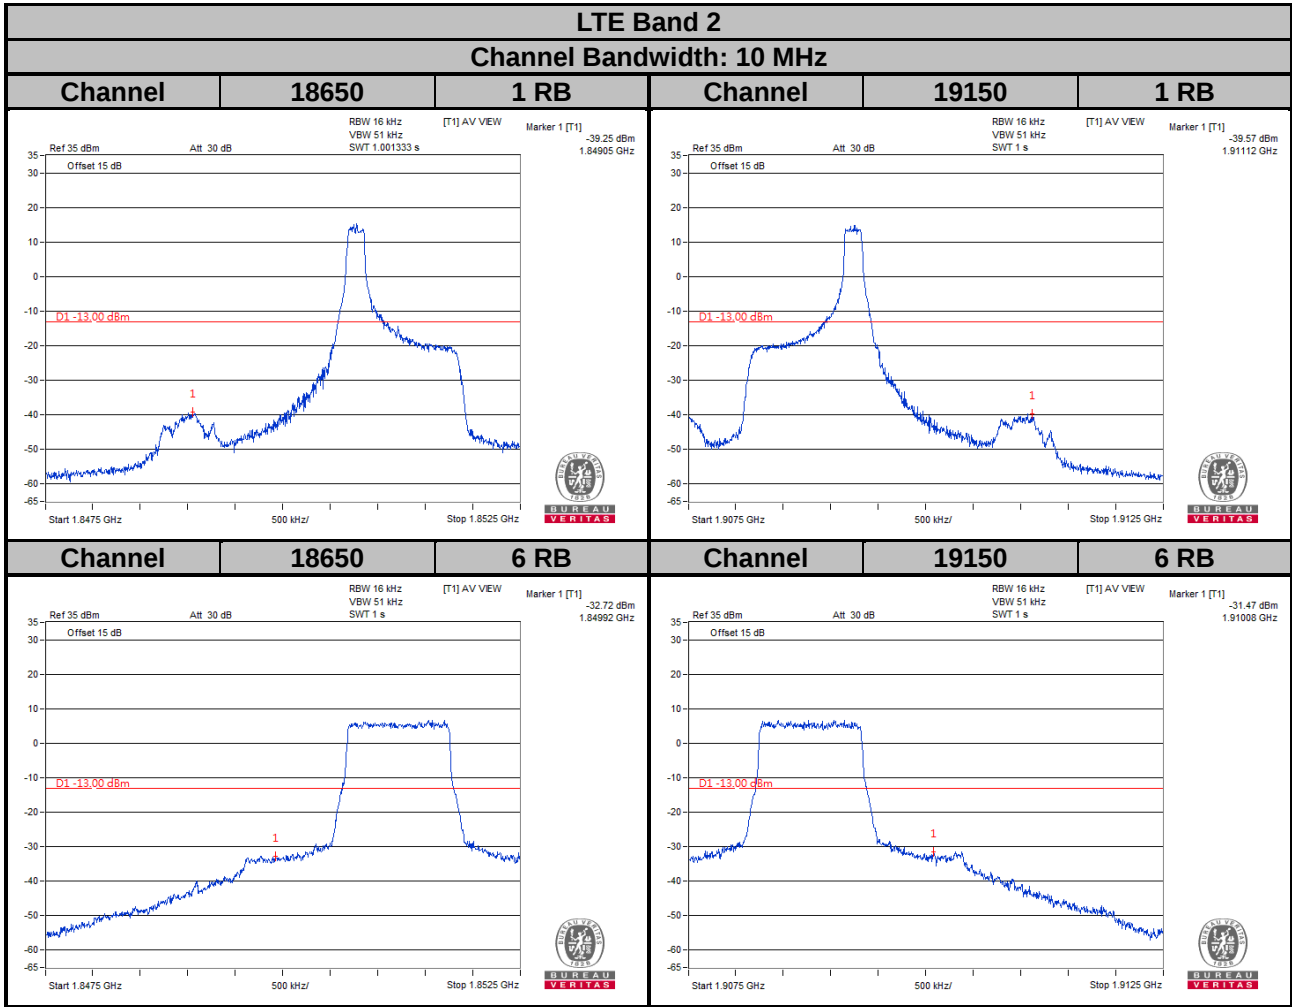

LTE Band 2

Channel Bandwidth: 15 MHz

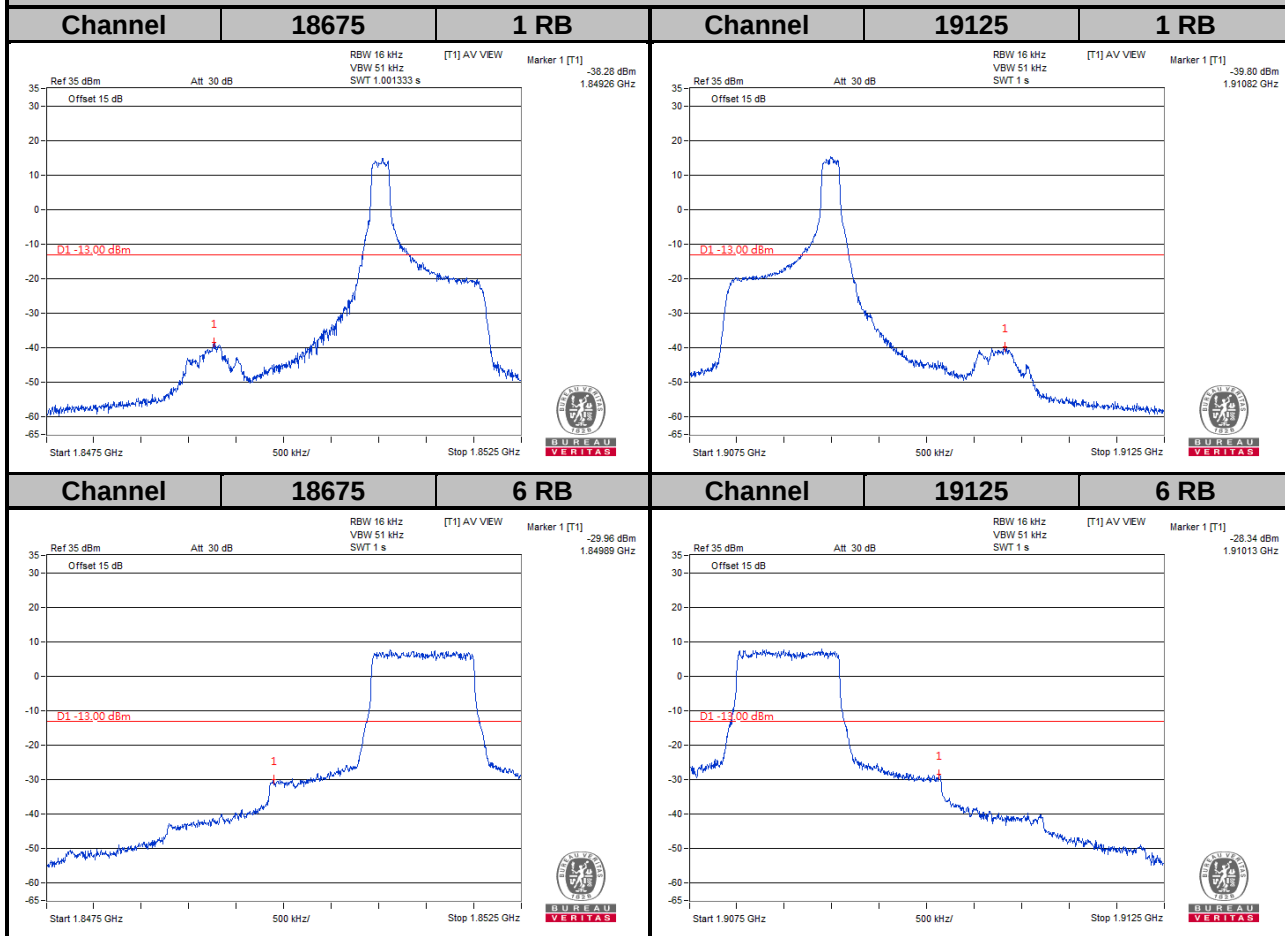

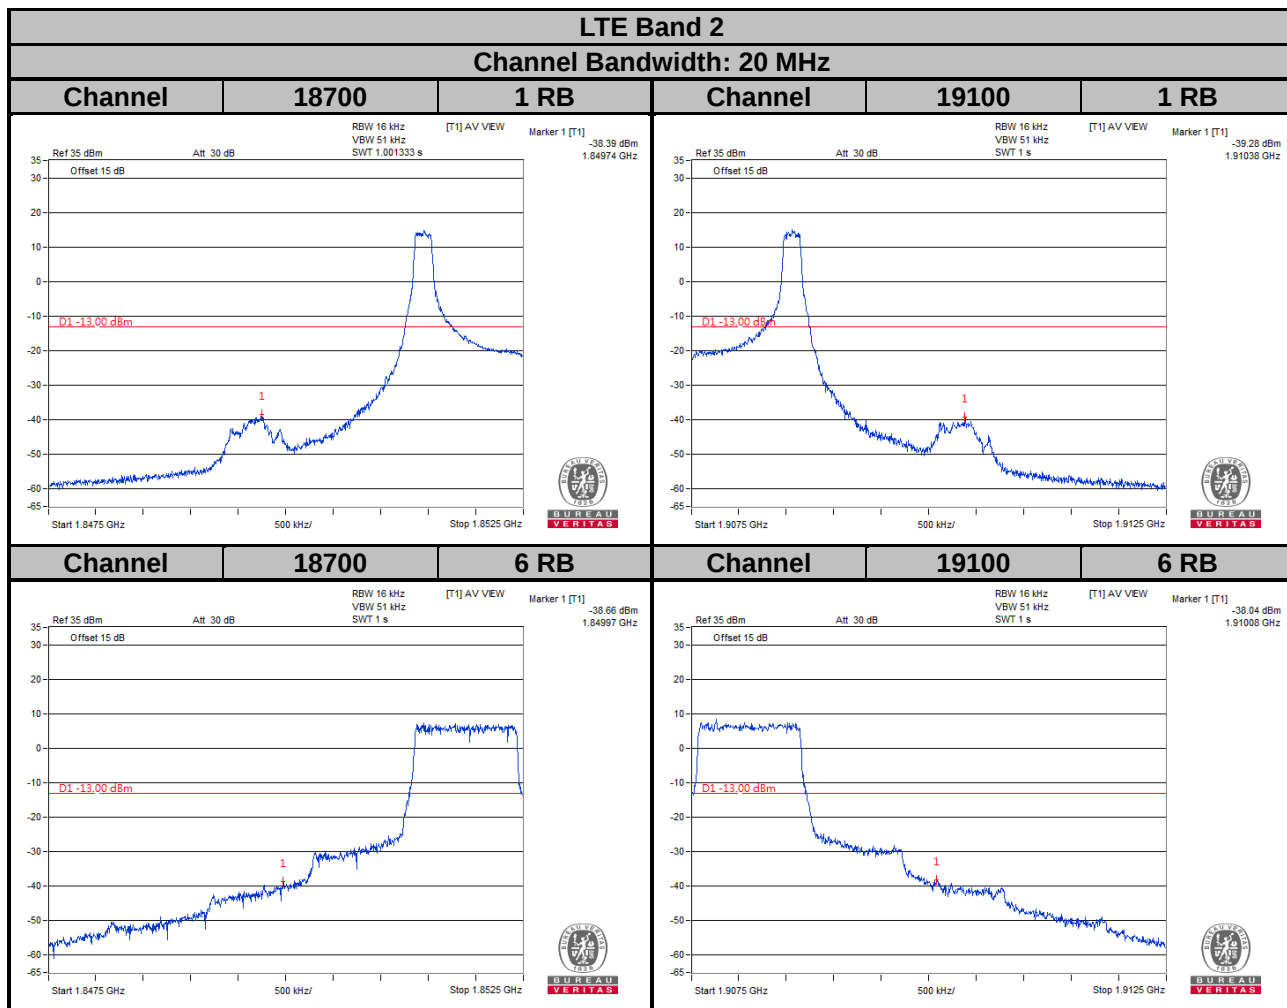


4.6 Peak to Average Ratio

4.6.1 Limits of Peak to Average Ratio Measurement

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.6.2 Test Setup

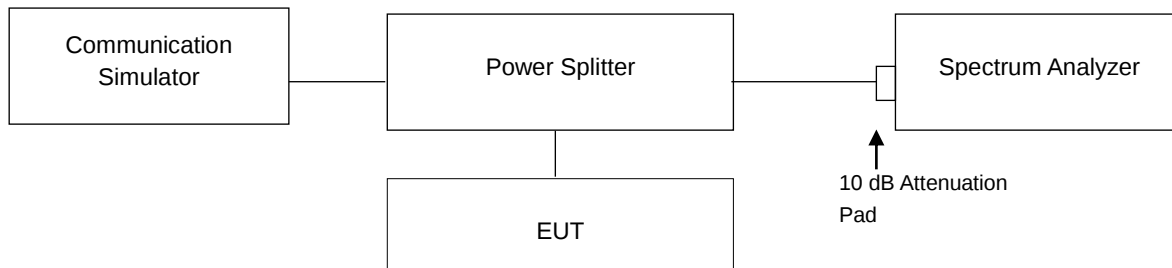


4.6.3 Test Procedures


1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1 %.

4.6.4 Test Results

LTE Band 2							
Channel Bandwidth: 1.4 MHz				Channel Bandwidth: 3 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
18607	1850.7	4.31	4.79	18615	1851.5	4.27	4.98
18900	1880.0	4.40	4.81	18900	1880.0	4.50	5.00
19193	1909.3	4.07	4.54	19185	1908.5	4.07	4.84

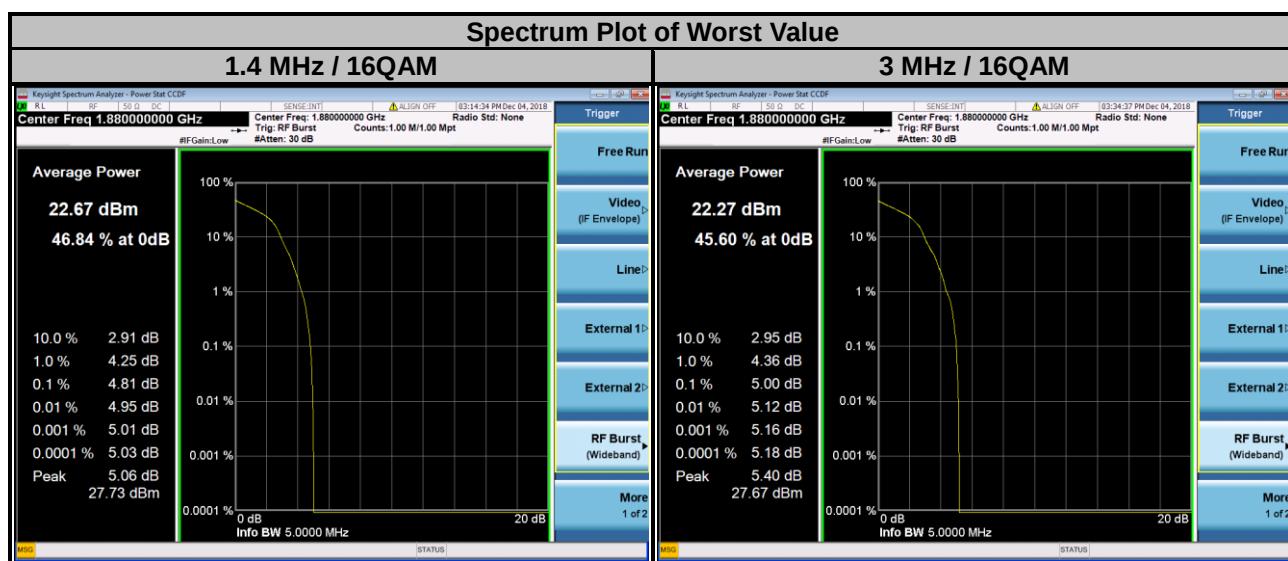


LTE Band 2							
Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
18625	1852.5	4.59	4.65	18650	1855.0	4.62	4.63
18900	1880.0	4.61	4.87	18900	1880.0	4.67	5.23
19175	1907.5	4.32	4.47	19150	1905.0	4.32	4.39

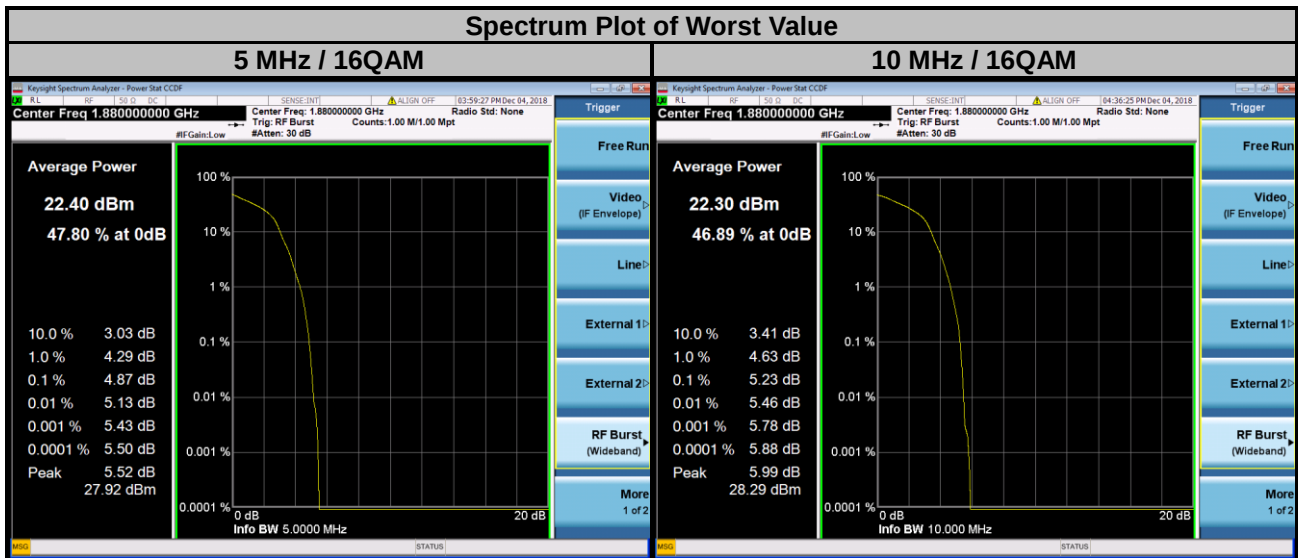

LTE Band 2

Channel Bandwidth: 15 MHz				Channel Bandwidth: 20 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
18675	1857.5	4.91	4.62	18700	1860.0	4.69	4.61
18900	1880.0	5.20	4.73	18900	1880.0	4.53	5.25
19125	1902.5	4.98	4.45	19100	1900.0	4.27	4.49

Spectrum Plot of Worst Value

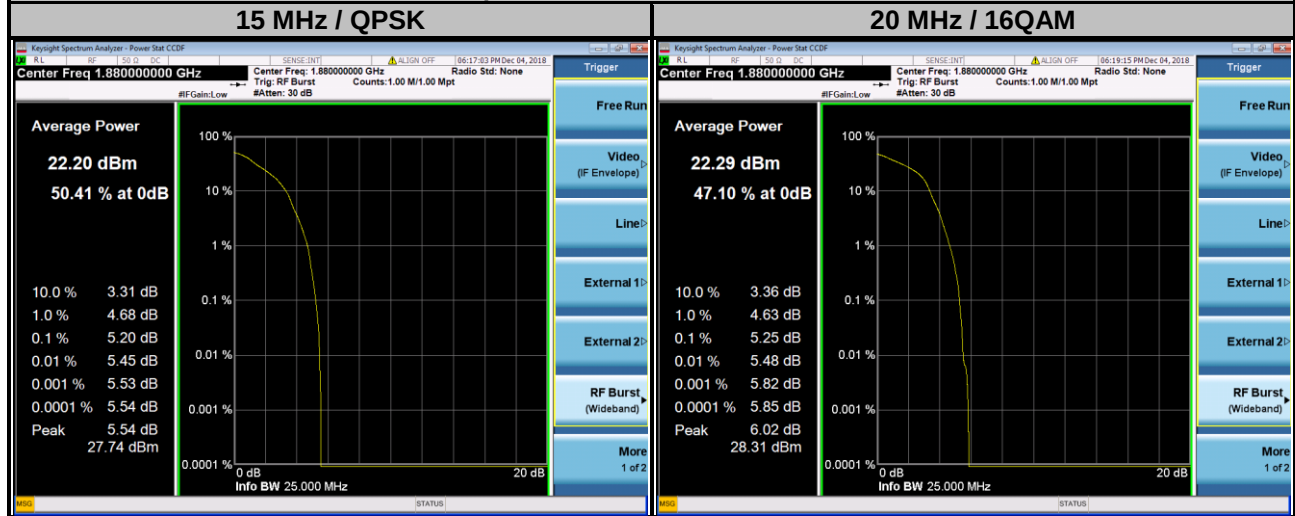


4.7 Conducted Spurious Emissions

4.7.1 Limits of Conducted Spurious Emissions Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13 dBm.


4.7.2 Test Setup

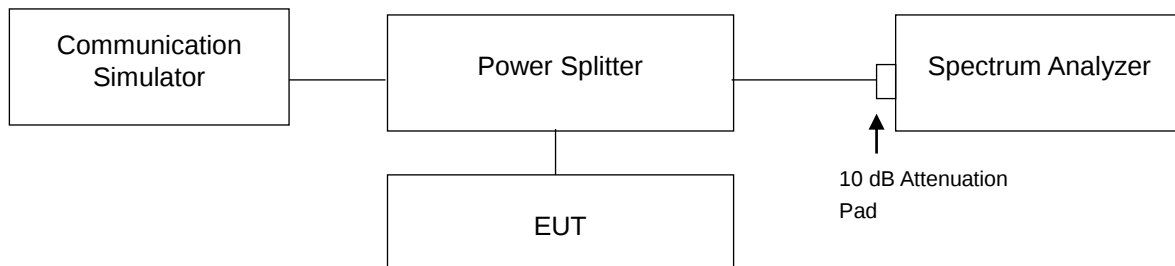


4.7.3 Test Procedure

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 9 kHz to 1 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 100 kHz and VBW = 300 kHz is used for conducted emission measurement.
- Measuring frequency range is from 1 GHz to 27 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 1 MHz and VBW = 3 MHz is used for conducted emission measurement.


4.7.4 Test Results

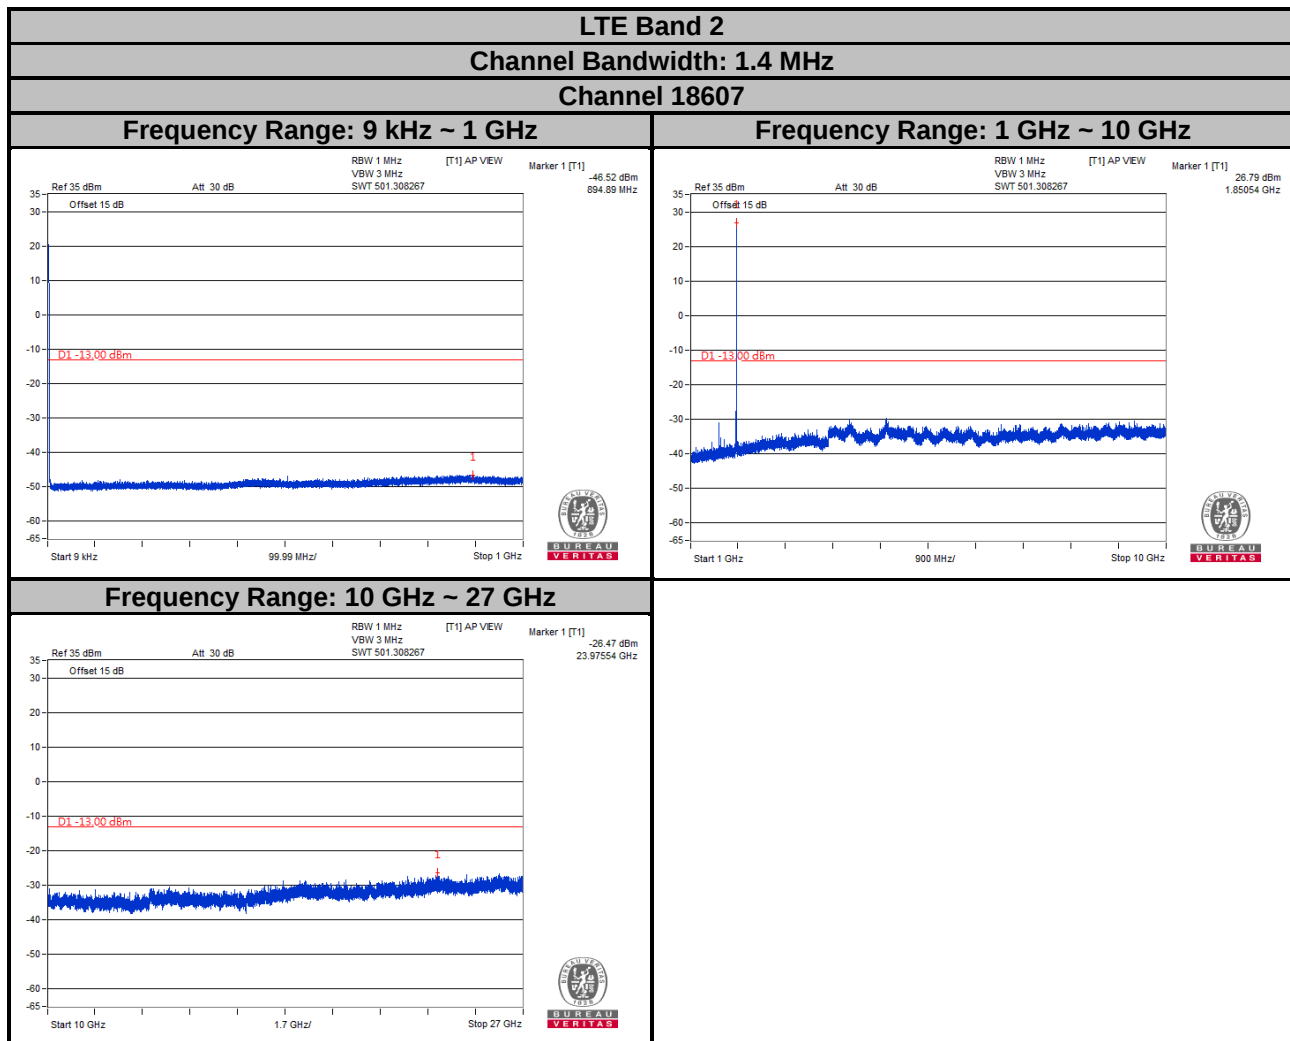

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

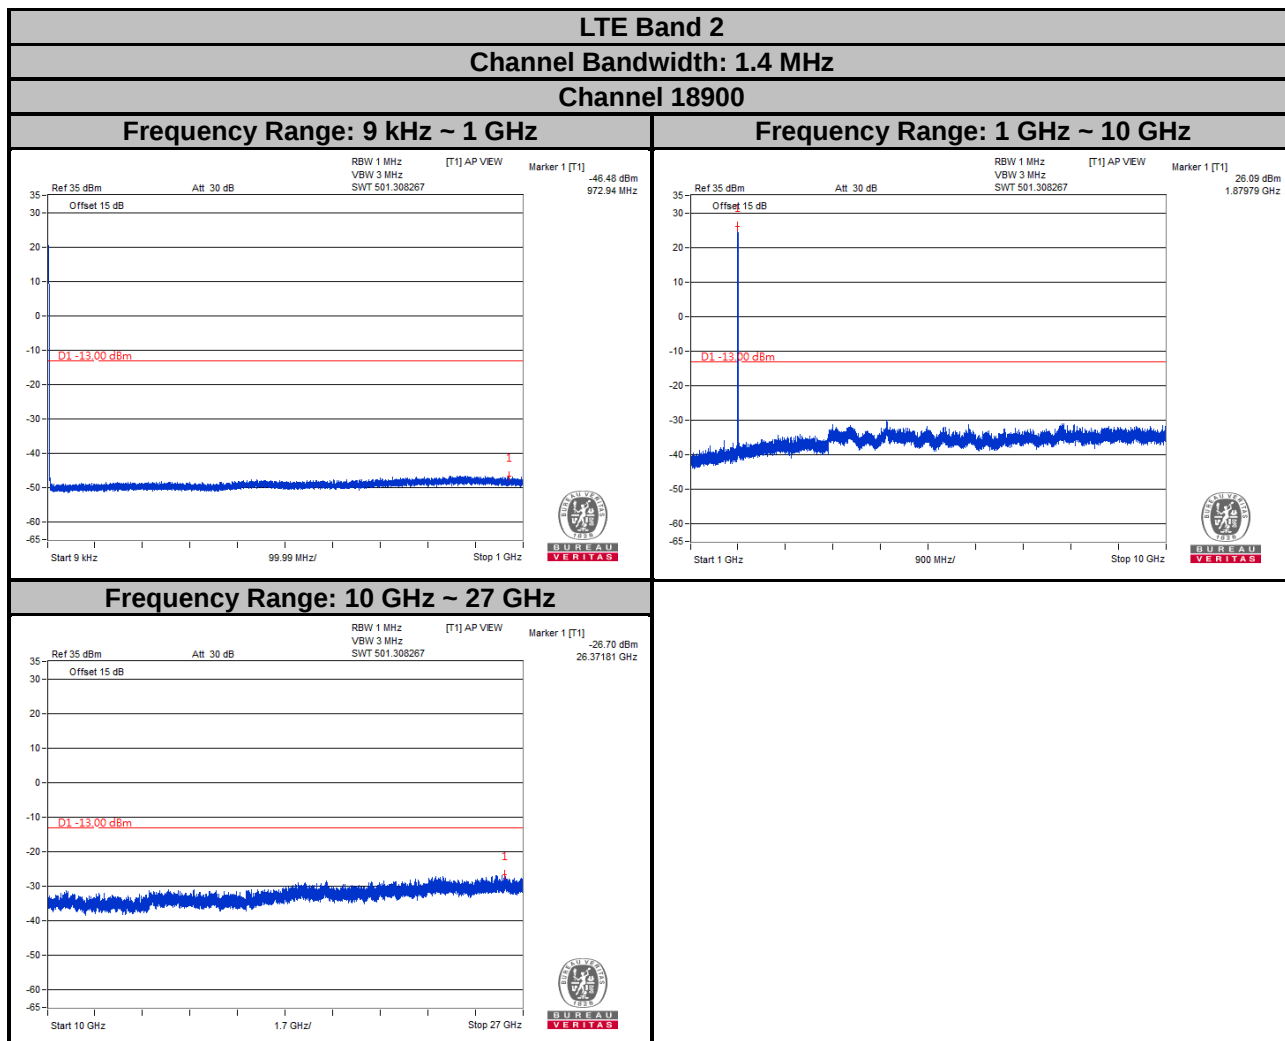

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

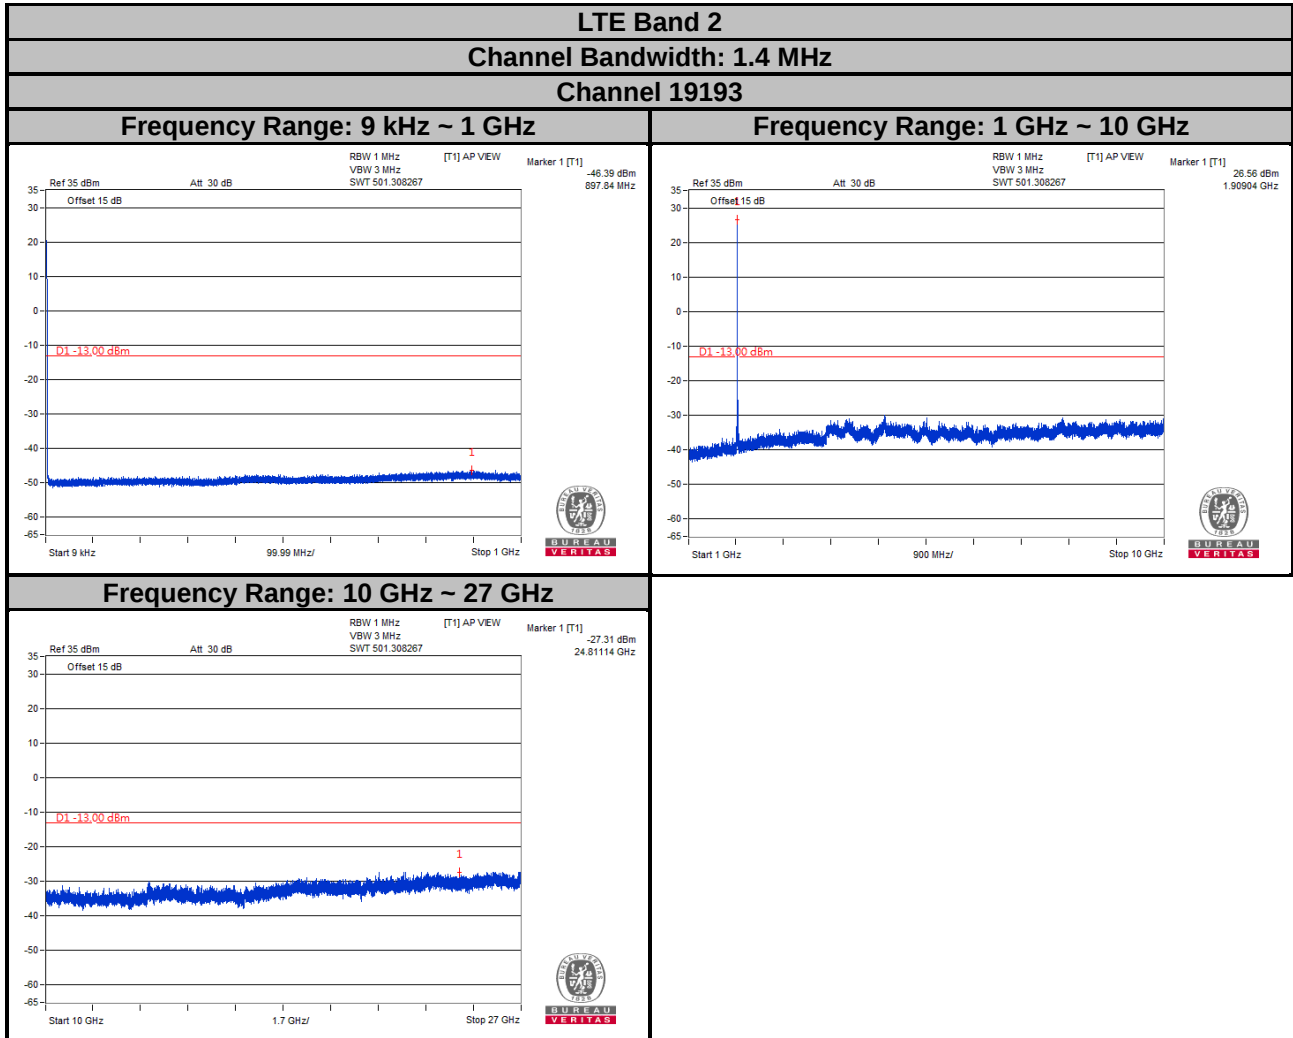


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

LTE Band 2


Channel Bandwidth: 3 MHz

Channel 18615


Frequency Range: 9 kHz ~ 1 GHz

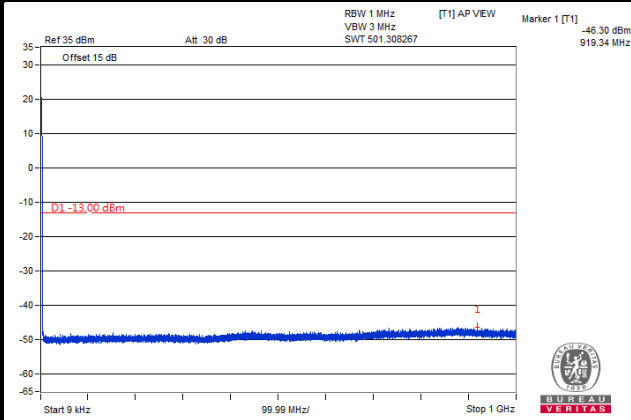

Frequency Range: 1 GHz ~ 10 GHz

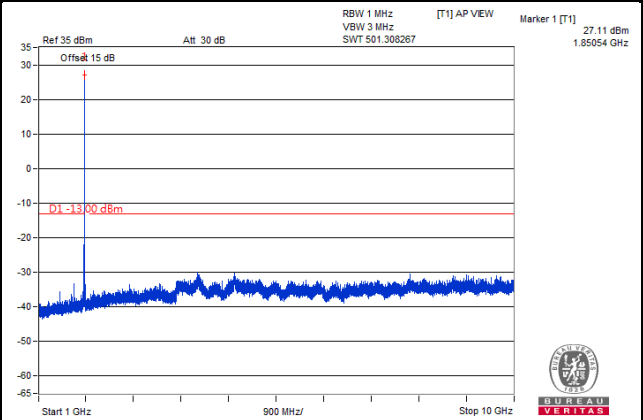

Frequency Range: 10 GHz ~ 27 GHz

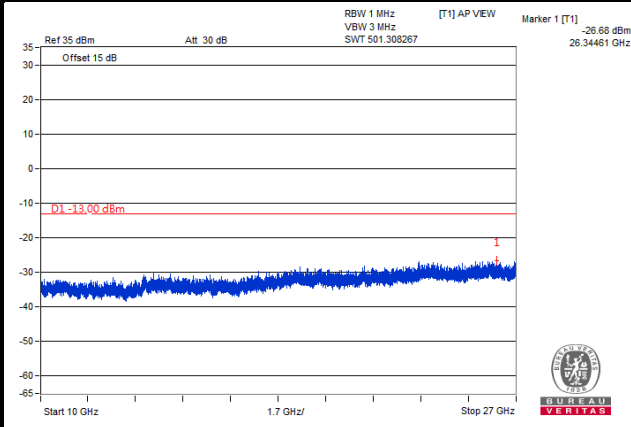


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

LTE Band 2


Channel Bandwidth: 3 MHz

Channel 18900


Frequency Range: 9 kHz ~ 1 GHz

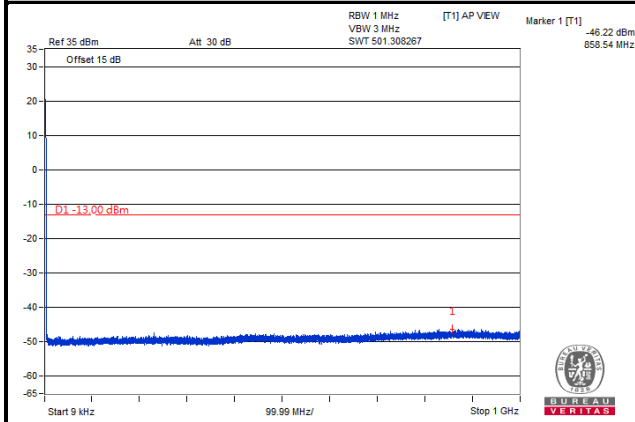

Frequency Range: 1 GHz ~ 10 GHz

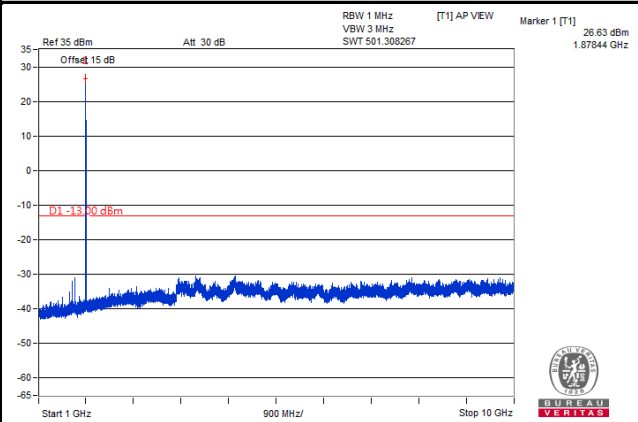

Frequency Range: 10 GHz ~ 27 GHz

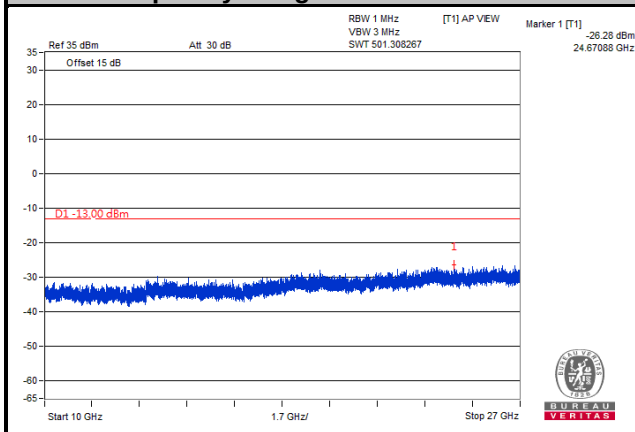


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

LTE Band 2


Channel Bandwidth: 3 MHz

Channel 19185


Frequency Range: 9 kHz ~ 1 GHz

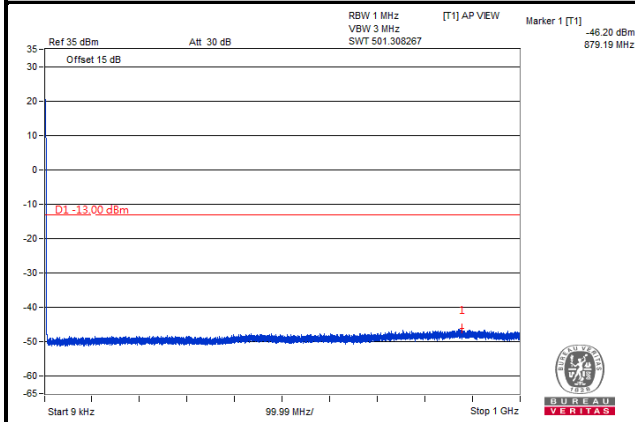


Frequency Range: 1 GHz ~ 10 GHz

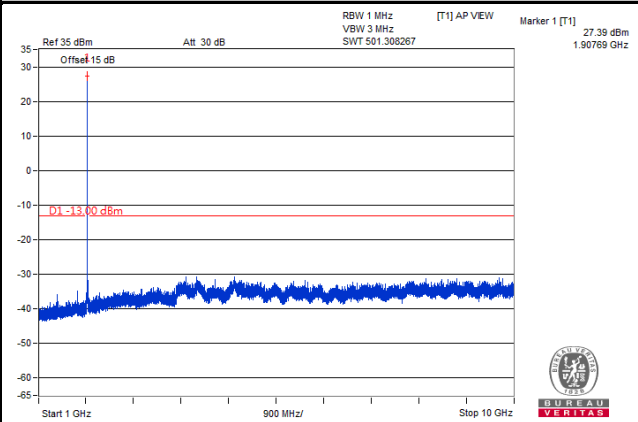


Frequency Range: 10 GHz ~ 27 GHz

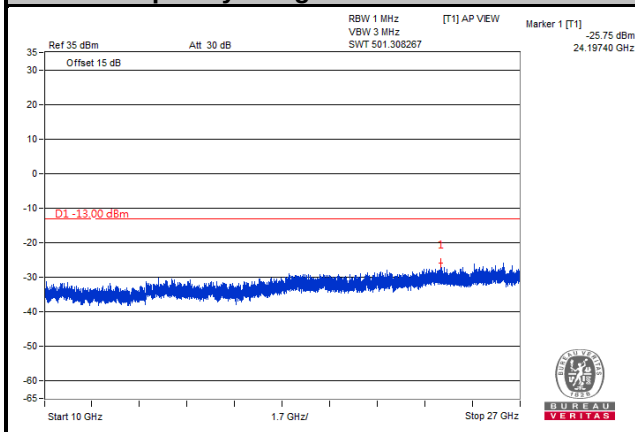


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

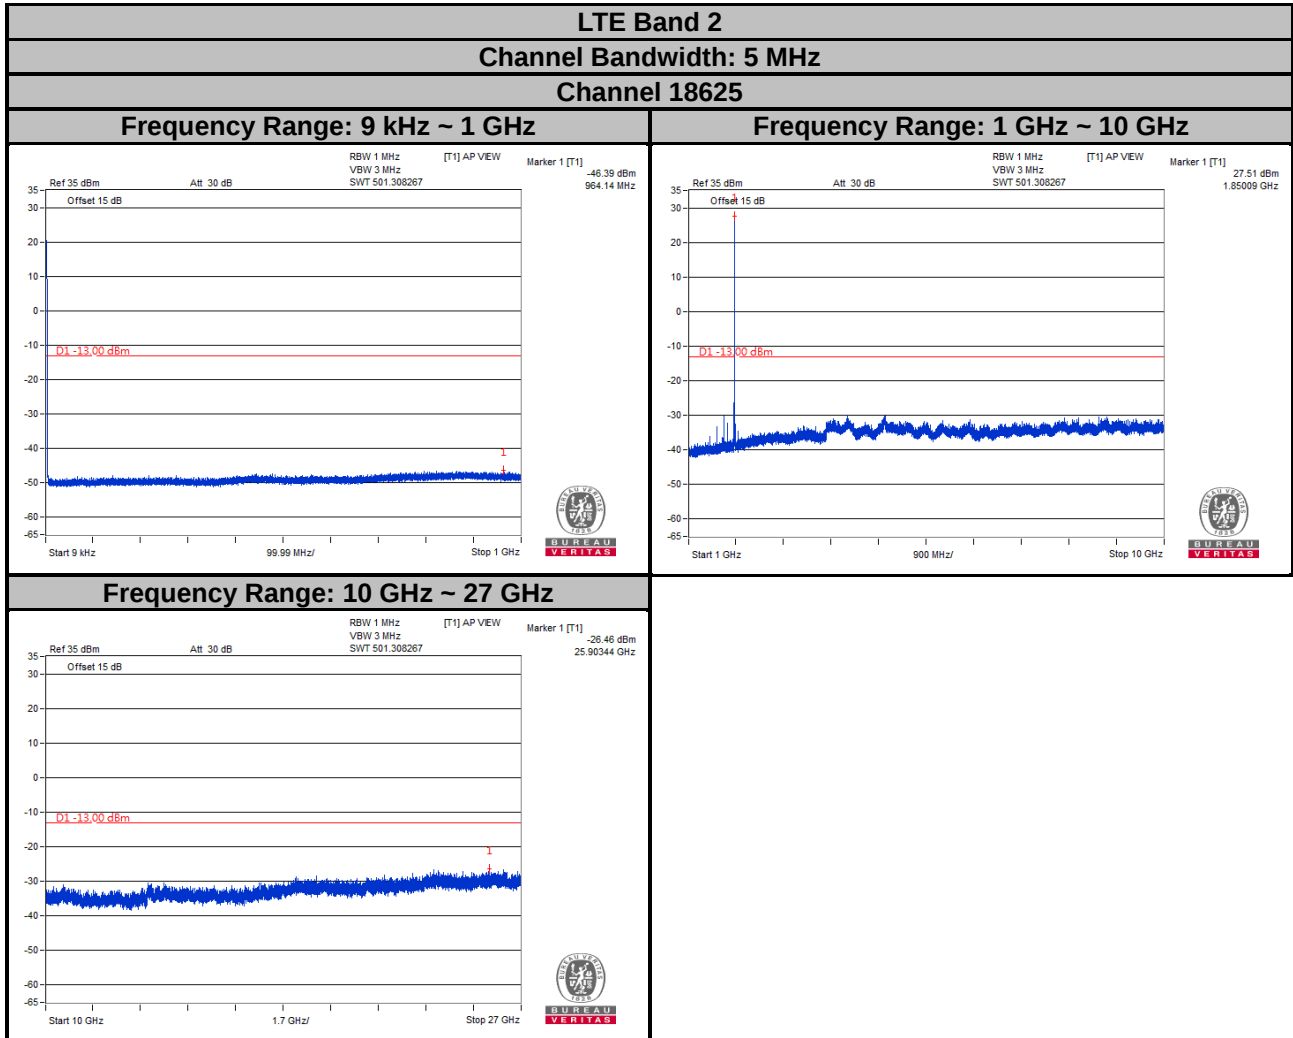


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

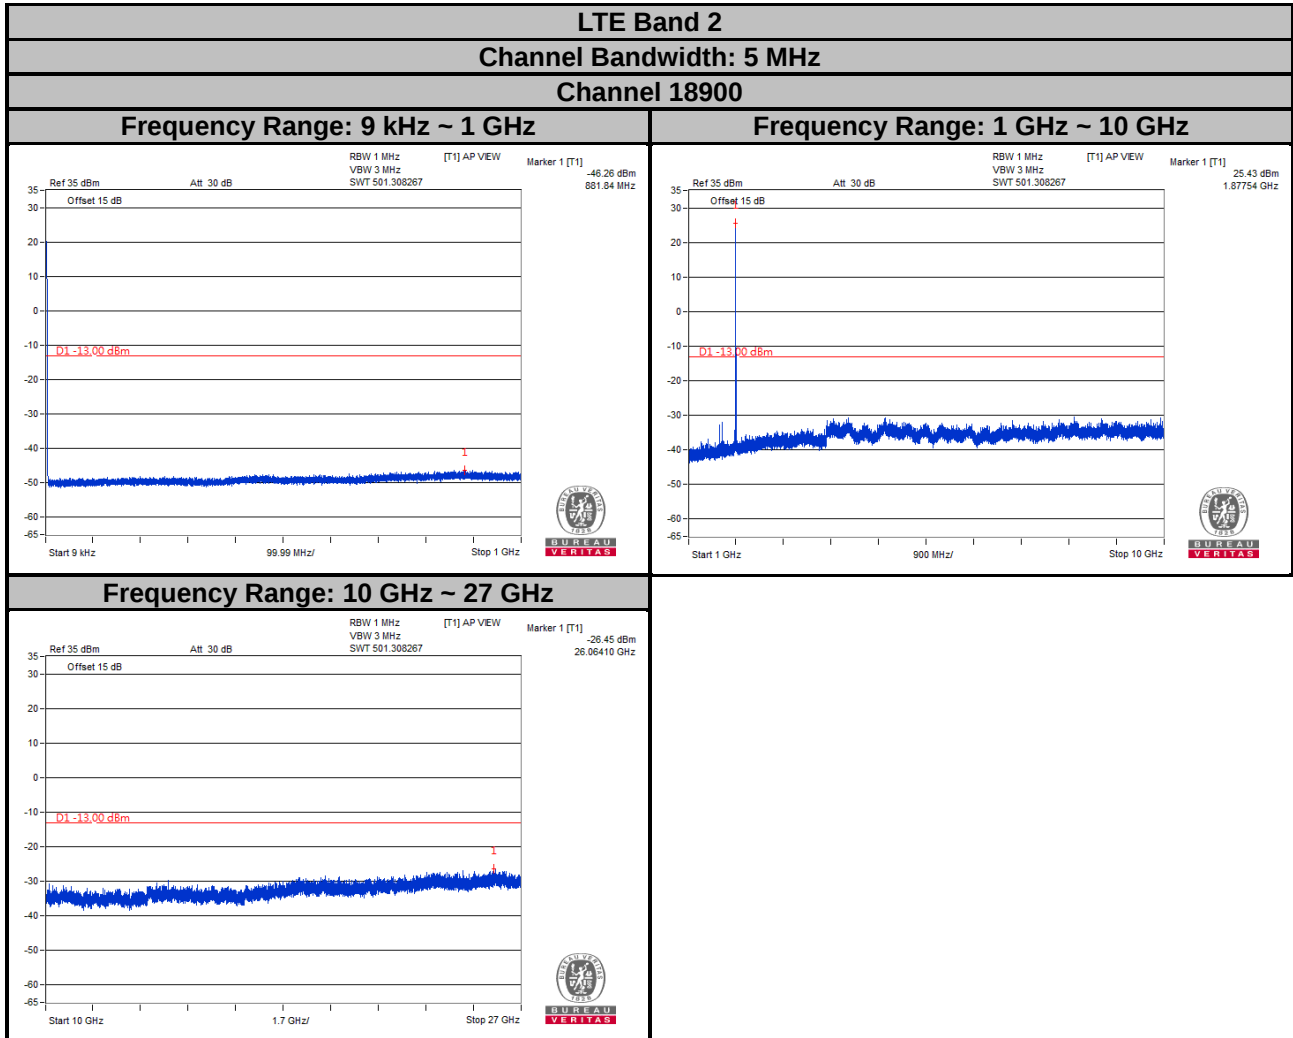

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

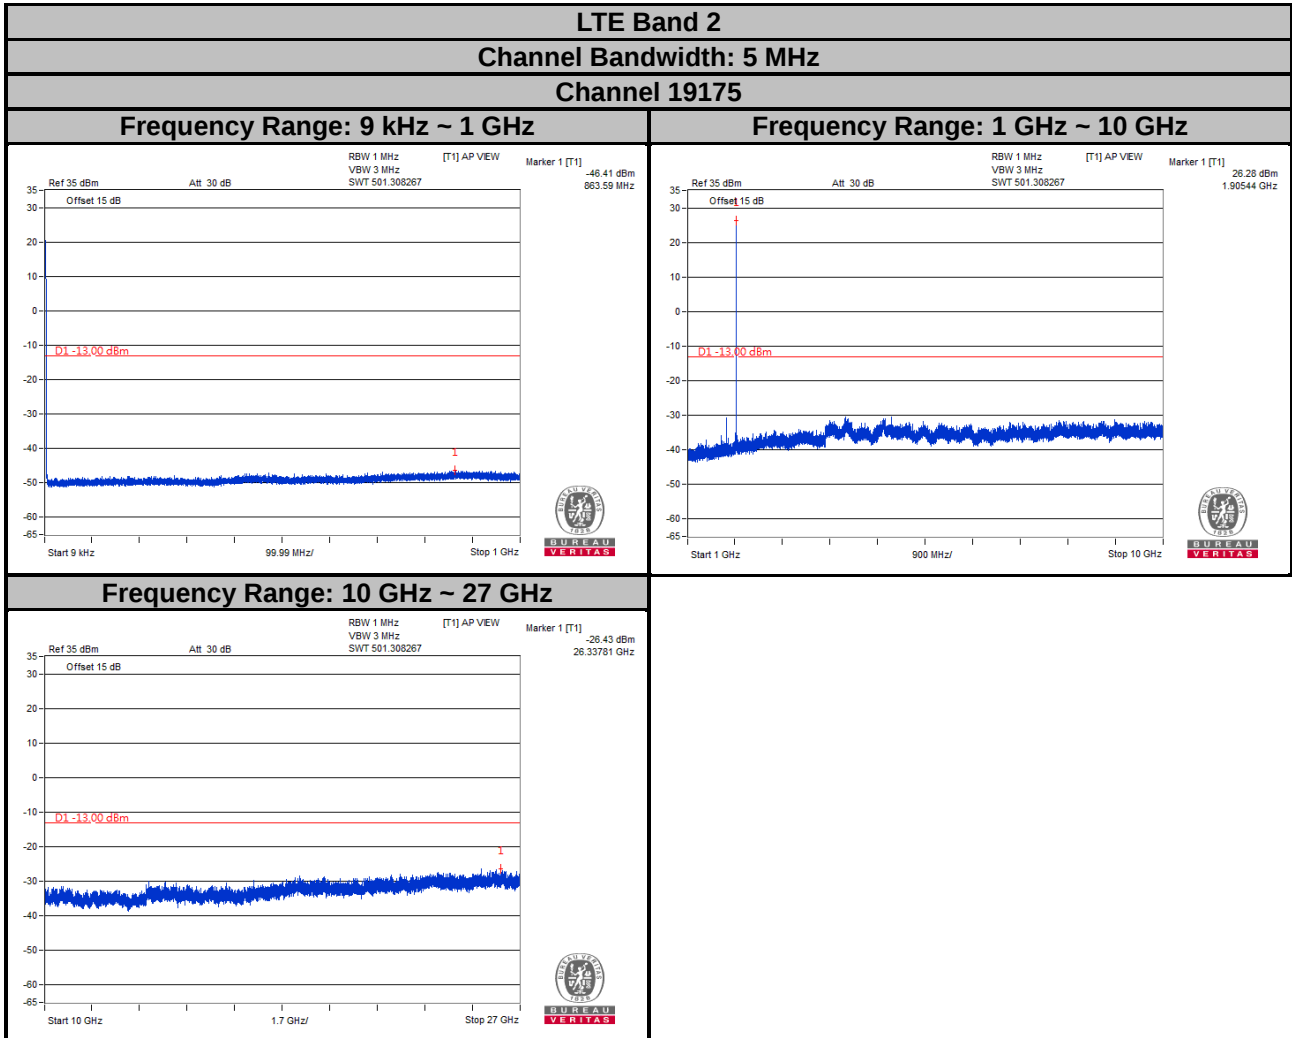

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

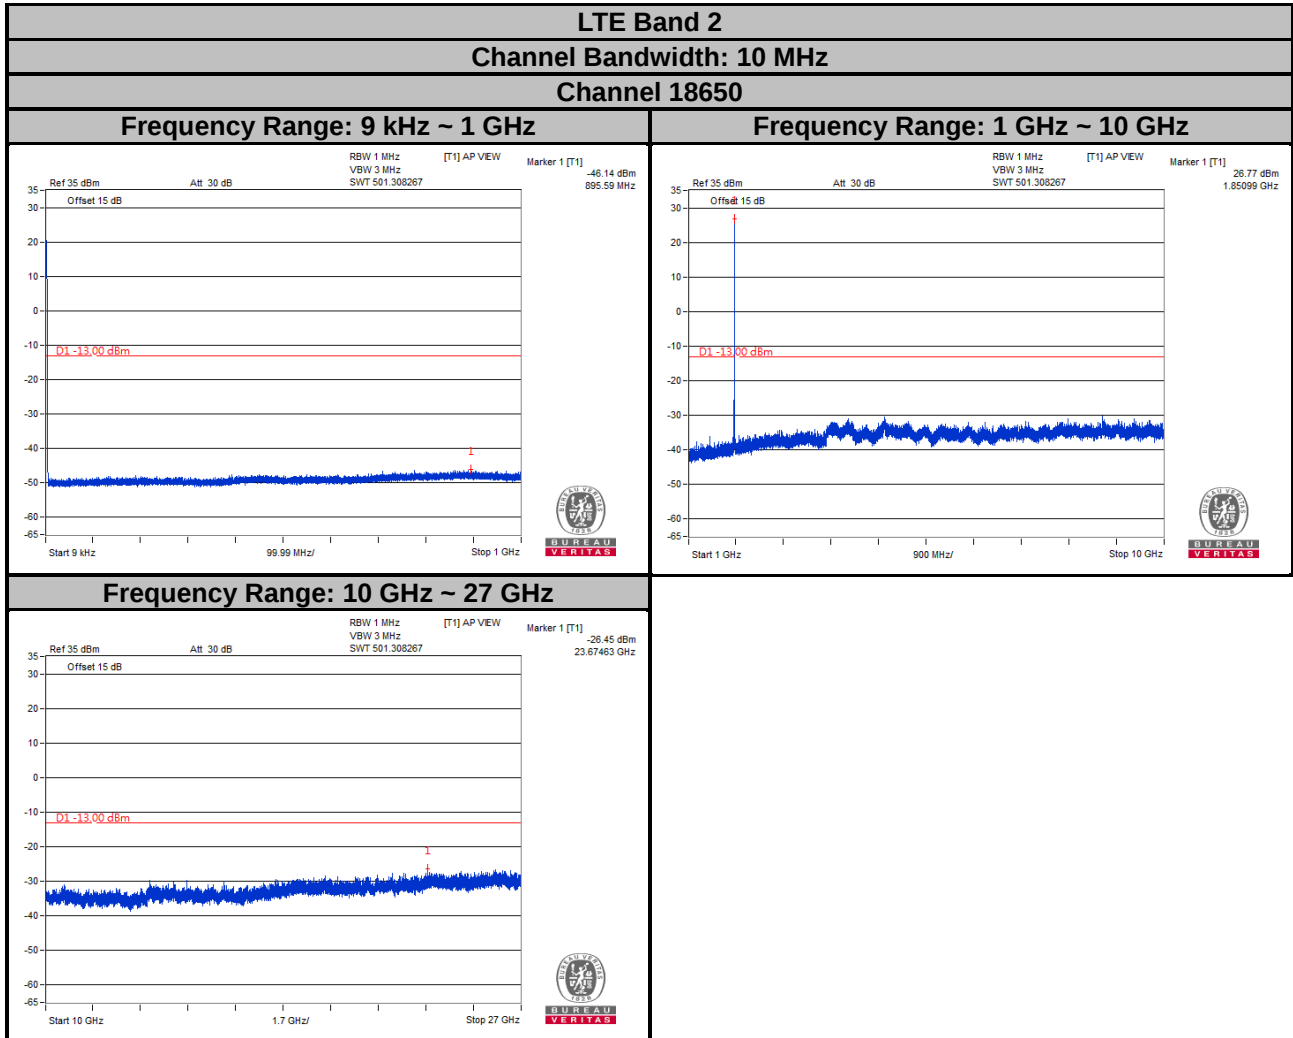


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

LTE Band 2


Channel Bandwidth: 10 MHz

Channel 18900


Frequency Range: 9 kHz ~ 1 GHz

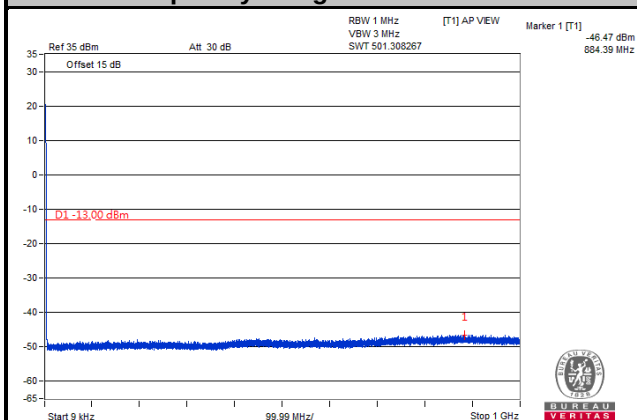


Frequency Range: 1 GHz ~ 10 GHz

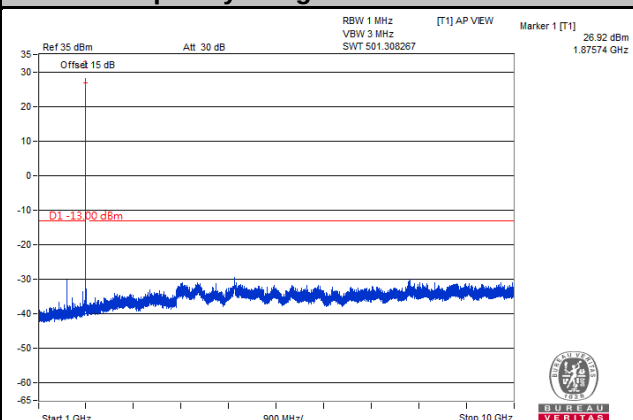


Frequency Range: 10 GHz ~ 27 GHz

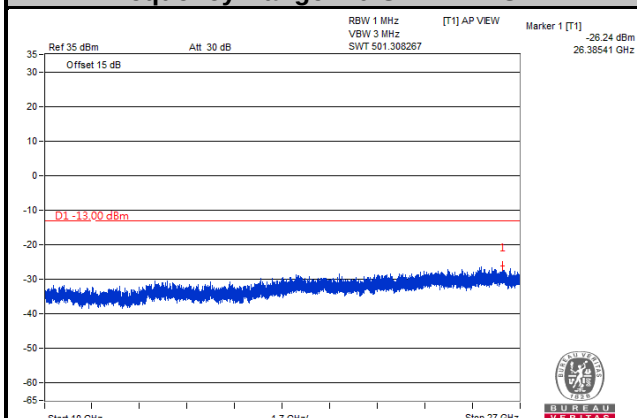

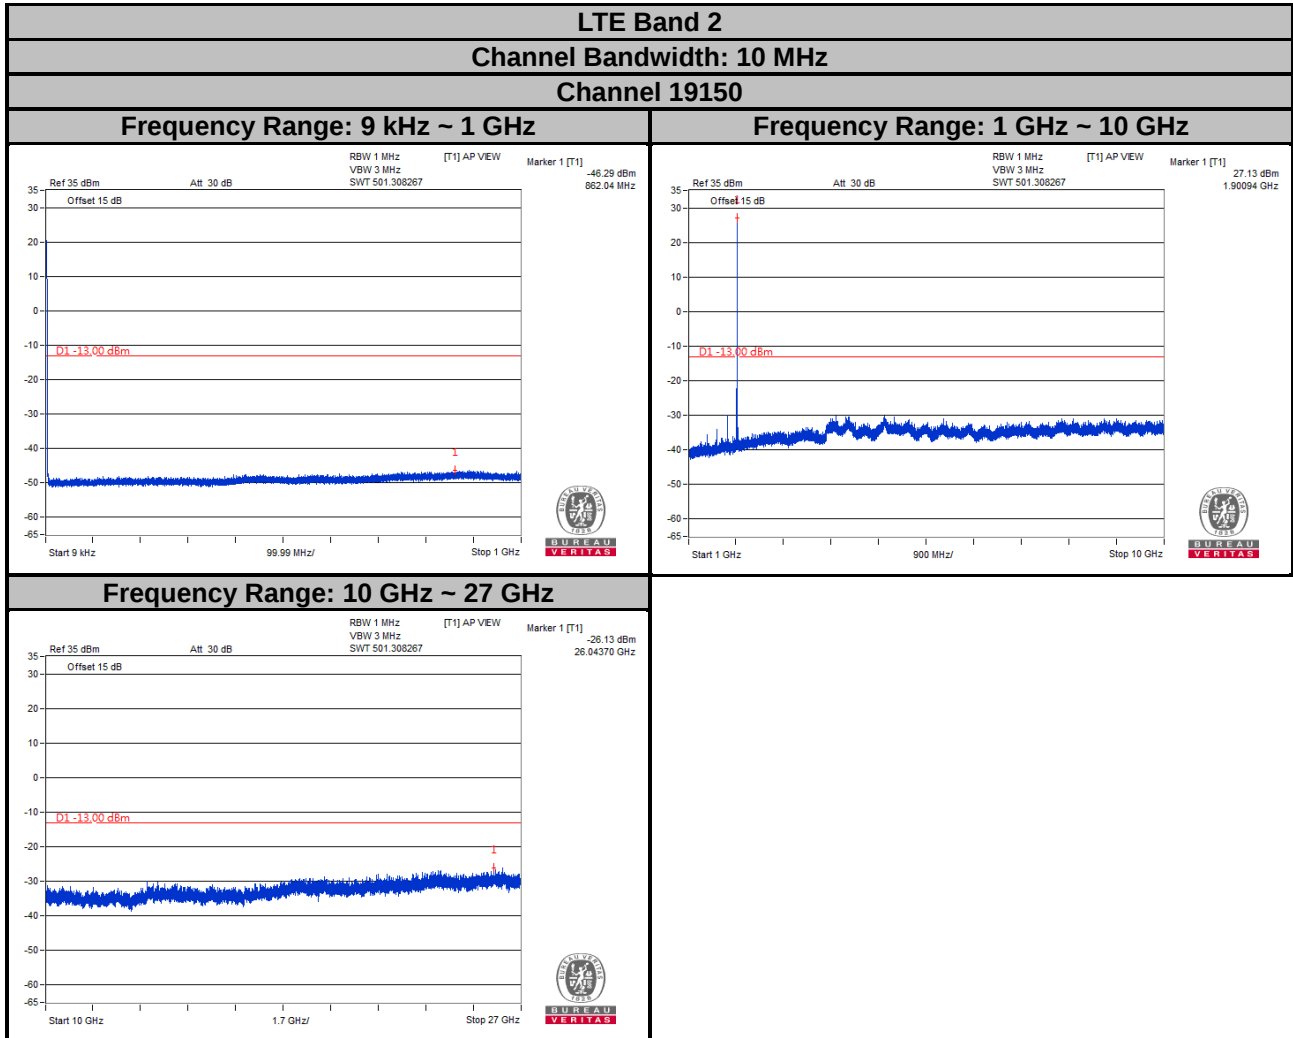

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

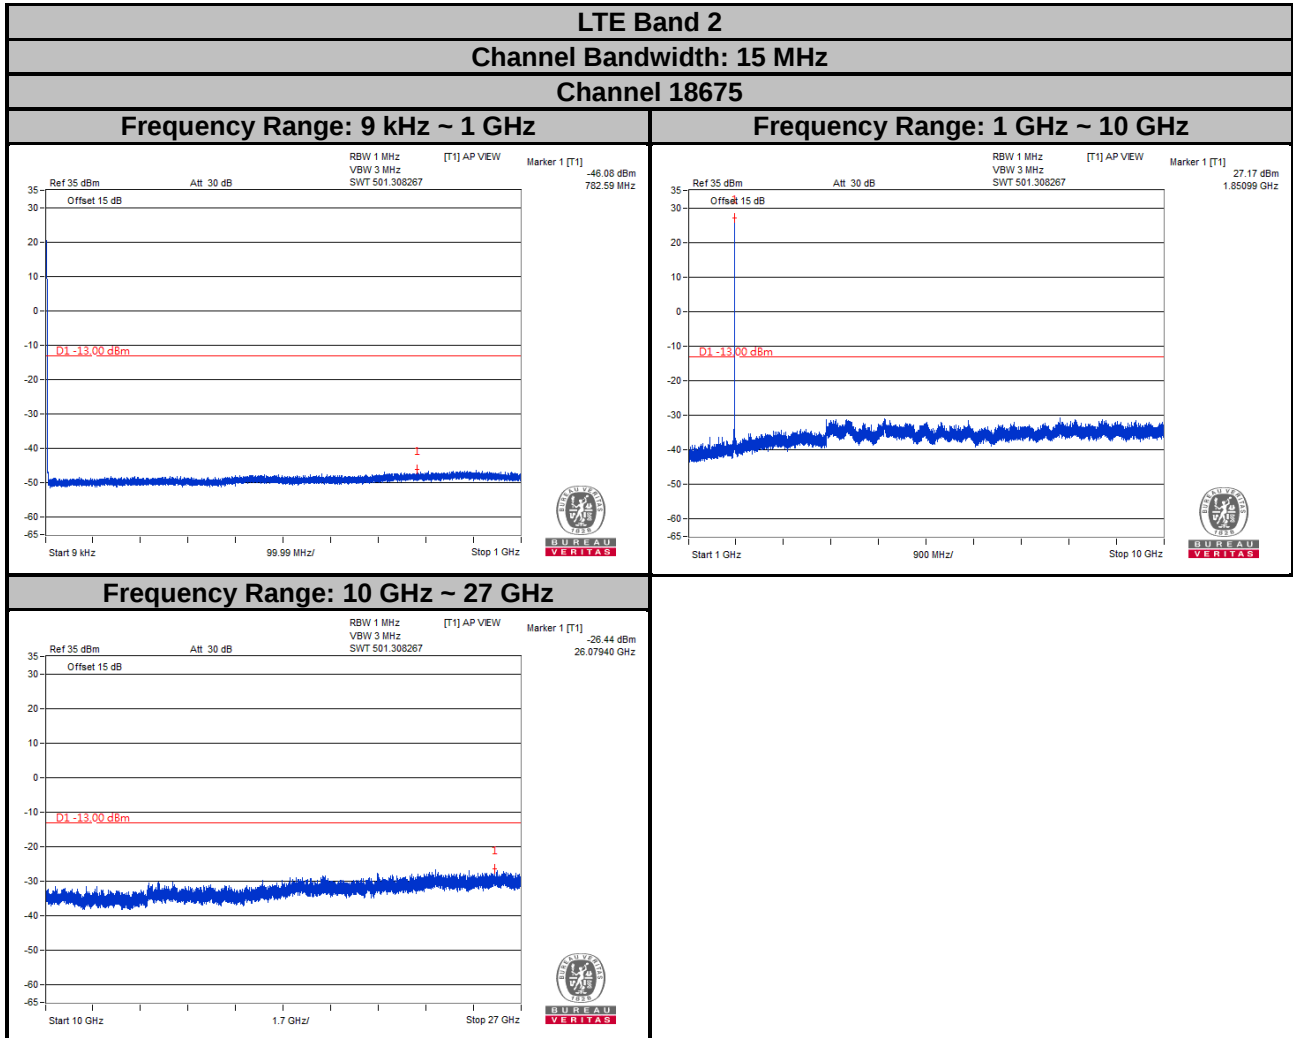


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

LTE Band 2


Channel Bandwidth: 15 MHz

Channel 18900


Frequency Range: 9 kHz ~ 1 GHz

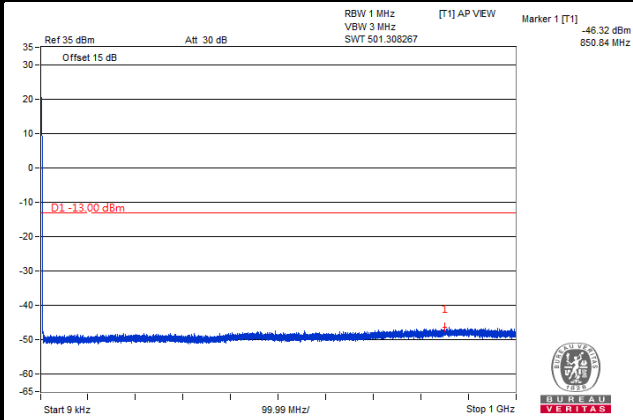


Frequency Range: 1 GHz ~ 10 GHz

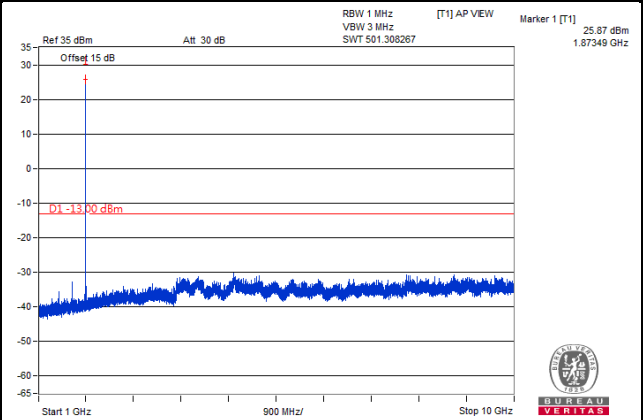


Frequency Range: 10 GHz ~ 27 GHz

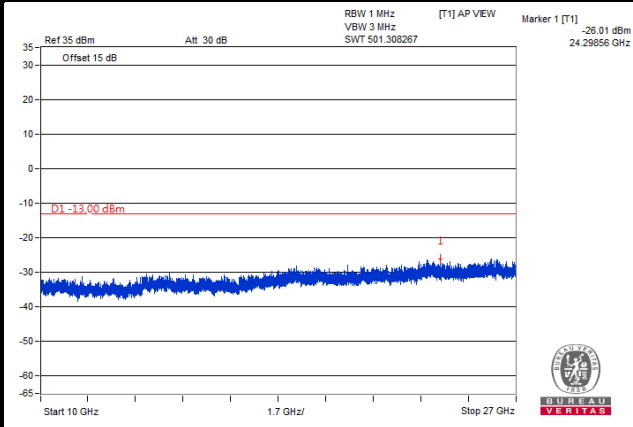

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

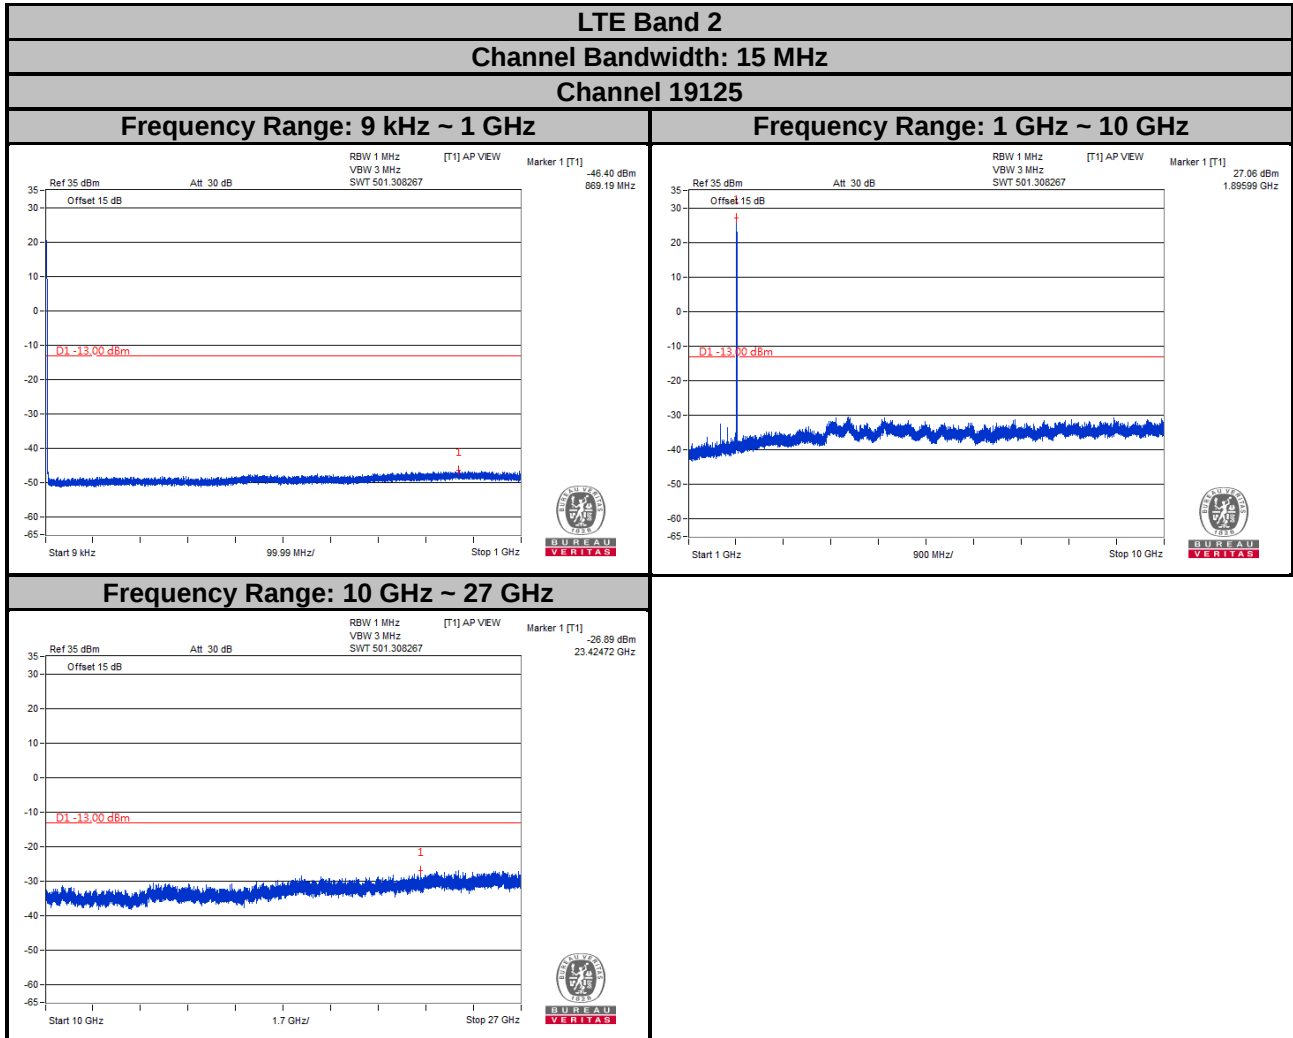

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

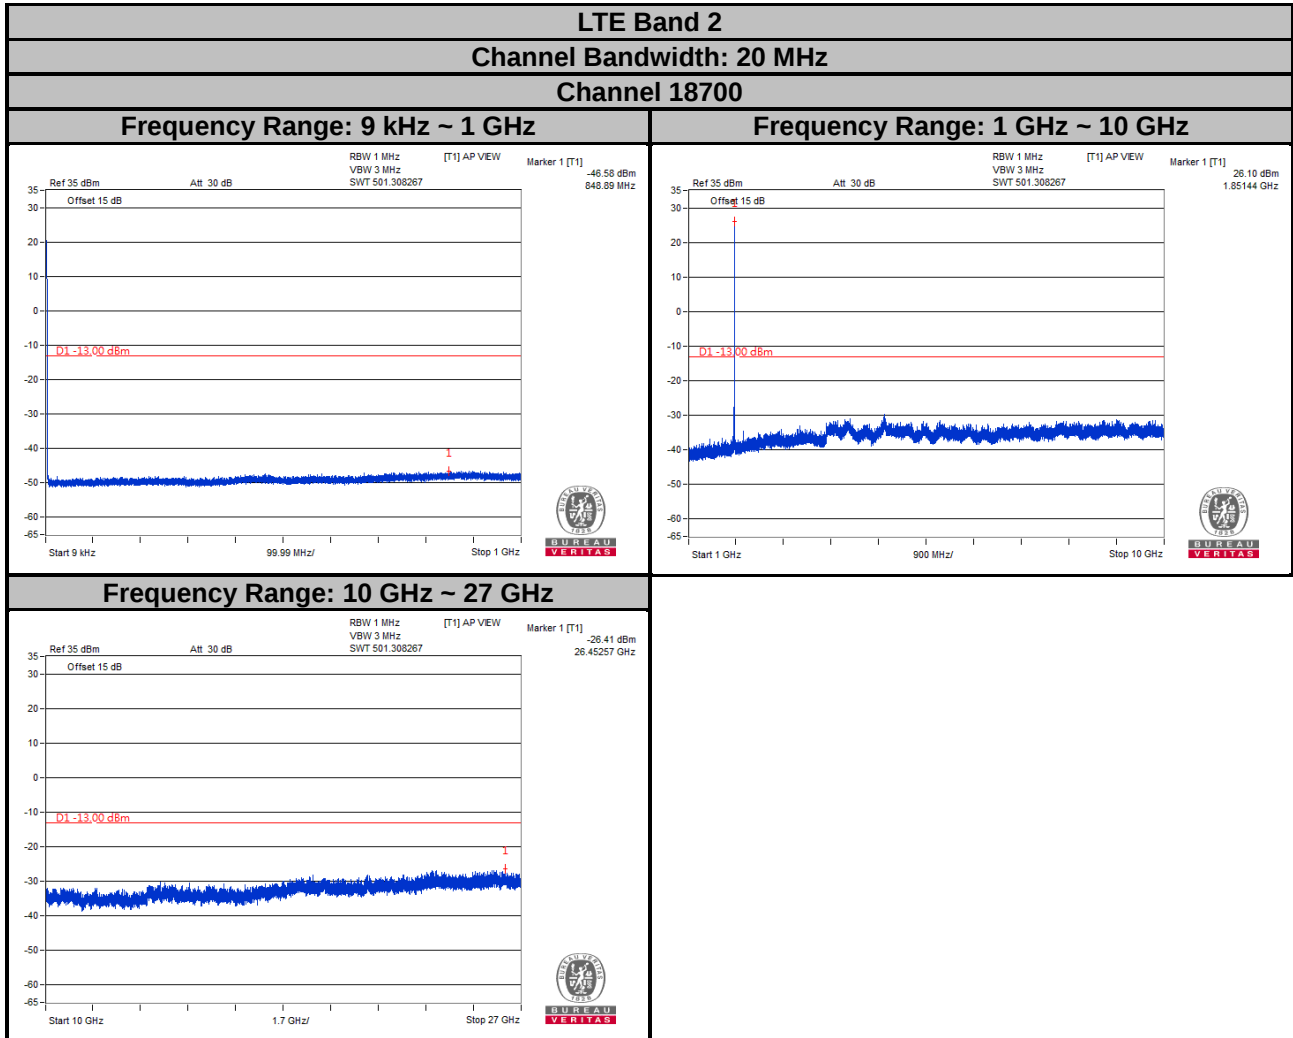


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

LTE Band 2


Channel Bandwidth: 20 MHz

Channel 18900


Frequency Range: 9 kHz ~ 1 GHz

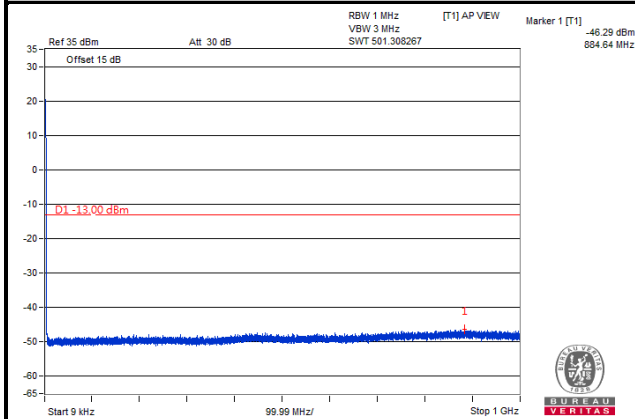

Frequency Range: 1 GHz ~ 10 GHz

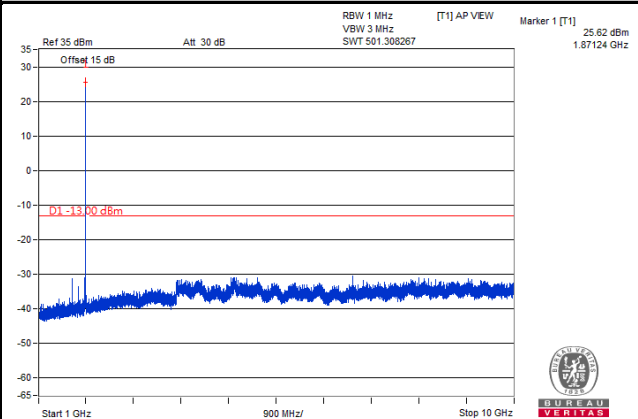

Frequency Range: 10 GHz ~ 27 GHz

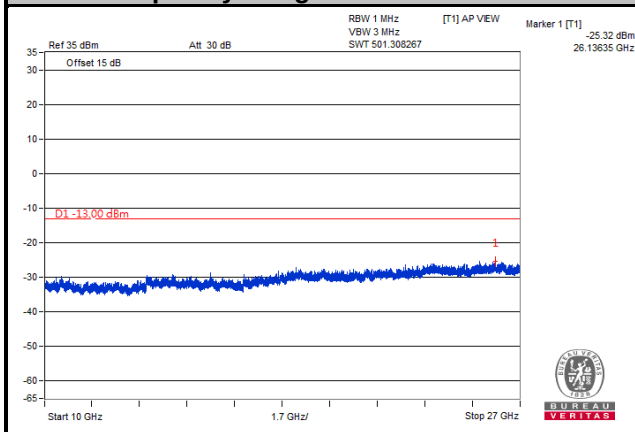


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

LTE Band 2


Channel Bandwidth: 20 MHz

Channel 19100


Frequency Range: 9 kHz ~ 1 GHz

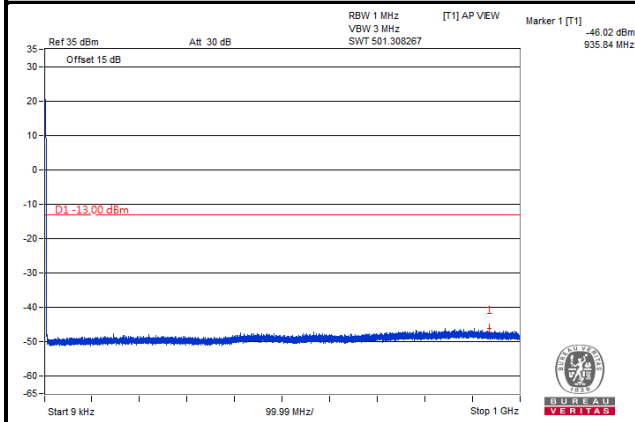

Frequency Range: 1 GHz ~ 10 GHz

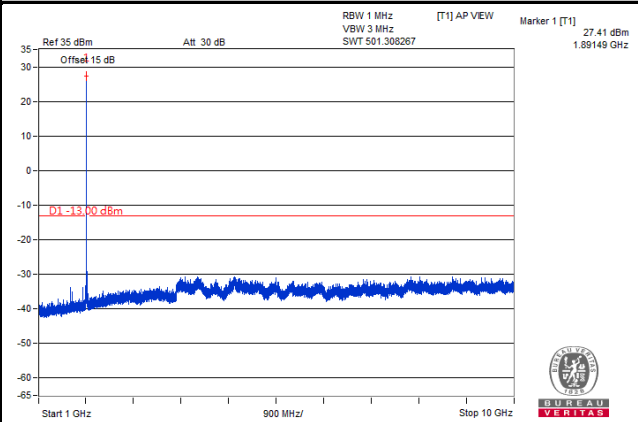

Frequency Range: 10 GHz ~ 27 GHz

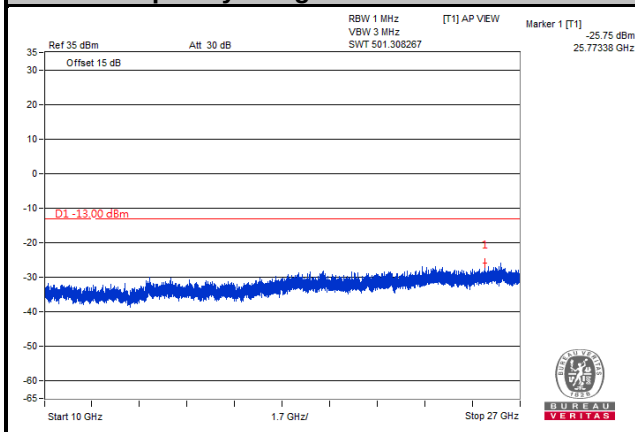

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

4.8 Radiated Emission Measurement

4.8.1 Limits of Radiated Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit is equal to -13 dBm.

4.8.2 Test Procedure

- Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G.
- $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}.$
- E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.R.P \text{ power} - 2.15 \text{ dB}.$


NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz.

4.8.3 Deviation from Test Standard


No deviation.

4.8.4 Test Setup

<Radiated Emission below or equal 1 GHz>

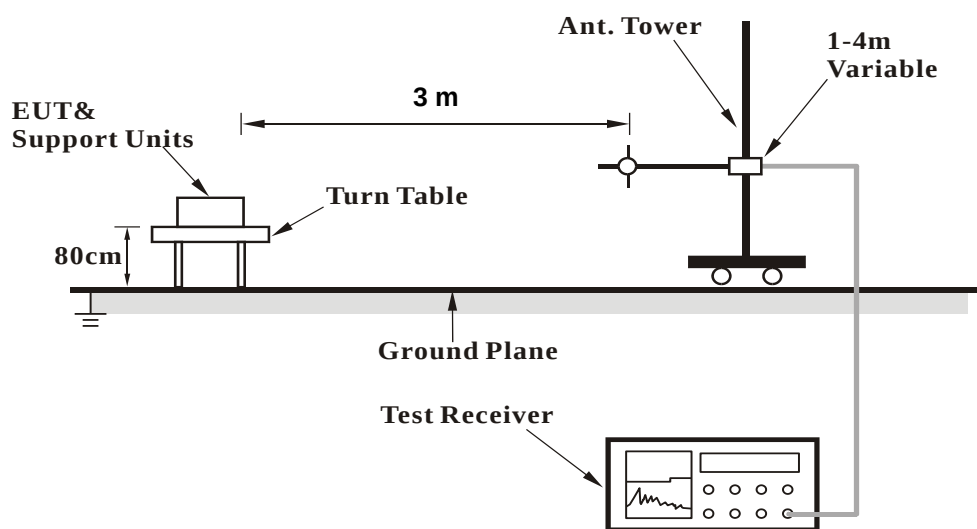

<Radiated Emission above 1 GHz>

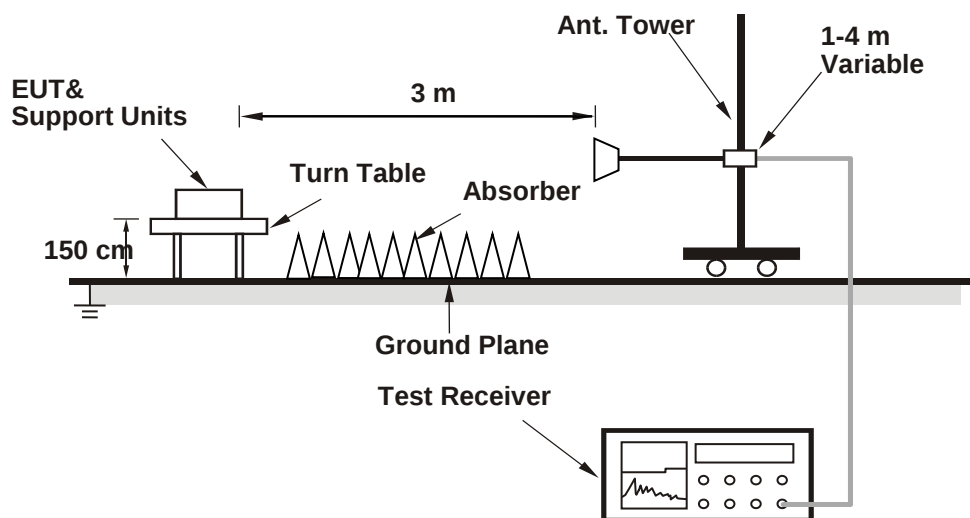

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.8.5 Test Results

LTE Band 2

Channel Bandwidth: 1.4 MHz / QPSK

Low Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 1

Date: 12-26-2018

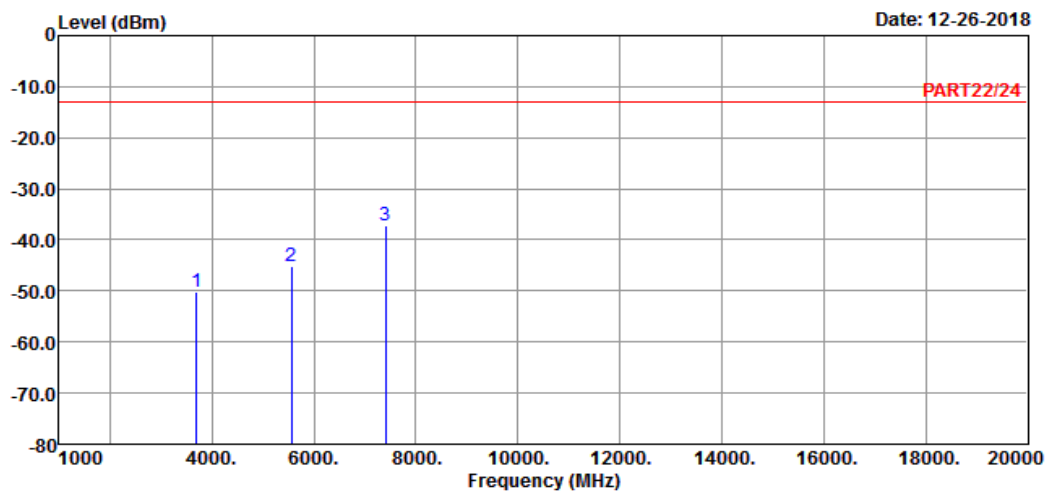

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : Cat-M1 Band 2 QPSK_1.4M Link_L-CH

Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3701.40	-50.04	-43.11	-13.00	-37.04	-6.93	Peak
2	5552.10	-45.11	-43.21	-13.00	-32.11	-1.90	Peak
3 pp	7402.80	-37.20	-41.31	-13.00	-24.20	4.11	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 2

Date: 12-26-2018

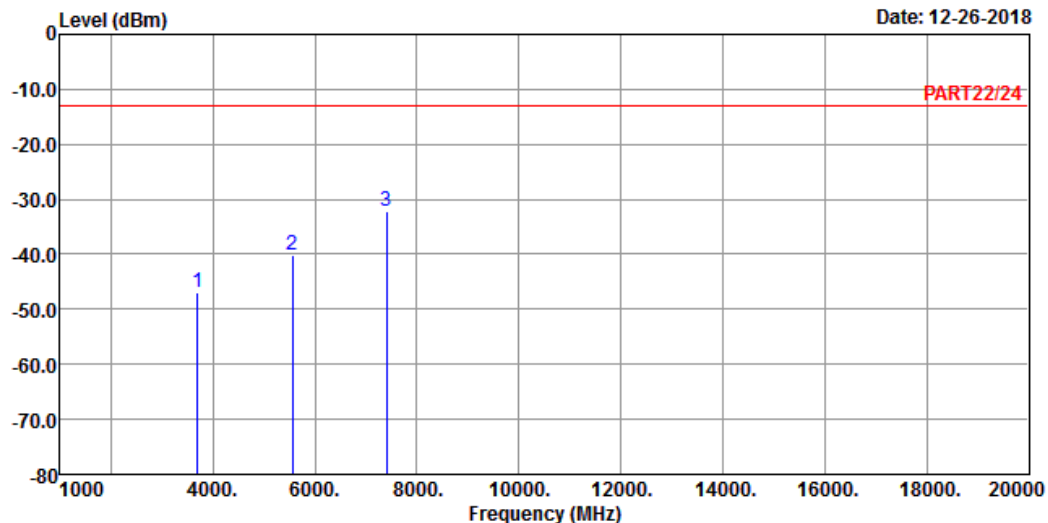

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : Cat-M1 Band 2 QPSK_1.4M Link_L-CH

Tested by: Thomas Wei

			Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark	
MHz	dBm	dBm	dBm	dB	dB		
1	3701.40	-46.91	-39.98	-13.00	-33.91	-6.93	Peak
2	5552.10	-40.13	-38.23	-13.00	-27.13	-1.90	Peak
3 pp	7402.80	-32.18	-36.29	-13.00	-19.18	4.11	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 1

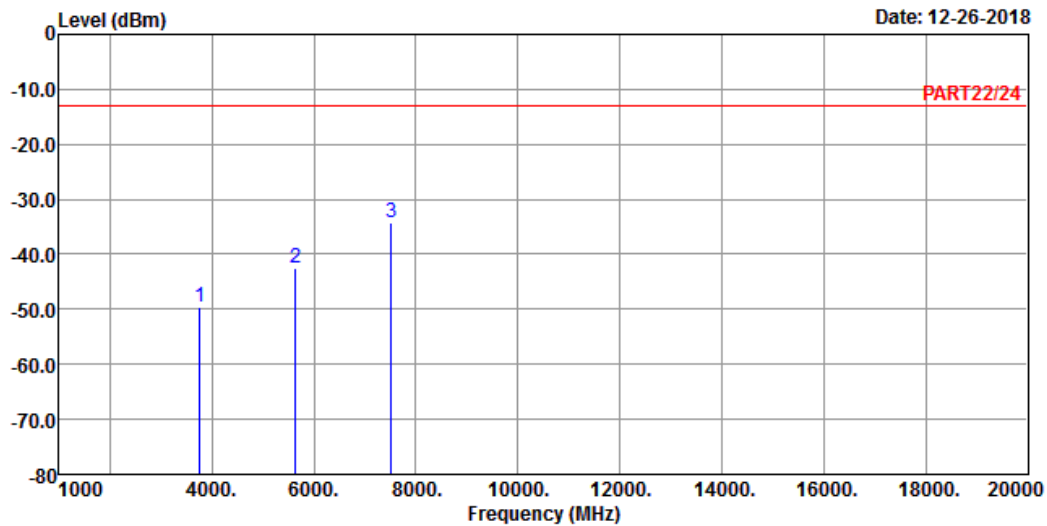

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : Cat-M1 Band 2 QPSK_1.4M Link_M-CH

Tested by: Thomas Wei

			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3760.00	-49.74	-43.09	-13.00	-36.74	-6.65	Peak
2	5640.00	-42.61	-40.75	-13.00	-29.61	-1.86	Peak
3 pp	7520.00	-34.36	-38.57	-13.00	-21.36	4.21	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 2

Date: 12-26-2018

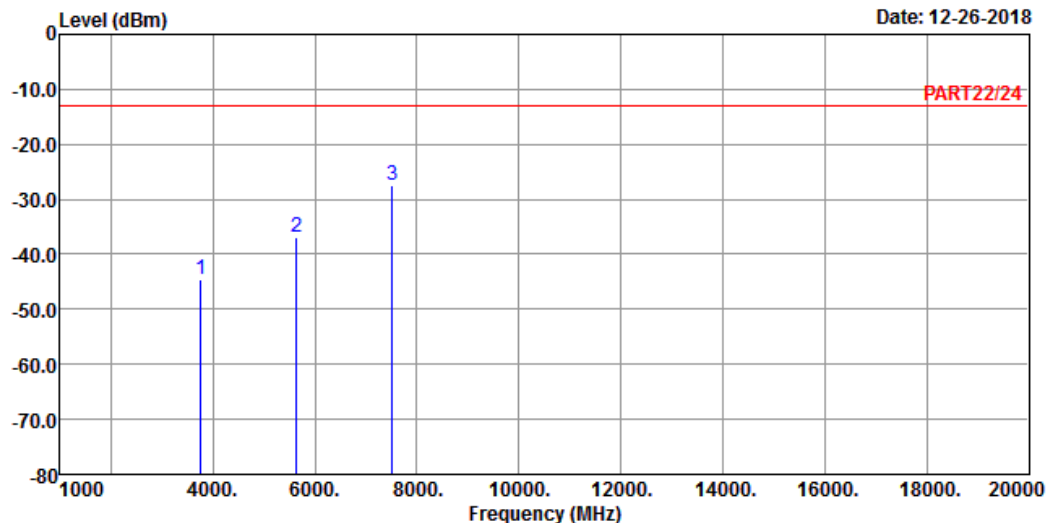

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : Cat-M1 Band 2 QPSK_1.4M Link_M-CH

Tested by: Thomas Wei

			Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark	
MHz	dBm	dBm	dBm	dB	dB		
1	3760.00	-44.64	-37.99	-13.00	-31.64	-6.65	Peak
2	5640.00	-36.81	-34.95	-13.00	-23.81	-1.86	Peak
3 pp	7520.00	-27.37	-31.58	-13.00	-14.37	4.21	Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 12-26-2018

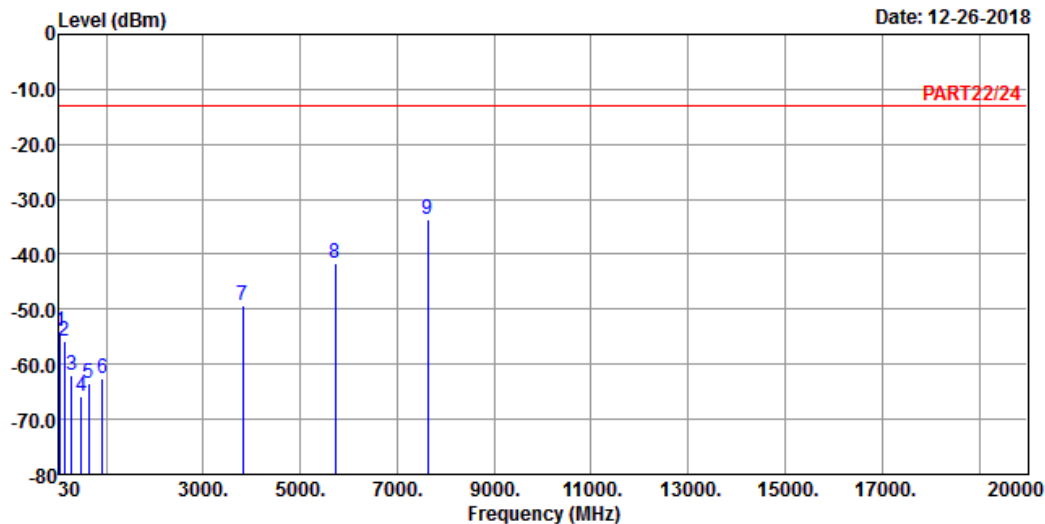

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : Cat-M1 Band 2 QPSK_1.4M Link_H-CH

Tested by: Thomas Wei

			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	44.55	-54.07	-52.08	-13.00	-41.07	-1.99	Peak
2	129.91	-55.73	-47.04	-13.00	-42.73	-8.69	Peak
3	278.32	-62.10	-55.53	-13.00	-49.10	-6.57	Peak
4	481.05	-65.74	-60.77	-13.00	-52.74	-4.97	Peak
5	643.04	-63.52	-62.65	-13.00	-50.52	-0.87	Peak
6	929.19	-62.59	-63.88	-13.00	-49.59	1.29	Peak
7	3818.60	-49.44	-43.04	-13.00	-36.44	-6.40	Peak
8	5727.90	-41.66	-40.01	-13.00	-28.66	-1.65	Peak
9 pp	7637.20	-33.79	-38.34	-13.00	-20.79	4.55	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

Date: 12-26-2018

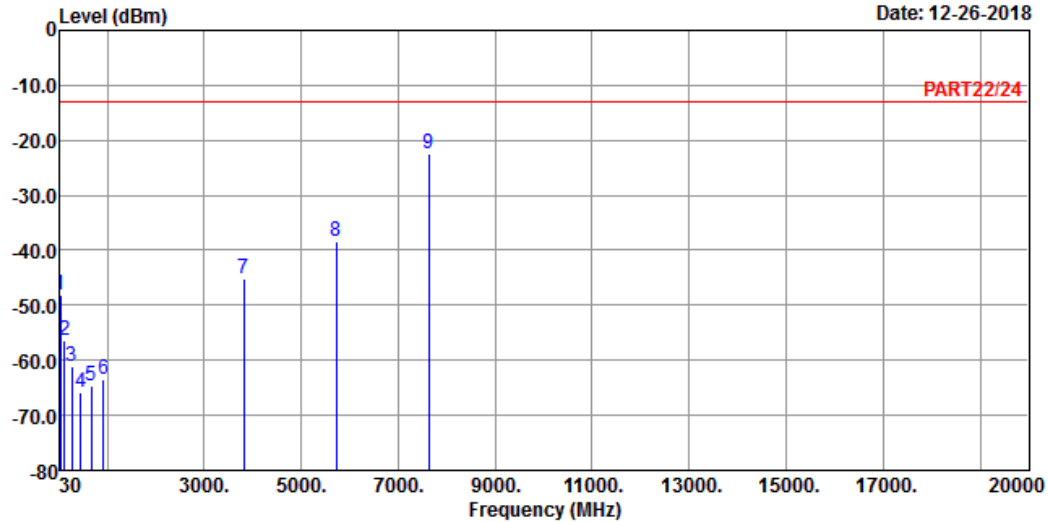

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : Cat-M1 Band 2 QPSK_1.4M Link_H-CH

Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	41.64	-48.04	-47.63	-13.00	-35.04	-0.41	Peak
2	117.30	-56.33	-46.35	-13.00	-43.33	-9.98	Peak
3	273.47	-61.23	-54.76	-13.00	-48.23	-6.47	Peak
4	457.77	-65.82	-60.41	-13.00	-52.82	-5.41	Peak
5	678.93	-64.67	-64.24	-13.00	-51.67	-0.43	Peak
6	927.25	-63.42	-64.67	-13.00	-50.42	1.25	Peak
7	3818.60	-45.02	-38.62	-13.00	-32.02	-6.40	Peak
8	5727.90	-38.49	-36.84	-13.00	-25.49	-1.65	Peak
9 pp	7637.20	-22.54	-27.09	-13.00	-9.54	4.55	Peak


Channel Bandwidth: 5 MHz / QPSK
Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 1

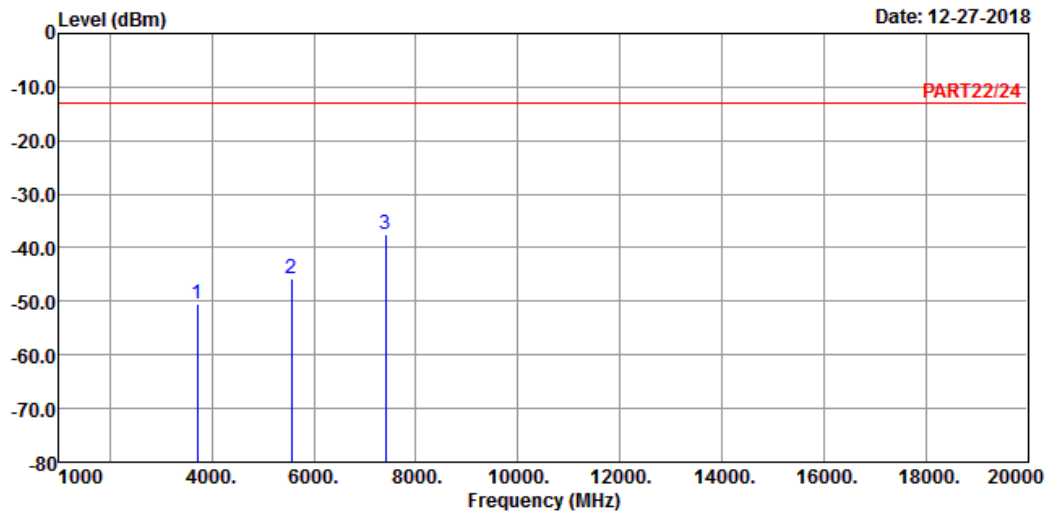

Site : 966 Chamber 5
Condition: PART22/24 HORIZONTAL
Remak : Cat-M1 Band 2 QPSK_5M Link_L-CH
Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3705.00	-50.38	-43.45	-13.00	-37.38	-6.93	Peak
2	5557.50	-45.62	-43.71	-13.00	-32.62	-1.91	Peak
3 pp	7410.00	-37.49	-41.62	-13.00	-24.49	4.13	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 2

Date: 12-27-2018

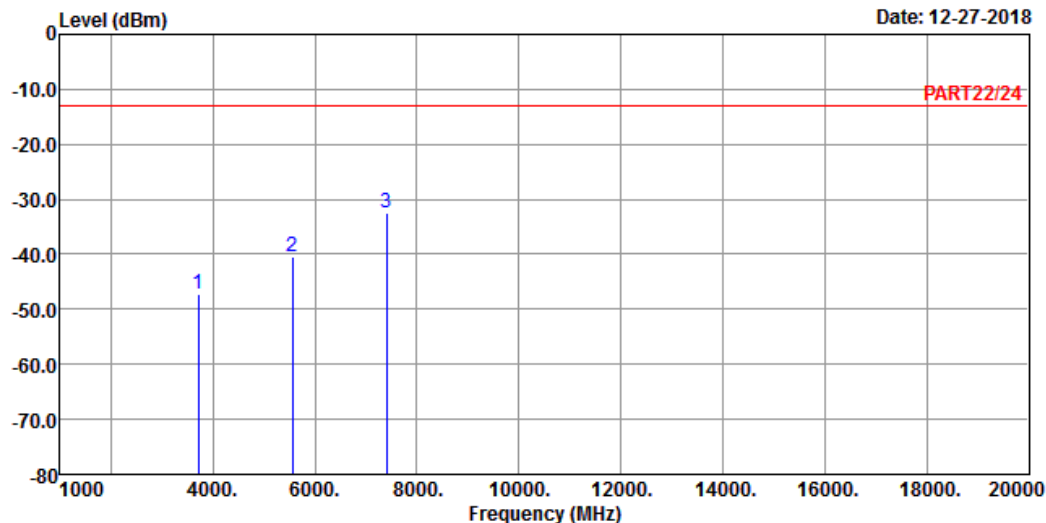

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : Cat-M1 Band 2 QPSK_5M Link_L-CH

Tested by: Thomas Wei

			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3705.00	-47.31	-40.38	-13.00	-34.31	-6.93	Peak
2	5557.50	-40.46	-38.55	-13.00	-27.46	-1.91	Peak
3 pp	7410.00	-32.56	-36.69	-13.00	-19.56	4.13	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 1

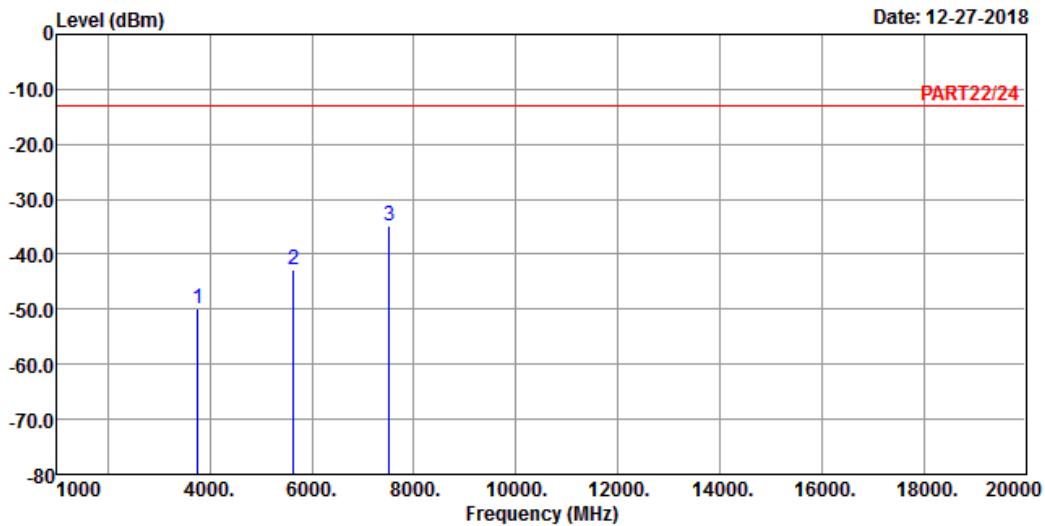

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : Cat-M1 Band 2 QPSK_5M Link_M-CH

Tested by: Thomas Wei

			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3760.00	-49.91	-43.26	-13.00	-36.91	-6.65	Peak
2	5640.00	-42.92	-41.06	-13.00	-29.92	-1.86	Peak
3 pp	7520.00	-34.84	-39.05	-13.00	-21.84	4.21	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 2

Date: 12-27-2018

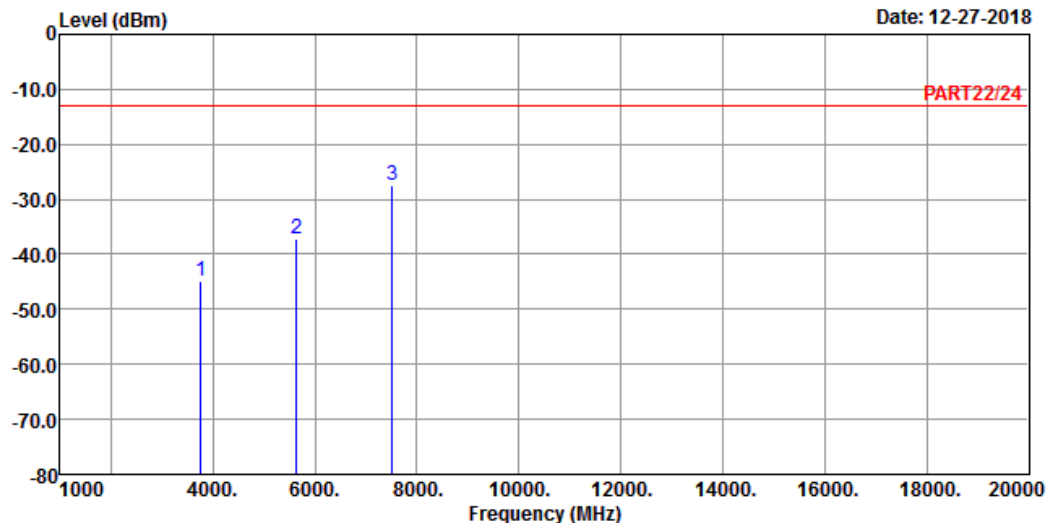

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : Cat-M1 Band 2 QPSK_5M Link_M-CH

Tested by: Thomas Wei

			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3760.00	-44.93	-38.28	-13.00	-31.93	-6.65	Peak
2	5640.00	-37.12	-35.26	-13.00	-24.12	-1.86	Peak
3 pp	7520.00	-27.54	-31.75	-13.00	-14.54	4.21	Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 1

Date: 12-27-2018

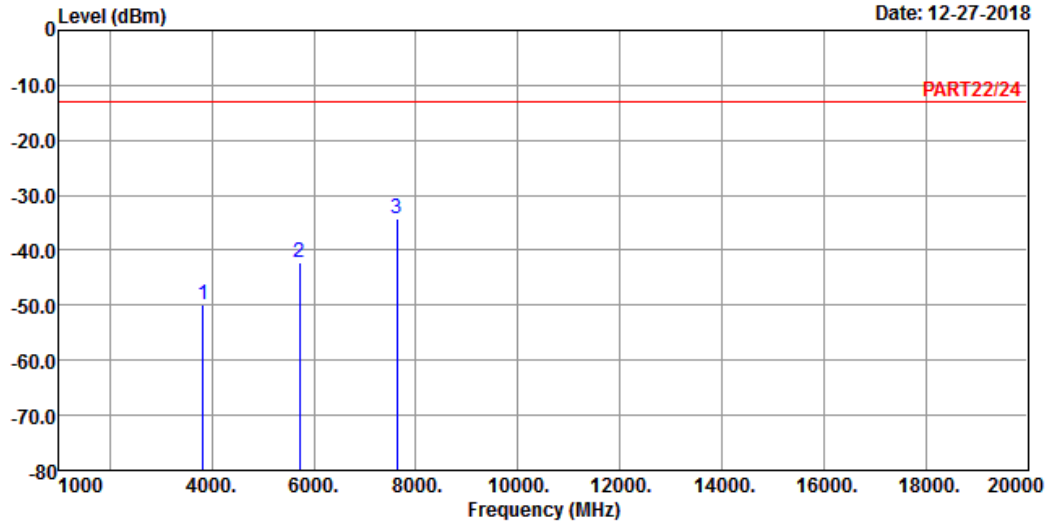

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : Cat-M1 Band 2 QPSK_5M Link_H-CH

Tested by: Thomas Wei

			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3815.00	-49.81	-43.41	-13.00	-36.81	-6.40	Peak
2	5722.50	-42.14	-40.45	-13.00	-29.14	-1.69	Peak
3 pp	7630.00	-34.23	-38.74	-13.00	-21.23	4.51	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 2

Date: 12-27-2018

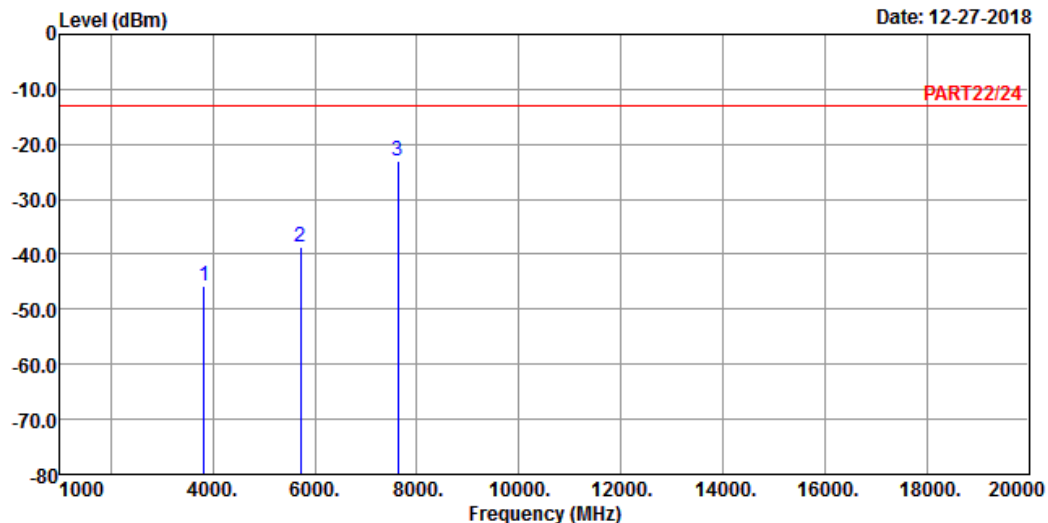

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : Cat-M1 Band 2 QPSK_5M Link_H-CH

Tested by: Thomas Wei

			Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark	
MHz	dBm	dBm	dBm	dB	dB		
1	3815.00	-45.89	-39.49	-13.00	-32.89	-6.40	Peak
2	5722.50	-38.65	-36.96	-13.00	-25.65	-1.69	Peak
3 pp	7630.00	-23.02	-27.53	-13.00	-10.02	4.51	Peak


Channel Bandwidth: 20 MHz / QPSK
Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 1

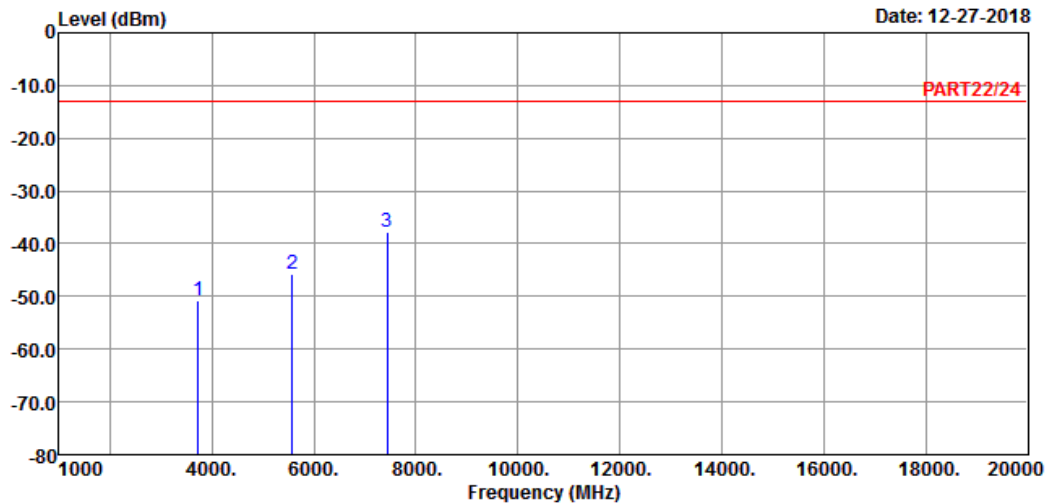

Site : 966 Chamber 5
Condition: PART22/24 HORIZONTAL
Remak : Cat-M1 Band 2 QPSK_20M Link_L-CH
Tested by: Thomas Wei

			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3720.00	-50.77	-43.95	-13.00	-37.77	-6.82	Peak
2	5580.00	-45.90	-43.98	-13.00	-32.90	-1.92	Peak
3 pp	7440.00	-37.78	-41.93	-13.00	-24.78	4.15	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 2

Date: 12-27-2018

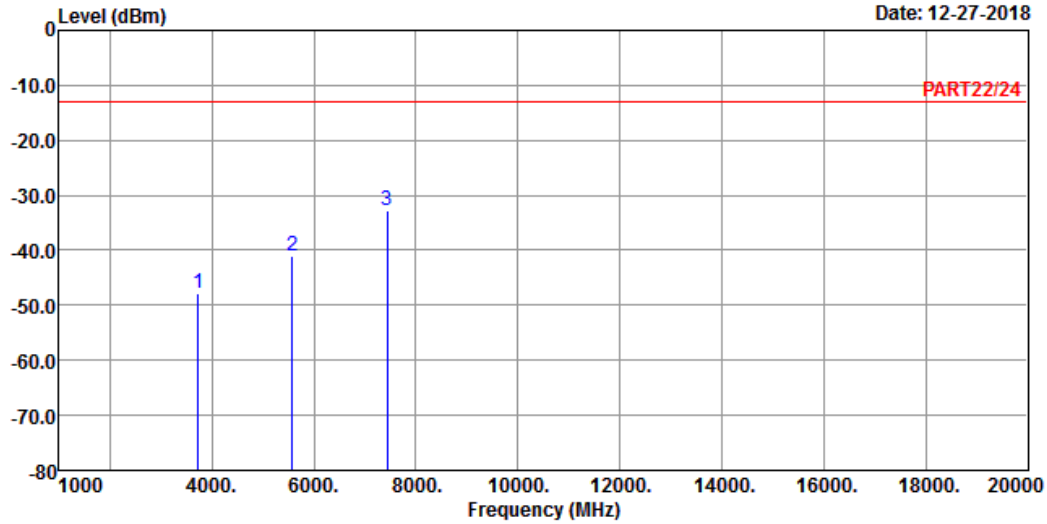

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : Cat-M1 Band 2 QPSK_20M Link_L-CH

Tested by: Thomas Wei

			Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark	
MHz	dBm	dBm	dBm	dB	dB		
1	3720.00	-47.74	-40.92	-13.00	-34.74	-6.82	Peak
2	5580.00	-40.89	-38.97	-13.00	-27.89	-1.92	Peak
3 pp	7440.00	-32.91	-37.06	-13.00	-19.91	4.15	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 1

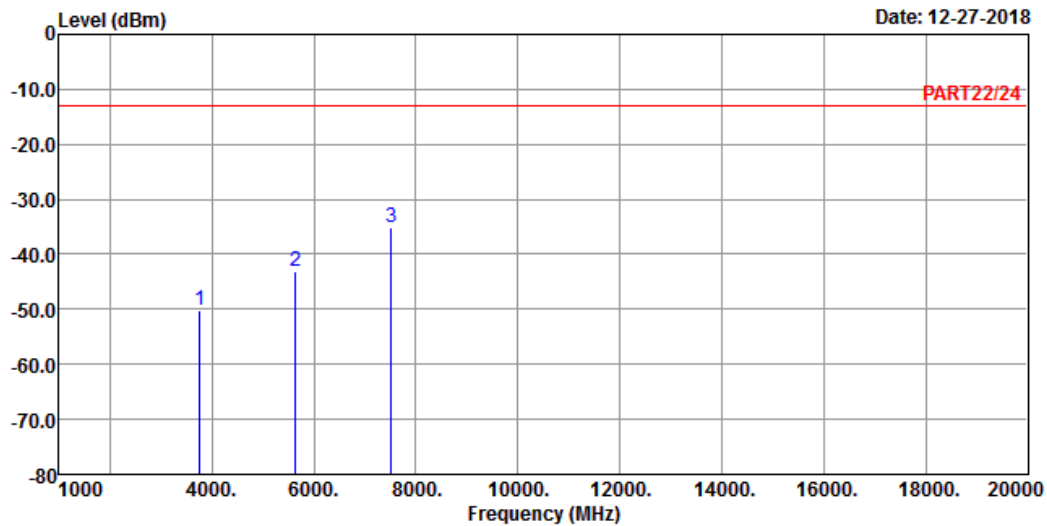

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : Cat-M1 Band 2 QPSK_20M Link_M-CH

Tested by: Thomas Wei

			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3760.00	-50.21	-43.56	-13.00	-37.21	-6.65	Peak
2	5640.00	-43.22	-41.36	-13.00	-30.22	-1.86	Peak
3 pp	7520.00	-35.04	-39.25	-13.00	-22.04	4.21	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 2

Date: 12-27-2018

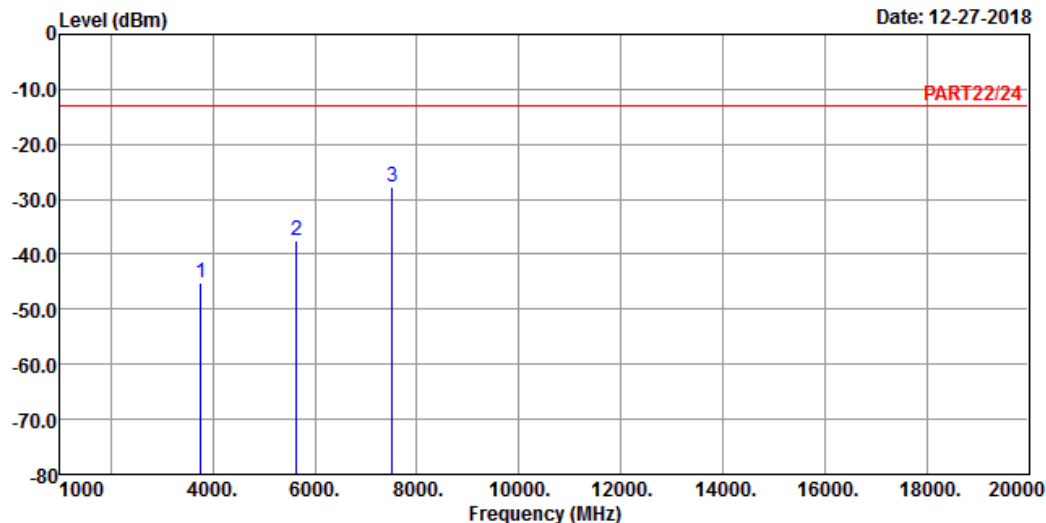

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : Cat-M1 Band 2 QPSK_20M Link_M-CH

Tested by: Thomas Wei

			Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark	
MHz	dBm	dBm	dBm	dB	dB		
1	3760.00	-45.23	-38.58	-13.00	-32.23	-6.65	Peak
2	5640.00	-37.35	-35.49	-13.00	-24.35	-1.86	Peak
3 pp	7520.00	-27.77	-31.98	-13.00	-14.77	4.21	Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 1

Date: 12-27-2018

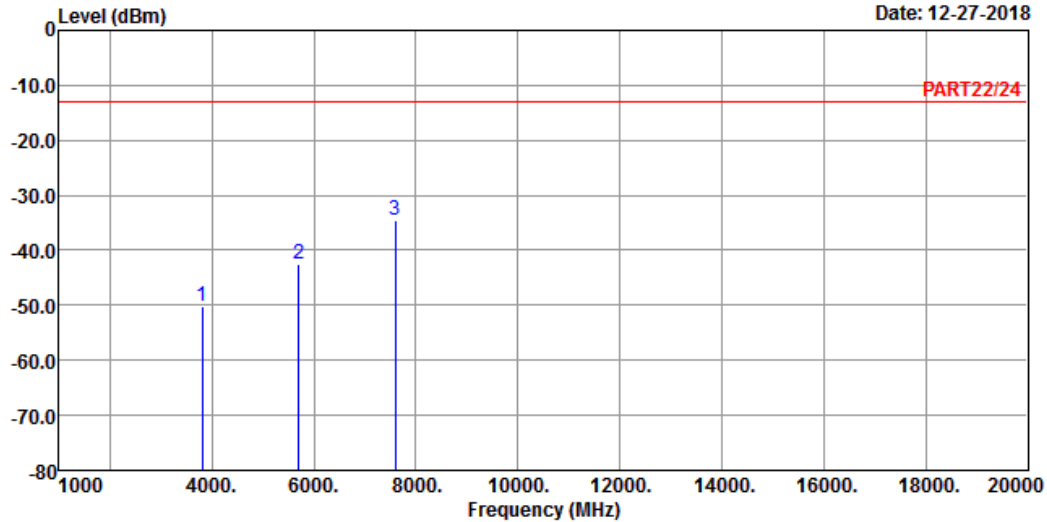

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : Cat-M1 Band 2 QPSK_20M Link_H-CH

Tested by: Thomas Wei

			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3800.00	-50.13	-43.70	-13.00	-37.13	-6.43	Peak
2	5700.00	-42.45	-40.72	-13.00	-29.45	-1.73	Peak
3 pp	7600.00	-34.53	-39.00	-13.00	-21.53	4.47	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 2

Date: 12-27-2018

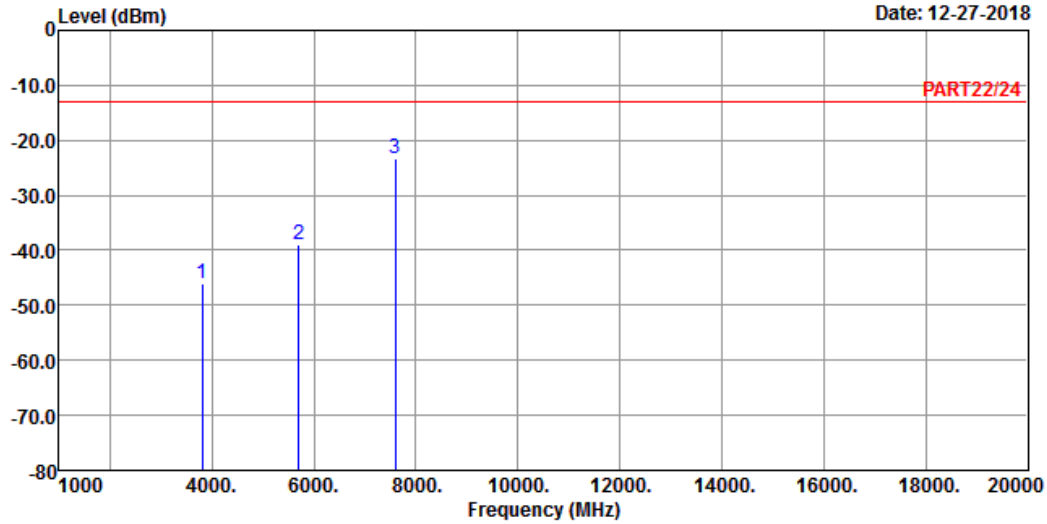

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : Cat-M1 Band 2 QPSK_20M Link_H-CH

Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3800.00	-46.17	-39.74	-13.00	-33.17	-6.43	Peak
2	5700.00	-38.99	-37.26	-13.00	-25.99	-1.73	Peak
3 pp	7600.00	-23.42	-27.89	-13.00	-10.42	4.47	Peak

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---