

Spot Check Evaluation

APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : POCO
MODEL NAME : 24095PCADG
FCC ID : 2AFZZRA8EG
STANDARD : 47 CFR Part 2, 22(H), 24(E), 27(L), 27(M), 27(O),
27(Q), Part96
47 CFR Part 15 Subpart C §15.247
47 CFR Part 15 Subpart E §15.407
TEST DATE(S) : Aug. 15, 2024 ~ Oct. 16, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
1 GENERAL DESCRIPTION.....	4
1.1 Applicant.....	4
1.2 Manufacturer.....	4
1.3 Product Feature of Equipment Under Test.....	4
1.4 Modification of EUT	4
1.5 Testing Site.....	5
1.6 Test Software.....	5
1.7 Applicable Standards.....	5
2 RE-USE OF MEASURED DATA.....	6
2.1 Introduction Section.....	6
2.2 Model Difference Information	6
2.3 Reference detail Section:	7
2.4 Spot Check Verification Data Section.....	8
3 LIST OF MEASURING EQUIPMENT.....	16
4 MEASUREMENT UNCERTAINTY	18
APPENDIX A. RADIATED SPURIOUS EMISSION TEST DATA	
APPENDIX B. SETUP PHOTOGRAPHS	
APPENDIX C. REFERENCE REPORT	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG471506-01A	Rev. 01	Initial issue of report	Sep. 10, 2024
FG471506-01A	Rev. 02	1. Added Conducted power for L/M/H test channels across all frequency bands 2. Added Radiated spurious emissions test data for LTE Band 48 in Appendix A	Oct. 17, 2024

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.2 Manufacturer

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	POCO
Model Name	24095PCADG
FCC ID	2AFZZRA8EG
IMEI Code	Conducted: 862769070026585/862769070026593 for BT/WLAN 862769070029589/862769070029597 for WWAN Radiation: 862769070028524 for BT/WLAN 862769070029282/862769070029290 for WWAN Conduction: 862669070025702/862769070025710 DFS: 862769070026585/862769070026593
HW Version	135300O16
SW Version	Xiaomi HyperOS 1.0
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Modification of EUT

No modifications are made to the EUT during all test items.



1.5 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS TH01-KS DFS01-KS 03CH03-KS 03CH04-KS	CN1257	314309

1.6 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	DFS01-KS	Sporton	Test Tools	1.0
3.	CO01-KS	AUDIX	E3	6.2009-8-24
4.	03CH03-KS	AUDIX	E3	210616
5.	03CH04-KS	AUDIX	E3	210616

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC KDB 484596 D01 Referencing Test Data v02r03
- ♦ 47 CFR Part 2, 22(H), 24(E), 27(L), 27(M), 27(O), 27(Q), Part96
- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ 47 CFR Part 15 Subpart E §15.407
- ♦ ANSI C63.10-2013
- ♦ ANSI C63.26-2015



2 Re-use of Measured Data

2.1 Introduction Section

This application re-uses data collected on a similar device. The subject device of this application (Model: 24095PCADG, FCC ID: 2AFZZRA8EG) is electrically identical to the reference device (Model: 24090RA29G, FCC ID: 2AFZZRA29G) for the portions of the circuitry corresponding to the data being re-used, following the FCC KDB 484596 D01 Referencing Test Data v02r03.

ECR Data Referencing Inquiry has been approved by FCC, and the data referencing and spot check test plan includes RF/EMC, the details are presented in section 2.3 of this report, and for SAR Reference detail, please refer to FCC SAR report FA471506-01.

The criteria set in section 3 of KDB 484596 D01 v02r03 is followed to determine whether the data referencing is justified. For SAR, the higher between the referenced value and the spot check value is used to determine compliance in both standalone and simultaneous transmission conditions

The applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID: 2AFZZRA8EG .

2.2 Model Difference Information

The **main** difference between FCC ID: 2AFZZRA29G and FCC ID: 2AFZZRA8EG is as below:

- Removed LTE Band 12/13/17/26/32
- Removed TX1 B20 alternative path of B20 which used for low band + low band CA and ENDC

Other differences and all the details of similarity and difference can be found in the confidential documents (2AFZZRA8EG Operational Description of Product Equality Declaration).



2.3 Reference detail Section:

Rule Part	Equipment Class	Frequency Band (MHz)	Reference FCC ID (Parent)	Reference on test	Reference Title	FCC ID Filling (Variant)	Test on the variant	Data Referencing (Y/N)
15C	DSS (BR/EDR)	2400~2483.5	2AFZZRA29G	Full test	FR471506A	2AFZZRA8EG	Spot check	Y, All test items
	DTS (BLE)	2400~2483.5	2AFZZRA29G	Full test	FR471506B	2AFZZRA8EG	Spot check	Y, All test items
	DTS (WLAN)	2400~2483.5	2AFZZRA29G	Full test	FR471506C	2AFZZRA8EG	Spot check	Y, All test items
15E	U-NII	5180~5240	2AFZZRA29G	Full test	FR471506E	2AFZZRA8EG	Spot check	Y, All test items
		5260~5320	2AFZZRA29G	Full test	FR471506E	2AFZZRA8EG	Spot check	Y, All test items
		5500~5720	2AFZZRA29G	Full test	FR471506E	2AFZZRA8EG	Spot check	Y, All test items
		5745~5825	2AFZZRA29G	Full test	FR471506E	2AFZZRA8EG	Spot check	Y, All test items
		5260~5320 5500~5720	2AFZZRA29G	Full test	FZ471506	2AFZZRA8EG	Spot check	Y, All test items
22, 24, 27, 96,	PCE (GSM)	GSM 850/1900	2AFZZRA29G	Full test	FG471506A	2AFZZRA8EG	Spot check	Y, All test items
	PCE (WCDMA)	Band II, IV, V	2AFZZRA29G	Full test	FG471506A	2AFZZRA8EG	Spot check	Y, All test items
	PCE/CBE (LTE)	B2/4/7/7C/38/38C/41/42/48/66	2AFZZRA29G	Full test	FG471506B FG471506C FG471506E FG471506F FG471506G	2AFZZRA8EG	Spot check	Y, All test items
	PCE/CBE (NR)	n2/n5/n7/n38/n41/n48/n66/n77/n78	2AFZZRA29G	Full test	FG471506I FG471506J FG471506K FG471506L FG471506M FG471506N	2AFZZRA8EG	Spot check	Y, All test items

Y: Pointer to spot-check exhibit; N: Pointer to full test exhibit

2.4 Spot Check Verification Data Section

All test items test against the variant model based on the worst-case condition from the original model was performed in this filing to demonstrate the test data from original model remains representative for the variant model.

All test procedures follow the related section of parent report.

Spot-check measurements, while being always compliant with the applicable rule part(s) for the test under consideration, show a deviation d_{dB} from the reference data no larger than 3 dB:

$$d_{dB} = |V_{dB} - R_{dB}| \leq 3 \text{ dB} \quad (1)$$

V_{dB} , the variant spot-check level

R_{dB} , the corresponding measurement level for the reference model

An alternative to the limit of eq. (1) is available, and is based on considering how far the reference data R_{dB} is from the compliance threshold C_{dB} (also expressed in dB), for the particular test under consideration. In this case, if $M_{dB} = |C_{dB} - R_{dB}|$ is the margin in dB from the compliance limit, a spot check may be considered acceptable when the deviation d_{dB} from the reference data satisfies the following condition:

$$d_{dB} = |V_{dB} - R_{dB}| \leq (3 + M_{dB} / 20) \text{ dB}, \text{ for } 0 \leq M_{dB} \leq 60 \text{ dB} \quad (2)$$

$$d_{dB} = |V_{dB} - R_{dB}| = 6 \text{ dB}, \text{ for } M_{dB} > 60 \text{ dB}$$

where “| |” is the absolute value of the measured quantity.

When using the option in eq. (2), d_{dB} increases linearly from 3 dB to 6 dB.



Summary for spot check for each rule entry and technology is listed as below:

Mode	Test Item	2AFZZRA29G Parent Worst mode Test Result	2AFZZRA8EG Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
BT 1Mbps (DH5-CH00)	Number of Channels (N)	79	79	0	3
	Hopping Channel Separation (MHz)	1.004	1.002	0.002	3
	Dwell Time of Each Channel(s)	0.31	0.31	0	3
	20dB Bandwidth(MHz)	0.86	0.86	0	3
	99% Bandwidth(MHz)	0.76	0.76	0	3
	Conducted Band Edges(dBm)	-48.06	-49.2	1.14	3
	Conducted Spurious Emission(dBm)	-50.22	-50.55	0.33	3
BT (Ch78)	Radiated Band Edges and Radiated Spurious Emission (dBuV/m)	51.51	51.02	0.49	3
BT	AC Conducted Emission (dBuV)	34.93	33.95	0.98	3
BLE 1Mbps (CH00)	6dB Bandwidth (MHz)	0.7	0.69	0.01	3
	99% Bandwidth (MHz)	1.04	1.04	0	3
	Power Spectral Density (dBm/3KHz)	-8.4	-8.6	0.2	3
	Conducted Band Edges and Spurious Emission (dBm)	-51.86	-52.32	0.46	3
	Conducted Spurious Emission (dBm)	-50.91	-51.88	0.97	3
BLE (CH38)	Radiated Band Edges and Radiated Spurious Emission (dBuV/m)	40.2	40.22	0.02	3
BLE	AC Conducted Emission (dBuV)	34.93	33.95	0.98	3
WIFI 2.4G (802.11b CH11)	6dB Bandwidth (MHz)	8.04	8.02	0.02	3
	99% Bandwidth (MHz)	13.23	13.14	0.09	3
	Power Spectral Density (dBm/3KHz)	-7.64	-7.88	0.24	3
	Conducted Band Edges and Spurious Emission (dBm)	-34.74	-35.55	0.81	3
	Conducted Spurious Emission (dBm)	-41.41	-42.08	0.67	3
WIFI 2.4G (802.11ax HE20 CH01)	Radiated Band Edges and Spurious Emission (dBuV/m)	50.96	50.50	0.46	3
WLAN 2.4G	AC Conducted Emission (dBuV)	34.93	33.95	0.98	3
WIFI 5G (802.11a CH116)	26dB Emission Bandwidth (MHz)	23.73	23.66	0.07	3
	99% Occupied Bandwidth (MHz)	17.41	17.38	0.03	3
	Power Spectral Density (dBm/MHz)	6.9	6.88	0.02	3
WIFI 5G (802.11ax HE80 CH42)	Radiated Band Edges and Spurious Emission (dBuV/m)	50.86	50.89	0.03	3
WLAN 5G	AC Conducted Emission (dBuV)	38.5	40.8	2.3	3
WLAN 5G	DFS (S)	0.846028	0.848428	0.0024	3



Mode	Test Item	2AFZZRA29G Parent Worst mode Test Result	2AFZZRA8EG Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
Part 22/24/27 (LTE Band 48)	Peak-to-Average Ratio (dB)	5.42	5.16	0.26	3
	Occupied Bandwidth (MHz)	17.94	17.90	0.04	3
	Conducted Band Edge (dBm/MHz)	-14.08	-14.87	0.79	3
	Conducted Spurious Emission (dBm/MHz)	-42.80	-44.75	1.95	3
	Frequency Stability (ppm)	0.0016	0.0003	0.0013	3
Part 96 (LTE Band 48)	Radiated Spurious Emission (dBm)	-47.27	-49.88	2.61	3



Conducted power for Unlicensed bands

Test Item	Mode	2AFZZRA29G Parent Worst mode Test Result	2AFZZRA8EG Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
Conducted Power (dBm)	BT BR/EDR -CH 00-DH5	10.09	8.65	1.44	3
	BT BR/EDR -CH 39-DH5	8.29	7.04	1.25	3
	BT BR/EDR -CH 78-DH5	11.29	9.64	1.65	3
	BT BR/EDR -CH 00-2DH1	9.09	7.72	1.37	3
	BT BR/EDR -CH 39-2DH1	7.19	6.20	0.99	3
	BT BR/EDR -CH 78-2DH1	10.36	8.96	1.40	3
	BT BR/EDR -CH 00-3DH1	8.89	7.56	1.33	3
	BT BR/EDR -CH 39-3DH1	6.95	6.04	0.91	3
	BT BR/EDR -CH 78-3DH1	10.19	8.80	1.39	3
	BLE 1Mbps -CH00	6.49	7.02	0.31	3
	BLE 1Mbps -CH19	7.33	5.88	0.43	3
	BLE 1Mbps -CH39	6.31	6.12	0.43	3
	BLE 2Mbps -CH00	6.55	6.12	0.43	3
	BLE 2Mbps -CH19	7.37	7.05	0.32	3
	BLE 2Mbps -CH39	6.49	6.08	0.41	3
	11b-CH 01	17.18	16.87	0.31	3
	11b-CH 06	20.52	20.28	0.24	3
	11b-CH 11	16.96	16.64	0.32	3
	11g-CH 01	24.5	24.46	0.04	3
	11g-CH 06	24.88	24.42	0.46	3
	11g-CH 11	24.4	23.98	0.42	3
	11n HT20-CH 01	25.15	24.86	0.29	3
	11n HT20-CH 06	25	24.65	0.35	3
	11n HT20-CH 11	24.88	24.53	0.35	3
	11ax HE20-CH 01	24.4	24.08	0.32	3
	11ax HE20-CH 06	24.66	24.35	0.31	3
	11ax HE20-CH 11	24.31	24.02	0.29	3
	11a-CH 36	16.98	16.51	0.47	3
	11a-CH 44	16.91	16.58	0.33	3
	11a-CH 48	16.89	16.49	0.40	3
	11a-CH 52	16.88	16.65	0.23	3
	11a-CH 60	16.96	16.54	0.42	3
	11a-CH 64	16.82	16.59	0.23	3
	11a-CH 100	16.85	16.45	0.40	3
	11a-CH 116	17.06	16.91	0.15	3
	11a-CH 140	12.49	12.45	0.04	3
	11a-CH 149	17.17	16.91	0.26	3
	11a-CH 157	17.29	16.97	0.32	3
	11a-CH 165	17.21	16.92	0.29	3
	11n HT20-CH 36	16.02	15.65	0.37	3
	11n HT20-CH 44	16.00	15.53	0.47	3
	11n HT20-CH 48	15.79	15.32	0.47	3
	11n HT20-CH 52	15.72	15.42	0.30	3
	11n HT20-CH 60	15.87	15.45	0.42	3
	11n HT20-CH 64	15.84	15.51	0.33	3
	11n HT20-CH 100	15.89	15.40	0.49	3
	11n HT20-CH 116	16.13	16.04	0.09	3
	11n HT20-CH 140	11.50	11.48	0.02	3
	11n HT20-CH 149	16.06	16.00	0.06	3
	11n HT20-CH 157	16.26	15.96	0.30	3



11n HT20-CH 165	16.20	16.02	0.18	3
11ac VHT20-CH 36	16.08	15.68	0.40	3
11ac VHT20-CH 44	16.06	15.58	0.48	3
11ac VHT20-CH 48	15.85	15.45	0.40	3
11ac VHT20-CH 52	15.79	15.45	0.34	3
11ac VHT20-CH 60	15.90	15.47	0.43	3
11ac VHT20-CH 64	15.87	15.54	0.33	3
11ac VHT20-CH 100	15.94	15.46	0.48	3
11ac VHT20-CH 116	16.17	16.06	0.11	3
11ac VHT20-CH 140	11.58	11.52	0.06	3
11ac VHT20-CH 149	16.12	16.01	0.11	3
11ac VHT20-CH 157	16.33	15.98	0.35	3
11ac VHT20-CH 165	16.24	16.04	0.20	3
11ax HE20-CH 36	16.18	15.76	0.42	3
11ax HE20-CH 44	16.14	15.67	0.47	3
11ax HE20-CH 48	15.94	15.53	0.41	3
11ax HE20-CH 52	15.86	15.53	0.33	3
11ax HE20-CH 60	16.00	15.57	0.43	3
11ax HE20-CH 64	15.97	15.62	0.35	3
11ax HE20-CH 100	16.06	15.59	0.47	3
11ax HE20-CH 116	16.24	16.13	0.11	3
11ax HE20-CH 140	11.64	11.60	0.04	3
11ax HE20-CH 149	16.24	16.10	0.14	3
11ax HE20-CH 157	16.41	16.06	0.35	3
11ax HE20-CH 165	16.35	16.13	0.22	3
11n HT40-CH 38	14.11	13.65	0.46	3
11n HT40-CH 46	15.06	14.57	0.49	3
11n HT40-CH 54	15.01	14.60	0.41	3
11n HT40-CH 62	14.52	14.20	0.32	3
11n HT40-CH 102	13.80	13.62	0.18	3
11n HT40-CH 110	14.77	14.62	0.15	3
11n HT40-CH 134	15.23	15.06	0.17	3
11n HT40-CH 151	15.32	15.13	0.19	3
11n HT40-CH 159	15.36	15.09	0.27	3
11ac VHT40-CH 38	14.34	14.16	0.18	3
11ac VHT40-CH 46	15.80	15.32	0.48	3
11ac VHT40-CH 54	15.88	15.40	0.48	3
11ac VHT40-CH 62	14.44	14.07	0.37	3
11ac VHT40-CH 102	13.72	13.44	0.28	3
11ac VHT40-CH 110	15.76	15.39	0.37	3
11ac VHT40-CH 134	15.51	15.40	0.11	3
11ac VHT40-CH 151	16.10	15.94	0.16	3
11ac VHT40-CH 159	16.24	15.86	0.38	3
11ax40-CH 38	14.24	13.76	0.48	3
11ax40-CH 46	15.17	14.69	0.48	3
11ax40-CH 54	15.12	14.70	0.42	3
11ax40-CH 62	14.65	14.29	0.36	3
11ax40-CH 102	13.94	13.70	0.24	3
11ax40-CH 110	14.88	14.73	0.15	3
11ax40-CH 134	15.35	15.16	0.19	3
11ax40-CH 151	15.41	15.21	0.20	3
11ax40-CH 159	15.47	15.19	0.28	3
11ac VHT80-CH 042	13.40	12.98	0.42	3
11ac VHT80-CH 058	12.70	12.53	0.17	3
11ac VHT80-CH 106	13.30	13.08	0.22	3



	11ac VHT80-CH 122	14.15	13.86	0.29	3
	11ac VHT80-CH 138	14.01	13.93	0.08	3
	11ac VHT80-CH 155	14.21	13.88	0.33	3
	11ax HE80-CH 042	13.57	13.09	0.48	3
	11ax HE80-CH 058	12.84	12.63	0.21	3
	11ax HE80-CH 106	13.43	13.16	0.27	3
	11ax HE80-CH 122	14.24	13.97	0.27	3
	11ax HE80-CH 138	14.13	14.02	0.11	3
	11ax HE80-CH 155	14.33	13.98	0.35	3

Conducted power/ERP/EIRP for Licensed bands

Test Item	Mode	Bandwidth	Channel	Frequency	Modulation	2AFZZRA29G Parent Worst mode Test Result		2AFZZRA8EG Variant Check Test Result		Deviation (dB)	Deviation Limit (dB)
						Coducted (dBm)	ERP/EIRP (W)	Coducted (dBm)	ERP/EIRP (W)		
Conducted Power /ERP/EIRP	GSM 850	/	128	824.2	GMSK	32.4	1.7378	32.15	1.6406	0.25	3
	GSM 850	/	189	836.4	GMSK	32.46	1.7620	32.26	1.6827	0.2	3
	GSM 850	/	251	848.8	GMSK	32.45	1.7579	32.28	1.6904	0.17	3
	GSM 1900	/	512	1850.2	GMSK	29.31	0.8531	29.12	0.8166	0.19	3
	GSM 1900	/	661	1880	GMSK	29.45	0.8810	29.22	0.8356	0.23	3
	GSM 1900	/	810	1909.8	GMSK	29.43	0.8770	29.18	0.8279	0.25	3
	WCDMA 850	/	4132	826.4	BPSK	24.48	0.2805	24.36	0.2729	0.12	3
	WCDMA 850	/	4182	836.4	BPSK	24.5	0.2818	24.38	0.2742	0.12	3
	WCDMA 850	/	4233	846.6	BPSK	24.44	0.2780	24.29	0.2685	0.15	3
	WCDMA1900	/	9262	1852.4	BPSK	22.91	0.1954	22.85	0.1928	0.06	3
	WCDMA1900	/	9400	1880	BPSK	22.98	0.1986	22.90	0.1950	0.08	3
	WCDMA1900	/	9538	1907.6	BPSK	22.93	0.1963	22.82	0.1914	0.11	3
	WCDMA1700	/	1312	1712.4	BPSK	23.91	0.2460	23.69	0.2339	0.22	3
	WCDMA1700	/	1413	1732.6	BPSK	23.96	0.2489	23.75	0.2371	0.21	3
	WCDMA1700	/	1513	1752.6	BPSK	23.92	0.2466	23.63	0.2307	0.29	3
	B2	20M	18700	1860	QPSK	23.01	0.2000	22.61	0.1824	0.4	3
	B2	20M	18900	1880	QPSK	23.05	0.2018	22.67	0.1849	0.38	3
	B2	20M	19100	1900	QPSK	22.98	0.1986	22.65	0.1841	0.33	3
	B4	20M	20050	1720	QPSK	23.81	0.2404	23.75	0.2371	0.06	3
	B4	20M	20175	1732.5	QPSK	23.86	0.2432	23.80	0.2399	0.06	3
	B4	20M	20300	1745	QPSK	23.83	0.2415	23.72	0.2355	0.11	3
	B66	20M	132072	1720	QPSK	23.83	0.2415	23.68	0.2333	0.15	3
	B66	20M	132322	1745	QPSK	23.94	0.2477	23.73	0.2360	0.21	3
	B66	20M	132572	1770	QPSK	23.93	0.2472	23.65	0.2317	0.28	3
	B7	20M	20850	2510	QPSK	23.68	0.2333	23.64	0.2312	0.04	3
	B7	20M	21100	2535	QPSK	23.75	0.2371	23.68	0.2333	0.07	3
	B7	20M	21350	2560	QPSK	23.66	0.2323	23.61	0.2296	0.05	3
	B7C	20M+20M	20850_21048	2510_2529.8	QPSK	23.24	0.2109	23.22	0.2099	0.02	3
	B7C	20M+20M	21001_21199	2525.1_2544.9	QPSK	23.29	0.2133	23.24	0.2109	0.05	3
	B7C	20M+20M	21152_21350	2540.2_2560	QPSK	23.28	0.2128	23.13	0.2056	0.15	3
	B38	20M	37850	2580	QPSK	23.43	0.2203	23.40	0.2188	0.03	3
	B38	20M	38000	2595	QPSK	23.52	0.2249	23.43	0.2203	0.09	3



	B38	20M	38150	2610	QPSK	23.48	0.2228	23.38	0.2178	0.1	3
	B41	20M	39750	2506	QPSK	23.44	0.2208	23.40	0.2188	0.04	3
	B41	20M	40620	2593	QPSK	23.6	0.2291	23.49	0.2234	0.11	3
	B41	20M	41490	2680	QPSK	23.54	0.2259	23.39	0.2183	0.15	3
	B38C-20M+20M	20M+20M	37850_38048	2580_2599.8	QPSK	23.38	0.2178	23.31	0.2143	0.07	3
	B38C-20M+20M	20M+20M	37901_38099	2585.1_2604.9	QPSK	23.39	0.2183	23.35	0.2163	0.04	3
	B38C-20M+20M	20M+20M	37952_38150	2590.2_2610	QPSK	23.36	0.2168	23.27	0.2123	0.09	3
	B42	20M	42190	3460	QPSK	24.56	0.2858	24.34	0.2716	0.22	3
	B42	20M	42590	3500	QPSK	24.59	0.2877	24.45	0.2786	0.14	3
	B42	20M	42990	3540	QPSK	24.54	0.2844	24.47	0.2799	0.07	3
	B48	20M	55340	3560	QPSK	24.41	0.2761	24.33	0.2710	0.08	3
	B48	20M	55830	3609	QPSK	24.48	0.2805	24.36	0.2729	0.12	3
	B48	20M	56640	3690	QPSK	24.38	0.2742	24.29	0.2685	0.09	3
	N2-L	20M	372000	1860	PI/2 BPSK	22.83	0.1919	22.78	0.1897	0.05	3
	N2-M	20M	376000	1880	PI/2 BPSK	22.78	0.1897	22.72	0.1871	0.06	3
	N2-H	20M	380000	1900	PI/2 BPSK	22.64	0.1837	22.61	0.1824	0.03	3
	N5-L	20M	166800	834	PI/2 BPSK	24.37	0.2735	24.33	0.2710	0.04	3
	N5-M	20M	167300	836.5	PI/2 BPSK	24.46	0.2793	24.41	0.2761	0.05	3
	N5-H	20M	167800	839	PI/2 BPSK	24.4	0.2754	24.28	0.2679	0.12	3
	N7-L	50M	505000	2525	PI/2 BPSK	22.85	0.1928	22.81	0.1910	0.04	3
	N7-M	50M	507000	2535	PI/2 BPSK	23.01	0.2000	22.98	0.1986	0.03	3
	N7-H	50M	509000	2545	PI/2 BPSK	23.3	0.2138	23.13	0.2056	0.17	3
	N38-L	40M	518000	2590	QPSK	23.16	0.2070	23.11	0.2046	0.05	3
	N38-M	40M	519000	2595	QPSK	23.16	0.2070	23.09	0.2037	0.07	3
	N38-H	40M	520000	2600	QPSK	23.18	0.2080	23.15	0.2065	0.03	3
	N41-L	100M	509202	2546.01	QPSK	23.16	0.2070	23.11	0.2046	0.05	3
	N41-M	100M	518598	2592.99	QPSK	23.23	0.2104	23.18	0.2080	0.05	3
	N41-H	100M	528000	2640	QPSK	23.03	0.2009	22.98	0.1986	0.05	3
	N66-L	40M	346000	1730	PI/2 BPSK	24.2	0.2630	24.16	0.2606	0.04	3
	N66-M	40M	349000	1745	PI/2 BPSK	24	0.2512	23.96	0.2489	0.04	3
	N66-H	40M	352000	1760	PI/2 BPSK	24.09	0.2564	24.03	0.2529	0.06	3
	N48-L	40M	638000	3570	PI/2 BPSK	24.23	0.2649	24.14	0.2594	0.09	3
	N48-M	40M	641666	3624.99	PI/2 BPSK	24.58	0.2871	24.48	0.2805	0.1	3
	N48-H	40M	645332	3679.98	PI/2 BPSK	24.15	0.2600	24.10	0.2570	0.05	3
	N77 27O-L	100M	650000	3750	PI/2 BPSK	26.17	0.4140	26.14	0.4111	0.03	3
	N77 27O-M	100M	656000	3840	PI/2 BPSK	26.19	0.4159	26.13	0.4102	0.06	3
	N77 27O-H	100M	662000	3930	PI/2 BPSK	26.4	0.4365	26.31	0.4276	0.09	3
	N78 27O	100M	650000	3750	QPSK	26.31	0.4276	26.27	0.4236	0.04	3
	N77 27Q	100M	633334	3500.01	PI/2 BPSK	26.3	0.4266	26.25	0.4217	0.05	3
	N78 27Q	100M	633334	3500.01	PI/2 BPSK	26.28	0.4246	26.11	0.4083	0.17	3

**Conclusion:**

All test items test against the variant model based on the worst-case condition from the original model was performed in this filing to demonstrate the test data from original model remains representative for the variant model.

Based on the spot check test result, the test data from the original model is representative for the variant model. All spot check test data are shown within expected level compliant to limit line.

We are using power and ERP/EIRP measurements from the original parent model reports to list on the grant.

The same detection mechanism/software/antenna gain is used in the variant of DFS. Hence, all test cases refer to parent report.

We confirm that the test data referencing policy of FCC KDB 484596 D01 Referencing Test Data v02r03 has been followed and the test data as referenced from the parent model report represents compliance with new FCC ID.



3 List of Measuring Equipment

For BT/WIFI:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Aug. 28, 2024~ Oct. 16, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024		Oct. 09, 2025	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2024	Aug. 28, 2024~ Oct. 16, 2024	Jan. 01, 2025	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2024	Aug. 28, 2024~ Oct. 16, 2024	Jan. 01, 2025	Conducted (TH01-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 18, 2024	Aug. 28, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 11, 2023	Aug. 28, 2024	Oct. 10, 2024	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2024	Aug. 28, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 11, 2023	Aug. 28, 2024	Oct. 10, 2024	Conduction (CO01-KS)
Signal Analyzer	R&S	FSV7	101472	10Hz~7GHz	Jan. 02, 2024	Aug. 30, 2024	Jan. 01, 2025	Conducted (DFS01-KS)
MXG-B RF Vector Signal Generator	Keysight	5182B /5182BX07	MY56200417 /MY59360210	9kHz~7.2GHz	Apr 17, 2024	Aug. 30, 2024	Apr 16, 2025	Conducted (DFS01-KS)
Combiner	MTJ Cooperation	MTJ7112	N/A	0.4-6GHz	NCR	Aug. 30, 2024	NCR	Conducted (DFS01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz; Max 30dBm	Oct. 11, 2023	Aug. 15, 2024	Oct. 10, 2024	Radiation (03CH03-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz~44GHz	Oct. 11, 2023	Aug. 15, 2024	Oct. 10, 2024	Radiation (03CH03-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 11, 2023	Aug. 15, 2024	Sep. 10, 2024	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	23182	30MHz~1GHz	Dec. 06, 2023	Aug. 15, 2024	Dec. 05, 2024	Radiation (03CH03-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 23, 2023	Aug. 15, 2024	Oct. 22, 2024	Radiation (03CH03-KS)
SHF-EHF Horn	com-power	AH-840	101115	18GHz~40GHz	Oct. 15, 2023	Aug. 15, 2024	Oct. 14, 2024	Radiation (03CH03-KS)
Amplifier	SONOMA	310N	413740	30MHz ~1000MHz	Jan. 03, 2024	Aug. 15, 2024	Jan. 02, 2025	Radiation (03CH03-KS)
Amplifier	EM	EM18G40GA	060851	18~40GHz	Jan. 03, 2024	Aug. 15, 2024	Jan. 02, 2025	Radiation (03CH03-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2082394	1Ghz-18Ghz	Jan. 03, 2024	Aug. 15, 2024	Jan. 02, 2025	Radiation (03CH03-KS)
Amplifier	Keysight	83017A	MY53270319	1GHz~26.5GHz	Oct. 11, 2023	Aug. 15, 2024	Oct. 10, 2024	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Aug. 15, 2024	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Aug. 15, 2024	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Aug. 15, 2024	NCR	Radiation (03CH03-KS)

NCR: No Calibration Required.



For WWAN Bands:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Aug. 28, 2024~ Oct. 16, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024		Oct. 09, 2025	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	Aug. 28, 2024~ Oct. 16, 2024	NCR	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 04, 2024	Aug. 28, 2024~ Oct. 16, 2024	Jul. 03, 2025	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471079	10Hz~44G,MAX 30dB	Oct. 11, 2023	Aug. 22, 2024~ Oct. 15, 2024	Oct. 10, 2024	Radiation (03CH04-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471079	10Hz~44G,MAX 30dB	Oct. 10, 2024		Oct. 09, 2025	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	59913	30MHz~1GHz	Aug. 18, 2024	Aug. 22, 2024~ Oct. 15, 2024	Aug. 17, 2025	Radiation (03CH04-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 23, 2023	Aug. 22, 2024~ Oct. 15, 2024	Oct. 22, 2024	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 27, 2024	Aug. 22, 2024~ Oct. 15, 2024	Jan. 26, 2025	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	413740	9KHz~1GHz	Jan. 03, 2024	Aug. 22, 2024~ Oct. 15, 2024	Jan. 02, 2025	Radiation (03CH04-KS)
Amplifier	EM	EM18G40GA	060728	18~40GHz	Jan. 02, 2024	Aug. 22, 2024~ Oct. 15, 2024	Jan. 01, 2025	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18GA	060840	1Ghz~18Ghz	Oct. 11, 2023	Aug. 22, 2024~ Oct. 15, 2024	Oct. 10, 2024	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18GA	060840	1Ghz~18Ghz	Oct. 10, 2024		Oct. 09, 2025	Radiation (03CH04-KS)
Amplifier	EM	EM01G18GA	060892	1Ghz~18Ghz	Oct. 11, 2023	Aug. 22, 2024~ Oct. 15, 2024	Oct. 10, 2024	Radiation (03CH04-KS)
Amplifier	EM	EM01G18GA	060892	1Ghz~18Ghz	Oct. 10, 2024		Oct. 09, 2025	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Aug. 22, 2024~ Oct. 15, 2024	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Aug. 22, 2024~ Oct. 15, 2024	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Aug. 22, 2024~ Oct. 15, 2024	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required.

4 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement (BT/WIFI2.4G/5G)

Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	±0.4 ppm

Uncertainty of Conducted Measurement (DFS)

Test Item	Uncertainty
Conducted Generated signal Levels	±0.56 dB
Conducted Time	0.38%

Uncertainty of Conducted Measurement (WWAN)

Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Peak to Average Ratio	±0.46 dB
Frequency Stability	±0.4 ppm

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84 dB
---	---------

**03CH03-KS(BT/WIF):****Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)**

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.30dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.08dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.18dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.22dB
---	--------

03CH04-KS(WWAN):**Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)**

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.83 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.83 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.82 dB
---	---------

-THE END-



Appendix A. Radiated Spurious Emission Test Data

Test Engineer :	Jake Zhou	Relative Humidity :	53-58%
		Temperature :	23-26℃





Radiated Spurious Emission Test Modes for Co-location

Mode	Band	Band	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	Co-location	2.4G WIFI	6	802.11ax HE20	01	2412	MCS0	Full	-
		WWAN	3	Part 96 LTE Band 48 BW=20M					
Mode 2	Co-location	5G U-NII-1	6	802.11ax HE80	42	5210	MCS0	Full	-
		-	6	Bluetooth-LE	38	2478	2Mbps	Full	-
		WWAN	3	Part 96 LTE Band 48 BW=20M					





Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11ax HE20	01	2389.95	50.83	54.00	-3.17	H	AVERAGE	Pass	Band Edge
	802.11ax HE20	01	4824.00	44.42	74.00	-29.58	H	PEAK	Pass	Harmonic
2	802.11ax HE80	42	5149.76	50.67	54.00	-3.33	H	AVERAGE	Pass	Band Edge
	802.11ax HE80	42	10420.00	44.50	68.20	-23.70	V	PEAK	Pass	Harmonic
	Bluetooth-LE	38	2485.24	40.48	54.00	-13.52	V	AVERAGE	Pass	Band Edge
	Bluetooth-LE	38	4956.00	46.87	54.00	-7.13	H	AVERAGE	Pass	Harmonic

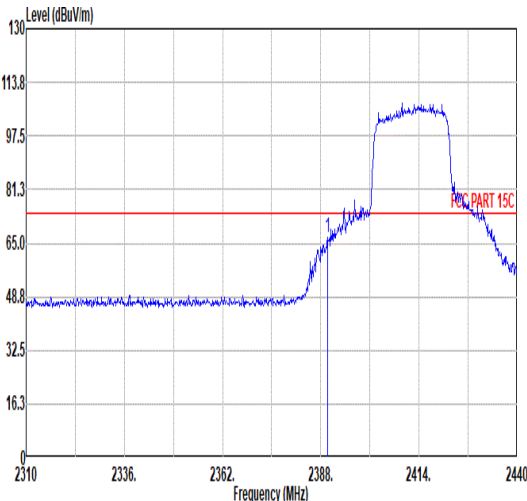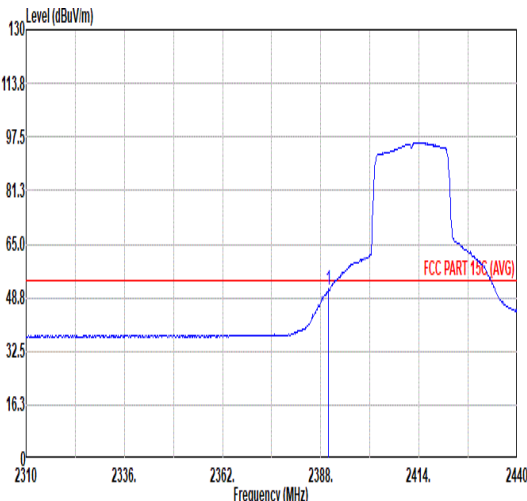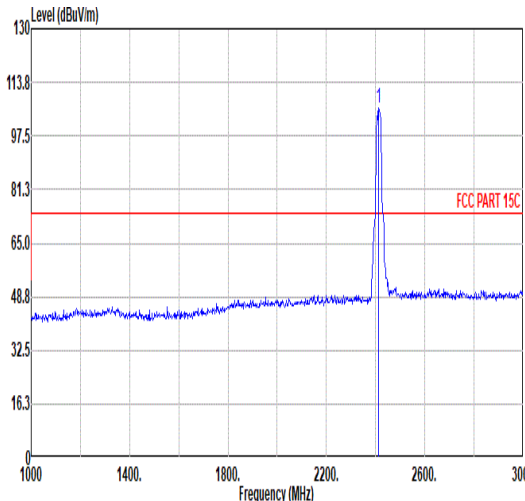
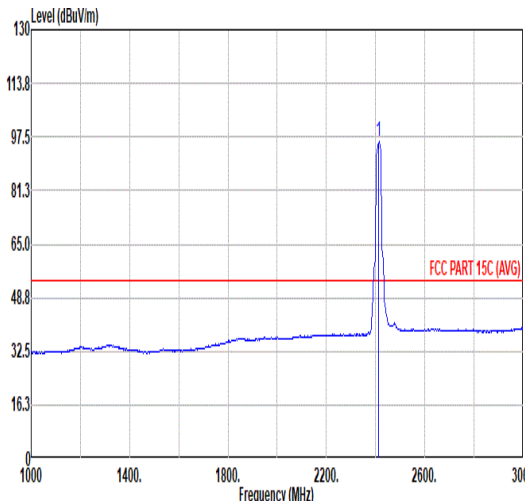


Mode	1																																																							
	Band Edge																																																							
	2400-2483.5_802.11ax HE20_CH01_Full_2412MHz																																																							
ANT	6																																																							
Pol.	Horizontal						Fundamental																																																	
Peak																																																								
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.82</td><td>66.56</td><td>74.00</td><td>-7.44</td><td>58.32</td><td>31.94</td><td>7.16</td><td>36.86</td><td>6.00</td><td>206</td><td>311</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.82	66.56	74.00	-7.44	58.32	31.94	7.16	36.86	6.00	206	311	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2389.82	66.56	74.00	-7.44	58.32	31.94	7.16	36.86	6.00	206	311	PEAK																																												
Avg																																																								
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>50.83</td><td>54.00</td><td>-3.17</td><td>42.59</td><td>31.94</td><td>7.16</td><td>36.86</td><td>6.00</td><td>206</td><td>311</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	50.83	54.00	-3.17	42.59	31.94	7.16	36.86	6.00	206	311	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2389.95	50.83	54.00	-3.17	42.59	31.94	7.16	36.86	6.00	206	311	AVERAGE																																												
Peak																																																								
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>105.97</td><td>-----</td><td>-----</td><td>97.49</td><td>32.14</td><td>7.20</td><td>36.86</td><td>6.00</td><td>206</td><td>311</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	105.97	-----	-----	97.49	32.14	7.20	36.86	6.00	206	311	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2412.00	105.97	-----	-----	97.49	32.14	7.20	36.86	6.00	206	311	PEAK																																												
Avg																																																								
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>95.94</td><td>-----</td><td>-----</td><td>87.42</td><td>32.17</td><td>7.21</td><td>36.86</td><td>6.00</td><td>206</td><td>311</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	95.94	-----	-----	87.42	32.17	7.21	36.86	6.00	206	311	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2412.00	95.94	-----	-----	87.42	32.17	7.21	36.86	6.00	206	311	AVERAGE																																												

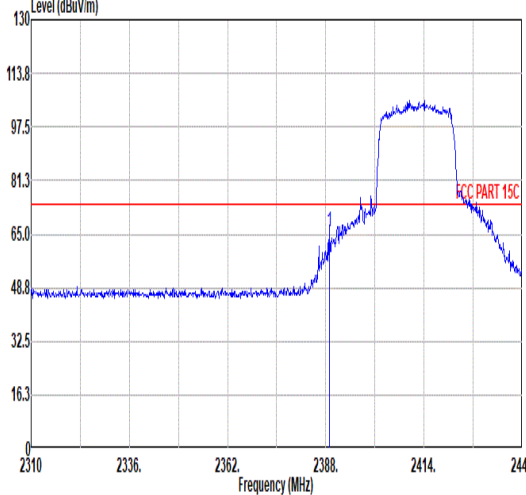
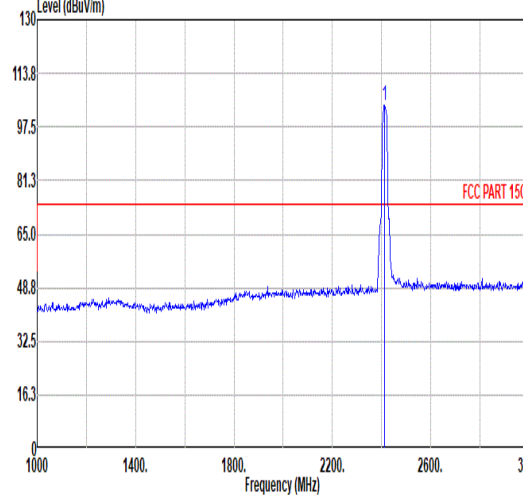
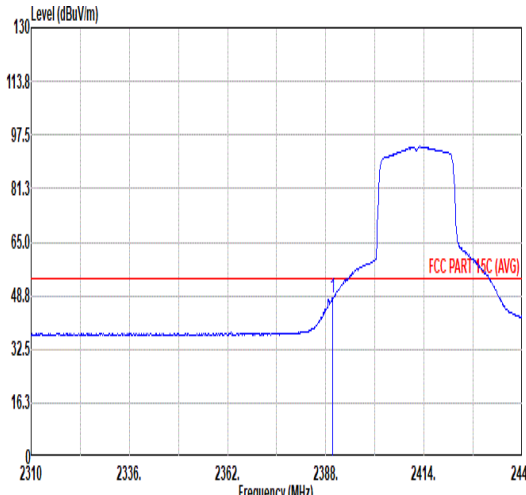
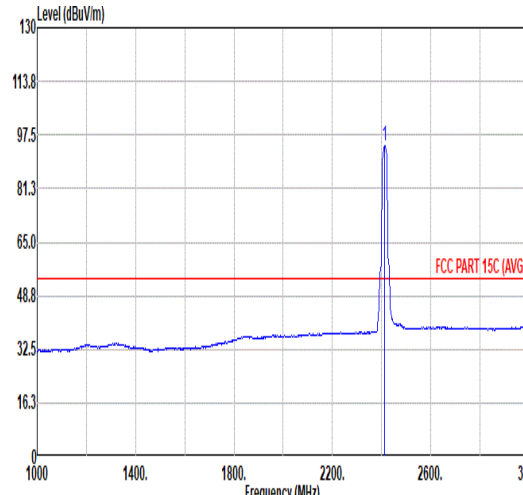


Mode	1																																																																																																																						
	Band Edge																																																																																																																						
	2400-2483.5_802.11ax HE20_CH01_Full_2412MHz																																																																																																																						
ANT	6																																																																																																																						
Pol.	Vertical						Fundamental																																																																																																																
Peak																																																																																																																							
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2388.91</td><td>65.71</td><td>74.00</td><td>-8.29</td><td>57.48</td><td>31.93</td><td>7.16</td><td>36.86</td><td>6.00</td><td>312</td><td>52 PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2388.91	65.71	74.00	-8.29	57.48	31.93	7.16	36.86	6.00	312	52 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>103.99</td><td>-----</td><td>-----</td><td>95.51</td><td>32.14</td><td>7.20</td><td>36.86</td><td>6.00</td><td>312</td><td>52 PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2412.00	103.99	-----	-----	95.51	32.14	7.20	36.86	6.00	312
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	2388.91	65.71	74.00	-8.29	57.48	31.93	7.16	36.86	6.00	312	52 PEAK																																																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	2412.00	103.99	-----	-----	95.51	32.14	7.20	36.86	6.00	312	52 PEAK																																																																																																												
Avg																																																																																																																							
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2389.82</td><td>48.00</td><td>54.00</td><td>-6.00</td><td>39.76</td><td>31.94</td><td>7.16</td><td>36.86</td><td>6.00</td><td>312</td><td>52 AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2389.82	48.00	54.00	-6.00	39.76	31.94	7.16	36.86	6.00	312	52 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>93.97</td><td>-----</td><td>-----</td><td>85.49</td><td>32.14</td><td>7.20</td><td>36.86</td><td>6.00</td><td>312</td><td>52 AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2412.00	93.97	-----	-----	85.49	32.14	7.20	36.86	6.00	312
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	2389.82	48.00	54.00	-6.00	39.76	31.94	7.16	36.86	6.00	312	52 AVERAGE																																																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	2412.00	93.97	-----	-----	85.49	32.14	7.20	36.86	6.00	312	52 AVERAGE																																																																																																												

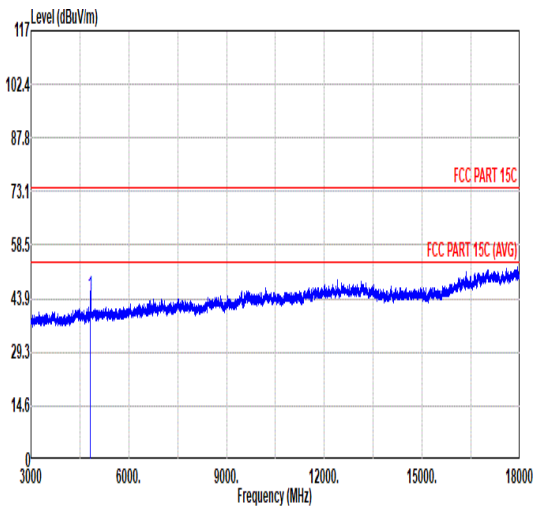
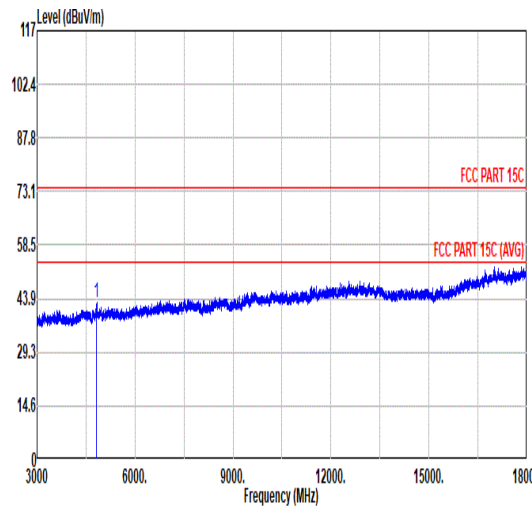


Mode	1																																																																																																			
	Harmonic																																																																																																			
	2400-2483.5_802.11ax HE20_CH01_Full_2412MHz																																																																																																			
ANT	6																																																																																																			
Pol.	Horizontal						Vertical																																																																																													
Peak Avg																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>44.42</td><td>74.00</td><td>-29.58</td><td>64.97</td><td>34.40</td><td>10.29</td><td>65.24</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	44.42	74.00	-29.58	64.97	34.40	10.29	65.24	0.00	--	--	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>43.04</td><td>74.00</td><td>-30.96</td><td>63.59</td><td>34.40</td><td>10.29</td><td>65.24</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	43.04	74.00	-30.96	63.59	34.40	10.29	65.24	0.00	--	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	4824.00	44.42	74.00	-29.58	64.97	34.40	10.29	65.24	0.00	--	--	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	4824.00	43.04	74.00	-30.96	63.59	34.40	10.29	65.24	0.00	--	--	PEAK																																																																																								

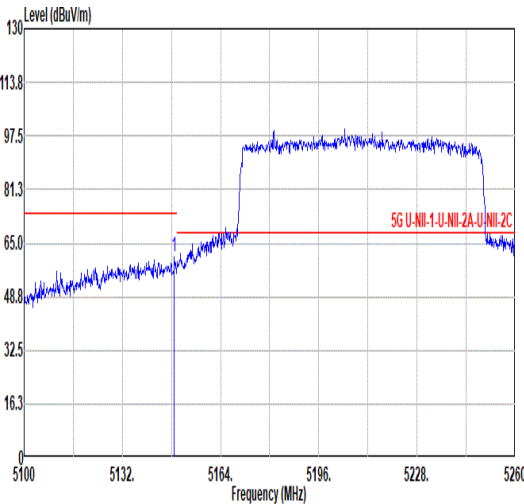
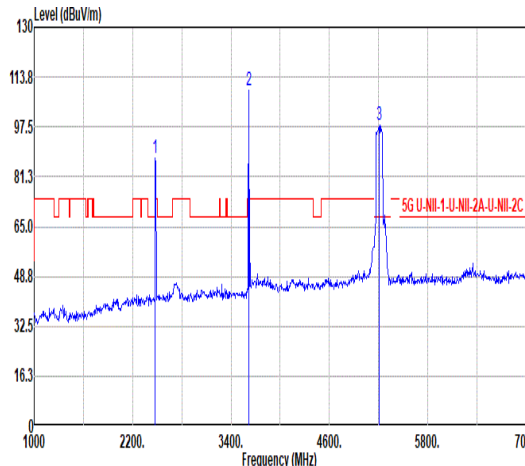
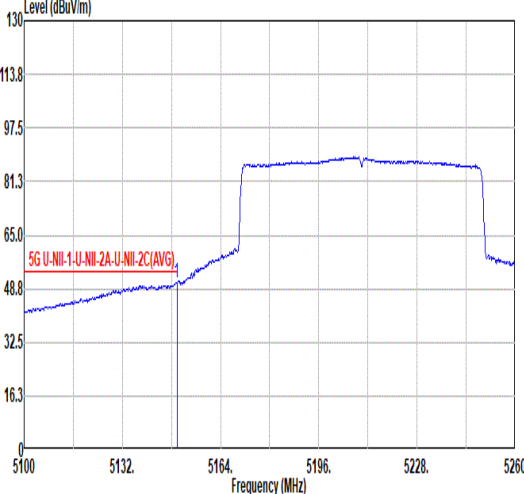
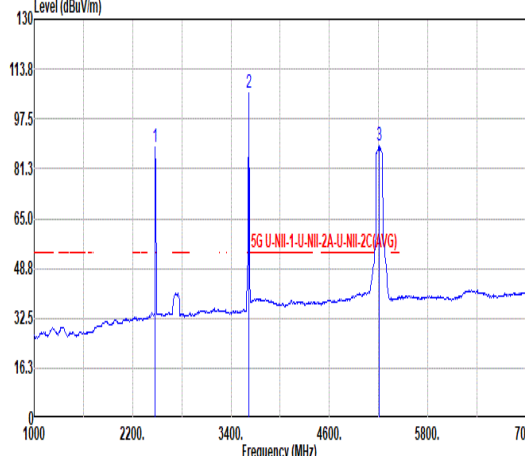


		2																																																																																																																								
Mode		Band Edge - L																																																																																																																								
		U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full_5210MHz																																																																																																																								
ANT		6																																																																																																																								
Pol.		Horizontal						Fundamental																																																																																																																		
Peak																																																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5148.96</td><td>60.84</td><td>74.00</td><td>-13.16</td><td>52.93</td><td>34.60</td><td>10.65</td><td>37.34</td><td>0.00</td><td>101</td><td>236</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5148.96	60.84	74.00	-13.16	52.93	34.60	10.65	37.34	0.00	101	236	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2476.00</td><td>87.52</td><td>-----</td><td>84.45</td><td>32.60</td><td>7.32</td><td>36.85</td><td>0.00</td><td>101</td><td>236</td><td>Peak</td></tr><tr><td>2</td><td>3616.00</td><td>109.54</td><td>-----</td><td>104.37</td><td>32.86</td><td>8.89</td><td>36.58</td><td>0.00</td><td>101</td><td>236</td><td>Peak</td></tr><tr><td>3</td><td>5210.00</td><td>98.23</td><td>-----</td><td>90.15</td><td>34.68</td><td>10.72</td><td>37.32</td><td>0.00</td><td>101</td><td>236</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2476.00	87.52	-----	84.45	32.60	7.32	36.85	0.00	101	236	Peak	2	3616.00	109.54	-----	104.37	32.86	8.89	36.58	0.00	101	236	Peak	3	5210.00	98.23	-----	90.15	34.68	10.72	37.32	0.00	101	236
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																
1	5148.96	60.84	74.00	-13.16	52.93	34.60	10.65	37.34	0.00	101	236	PEAK																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																
1	2476.00	87.52	-----	84.45	32.60	7.32	36.85	0.00	101	236	Peak																																																																																																															
2	3616.00	109.54	-----	104.37	32.86	8.89	36.58	0.00	101	236	Peak																																																																																																															
3	5210.00	98.23	-----	90.15	34.68	10.72	37.32	0.00	101	236	PEAK																																																																																																															
Avg																																																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.76</td><td>50.67</td><td>54.00</td><td>-3.33</td><td>42.76</td><td>34.60</td><td>10.65</td><td>37.34</td><td>0.00</td><td>101</td><td>236</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5149.76	50.67	54.00	-3.33	42.76	34.60	10.65	37.34	0.00	101	236	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2476.00</td><td>88.52</td><td>-----</td><td>85.45</td><td>32.60</td><td>7.32</td><td>36.85</td><td>0.00</td><td>101</td><td>236</td><td>Average</td></tr><tr><td>2</td><td>3616.00</td><td>106.02</td><td>-----</td><td>100.85</td><td>32.86</td><td>8.89</td><td>36.58</td><td>0.00</td><td>101</td><td>236</td><td>Average</td></tr><tr><td>3</td><td>5210.00</td><td>88.73</td><td>-----</td><td>80.65</td><td>34.69</td><td>10.71</td><td>37.32</td><td>0.00</td><td>101</td><td>236</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2476.00	88.52	-----	85.45	32.60	7.32	36.85	0.00	101	236	Average	2	3616.00	106.02	-----	100.85	32.86	8.89	36.58	0.00	101	236	Average	3	5210.00	88.73	-----	80.65	34.69	10.71	37.32	0.00	101	236
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																
1	5149.76	50.67	54.00	-3.33	42.76	34.60	10.65	37.34	0.00	101	236	AVERAGE																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																
1	2476.00	88.52	-----	85.45	32.60	7.32	36.85	0.00	101	236	Average																																																																																																															
2	3616.00	106.02	-----	100.85	32.86	8.89	36.58	0.00	101	236	Average																																																																																																															
3	5210.00	88.73	-----	80.65	34.69	10.71	37.32	0.00	101	236	AVERAGE																																																																																																															

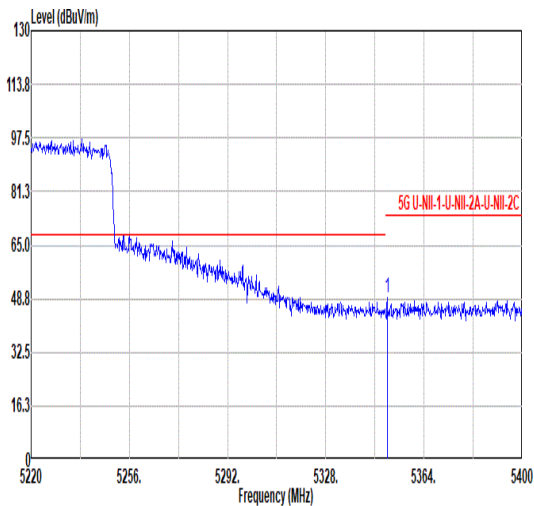
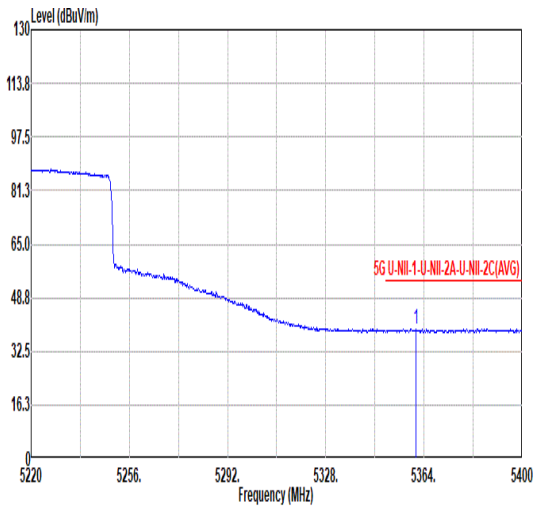


Mode	2																																																							
	Band Edge - R																																																							
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full_5210MHz																																																							
ANT	6																																																							
Pol.	Horizontal						Fundamental																																																	
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.50</td><td>49.25</td><td>74.00</td><td>-24.75</td><td>40.90</td><td>34.00</td><td>10.84</td><td>37.29</td><td>0.00</td><td>101</td><td>236</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5350.50	49.25	74.00	-24.75	40.90	34.00	10.84	37.29	0.00	101	236	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5350.50	49.25	74.00	-24.75	40.90	34.00	10.84	37.29	0.00	101	236	PEAK																																												
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5361.12</td><td>39.34</td><td>54.00</td><td>-14.66</td><td>31.02</td><td>34.76</td><td>10.85</td><td>37.29</td><td>0.00</td><td>101</td><td>236</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5361.12	39.34	54.00	-14.66	31.02	34.76	10.85	37.29	0.00	101	236	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5361.12	39.34	54.00	-14.66	31.02	34.76	10.85	37.29	0.00	101	236	AVERAGE																																												

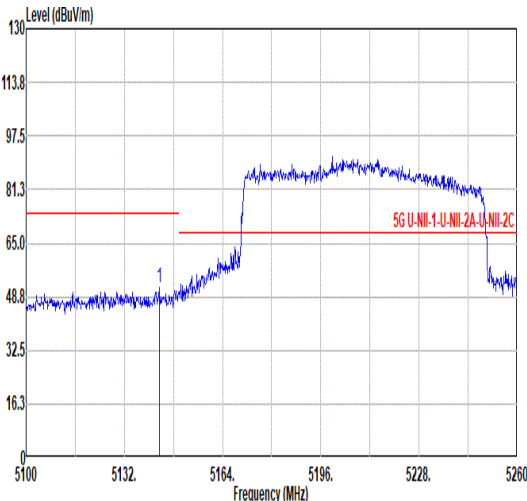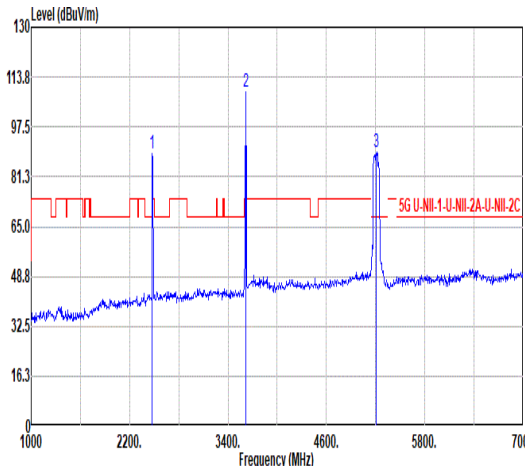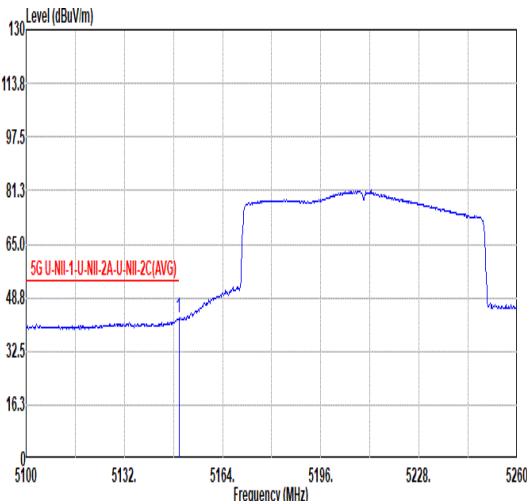
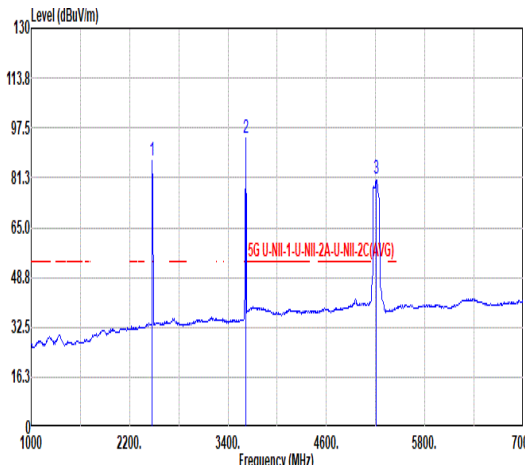


Mode	2																																																																																																																									
	Band Edge - L																																																																																																																									
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full_5210MHz																																																																																																																									
ANT	6																																																																																																																									
Pol.	Vertical						Fundamental																																																																																																																			
Peak																																																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5143.36</td><td>51.34</td><td>74.00</td><td>-22.66</td><td>43.40</td><td>34.63</td><td>10.65</td><td>37.34</td><td>0.00</td><td>376</td><td>116</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5143.36	51.34	74.00	-22.66	43.40	34.63	10.65	37.34	0.00	376	116	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2476.00</td><td>88.86</td><td>-----</td><td>85.79</td><td>32.60</td><td>7.32</td><td>36.85</td><td>0.00</td><td>376</td><td>116</td><td>Peak</td></tr><tr><td>2</td><td>3616.00</td><td>108.67</td><td>-----</td><td>103.50</td><td>32.86</td><td>8.89</td><td>36.58</td><td>0.00</td><td>376</td><td>116</td><td>Peak</td></tr><tr><td>3</td><td>5210.00</td><td>89.32</td><td>-----</td><td>81.24</td><td>34.68</td><td>10.72</td><td>37.32</td><td>0.00</td><td>376</td><td>116</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2476.00	88.86	-----	85.79	32.60	7.32	36.85	0.00	376	116	Peak	2	3616.00	108.67	-----	103.50	32.86	8.89	36.58	0.00	376	116	Peak	3	5210.00	89.32	-----	81.24	34.68	10.72	37.32	0.00	376	116
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	5143.36	51.34	74.00	-22.66	43.40	34.63	10.65	37.34	0.00	376	116	PEAK																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	2476.00	88.86	-----	85.79	32.60	7.32	36.85	0.00	376	116	Peak																																																																																																															
2	3616.00	108.67	-----	103.50	32.86	8.89	36.58	0.00	376	116	Peak																																																																																																															
3	5210.00	89.32	-----	81.24	34.68	10.72	37.32	0.00	376	116	PEAK																																																																																																															
Avg																																																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.76</td><td>42.48</td><td>54.00</td><td>-11.52</td><td>34.57</td><td>34.60</td><td>10.65</td><td>37.34</td><td>0.00</td><td>376</td><td>116</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.76	42.48	54.00	-11.52	34.57	34.60	10.65	37.34	0.00	376	116	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2476.00</td><td>86.75</td><td>-----</td><td>83.68</td><td>32.60</td><td>7.32</td><td>36.85</td><td>0.00</td><td>376</td><td>116</td><td>Average</td></tr><tr><td>2</td><td>3616.00</td><td>94.11</td><td>-----</td><td>88.94</td><td>32.86</td><td>8.89</td><td>36.58</td><td>0.00</td><td>376</td><td>116</td><td>Average</td></tr><tr><td>3</td><td>5210.00</td><td>80.75</td><td>-----</td><td>77.68</td><td>32.60</td><td>7.32</td><td>36.85</td><td>0.00</td><td>376</td><td>116</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2476.00	86.75	-----	83.68	32.60	7.32	36.85	0.00	376	116	Average	2	3616.00	94.11	-----	88.94	32.86	8.89	36.58	0.00	376	116	Average	3	5210.00	80.75	-----	77.68	32.60	7.32	36.85	0.00	376	116
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	5149.76	42.48	54.00	-11.52	34.57	34.60	10.65	37.34	0.00	376	116	AVERAGE																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	2476.00	86.75	-----	83.68	32.60	7.32	36.85	0.00	376	116	Average																																																																																																															
2	3616.00	94.11	-----	88.94	32.86	8.89	36.58	0.00	376	116	Average																																																																																																															
3	5210.00	80.75	-----	77.68	32.60	7.32	36.85	0.00	376	116	AVERAGE																																																																																																															



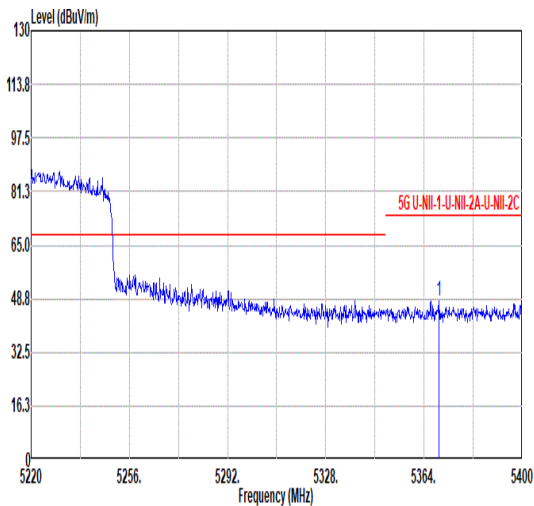
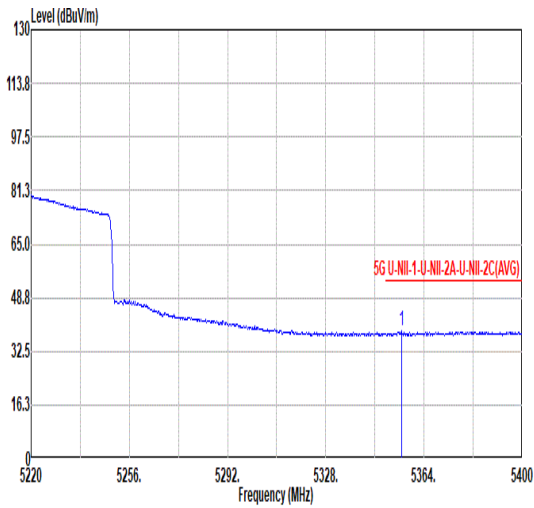


Mode	2																																																							
	Band Edge - R																																																							
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full_5210MHz																																																							
ANT	6																																																							
Pol.	Vertical						Fundamental																																																	
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5369.40</td><td>48.08</td><td>74.00</td><td>-25.92</td><td>39.79</td><td>34.72</td><td>10.86</td><td>37.29</td><td>0.00</td><td>376</td><td>116</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5369.40	48.08	74.00	-25.92	39.79	34.72	10.86	37.29	0.00	376	116	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5369.40	48.08	74.00	-25.92	39.79	34.72	10.86	37.29	0.00	376	116	PEAK																																												
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5355.72</td><td>38.67</td><td>54.00</td><td>-15.33</td><td>30.33</td><td>34.78</td><td>10.85</td><td>37.29</td><td>0.00</td><td>376</td><td>116</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5355.72	38.67	54.00	-15.33	30.33	34.78	10.85	37.29	0.00	376	116	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5355.72	38.67	54.00	-15.33	30.33	34.78	10.85	37.29	0.00	376	116	AVERAGE																																												



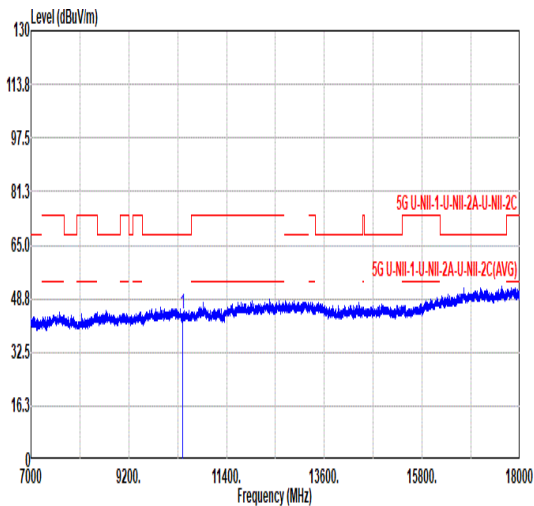
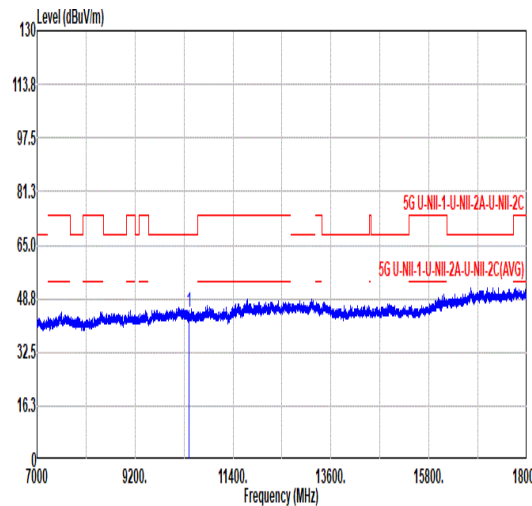


Mode	2																																																																																																																
	Harmonic																																																																																																																
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full_5210MHz																																																																																																																
ANT	6																																																																																																																
Pol.	Horizontal						Vertical																																																																																																										
Peak Avg																																																																																																																	
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 10420.00</td><td>44.20</td><td>68.20</td><td>-24.00</td><td>57.82</td><td>37.60</td><td>15.33</td><td>66.55</td><td>0.00</td><td>--</td><td>--</td><td>--</td><td>PEAK</td></tr></table>								Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg		1 10420.00	44.20	68.20	-24.00	57.82	37.60	15.33	66.55	0.00	--	--	--	PEAK	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 10420.00</td><td>44.50</td><td>68.20</td><td>-23.70</td><td>58.09</td><td>37.62</td><td>15.34</td><td>66.55</td><td>0.00</td><td>--</td><td>--</td><td>--</td><td>PEAK</td></tr></table>								Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg		1 10420.00	44.50	68.20	-23.70	58.09	37.62	15.34	66.55	0.00	--	--	--
		Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																						
1 10420.00	44.20	68.20	-24.00	57.82	37.60	15.33	66.55	0.00	--	--	--	PEAK																																																																																																					
		Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																						
1 10420.00	44.50	68.20	-23.70	58.09	37.62	15.34	66.55	0.00	--	--	--	PEAK																																																																																																					

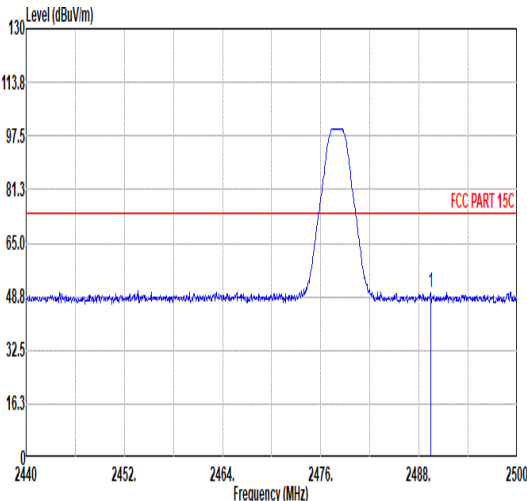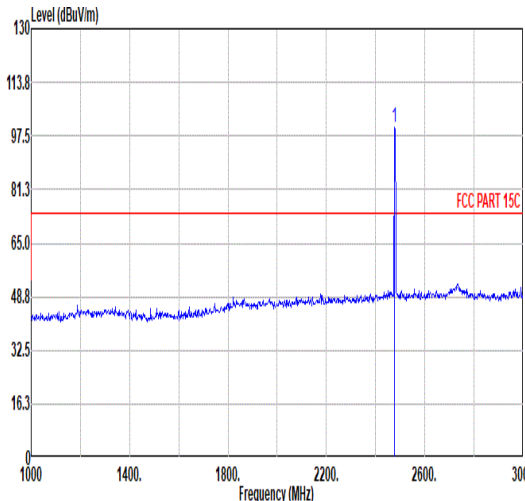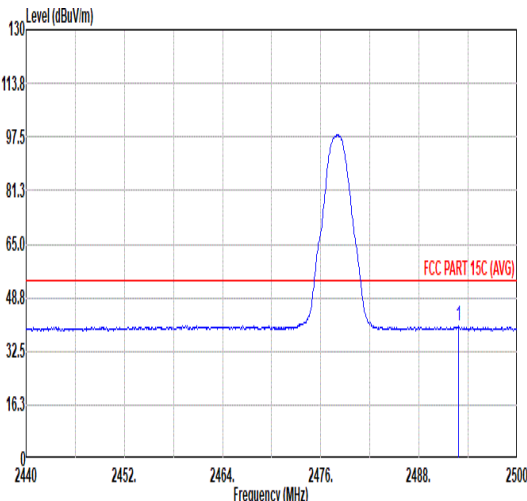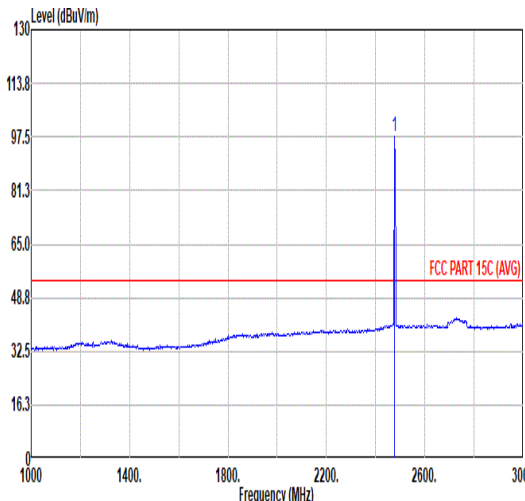

Mode	2																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_2400-2483.5_Bluetooth-LE_CH38_Full_2478MHz																																																																																																		
ANT	6																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2489.44</td><td>50.27</td><td>74.00</td><td>-23.73</td><td>41.18</td><td>32.60</td><td>7.34</td><td>36.85</td><td>6.00</td><td>163</td><td>301</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2489.44	50.27	74.00	-23.73	41.18	32.60	7.34	36.85	6.00	163	301	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2478.00</td><td>100.04</td><td>-----</td><td>-----</td><td>90.97</td><td>32.60</td><td>7.32</td><td>36.85</td><td>6.00</td><td>163</td><td>301</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	100.04	-----	-----	90.97	32.60	7.32	36.85	6.00	163	301
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2489.44	50.27	74.00	-23.73	41.18	32.60	7.34	36.85	6.00	163	301	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2478.00	100.04	-----	-----	90.97	32.60	7.32	36.85	6.00	163	301	PEAK																																																																																							
Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2492.00</td><td>40.02</td><td>54.00</td><td>-13.98</td><td>30.92</td><td>32.60</td><td>7.35</td><td>36.85</td><td>6.00</td><td>163</td><td>301</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2492.00	40.02	54.00	-13.98	30.92	32.60	7.35	36.85	6.00	163	301	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2478.00</td><td>97.84</td><td>-----</td><td>-----</td><td>88.77</td><td>32.60</td><td>7.32</td><td>36.85</td><td>6.00</td><td>163</td><td>301</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	97.84	-----	-----	88.77	32.60	7.32	36.85	6.00	163	301
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2492.00	40.02	54.00	-13.98	30.92	32.60	7.35	36.85	6.00	163	301	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2478.00	97.84	-----	-----	88.77	32.60	7.32	36.85	6.00	163	301	AVERAGE																																																																																							

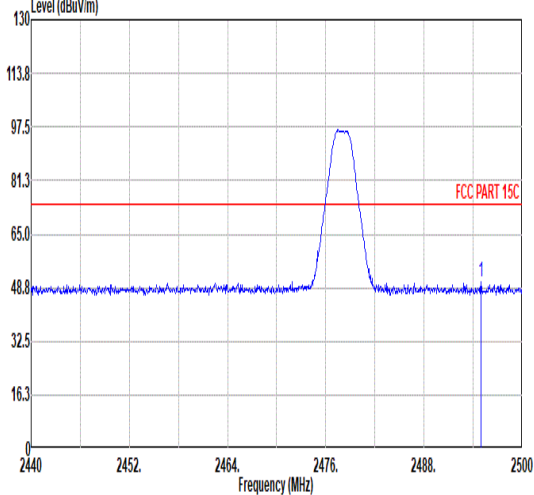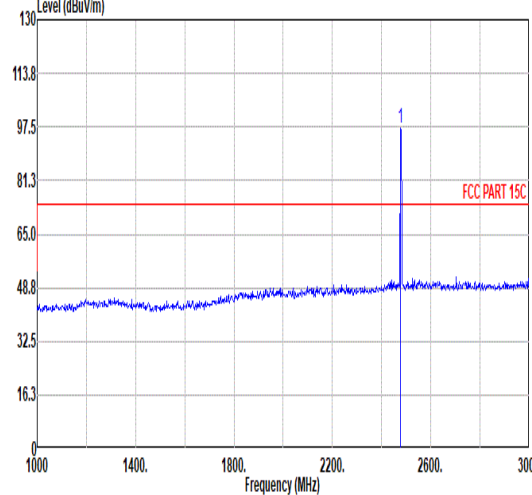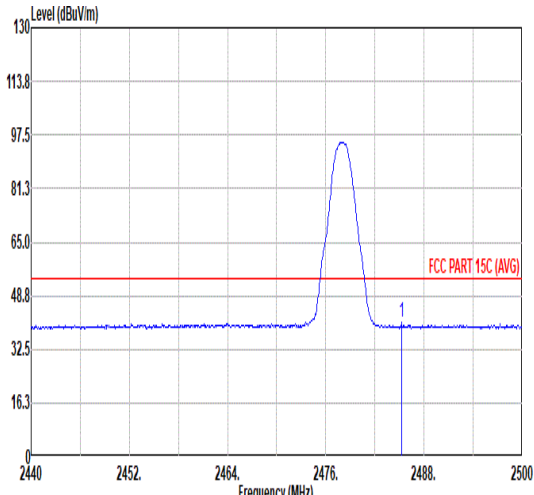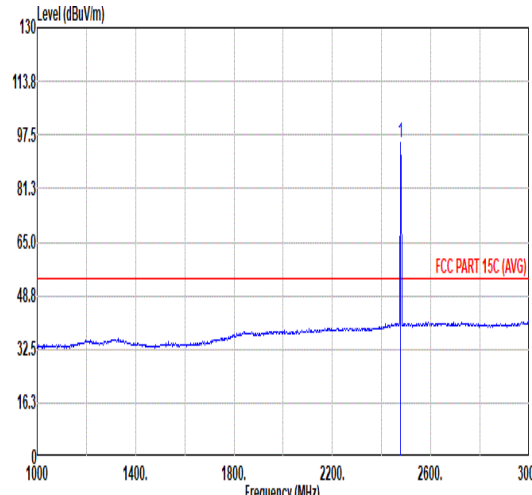

Mode	2																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_2400-2483.5_Bluetooth-LE_CH38_Full_2478MHz																																																																																																		
ANT	6																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2494.96</td><td>50.36</td><td>74.00</td><td>-23.64</td><td>41.26</td><td>32.60</td><td>7.35</td><td>36.85</td><td>6.00</td><td>303</td><td>56</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2494.96	50.36	74.00	-23.64	41.26	32.60	7.35	36.85	6.00	303	56	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2478.00</td><td>97.33</td><td>-----</td><td>-----</td><td>88.26</td><td>32.60</td><td>7.32</td><td>36.85</td><td>6.00</td><td>303</td><td>56</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	97.33	-----	-----	88.26	32.60	7.32	36.85	6.00	303	56
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2494.96	50.36	74.00	-23.64	41.26	32.60	7.35	36.85	6.00	303	56	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2478.00	97.33	-----	-----	88.26	32.60	7.32	36.85	6.00	303	56	PEAK																																																																																							
Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2485.24</td><td>40.48</td><td>54.00</td><td>-13.52</td><td>31.40</td><td>32.60</td><td>7.33</td><td>36.85</td><td>6.00</td><td>303</td><td>56</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2485.24	40.48	54.00	-13.52	31.40	32.60	7.33	36.85	6.00	303	56	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2478.00</td><td>95.32</td><td>-----</td><td>-----</td><td>86.25</td><td>32.60</td><td>7.32</td><td>36.85</td><td>6.00</td><td>303</td><td>56</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	95.32	-----	-----	86.25	32.60	7.32	36.85	6.00	303	56
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2485.24	40.48	54.00	-13.52	31.40	32.60	7.33	36.85	6.00	303	56	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2478.00	95.32	-----	-----	86.25	32.60	7.32	36.85	6.00	303	56	AVERAGE																																																																																							



Mode	2																																																																																																																																										
	Harmonic																																																																																																																																										
	2400-2483.5_2400-2483.5_Bluetooth-LE_CH38_Full_2478MHz																																																																																																																																										
ANT	6																																																																																																																																										
Pol.	Horizontal						Vertical																																																																																																																																				
Peak Avg																																																																																																																																											
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4956.00</td><td>51.92</td><td>74.00</td><td>-22.08</td><td>72.55</td><td>34.56</td><td>10.44</td><td>65.63</td><td>0.00</td><td>100</td><td>234</td><td>PEAK</td></tr><tr><td>2</td><td>4956.00</td><td>46.87</td><td>54.00</td><td>-7.13</td><td>67.50</td><td>34.56</td><td>10.44</td><td>65.63</td><td>0.00</td><td>100</td><td>234</td><td>AVERAGE</td></tr><tr><td>3</td><td>5222.00</td><td>54.27</td><td>74.00</td><td>-19.73</td><td>74.58</td><td>34.66</td><td>10.73</td><td>65.70</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4956.00	51.92	74.00	-22.08	72.55	34.56	10.44	65.63	0.00	100	234	PEAK	2	4956.00	46.87	54.00	-7.13	67.50	34.56	10.44	65.63	0.00	100	234	AVERAGE	3	5222.00	54.27	74.00	-19.73	74.58	34.66	10.73	65.70	0.00	--	--	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4956.00</td><td>46.02</td><td>74.00</td><td>-27.98</td><td>66.65</td><td>34.56</td><td>10.44</td><td>65.63</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>5224.00</td><td>48.44</td><td>74.00</td><td>-25.56</td><td>68.76</td><td>34.65</td><td>10.73</td><td>65.70</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4956.00	46.02	74.00	-27.98	66.65	34.56	10.44	65.63	0.00	--	--	PEAK	2	5224.00	48.44	74.00	-25.56	68.76	34.65	10.73	65.70	0.00	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	4956.00	51.92	74.00	-22.08	72.55	34.56	10.44	65.63	0.00	100	234	PEAK																																																																																																																															
2	4956.00	46.87	54.00	-7.13	67.50	34.56	10.44	65.63	0.00	100	234	AVERAGE																																																																																																																															
3	5222.00	54.27	74.00	-19.73	74.58	34.66	10.73	65.70	0.00	--	--	Peak																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	4956.00	46.02	74.00	-27.98	66.65	34.56	10.44	65.63	0.00	--	--	PEAK																																																																																																																															
2	5224.00	48.44	74.00	-25.56	68.76	34.65	10.73	65.70	0.00	--	--	Peak																																																																																																																															

Note: For all plots above, the over limit line signals are Fundamental signal which can be ignored.




LTE Band 48 / 20MHz / QPSK / Ant.5								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	7231	-58.82	-40	-18.82	-70.28	2.84	14.30	H
	10850	-56.40	-40	-16.40	-66.34	3.49	13.43	H
	14469	-61.02	-40	-21.02	-71.26	3.85	14.09	H
	7231	-60.93	-40	-20.93	-72.39	2.84	14.30	V
	10850	-49.88	-40	-9.88	-59.82	3.49	13.43	V
	14469	-57.38	-40	-17.38	-67.62	3.85	14.09	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Part 96_ LTE Band 48


ANT 5

Horizontal

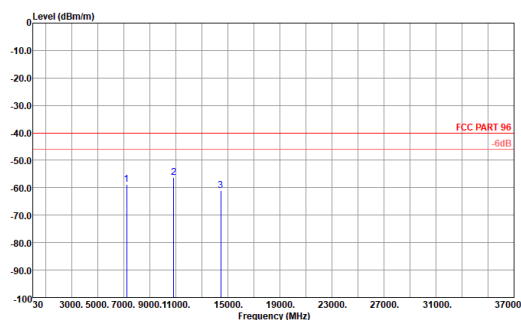

	Freq	Level	Over	Limit	Read	Pol/Phase
	MHz	dBm/m	Limit	Line	Level	
1	7231.00	-58.82	-18.82	-40.00	-53.06	HORIZONTAL
2	10850.00	-56.40	-16.40	-40.00	-57.88	HORIZONTAL
3	14469.00	-61.02	-21.02	-40.00	-65.52	HORIZONTAL

Vertical

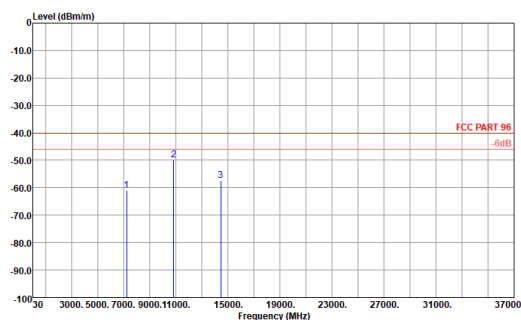

	Freq	Level	Over	Limit	Read	Pol/Phase
	MHz	dBm/m	Limit	Line	Level	
1	7231.00	-60.93	-20.93	-40.00	-55.14	VERTICAL
2	10850.00	-49.88	-9.88	-40.00	-51.26	VERTICAL
3	14469.00	-57.38	-17.38	-40.00	-61.87	VERTICAL



Appendix C. Reference Report



FCC RF Test Report

APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : Redmi
MODEL NAME : 24090RA29G
FCC ID : 2AFZZRA29G
STANDARD : 47 CFR Part 22(H), 24(E), 27(L)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S) : Jul. 23, 2024 ~ Jul. 27, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	5
1.5 Modification of EUT	6
1.6 Maximum ERP/EIRP Power, and Emission Designator	7
1.7 Testing Location	7
1.8 Test Software	7
1.9 Applicable Standards	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Test Mode.....	9
2.2 Connection Diagram of Test System	10
2.3 Support Unit used in test configuration	10
2.4 Measurement Results Explanation Example	11
2.5 Frequency List of Low/Middle/High Channels	11
3 CONDUCTED TEST RESULT.....	12
3.1 Measuring Instruments.....	12
3.2 Test Setup	12
3.3 Test Result of Conducted Test.....	12
3.4 Conducted Output Power and ERP/EIRP	13
3.5 Peak-to-Average Ratio	14
3.6 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....	15
3.7 Conducted Band Edge	16
3.8 Conducted Spurious Emission	17
3.9 Frequency Stability	18
4 RADIATED TEST ITEMS	19
4.1 Measuring Instruments.....	19
4.2 Test Setup	19
4.3 Test Result of Radiated Test.....	20
4.4 Field Strength of Spurious Radiation Measurement	21
5 LIST OF MEASURING EQUIPMENT	22
6 MEASUREMENT UNCERTAINTY	23
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG471506A	Rev. 01	Initial issue of report	Aug. 19, 2024



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	-	Report Only	-
	§22.913(a)(5)	Effective Radiated Power	< 7 Watts	PASS	-
	§24.232(c)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
	§27.50(d)(4)	Equivalent Isotropic Radiated Power	< 1 Watts	PASS	-
3.5	§24.232(d)	Peak-to-Average Ratio	< 13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Band Edge Measurement	< 43+10log10(P[Watts])	PASS	-
3.8	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Conducted Emission	< 43+10log10(P[Watts])	PASS	-
3.9	§2.1055 §22.355	Frequency Stability for Temperature & Voltage	< 2.5 ppm for Part 22	PASS	-
	§2.1055 §24.235 §27.54		Within Authorized Band		
4.4	§2.1053; §22.917(a); §24.238(a); §27.53(h)	Field Strength of Spurious Radiation	< 43+10log10(P[Watts])	PASS	Under limit 33.69 dB at 2512.00 MHz

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.2 Manufacturer

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	Redmi
Model Name	24090RA29G
FCC ID	2AFZZRA29G
IMEI Code	Conducted: 861793070041148/861793070041155 Radiation: 861793070039324/861793070039332
HW Version	135300O16
SW Version	Xiaomi HyperOS 1.0
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	GSM/GPRS/EDGE: 850: 824 MHz ~ 849 MHz 1900: 1850MHz ~ 1910MHz WCDMA: Band V: 824 MHz ~ 849 MHz Band II: 1850 MHz ~ 1910 MHz Band IV: 1710 MHz ~ 1755 MHz
Rx Frequency	GSM/GPRS/EDGE: 850: 869 MHz ~ 894 MHz 1900: 1930 MHz ~ 1990 MHz WCDMA: Band V: 869 MHz ~ 894 MHz Band II: 1930 MHz ~ 1990 MHz Band IV: 2110 MHz ~ 2155 MHz

Maximum Output Power to Antenna	GSM/GPRS/EDGE: 850<ANT1>: 32.29 dBm 850<ANT4>: 32.46 dBm 1900<ANT1>: 29.45 dBm 1900<ANT4>: 28.54 dBm WCDMA: Band V<ANT1>: 24.50 dBm Band V<ANT4>: 24.48 dBm Band II<ANT1>: 22.98 dBm Band II<ANT4>: 22.66 dBm Band IV<ANT1>: 23.96 dBm Band IV<ANT4>: 23.84 dBm
Antenna Type	PIFA Antenna
Antenna Gain	<ANT1> Cellular Band: -4.0 dBi PCS Band: -0.7 dBi AWS Band: 0.77 dBi <ANT4> Cellular Band: -5.9 dBi PCS Band: -0.7 dBi AWS Band: -1.0 dBi
Type of Modulation	GSM: GMSK GPRS: GMSK EDGE: GMSK / 8PSK WCDMA: BPSK (Uplink) HSDPA: QPSK (Uplink) HSUPA: QPSK (Uplink) HSPA+ : 16QAM

Note: The maximum ERP/EIRP is calculated from max output power and max antenna gain, only the maximum ERP/EIRP of Ant.1 for GSM850/GSM1900/WCDMA Band II/V/IV are shown in the report.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Maximum ERP/EIRP Power, and Emission Designator

FCC Rule	Frequency Band	Frequency Range (MHz)	Type of Modulation	Maximum ERP/EIRP (W)	Emission Designator
Part 22	GSM850 (GSM)	824.2 ~ 848.8	GMSK	0.4111	245KGXW
Part 22	GSM850 (EDGE)	824.2 ~ 848.8	8PSK	0.1213	250KG7W
Part 22	WCDMA Band V	826.4 ~ 846.6	BPSK	0.0684	4M15F9W
Part 24	GSM1900 (GSM)	1850.2 ~ 1909.8	GMSK	0.7499	243KGXW
Part 24	GSM1900 (EDGE)	1850.2 ~ 1909.8	8PSK	0.3311	242KG7W
Part 24	WCDMA Band II	1852.4 ~ 1907.6	BPSK	0.1690	4M16F9W
Part 27	WCDMA Band IV	1712.4 ~ 1752.6	BPSK	0.2972	4M16F9W

1.7 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-KS TH01-KS	CN1257	314309

1.8 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	SPORTON	Part2224_Ver5.0 200330	5.0
2.	03CH04-KS	AUDIX	E3	210616



1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 22(H), 24(E), 27(L)
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:


1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V.
2. 30 MHz to 18000 MHz for WCDMA Band IV.
3. 30 MHz to 19100 MHz for GSM1900 and WCDMA Band II.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 850	■ GSM Link ■ EDGE 1 Tx slots Link	■ GSM Link ■ EDGE 1 Tx slots Link
GSM 1900	■ GSM Link ■ EDGE 1 Tx slots Link	■ GSM Link ■ EDGE 1 Tx slots Link
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band IV	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link

2.2 Connection Diagram of Test System

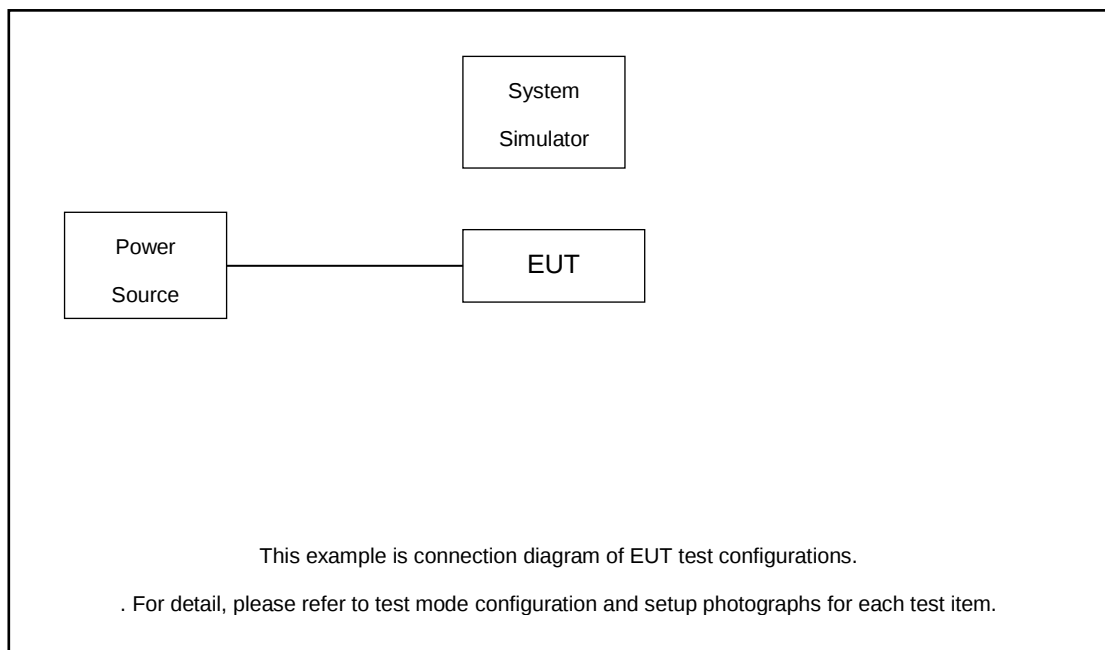

The EUT has been configuration operated in a manner tended to maximize its emission characteristics in a typical application.

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	System Simulator	Agilent	E5515C	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.9 dB and a 10dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.9 + 10 = 14.9 \text{ (dB)} \end{aligned}$$

2.5 Frequency List of Low/Middle/High Channels

Frequency List				
Band	Channel/Frequency(MHz)	Lowest	Middle	Highest
GSM850	Channel	128	189	251
	Frequency	824.2	836.4	848.8
WCDMA Band V	Channel	4132	4182	4233
	Frequency	826.4	836.4	846.6
GSM1900	Channel	512	661	810
	Frequency	1850.2	1880.0	1909.8
WCDMA Band II	Channel	9262	9400	9538
	Frequency	1852.4	1880.0	1907.6
WCDMA Band IV	Channel	1312	1413	1513
	Frequency	1712.4	1732.6	1752.6


3 Conducted Test Result

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

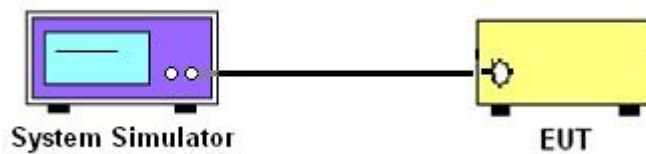

3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

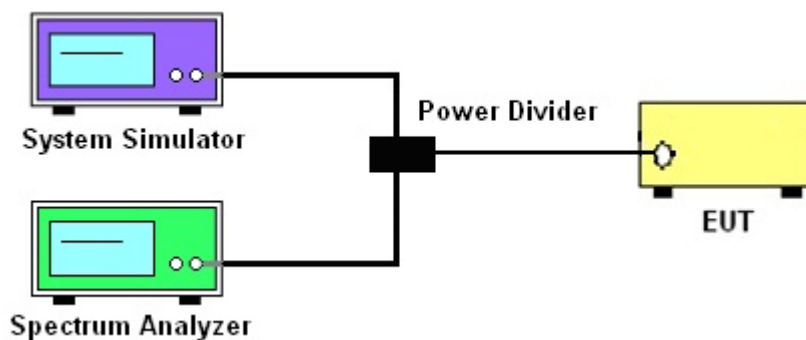

3.2.3 Frequency Stability

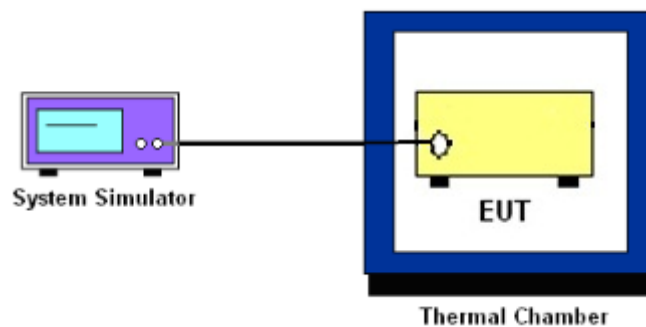

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power and ERP/EIRP

3.4.1 Description of the Conducted Output Power and ERP/EIRP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for GSM850 and WCDMA Band V.

The EIRP of mobile transmitters must not exceed 2 Watts for GSM1900 and WCDMA Band II.

The EIRP of mobile transmitters must not exceed 1 Watts for WCDMA Band IV.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.



3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.6.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator.
The path loss was compensated to the results for each measurement.
4. The band edges of low and high channels for the highest RF powers were measured.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

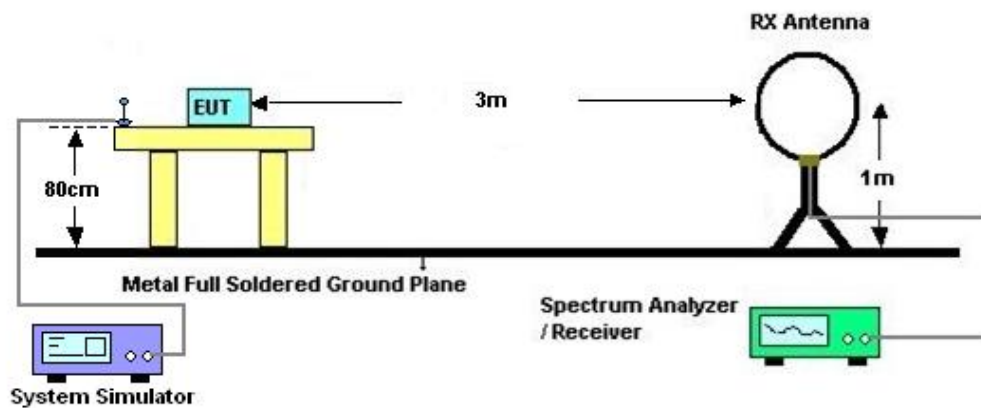

4.2.2 For radiated test from 30MHz to 1GHz

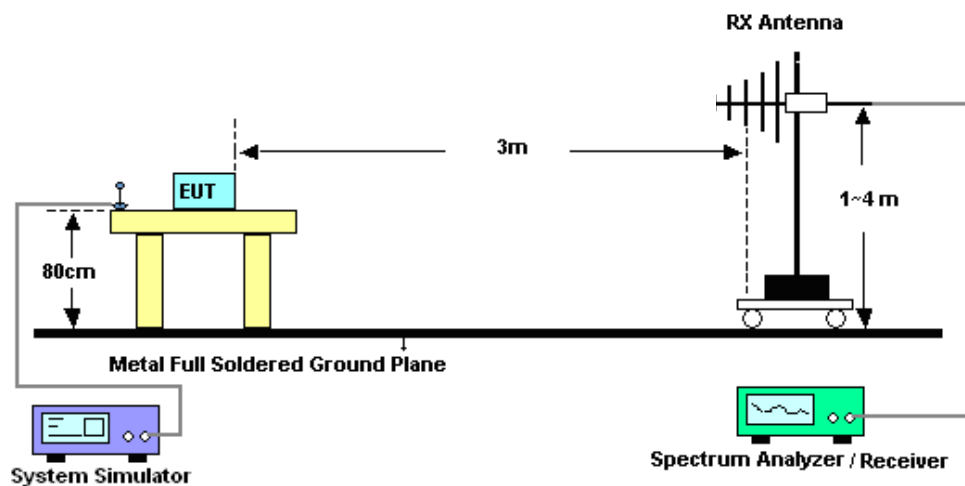

4.2.3 For radiated test above 1GHz

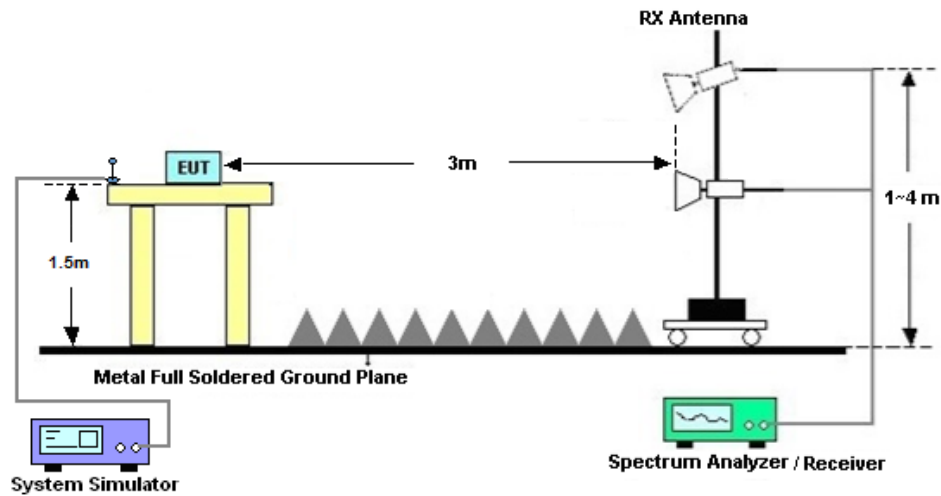

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Field Strength of Spurious Radiation Measurement

4.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a rotatable wooden table 0.8 meters for frequency below 1GHz and 1.5 meter for frequency above 1GHz above the ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
12. $ERP \text{ (dBm)} = EIRP - 2.15$
13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
14. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Jul. 27, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	Jul. 27, 2024	NCR	Conducted (TH01-KS)
Temperature & humidity	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 04, 2024	Jul. 27, 2024	Jul. 03, 2025	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471079	10Hz~44G,MAX 30dB	Oct. 11, 2023	Jul. 23, 2024	Oct. 10, 2024	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 11 2023	Jul. 23, 2024	Sep. 10, 2024	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	59913	30MHz~1GHz	Aug. 19, 2023	Jul. 23, 2024	Aug. 18, 2024	Radiation (03CH04-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 23, 2023	Jul. 23, 2024	Oct. 22, 2024	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 27, 2024	Jul. 23, 2024	Jan. 26, 2025	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	413740	9KHz~1GHz	Jan. 03, 2024	Jul. 23, 2024	Jan. 02, 2025	Radiation (03CH04-KS)
Amplifier	EM	EM18G40G A	060728	18~40GHz	Jan. 02, 2024	Jul. 23, 2024	Jan. 01, 2025	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18G A	060840	1Ghz~18Ghz	Oct. 11, 2023	Jul. 23, 2024	Oct. 10, 2024	Radiation (03CH04-KS)
Amplifier	EM	EM01G18G A	060892	1Ghz~18Ghz	Oct. 11, 2023	Jul. 23, 2024	Oct. 10, 2024	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jul. 23, 2024	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jul. 23, 2024	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jul. 23, 2024	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required

6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	± 2.26 dB
Occupied Channel Bandwidth	$\pm 0.1\%$
Conducted Power	± 0.46 dB
Peak to Average Ratio	± 0.46 dB
Frequency Stability	± 0.4 Hz

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.83 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.83 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.82 dB
---	---------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Smile Wang	Temperature :	22~23°C
		Relative Humidity :	40~42%

Conducted Output Power(Average power) and ERP/EIRP

GSM850_ANT1

GSM850	Burst Average Power (dBm)			ERP(W)		
TX Channel	128	189	251			
Frequency (MHz)	824.2	836.4	848.8	L	M	H
GSM 1 Tx slot	32.26	32.29	32.28	0.4083	0.4111	0.4102
GPRS 1 Tx slot	32.24	32.26	32.24	0.4064	0.4083	0.4064
GPRS 2 Tx slots	31.43	31.53	31.51	0.3373	0.3451	0.3436
GPRS 3 Tx slots	29.67	29.75	29.77	0.2249	0.2291	0.2301
GPRS 4 Tx slots	28.63	28.87	28.73	0.1770	0.1871	0.1811
EDGE 1 Tx slot	26.87	26.99	26.94	0.1180	0.1213	0.1199
EDGE 2 Tx slots	23.95	23.99	23.90	0.0603	0.0608	0.0596
EDGE 3 Tx slots	22.09	22.15	22.13	0.0393	0.0398	0.0396
EDGE 4 Tx slots	20.83	20.98	20.94	0.0294	0.0304	0.0301

GSM1900_ANT1

GSM1900	Burst Average Power (dBm)			EIRP(W)		
TX Channel	512	661	810			
Frequency (MHz)	1850.2	1880	1909.8	L	M	H
GSM 1 Tx slot	29.18	29.45	29.43	0.7047	0.7499	0.7464
GPRS 1 Tx slot	29.31	29.38	29.36	0.7261	0.7379	0.7345
GPRS 2 Tx slots	28.46	28.47	28.36	0.5970	0.5984	0.5834
GPRS 3 Tx slots	26.74	26.73	26.67	0.4018	0.4009	0.3954
GPRS 4 Tx slots	25.60	25.61	25.59	0.3090	0.3097	0.3083
EDGE 1 Tx slot	25.84	25.90	25.81	0.3266	0.3311	0.3243
EDGE 2 Tx slots	22.85	22.88	22.80	0.1641	0.1652	0.1622
EDGE 3 Tx slots	21.02	21.08	21.01	0.1076	0.1091	0.1074
EDGE 4 Tx slots	19.82	19.87	19.82	0.0817	0.0826	0.0817



WCAMA Band V_ANT1

Band		WCDMA V			ERP(W)		
TX Channel		4132	4182	4233			
Rx Channel		4357	4407	4458			
Frequency (MHz)		826.4	836.4	846.6	L	M	H
3GPP Rel 99	AMR 12.2Kbps	24.38	24.46	24.35	0.0665	0.0678	0.0661
3GPP Rel 99	RMC 12.2Kbps	24.48	24.50	24.44	0.0681	0.0684	0.0675
3GPP Rel 6	HSDPA Subtest-1	23.52	23.54	23.46	0.0546	0.0548	0.0538
3GPP Rel 6	HSDPA Subtest-2	23.50	23.47	23.43	0.0543	0.0540	0.0535
3GPP Rel 6	HSDPA Subtest-3	22.94	23.01	22.90	0.0478	0.0485	0.0473
3GPP Rel 6	HSDPA Subtest-4	23.01	22.98	22.91	0.0485	0.0482	0.0474
3GPP Rel 8	DC-HSDPA Subtest-1	23.46	23.56	23.41	0.0538	0.0551	0.0532
3GPP Rel 8	DC-HSDPA Subtest-2	23.47	23.53	23.48	0.0540	0.0547	0.0541
3GPP Rel 8	DC-HSDPA Subtest-3	23.01	23.04	22.94	0.0485	0.0489	0.0478
3GPP Rel 8	DC-HSDPA Subtest-4	23.01	23.01	22.97	0.0485	0.0485	0.0481
3GPP Rel 6	HSUPA Subtest-1	23.49	23.52	23.42	0.0542	0.0546	0.0533
3GPP Rel 6	HSUPA Subtest-2	21.48	21.50	21.41	0.0341	0.0343	0.0336
3GPP Rel 6	HSUPA Subtest-3	22.51	22.48	22.38	0.0433	0.0430	0.0420
3GPP Rel 6	HSUPA Subtest-4	21.46	21.51	21.45	0.0340	0.0344	0.0339
3GPP Rel 6	HSUPA Subtest-5	23.45	23.49	23.49	0.0537	0.0542	0.0542
3GPP Rel 7	HSPA+ (16QAM) Subtest-1	20.96	21.01	20.97	0.0303	0.0306	0.0303

WCAMA Band II_ANT1

Band		WCDMA II			EIRP(W)		
TX Channel		9262	9400	9538			
Rx Channel		9662	9800	9938			
Frequency (MHz)		1852.4	1880	1907.6	L	M	H
3GPP Rel 99	AMR 12.2Kbps	22.88	22.94	22.83	0.1652	0.1675	0.1633
3GPP Rel 99	RMC 12.2Kbps	22.91	22.98	22.93	0.1663	0.1690	0.1671
3GPP Rel 6	HSDPA Subtest-1	21.92	21.96	21.87	0.1324	0.1337	0.1309
3GPP Rel 6	HSDPA Subtest-2	21.88	21.96	21.97	0.1312	0.1337	0.1340
3GPP Rel 6	HSDPA Subtest-3	21.36	21.43	21.47	0.1164	0.1183	0.1194
3GPP Rel 6	HSDPA Subtest-4	21.37	21.53	21.43	0.1167	0.1211	0.1183
3GPP Rel 8	DC-HSDPA Subtest-1	21.89	22.04	21.88	0.1315	0.1361	0.1312
3GPP Rel 8	DC-HSDPA Subtest-2	21.90	22.01	21.94	0.1318	0.1352	0.1330
3GPP Rel 8	DC-HSDPA Subtest-3	21.38	21.44	21.45	0.1169	0.1186	0.1189
3GPP Rel 8	DC-HSDPA Subtest-4	21.46	21.48	21.45	0.1191	0.1197	0.1189
3GPP Rel 6	HSUPA Subtest-1	21.87	22.02	21.99	0.1309	0.1355	0.1346
3GPP Rel 6	HSUPA Subtest-2	19.88	19.99	19.98	0.0828	0.0849	0.0847
3GPP Rel 6	HSUPA Subtest-3	20.96	21.03	20.94	0.1062	0.1079	0.1057
3GPP Rel 6	HSUPA Subtest-4	19.86	19.93	19.88	0.0824	0.0838	0.0828
3GPP Rel 6	HSUPA Subtest-5	21.91	22.00	21.96	0.1321	0.1349	0.1337
3GPP Rel 7	HSPA+ (16QAM) Subtest-1	19.38	19.49	19.46	0.0738	0.0757	0.0752



WCAMA Band IV_ANT1

Band		WCDMA IV			EIRP(W)		
TX Channel		1312	1413	1513			
Rx Channel		1537	1638	1738			
Frequency (MHz)		1712.4	1732.6	1752.6	L	M	H
3GPP Rel 99	AMR 12.2Kbps	23.83	23.89	23.80	0.2884	0.2924	0.2864
3GPP Rel 99	RMC 12.2Kbps	23.91	23.96	23.92	0.2938	0.2972	0.2944
3GPP Rel 6	HSDPA Subtest-1	22.91	22.91	22.94	0.2333	0.2333	0.2350
3GPP Rel 6	HSDPA Subtest-2	22.93	22.93	22.94	0.2344	0.2344	0.2350
3GPP Rel 6	HSDPA Subtest-3	22.38	22.45	22.38	0.2065	0.2099	0.2065
3GPP Rel 6	HSDPA Subtest-4	22.46	22.47	22.40	0.2104	0.2109	0.2075
3GPP Rel 8	DC-HSDPA Subtest-1	22.89	23.02	22.91	0.2323	0.2393	0.2333
3GPP Rel 8	DC-HSDPA Subtest-2	22.94	22.98	22.96	0.2350	0.2371	0.2360
3GPP Rel 8	DC-HSDPA Subtest-3	22.40	22.51	22.45	0.2075	0.2128	0.2099
3GPP Rel 8	DC-HSDPA Subtest-4	22.42	22.41	22.46	0.2084	0.2080	0.2104
3GPP Rel 6	HSUPA Subtest-1	22.95	22.98	22.95	0.2355	0.2371	0.2355
3GPP Rel 6	HSUPA Subtest-2	20.96	20.95	20.94	0.1489	0.1486	0.1483
3GPP Rel 6	HSUPA Subtest-3	21.90	21.93	21.89	0.1849	0.1862	0.1845
3GPP Rel 6	HSUPA Subtest-4	20.88	20.99	20.91	0.1462	0.1500	0.1472
3GPP Rel 6	HSUPA Subtest-5	22.92	22.98	22.95	0.2339	0.2371	0.2355
3GPP Rel 7	HSPA+ (16QAM) Subtest-1	20.38	20.42	20.39	0.1303	0.1315	0.1306



GSM

Peak-to-Average Ratio

Mode	GSM850		Limit: 13dB
Mod.	GSM	EDGE class 8	Result
Lowest CH	0.12	3.25	PASS
Middle CH	0.12	2.87	
Highest CH	0.12	2.96	

Mode	GSM1900		Limit: 13dB
Mod.	GSM	EDGE class 8	Result
Lowest CH	0.17	3.16	PASS
Middle CH	0.14	2.87	
Highest CH	0.17	3.10	



GSM850 (GSM)

Lowest Channel



Date: 27_JUL_2024 01:53:58

GSM850 (EDGE class 8)

Lowest Channel



Date: 27_JUL_2024 02:19:21

Middle Channel




Date: 27_JUL_2024 01:54:11

Middle Channel




Date: 27_JUL_2024 02:19:34

Highest Channel

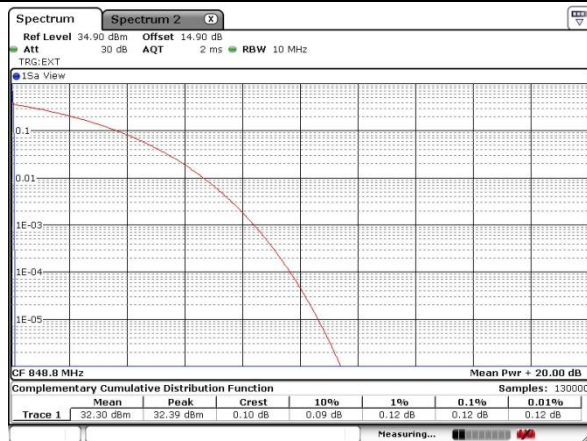


Date: 27_JUL_2024 01:54:25

Highest Channel

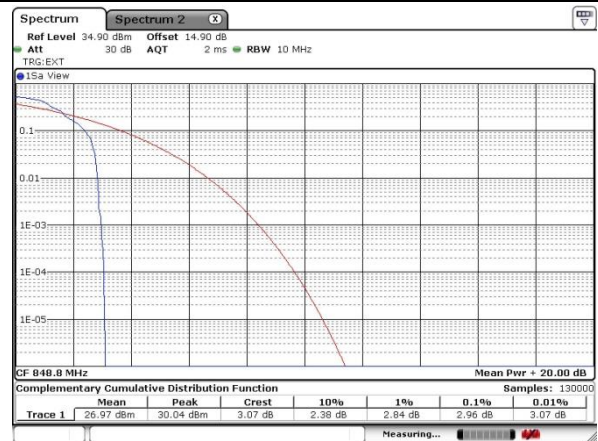

Date: 27_JUL_2024 02:19:44

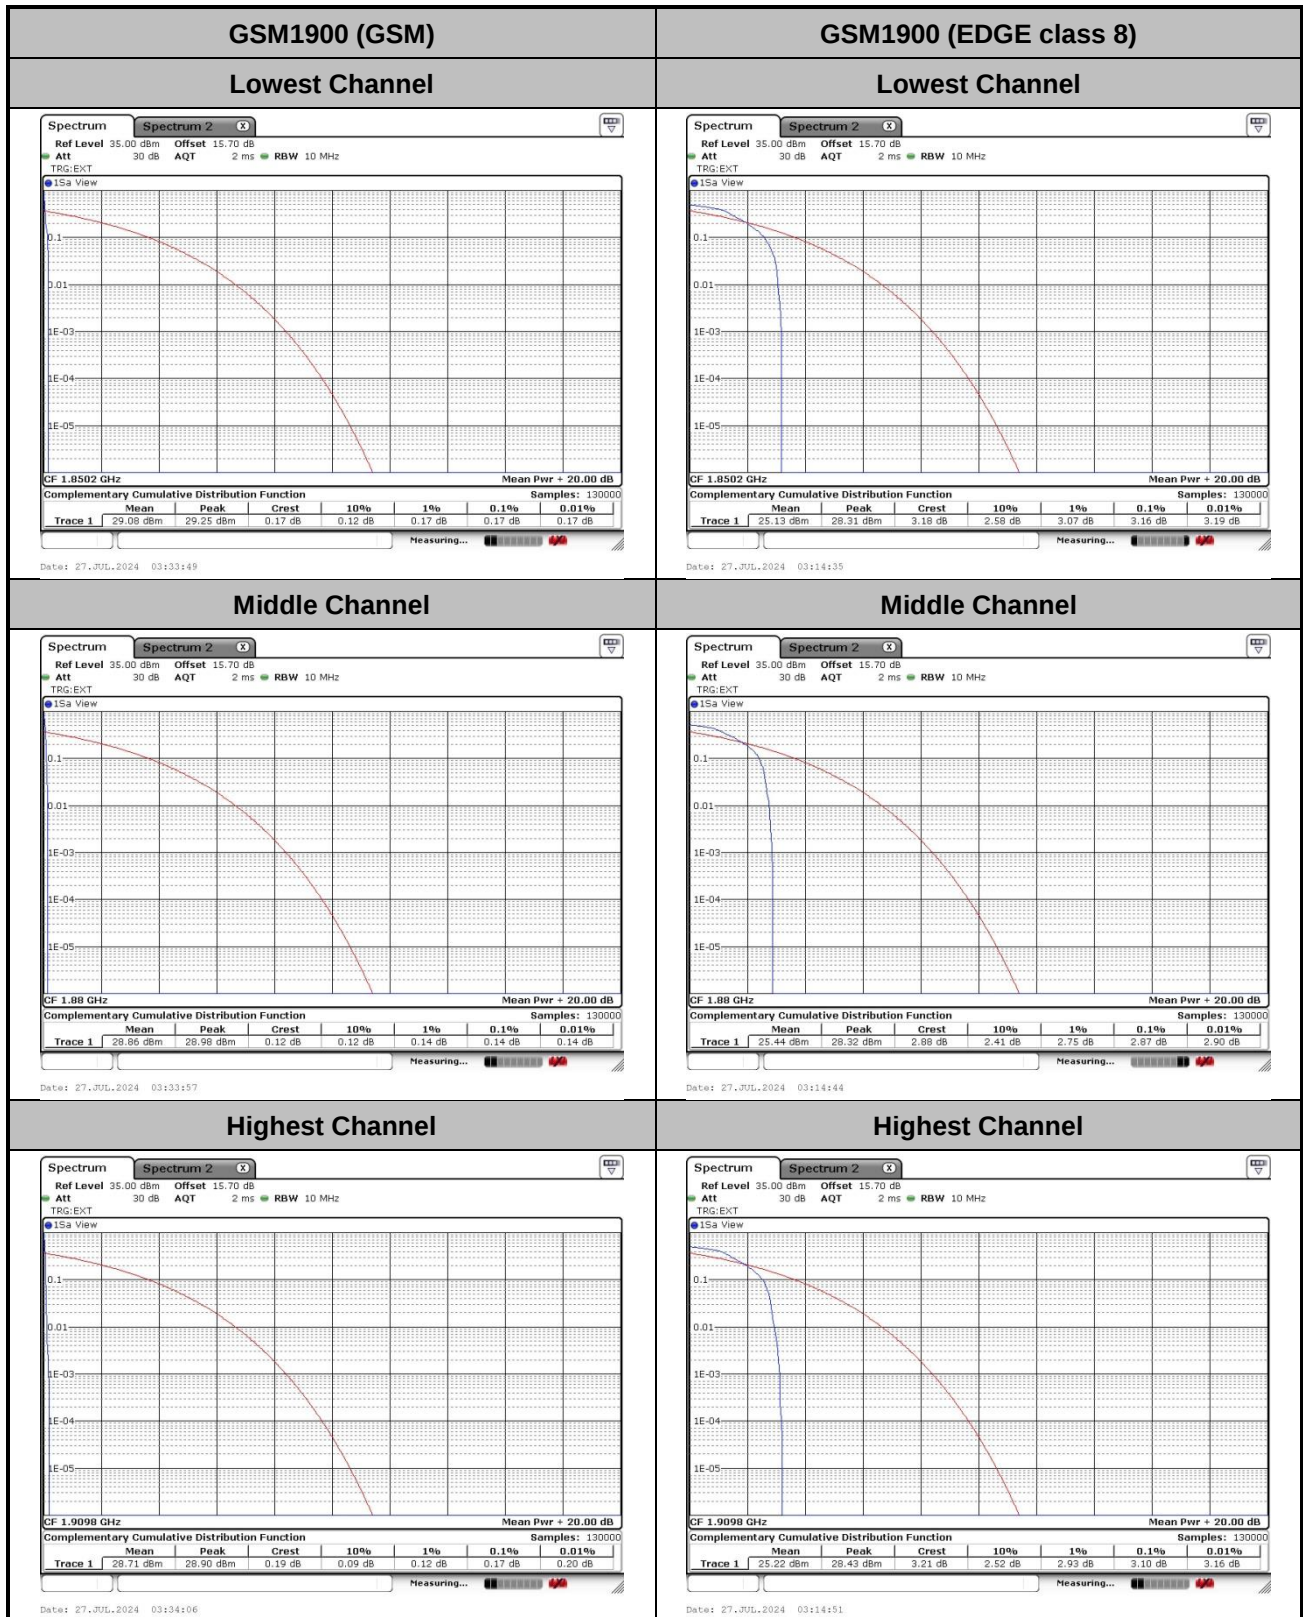



26dB Bandwidth


Mode	GSM850	
Mod.	GSM	EDGE class 8
Lowest CH	0.315	0.317
Middle CH	0.316	0.311
Highest CH	0.317	0.320

Mode	GSM1900	
Mod.	GSM	EDGE class 8
Lowest CH	0.317	0.299
Middle CH	0.310	0.311
Highest CH	0.315	0.307



GSM850 (GSM)


Lowest Channel

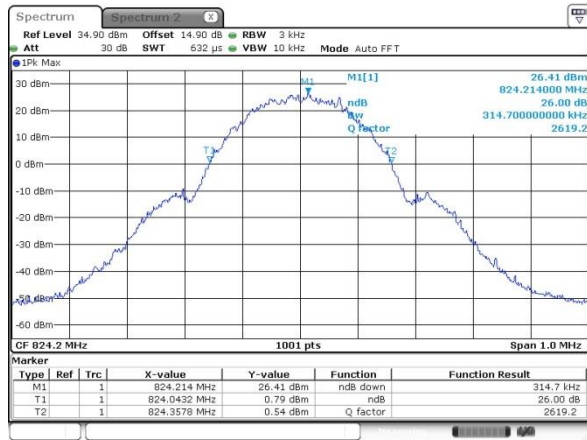

Date: 27.JUL.2024 00:49:21


GSM850 (EDGE class 8)

Lowest Channel

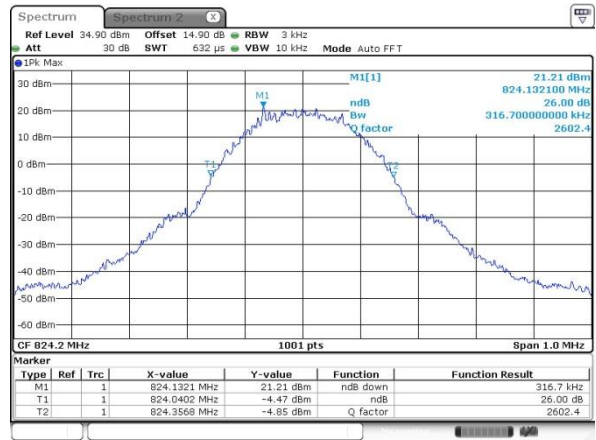


Date: 27.JUL.2024 01:58:04

Middle Channel

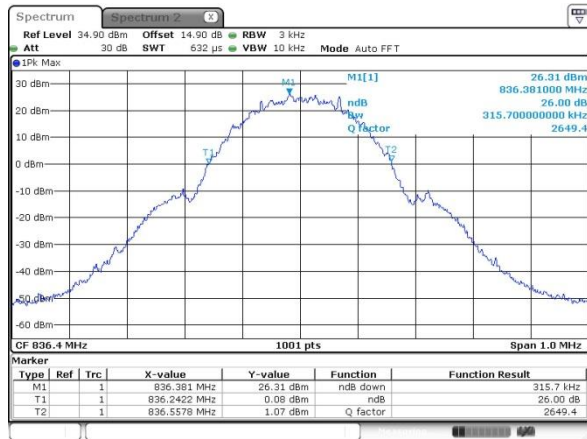

Date: 27.JUL.2024 00:59:06

Middle Channel

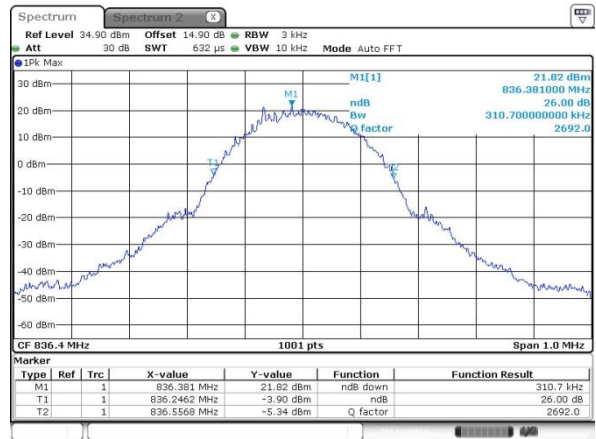


Date: 27.JUL.2024 01:58:14

Highest Channel



Date: 27.JUL.2024 00:59:32

Highest Channel

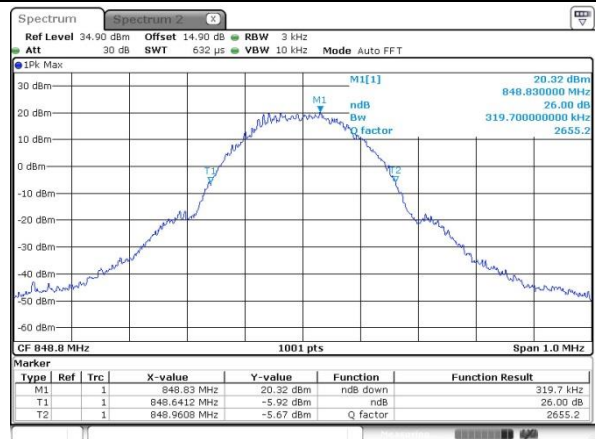


Date: 27.JUL.2024 01:58:57



GSM1900 (GSM)


Lowest Channel

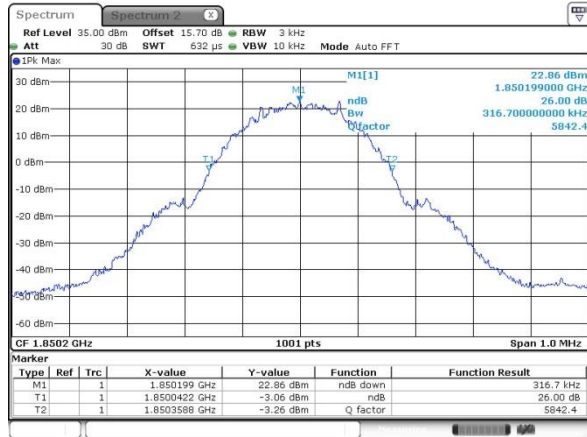

Date: 27_JUL_2024 03:16:56


GSM1900 (EDGE class 8)

Lowest Channel

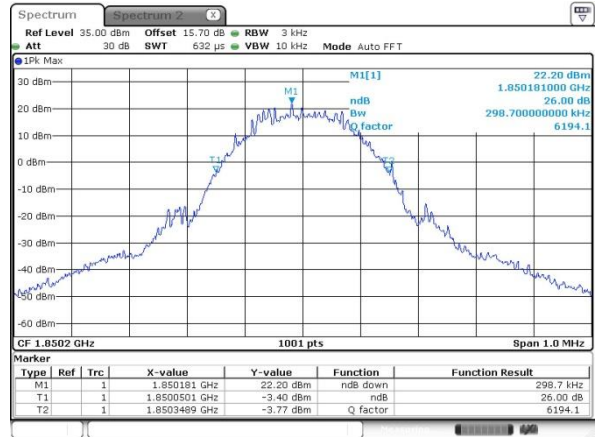

Date: 27_JUL_2024 02:57:16

Middle Channel

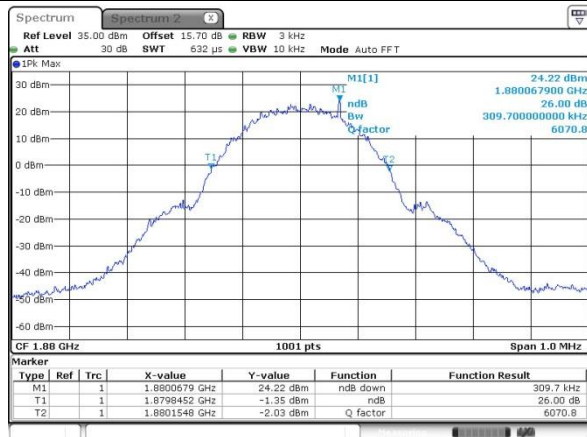


Date: 27_JUL_2024 03:17:44

Middle Channel




Date: 27_JUL_2024 02:57:35

Highest Channel

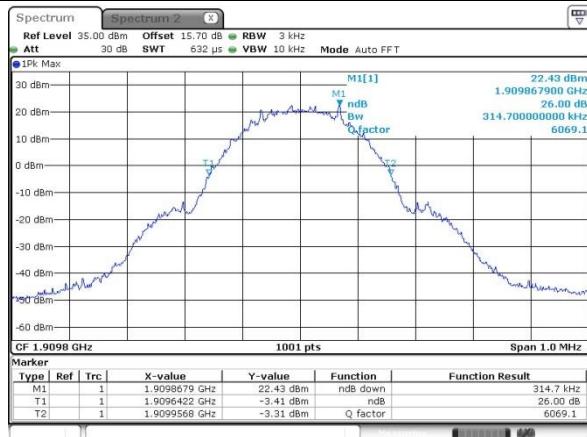

Date: 27_JUL_2024 03:18:50

Highest Channel

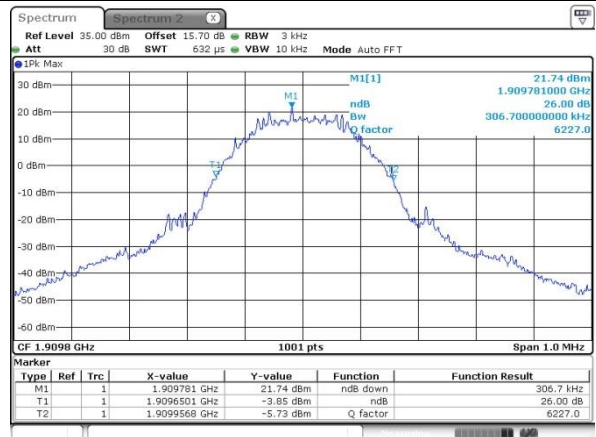

Date: 27_JUL_2024 02:58:13



Occupied Bandwidth


Mode	GSM850	
Mod.	GSM	EDGE class 8
Lowest CH	0.245	0.245
Middle CH	0.244	0.250
Highest CH	0.242	0.244

Mode	GSM1900	
Mod.	GSM	EDGE class 8
Lowest CH	0.243	0.237
Middle CH	0.243	0.242
Highest CH	0.243	0.240



GSM850 (GSM)


Lowest Channel

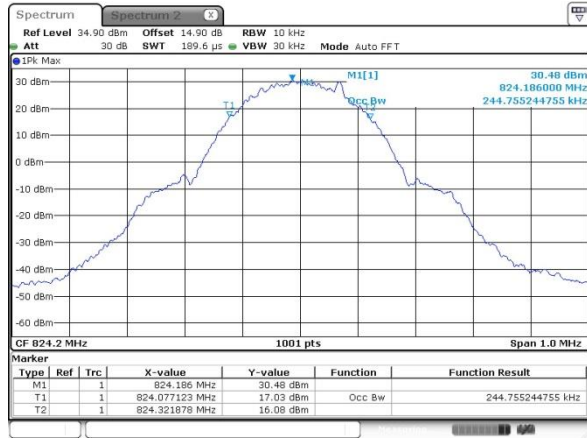

Date: 27.JUL.2024 01:09:25


GSM850 (EDGE class 8)

Lowest Channel

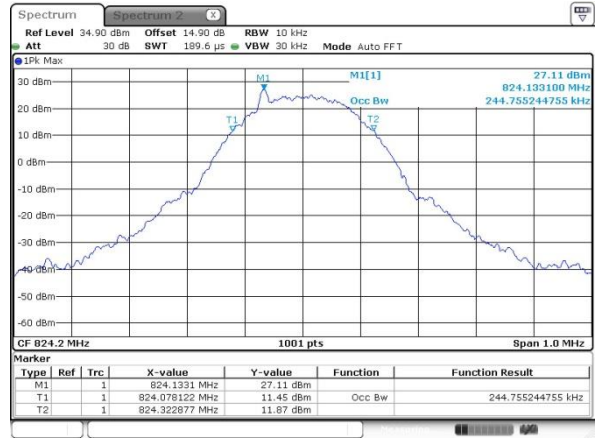

Date: 27.JUL.2024 01:59:23

Middle Channel

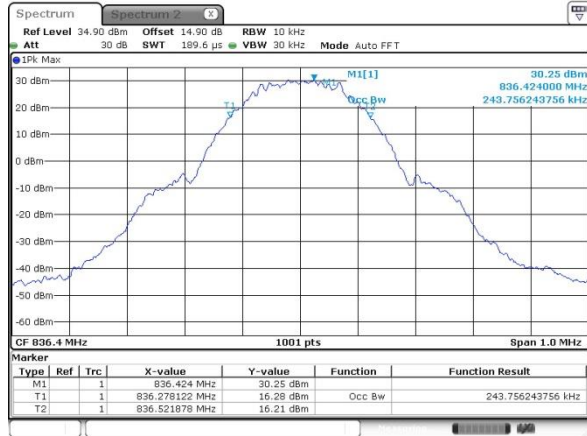

Date: 27.JUL.2024 01:09:02

Middle Channel




Date: 27.JUL.2024 01:59:47

Highest Channel



Date: 27.JUL.2024 01:09:42

Highest Channel

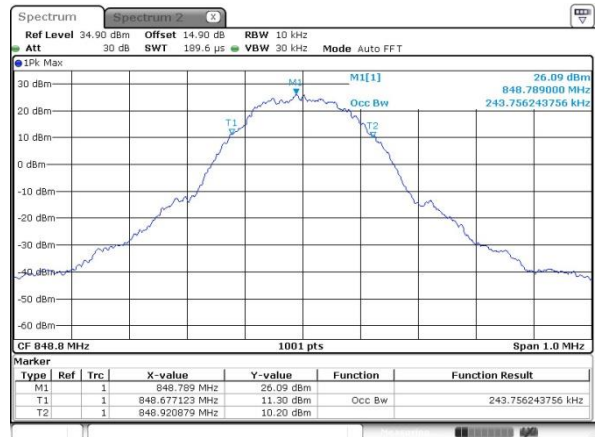


Date: 27.JUL.2024 02:00:10



GSM1900 (GSM)


Lowest Channel

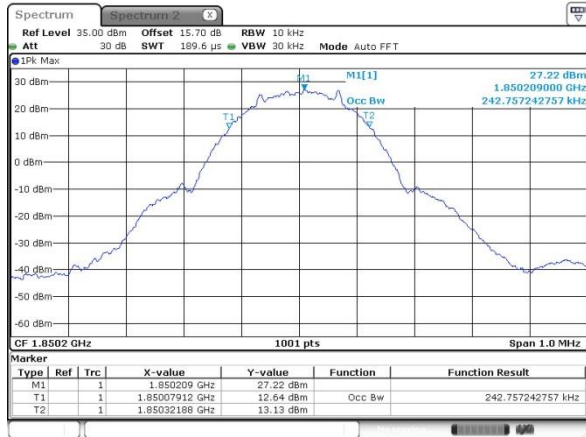

Date: 27_JUL_2024 03:23:55

GSM1900 (EDGE class 8)

Lowest Channel

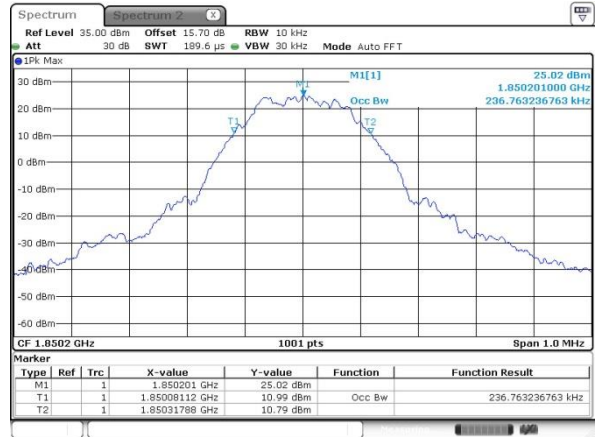


Date: 27_JUL_2024 03:02:24

Middle Channel



Date: 27_JUL_2024 03:26:21

Middle Channel

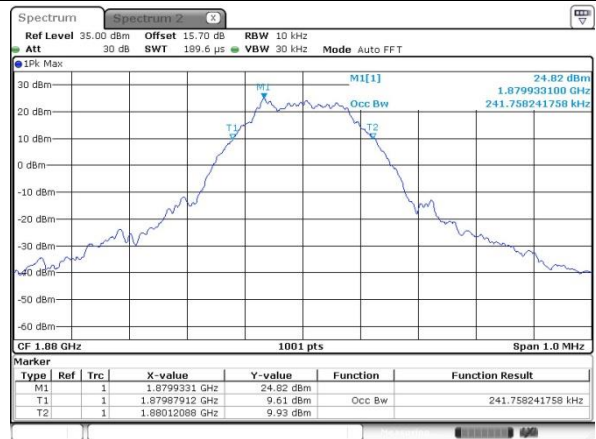

Date: 27_JUL_2024 03:03:05

Highest Channel




Date: 27_JUL_2024 03:26:44

Highest Channel




Date: 27_JUL_2024 03:03:48

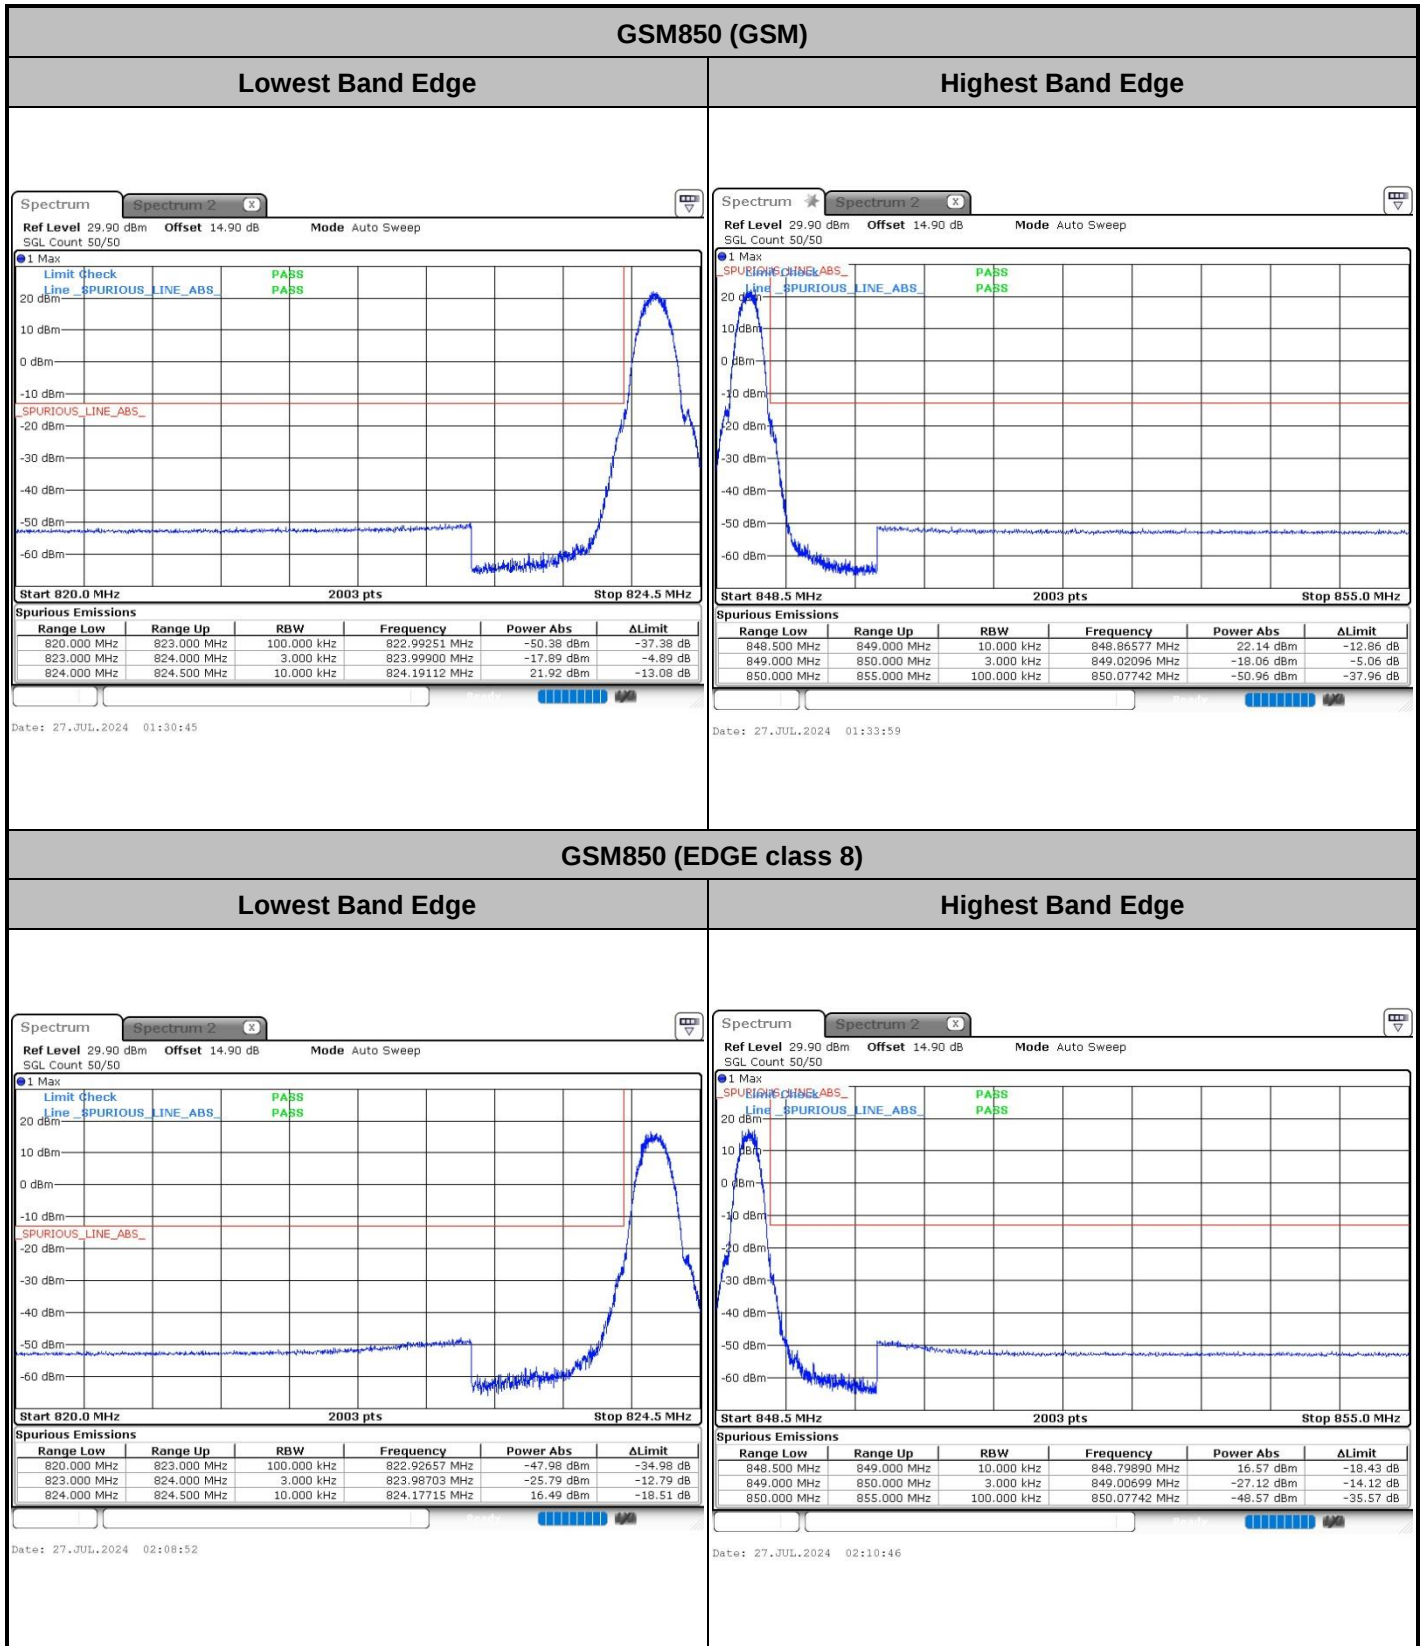**Conducted Band Edge**




GSM1900 (GSM)

Lowest Band Edge

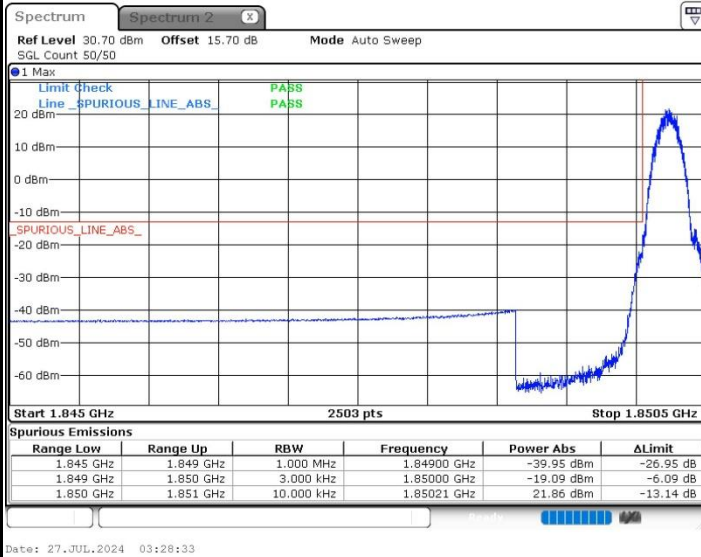


Highest Band Edge

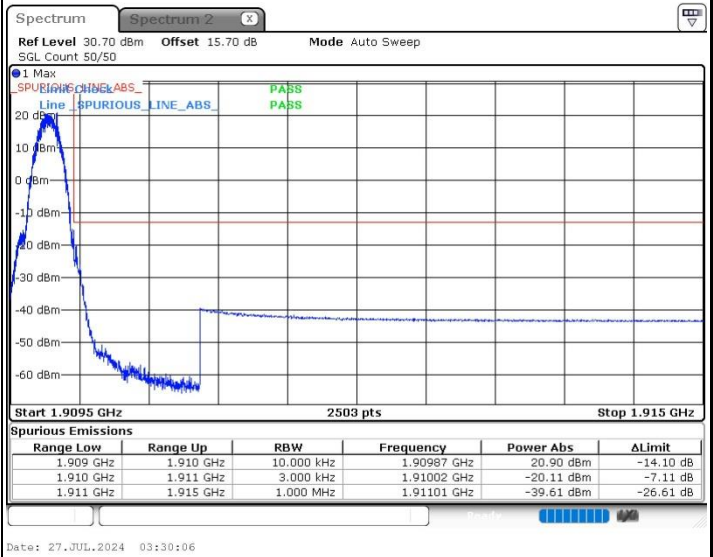


GSM1900 (EDGE class 8)

Lowest Band Edge

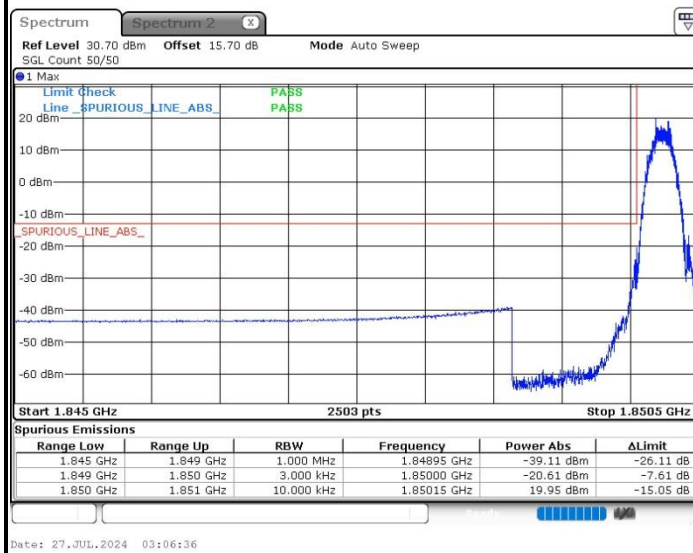

Highest Band Edge

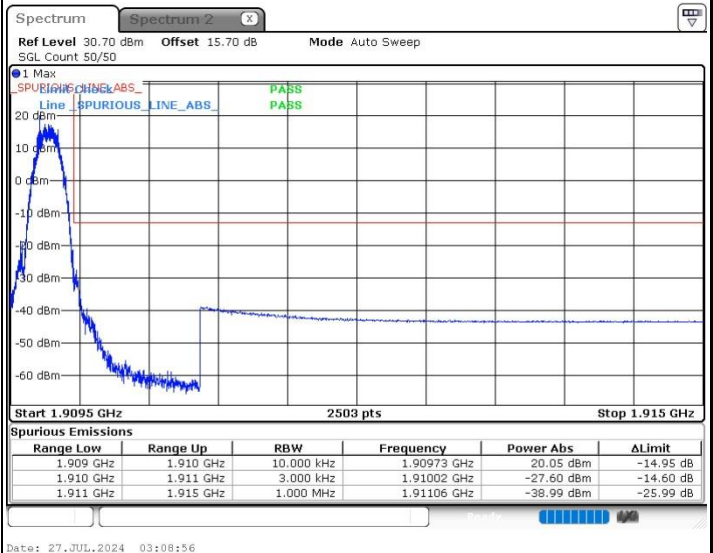




Conducted Spurious Emission

GSM850 (GSM)


Lowest Channel

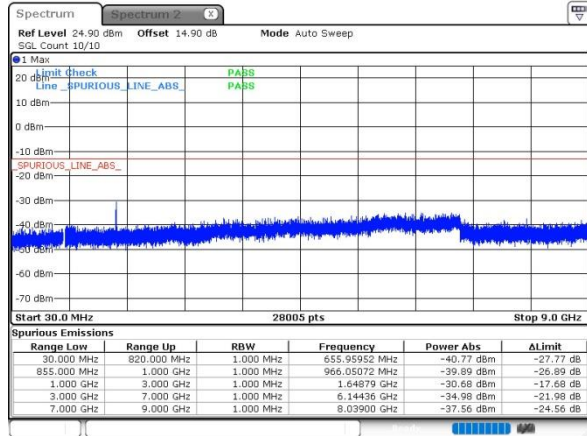

Date: 27.JUL.2024 01:35:35


GSM850 (EDGE class 8)

Lowest Channel

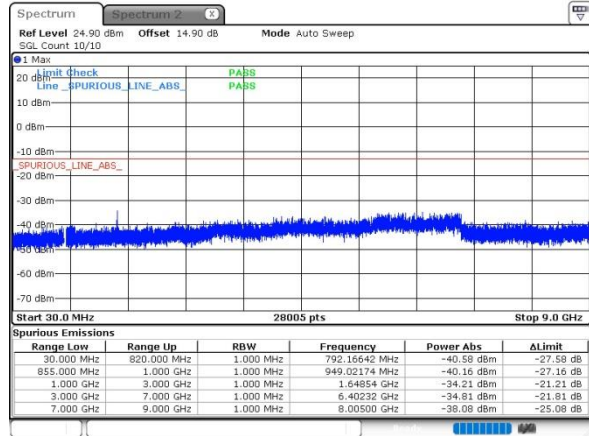


Date: 27.JUL.2024 02:11:45

Middle Channel

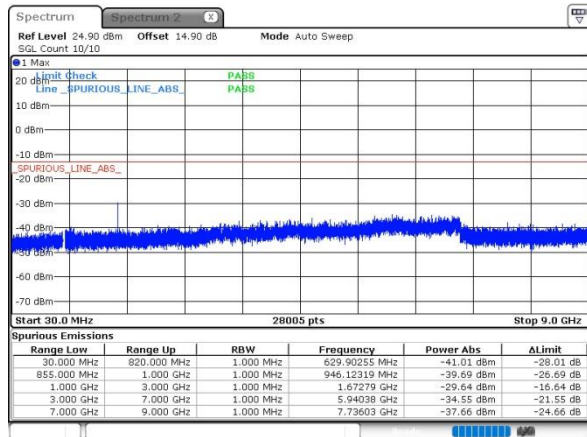


Date: 27.JUL.2024 01:35:35

Middle Channel

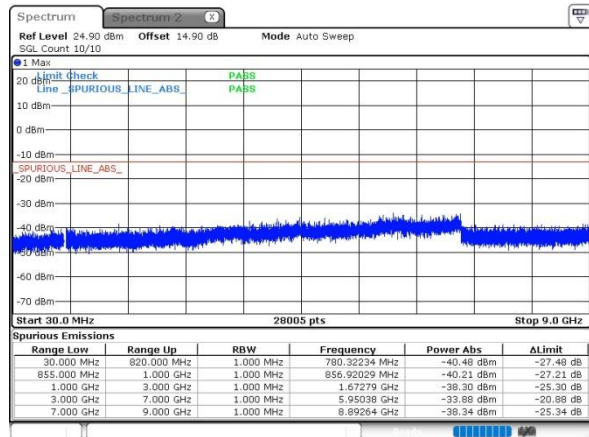


Date: 27.JUL.2024 02:11:45

Highest Channel

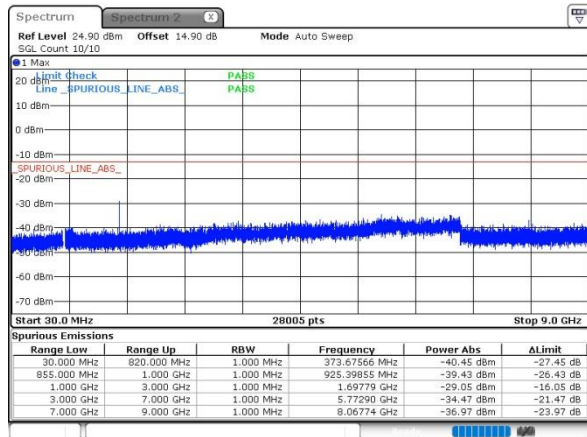

Date: 27.JUL.2024 01:37:41

Highest Channel

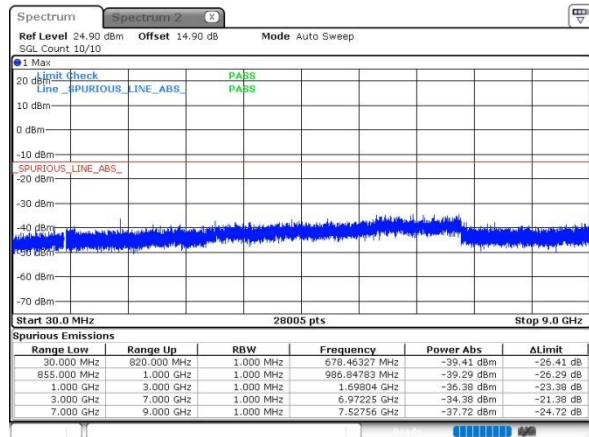

Date: 27.JUL.2024 02:18:32