


802.11ax (20MHz)(RU26):


CHANNEL	TX Channel 116	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE		DETECTOR FUNCTION	Average (AV)

Rg	Frequency [MHz]	PK+ Level [dBμV/m]		PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
8	5,431.700	52.95	74.00	21.05	3.70	Н	359	2.00
8	5,460.000	52.56	74.00	21.44	3.76	Н	343.8	1.00
8	5,579.175	99.67			4.12	Н	1	1.00



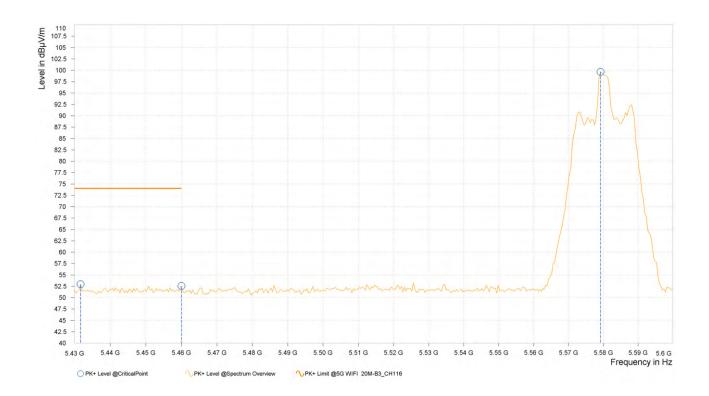


Rg	Frequency [MHz]		AVG Limit [dΒμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
8	5,447.000	38.11	54.00	15.89	3.74	Н	1	1.00
8	5,460.000	37.96	54.00	16.04	3.76	Н	5.1	1.00
8	5,580.875	88.63			4.13	Н	1	1.00

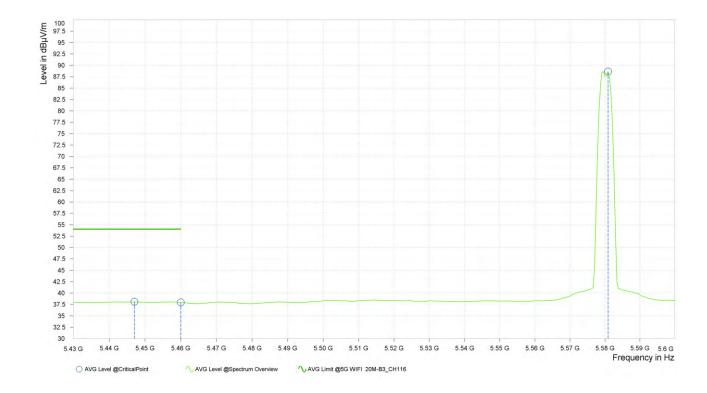




ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
8	5,441.050	52.79	74.00	21.21	3.72	V	359	2.00
8	5,460.000	52.04	74.00	21.96	3.76	V	309.1	1.00
8	5,579.180	104.51			4.12	V	168.1	2.00

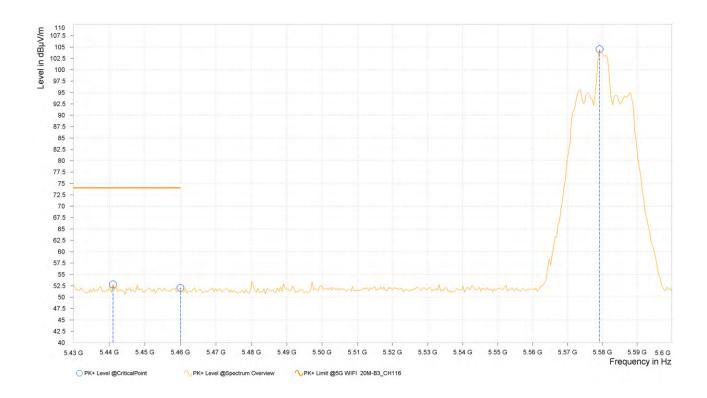



Rg	Frequency [MHz]		AVG Limit [dΒμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
8	5,441.050	38.13	54.00	15.87	3.72	٧	1	1.00
8	5,460.000	37.97	54.00	16.03	3.76	V	359	1.00
8	5,580.875	93.01		·	4.13	V	44.9	1.00

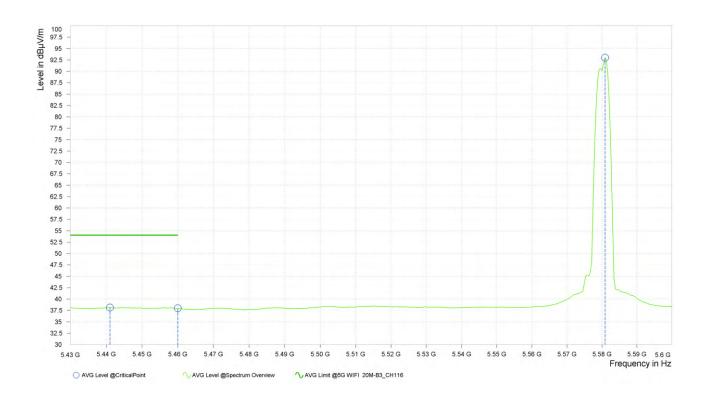


- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5580MHz: Fundamental frequency.
- 3. #: Out of restricted band.



802.11ax (20MHz)(RU26):

CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE		DETECTOR FUNCTION	Average (AV)


Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
10	5,708.400	104.77			4.49	Н	1	1.00
10	5,725.000	52.16	68.20	16.04	4.49	Н	2	2.00
10	5,730.500	52.78	68.20	15.42	4.49	Н	316.3	2.00

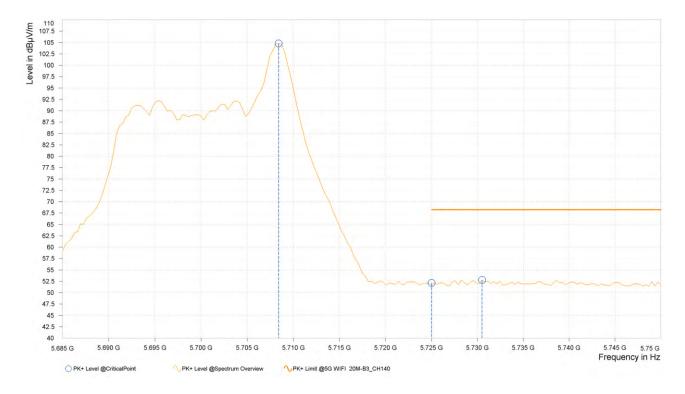



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
10	5,708.400	101.01			4.49	V	243.4	1.00
10	5,725.000	52.39	68.20	15.81	4.49	V	0.9	2.00
10	5,729.200	53.01	68.20	15.19	4.49	V	217.1	2.00

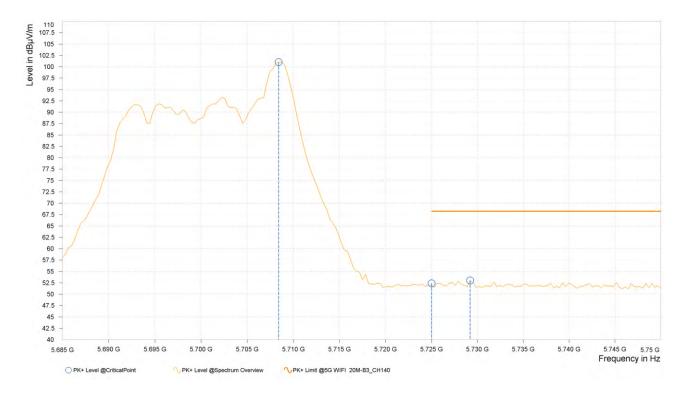


- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5700MHz: Fundamental frequency.
- 3. #: Out of restricted band.



802.11ax (20MHz)(RU26):

CHANNEL	TX Channel 144	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE		DETECTOR FUNCTION	Average (AV)


Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,728.500	104.52			4.49	Н	1	1.00
9	5,850.000	52.34	68.20	15.86	5.37	Н	359	1.00
9	5,858.000	53.60	68.20	14.60	5.39	Н	358.3	1.00

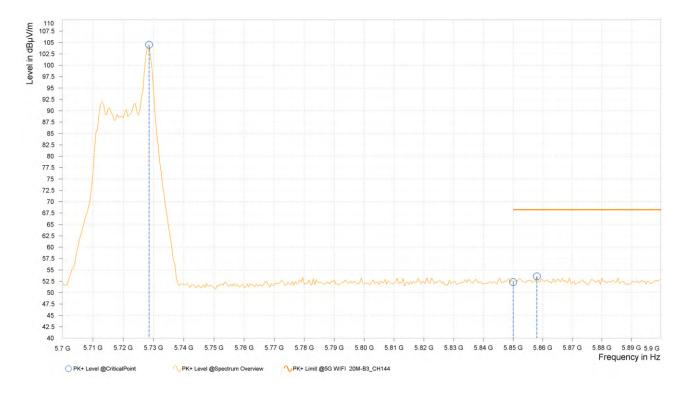



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,728.000	104.14			4.49	V	96.4	1.00
9	5,850.000	52.06	68.20	16.14	5.37	V	359.1	1.00
9	5,877.500	53.75	68.20	14.45	5.43	V	122.6	2.00

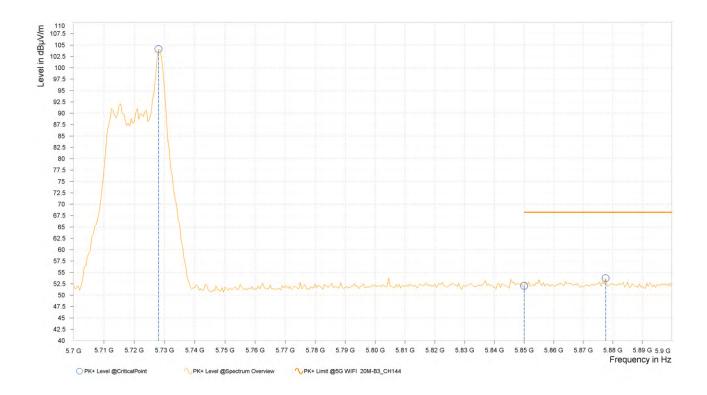


- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5720MHz: Fundamental frequency.
- 3. #: Out of restricted band.



802.11ax (20MHz)(RU52):


CHANNEL	TX Channel 100	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE		DETECTOR FUNCTION	Average (AV)

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
7	5,430.450	52.65	74.00	21.35	3.70	Н	359	2.00
7	5,460.000	51.75	74.00	22.25	3.76	Н	165.8	2.00
7	5,493.450	98.61			3.84	Н	214.6	2.00

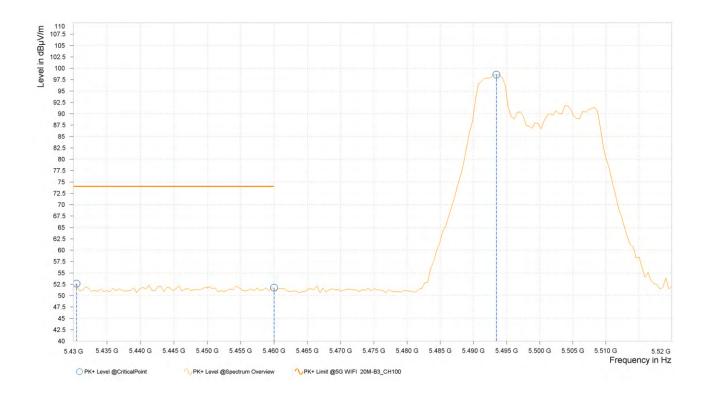




Rg	Frequency [MHz]		AVG Limit [dΒμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
7	5,457.000	37.33	54.00	16.67	3.76	Н	67.6	2.00
7	5,460.000	37.25	54.00	16.75	3.76	Н	1	1.00
7	5,491.650	85.83			3.84	Н	342.2	1.00

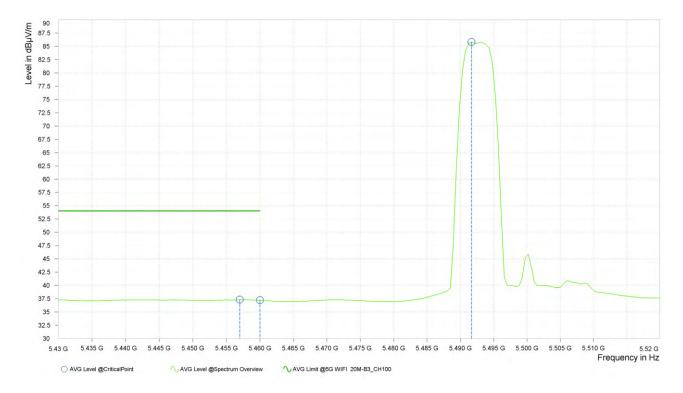




ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
7	5,457.900	52.57	74.00	21.43	3.76	V	359.1	1.00
7	5,460.000	51.62	74.00	22.38	3.76	V	196.7	1.00
7	5,493.900	103.19			3.84	V	1	1.00

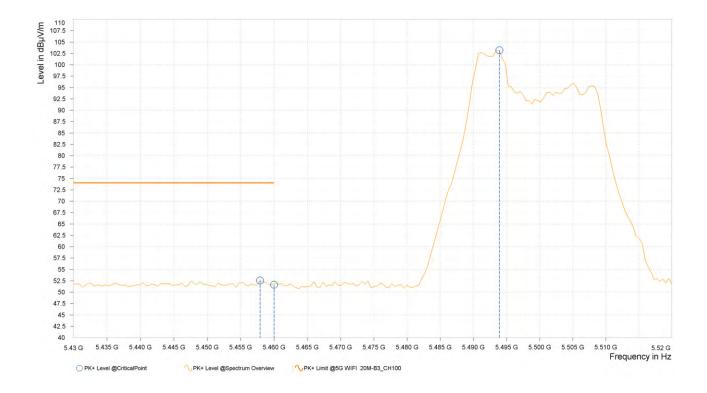



Rg	Frequency [MHz]		AVG Limit [dΒμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
7	5,443.500	37.49	54.00	16.51	3.73	V	1	1.00
7	5,460.000	37.34	54.00	16.66	3.76	V	117.8	1.00
7	5,493.450	89.56			3.84	V	1	1.00

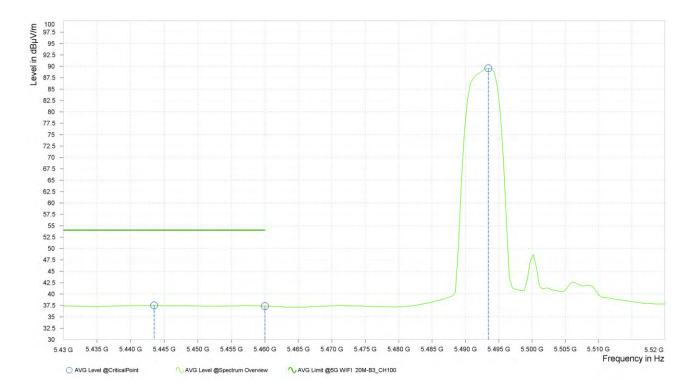


- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5500MHz: Fundamental frequency.
- 3. #: Out of restricted band.



802.11ax (20MHz)(RU52):


CHANNEL	TX Channel 116		Peak (PK)
FREQUENCY RANGE		DETECTOR FUNCTION	Average (AV)

Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
8	5,454.650	52.00	74.00	22.00	3.75	Н	103.5	2.00
8	5,460.000	50.82	74.00	23.18	3.76	Н	0.9	2.00
8	5,577.900	98.22			4.12	Н	153.8	2.00

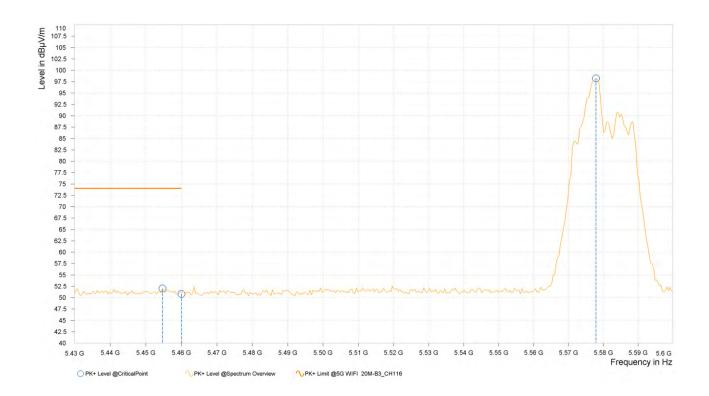




Rg	Frequency [MHz]		AVG Limit [dΒμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
8	5,458.900	37.47	54.00	16.53	3.76	Н	359.1	1.00
8	5,460.000	37.39	54.00	16.61	3.76	Н	263.7	2.00
8	5,578.325	83.89			4.12	Н	1	1.00

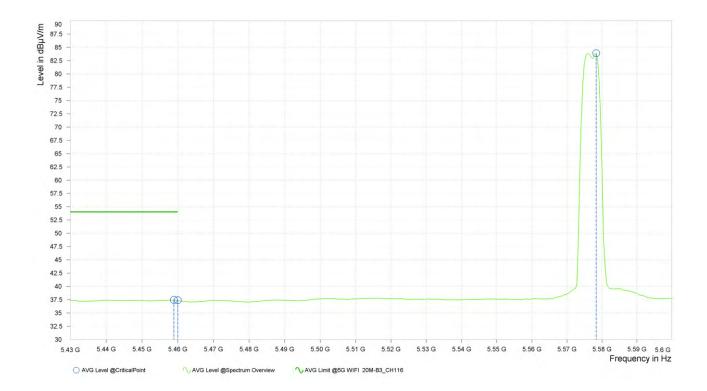




ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
8	5,438.500	52.29	74.00	21.71	3.72	V	251.8	1.00
8	5,460.000	51.87	74.00	22.13	3.76	V	193.1	1.00
8	5,575.350	103.05			4.11	V	359	1.00

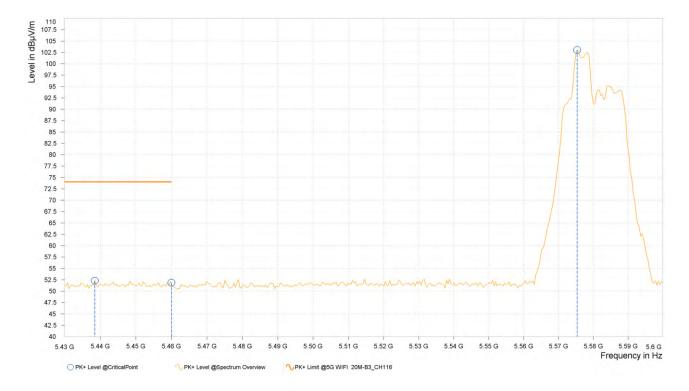



Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dΒμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
8	5,443.175	37.67	54.00	16.33	3.73	V	359.1	1.00
8	5,460.000	37.45	54.00	16.55	3.76	V	359.1	1.00
8	5,575.350	90.09			4.11	V	145.4	2.00

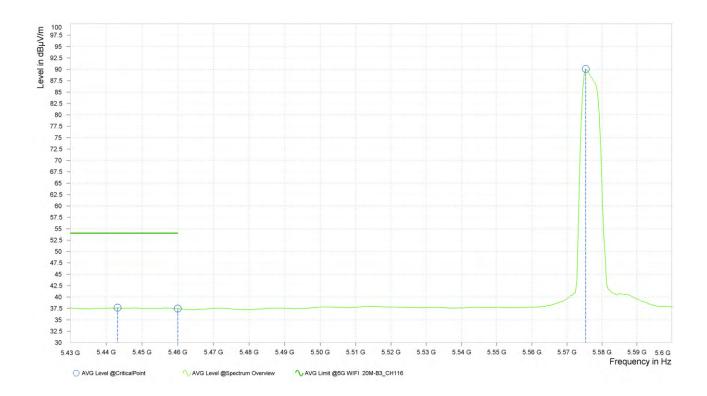


- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5580MHz: Fundamental frequency.
- 3. #: Out of restricted band.



802.11ax (20MHz)(RU52):

CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE		DETECTOR FUNCTION	Average (AV)


Rg	Frequency [MHz]		PK+ Limit [dBμV/m]		Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
10	5,708.080	101.02			4.49	Н	52.1	1.00
10	5,725.000	51.56	68.20	16.64	4.49	Н	101.2	1.00
10	5,728.225	52.81	68.20	15.39	4.49	Н	215.8	2.00

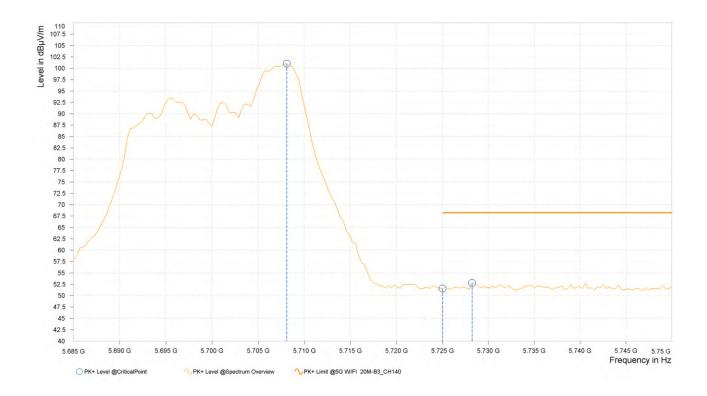



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
10	5,705.800	98.65			4.48	V	354.9	2.00
10	5,725.000	52.16	68.20	16.04	4.49	V	2	2.00
10	5,733.425	52.89	68.20	15.31	4.50	V	18.6	2.00

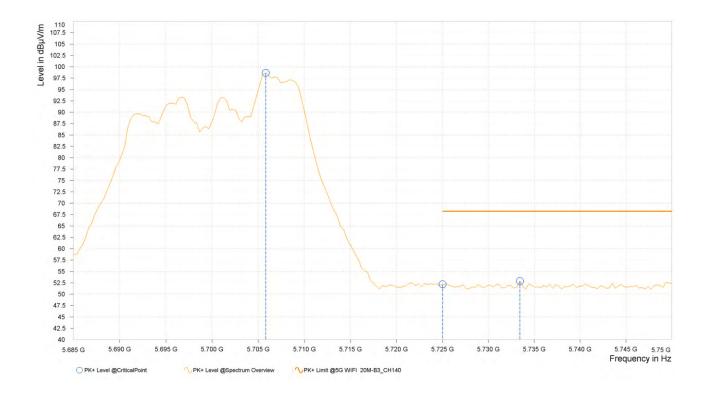


- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5700MHz: Fundamental frequency.
- 3. #: Out of restricted band.



802.11ax (20MHz)(RU52):

CHANNEL	TX Channel 144	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE		DETECTOR FUNCTION	Average (AV)


Rg	Frequency [MHz]		PK+ Limit [dBμV/m]		Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,728.000	100.59			4.49	Н	1	1.00
9	5,850.000	52.67	68.20	15.53	5.37	Н	342.2	1.00
9	5,858.500	53.68	68.20	14.52	5.39	Н	94	1.00

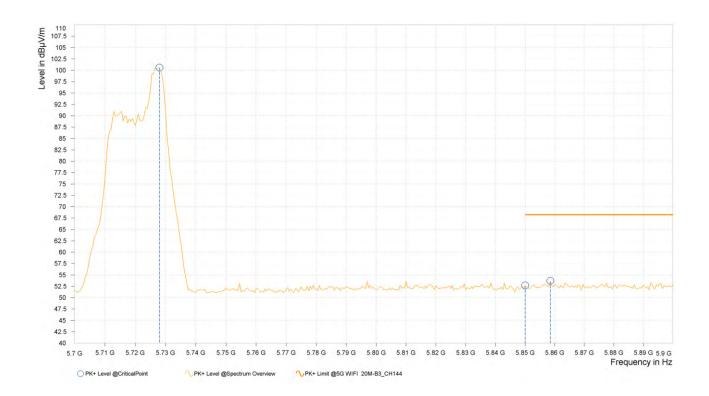



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,728.000	98.99			4.49	V	104.8	2.00
9	5,850.000	52.40	68.20	15.80	5.37	V	268.4	1.00
9	5,882.500	53.48	68.20	14.72	5.44	V	254.2	2.00

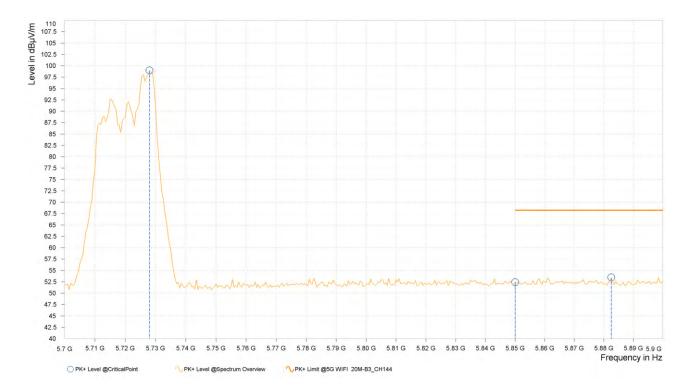


- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5720MHz: Fundamental frequency.
- 3. #: Out of restricted band.



802.11ax (20MHz)(RU106):


CHANNEL	TX Channel 100	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE		DETECTOR FUNCTION	Average (AV)

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
7	5,446.200	52.43	74.00	21.57	3.73	Н	213.5	2.00
7	5,460.000	51.79	74.00	22.21	3.76	Н	263.7	2.00
7	5,494.800	95.18			3.85	Н	163.4	2.00

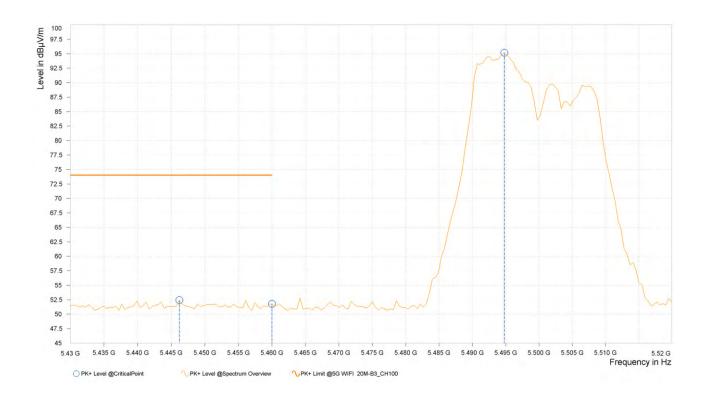




Rg	Frequency [MHz]		AVG Limit [dΒμV/m]		Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
7	5,442.150	37.30	54.00	16.70	3.72	Н	164.5	2.00
7	5,460.000	37.19	54.00	16.81	3.76	Н	0.9	2.00
7	5,494.800	83.53			3.85	Н	164.5	2.00

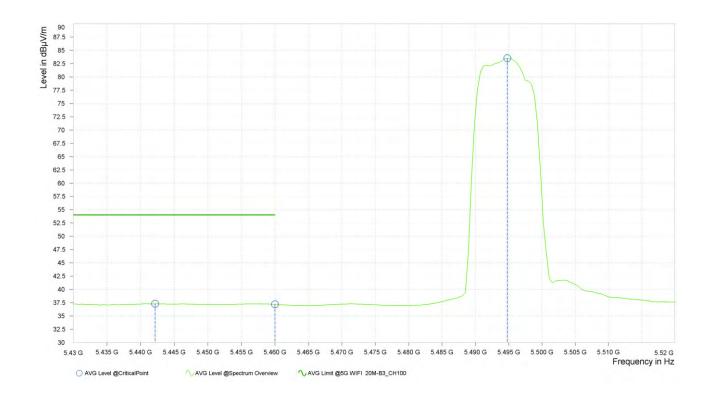




ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
7	5,433.150	52.33	74.00	21.67	3.70	V	0.9	2.00
7	5,460.000	51.29	74.00	22.71	3.76	V	146.5	1.00
7	5,494.800	99.72			3.85	V	1	1.00

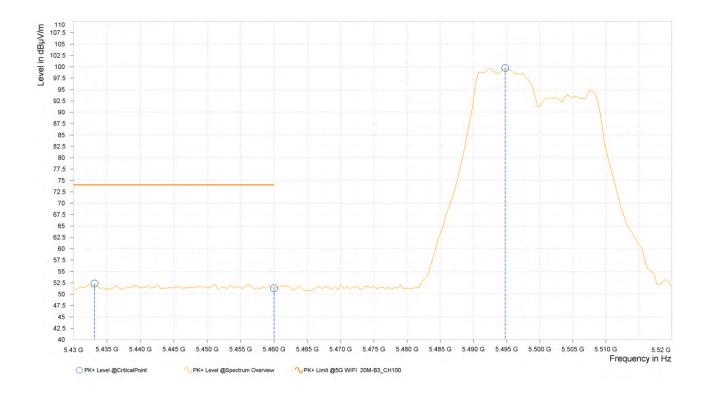



Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dΒμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
7	5,440.350	37.46	54.00	16.54	3.72	V	4.3	2.00
7	5,460.000	37.33	54.00	16.67	3.76	V	359	1.00
7	5,497.950	87.98			3.85	V	158.5	2.00

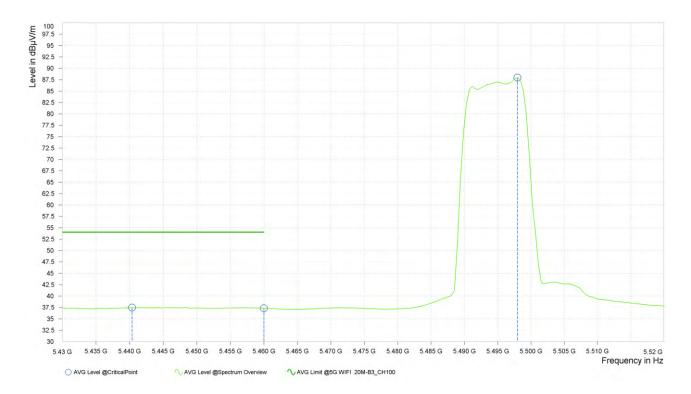


- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5500MHz: Fundamental frequency.
- 3. #: Out of restricted band.



802.11ax (20MHz)(RU106):


CHANNEL	TX Channel 116	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE		DETECTOR FUNCTION	Average (AV)

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
8	5,458.050	52.33	74.00	21.67	3.76	Н	247	1.00
8	5,460.000	50.77	74.00	23.23	3.76	Н	344.4	1.00
8	5,575.775	93.90			4.11	Н	297.1	1.00

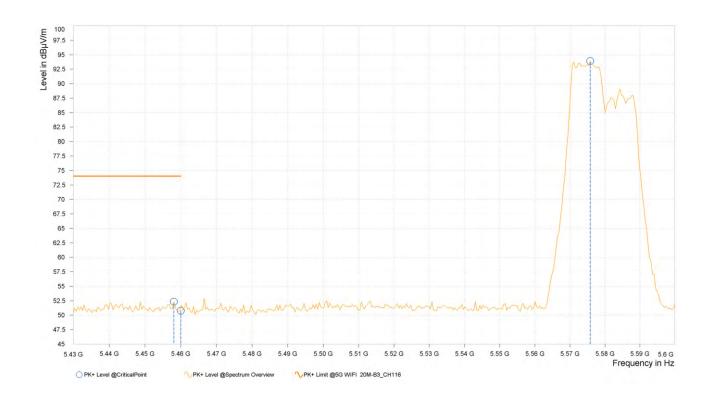




Rg	Frequency [MHz]		AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
8	5,444.450	37.38	54.00	16.62	3.73	Н	122.6	2.00
8	5,460.000	37.24	54.00	16.76	3.76	Н	20.6	2.00
8	5,575.350	83.52			4.11	Н	174.2	2.00

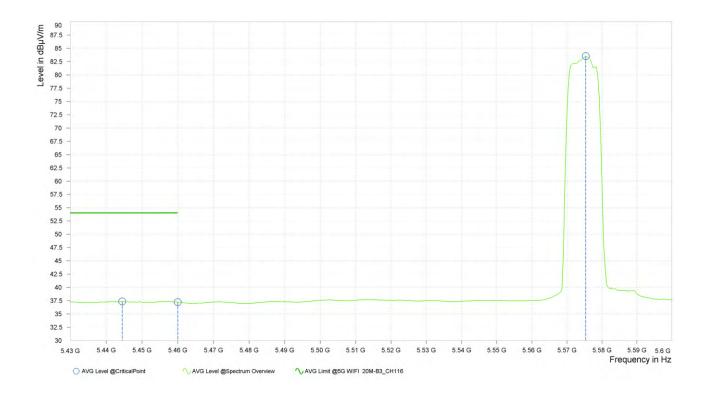




ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
8	5,434.250	52.27	74.00	21.73	3.71	V	147.8	1.00
8	5,460.000	51.07	74.00	22.93	3.76	V	96.4	1.00
8	5,577.475	101.78			4.12	V	297.2	1.00

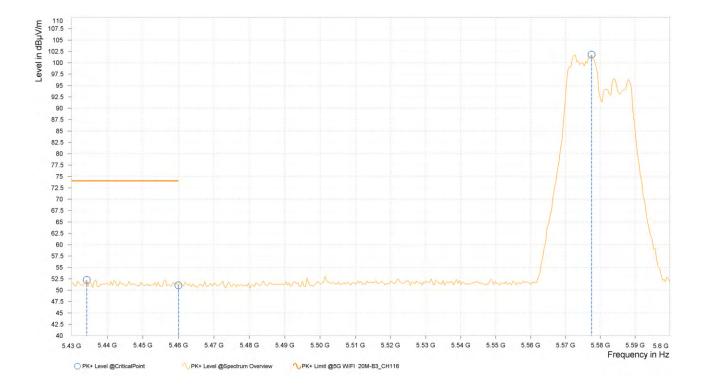



Rg	Frequency [MHz]		AVG Limit [dΒμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
8	5,456.775	37.47	54.00	16.53	3.76	V	244.6	2.00
8	5,460.000	37.35	54.00	16.65	3.76	V	359	1.00
8	5,572.375	87.39			4.09	V	1	1.00

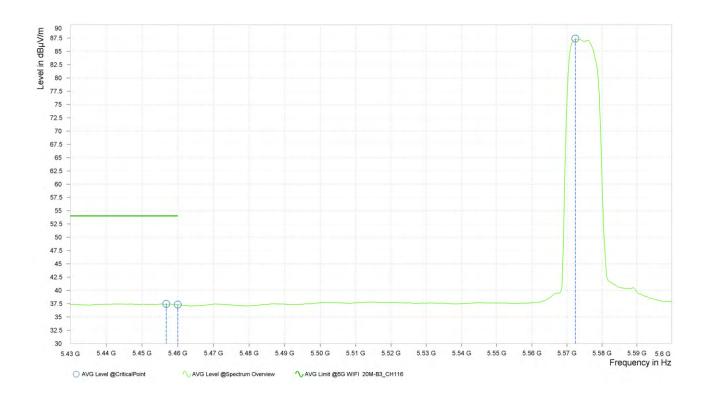


- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5580MHz: Fundamental frequency.
- 3. #: Out of restricted band.



802.11ax (20MHz)(RU106):

CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE			Average (AV)


Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
10	5,697.025	95.33			4.48	Н	163.3	2.00
10	5,725.000	51.46	68.20	16.74	4.49	Н	355.5	2.00
10	5,725.950	53.56	68.20	14.64	4.49	Н	359	1.00

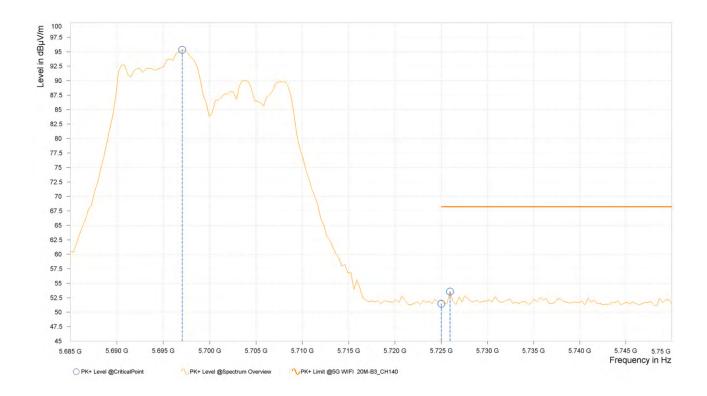



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
10	5,692.150	99.02			4.47	V	111.8	2.00
10	5,725.000	52.41	68.20	15.79	4.49	V	1.6	2.00
10	5,726.600	53.42	68.20	14.78	4.49	V	0.9	2.00

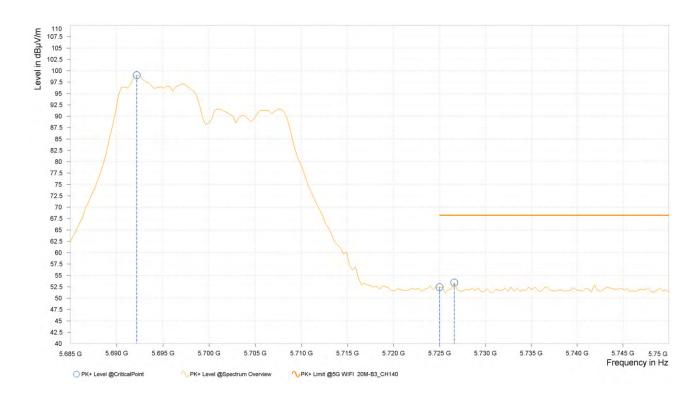


- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5700MHz: Fundamental frequency.
- 3. #: Out of restricted band.



802.11ax (20MHz)(RU106):

CHANNEL	TX Channel 144	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE		DETECTOR FUNCTION	Average (AV)


Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,727.000	97.19			4.49	Н	1	1.00
9	5,850.000	53.63	68.20	14.57	5.37	Н	314	2.00
9	5,883.000	54.08	68.20	14.12	5.45	Н	359.1	1.00

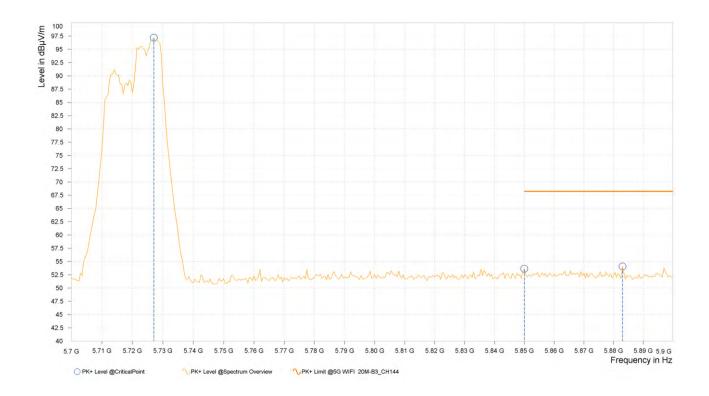



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,723.000	99.03			4.49	V	115.5	2.00
9	5,850.000	52.35	68.20	15.85	5.37	V	5	1.00
9	5,888.500	54.60	68.20	13.60	5.46	V	15.7	2.00

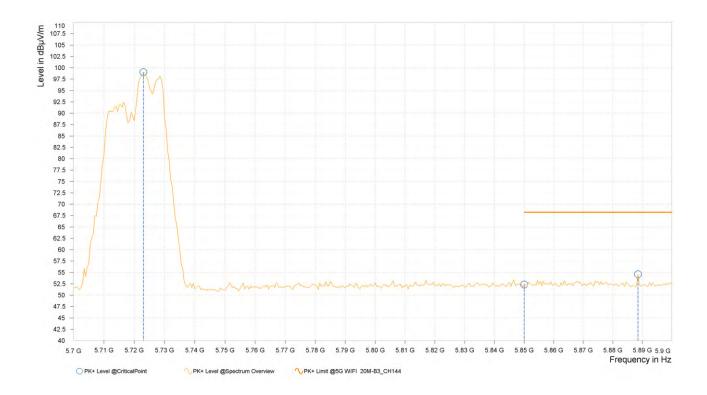


- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5720MHz: Fundamental frequency.
- 3. #: Out of restricted band.



802.11ax (20MHz)(RU242):


CHANNEL	TX Channel 100 DETECTOR FUNCTION	Peak (PK)	
FREQUENCY RANGE	1GHz ~ 40GHz	DETECTOR FUNCTION	Average (AV)

Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
7	5,442.600	52.23	74.00	21.77	3.72	Н	155	2.00
7	5,460.000	51.69	74.00	22.31	3.76	Н	354.9	2.00
7	5,492.550	92.56			3.84	Н	155	2.00

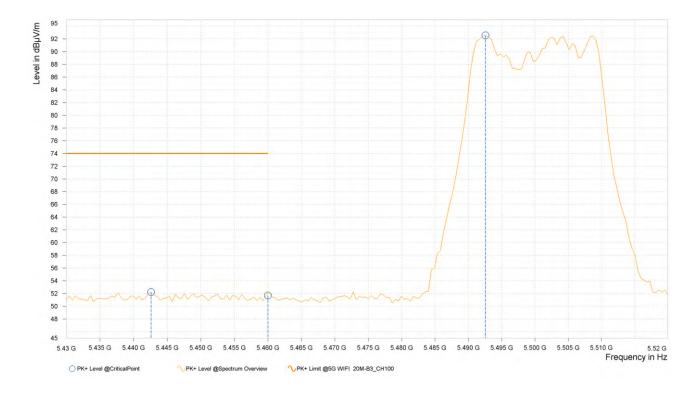




Rg	Frequency [MHz]		AVG Limit [dΒμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
7	5,457.000	37.32	54.00	16.68	3.76	Н	1	2.00
7	5,460.000	37.25	54.00	16.75	3.76	Н	200.3	1.00
7	5,503.350	78.91			3.87	Н	207.5	2.00

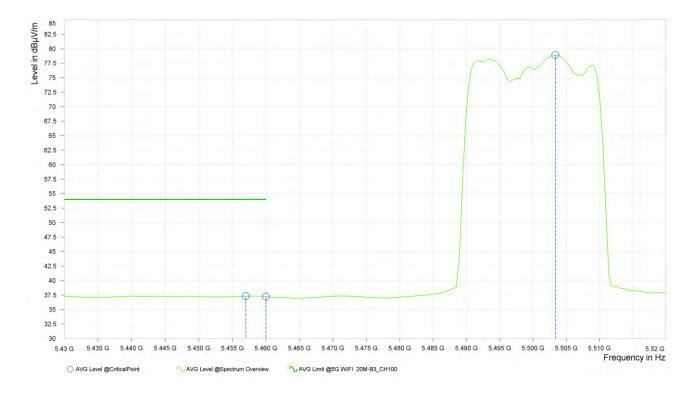




ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
7	5,453.850	52.29	74.00	21.71	3.75	V	5.1	1.00
7	5,460.000	51.68	74.00	22.32	3.76	V	352.2	1.00
7	5,508.300	98.83			3.88	V	158.5	2.00

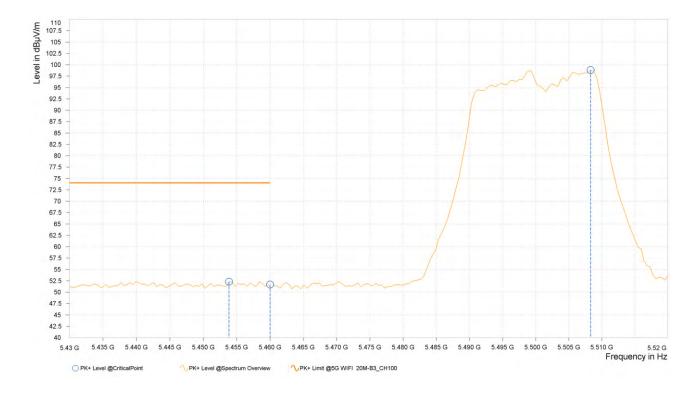



Rg	Frequency [MHz]		AVG Limit [dΒμV/m]		Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
7	5,457.000	37.50	54.00	16.50	3.76	V	359.1	1.00
7	5,460.000	37.44	54.00	16.56	3.76	V	359	1.00
7	5,507.850	84.86			3.88	V	306.7	1.00

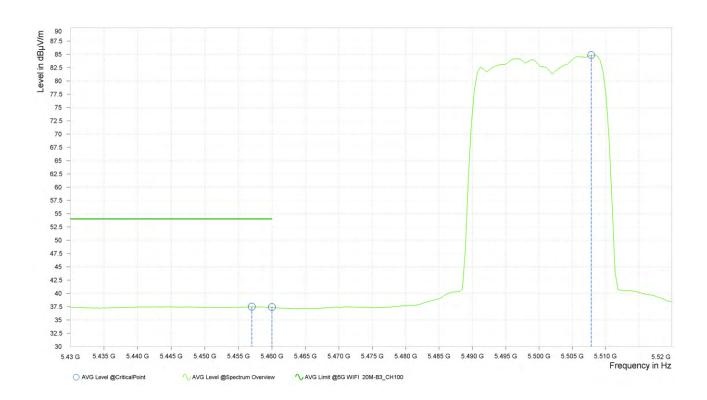


- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5500MHz: Fundamental frequency.
- 3. #: Out of restricted band.



802.11ax (20MHz)(RU242):


CHANNEL	TX Channel 116		Peak (PK)
FREQUENCY RANGE		DETECTOR FUNCTION	Average (AV)

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
8	5,456.350	52.07	74.00	21.93	3.76	Н	359	1.00
8	5,460.000	50.95	74.00	23.05	3.76	Н	251.8	2.00
8	5,585.550	92.21			4.15	Н	5.1	1.00

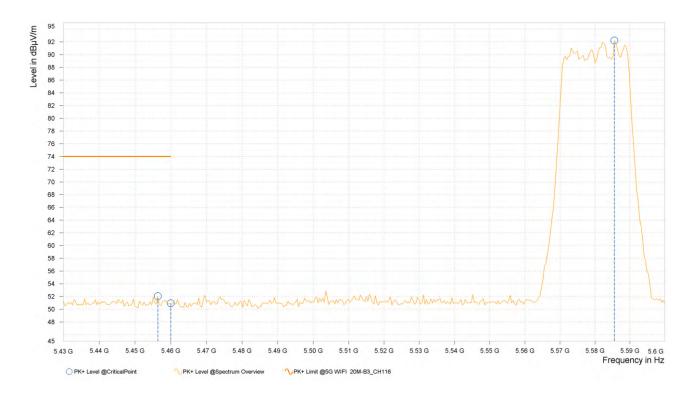




Rg	Frequency [MHz]		AVG Limit [dΒμV/m]		Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
8	5,458.050	37.36	54.00	16.64	3.76	Н	358.4	1.00
8	5,460.000	37.27	54.00	16.73	3.76	Н	224.3	2.00
8	5,575.350	79.86			4.11	Н	174.2	2.00

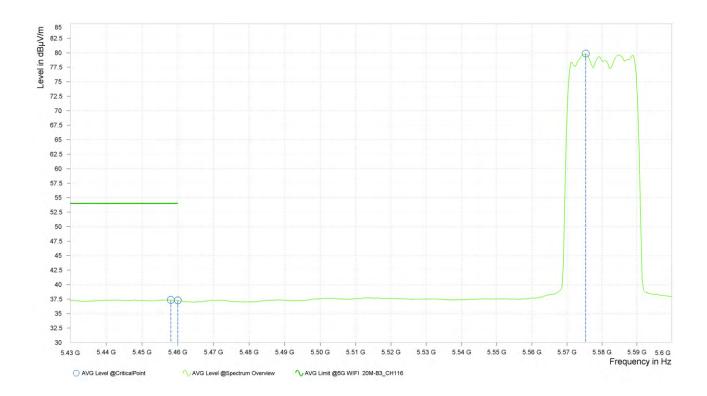




ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
8	5,446.150	53.00	74.00	21.00	3.73	V	95.2	2.00
8	5,460.000	51.32	74.00	22.68	3.76	V	95.2	2.00
8	5,585.975	98.03			4.15	V	152.5	2.00

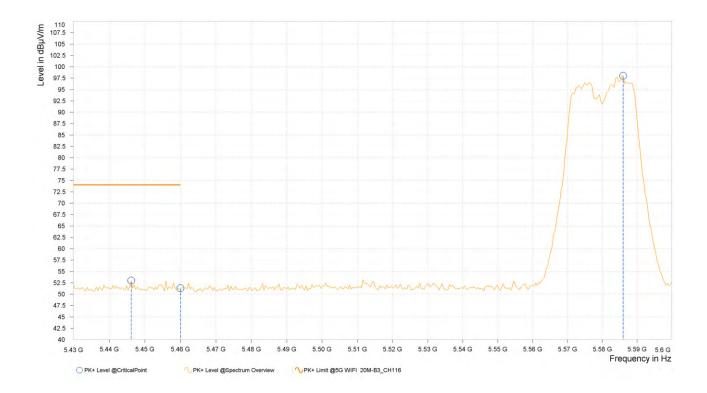



Rg	Frequency [MHz]		AVG Limit [dΒμV/m]		Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
8	5,441.475	37.49	54.00	16.51	3.72	V	261.4	2.00
8	5,460.000	37.38	54.00	16.62	3.76	V	102.4	1.00
8	5,586.825	83.40			4.16	V	156.2	2.00

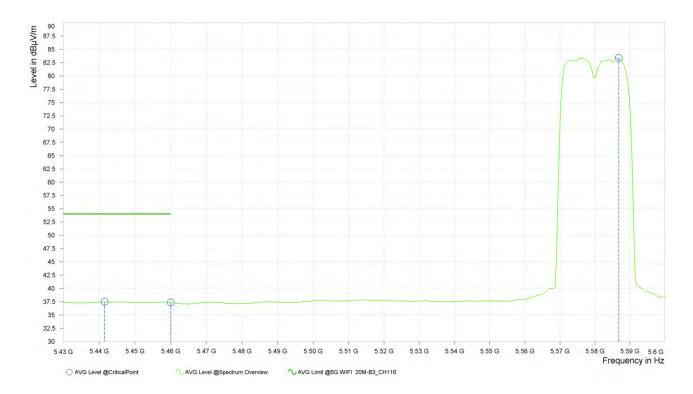


- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5580MHz: Fundamental frequency.
- 3. #: Out of restricted band.



802.11ax (20MHz)(RU242):

CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE		DETECTOR FUNCTION	Average (AV)


Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
10	5,705.475	94.71			4.48	Н	1	1.00
10	5,725.000	52.16	68.20	16.04	4.49	Н	1	1.00
10	5,733.425	52.64	68.20	15.56	4.50	Н	258.9	2.00

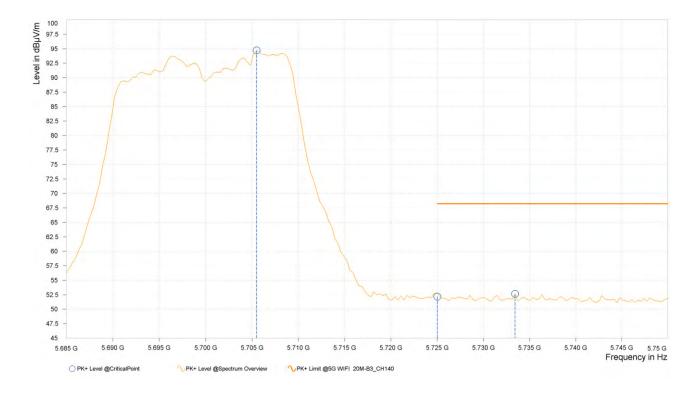



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
10	5,708.400	95.65			4.49	V	54.5	1.00
10	5,725.000	52.17	68.20	16.03	4.49	V	311.6	2.00
10	5,735.375	53.15	68.20	15.05	4.52	V	359.1	1.00

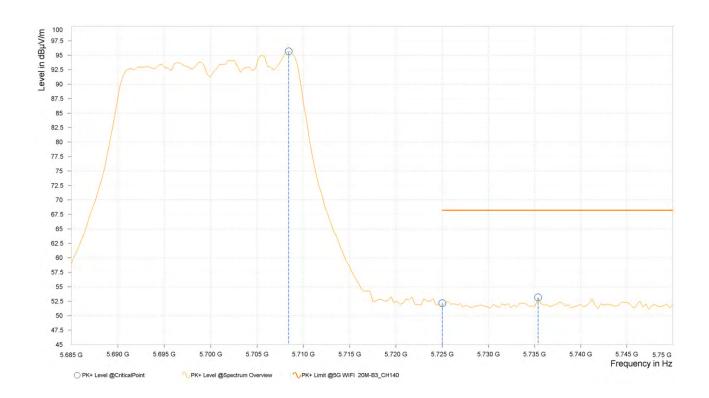


- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5700MHz: Fundamental frequency.
- 3. #: Out of restricted band.



802.11ax (20MHz)(RU242):

CHANNEL	TX Channel 144	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE		DETECTOR FUNCTION	Average (AV)


Rg	Frequency [MHz]		PK+ Limit [dBμV/m]		Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,728.000	94.62			4.49	Н	359.1	1.00
9	5,850.000	52.55	68.20	15.65	5.37	Н	349.4	1.00
9	5,878.000	53.58	68.20	14.62	5.43	Н	108.4	2.00

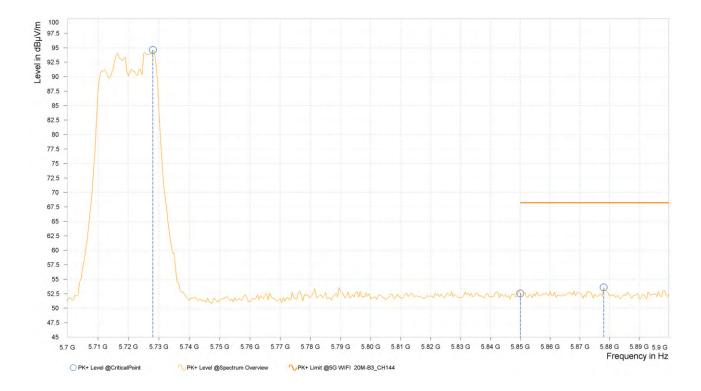



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,725.500	96.62			4.49	V	289.9	1.00
9	5,850.000	52.56	68.20	15.64	5.37	V	359	2.00
9	5,889.500	53.66	68.20	14.54	5.46	V	312.8	2.00

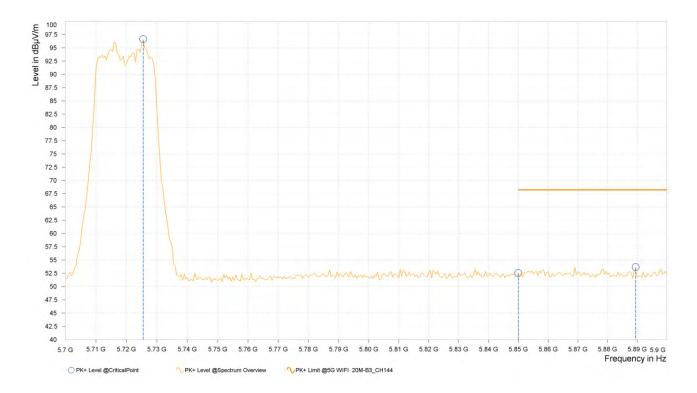


- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5720MHz: Fundamental frequency.
- 3. #: Out of restricted band.



802.11ax (40MHz) (RU484):


CHANNEL	TX Channel 102	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE		DETECTOR FUNCTION	Average (AV)

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	5,459.500	52.33	74.00	21.67	3.76	Н	172.4	1.00
5	5,460.000	51.54	74.00	22.46	3.77	Н	354.9	2.00
5	5,507.000	88.27			3.87	Н	175.8	2.00

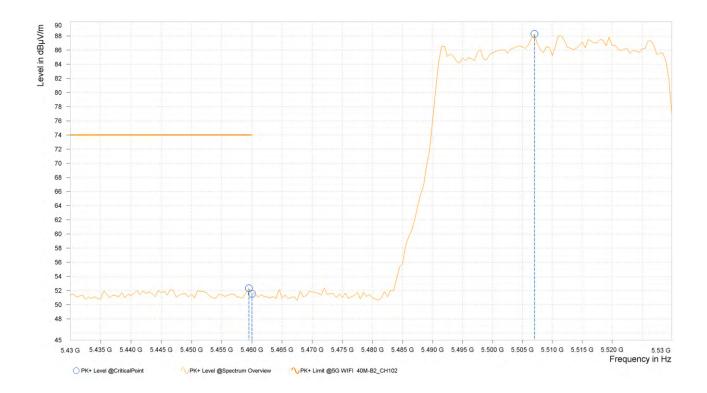




Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dΒμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	5,458.000	37.34	54.00	16.66	3.76	Н	93.5	2.00
5	5,460.000	37.20	54.00	16.80	3.77	Н	93.5	2.00
5	5,523.000	74.95			3.92	Н	171.7	2.00

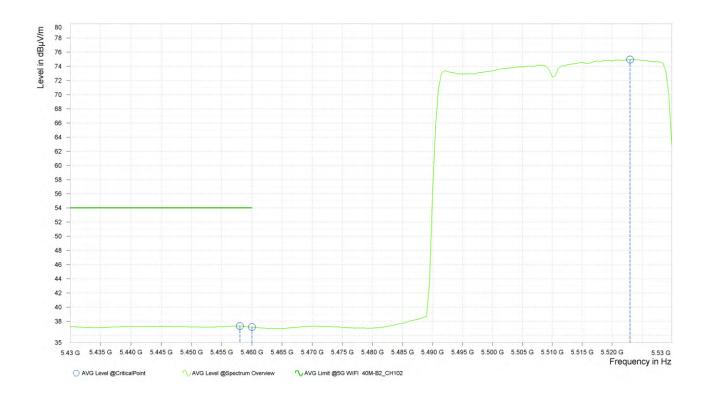




ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	5,446.000	52.48	74.00	21.52	3.73	V	178.3	1.00
5	5,460.000	50.78	74.00	23.22	3.77	V	110.7	2.00
5	5,519.500	89.51			3.91	V	137.6	2.00

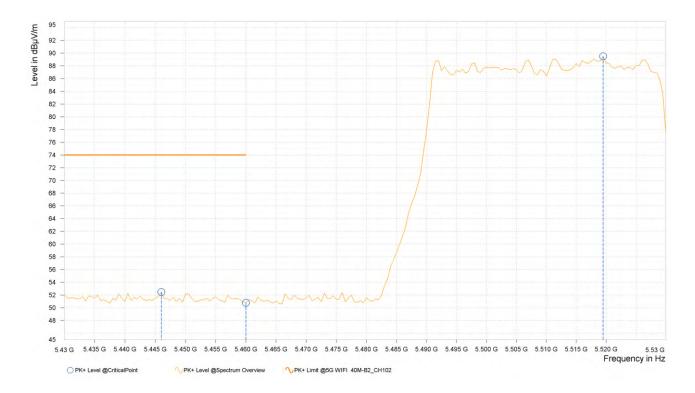



Rg	Frequency [MHz]		AVG Limit [dΒμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	5,458.000	37.30	54.00	16.70	3.76	V	147.8	2.00
5	5,460.000	37.19	54.00	16.82	3.77	V	1.7	2.00
5	5,513.500	70.97			3.89	V	252.3	2.00

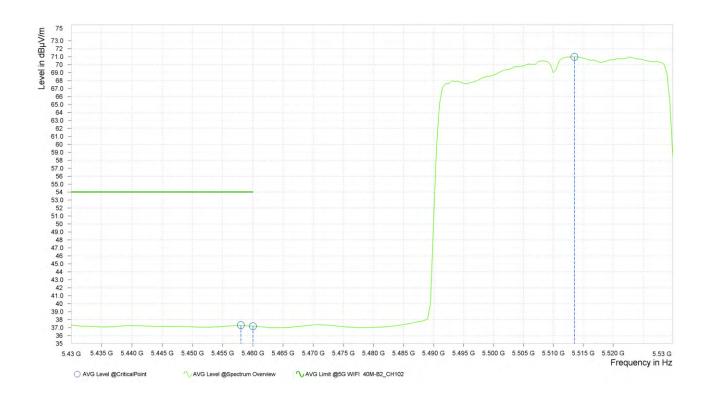


- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5510MHz: Fundamental frequency.
- 3. #: Out of restricted band.



802.11ax (40MHz) (RU484):


CHANNEL	TX Channel 110	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	DETECTOR FUNCTION	Average (AV)

Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,440.150	52.71	74.00	21.29	3.72	Н	172.9	2.00
6	5,460.000	52.21	74.00	21.79	3.76	Н	304.2	2.00
6	5,546.725	86.59		·	3.98	Н	41.5	1.00

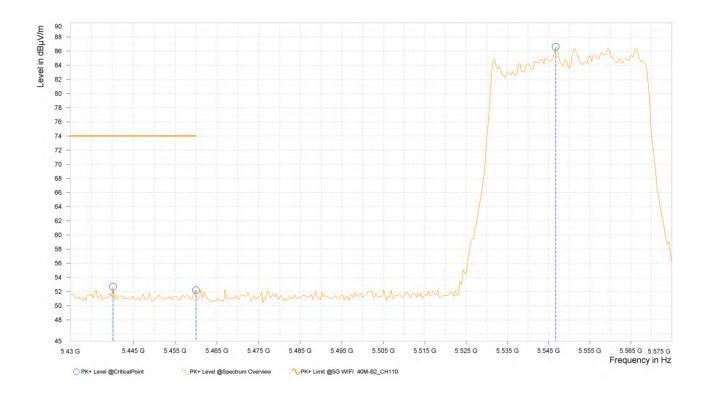




Rg	Frequency [MHz]		AVG Limit [dΒμV/m]		Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,447.038	37.34	54.00	16.66	3.74	Н	359	1.00
6	5,460.000	37.23	54.00	16.77	3.76	Н	359	1.00
6	5,562.313	74.67			4.04	Н	173.4	2.00

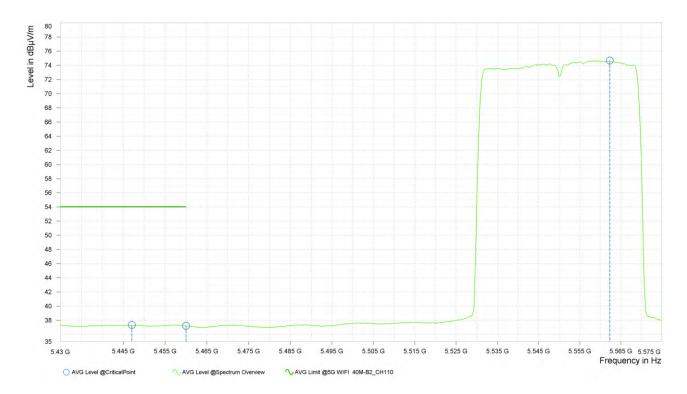




ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,441.963	52.26	74.00	21.74	3.72	V	211.7	1.00
6	5,460.000	51.27	74.00	22.73	3.76	V	29	1.00
6	5,547.088	89.97			3.98	V	122.1	2.00

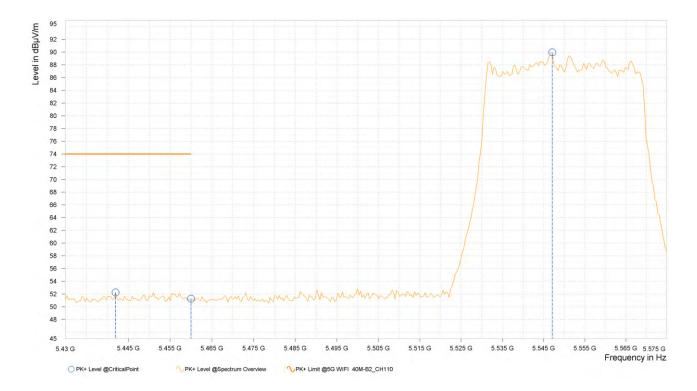



Rg	Frequency [MHz]		AVG Limit [dΒμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,444.500	37.37	54.00	16.63	3.73	V	1.7	2.00
6	5,460.000	37.34	54.00	16.66	3.76	V	5.1	1.00
6	5,547.450	72.31			3.98	V	5.1	1.00

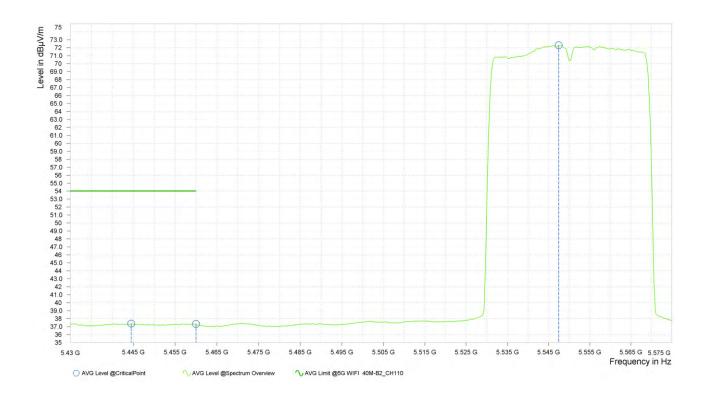


- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5500MHz: Fundamental frequency.
- 3. #: Out of restricted band.



802.11ax (40MHz) (RU484):

CHANNEL	TX Channel 134	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE		DETECTOR FUNCTION	Average (AV)


Rg	Frequency [MHz]		PK+ Limit [dBμV/m]		Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
7	5,679.500	85.62			4.44	Н	147.7	2.00
7	5,725.000	52.38	68.20	15.82	4.49	Н	147.7	2.00
7	5,733.000	52.76	68.20	15.44	4.50	Н	359.1	1.00

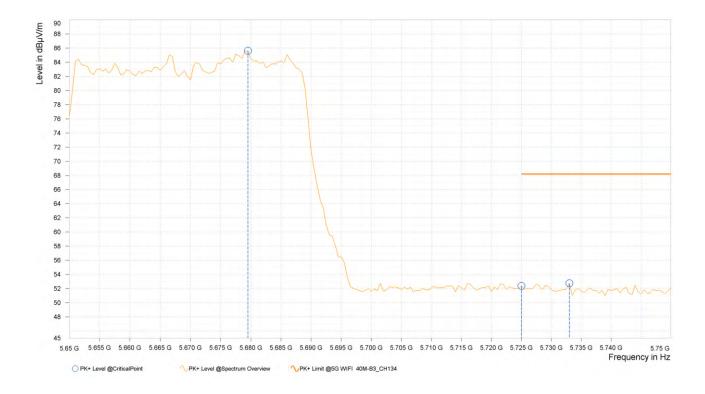



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
7	5,666.500	85.64			4.41	V	89.4	1.00
7	5,725.000	51.82	68.20	16.38	4.49	V	1.4	2.00
7	5,732.500	53.08	68.20	15.12	4.50	V	254.2	1.00

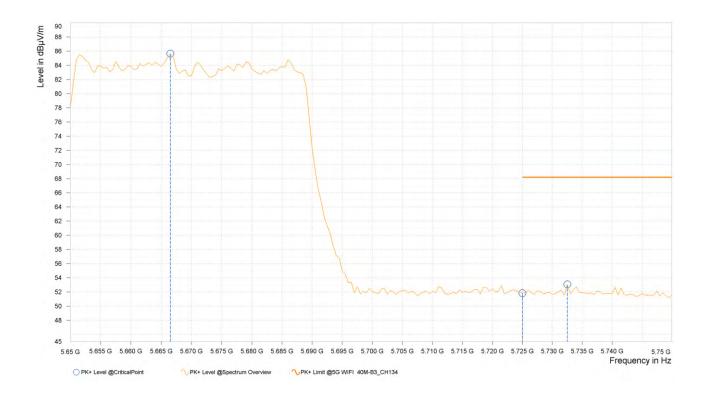


- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5670MHz: Fundamental frequency.
- 3. #: Out of restricted band.



802.11ax (40MHz) (RU484):

CHANNEL	TX Channel 142	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE		DETECTOR FUNCTION	Average (AV)


Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
8	5,706.767	84.97			4.49	Н	186.6	2.00
8	5,850.000	52.35	68.20	15.85	5.37	Н	262.4	1.00
8	5,894.500	53.37	68.20	14.83	5.47	Н	333.4	2.00

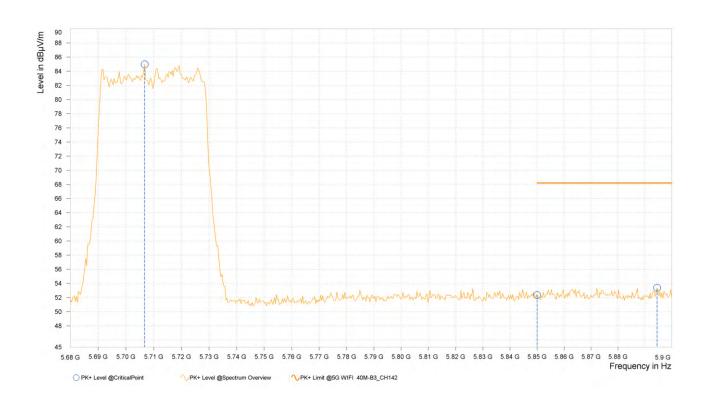



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
8	5,706.400	87.17			4.49	V	119.7	2.00
8	5,850.000	52.27	68.20	15.93	5.37	V	53.4	2.00
8	5,870.300	53.73	68.20	14.47	5.42	V	156.9	1.00

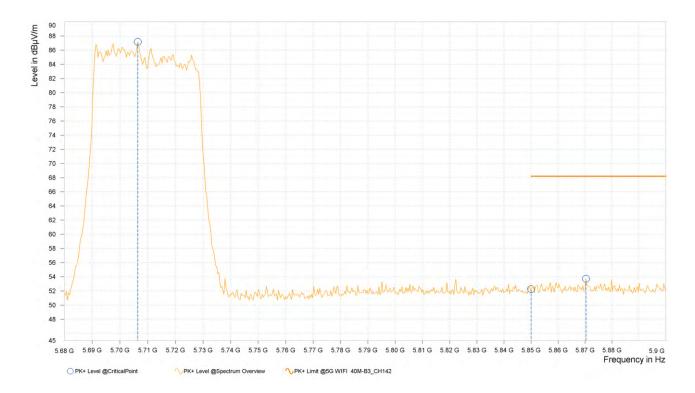


- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5710MHz: Fundamental frequency.
- 3. #: Out of restricted band.



802.11ax (80MHz) (RU996):

CHANNEL	TX Channel 106	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE		DETECTOR FUNCTION	Average (AV)

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,400.217	52.31	74.00	21.69	3.63	Н	197.9	2.00
3	5,460.000	51.81	74.00	22.19	3.76	Н	359.1	1.00
3	5,507.933	87.62			3.88	Н	251.8	1.00

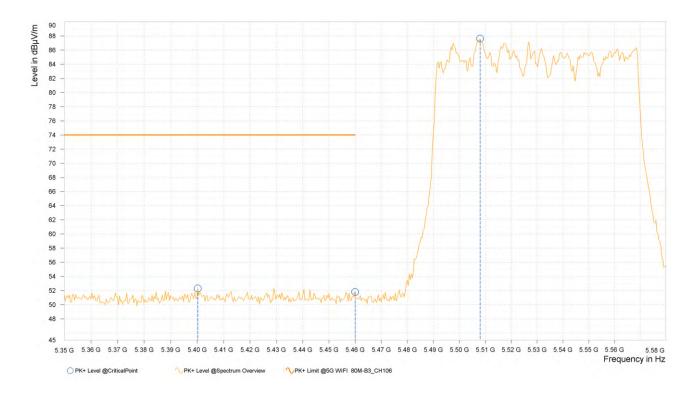




Rg	Frequency [MHz]		AVG Limit [dΒμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,399.450	37.90	54.00	16.10	3.62	Н	298.5	1.00
3	5,460.000	37.68	54.00	16.32	3.76	Н	298.5	1.00
3	5,515.217	74.46			3.89	Н	162.1	2.00






ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,371.083	52.23	74.00	21.77	3.61	V	354.8	2.00
3	5,460.000	51.32	74.00	22.68	3.76	V	5	2.00
3	5,511.767	86.80			3.89	V	354.8	2.00

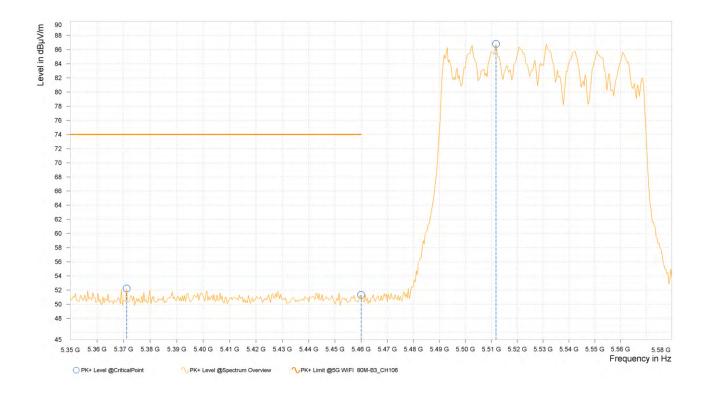



Rg	Frequency [MHz]		AVG Limit [dΒμV/m]		Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,399.833	37.81	54.00	16.19	3.62	V	1	1.00
3	5,460.000	37.60	54.00	16.40	3.76	V	300.8	1.00
3	5,540.900	79.75			3.96	V	160.9	2.00

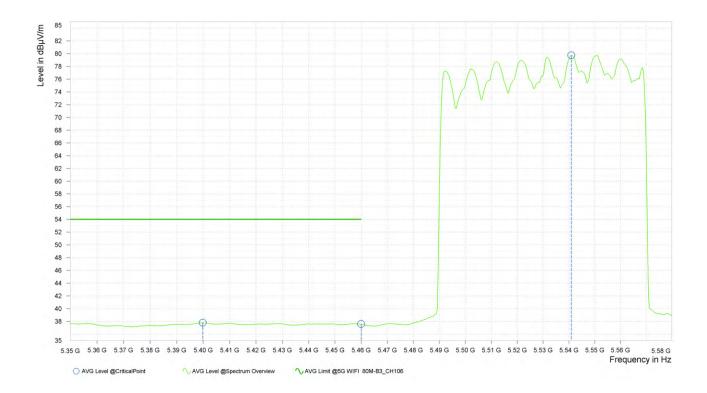


- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5530MHz: Fundamental frequency.
- 3. #: Out of restricted band.



802.11ax (80MHz) (RU996):

CHANNEL	TX Channel 122	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE		DETECTOR FUNCTION	Average (AV)


Rg	Frequency [MHz]		PK+ Limit [dBμV/m]		Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,608.450	86.99			4.26	Н	297.2	1.00
4	5,725.000	51.79	68.20	16.41	4.49	Н	5.1	1.00
4	5,728.625	52.66	68.20	15.54	4.49	Н	315.1	2.00

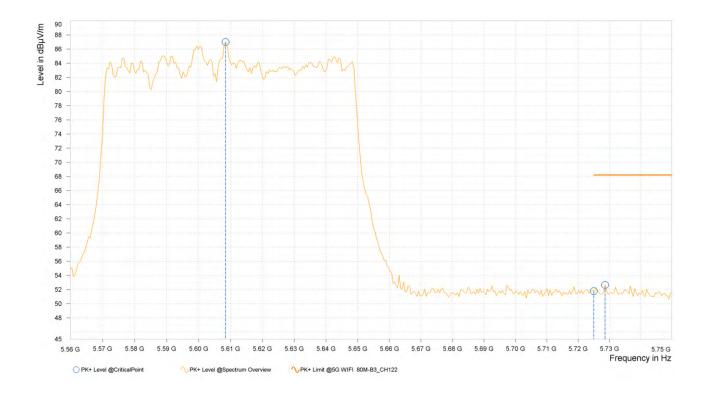



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,591.350	90.68			4.18	V	108.3	2.00
4	5,725.000	51.92	68.20	16.28	4.49	٧	58.1	2.00
4	5,740.025	52.67	68.20	15.53	4.55	V	299.6	1.00

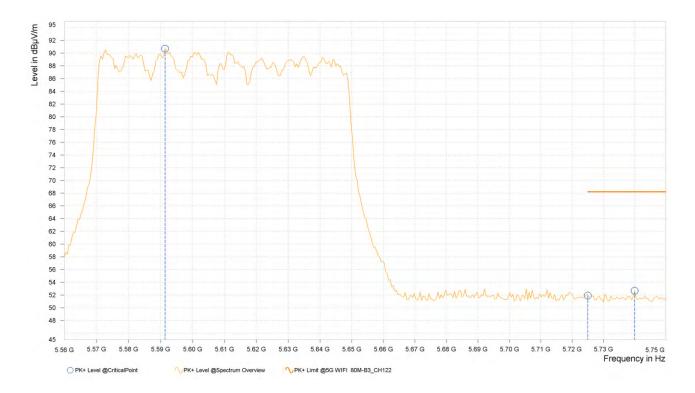


- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5610MHz: Fundamental frequency.
- 3. #: Out of restricted band.



802.11ax (80MHz) (RU996):

CHANNEL	TX Channel 138	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE		DETECTOR FUNCTION	Average (AV)


Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	5,714.967	88.46			4.49	Н	4.6	1.00
5	5,850.000	52.37	68.20	15.83	5.38	Н	359	1.00
5	5,884.833	53.66	68.20	14.54	5.45	Н	359	2.00

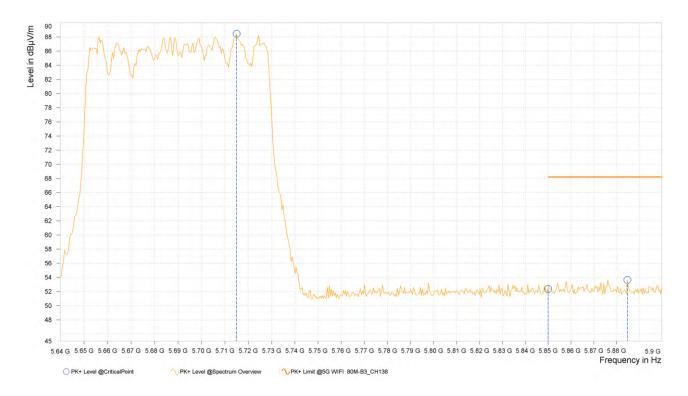



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	5,683.767	89.93			4.45	V	110.8	2.00
5	5,850.000	51.91	68.20	16.29	5.38	V	314	2.00
5	5,893.500	53.65	68.20	14.55	5.47	V	1	1.00

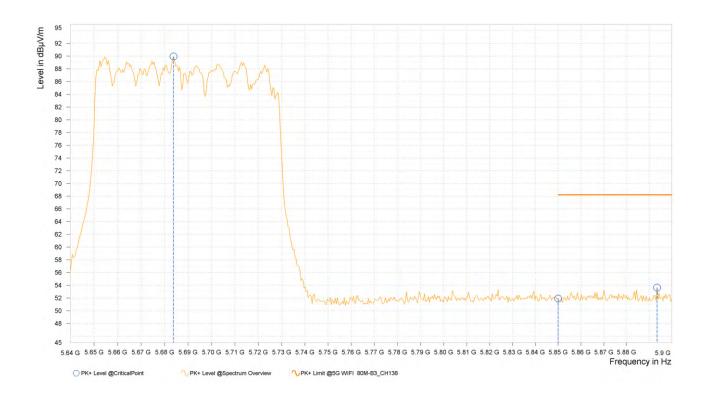


- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5690MHz: Fundamental frequency.
- 3. #: Out of restricted band.



802.11ax (160MHz) (RU1992):


CHANNEL	TX Channel 114	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE		DETECTOR FUNCTION	Average (AV)

Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,353.938	52.56	74.00	21.44	3.60	Н	262.5	2.00
9	5,460.000	50.58	74.00	23.42	3.76	Н	4.5	1.00
9	5,515.375	87.51			3.90	Н	4.5	1.00

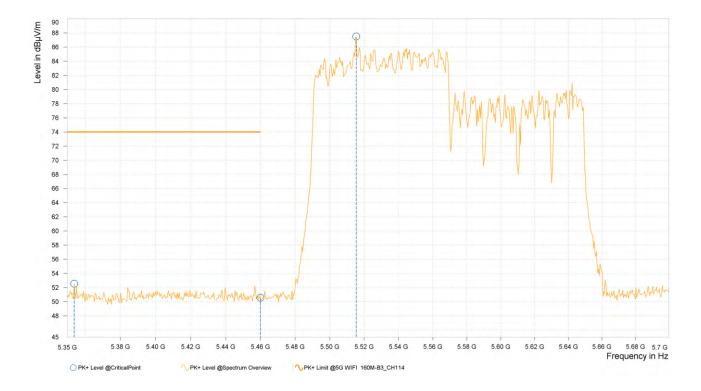




Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dΒμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,428.750	37.54	54.00	16.46	3.69	Н	359	2.00
9	5,460.000	37.26	54.00	16.74	3.76	Н	312.7	2.00
9	5,515.813	74.82			3.90	Н	5.1	1.00

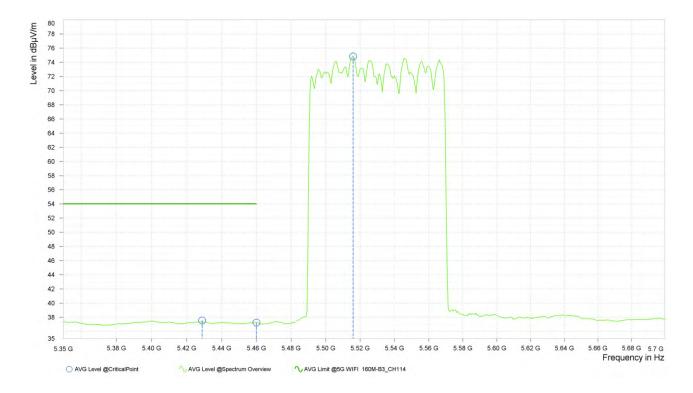




ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,406.875	54.26	74.00	19.74	3.64	V	359.1	1.00
9	5,460.000	53.63	74.00	20.37	3.76	V	1	1.00
9	5,543.813	92.37			3.97	V	52.1	1.00

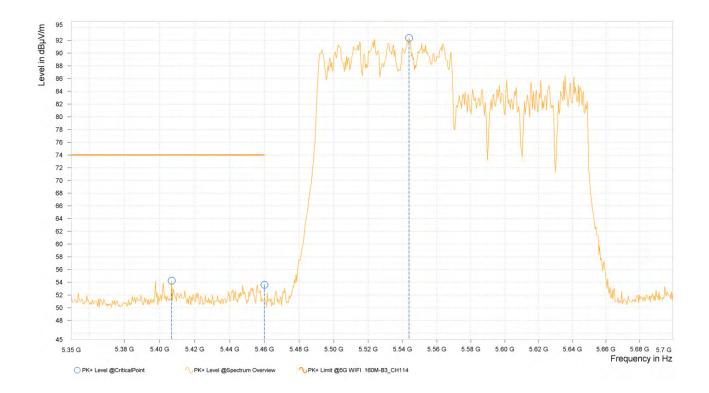



Rg	Frequency [MHz]		AVG Limit [dΒμV/m]		Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,401.625	37.52	54.00	16.48	3.63	V	1	1.00
9	5,460.000	37.41	54.00	16.59	3.76	V	1	1.00
9	5,532.875	79.22			3.94	V	46.1	1.00

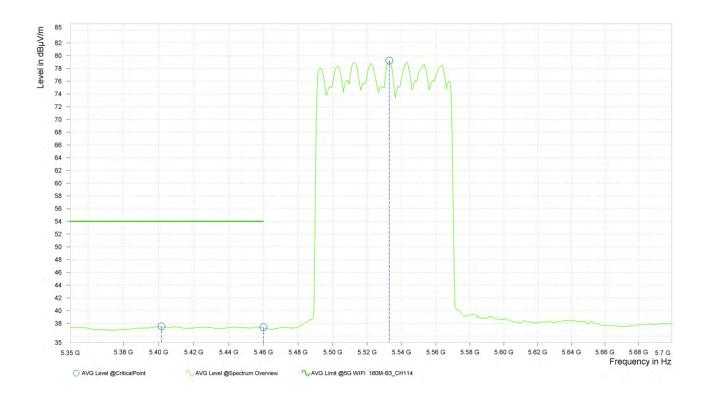


- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5610MHz: Fundamental frequency.
- 3. #: Out of restricted band.



Band 4: 802.11a

CHANNEL	TX Channel 149	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)


Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
12	5,607.000	51.70	68.20	16.50	11.29	Н	4.9	1.00
12	5,650.000	50.85	68.20	17.35	11.45	Н	359.1	1.00
12	5,748.000	107.03			11.73	Н	88.9	1.00
12	5,925.000	51.25	68.20	16.95	12.17	Н	1	2.00
12	5,998.500	53.13	68.20	15.07	12.48	Н	355.3	1.00

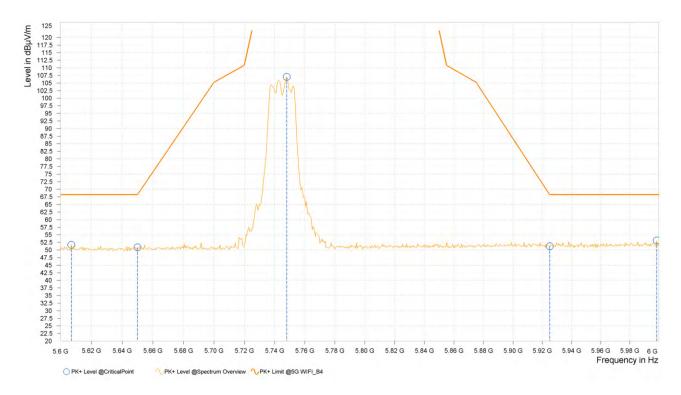



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
12	5,632.000	51.63	68.20	16.57	11.37	V	227.6	1.00
12	5,650.000	51.03	68.20	17.17	11.45	V	89	1.00
12	5,745.500	106.67			11.73	V	133.6	2.00
12	5,925.000	51.39	68.20	16.81	12.17	V	133.6	2.00
12	5,971.500	52.64	68.20	15.56	12.31	V	181.4	2.00

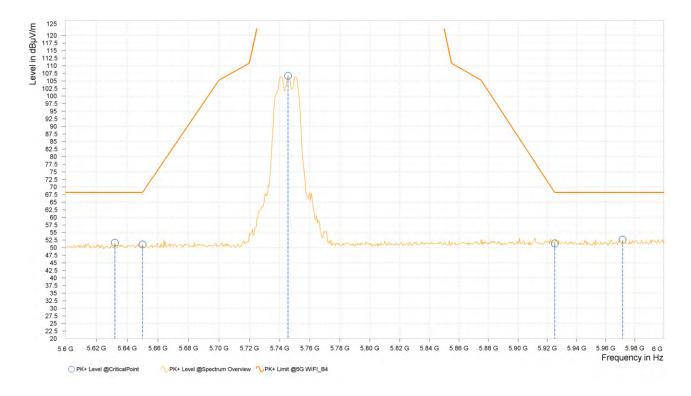

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5745MHz: Fundamental frequency.



CHANNEL	TX Channel 157	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
12	5,630.500	51.54	68.20	16.66	11.37	Н	359.1	1.00
12	5,650.000	51.53	68.20	16.67	11.45	Н	133.1	1.00
12	5,782.500	106.77			11.85	Н	87.7	1.00
12	5,925.000	50.94	68.20	17.26	12.17	Н	355	2.00
12	5,962.500	53.34	68.20	14.86	12.25	Н	133.6	2.00

