

Lettering and symbols abrasion-resistant according to EN 60335-1 §7.14 (Marking shall be clear legible and durable after: Rubbing the marking by hand for 15 sec with a piece of cloth soaked with water and again for 15 sec with a piece of cloth soaked with petroleum spirit)

****Material:**

Selfadhesive foil, thickness ca. 0,1mm with good adhesion on polypropylene, not detachable and gasoline-resistant.

Production and testing procedures:

according to KN 026.010


Supply with good yank off.

Design according to printing file.

Background: Silver

Colour imprint: Black

Lettering of rating plate(2:1 Printing)

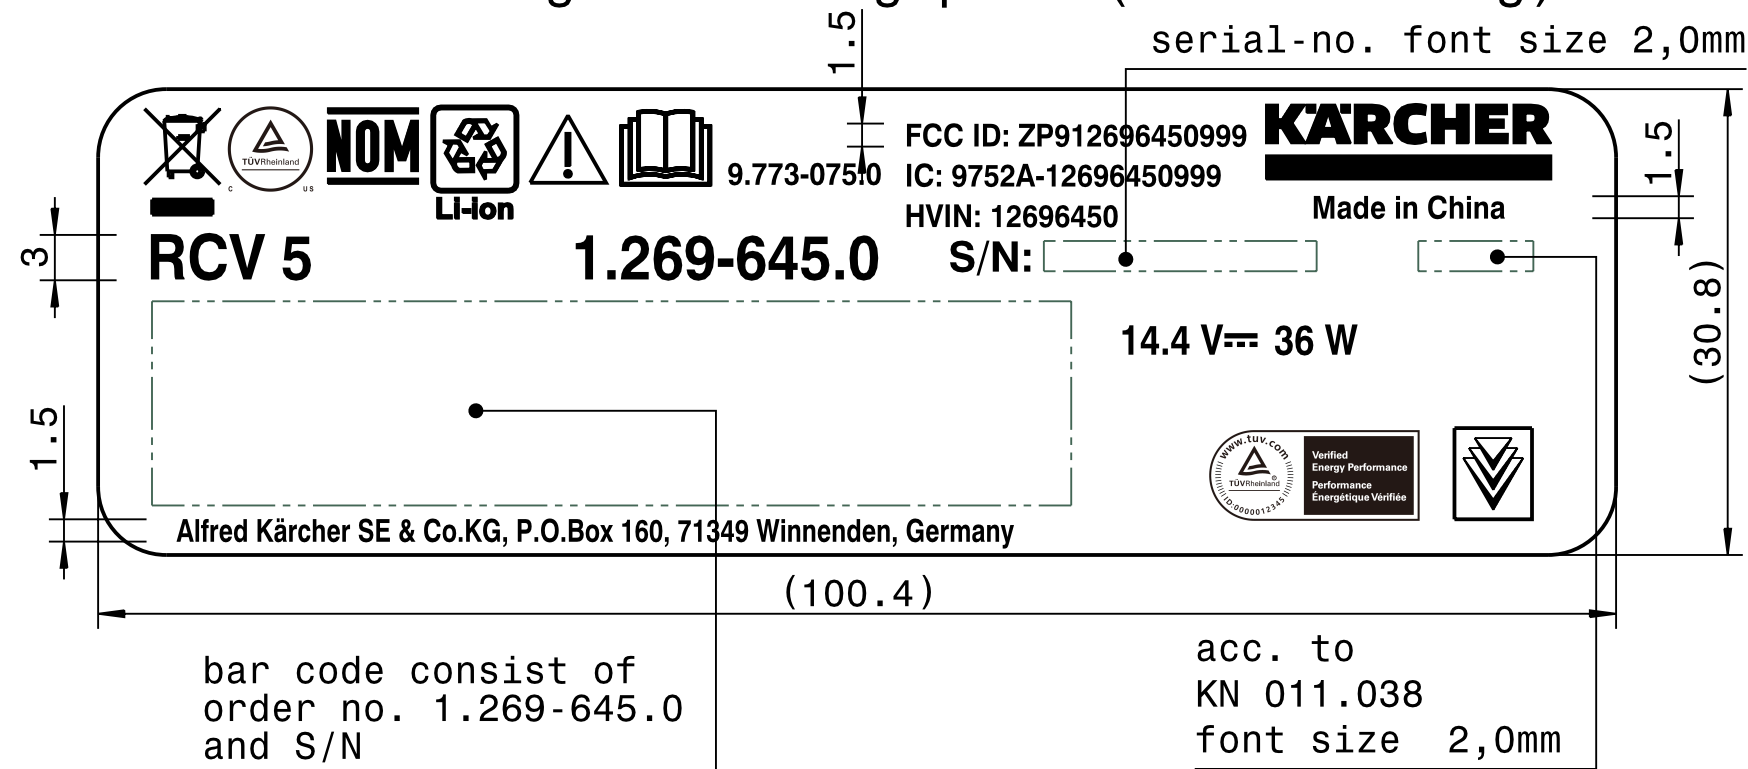

(a) FCC-ID: XXXX
IC: XXXX
(a) HVIN: 12696450

Maße werden besonders geprüft especially checked dimensions		Erstmusterprüfung first sample examination Bescheinigung EN 10204 certification EN 10204	
Werkstoff material / substance **	Allgemeintoleranzen general tolerances DIN ISO 2768-mK	Projection E dimensions in mm	Oberfläche / surface EN ISO 1302
Halbzeug semi finished product	Tolerierung / toleration DIN EN ISO 8015	Material-Nr. / material no. 9.778-188.0	
Werkstoffbez. / mat. designation Schweißtechn. / welding techn.		Benennung / description Rating plate of units RCV 5 *KNA Rating plate of units RCV 5 *KNA	
geprüft checked		document	
Ausgabedatum date of issue		index	
Gezeichnet drawn by		Anzahl / count	
Technische Referenz technical reference		number	
Genehmigt approved by		index	
CN50K20029		CN50K20029	
-----		-----	
Anderung / Engineering change		ersetzt / replaces	
index		Datum / date	
a		2194973	

Compliance with the current version of Kärcher standard KN 050.032 Constituent substances (ban of lead, cadmium, etc.) must be guaranteed. Standard date format according to ISO 8601 (YYYY-MM-DD). The reproduction, distribution and utilization of this document as well as the communication of its contents to others without explicit authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design. Copyright © Alfred Kärcher SE & Co. KG



Lettering and symbols resistant to abrasion, resistant against oil, dilute acids, lye solutions and gasoline. Colour for imprint: UL approved. Black matt

****Material:**

Selfadhesive polyester-foil, thickness ca. 0,06 to 0,1mm. Silver matt.
Temperature-resistant up to +60°C.
Foil UL approved.
UL recognized component marking and labeling system (PGDQ) according UL 969, suitable for ABS surface, With best adhesive on ABS.


Supply with good yank off.

undimensioned font size 1,6mm
logos, symbols and approval marks acc. to KN 012.005

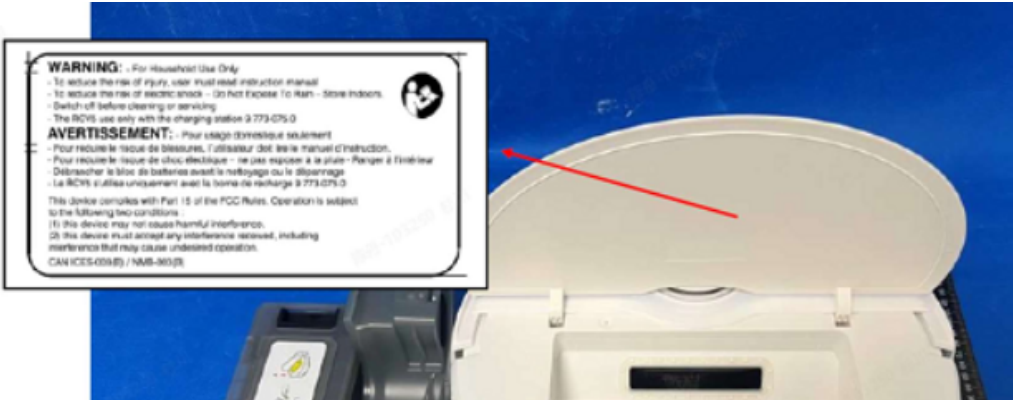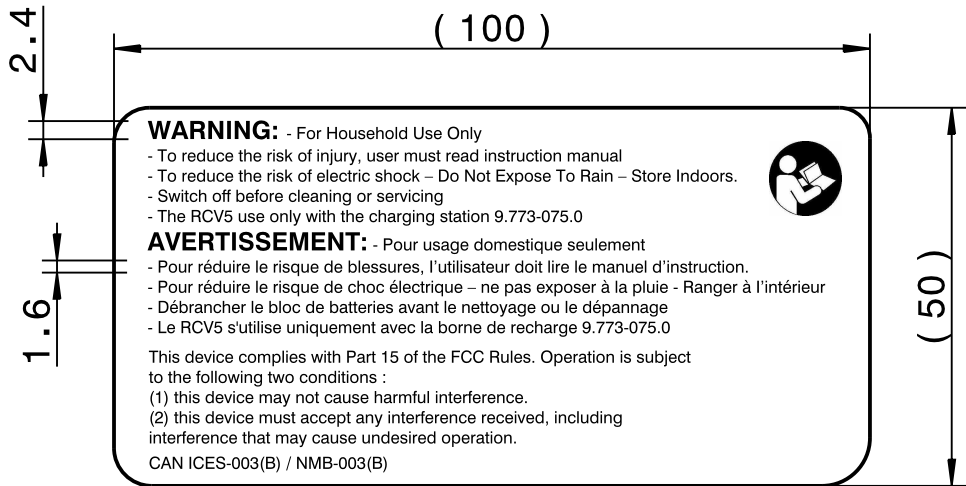

Maße werden besonders geprüft
especially checked dimensions

Erstmusterprüfung
first sample examination
Bescheinigung EN 10204
certification EN 10204

Werkstoff material / substance **		Allgemeintoleranzen general tolerances DIN ISO 2768--mK		Projection E  dimensions in mm		Oberfläche / surface EN ISO 1302			
Halbzeug semi finished product		Tolerierung / toleration DIN EN ISO 8015		Benennung / description Warning label RCV 5 *KNA Warning label RCV 5 *KNA		Material-Nr. / material no.		9.778-304.0	
Werkstoffbez. / mat. designation		☐ geprüft checked		document		number	type	version	status
Schweißtechn. / welding techn.		☐		Warning label RCV 5 *K		5893149	DRK	00	CK
Ausgabedatum date of issue		Gezeichnet drawn by		Technische Referenz technical reference		Genehmigt approved by		Änderung / Engineering change	
		CN50K20029		CN50K20029		-----		index	Anzahl / count
								number	ersetzt / replaces
								Datum / date	index
								2194973	

A3