


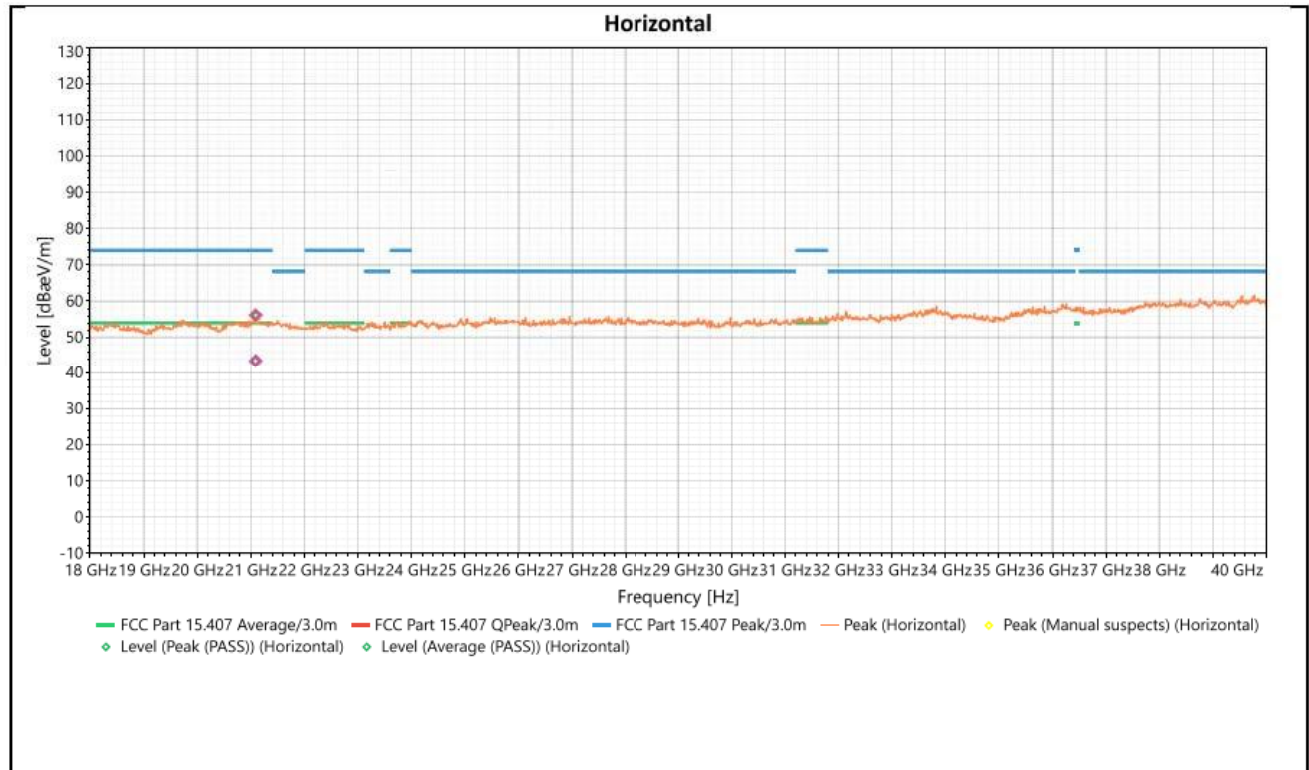



Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	10167.26	Horizontal	26.495	68.23	-41.735	1.26	221	2.5	Peak (PASS)
2	13297.03	Horizontal	23.306	74	-50.694	1.91	203	3.39	Average (PASS)
3	13297.03	Horizontal	25.593	54	-28.407	1.91	203	3.39	Peak (PASS)
4	16447.57	Horizontal	22.627	68.23	-45.603	1	74	5.09	Average (PASS)
5	21090.9	Horizontal	56.108	74	-17.892	1.58	183	8.49	Peak (PASS)
6	21090.9	Horizontal	43.431	54	-10.569	1.58	183	8.49	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

CHANNEL	802.11N HT20 5260 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

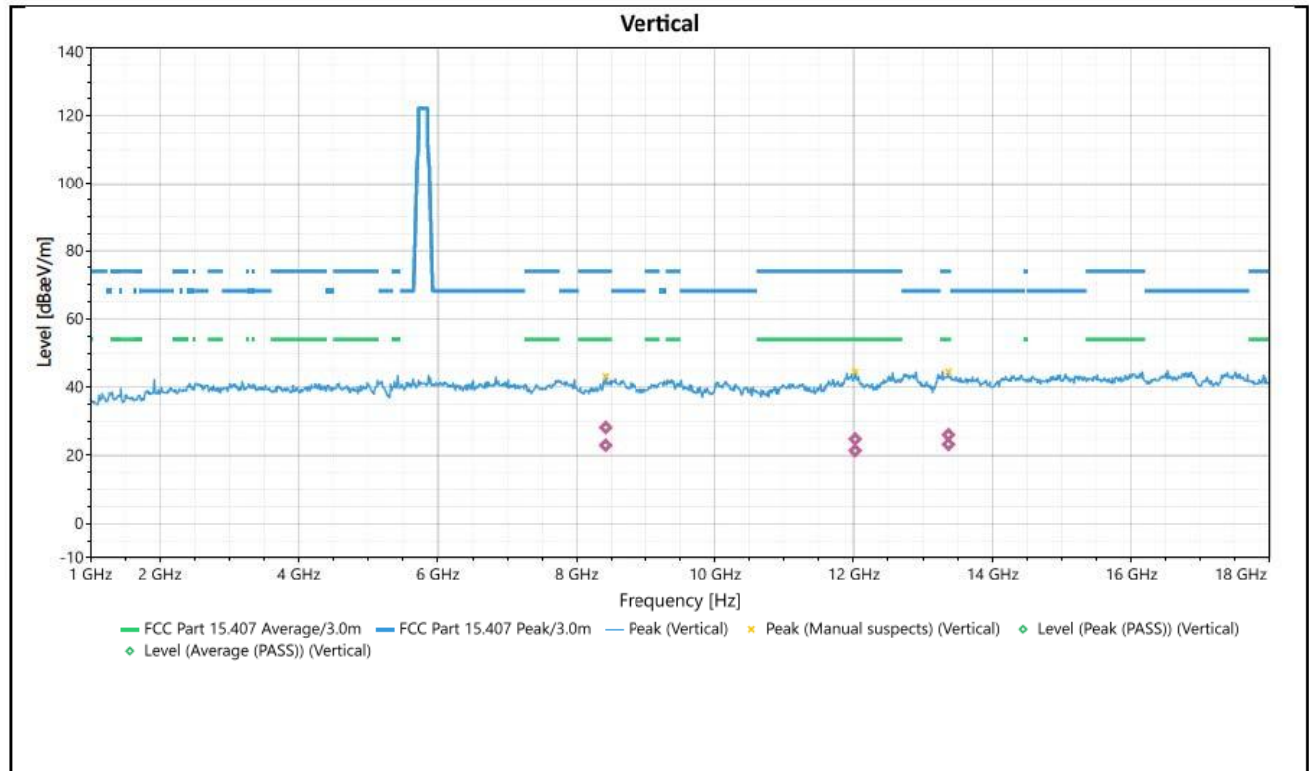

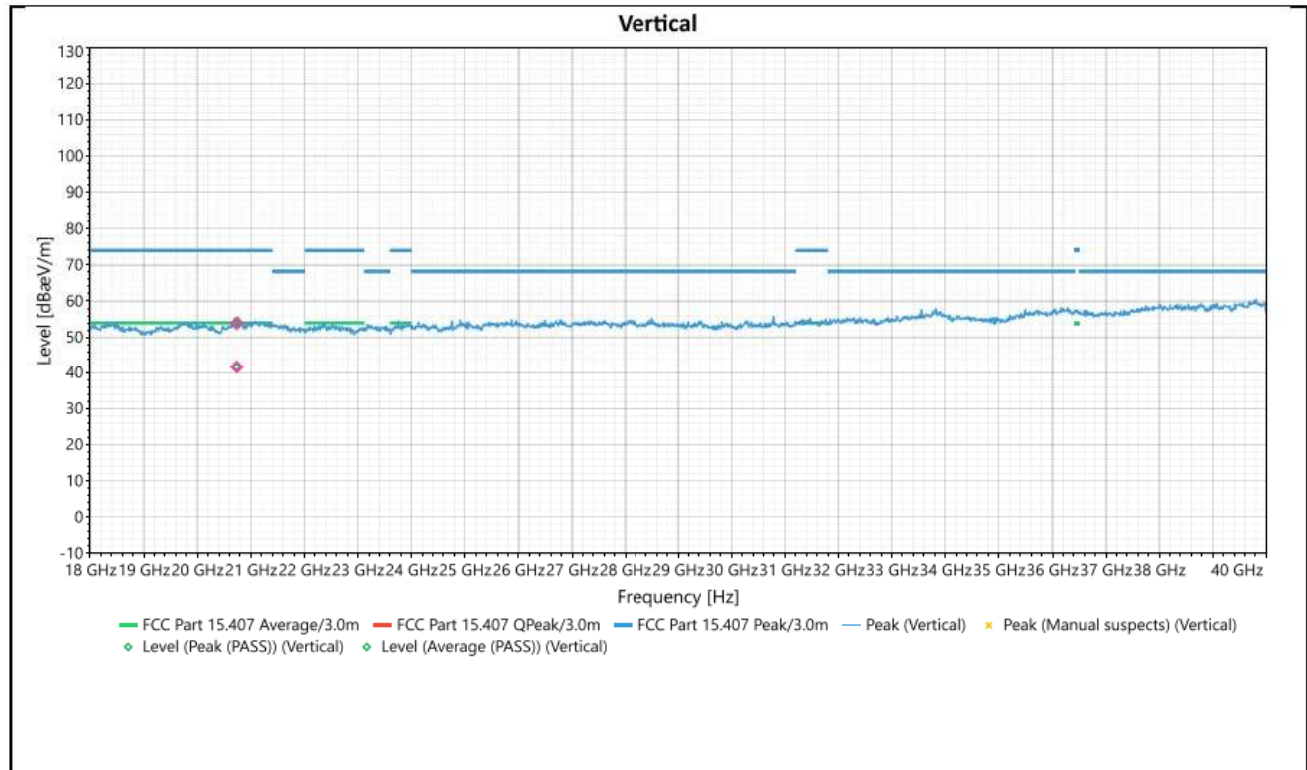



Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	8415.57	Vertical	28.201	74	-45.799	1.8	184	2.07	Peak (PASS)
2	8415.57	Vertical	22.97	54	-31.03	1.8	184	2.07	Average (PASS)
3	12022.71	Vertical	21.412	74	-52.588	1.91	332	3.61	Peak (PASS)
4	12022.71	Vertical	24.815	54	-29.185	1.91	332	3.61	Average (PASS)
5	13367.61	Vertical	23.228	74	-50.772	2	332	3.2	Peak (PASS)
6	13367.61	Vertical	26.072	54	-27.928	2	332	3.2	Average (PASS)
7	20736.81	Vertical	53.89	74	-20.11	1.82	4	8.51	Peak (PASS)
8	20736.81	Vertical	41.618	54	-12.382	1.82	4	8.51	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

Frequency	802.11N HT20 5260 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

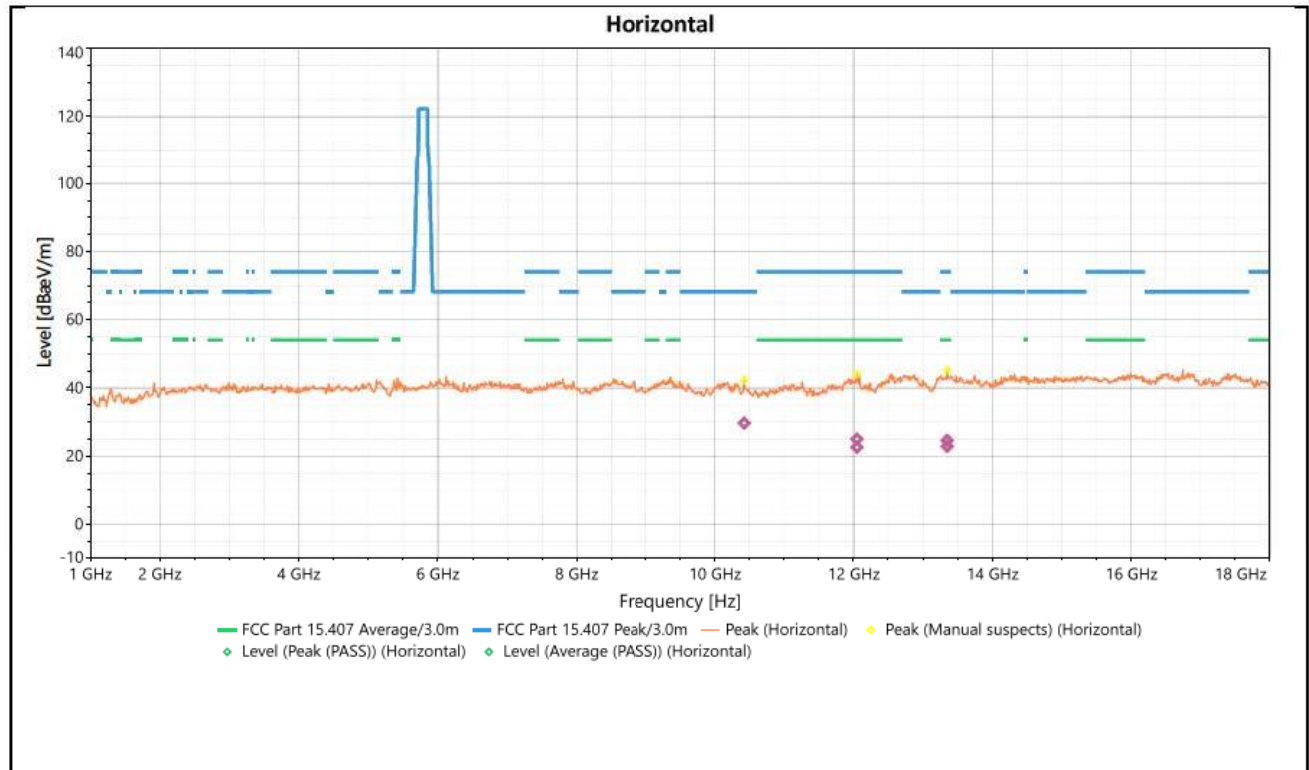

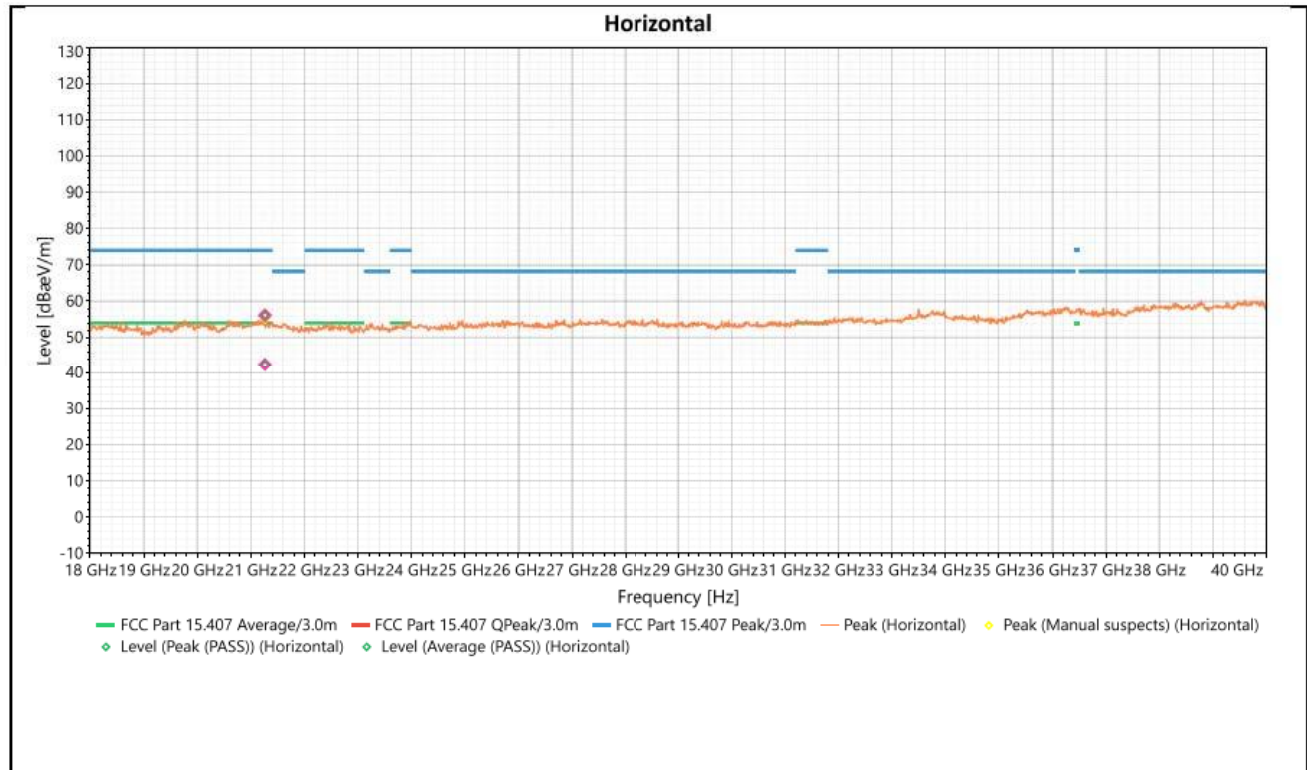



Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	10424.61	Horizontal	29.726	68.23	-38.504	1.91	92	2.74	Peak (PASS)
2	12049.69	Horizontal	22.604	74	-51.396	1.69	222	3.86	Average (PASS)
3	12049.69	Horizontal	24.999	54	-29.001	1.69	222	3.86	Peak (PASS)
4	13348.93	Horizontal	22.892	74	-51.108	1.25	36	3.34	Average (PASS)
5	13348.93	Horizontal	24.655	54	-29.345	1.25	36	3.34	Peak (PASS)
6	21264.7	Horizontal	56.103	74	-17.897	1.4	66	8.29	Peak (PASS)
7	21264.7	Horizontal	42.363	54	-11.637	1.4	66	8.29	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

CHANNEL	802.11N HT20 5280 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

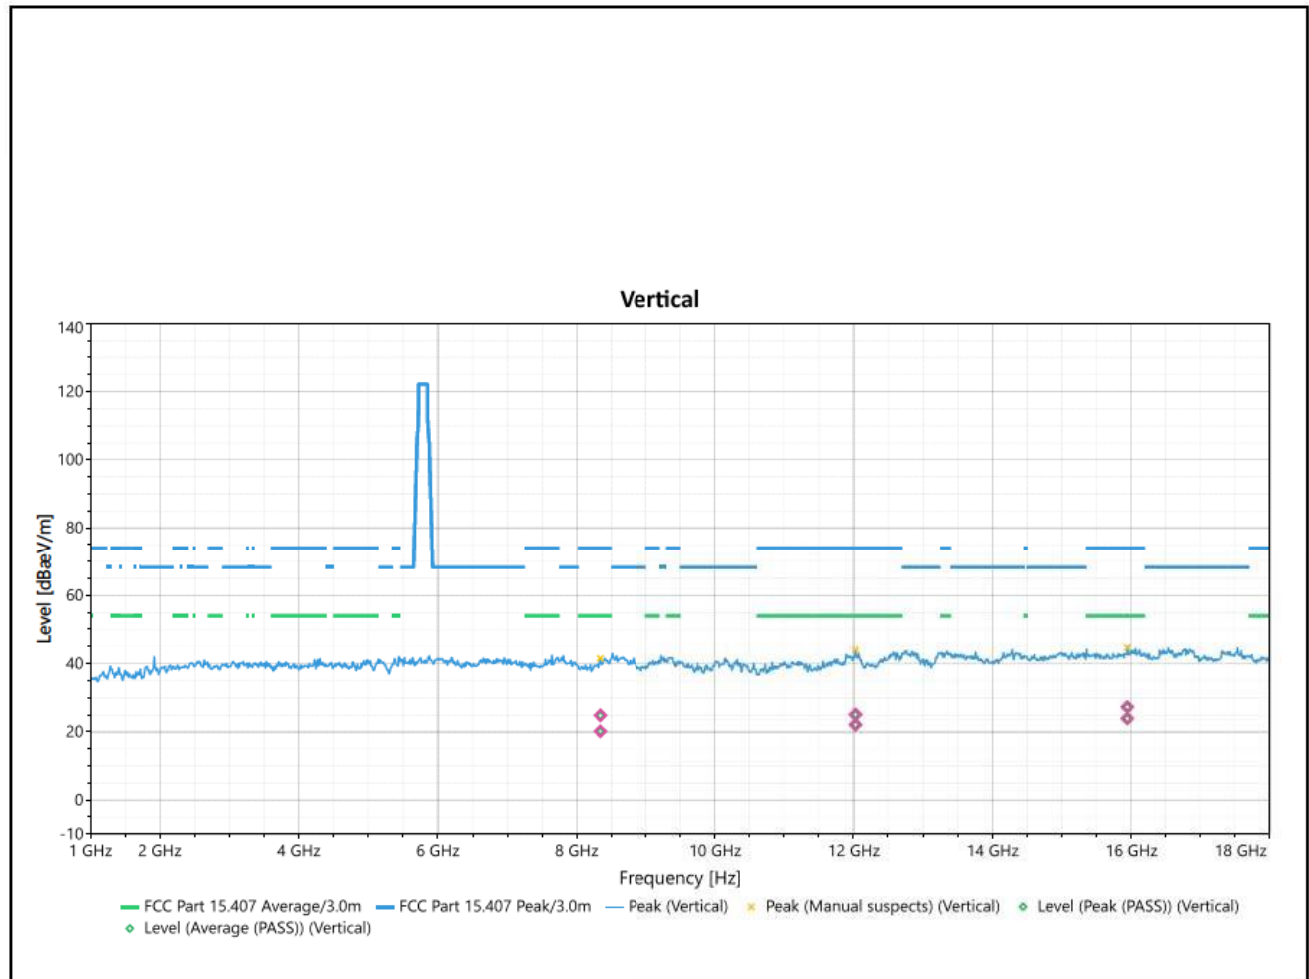

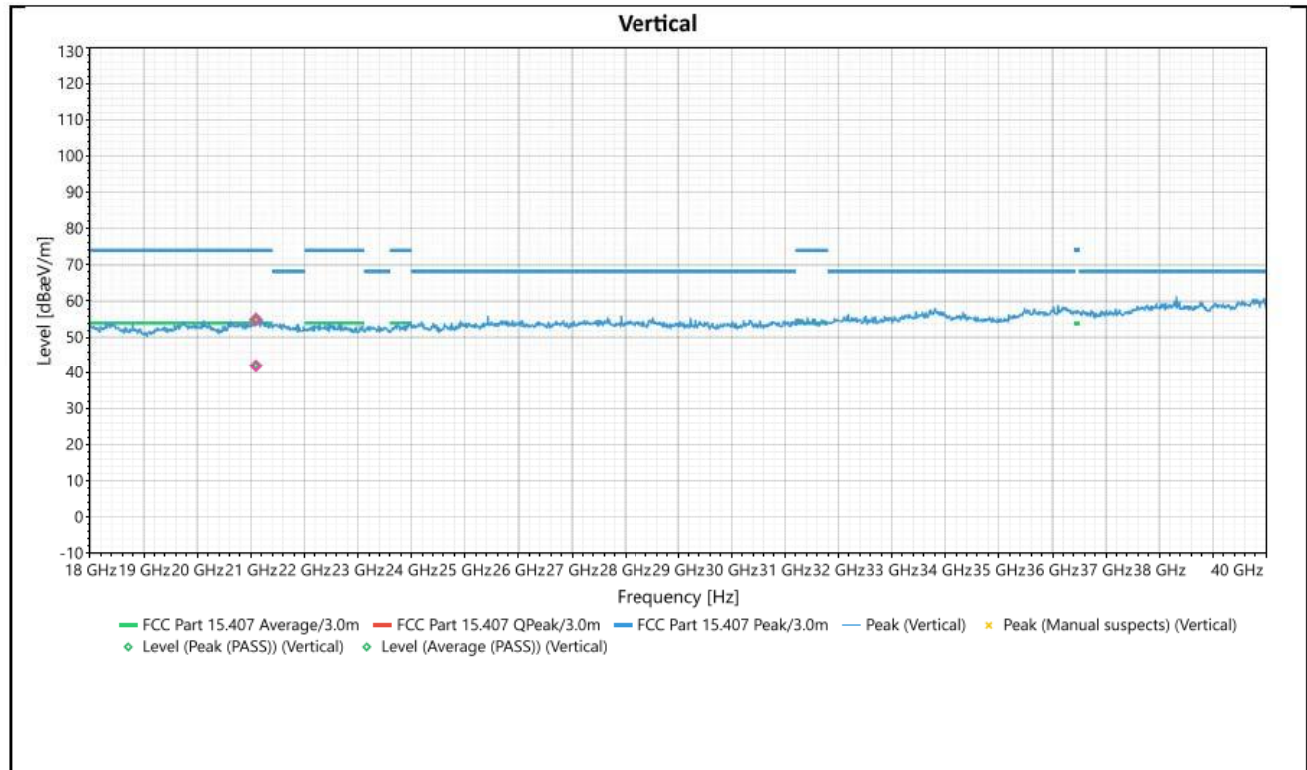



Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	8340.862	Vertical	24.819	74	-49.181	1.03	313	1.97	Peak (PASS)
2	8340.862	Vertical	20.147	54	-33.853	1.03	313	1.97	Average (PASS)
3	12028.94	Vertical	22.087	74	-51.913	1.81	240	3.61	Peak (PASS)
4	12028.94	Vertical	25.047	54	-28.953	1.81	240	3.61	Average (PASS)
5	15945.31	Vertical	23.91	74	-50.09	1.91	129	4.6	Peak (PASS)
6	15945.31	Vertical	27.257	54	-26.743	1.91	129	4.6	Average (PASS)
7	21093.18	Vertical	54.897	74	-19.103	1.97	74	8.63	Peak (PASS)
8	21093.18	Vertical	41.954	54	-12.046	1.97	74	8.63	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

Frequency	802.11N HT20 5280 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

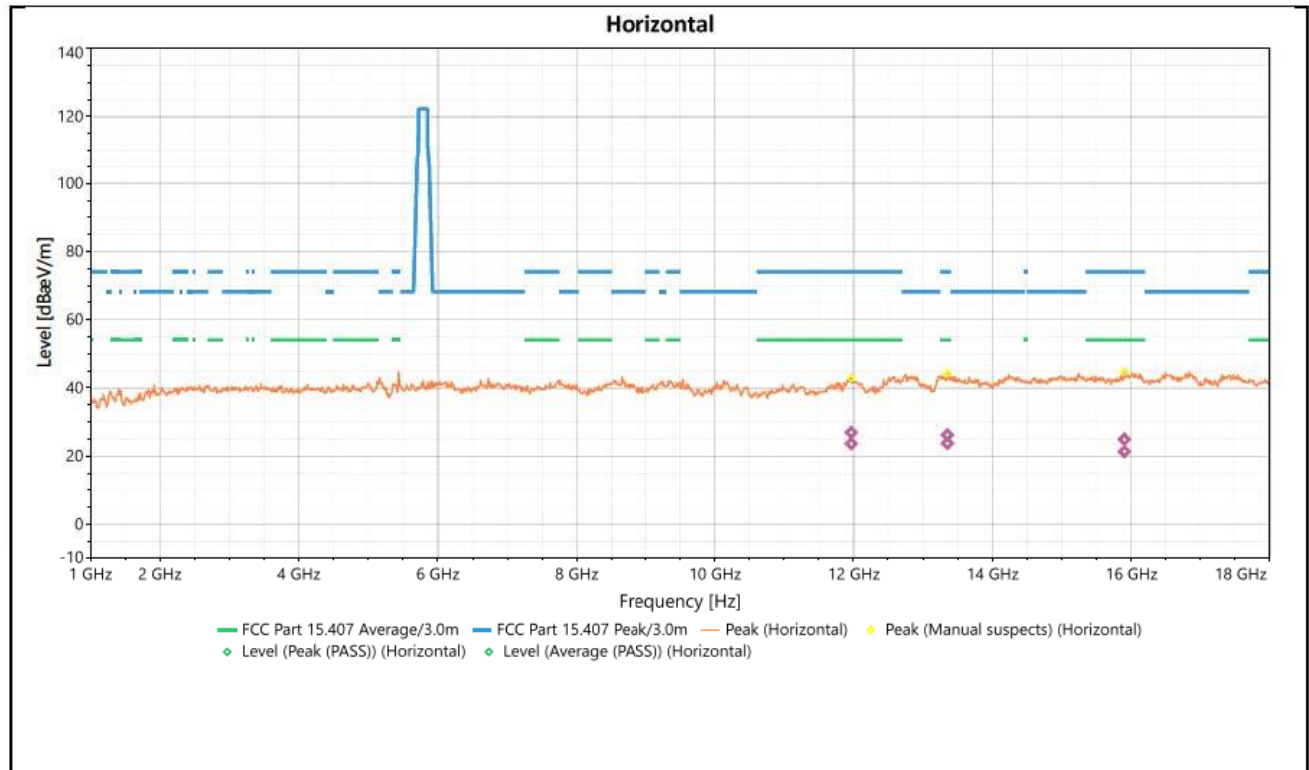

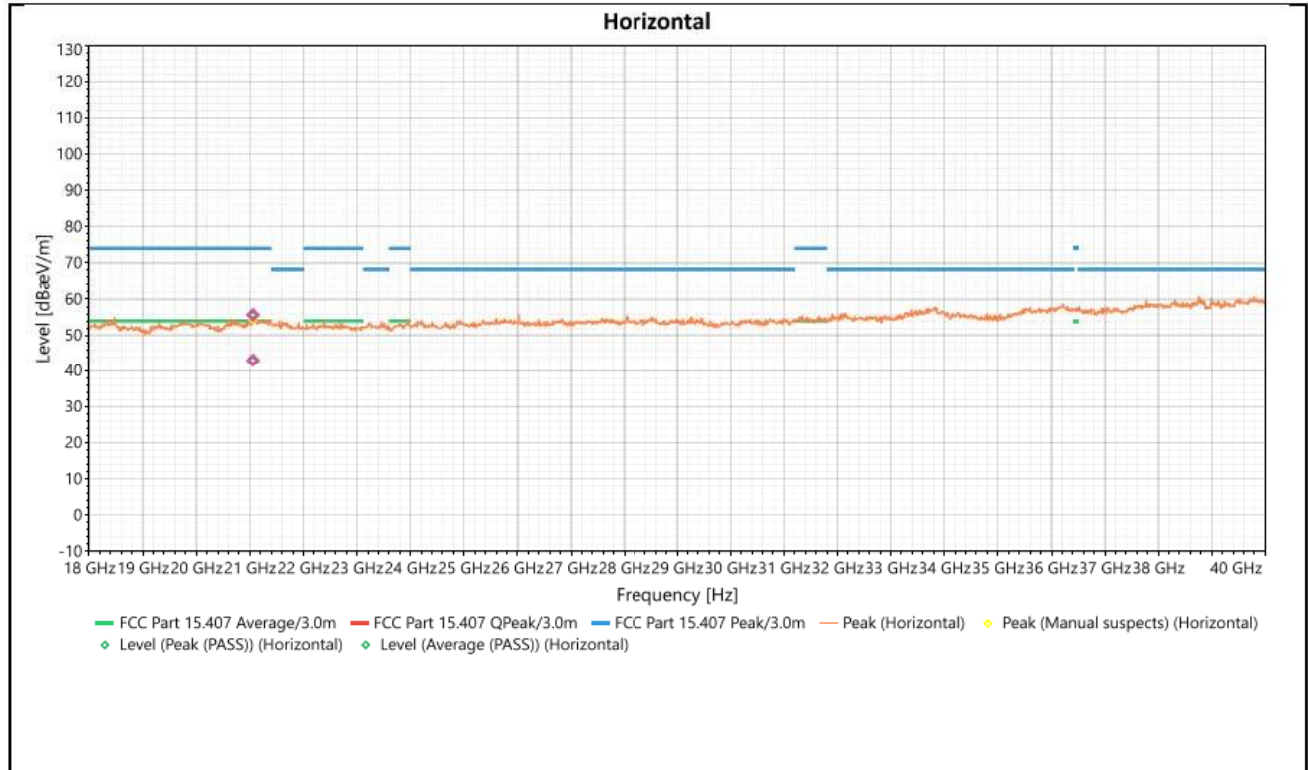



Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	11966.67	Horizontal	26.951	74	-47.049	1.04	360	3.71	Peak (PASS)
2	11966.67	Horizontal	23.66	54	-30.34	1.04	360	3.71	Average (PASS)
3	13353.06	Horizontal	23.791	74	-50.209	2	91	3.34	Peak (PASS)
4	13353.06	Horizontal	26.206	54	-27.794	2	91	3.34	Average (PASS)
5	15903.8	Horizontal	21.328	74	-52.672	1.26	203	4.6	Peak (PASS)
6	15903.8	Horizontal	24.93	54	-29.07	1.26	203	4.6	Average (PASS)
7	21060.1	Horizontal	55.637	74	-18.363	1.79	172	8.5	Peak (PASS)
8	21060.1	Horizontal	43.007	54	-10.993	1.79	172	8.5	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

CHANNEL	802.11N HT20 5320 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

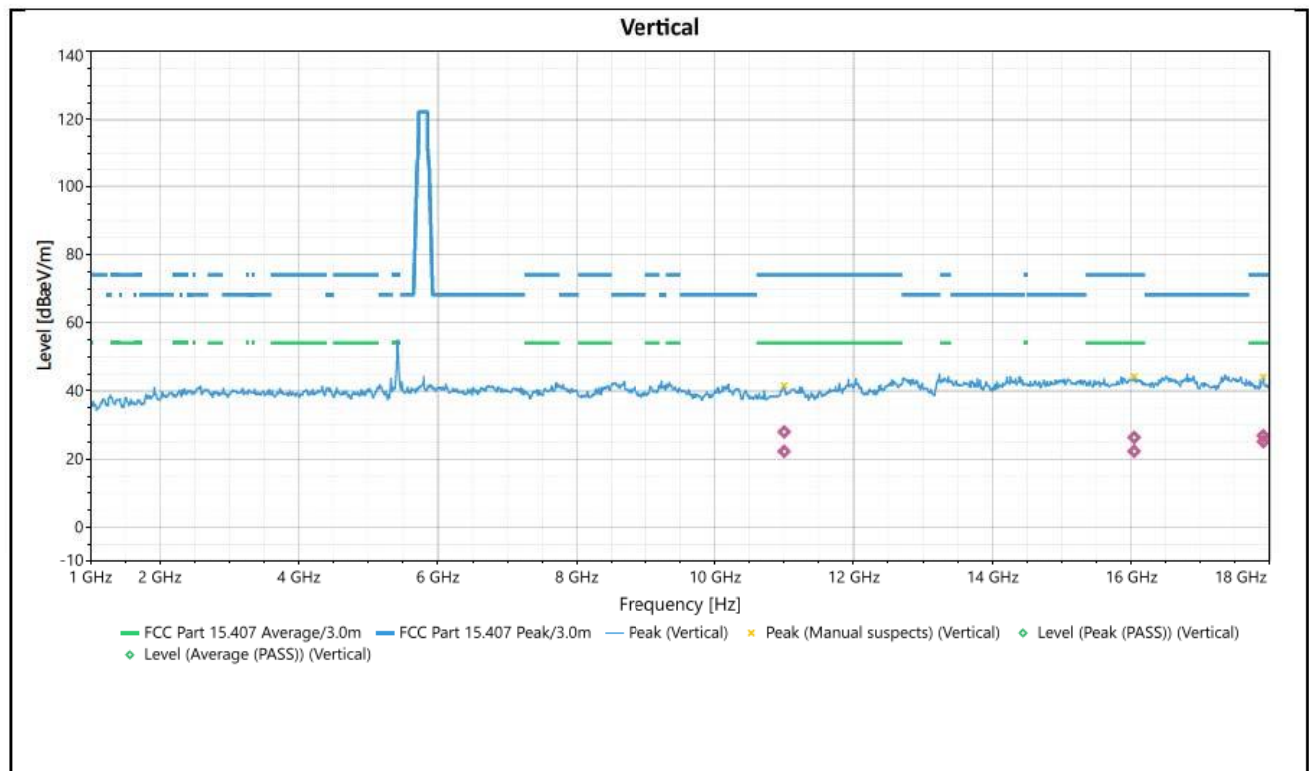

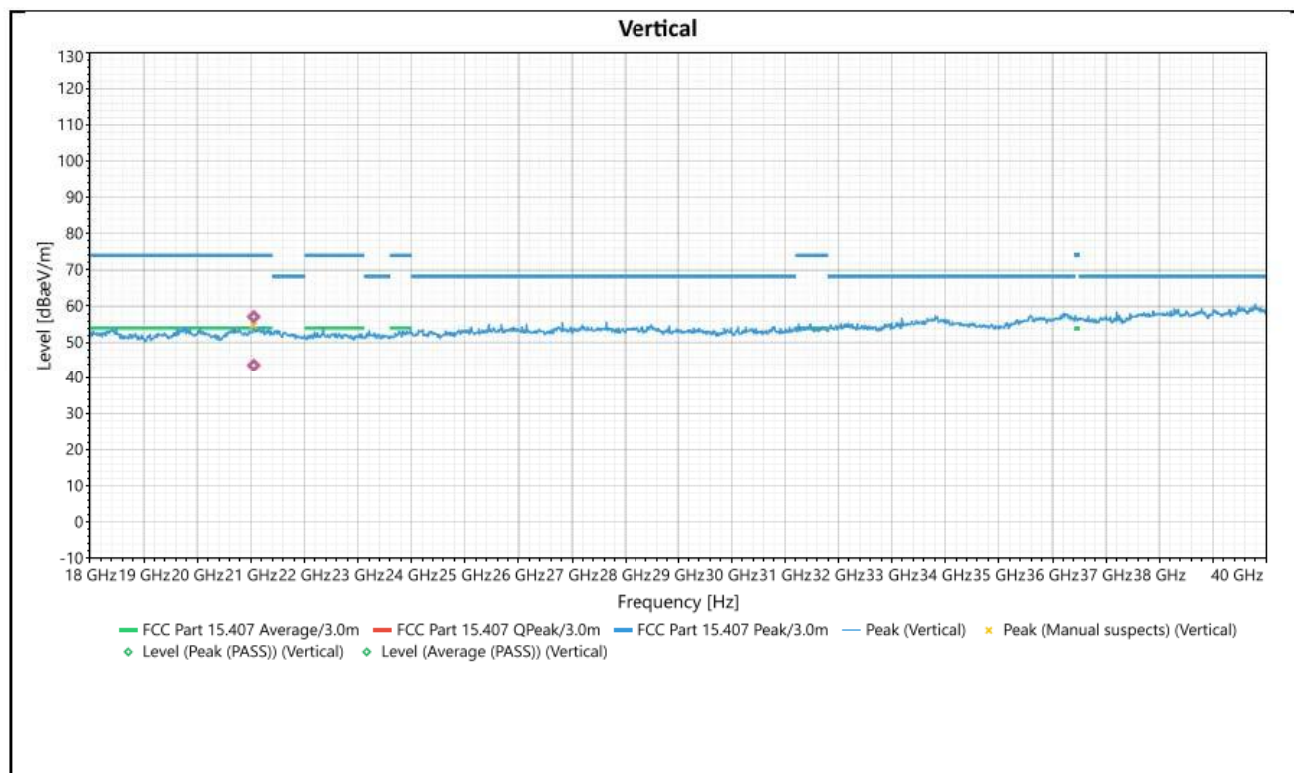



Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	11001.6	Vertical	28.017	74	-45.983	2	92	2.81	Peak (PASS)
2	11001.6	Vertical	22.261	54	-31.739	2	92	2.81	Average (PASS)
3	16044.93	Vertical	22.31	74	-51.69	1.47	241	4.75	Peak (PASS)
4	16044.93	Vertical	26.37	54	-27.63	1.47	241	4.75	Average (PASS)
5	17904.54	Vertical	25.147	74	-48.853	1.91	92	2.39	Peak (PASS)
6	17904.54	Vertical	26.877	54	-27.123	1.91	92	2.39	Average (PASS)
7	21053.64	Vertical	57.078	74	-16.922	1.61	168	8.64	Peak (PASS)
8	21053.64	Vertical	43.637	54	-10.363	1.61	168	8.64	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

Frequency	802.11N HT20 5320 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

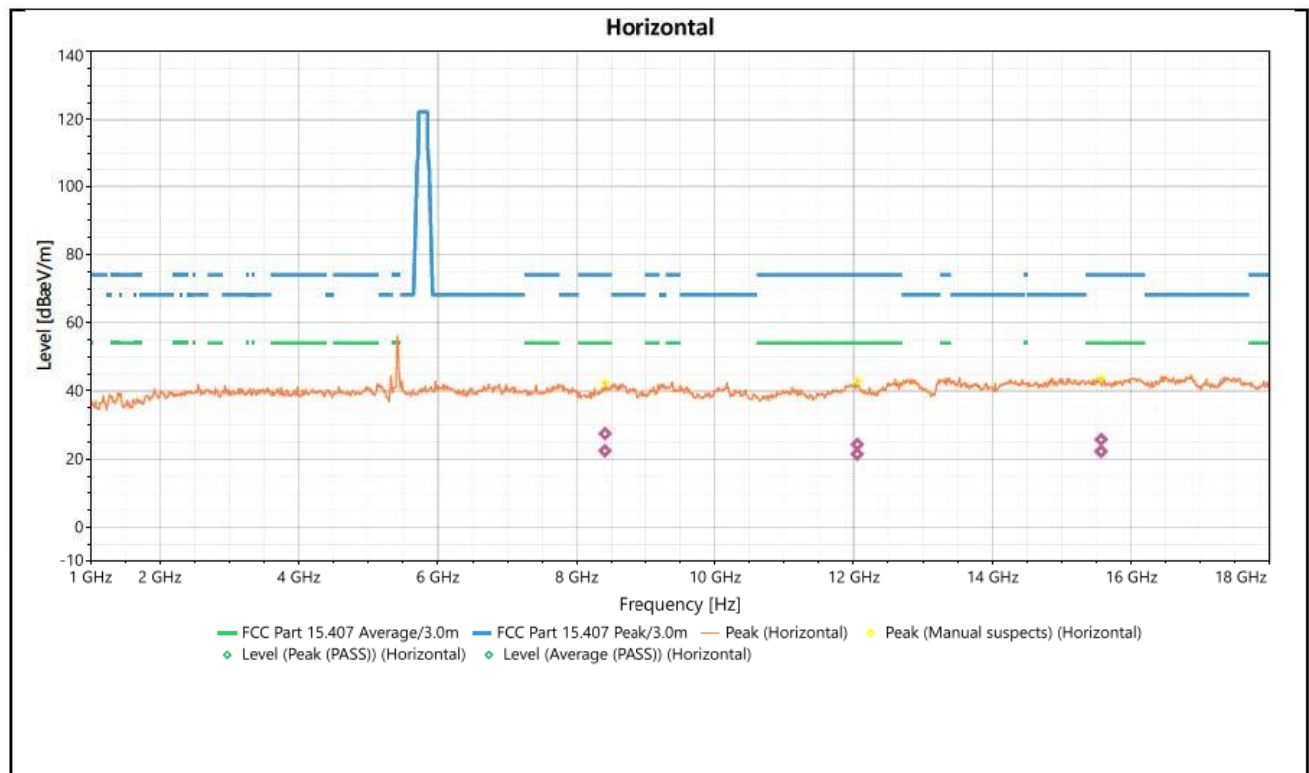

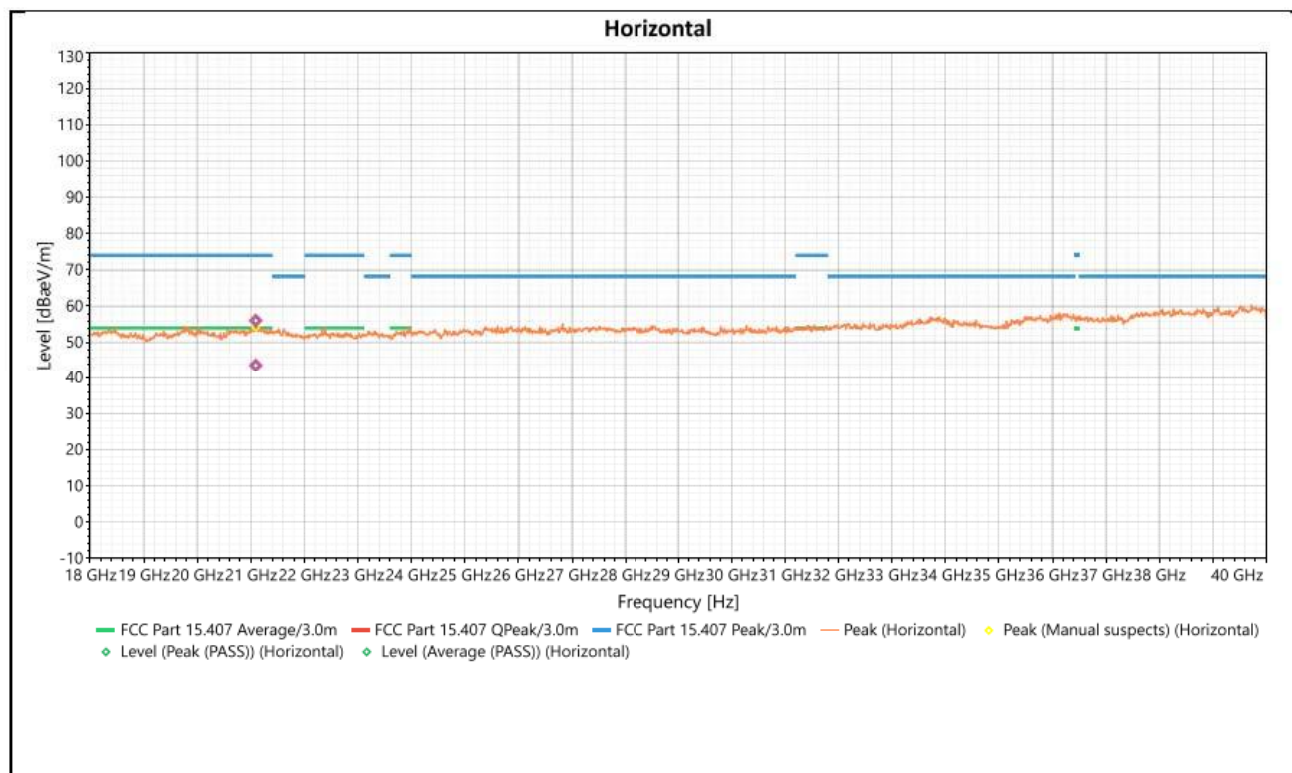



Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	8405.202	Horizontal	27.484	74	-46.516	2	0	2.07	Peak (PASS)
2	8405.202	Horizontal	22.461	54	-31.539	2	0	2.07	Average (PASS)
3	12053.84	Horizontal	21.485	74	-52.515	1	111	3.86	Peak (PASS)
4	12053.84	Horizontal	24.304	54	-29.696	1	111	3.86	Average (PASS)
5	15567.57	Horizontal	22.286	74	-51.714	1.37	351	4.5	Peak (PASS)
6	15567.57	Horizontal	25.777	54	-28.223	1.37	351	4.5	Average (PASS)
7	21093.1	Horizontal	56.05	74	-17.95	1.6	270	8.49	Peak (PASS)
8	21093.1	Horizontal	43.617	54	-10.383	1.6	270	8.49	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

CHANNEL	802.11N HT20 5500 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

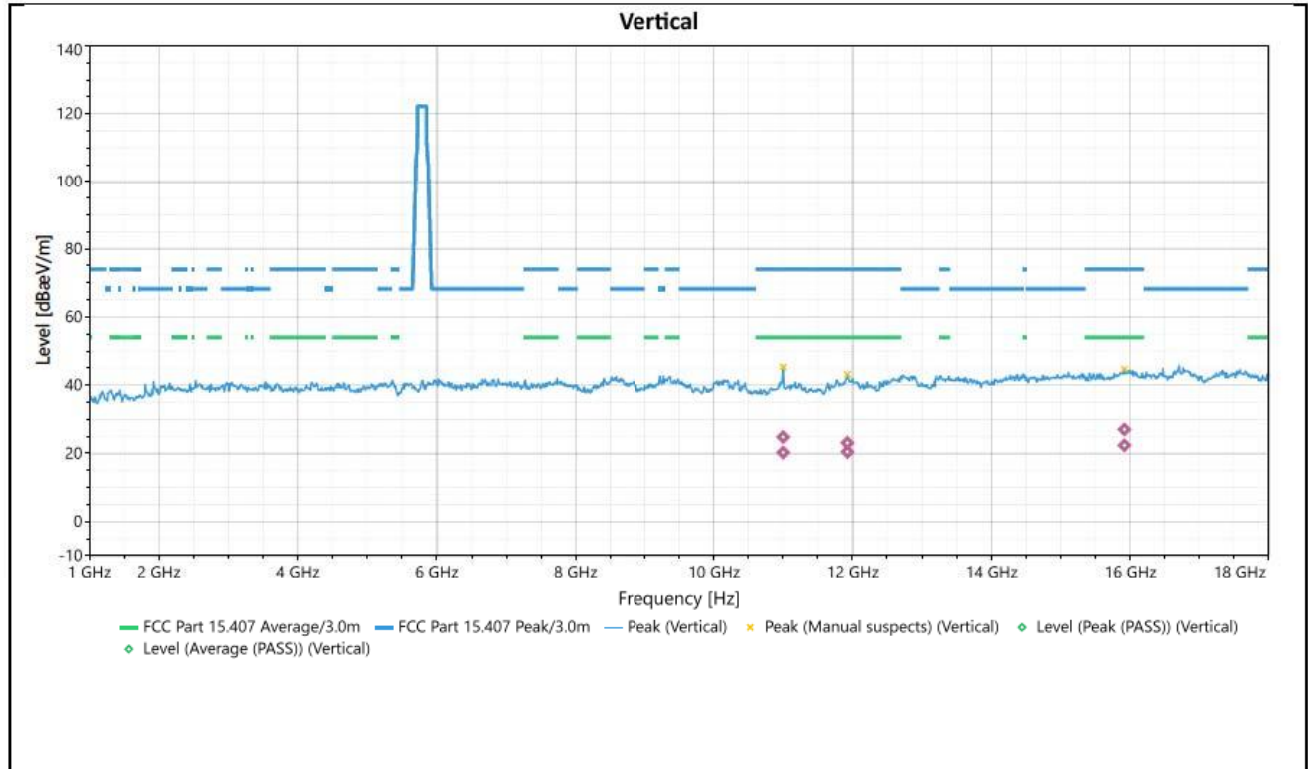

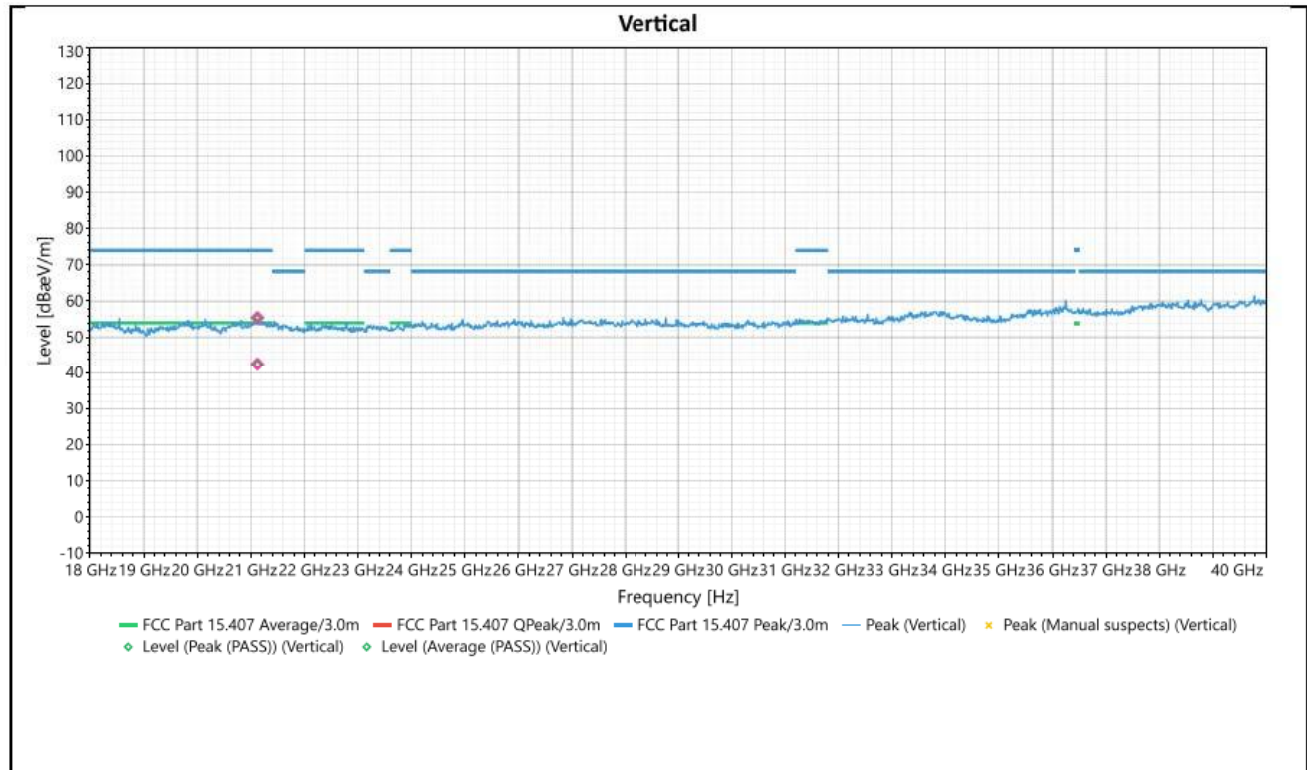



Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	11001.59	Vertical	24.81	74	-49.19	1.47	92	2.73	Peak (PASS)
2	11001.59	Vertical	20.244	54	-33.756	1.47	92	2.73	Average (PASS)
3	11927.24	Vertical	20.47	74	-53.53	1.8	4	3.51	Peak (PASS)
4	11927.24	Vertical	23.112	54	-30.888	1.8	4	3.51	Average (PASS)
5	15918.32	Vertical	22.378	74	-51.622	1.8	260	4.96	Peak (PASS)
6	15918.32	Vertical	27.024	54	-26.976	1.8	260	4.96	Average (PASS)
7	21121.84	Vertical	55.369	74	-18.631	1.7	238	8.59	Peak (PASS)
8	21121.84	Vertical	42.454	54	-11.546	1.7	238	8.59	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

Frequency	802.11N HT20 5500 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

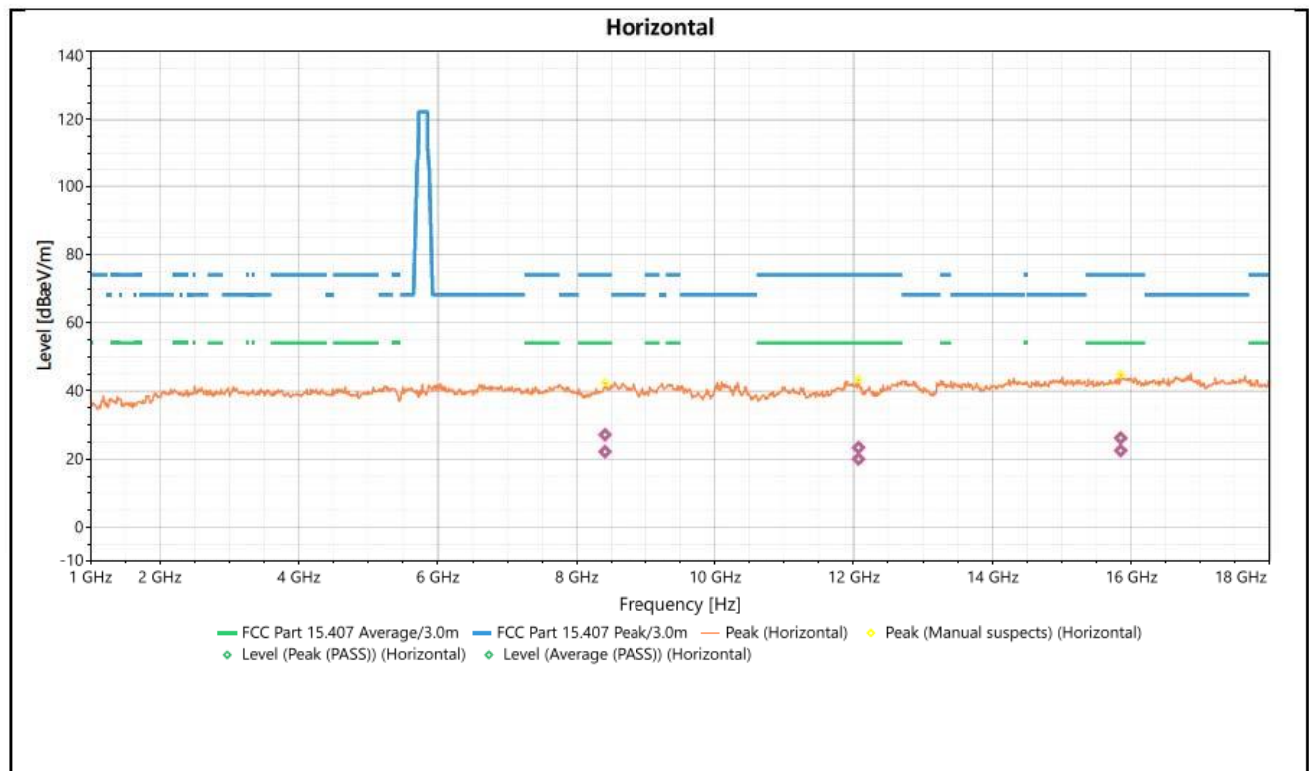

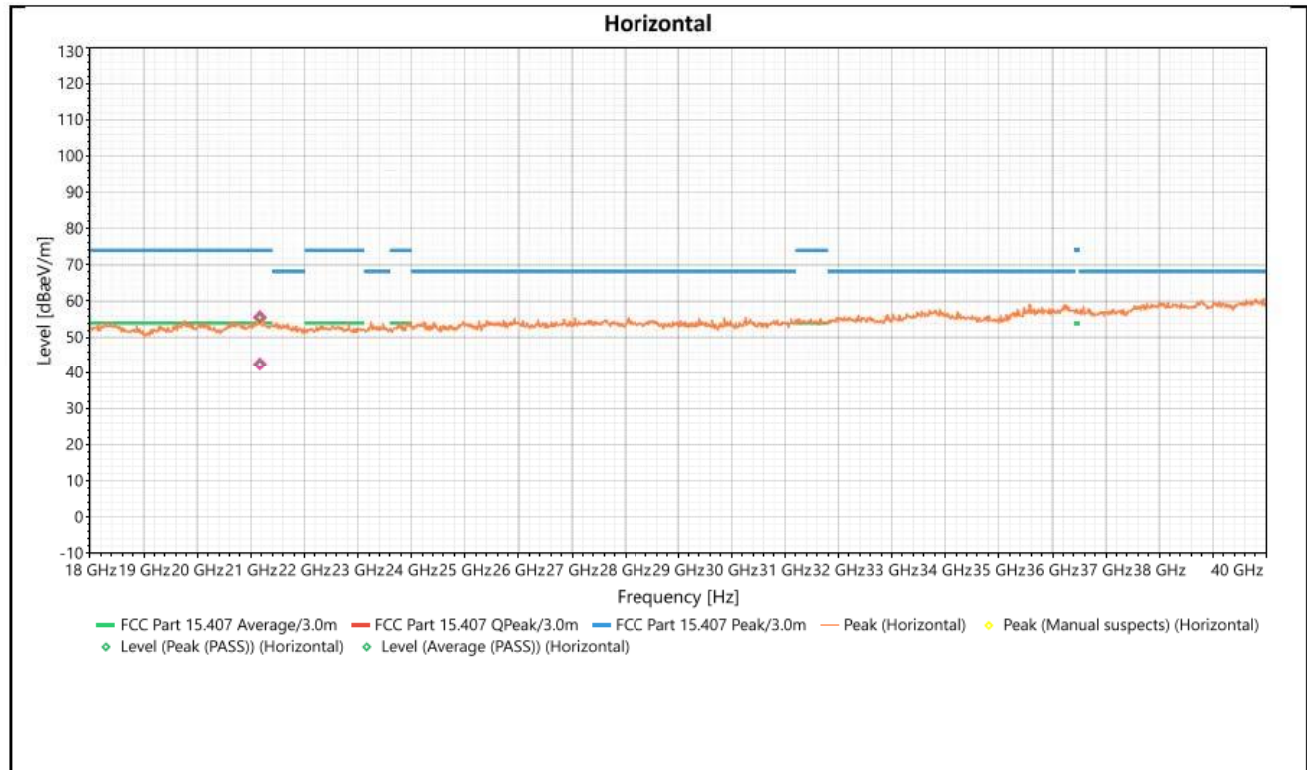



Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	8407.281	Horizontal	27.16	74	-46.84	1	241	1.87	Peak (PASS)
2	8407.281	Horizontal	22.186	54	-31.814	1	241	1.87	Average (PASS)
3	12072.52	Horizontal	20.051	74	-53.949	1	111	3.58	Peak (PASS)
4	12072.52	Horizontal	23.389	54	-30.611	1	111	3.58	Average (PASS)
5	15851.92	Horizontal	22.503	74	-51.497	1.69	4	4.78	Peak (PASS)
6	15851.92	Horizontal	26.2	54	-27.8	1.69	4	4.78	Average (PASS)
7	21167.9	Horizontal	55.522	74	-18.478	1.63	356	8.4	Peak (PASS)
8	21167.9	Horizontal	42.469	54	-11.531	1.63	356	8.4	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

CHANNEL	802.11N HT20 5580 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

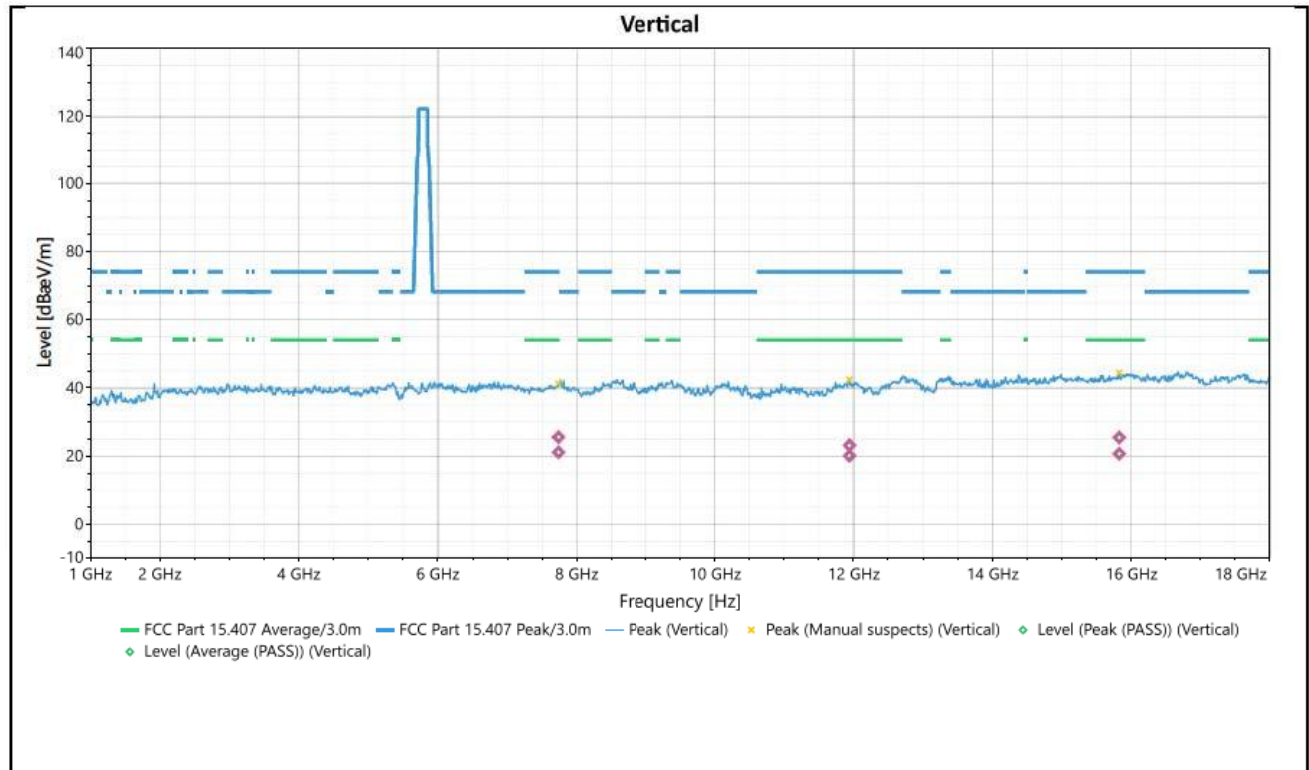

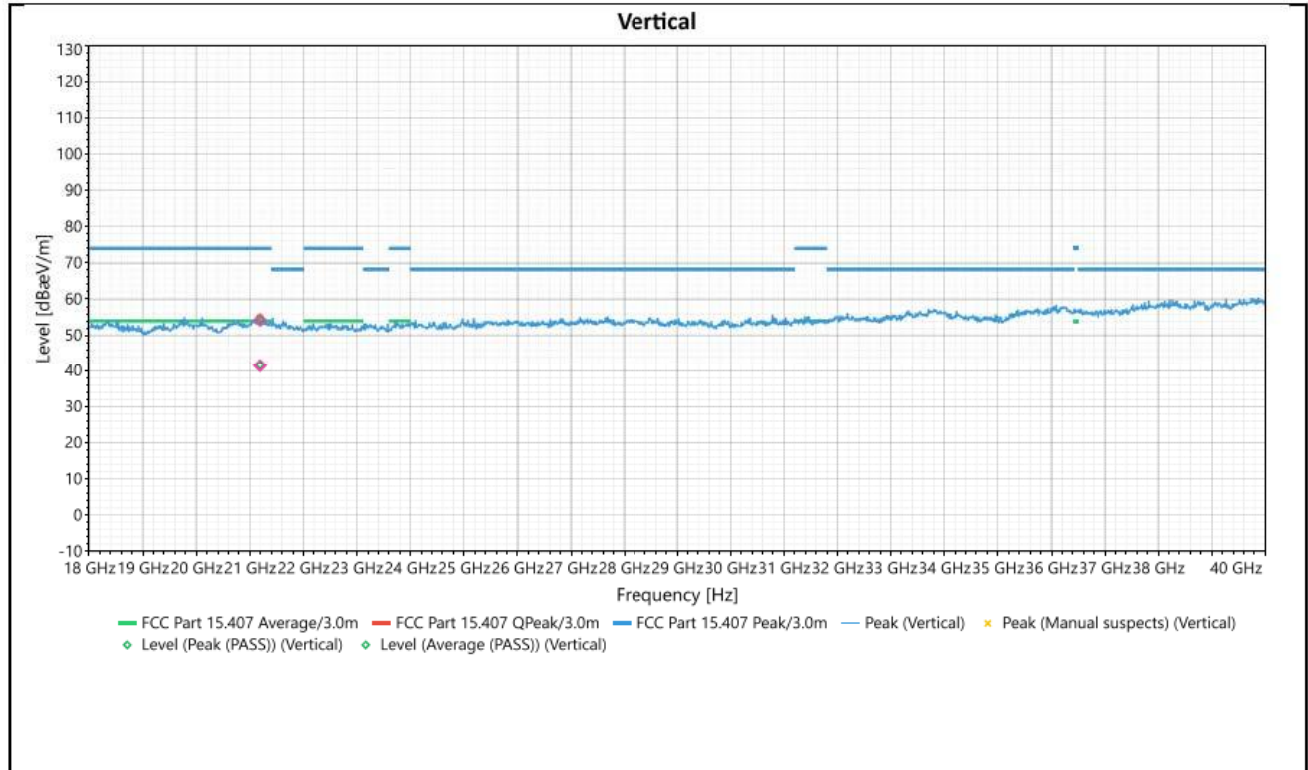



Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	7736.912	Vertical	25.609	74	-48.391	1.91	148	2.14	Peak (PASS)
2	7736.912	Vertical	21.115	54	-32.885	1.91	148	2.14	Average (PASS)
3	11941.76	Vertical	20.106	74	-53.894	1.69	315	3.51	Peak (PASS)
4	11941.76	Vertical	23.184	54	-30.816	1.69	315	3.51	Average (PASS)
5	15829.08	Vertical	20.709	74	-53.291	1.25	240	4.95	Peak (PASS)
6	15829.08	Vertical	25.485	54	-28.515	1.25	240	4.95	Average (PASS)
7	21190.03	Vertical	54.225	74	-19.775	1	203	8.47	Peak (PASS)
8	21190.03	Vertical	41.452	54	-12.548	1	203	8.47	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

Frequency	802.11N HT20 5580 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

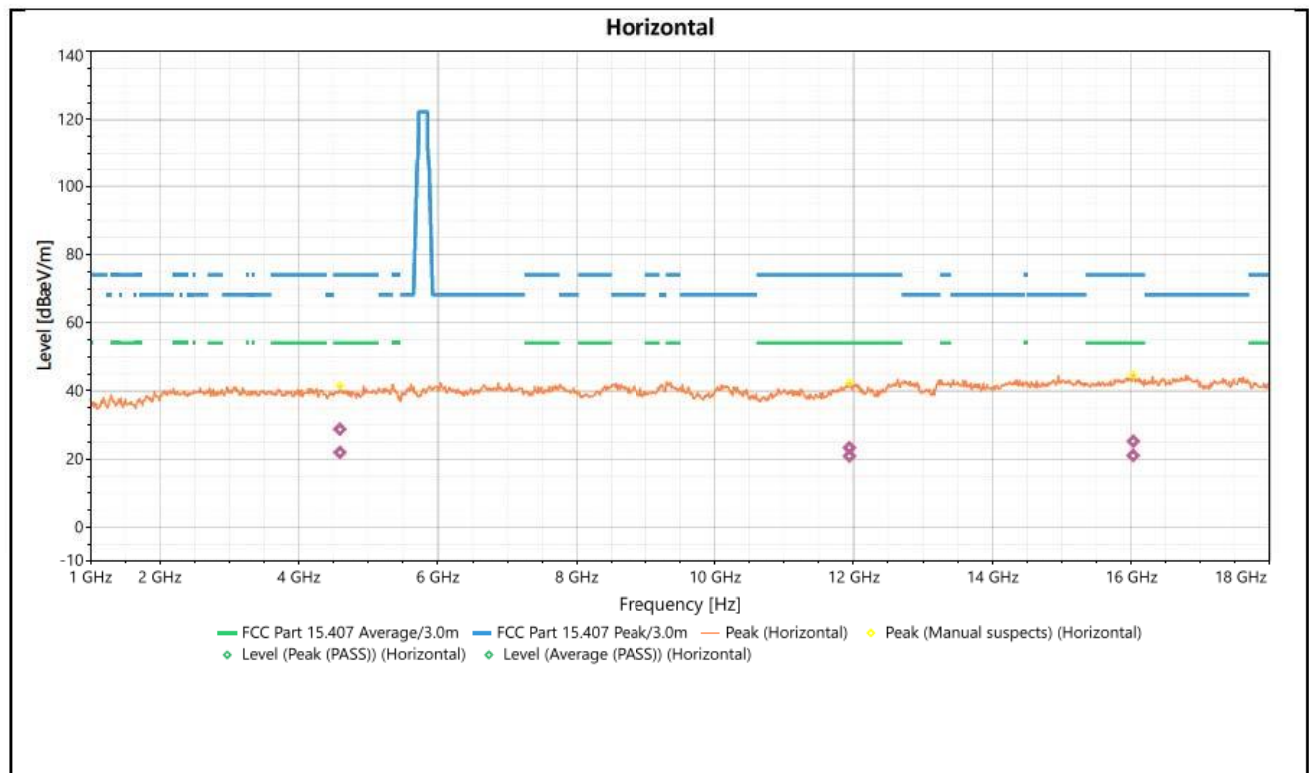

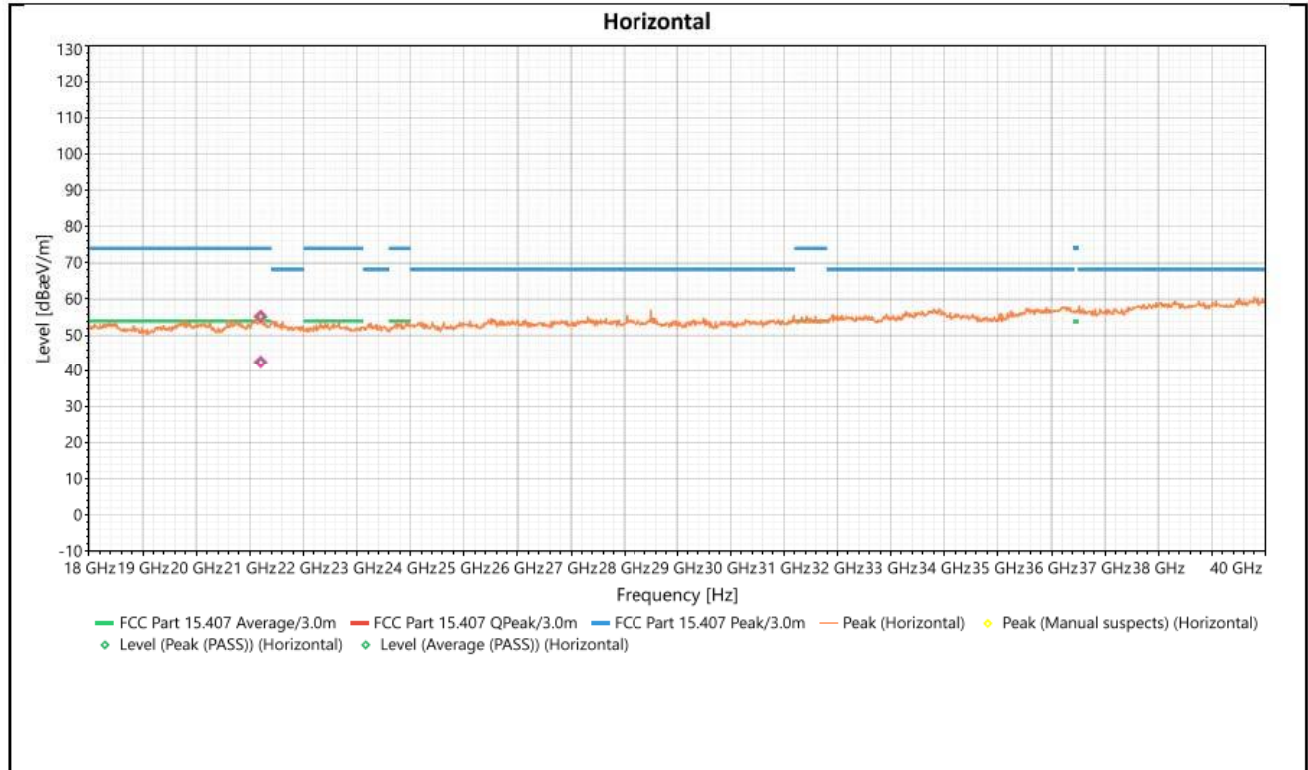



Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	4590.521	Horizontal	28.794	74	-45.206	1.26	222	0.37	Peak (PASS)
2	4590.521	Horizontal	21.99	54	-32.01	1.26	222	0.37	Average (PASS)
3	11941.77	Horizontal	20.915	74	-53.085	1	37	3.46	Peak (PASS)
4	11941.77	Horizontal	23.297	54	-30.703	1	37	3.46	Average (PASS)
5	16030.39	Horizontal	21.077	74	-52.923	1.36	360	4.86	Peak (PASS)
6	16030.39	Horizontal	25.271	54	-28.729	1.36	360	4.86	Average (PASS)
7	21203.1	Horizontal	55.171	74	-18.829	2	116	8.36	Peak (PASS)
8	21203.1	Horizontal	42.509	54	-11.491	2	116	8.36	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

CHANNEL	802.11N HT20 5700 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

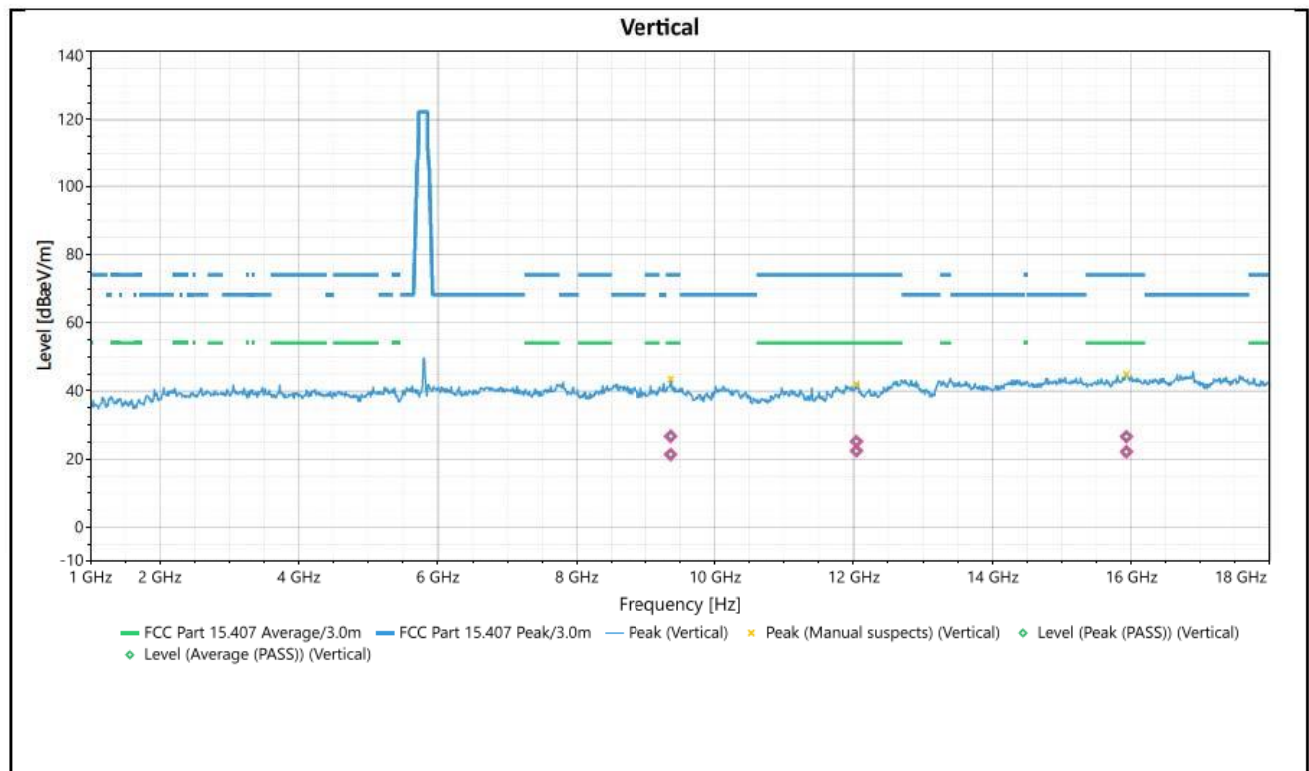

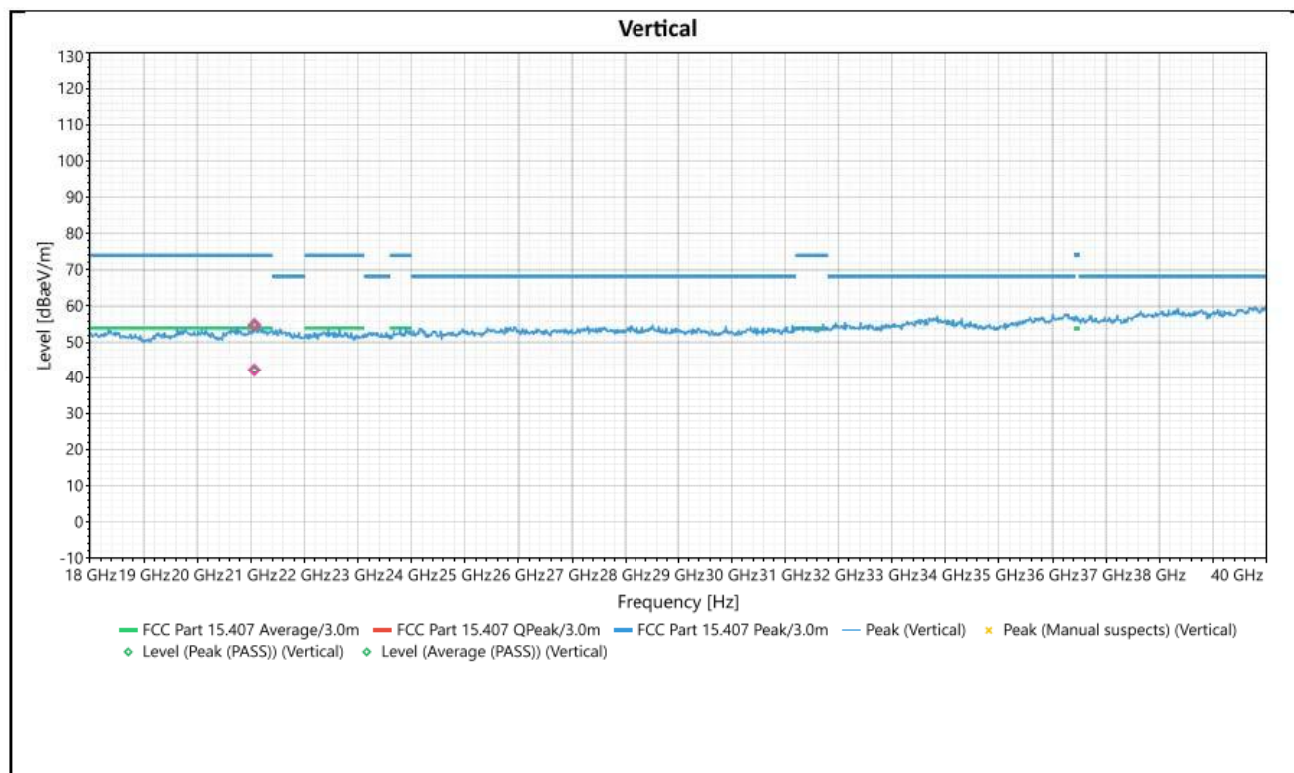



Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	9366.133	Vertical	26.713	74	-47.287	2	297	2.21	Peak (PASS)
2	9366.133	Vertical	21.382	54	-32.618	2	297	2.21	Average (PASS)
3	12041.38	Vertical	22.439	74	-51.561	2	73	3.63	Peak (PASS)
4	12041.38	Vertical	25.179	54	-28.821	2	73	3.63	Average (PASS)
5	15932.85	Vertical	22.139	74	-51.861	1.58	351	4.96	Peak (PASS)
6	15932.85	Vertical	26.602	54	-27.398	1.58	351	4.96	Average (PASS)
7	21066.8	Vertical	54.824	74	-19.176	1.69	237	8.64	Peak (PASS)
8	21066.8	Vertical	42.207	54	-11.793	1.69	237	8.64	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

Frequency	802.11N HT20 5700 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

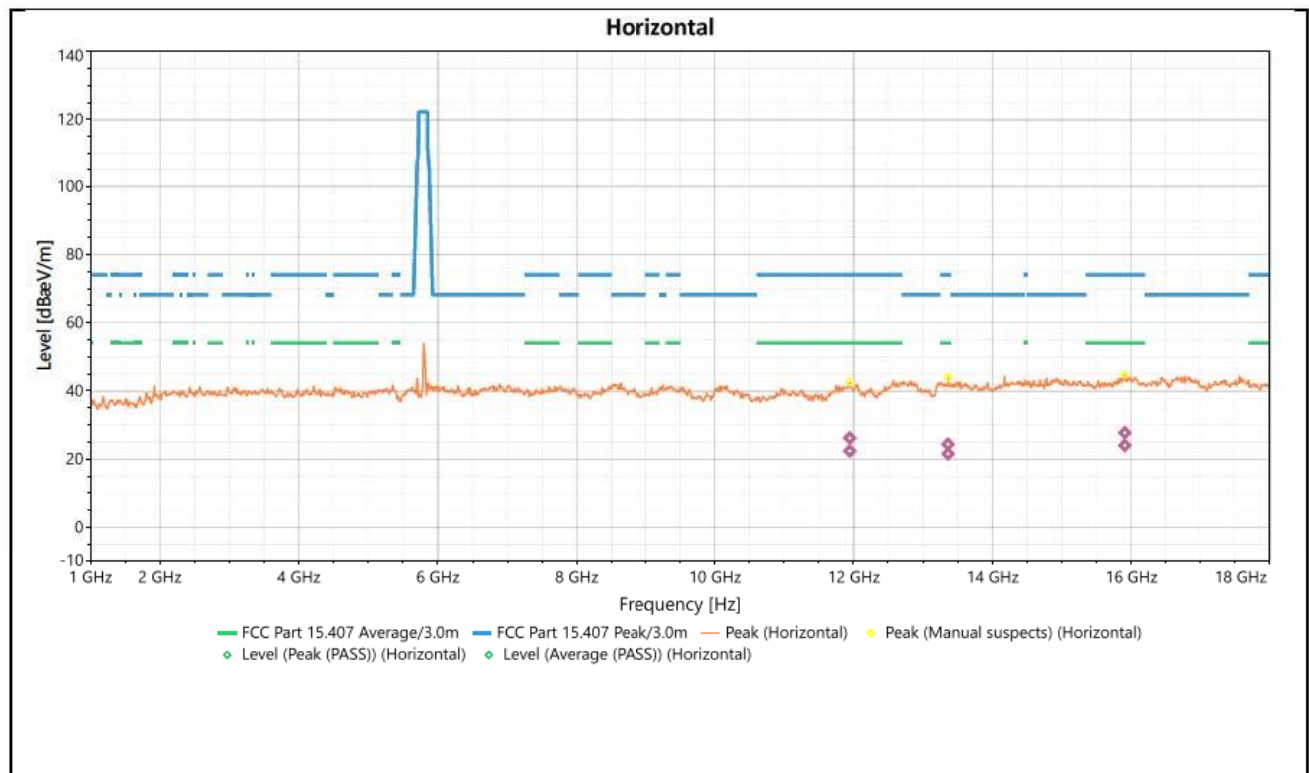

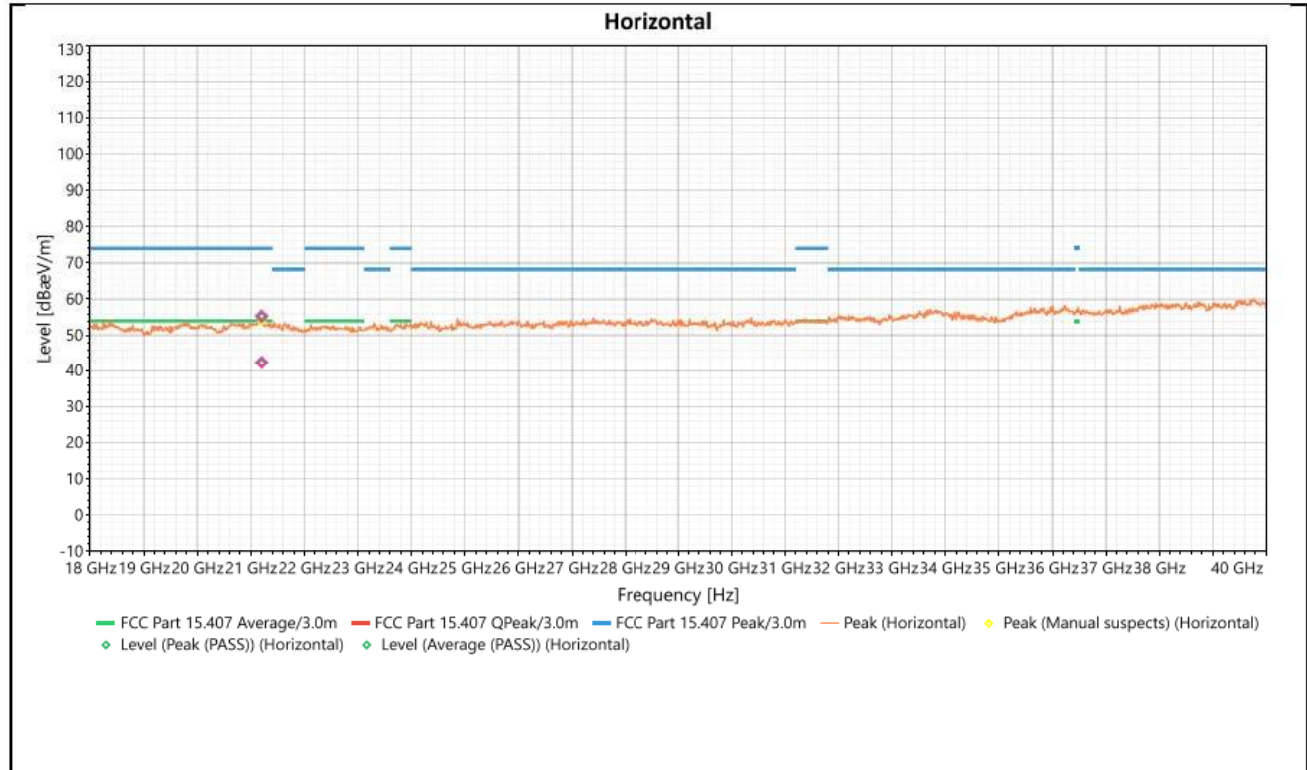

Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	11945.92	Horizontal	26.237	74	-47.763	1	298	3.46	Peak (PASS)
2	11945.92	Horizontal	22.403	54	-31.597	1	298	3.46	Average (PASS)
3	13363.46	Horizontal	21.565	74	-52.435	1.47	241	3.19	Peak (PASS)
4	13363.46	Horizontal	24.351	54	-29.649	1.47	241	3.19	Average (PASS)
5	15910.03	Horizontal	24.066	74	-49.934	1.91	110	4.81	Peak (PASS)
6	15910.03	Horizontal	27.719	54	-26.281	1.91	110	4.81	Average (PASS)
7	21200.9	Horizontal	55.292	74	-18.708	1.25	263	8.36	Peak (PASS)
8	21200.9	Horizontal	42.351	54	-11.649	1.25	263	8.36	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

CHANNEL	802.11N HT20 5745 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

