

1-4F, Huafeng Science Park, Xin'an Sixth Road, 82th District, Bao'an, Shenzhen, China. Telephone: +86-755-29451282,

Fax: +86-755-22639141

Report No.: EBO1511082-E274

Page: 1 of 63

FCC Report (WIFI)

Applicant: EKEN GROUP LIMITED

Address of Applicant: Room 2511-2512, Meilan Business Center, Qianjin Two Road,

Xixiang, Baoan District, Shenzhen, China

Equipment Under Test (EUT)

Product Name: ACTION CAMERA

Model No.: H3, A7, A8, A9, W9, G1, G2, G3, G4, G5, G6, G7, G8, G9, H1,

H2, H4, H5, H6, H7, H8, H9, I1, I2, I3, I4, I5, I6, I7, I8, I9, N1,

N2, N3, N4, N5, N6, N7, N8, N9, M1, M2, M3, M4, M5, M6, M7,

M8, M9, K1, K2, K3, K4, K5, K6, K7, K8, K9, R1, R2, R3, R4,

R5, R6, R7, R8, R9

FCC ID: 2ADDG-H3

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247:2014

Date of sample receipt: November 23, 2015

Date of Test: November 23, 2015 To December 8, 2015

Date of report issued: December 8, 2015

Test Result: PASS *

Authorized Signature:

Kevin Yu Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the EBO product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of EBO International Electrical Approvals or testing done by EBO International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by EBO International Electrical Approvals in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

^{*} In the configuration tested, the EUT complied with the standards specified above.



Report No.: EBO1511082-E274

Page: 2 of 63

2 Version

Version No.	Date	Description
00	December 8, 2015	Original

Prepared By:	Jason	Date:	December 8, 2015
	Project Engineer		
Check By:	Cenyv	Date:	December 8, 2015



Report No.: EBO1511082-E274

Page: 3 of 63

3 Contents

			Page
1	cov	/ER PAGE	1
2	VER	SION	2
3	CON	ITENTS	3
4	TES	T SUMMARY	4
5	GEN	IERAL INFORMATION	5
	5.1	CLIENT INFORMATION	5
	5.2	GENERAL DESCRIPTION OF EUT	
	5.3	TEST MODE	
	5.4	DESCRIPTION OF SUPPORT UNITS	6
	5.5	TEST FACILITY	
	5.6	TEST LOCATION	7
6 7		T INSTRUMENTS LISTT INSTRUMENTS LISTT RESULTS AND MEASUREMENT DATA	
•	7.1	ANTENNA REQUIREMENT	
	7.2	CONDUCTED EMISSIONS	10
	7.3	CONDUCTED OUTPUT POWER	
	7.4	CHANNEL BANDWIDTH	
	7.5	POWER SPECTRAL DENSITY	
	7.6	BAND EDGES	
	7.6.1		
	7.6.2	Radiated Emission Method	27
	7.7	Spurious Emission	36
	7.7.1	1 Conducted Emission Method	36
	7.7.2	2 Radiated Emission Method	41
8	TES	T SETUP PHOTO	56
9	FIIT	CONSTRUCTIONAL DETAILS	EΩ
J	LUI	~~!!U	



Report No.: EBO1511082-E274

Page: 4 of 63

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(3)	Pass
Channel Bandwidth	15.247 (a)(2)	Pass
Power Spectral Density	15.247 (e)	Pass
Band Edge	15.247(d)	Pass
Spurious Emission	15.205/15.209	Pass

Pass: The EUT complies with the essential requirements in the standard. Remark: All test are according to ANSI C63.10-2013 and ANSI C63.4-2014.



Report No.: EBO1511082-E274

Page: 5 of 63

5 General Information

5.1 Client Information

Applicant:	EKEN GROUP LIMITED
Address of Applicant:	Room 2511-2512, Meilan Business Center, Qianjin Two Road, Xixiang,
	Baoan District, Shenzhen, China
Manufacturer:	EKEN GROUP LIMITED
Address of Manufacturer:	Room 2511-2512, Meilan Business Center, Qianjin Two Road, Xixiang,
	Baoan District, Shenzhen, China

5.2 General Description of EUT

Product Name:	ACTION CAMERA
Model No.:	H3, A7, A8, A9, W9, G1, G2, G3, G4, G5, G6, G7, G8, G9, H1, H2,
	H4, H5, H6, H7, H8, H9, I1, I2, I3, I4, I5, I6, I7, I8, I9, N1, N2, N3, N4,
	N5, N6, N7, N8, N9, M1, M2, M3, M4, M5, M6, M7, M8, M9, K1, K2,
	K3, K4, K5, K6, K7, K8, K9, R1, R2, R3, R4, R5, R6, R7, R8, R9
Test Model No.:	НЗ
Operation Frequency:	802.11b/802.11g/802.11n(HT20): 2412MHz~2462MHz
	802.11n(HT40): 2422MHz~2452MHz
Channel numbers:	802.11b/802.11g /802.11n(HT20): 11
	802.11n(HT40): 7
Channel separation:	5MHz
Modulation technology:	802.11b: Direct Sequence Spread Spectrum (DSSS)
	802.11g/802.11n(H20)/802.11n(H40):
	Orthogonal Frequency Division Multiplexing (OFDM)
Antenna Type:	Integral Antenna
Antenna gain:	2dBi (declare by Applicant)
Power supply:	DC 5V == 1A
	Or
	DC 3.7V, 1050mAh Li-ion Battery
	Adapter:
	Model:ZXT-051000E
	Input:100-240V~, 50/60Hz, 0.4A
	Output:5V === 1A



Report No.: EBO1511082-E274

Page: 6 of 63

Operation Frequency each of channel								
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency	
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz	
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz	
3	2422MHz	6	2437MHz	9	2452MHz			

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

To at all annual	Frequency	y (MHz)
Test channel	802.11b/802.11g/802.11n(HT20)	802.11n(HT40)
Lowest channel	2412MHz	2422MHz
Middle channel	2437MHz	2437MHz
Highest channel	2462MHz	2452MHz

5.3 Test mode

Transmitting mode Keep the EUT in continuously transmitting mode (dutycycle >98%)

Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

		<u>'</u>		
Mode	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)
Data rate	1Mbps	6Mbps	6.5Mbps	13Mbps

5.4 Description of Support Units

None



Report No.: EBO1511082-E274

Page: 7 of 63

5.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• FCC —Registration No.: 600491

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fuly described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, June 28, 2013.

• Industry Canada (IC) —Registration No.: 9079A-2

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, June 26, 2013.

5.6 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen, China



Report No.: EBO1511082-E274

Page: 8 of 63

6 Test Instruments list

Radi	Radiated Emission:							
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)		
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	Mar. 29 2014	Mar. 28 2016		
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A		
3	Spectrum Analyzer	Agilent	E4440A	GTS533	July 08 2015	July 07 2016		
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	July 08 2015	July 07 2016		
5	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	July 08 2015	July 07 2016		
6	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	July 08 2015	July 07 2016		
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	Mar. 27 2015	Mar. 26 2016		
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A		
9	Coaxial Cable	GTS	N/A	GTS213	Mar. 27 2015	Mar. 26 2016		
10	Coaxial Cable	GTS	N/A	GTS211	Mar. 27 2015	Mar. 26 2016		
11	Coaxial Cable	GTS	N/A	GTS210	Mar. 27 2015	Mar. 26 2016		
12	Coaxial Cable	GTS	N/A	GTS212	Mar. 27 2015	Mar. 26 2016		
13	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	July 08 2015	July 07 2016		
14	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	July 08 2015	July 07 2016		
15	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	July 08 2015	July 07 2016		
16	Band filter	Amindeon	82346	GTS219	Mar. 27 2015	Mar. 26 2016		
17	Power Meter	Anritsu	ML2495A	GTS540	July 08 2015	July 07 2016		
18	Power Sensor	Anritsu	MA2411B	GTS541	July 08 2015	July 07 2016		

Con	Conducted Emission:							
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)		
1	Shielding Room	ZhongYu Electron	7.0(L)x3.0(W)x3.0(H)	GTS264	July 08 2015	July 07 2016		
2	EMI Test Receiver	Rohde & Schwarz	ESCS30	GTS223	July 08 2015	July 07 2016		
3	10dB Pulse Limita	Rohde & Schwarz	N/A	GTS224	July 08 2015	July 07 2016		
4	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	July 08 2015	July 07 2016		
5	LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	GTS226	July 08 2015	July 07 2016		
6	Coaxial Cable	GTS	N/A	GTS227	July 08 2015	July 07 2016		
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A		

Gen	General used equipment:							
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)		
1	Barometer	ChangChun	DYM3	GTS257	July 08 2015	July 07 2016		



Report No.: EBO1511082-E274

Page: 9 of 63

7 Test results and Measurement Data

7.1 Antenna requirement

Standard requirement: FCC Part15 C Section 15.203 /247(c)

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

E.U.T Antenna:

The antenna is integral antenna, the best case gain of the antenna is 2dBi



Report No.: EBO1511082-E274

Page: 10 of 63

7.2 Conducted Emissions

To at Do avrino month	FOO Dental O Continue 45 003	7							
Test Requirement:	FCC Part15 C Section 15.207								
Test Method:	ANSI C63.10:2013								
Test Frequency Range:	150KHz to 30MHz	150KHz to 30MHz							
Class / Severity:	Class B	Class B							
Receiver setup:	RBW=9KHz, VBW=30KHz, S	weep time=auto							
Limit:	Fragues ou ronge (MIII-)	Limit (c	dBuV)						
	Frequency range (MHz) Quasi-peak Average								
	0.15-0.5	66 to 56*	56 to 46*						
	0.5-5	56	46						
	5-30	60	50						
Table and a	* Decreases with the logarithr								
Test setup:	Reference Plane	·	_						
	AUX Equipment Test table/Insulation plane Remark E.U.T: Equipment Under Test LISN Filter AC power EMI Receiver Return Equipment Under Test LISN Line Impedence Stabilization Network Test table height=0.8m								
Test procedure:	The E.U.T and simulators a line impedance stabilization 50ohm/50uH coupling impedance. The peripheral devices are LISN that provides a 50ohr termination. (Please refer to the coupling in the coupling	n network (L.I.S.N.). The edance for the measuri also connected to the m/50uH coupling imped	nis provides a ing equipment. main power through a dance with 50ohm						
	 termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement. 								
Test Instruments:	Refer to section 6.0 for details	Refer to section 6.0 for details							
Test mode:	Refer to section 5.3 for details	5							
Test results:	Pass								



Report No.: EBO1511082-E274

Page: 11 of 63

Measurement data:

5

12.124

24.400

37.33

0.37

1.11

0.20


0.23

37.90

42.61

60.00 -22.10 QP

60.00 -17.39 QP

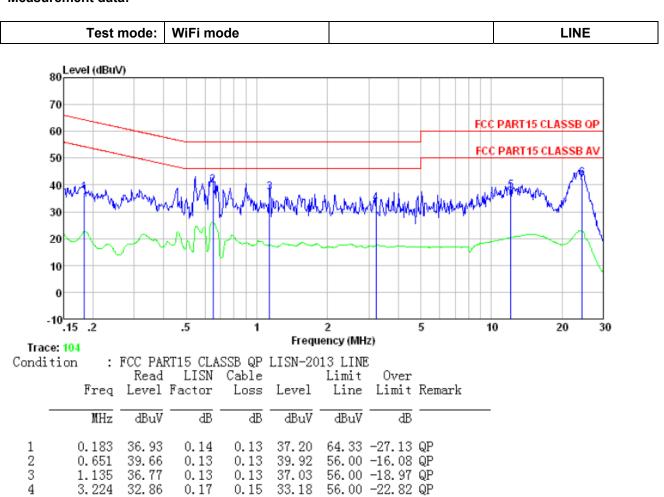



5

Report No.: EBO1511082-E274

20

30

Page: 12 of 63



Frequency (MHz)

Trace: 102

.15

Condition : FCC PART15 CLASSB QP LISN-2013 NEUTRAL

	Freq		LISN Factor					Remark
	MHz	dBu₹	dB	dB	dBuV	dBuV	dB	
1 2 3 4 5 6	0.336 0.641 2.721	41.90 37.52 42.74	0.06 0.07	0.13 0.15 0.19	37. 32 42. 10 37. 77 43. 17	59.31 56.00 56.00 60.00	-21.99 -13.90 -18.23	QP QP QP QP

Notes:

- 1. An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3. Final Level =Receiver Read level + LISN Factor + Cable Loss
- 4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.



Report No.: EBO1511082-E274

Page: 13 of 63

7.3 Conducted Output Power

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)					
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V03					
Limit:	30dBm					
Test setup:	Power Meter E.U.T Non-Conducted Table Ground Reference Plane					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.3 for details					
Test results:	Pass					

Measurement Data


Test CH		Output l		Limit(dBm)	Result	
Test CIT	802.11b	802.11g	802.11n(HT20) 802.11n(HT40)		Limit(ubin)	Result
Lowest	8.85	7.29	7.55	7.15		
Middle	8.64	7.37	7.42	7.21	30.00	Pass
Highest	8.77	7.23	7.61	7.09		



Report No.: EBO1511082-E274

Page: 14 of 63

7.4 Channel Bandwidth

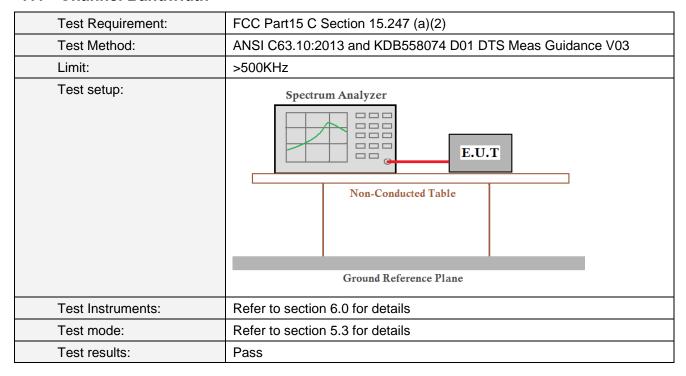

Measurement Data

Test CH		Channel Ban		Limit(KHz)	Result	
Test Off	802.11b	802.11n(HT40)	Lillit(Ki iz)	Nesuit		
Lowest	10.113	16.617	17.856	36.562		Pass
Middle	10.113	16.627	17.869	36.583	>500	
Highest	10.116	16.627	17.859	36.577		


Test plot as follows:




Report No.: EBO1511082-E274

Page: 15 of 63


Test mode: 802.11b



Lowest channel



Middle channel




Highest channel




Report No.: EBO1511082-E274

Page: 16 of 63


Test mode: 802.11g



Lowest channel



Middle channel




Highest channel




Report No.: EBO1511082-E274

Page: 17 of 63


Test mode: 802.11n(HT20)



Lowest channel



Middle channel




Highest channel




Report No.: EBO1511082-E274

Page: 18 of 63


Test mode: 802.11n(HT40)



Lowest channel



Middle channel




Highest channel



Report No.: EBO1511082-E274

Page: 19 of 63

7.5 Power Spectral Density

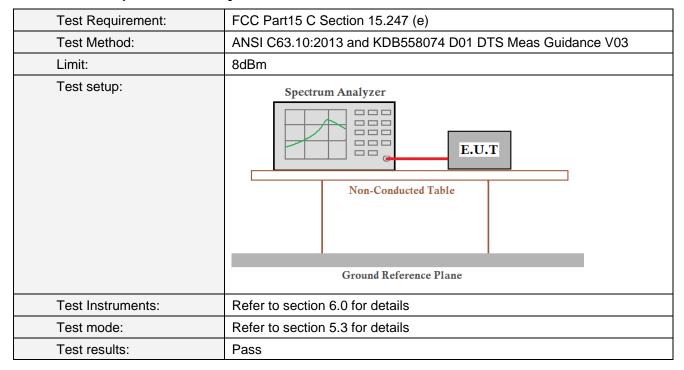

Measurement Data

Test CH		Power Spectra		Limit(dBm/3kHz)	Result		
1631 011	802.11b	802.11g	802.11n(HT20) 802.11n(HT40)		LIIIII((dDIII/3KI IZ)	Nesuit	
Lowest	-4.67	-10.60	-11.10	-14.75		Pass	
Middle	-4.88	-10.77	-10.73	-14.77	8.00		
Highest	-4.89	-11.10	-11.06	-14.97			




Report No.: EBO1511082-E274


Page: 20 of 63

Test plot as follows:


Test mode: 802.11b



Lowest channel



Middle channel




Highest channel




Report No.: EBO1511082-E274

Page: 21 of 63


Test mode: 802.11g



Lowest channel



Middle channel




Highest channel




Report No.: EBO1511082-E274

Page: 22 of 63


Test mode: 802.11n(HT20)



Lowest channel



Middle channel




Highest channel




Report No.: EBO1511082-E274

Page: 23 of 63


Test mode: 802.11n(HT40)



Lowest channel



Middle channel



Highest channel



Report No.: EBO1511082-E274

Page: 24 of 63

7.6 Band edges

7.6.1 Conducted Emission Method


Test Requirement:	FCC Part15 C Section 15.247 (d)				
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V03				
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.				
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane				
Test Instruments:	Refer to section 6.0 for details				
Test mode:	Refer to section 5.3 for details				
Test results:	Pass				



Report No.: EBO1511082-E274


Page: 25 of 63

Test plot as follows:

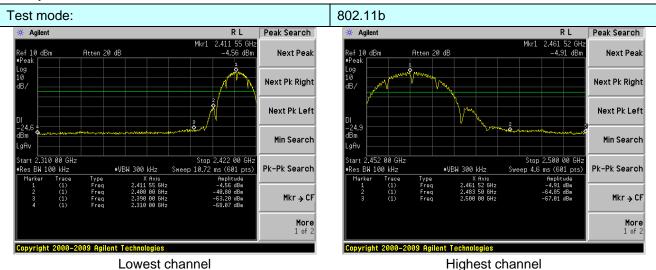


Lowest channel

802.11g



Lowest channel




Highest channel




Report No.: EBO1511082-E274

Page: 26 of 63

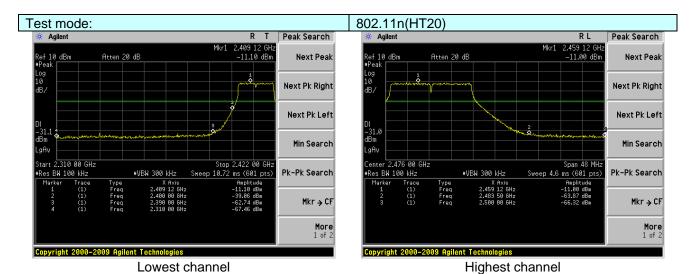

802.11n(HT40)



Lowest channel



Highest channel



Report No.: EBO1511082-E274

Page: 27 of 63

7.6.2 Radiated Emission Method

Test Requirement:	FCC Part15 C S	Section 15 209 :	and 15 205				
Test Method:	ANSI C63.10:20		and 10.200				
Test Frequency Range:			ested only	the worst h	and's (2390MHz to		
root roquoney rtange.	2500MHz) data		cotou, crity	uio woiot b	and 0 (2000) 11 12 10		
Test site:	Measurement D						
Receiver setup:	Frequency	Detector	RBW	VBW	Value		
		Peak	1MHz	3MHz	Peak		
	Above 1GHz	RMS	1MHz	3MHz	Average		
Limit:	Freque		Limit (dBuV		Value		
			54.0	,	Average		
	Above 1	GHz	74.0		Peak		
Test setup:	Antenna Tower Horn Antenna Spectrum Analyzer Amplifier						
Test Procedure:	A Im						
Took In other case to		node is recorded	in the repo	ort.			
Test Instruments:	Refer to section						
Test mode:	Refer to section	5.3 for details					



Report No.: EBO1511082-E274

Page: 28 of 63

Test results: Pass

Measurement data:

Remark: The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.

Test mode: 802.11b Test channel: Lowest

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	51.62	27.59	5.38	34.01	50.58	74.00	-23.42	Horizontal
2400.00	60.63	27.58	5.39	34.01	59.59	74.00	-14.41	Horizontal
2390.00	53.30	27.59	5.38	34.01	52.26	74.00	-21.74	Vertical
2400.00	62.42	27.58	5.39	34.01	61.38	74.00	-12.62	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	38.39	27.59	5.38	34.01	37.35	54.00	-16.65	Horizontal
2400.00	46.68	27.58	5.39	34.01	45.64	54.00	-8.36	Horizontal
2390.00	40.21	27.59	5.38	34.01	39.17	54.00	-14.83	Vertical
2400.00	47.81	27.58	5.39	34.01	46.77	54.00	-7.23	Vertical

Test mode: 802.11b Test channel: Highest

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	52.27	27.53	5.47	33.92	51.35	74.00	-22.65	Horizontal
2500.00	48.10	27.55	5.49	29.93	51.21	74.00	-22.79	Horizontal
2483.50	54.52	27.53	5.47	33.92	53.60	74.00	-20.40	Vertical
2500.00	50.61	27.55	5.49	29.93	53.72	74.00	-20.28	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	38.75	27.53	5.47	33.92	37.83	54.00	-16.17	Horizontal
2500.00	34.86	27.55	5.49	29.93	37.97	54.00	-16.03	Horizontal
2483.50	40.70	27.53	5.47	33.92	39.78	54.00	-14.22	Vertical



Report No.: EBO1511082-E274

Page: 29 of 63

2500.00 36.74 27.55 5.49 29.93 39.85 54.00 -14.15 Vertical

Remark:

- 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. The emission levels of other frequencies are very lower than the limit and not show in test report.



Report No.: EBO1511082-E274

Page: 30 of 63

Test mode:	de: 802.11g		1g	Test channel:			Lowest	
Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	I Limit	Polarization
2390.00	50.25	27.59	5.38	34.01	49.21	74.00	-24.79	Horizontal
2400.00	58.79	27.58	5.39	34.01	57.75	74.00	-16.25	Horizontal
2390.00	51.83	27.59	5.38	34.01	50.79	74.00	-23.21	Vertical
2400.00	60.21	27.58	5.39	34.01	59.17	74.00	-14.83	Vertical
Average va	lue:							
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Limit	Polarization
2390.00	37.41	27.59	5.38	34.01	36.37	54.00	-17.63	Horizontal
2400.00	45.56	27.58	5.39	34.01	44.52	54.00	-9.48	Horizontal
2390.00	39.12	27.59	5.38	34.01	38.08	54.00	-15.92	Vertical
2400.00	46.57	27.58	5.39	34.01	45.53	54.00	-8.47	Vertical
Test mode:		802.1	1g	Te	st channel:		Highest	
Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	I I imit	Polarization
2483.50	50.31	27.53	5.47	33.92	49.39	74.00	-24.61	Horizontal
2500.00	46.58	27.55	5.49	29.93	49.69	74.00	-24.31	Horizontal
2483.50	52.28	27.53	5.47	33.92	51.36	74.00	-22.64	Vertical
2500.00	48.83	27.55	5.49	29.93	51.94	74.00	-22.06	Vertical
Average va	lue:	1		ı	ī		_	T
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	I I imit	Polarization
2483.50	37.57	27.53	5.47	33.92	36.65	54.00	-17.35	Horizontal
2500.00	33.94	27.55	5.49	29.93	37.05	54.00	-16.95	Horizontal
2483.50	39.39	27.53	5.47	33.92	38.47	54.00	-15.53	Vertical
2500.00	35.76	27.55	5.49	29.93	38.87	54.00	-15.13	Vertical

Remark:

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ebotek.cn and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.ebotek.cn. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: EBO1511082-E274

Page: 31 of 63

- 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- The emission levels of other frequencies are very lower than the limit and not show in test report.



Test mode:

Shenzhen EBO Technology Co., Ltd.

Test channel:

802.11n(HT20)

Report No.: EBO1511082-E274

Page: 32 of 63

Lowest

root modo.		002.1	111(11120)	10	ot orialinoi.		LOWCOL	
Peak value:		·						
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	49.93	27.59	5.38	34.01	48.89	74.00	-25.11	Horizontal
2400.00	58.37	27.58	5.39	34.01	57.33	74.00	-16.67	Horizontal
2390.00	51.49	27.59	5.38	34.01	50.45	74.00	-23.55	Vertical
2400.00	59.70	27.58	5.39	34.01	58.66	74.00	-15.34	Vertical
Average va	lue:			•	•	•	•	•
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	37.19	27.59	5.38	34.01	36.15	54.00	-17.85	Horizontal
2400.00	45.30	27.58	5.39	34.01	44.26	54.00	-9.74	Horizontal
2390.00	38.87	27.59	5.38	34.01	37.83	54.00	-16.17	Vertical
2400.00	46.29	27.58	5.39	34.01	45.25	54.00	-8.75	Vertical
Test mode:		802.1	1n(HT20)	To	st channel:		Highest	
Peak value:		002.1	111(11120)	16	st Charmer.		riigiiest	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	49.85	27.53	5.47	33.92	48.93	74.00	-25.07	Horizontal
2500.00	46.23	27.55	5.49	29.93	49.34	74.00	-24.66	Horizontal
2483.50	51.76	27.53	5.47	33.92	50.84	74.00	-23.16	Vertical
2500.00	48.41	27.55	5.49	29.93	51.52	74.00	-22.48	Vertical
Average va	lue:							
Frequency (MHz)	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level (dBuV/m)	Limit Line	Over Limit	Polarization

2500.00 Remark:

(MHz)

2483.50

2500.00

2483.50

(dBuV)

37.29

33.72

39.08

35.53

(dB/m)

27.53

27.55

27.53

27.55

(dB)

5.47

5.49

5.47

5.49

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ebotek.cn and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.ebotek.cn. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

(dB)

33.92

29.93

33.92

29.93

(dBuV/m)

36.37

36.83

38.16

38.64

(dBuV/m)

54.00

54.00

54.00

54.00

(dB)

-17.63 -17.17

-15.84

-15.36

Horizontal

Horizontal

Vertical

Vertical



Report No.: EBO1511082-E274

Page: 33 of 63

- 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- The emission levels of other frequencies are very lower than the limit and not show in test report.



Test mode:

Shenzhen EBO Technology Co., Ltd.

Test channel:

Report No.: EBO1511082-E274

Page: 34 of 63

Lowest

-18.45

-17.81

-16.74

-16.03

Horizontal

Horizontal

Vertical

Vertical

			()			_		
Peak value:		·						
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	48.98	27.59	5.38	34.01	47.94	74.00	-26.06	Horizontal
2400.00	57.09	27.58	5.39	34.01	56.05	74.00	-17.95	Horizontal
2390.00	50.47	27.59	5.38	34.01	49.43	74.00	-24.57	Vertical
2400.00	58.17	27.58	5.39	34.01	57.13	74.00	-16.87	Vertical
Average va	lue:	•		•	•	•		•
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	36.51	27.59	5.38	34.01	35.47	54.00	-18.53	Horizontal
2400.00	44.51	27.58	5.39	34.01	43.47	54.00	-10.53	Horizontal
2390.00	38.11	27.59	5.38	34.01	37.07	54.00	-16.93	Vertical
2400.00	45.43	27.58	5.39	34.01	44.39	54.00	-9.61	Vertical
Test mode:	e: 802.11n(HT40)		Test channel:		Highest			
Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	48.49	27.53	5.47	33.92	47.57	74.00	-26.43	Horizontal
2500.00	45.17	27.55	5.49	29.93	48.28	74.00	-25.72	Horizontal
2483.50	50.20	27.53	5.47	33.92	49.28	74.00	-24.72	Vertical
2500.00	47.17	27.55	5.49	29.93	50.28	74.00	-23.72	Vertical
Average va	lue:				_			_
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization

802.11n(HT40)

2500.00 Remark:

2483.50

2500.00

2483.50

36.47

33.08

38.18

34.86

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ebotek.cn and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.ebotek.cn. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

33.92

29.93

33.92

29.93

35.55

36.19

37.26

37.97

54.00

54.00

54.00

54.00

5.47

5.49

5.47

5.49

27.53

27.55

27.53

27.55



Report No.: EBO1511082-E274

Page: 35 of 63

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss - Preamplifier Factor

2. The emission levels of other frequencies are very lower than the limit and not show in test report.



Report No.: EBO1511082-E274

Page: 36 of 63

7.7 Spurious Emission

7.7.1 Conducted Emission Method

Test Requirement:	FCC Part15 C Section 15.247 (d)				
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V03				
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.				
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane				
Test Instruments:	Refer to section 6.0 for details				
Test mode:	Refer to section 5.3 for details				
Test results:	Pass				



Atten 20 dB

Report No.: EBO1511082-E274

Peak Search

Next Peak


Next Pk Right

Page: 37 of 63

Test plot as follows:

Test mode: 802.11b


Lowest channel




30MHz~10GHz

10GHz~25GHz

Middle channel




30MHz~10GHz




10GHz~25GHz





30MHz~10GHz



10GHz~25GHz




Report No.: EBO1511082-E274

Page: 38 of 63


Test mode:

802.11g






30MHz~10GHz




10GHz~25GHz

Copyright 2000-2009 Agilent Technologies

Middle channel




30MHz~10GHz




10GHz~25GHz





30MHz~10GHz



10GHz~25GHz




Report No.: EBO1511082-E274

Page: 39 of 63


Test mode:

802.11n(HT20)

Lowest channel




30MHz~10GHz




10GHz~25GHz

Middle channel




30MHz~10GHz




10GHz~25GHz

Highest channel



30MHz~10GHz



10GHz~25GHz




Report No.: EBO1511082-E274

Page: 40 of 63

Test mode:

802.11n(HT40)

Lowest channel




30MHz~10GHz


R T Peak Search 🔆 Agilent Next Peak Atten 20 dE Next Pk Right Next Pk Left Min Search Stop 25.000 GH Sweep 1.434 s (601 pts) Start 10.000 GHz Pk-Pk Search •Res BW 100 kHz #VBW 300 kHz X Axis 13.500 GHz Amplitude -61.51 dBm Mkr → CF Copyright 2000-2009 Agilent Technologies

10GHz~25GHz

Middle channel




30MHz~10GHz




10GHz~25GHz





30MHz~10GHz



10GHz~25GHz



Report No.: EBO1511082-E274

Page: 41 of 63

7.7.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209								
Test Method:	ANSI C63.10:20	13							
Test Frequency Range:	30MHz to 25GHz	<u>'</u>							
Test site:	Measurement Di	stance: 3m							
Receiver setup:	Frequency	Detector	RBW	VBW	Value				
	30MHz-1GHz	Quasi-pea	k 120KHz	300KHz	Quasi-peak				
	Above 1GHz	Peak	1MHz	3MHz	Peak				
	Above 1GHZ	RMS	1MHz	3MHz	Average				
Limit:	Frequer	су	Limit (dBuV/	m @3m)	Value				
	30MHz-88	MHz	40.0	0	Quasi-peak				
	88MHz-216	6MHz	43.5	0	Quasi-peak				
	216MHz-96	0MHz	46.0	0	Quasi-peak				
	960MHz-1	GHz	54.0	0	Quasi-peak				
	Above 10	2H-7	54.0	0	Average				
	Above 10	JI 12	74.0	0	Peak				
Test setup:	Below 1GHz Antenna Tower Search Antenna RF Test Receiver Ground Plane								



Report No.: EBO1511082-E274

Page: 42 of 63

	Antenna Tower Horn Antenna Spectrum Analyzer Amplifier
Test Procedure:	1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
	The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
	3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
	4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
	The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
	6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasipeak or average method as specified and then reported in a data sheet.
	7. The radiation measurements are performed in X, Y, Z axis positioning. And found the Y axis positioning which it is worse case, only the test worst case mode is recorded in the report.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Remark:

Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.



Report No.: EBO1511082-E274

Page: 43 of 63

Measurement Data

■ Below 1GHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
30.53	48.35	14.33	0.56	32.06	31.18	40.00	-8.82	Vertical
53.51	47.99	15.08	0.80	31.95	31.92	40.00	-8.08	Vertical
86.20	46.09	12.74	1.08	31.73	28.18	40.00	-11.82	Vertical
175.65	55.18	11.36	1.72	32.07	36.19	43.50	-7.31	Vertical
249.43	48.17	14.07	2.12	32.16	32.20	46.00	-13.80	Vertical
742.26	38.39	21.34	4.24	31.25	32.72	46.00	-13.28	Vertical
55.81	45.54	14.97	0.82	31.95	29.38	40.00	-10.62	Horizontal
68.39	49.91	11.34	0.93	31.89	30.29	40.00	-9.71	Horizontal
119.02	50.80	12.69	1.35	31.85	32.99	43.50	-10.51	Horizontal
175.65	56.69	11.36	1.72	32.07	37.70	43.50	-5.80	Horizontal
249.43	53.84	14.07	2.12	32.16	37.87	46.00	-8.13	Horizontal
287.99	51.95	14.84	2.31	32.18	36.92	46.00	-9.08	Horizontal



Test channel:

Report No.: EBO1511082-E274

Page: 44 of 63

Lowest

■ Above 1GHz

802.11b

Test mode:

Peak value:						•		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	39.45	31.79	8.62	32.10	47.76	74.00	-26.24	Vertical
7236.00	33.68	36.19	11.68	31.97	49.58	74.00	-24.42	Vertical
9648.00	32.33	38.07	14.16	31.56	53.00	74.00	-21.00	Vertical
12060.00	*					74.00		Vertical
14472.00	*					74.00		Vertical
16884.00	*					74.00		Vertical
4824.00	38.25	31.79	8.62	32.10	46.56	74.00	-27.44	Horizontal
7236.00	33.50	36.19	11.68	31.97	49.40	74.00	-24.60	Horizontal
9648.00	31.94	38.07	14.16	31.56	52.61	74.00	-21.39	Horizontal
12060.00	*					74.00		Horizontal
14472.00	*					74.00		Horizontal
16884.00	*					74.00		Horizontal
Average val	ue:							
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	28.60	31.79	8.62	32.10	36.91	54.00	-17.09	Vertical
7236.00	22.57	36.19	11.68	31.97	38.47	54.00	-15.53	Vertical
9648.00	22.69	38.07	14.16	31.56	43.36	54.00	-10.64	Vertical
12060.00	*					54.00		Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertical

32.10

31.97

31.56

36.14

38.00

42.37

54.00

54.00

54.00

54.00

54.00

54.00

-17.86

-16.00

-11.63

Horizontal

Horizontal

Horizontal

Horizontal

Horizontal

Horizontal

16884.00 Remark:

4824.00

7236.00

9648.00

12060.00

14472.00

27.83

22.10

21.70

*

31.79

36.19

38.07

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss - Preamplifier Factor

8.62

11.68

14.16

2. "*", means this data is the too weak instrument of signal is unable to test.



Report No.: EBO1511082-E274

Page: 45 of 63

Test mode:		802.11b		Test	channel:	Midd	le	
Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	38.65	31.85	8.66	32.12	47.04	74.00	-26.96	Vertical
7311.00	33.85	36.37	11.71	31.91	50.02	74.00	-23.98	Vertical
9748.00	33.42	38.27	14.25	31.56	54.38	74.00	-19.62	Vertical
12185.00	*					74.00		Vertical
14622.00	*					74.00		Vertical
17059.00	*					74.00		Vertical
4874.00	39.24	31.85	8.66	32.12	47.63	74.00	-26.37	Horizontal
7311.00	32.54	36.37	11.71	31.91	48.71	74.00	-25.29	Horizontal
9748.00	33.33	38.27	14.25	31.56	54.29	74.00	-19.71	Horizontal
12185.00	*					74.00		Horizontal
14622.00	*					74.00		Horizontal
17059.00	*					74.00		Horizontal
Average val			,					
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	29.56	31.85	8.66	32.12	37.95	54.00	-16.05	Vertical
7311.00	22.18	36.37	11.71	31.91	38.35	54.00	-15.65	Vertical
9748.00	22.68	38.27	14.25	31.56	43.64	54.00	-10.36	Vertical
12185.00	*					54.00		Vertical
14622.00	*					54.00		Vertical
17059.00	*					54.00		Vertical
4874.00	29.39	31.85	8.66	32.12	37.78	54.00	-16.22	Horizontal
7311.00	21.64	36.37	11.71	31.91	37.81	54.00	-16.19	Horizontal
9748.00	23.06	38.27	14.25	31.56	44.02	54.00	-9.98	Horizontal
12185.00	*					54.00		Horizontal
14622.00	*					54.00		Horizontal
17059.00	*					54.00		Horizontal

Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "*", means this data is the too weak instrument of signal is unable to test.



Report No.: EBO1511082-E274

Page: 46 of 63

Test mode:		802.11b		Test	channel:	High	est	
Peak value:					_			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	43.68	31.90	8.70	32.15	52.13	74.00	-21.87	Vertical
7386.00	34.20	36.49	11.76	31.83	50.62	74.00	-23.38	Vertical
9848.00	36.48	38.62	14.31	31.77	57.64	74.00	-16.36	Vertical
12310.00	*					74.00		Vertical
14772.00	*					74.00		Vertical
17234.00	*					74.00		Vertical
4924.00	43.17	31.90	8.70	32.15	51.62	74.00	-22.38	Horizontal
7386.00	33.20	36.49	11.76	31.83	49.62	74.00	-24.38	Horizontal
9848.00	32.70	38.62	14.31	31.77	53.86	74.00	-20.14	Horizontal
12310.00	*					74.00		Horizontal
14772.00	*					74.00		Horizontal
17234.00	*					74.00		Horizontal
Average val								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	34.68	31.90	8.70	32.15	43.13	54.00	-10.87	Vertical
7386.00	24.15	36.49	11.76	31.83	40.57	54.00	-13.43	Vertical
9848.00	25.01	38.62	14.31	31.77	46.17	54.00	-7.83	Vertical
12310.00	*					54.00		Vertical
14772.00	*					54.00		Vertical
17234.00	*					54.00		Vertical
4924.00	33.59	31.90	8.70	32.15	42.04	54.00	-11.96	Horizontal
7386.00	22.61	36.49	11.76	31.83	39.03	54.00	-14.97	Horizontal
9848.00	21.97	38.62	14.31	31.77	43.13	54.00	-10.87	Horizontal
12310.00	*					54.00		Horizontal
14772.00	*					54.00		Horizontal
17234.00	*					54.00		Horizontal

Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "*", means this data is the too weak instrument of signal is unable to test.



Report No.: EBO1511082-E274

Page: 47 of 63

Test mode:		802.11g		Test	channel:	lowe	st	
Peak value:					_			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	38.13	31.79	8.62	32.10	46.44	74.00	-27.56	Vertical
7236.00	32.85	36.19	11.68	31.97	48.75	74.00	-25.25	Vertical
9648.00	31.74	38.07	14.16	31.56	52.41	74.00	-21.59	Vertical
12060.00	*					74.00		Vertical
14472.00	*					74.00		Vertical
16884.00	*					74.00		Vertical
4824.00	37.13	31.79	8.62	32.10	45.44	74.00	-28.56	Horizontal
7236.00	32.77	36.19	11.68	31.97	48.67	74.00	-25.33	Horizontal
9648.00	31.39	38.07	14.16	31.56	52.06	74.00	-21.94	Horizontal
12060.00	*					74.00		Horizontal
14472.00	*					74.00		Horizontal
16884.00	*					74.00		Horizontal
Average val			,					
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	27.38	31.79	8.62	32.10	35.69	54.00	-18.31	Vertical
7236.00	21.76	36.19	11.68	31.97	37.66	54.00	-16.34	Vertical
9648.00	22.12	38.07	14.16	31.56	42.79	54.00	-11.21	Vertical
12060.00	*					54.00		Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertica
4824.00	26.79	31.79	8.62	32.10	35.10	54.00	-18.90	Horizontal
7236.00	21.39	36.19	11.68	31.97	37.29	54.00	-16.71	Horizontal
9648.00	21.17	38.07	14.16	31.56	41.84	54.00	-12.16	Horizontal
12060.00	*					54.00		Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "*", means this data is the too weak instrument of signal is unable to test.



Report No.: EBO1511082-E274

Page: 48 of 63

Test mode:		802.11g			Test channel:			Middle		
Peak value:										
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Fa	amp ctor IB)	Level (dBuV/m)	Limit (dBu		Over Limit (dB)	polarization
4874.00	37.56	31.85	8.66	32	.12	45.95	74.00		-28.05	Vertical
7311.00	33.16	36.37	11.71	31	.91	49.33	74.	00	-24.67	Vertical
9748.00	32.92	38.27	14.25	31	.56	53.88	74.	00	-20.12	Vertical
12185.00	*						74.	00		Vertical
14622.00	*						74.	00		Vertical
17059.00	*						74.	00		Vertical
4874.00	38.32	31.85	8.66	32	.12	46.71	74.	00	-27.29	Horizontal
7311.00	31.94	36.37	11.71	31	.91	48.11	74.	00	-25.89	Horizontal
9748.00	32.87	38.27	14.25	31	.56	53.83	74.	00	-20.17	Horizontal
12185.00	*						74.	00		Horizontal
14622.00	*						74.	00		Horizontal
17059.00	*						74.	00		Horizontal
Average val	ue:									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Fa	amp ctor IB)	Level (dBuV/m)	Limit (dBu		Over Limit (dB)	polarization
4874.00	28.55	31.85	8.66	32	.12	36.94	54.	00	-17.06	Vertical
7311.00	21.51	36.37	11.71	31	.91	37.68	54.	00	-16.32	Vertical
9748.00	22.21	38.27	14.25	31	.56	43.17	54.	00	-10.83	Vertical
12185.00	*						54.	00		Vertical
14622.00	*						54.	00		Vertical
17059.00	*						54.	00		Vertical
4874.00	28.52	31.85	8.66	32	.12	36.91	54.	00	-17.09	Horizontal
7311.00	21.06	36.37	11.71	31	.91	37.23	54.	00	-16.77	Horizontal
9748.00	22.62	38.27	14.25	31	.56	43.58	54.	00	-10.42	Horizontal
12185.00	*						54.	00		Horizontal
14622.00	*						54.	00		Horizontal
17059.00	*						54.	00		Horizontal

Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "*", means this data is the too weak instrument of signal is unable to test.



Report No.: EBO1511082-E274

Page: 49 of 63

Test mode:		802.11g			Test channel:			Highest		
Peak value:										
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Prea Fac (dE	tor	Level (dBuV/m)	Limit (dBu		Over Limit (dB)	polarization
4924.00	41.79	31.90	8.70	32.	15	50.24	74.00		-23.76	Vertical
7386.00	33.01	36.49	11.76	31.8	83	49.43	74.	00	-24.57	Vertical
9848.00	35.63	38.62	14.31	31.	77	56.79	74.	00	-17.21	Vertical
12310.00	*						74.	00		Vertical
14772.00	*						74.	00		Vertical
17234.00	*						74.	00		Vertical
4924.00	41.58	31.90	8.70	32.	15	50.03	74.	00	-23.97	Horizontal
7386.00	32.16	36.49	11.76	31.8	83	48.58	74.	00	-25.42	Horizontal
9848.00	31.91	38.62	14.31	31.	77	53.07	74.	00	-20.93	Horizontal
12310.00	*						74.	00		Horizontal
14772.00	*						74.	00		Horizontal
17234.00	*						74.	00		Horizontal
Average val			<u> </u>	1						
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Prea Fac (dE	tor	Level (dBuV/m)	Limit (dBu		Over Limit (dB)	polarization
4924.00	32.95	31.90	8.70	32.	15	41.40	54.	00	-12.60	Vertical
7386.00	23.00	36.49	11.76	31.8	83	39.42	54.	00	-14.58	Vertical
9848.00	24.19	38.62	14.31	31.	77	45.35	54.	00	-8.65	Vertical
12310.00	*						54.	00		Vertical
14772.00	*						54.	00		Vertical
17234.00	*						54.	00		Vertical
4924.00	32.10	31.90	8.70	32.	15	40.55	54.	00	-13.45	Horizontal
7386.00	21.60	36.49	11.76	31.8	83	38.02	54.	00	-15.98	Horizontal
9848.00	21.22	38.62	14.31	31.	77	42.38	54.	00	-11.62	Horizontal
12310.00	*						54.	00		Horizontal
14772.00	*						54.	00		Horizontal
17234.00	*						54.	00		Horizontal

Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "*", means this data is the too weak instrument of signal is unable to test.



Report No.: EBO1511082-E274

Page: 50 of 63

Test mode:		802.11n(H	IT20)		Test channel:			Lowest		
Peak value:					I					
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Fa	eamp ctor dB)	Level (dBuV/m)	Limit (dBu		Over Limit (dB)	polarization
4824.00	38.86	31.79	8.62	32	2.10	47.17	74.00		-26.83	Vertical
7236.00	33.31	36.19	11.68	31	.97	49.21	74.	00	-24.79	Vertical
9648.00	32.07	38.07	14.16	31	.56	52.74	74.	00	-21.26	Vertical
12060.00	*						74.	00		Vertical
14472.00	*						74.	00		Vertical
16884.00	*						74.	00		Vertical
4824.00	37.76	31.79	8.62	32	2.10	46.07	74.	00	-27.93	Horizontal
7236.00	33.18	36.19	11.68	31	.97	49.08	74.	00	-24.92	Horizontal
9648.00	31.70	38.07	14.16	31	.56	52.37	74.	00	-21.63	Horizontal
12060.00	*						74.	00		Horizontal
14472.00	*						74.	00		Horizontal
16884.00	*						74.	00		Horizontal
Average val	ue:									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Fa	eamp ctor dB)	Level (dBuV/m)	Limit (dBu		Over Limit (dB)	polarization
4824.00	28.06	31.79	8.62	32	2.10	36.37	54.	00	-17.63	Vertical
7236.00	22.21	36.19	11.68	31	.97	38.11	54.	00	-15.89	Vertical
9648.00	22.44	38.07	14.16	31	.56	43.11	54.	00	-10.89	Vertical
12060.00	*						54.	00		Vertical
14472.00	*						54.	00		Vertical
16884.00	*						54.	00		Vertical
4824.00	27.37	31.79	8.62	32	2.10	35.68	54.	00	-18.32	Horizontal
7236.00	21.78	36.19	11.68	31	.97	37.68	54.	00	-16.32	Horizontal
9648.00	21.47	38.07	14.16	31	.56	42.14	54.	00	-11.86	Horizontal
12060.00	*						54.	00		Horizontal
14472.00	*						54.	00		Horizontal
16884.00	*						54.	00		Horizontal

Remark:

- Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "*", means this data is the too weak instrument of signal is unable to test.



Report No.: EBO1511082-E274

Page: 51 of 63

Test mode:		802.11n(H	IT20)		Test channel:			Midd	le	
Peak value:					1					
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Fa	eamp ctor dB)	Level (dBuV/m)	Limit (dBu		Over Limit (dB)	polarization
4874.00	38.17	31.85	8.66	32	2.12	46.56	46.56 74.0		-27.44	Vertical
7311.00	33.54	36.37	11.71	31	.91	49.71	74.	00	-24.29	Vertical
9748.00	33.20	38.27	14.25	31	.56	54.16	74.	00	-19.84	Vertical
12185.00	*						74.	00		Vertical
14622.00	*						74.	00		Vertical
17059.00	*						74.	00		Vertical
4874.00	38.83	31.85	8.66	32	2.12	47.22	74.	00	-26.78	Horizontal
7311.00	32.28	36.37	11.71	31	.91	48.45	74.	00	-25.55	Horizontal
9748.00	33.13	38.27	14.25	31	.56	54.09	74.	00	-19.91	Horizontal
12185.00	*						74.	00		Horizontal
14622.00	*						74.	00		Horizontal
17059.00	*						74.	00		Horizontal
Average val										
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Fa	eamp ctor dB)	Level (dBuV/m)	Limit (dBu)		Over Limit (dB)	polarization
4874.00	29.11	31.85	8.66	32	2.12	37.50	54.	00	-16.50	Vertical
7311.00	21.88	36.37	11.71	31	.91	38.05	54.	00	-15.95	Vertical
9748.00	22.47	38.27	14.25	31	.56	43.43	54.	00	-10.57	Vertical
12185.00	*						54.	00		Vertical
14622.00	*						54.	00		Vertical
17059.00	*						54.	00		Vertical
4874.00	29.00	31.85	8.66	32	2.12	37.39	54.	00	-16.61	Horizontal
7311.00	21.38	36.37	11.71	31	.91	37.55	54.	00	-16.45	Horizontal
9748.00	22.86	38.27	14.25	31	.56	43.82	54.	00	-10.18	Horizontal
12185.00	*						54.	00		Horizontal
14622.00	*						54.	00		Horizontal
17059.00	*						54.	00		Horizontal

Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "*", means this data is the too weak instrument of signal is unable to test.



Report No.: EBO1511082-E274

Page: 52 of 63

Test mode:		802.11n(H	T20)		Test	channel:	Highest			
Peak value:										
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Fa	amp ctor dB)	Level (dBuV/m)	Limit (dBu		Over Limit (dB)	polarization
4924.00	42.84	31.90	8.70	32	.15	51.29	74.00		-22.71	Vertical
7386.00	33.68	36.49	11.76	31	.83	50.10	74.	00	-23.90	Vertical
9848.00	36.11	38.62	14.31	31	.77	57.27	74.	00	-16.73	Vertical
12310.00	*						74.	00		Vertical
14772.00	*						74.	00		Vertical
17234.00	*						74.	00		Vertical
4924.00	42.46	31.90	8.70	32	.15	50.91	74.	00	-23.09	Horizontal
7386.00	32.74	36.49	11.76	31	.83	49.16	74.	00	-24.84	Horizontal
9848.00	32.35	38.62	14.31	31	.77	53.51	74.	00	-20.49	Horizontal
12310.00	*						74.	00		Horizontal
14772.00	*						74.	00		Horizontal
17234.00	*						74.	00		Horizontal
Average val										
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Fa	amp ctor dB)	Level (dBuV/m)	Limit (dBu		Over Limit (dB)	polarization
4924.00	33.92	31.90	8.70	32	.15	42.37	54.	00	-11.63	Vertical
7386.00	23.64	36.49	11.76	31	.83	40.06	54.	00	-13.94	Vertical
9848.00	24.65	38.62	14.31	31	.77	45.81	54.	00	-8.19	Vertical
12310.00	*						54.	00		Vertical
14772.00	*						54.	00		Vertical
17234.00	*						54.	00		Vertical
4924.00	32.93	31.90	8.70	32	.15	41.38	54.	00	-12.62	Horizontal
7386.00	22.16	36.49	11.76	31	.83	38.58	54.	00	-15.42	Horizontal
9848.00	21.64	38.62	14.31	31	.77	42.80	54.	00	-11.20	Horizontal
12310.00	*						54.	00		Horizontal
14772.00	*						54.	00		Horizontal
17234.00	*						54.	00		Horizontal

Remark:

- 1 Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2 "*", means this data is the too weak instrument of signal is unable to test.



Report No.: EBO1511082-E274

Page: 53 of 63

Test mode:		802.11n(H	IT40)	Test	channel:	Lowe	est			
Peak value:										
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization		
4844.00	37.05	31.81	8.63	32.11	45.38	74.00	-28.62	Vertical		
7266.00	32.16	36.28	11.69	31.94	48.19	74.00	-25.81	Vertical		
9688.00	31.25	38.13	14.21	31.52	52.07	74.00	-21.93	Vertical		
12060.00	*					74.00		Vertical		
14472.00	*					74.00		Vertical		
16884.00	*					74.00		Vertical		
4844.00	36.22	31.81	8.63	32.11	44.55	74.00	-29.45	Horizontal		
7266.00	32.17	36.28	11.69	31.94	48.20	74.00	-25.80	Horizontal		
9688.00	30.94	38.13	14.21	31.52	51.76	74.00	-22.24	Horizontal		
12060.00	*					74.00		Horizontal		
14472.00	*					74.00		Horizontal		
16884.00	*					74.00		Horizontal		

Average value:

Average var								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4844.00	26.38	31.81	8.63	32.11	34.71	54.00	-19.29	Vertical
7266.00	21.10	36.28	11.69	31.94	37.13	54.00	-16.87	Vertical
9688.00	21.65	38.13	14.21	31.52	42.47	54.00	-11.53	Vertical
12060.00	*					54.00		Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertical
4844.00	25.93	31.81	8.63	32.11	34.26	54.00	-19.74	Horizontal
7266.00	20.81	36.28	11.69	31.94	36.84	54.00	-17.16	Horizontal
9688.00	20.74	38.13	14.21	31.52	41.56	54.00	-12.44	Horizontal
12060.00	*					54.00		Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "*", means this data is the too weak instrument of signal is unable to test.



Report No.: EBO1511082-E274

Page: 54 of 63

Test mode:		802.11n(HT40)			Test channel:			Middle		
Peak value:										
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Fa	amp ctor dB)	Level (dBuV/m)	Limit (dBu\		Over Limit (dB)	polarization
4874.00	36.66	31.85	8.66	32.12		45.05	74.00		-28.95	Vertical
7311.00	32.59	36.37	11.71	31.91		48.76	74.00		-25.24	Vertical
9748.00	32.52	38.27	14.25	31	.56	53.48	74.00		-20.52	Vertical
12185.00	*						74.00			Vertical
14622.00	*						74.00			Vertical
17059.00	*						74.00			Vertical
4874.00	37.56	31.85	8.66	32	.12	45.95	74.00		-28.05	Horizontal
7311.00	31.45	36.37	11.71	31	.91	47.62	74.00		-26.38	Horizontal
9748.00	32.50	38.27	14.25	31.56		53.46	74.00		-20.54	Horizontal
12185.00	*						74.00			Horizontal
14622.00	*						74.00			Horizontal
17059.00	*						74.	00		Horizontal
Average val										
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)		Level (dBuV/m)	Limit (dBu\		Over Limit (dB)	polarization
4874.00	27.73	31.85	8.66	32	.12	36.12	54.00		-17.88	Vertical
7311.00	20.97	36.37	11.71	31	.91	37.14	54.	00	-16.86	Vertical
9748.00	21.82	38.27	14.25	31.56		42.78	54.	00	-11.22	Vertical
12185.00	*						54.	00		Vertical
14622.00	*						54.	00		Vertical
17059.00	*						54.	00		Vertical
4874.00	27.81	31.85	8.66	32.12		36.20	54.	00	-17.80	Horizontal
7311.00	20.58	36.37	11.71	31.91		36.75	54.	00	-17.25	Horizontal
9748.00	22.26	38.27	14.25	31.56		43.22	54.	00	-10.78	Horizontal
12185.00	*						54.	00		Horizontal
14622.00	*						54.	00		Horizontal
17059.00	*						54.	00		Horizontal

Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "*", means this data is the too weak instrument of signal is unable to test.



Report No.: EBO1511082-E274

Page: 55 of 63

Test mode:		802.11n(HT40)			Test	Highest				
Peak value:										
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Fa	amp ctor IB)	Level (dBuV/m)			Over Limit (dB)	polarization
4904.00	40.25	31.88	8.68	32	.13	48.68	74.00		-25.32	Vertical
7356.00	32.04	36.45	11.75	31	.86	48.38	74.00		-25.62	Vertical
9808.00	34.94	38.43	14.29	31	.68	55.98	74.00		-18.02	Vertical
12310.00	*						74.00			Vertical
14772.00	*						74.00			Vertical
17234.00	*						74.	00		Vertical
4904.00	40.28	31.88	8.68	32	.13	48.71	74.00		-25.29	Horizontal
7356.00	31.31	36.45	11.75	31	.86	47.65	74.00		-26.35	Horizontal
9808.00	31.27	38.43	14.29	31	.68	52.31	74.00		-21.69	Horizontal
12310.00	*						74.00			Horizontal
14772.00	*						74.00			Horizontal
17234.00	*						74.	00		Horizontal
Average val										
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)		Level (dBuV/m)	Limit (dBu\		Over Limit (dB)	polarization
4904.00	31.53	31.88	8.68	32.13		39.96	54.00		-14.04	Vertical
7356.00	22.05	36.45	11.75	31	.86	38.39	54.00		-15.61	Vertical
9808.00	23.52	38.43	14.29	31	.68	44.56	54.	00	-9.44	Vertical
12310.00	*						54.	00		Vertical
14772.00	*						54.	00		Vertical
17234.00	*						54.	00		Vertical
4904.00	30.88	31.88	8.68	32.13		39.31	54.	00	-14.69	Horizontal
7356.00	20.77	36.45	11.75	31.86		37.11	54.	00	-16.89	Horizontal
9808.00	20.60	38.43	14.29	31.68		41.64	54.	00	-12.36	Horizontal
12310.00	*						54.	00		Horizontal
14772.00	*						54.	00		Horizontal
17234.00	*						54.	00		Horizontal

Remark:

- 1 Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2 "*", means this data is the too weak instrument of signal is unable to test.




Report No.: EBO1511082-E274

Page: 56 of 63

8 Test Setup Photo

Radiated Emission



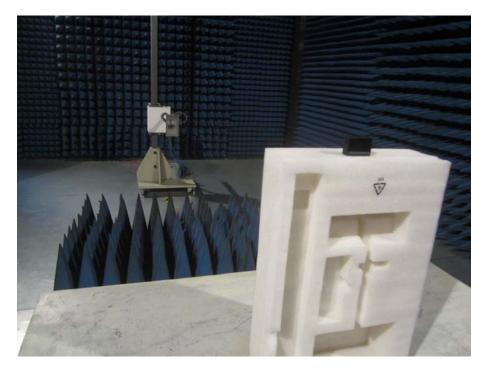



Report No.: EBO1511082-E274

Page: 57 of 63

Conducted Emission





Report No.: EBO1511082-E274

Page: 58 of 63

9 EUT Constructional Details








Report No.: EBO1511082-E274

Page: 59 of 63

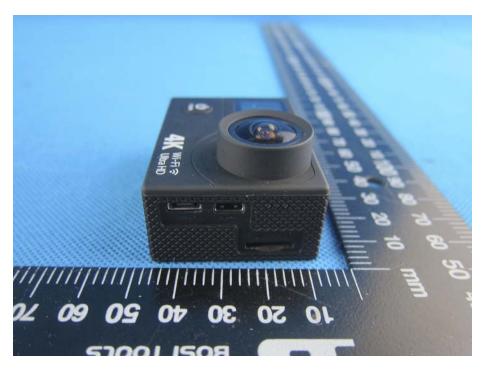






Report No.: EBO1511082-E274

Page: 60 of 63

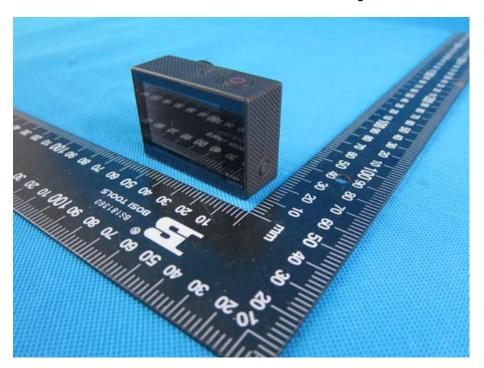







Report No.: EBO1511082-E274

Page: 61 of 63

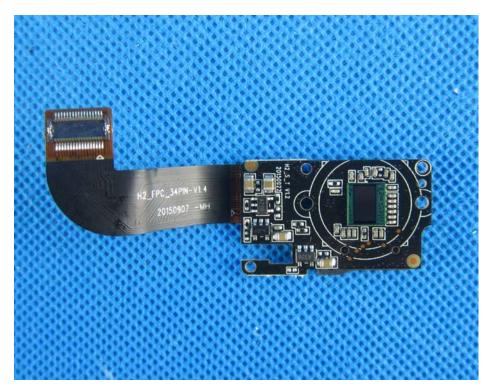


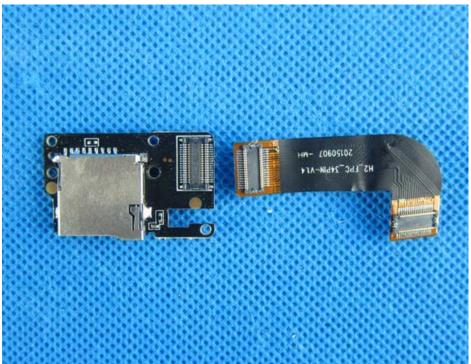




Report No.: EBO1511082-E274

Page: 62 of 63

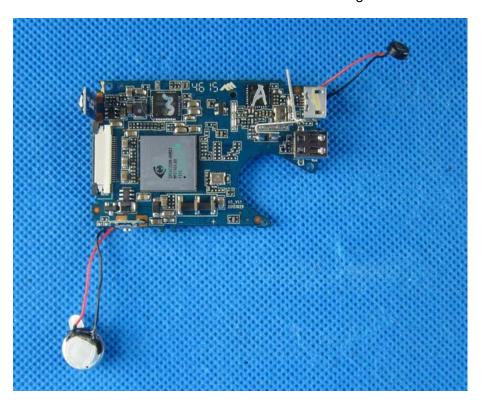


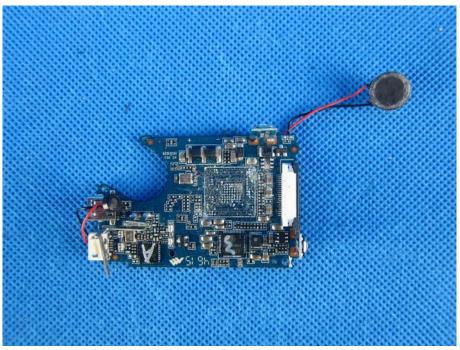



Report No.: EBO1511082-E274

Page: 63 of 63

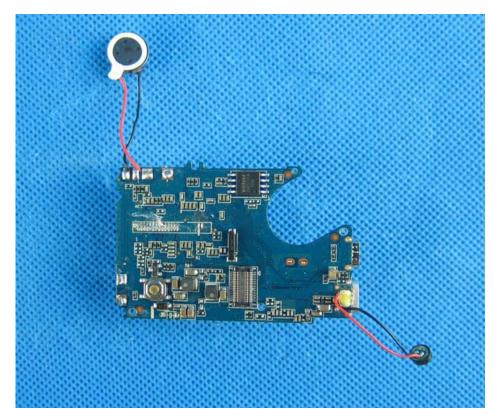



-----End-----