

FCC Measurement/Technical Report on

ICC10in

Connected Instrumentation Cluster for Motorcycle (WLAN mode)

FCC ID: 2AUXS-ICC10IN1
IC: 25847-ICC10IN1

Test Report Reference: MDE_BOSCH_1906_FCC_01

Test Laboratory:

7layers GmbH
Borsigstrasse 11
40880 Ratingen
Germany



Deutsche
Akkreditierungsstelle
D-PL-12140-01-01
D-PL-12140-01-02
D-PL-12140-01-03

Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7layers GmbH

Borsigstraße 11
40880 Ratingen, Germany
T +49 (0) 2102 749 0
F +49 (0) 2102 749 350

Geschäftsführer/
Managing Directors:
Frank Spiller
Bernhard Retka
Alexandre Norré-Oudard

Registergericht/registered:
Düsseldorf HRB 75554
USt-Id.-Nr./VAT-No. DE203159652
Steuer-Nr./TAX-No. 147/5869/0385

a Bureau Veritas
Group Company
www.7layers.com

Table of Contents

| | |
|--|-----------|
| 1 Applied Standards and Test Summary | 3 |
| 1.1 Applied Standards | 3 |
| 1.2 FCC-IC Correlation Table | 4 |
| 1.3 Measurement Summary | 4 |
| 2 Revision History / Signatures | 8 |
| 3 Administrative Data | 9 |
| 3.1 Testing Laboratory | 9 |
| 3.2 Project Data | 9 |
| 3.3 Applicant Data | 9 |
| 3.4 Manufacturer Data | 10 |
| 4 Test object Data | 11 |
| 4.1 General EUT Description | 11 |
| 4.2 EUT Main components | 11 |
| 4.3 Ancillary Equipment | 12 |
| 4.4 Auxiliary Equipment | 12 |
| 4.5 EUT Setups | 13 |
| 4.6 Operating Modes / Test Channels | 14 |
| 4.7 Product labelling | 14 |
| 5 Test Results | 15 |
| 5.1 Occupied Bandwidth (6 dB) | 15 |
| 5.2 Occupied Bandwidth (99%) | 18 |
| 5.3 Peak Power Output | 21 |
| 5.4 Spurious RF Conducted Emissions | 24 |
| 5.5 Transmitter Spurious Radiated Emissions | 27 |
| 5.6 Band Edge Compliance Conducted | 35 |
| 5.7 Band Edge Compliance Radiated | 37 |
| 5.8 Power Density | 40 |
| 6 Test Equipment | 42 |
| 7 Antenna Factors, Cable Loss and Sample Calculations | 47 |
| 7.1 LISN R&S ESH3-Z5 (150 kHz – 30 MHz) | 47 |
| 7.2 Antenna R&S HFH2-Z2 (9 kHz – 30 MHz) | 48 |
| 7.3 Antenna R&S HL562 (30 MHz – 1 GHz) | 49 |
| 7.4 Antenna R&S HF907 (1 GHz – 18 GHz) | 50 |
| 7.5 Antenna EMCO 3160-09 (18 GHz – 26.5 GHz) | 51 |
| 7.6 Antenna EMCO 3160-10 (26.5 GHz – 40 GHz) | 52 |
| 8 Setup Drawings | 53 |
| 9 Measurement Uncertainties | 54 |
| 10 Photo Report | 55 |

1 APPLIED STANDARDS AND TEST SUMMARY

1.1 APPLIED STANDARDS

Type of Authorization

Certification for an Intentional Radiator.

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 and 15 (10-1-19 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

§ 15.201 Equipment authorization requirement

§ 15.209 Radiated emission limits; general requirements

§ 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz

Note 1:

The tests were selected and performed with reference to the FCC Public Notice “Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under Section 15.247 of the FCC Rules, 558074 D01 15.247 Meas Guidance v05r02, 2019-04-02”. ANSI C63.10–2013 is applied.

Note 2:

§ 15.207 Conducted limits are not applicable:

The device is not designed to be connected to the public utility (AC) power line.

1.2 FCC-IC CORRELATION TABLE

Correlation of measurement requirements for DTS (e.g. WLAN 2.4 GHz, BT LE) equipment from FCC and IC

DTS equipment

| Measurement | FCC reference | IC reference |
|---|-------------------------------|---|
| Conducted emissions on AC Mains | § 15.207 | RSS-Gen Issue 5: 8.8 |
| Occupied bandwidth | § 15.247 (a) (2) | RSS-247 Issue 2: 5.2 (a) |
| Peak conducted output power | § 15.247 (b) (3), (4) | RSS-247 Issue 2: 5.4 (d) |
| Transmitter spurious RF conducted emissions | § 15.247 (d) | RSS-Gen Issue 5: 6.13 / 8.9/8.10; RSS-247 Issue 2: 5.5 |
| Transmitter spurious radiated emissions | § 15.247 (d); § 15.209 (a) | RSS-Gen Issue 5: 6.13 / 8.9/8.10; RSS-247 Issue 2: 5.5 |
| Band edge compliance | § 15.247 (d) | RSS-247 Issue 2: 5.5 |
| Power density | § 15.247 (e) | RSS-247 Issue 2: 5.2 (b) |
| Antenna requirement | § 15.203 / 15.204 | RSS-Gen Issue 5: 8.3 |
| Receiver spurious emissions | – | – |

1.3 MEASUREMENT SUMMARY

47 CFR CHAPTER I FCC PART 15 Subpart C §15.247

§ 15.247 (a) (2)

Occupied Bandwidth (6 dB)

The measurement was performed according to ANSI C63.10

Final Result

| OP-Mode | Setup | Date | FCC | IC |
|---------------------------------------|---------------|------------|--------|--------|
| Radio Technology, Operating Frequency | | | | |
| WLAN b, high | S01_aa01_WLAN | 2020-04-14 | Passed | Passed |
| WLAN b, low | S01_aa01_WLAN | 2020-04-14 | Passed | Passed |
| WLAN b, mid | S01_aa01_WLAN | 2020-04-14 | Passed | Passed |
| WLAN g, high | S01_aa01_WLAN | 2020-04-14 | Passed | Passed |
| WLAN g, low | S01_aa01_WLAN | 2020-04-14 | Passed | Passed |
| WLAN g, mid | S01_aa01_WLAN | 2020-04-14 | Passed | Passed |
| WLAN n 20 MHz, high | S01_aa01_WLAN | 2020-04-14 | Passed | Passed |
| WLAN n 20 MHz, low | S01_aa01_WLAN | 2020-04-14 | Passed | Passed |
| WLAN n 20 MHz, mid | S01_aa01_WLAN | 2020-04-14 | Passed | Passed |

47 CFR CHAPTER I FCC PART 15 Subpart C §15.247

IC RSS-Gen & IC TRC-43; Ch. 6.7 & Ch. 8

Occupied Bandwidth (99%)

The measurement was performed according to ANSI C63.10

Final Result

| OP-Mode | Setup | Date | FCC | IC |
|---------------------------------------|---------------|------------|-----|-----------|
| Radio Technology, Operating Frequency | | | | |
| WLAN b, high | S01_aa01_WLAN | 2020-04-14 | N/A | Performed |
| WLAN b, low | S01_aa01_WLAN | 2020-04-14 | N/A | Performed |
| WLAN b, mid | S01_aa01_WLAN | 2020-04-14 | N/A | Performed |
| WLAN g, high | S01_aa01_WLAN | 2020-04-14 | N/A | Performed |
| WLAN g, low | S01_aa01_WLAN | 2020-04-14 | N/A | Performed |
| WLAN g, mid | S01_aa01_WLAN | 2020-04-14 | N/A | Performed |
| WLAN n 20 MHz, high | S01_aa01_WLAN | 2020-04-14 | N/A | Performed |
| WLAN n 20 MHz, low | S01_aa01_WLAN | 2020-04-14 | N/A | Performed |
| WLAN n 20 MHz, mid | S01_aa01_WLAN | 2020-04-14 | N/A | Performed |

47 CFR CHAPTER I FCC PART 15 Subpart C §15.247

§ 15.247 (b) (3)

Peak Power Output

The measurement was performed according to ANSI C63.10

Final Result

| OP-Mode | Setup | Date | FCC | IC |
|---|---------------|------------|--------|--------|
| Radio Technology, Operating Frequency, Measurement method | | | | |
| WLAN b, high, conducted | S01_aa01_WLAN | 2020-04-14 | Passed | Passed |
| WLAN b, low, conducted | S01_aa01_WLAN | 2020-04-14 | Passed | Passed |
| WLAN b, mid, conducted | S01_aa01_WLAN | 2020-04-14 | Passed | Passed |
| WLAN g, high, conducted | S01_aa01_WLAN | 2020-04-14 | Passed | Passed |
| WLAN g, low, conducted | S01_aa01_WLAN | 2020-04-14 | Passed | Passed |
| WLAN g, mid, conducted | S01_aa01_WLAN | 2020-04-14 | Passed | Passed |
| WLAN n 20 MHz, high, conducted | S01_aa01_WLAN | 2020-04-14 | Passed | Passed |
| WLAN n 20 MHz, low, conducted | S01_aa01_WLAN | 2020-04-14 | Passed | Passed |
| WLAN n 20 MHz, mid, conducted | S01_aa01_WLAN | 2020-04-14 | Passed | Passed |

47 CFR CHAPTER I FCC PART 15
Subpart C §15.247

§ 15.247 (d)

Spurious RF Conducted Emissions

The measurement was performed according to ANSI C63.10

Final Result

| OP-Mode | Setup | Date | FCC | IC |
|---------------------------------------|---------------|-------------|------------|-----------|
| Radio Technology, Operating Frequency | | | | |
| WLAN b, high | S01_aa01_WLAN | 2020-04-14 | Passed | Passed |
| WLAN b, low | S01_aa01_WLAN | 2020-04-14 | Passed | Passed |
| WLAN b, mid | S01_aa01_WLAN | 2020-04-14 | Passed | Passed |
| WLAN g, high | S01_aa01_WLAN | 2020-04-14 | Passed | Passed |
| WLAN g, low | S01_aa01_WLAN | 2020-04-14 | Passed | Passed |
| WLAN g, mid | S01_aa01_WLAN | 2020-04-14 | Passed | Passed |
| WLAN n 20 MHz, high | S01_aa01_WLAN | 2020-04-14 | Passed | Passed |
| WLAN n 20 MHz, low | S01_aa01_WLAN | 2020-04-14 | Passed | Passed |
| WLAN n 20 MHz, mid | S01_aa01_WLAN | 2020-04-14 | Passed | Passed |

47 CFR CHAPTER I FCC PART 15
Subpart C §15.247

§ 15.247 (d)

Transmitter Spurious Radiated Emissions

The measurement was performed according to ANSI C63.10

Final Result

| OP-Mode | Setup | Date | FCC | IC |
|--|---------------|-------------|------------|-----------|
| Radio Technology, Operating Frequency, Measurement range | | | | |
| WLAN b, high, 1 GHz - 26 GHz | S01_ab01_WLAN | 2020-04-16 | Passed | Passed |
| WLAN b, high, 30 MHz - 1 GHz | S01_ab01_WLAN | 2020-04-24 | Passed | Passed |
| WLAN b, low, 1 GHz - 26 GHz | S01_ab01_WLAN | 2020-04-16 | Passed | Passed |
| WLAN b, low, 30 MHz - 1 GHz | S01_ab01_WLAN | 2020-04-24 | Passed | Passed |
| WLAN b, mid, 1 GHz - 26 GHz | S01_ab01_WLAN | 2020-04-16 | Passed | Passed |
| WLAN b, mid, 30 MHz - 1 GHz | S01_ab01_WLAN | 2020-04-24 | Passed | Passed |
| WLAN b, mid, 9 kHz - 30 MHz | S01_ab01_WLAN | 2020-04-24 | Passed | Passed |
| WLAN g, high, 1 GHz - 8 GHz | S01_ab01_WLAN | 2020-04-16 | Passed | Passed |
| WLAN g, low, 1 GHz - 8 GHz | S01_ab01_WLAN | 2020-04-16 | Passed | Passed |
| WLAN g, mid, 1 GHz - 8 GHz | S01_ab01_WLAN | 2020-04-16 | Passed | Passed |
| WLAN n 20 MHz, high, 1 GHz - 8 GHz | S01_ab01_WLAN | 2020-04-20 | Passed | Passed |

47 CFR CHAPTER I FCC PART 15
Subpart C §15.247

§ 15.247 (d)

Band Edge Compliance Conducted

The measurement was performed according to ANSI C63.10

Final Result

| OP-Mode | Setup | Date | FCC | IC |
|--|---------------|-------------|------------|-----------|
| Radio Technology, Operating Frequency, Band Edge | | | | |
| WLAN b, high, high | S01_aa01_WLAN | 2020-04-14 | Passed | Passed |
| WLAN b, low, low | S01_aa01_WLAN | 2020-04-14 | Passed | Passed |
| WLAN g, high, high | S01_aa01_WLAN | 2020-04-14 | Passed | Passed |
| WLAN g, low, low | S01_aa01_WLAN | 2020-04-14 | Passed | Passed |
| WLAN n 20 MHz, high, high | S01_aa01_WLAN | 2020-04-14 | Passed | Passed |
| WLAN n 20 MHz, low, low | S01_aa01_WLAN | 2020-04-14 | Passed | Passed |

47 CFR CHAPTER I FCC PART 15
Subpart C §15.247

§ 15.247 (d)

Band Edge Compliance Radiated

The measurement was performed according to ANSI C63.10

Final Result

| OP-Mode | Setup | Date | FCC | IC |
|--|---------------|-------------|------------|-----------|
| Radio Technology, Operating Frequency, Band Edge | | | | |
| WLAN b, high, high | S01_ab01_WLAN | 2020-04-16 | Passed | Passed |
| WLAN g, high, high | S01_ab01_WLAN | 2020-04-16 | Passed | Passed |
| WLAN n 20 MHz, high, high | S01_ab01_WLAN | 2020-04-20 | Passed | Passed |

47 CFR CHAPTER I FCC PART 15
Subpart C §15.247

§ 15.247 (e)

Power Density

The measurement was performed according to ANSI C63.10

Final Result

| OP-Mode | Setup | Date | FCC | IC |
|---------------------------------------|---------------|-------------|------------|-----------|
| Radio Technology, Operating Frequency | | | | |
| WLAN b, high | S01_aa01_WLAN | 2020-04-14 | Passed | Passed |
| WLAN b, low | S01_aa01_WLAN | 2020-04-14 | Passed | Passed |
| WLAN b, mid | S01_aa01_WLAN | 2020-04-14 | Passed | Passed |
| WLAN g, high | S01_aa01_WLAN | 2020-04-14 | Passed | Passed |
| WLAN g, low | S01_aa01_WLAN | 2020-04-14 | Passed | Passed |
| WLAN g, mid | S01_aa01_WLAN | 2020-04-14 | Passed | Passed |
| WLAN n 20 MHz, high | S01_aa01_WLAN | 2020-04-14 | Passed | Passed |
| WLAN n 20 MHz, low | S01_aa01_WLAN | 2020-04-14 | Passed | Passed |
| WLAN n 20 MHz, mid | S01_aa01_WLAN | 2020-04-14 | Passed | Passed |

2 REVISION HISTORY / SIGNATURES

| Report version control | | | |
|------------------------|--------------|--------------------|------------------|
| Version | Release date | Change Description | Version validity |
| initial | 2020-07-07 | -- | valid |
| -- | -- | -- | -- |

COMMENT: -



7 layers GmbH, Borsigstr. 11
40880 Ratingen, Germany
Phone +49 (0)2102 749 0



(responsible for accreditation scope)
Marco Kullik



(responsible for testing and report)
Wolfgang Richter

3 ADMINISTRATIVE DATA

3.1 TESTING LABORATORY

Company Name: 7layers GmbH
Address: Borsigstr. 11
40880 Ratingen
Germany

The test facility is accredited by the following accreditation organization:

Laboratory accreditation no: DAKKS D-PL-12140-01-01 | -02 | -03
FCC Designation Number: DE0015
FCC Test Firm Registration: 929146
ISED CAB Identifier DE0007; ISED#: 3699A

Responsible for accreditation scope: Marco Kullik
Report Template Version: 2020-03-18

3.2 PROJECT DATA

Responsible for testing and report: Wolfgang Richter
Employees who performed the tests: documented internally at 7Layers
Date of Report: 2020-07-07
Testing Period: 2020-04-14 to 2020-04-24

3.3 APPLICANT DATA

Company Name: Robert Bosch GmbH
Address: Robert-Bosch-Straße 200
31139 Hildesheim
Germany
Contact Person: Thomas Dargel

3.4 MANUFACTURER DATA

| | |
|-----------------|--|
| Company Name: | Robert Bosch GmbH |
| Address: | Robert-Bosch-Straße 200 31139 Hildesheim Germany |
| Contact Person: | Thomas Dargel |

4 TEST OBJECT DATA

4.1 GENERAL EUT DESCRIPTION

| Declared EUT data by the supplier | |
|--|--|
| Kind of Device product description | <p>The ICC10in is a motorcycle instrumentation cluster with integrated connectivity functions. It is only intended for usage on distinct motorcycles. It performs speedometer and odometer functions, as well as infotainment.</p> <p>Key features:</p> <ul style="list-style-type: none"> •10.2" high-resolution color display •Connectivity (CAN, LIN, Bluetooth, Wi-Fi) •Smartphone integration •Full graphic display for vehicle functions •Automotive Ethernet gateway (OABR, Base100-T1) •Housing IP6K9K |
| Product name | Connected Instrumentation Cluster for Motorcycle |
| Type | ICC10in |
| General product description | - |
| Special software used for testing | on Intel stick "RTA Test Profile" |
| Specific product description for the EUT | UGKZ7A2001A module for Wi-Fi & BT - Smartphone, UGXZEX304A module: BT - Headset |
| Tested data rates | WLAN b-mode, 20 MHz, 1 Mbit/s; WLAN g-mode, 20 MHz, 6 Mbit/s; WLAN n-mode, 20 MHz, MCS0 |
| Tested Modulation Type | b-mode: DSSS/CCK; g-Mode: OFDM; n-mode: OFDM |
| The EUT provides the following ports | Main Connector and Connectivity Connector |
| Voltage Level | 13 V |
| Voltage Type | DC (from motorcycle) |
| Additional information | World Safe Mode: Channel number 12 – 13 / 2484 MHz not supported Bandwidth: 20 MHz |
| Integral Antenna | WLAN: SMD chip antenna, TDK, ANT162442DT-2001AM1, 3.65 dBi |

4.2 EUT MAIN COMPONENTS

| Sample Name | Sample Code | Description |
|------------------|---------------------------------|---|
| EUT A | DE1050020aa01 | Sample with 3 temporary SMA antenna connectors for WLAN, BT-Smartphone and BT-Headset |
| Sample Parameter | Value | |
| Serial No. | 000325502637610020481500000 | |
| HW Version | H06 | |
| SW Version | 009.001.022 | |
| Comment | Integral antennas not connected | |
| | | |

| Sample Name | Sample Code | Description |
|------------------|-----------------------------|--|
| EUT B | DE1050020ab01 | Sample with 3 integral antennas for WLAN, BT-Smartphone and BT-Headset |
| Sample Parameter | Value | |
| Serial No. | 000323102637610020581500000 | |
| HW Version | H06 | |
| SW Version | 009.001.022 | |
| Comment | - | |
| | | |

NOTE: The short description is used to simplify the identification of the EUT in this test report.

4.3 ANCILLARY EQUIPMENT

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless, Ancillary Equipment can influence the test results.

| Device | Details (Manufacturer, Type Model, OUT Code) | Description |
|--------|---|-------------|
| - | - | - |

4.4 AUXILIARY EQUIPMENT

For the purposes of this test report, auxiliary equipment is defined as equipment which is used temporarily to enable operational and control features especially used for the tests of the EUT which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless, Auxiliary Equipment can influence the test results.

| Device | Details (Manufacturer, Type Model, HW, SW, S/N) | Description |
|----------------------|--|---|
| AUX 01 | Robert Bosch GmbH, iKombi Control Box, -, -, - | Control box |
| AUX 02 | PEAK Systems, PCAN-USB, -, -, IPEH-002021 | CAN adapter between control box and Intel stick |
| AUX 03 | Intel, Intel Compute Stick, -, Yocto OS, STK1AW32SC | Intel stick |
| AUX 04 | Asian Power Devices, AC Adapter, -, -, WA-15I05R | Power supply for Intel Stick |
| AUX 05 | Lindy, USB 2.0 Fast Ethernet Converter, -, -, 42922 | USB-Ethernet adapter between Intel stick and laptop |
| AUX 06 | PONTIS EMC PRODUCTS, foCAN_B, V4.0, -, 4921607013 | Fiber Optic Converter for CAN bus |
| AUX 07 | PONTIS EMC PRODUCTS, foCAN_B, V4.0, -, 4921607014 | Fiber Optic Converter for CAN bus |
| Laptop RE03 /W10 | Fujitsu Ltd., Laptop RE03 /W10: Lifebook E-Series E781, -, -, DSCK013809 | Lifebook E-Series E781 |
| AC Adapter RE03 /W10 | Fujitsu Ltd., AC Adapter RE03 /W10: SED110P2-19.0, -, -, 07813018A | SED110P2-19.0 |

4.5 EUT SETUPS

This chapter describes the combination of EUTs and equipment used for testing. The rationale for selecting the EUTs, ancillary and auxiliary equipment and interconnecting cables, is to test a representative configuration meeting the requirements of the referenced standards.

| Setup | Combination of EUTs | Description and Rationale |
|-------------------|--|--|
| S01_ab01_ WLAN | EUT B, AUX 06, AUX 05, AUX 03, AUX 01, AUX 02, AUX 07, AUX 04, Laptop RE03 /W10, AC Adapter RE03 /W10, | used for radiated measurements in WLAN mode, EUT, AUX 01 and AUX 06 inside chamber |
| S01_aa01_ WLAN | EUT A, AUX 05, AUX 03, AUX 01, AUX 02, AUX 04, Laptop RE03 /W10, AC Adapter RE03 /W10, | measurement on temporary WLAN antenna connector |

4.6 OPERATING MODES / TEST CHANNELS

This chapter describes the operating modes of the EUTs used for testing.

WLAN
20 MHz Test Channels:
Channel:
Frequency [MHz]

| 2.4 GHz ISM 2400 - 2483.5 MHz | | |
|----------------------------------|------|------|
| low | mid | high |
| 1 | 6 | 11 |
| 2412 | 2437 | 2462 |

4.7 PRODUCT LABELLING

4.7.1 FCC ID LABEL

Please refer to the documentation of the applicant.

4.7.2 LOCATION OF THE LABEL ON THE EUT

Please refer to the documentation of the applicant.

5 TEST RESULTS

5.1 OCCUPIED BANDWIDTH (6 DB)

Standard **FCC Part 15 Subpart C**

The test was performed according to:
ANSI C63.10

5.1.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produce the worst-case (smallest) emission bandwidth.

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Span: 30 / 50 MHz (for 20 / 40 MHz nominal bandwidth)
- Trace: Maxhold
- Sweeps: 2000
- Sweep time: 20 ms
- Detector: Peak

5.1.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.247 (a) (2)

Systems using digital modulation techniques may operate in the 902-928 MHz and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

5.1.3 TEST PROTOCOL

Ambient temperature: 22 °C
 Air Pressure: 1010 hPa
 Humidity: 22%
 WLAN b-Mode; 20 MHz; 1
 Mbit/s

| Band | Channel No. | Frequency [MHz] | 6 dB Bandwidth [MHz] | Limit [MHz] | Margin to Limit [MHz] |
|-------------|-------------|-----------------|----------------------|-------------|-----------------------|
| 2.4 GHz ISM | 1 | 2412 | 10.2 | 0.5 | 9.7 |
| | 6 | 2437 | 10.2 | 0.5 | 9.7 |
| | 11 | 2462 | 10.2 | 0.5 | 9.7 |

WLAN g-Mode; 20 MHz; 6
 Mbit/s

| Band | Channel No. | Frequency [MHz] | 6 dB Bandwidth [MHz] | Limit [MHz] | Margin to Limit [MHz] |
|-------------|-------------|-----------------|----------------------|-------------|-----------------------|
| 2.4 GHz ISM | 1 | 2412 | 16.4 | 0.5 | 15.9 |
| | 6 | 2437 | 16.4 | 0.5 | 15.9 |
| | 11 | 2462 | 16.4 | 0.5 | 15.9 |

WLAN n-Mode; 20 MHz; MCS0

| Band | Channel No. | Frequency [MHz] | 6 dB Bandwidth [MHz] | Limit [MHz] | Margin to Limit [MHz] |
|-------------|-------------|-----------------|----------------------|-------------|-----------------------|
| 2.4 GHz ISM | 1 | 2412 | 17.2 | 0.5 | 16.7 |
| | 6 | 2437 | 17.2 | 0.5 | 16.7 |
| | 11 | 2462 | 17.3 | 0.5 | 16.8 |

Remark: Please see next sub-clause for the measurement plot.


5.1.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = WLAN b, Operating Frequency = mid
 (S01_aa01_WLAN)

6 dB Bandwidth

| DUT Frequency (MHz) | Bandwidth (MHz) | Limit Min (MHz) | Limit Max (MHz) | Band Edge Left (MHz) | Band Edge Right (MHz) | Max Level (dBm) | Result |
|---------------------|-----------------|-----------------|-----------------|----------------------|-----------------------|-----------------|--------|
| 2437.000000 | 10.150000 | 0.500000 | --- | 2431.925000 | 2442.075000 | 2.8 | PASS |

6 dB Bandwidth

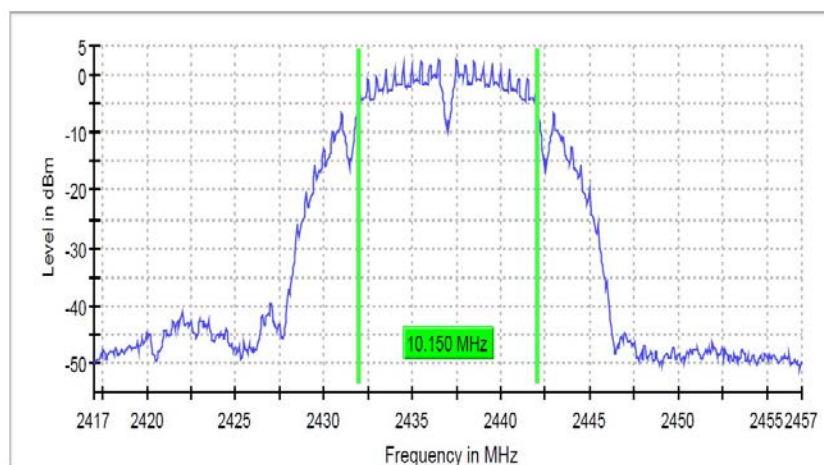

5.1.5 TEST EQUIPMENT USED

- R&S TS8997

5.2 OCCUPIED BANDWIDTH (99%)

Standard **FCC Part 15 Subpart C**

The test was performed according to:
ANSI C63.10

5.2.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Span: 30 / 50 MHz (for 20 / 40 MHz nominal bandwidth)
- Trace: Maxhold
- Sweeps: 2000
- Sweep time: 20 ms
- Detector: Sample

The 99 % measurement function of the spectrum analyzer function was used to determine the 99 % bandwidth.

5.2.2 TEST REQUIREMENTS / LIMITS

No applicable limit.

5.2.3 TEST PROTOCOL

Ambient temperature: 24 °C
Air Pressure: 1010 hPa
Humidity: 27 %
WLAN b-Mode; 20 MHz; 1 Mbit/s

| Band | Channel No. | Frequency [MHz] | 99 % Bandwidth [MHz] |
|-------------|-------------|-----------------|----------------------|
| 2.4 GHz ISM | 1 | 2412 | 13.1 |
| | 6 | 2437 | 13.1 |
| | 11 | 2462 | 13.1 |

WLAN g-Mode; 20 MHz; 6 Mbit/s

| Band | Channel No. | Frequency [MHz] | 99 % Bandwidth [MHz] |
|-------------|-------------|-----------------|----------------------|
| 2.4 GHz ISM | 1 | 2412 | 16.6 |
| | 6 | 2437 | 16.5 |
| | 11 | 2462 | 16.5 |

WLAN n-Mode; 20 MHz; MCS0

| Band | Channel No. | Frequency [MHz] | 99 % Bandwidth [MHz] |
|-------------|-------------|-----------------|----------------------|
| 2.4 GHz ISM | 1 | 2412 | 17.5 |
| | 6 | 2437 | 17.5 |
| | 11 | 2462 | 17.5 |


Remark: Please see next sub-clause for the measurement plot.

5.2.4 MEASUREMENT PLOTS

Radio Technology = WLAN b, Operating Frequency = mid
(S01_aa01_WLAN)

99 % Bandwidth


| DUT Frequency (MHz) | Bandwidth (MHz) | Limit Min (MHz) | Limit Max (MHz) | Band Edge Left (MHz) | Band Edge Right (MHz) | Result |
|---------------------|-----------------|-----------------|-----------------|----------------------|-----------------------|--------|
| 2437.000000 | 13.100000 | --- | --- | 2430.450000 | 2443.550000 | PASS |

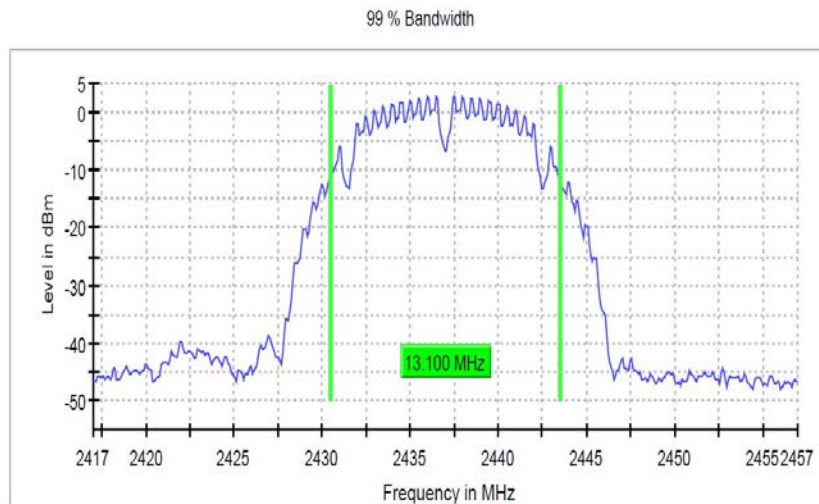

Radio Technology = WLAN g, Operating Frequency = mid
(S01_aa01_WLAN)

99 % Bandwidth

| DUT Frequency (MHz) | Bandwidth (MHz) | Limit Min (MHz) | Limit Max (MHz) | Band Edge Left (MHz) | Band Edge Right (MHz) | Result |
|---------------------|-----------------|-----------------|-----------------|----------------------|-----------------------|--------|
| 2437.000000 | 16.500000 | --- | --- | 2428.750000 | 2445.250000 | PASS |

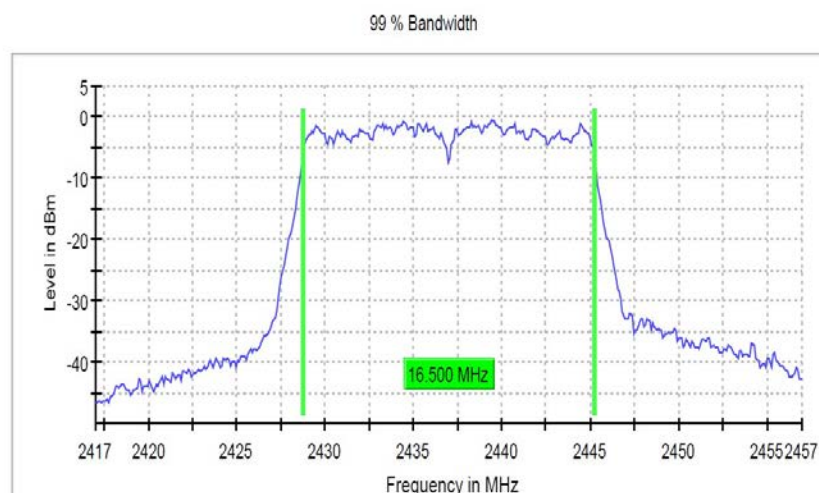


Radio Technology = WLAN n 20 MHz, Operating Frequency = mid
(S01_aa01_WLAN)

99 % Bandwidth

| DUT Frequency (MHz) | Bandwidth (MHz) | Limit Min (MHz) | Limit Max (MHz) | Band Edge Left (MHz) | Band Edge Right (MHz) | Result |
|------------------------|--------------------|--------------------|--------------------|-------------------------|--------------------------|--------|
| 2437.000000 | 17.500000 | --- | --- | 2428.250000 | 2445.750000 | PASS |

99 % Bandwidth

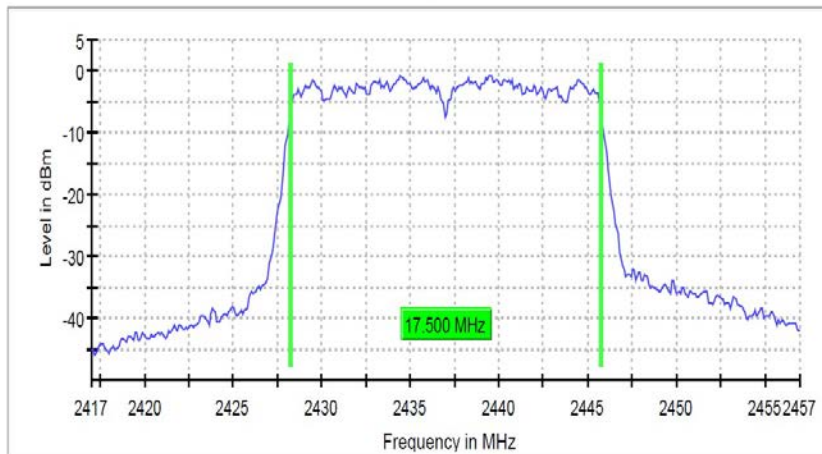

5.2.5 TEST EQUIPMENT USED

- R&S TS8997

5.3 PEAK POWER OUTPUT

Standard **FCC Part 15 Subpart C**

The test was performed according to:
ANSI C63.10

5.3.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the output power measurements. The results recorded were measured with the modulation which produces the worst-case (highest) output power. The reference level of the spectrum analyzer was set higher than the output power of the EUT.

The EUT was connected to the spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Resolution Bandwidth (RBW): 1 MHz
- Video Bandwidth (VBW): 3 MHz
- Trace: Maxhold
- Sweeps: 2000
- Sweep time: 5 ms
- Detector: Peak

The channel power function of the spectrum analyzer was used (Used channel bandwidth = DTS bandwidth)

5.3.2 TEST REQUIREMENTS / LIMITS

DTS devices:

FCC Part 15, Subpart C, §15.247 (b) (3)

For systems using digital modulation techniques in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands: 1 watt.

=> Maximum conducted peak output power: 30 dBm (excluding antenna gain, if antennas with directional gains that do not exceed 6 dBi are used).

5.3.3 TEST PROTOCOL

Ambient temperature: 24 °C
 Air Pressure: 1010 hPa
 Humidity: 27 %
 WLAN b-Mode; 20 MHz; 1
 Mbit/s

| Band | Channel No. | Frequency [MHz] | Peak Power [dBm] | Limit [dBm] | Margin to Limit [dB] | E.I.R.P [dBm] |
|-------------|-------------|-----------------|------------------|-------------|----------------------|---------------|
| 2.4 GHz ISM | 1 | 2412 | 12.2 | 30.0 | 17.8 | 15.9 |
| | 6 | 2437 | 11.9 | 30.0 | 18.1 | 15.6 |
| | 11 | 2462 | 12.1 | 30.0 | 17.9 | 15.8 |

WLAN g-Mode; 20 MHz; 6
 Mbit/s

| Band | Channel No. | Frequency [MHz] | Peak Power [dBm] | Limit [dBm] | Margin to Limit [dB] | E.I.R.P [dBm] |
|-------------|-------------|-----------------|------------------|-------------|----------------------|---------------|
| 2.4 GHz ISM | 1 | 2412 | 9.6 | 30.0 | 20.4 | 13.3 |
| | 6 | 2437 | 9.7 | 30.0 | 20.3 | 13.4 |
| | 11 | 2462 | 9.5 | 30.0 | 20.5 | 13.2 |

WLAN n-Mode; 20 MHz;
 MCS0

| Band | Channel No. | Frequency [MHz] | Peak Power [dBm] | Limit [dBm] | Margin to Limit [dB] | E.I.R.P [dBm] |
|-------------|-------------|-----------------|------------------|-------------|----------------------|---------------|
| 2.4 GHz ISM | 1 | 2412 | 9.5 | 30.0 | 20.5 | 13.2 |
| | 6 | 2437 | 9.4 | 30.0 | 20.6 | 13.1 |
| | 11 | 2462 | 9.5 | 30.0 | 20.5 | 13.2 |


Remark: Please see next sub-clause for the measurement plot.

5.3.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = WLAN b, Operating Frequency = low, Measurement method = conducted
 (S01_aa01_WLAN)

Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 2412.000000 | 12.2 | 30.0 | 12.2 | 99.877 | PASS |

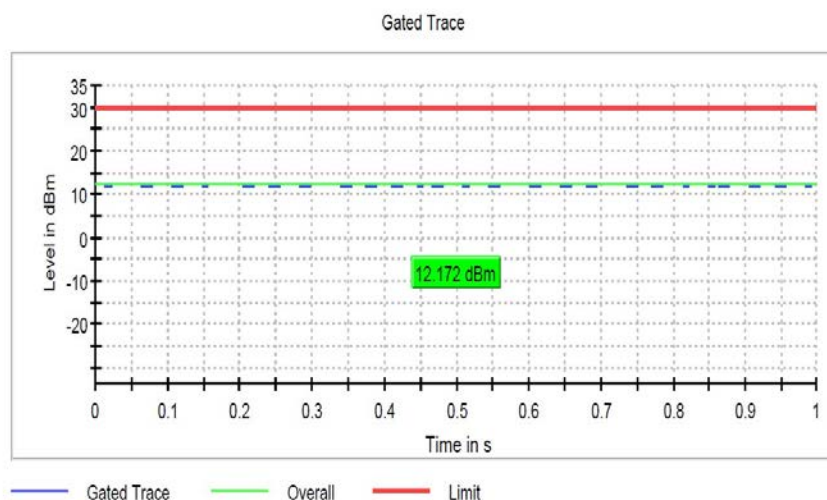

5.3.5 TEST EQUIPMENT USED

- R&S TS8997

5.4 SPURIOUS RF CONDUCTED EMISSIONS

Standard **FCC Part 15 Subpart C**

The test was performed according to:
ANSI C63.10

5.4.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the spurious emissions measurements. The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Frequency range: 30 – 25000 MHz
- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Trace: Maxhold
- Sweeps: 2
- Sweep Time: 330 s
- Detector: Peak

The reference value for the measurement of the spurious RF conducted emissions is determined during the test "band edge compliance conducted". This value is used to calculate the 20 dBc limit.

5.4.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.247 (c)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

5.4.3 TEST PROTOCOL

Ambient temperature: 24 °C
 Air Pressure: 1010 hPa
 Humidity: 27 %
 WLAN b-Mode; 20 MHz; 1 Mbit/s

| Channel No | Channel Center Freq. [MHz] | Spurious Freq. [MHz] | Spurious Level [dBm] | Detector | RBW [kHz] | Ref. Level [dBm] | Limit [dBm] | Margin to Limit [dB] |
|------------|----------------------------|----------------------|----------------------|----------|-----------|------------------|-------------|----------------------|
| 1 | 2412 | 4827.2 | -37.1 | PEAK | 100 | 2.6 | -27.4 | 9.7 |
| 6 | 2437 | 4877.1 | -38.0 | PEAK | 100 | 2.7 | -27.3 | 10.7 |
| 11 | 2462 | 4927.1 | -38.8 | PEAK | 100 | 2.5 | -27.5 | 11.3 |

WLAN g-Mode; 20 MHz; 6 Mbit/s

| Channel No | Channel Center Freq. [MHz] | Spurious Freq. [MHz] | Spurious Level [dBm] | Detector | RBW [kHz] | Ref. Level [dBm] | Limit [dBm] | Margin to Limit [dB] |
|------------|----------------------------|----------------------|----------------------|----------|-----------|------------------|-------------|----------------------|
| 1 | 2412 | 2395.0 | -44.9 | PEAK | 100 | -1.9 | -31.9 | 13.0 |
| 6 | 2437 | 4877.1 | -52.9 | PEAK | 100 | -1.5 | -31.5 | 21.4 |
| 11 | 2462 | -- | -39.9 | PEAK | 100 | -2.1 | -32.1 | > 7.8 (noise floor) |


WLAN n-Mode; 20 MHz; MCS0

| Channel No | Channel Center Freq. [MHz] | Spurious Freq. [MHz] | Spurious Level [dBm] | Detector | RBW [kHz] | Ref. Level [dBm] | Limit [dBm] | Margin to Limit [dB] |
|------------|----------------------------|----------------------|----------------------|----------|-----------|------------------|-------------|----------------------|
| 1 | 2412 | 2395.0 | -44.6 | PEAK | 100 | -2.1 | -32.1 | 12.5 |
| 6 | 2437 | 4877.1 | -52.4 | PEAK | 100 | -1.5 | -31.5 | 20.9 |
| 11 | 2462 | -- | -40.8 | PEAK | 100 | -2.2 | -32.2 | > 8.6 (noise floor) |

Remark: Please see next sub-clause for the measurement plot.

5.4.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = WLAN g, Operating Frequency = high
 (S01_aa01_WLAN)

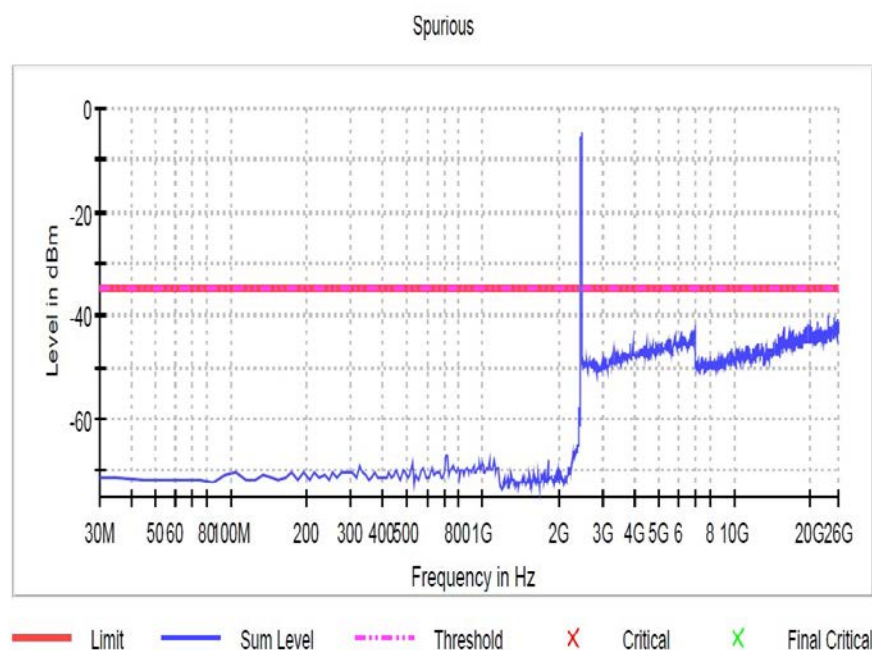

5.4.5 TEST EQUIPMENT USED

- R&S TS8997

5.5 TRANSMITTER SPURIOUS RADIATED EMISSIONS

Standard **FCC Part 15 Subpart C**

The test was performed according to:
ANSI C63.10

5.5.1 TEST DESCRIPTION

The test set-up was made in accordance to the general provisions of ANSI C63.10 in a typical installation configuration. The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m² in the semi-anechoic chamber. The influence of the EUT support table that is used between 30–1000 MHz was evaluated.

The measurement procedure is implemented into the EMI test software EMC32 from R&S. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body worn or handheld EUT. The final test on all kind of EUTs is also performed at 3 axes. A pre-check is performed while the EUT is powered from a DC power source.

1. Measurement up to 30 MHz

The Loop antenna HFH2-Z2 is used.

Step 1: pre measurement

- Anechoic chamber
- Antenna distance: 3 m
- Detector: Peak-Maxhold
- Frequency range: 0.009 - 0.15 MHz and 0.15 – 30 MHz
- Frequency steps: 0.05 kHz and 2.25 kHz
- IF-Bandwidth: 0.2 kHz and 9 kHz
- Measuring time / Frequency step: 100 ms (FFT-based)

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Open area test side
- Antenna distance: according to the Standard
- Detector: Quasi-Peak
- Frequency range: 0.009 – 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 0.2 - 10 kHz
- Measuring time / Frequency step: 1 s

2. Measurement above 30 MHz and up to 1 GHz

Step 1: Preliminary scan

This is a preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Antenna distance: 3 m
- Detector: Peak-Maxhold / Quasipeak (FFT-based)
- Frequency range: 30 – 1000 MHz
- Frequency steps: 30 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 ms
- Turntable angle range: -180° to 90°
- Turntable step size: 90°
- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarization: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: Adjustment measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will slowly vary by $\pm 45^{\circ}$ around this value. During this action, the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position, the antenna height will also slowly vary by ± 100 cm around the antenna height determined. During this action, the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: $\pm 45^{\circ}$ around the determined value
- Height variation range: ± 100 cm around the determined value
- Antenna Polarization: max. value determined in step 1

Step 3: Final measurement with QP detector

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak (< 1 GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

3. Measurement above 1 GHz

The following modifications apply to the measurement procedure for the frequency range above 1 GHz:

Step 1:

The Equipment Under Test (EUT) was set up on a non-conductive support (tilt device) at 1.5 m height in the fully anechoic chamber.

All steps were performed with one height (1.5 m) of the receiving antenna only.

The EUT is turned during the preliminary measurement across the elevation axis, with a step size of 90 °.

The turn table step size (azimuth angle) for the preliminary measurement is 45 °.

Step 2:

Due to the fact, that in this frequency range the test is performed in a fully anechoic room, the height scan of the receiving antenna in step 2 is omitted. Instead of this, a maximum search with a step size $\pm 45^\circ$ for the elevation axis is performed.

The turn table azimuth will slowly vary by $\pm 22.5^\circ$.

The elevation angle will slowly vary by $\pm 45^\circ$

EMI receiver settings (for all steps):

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

Step 3:

Spectrum analyzer settings for step 3:

- Detector: Peak / Average
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 1 MHz
- Measuring time: 1 s

5.5.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.247 (d)

... In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

| Frequency in MHz | Limit ($\mu\text{V/m}$) | Measurement distance (m) | Limits ($\text{dB}\mu\text{V/m}$) |
|------------------|---------------------------|--------------------------|-------------------------------------|
| 0.009 – 0.49 | 2400/F(kHz)@300m | 3 | (48.5 – 13.8)@300m |
| 0.49 – 1.705 | 24000/F(kHz)@30m | 3 | (33.8 – 23.0)@30m |
| 1.705 – 30 | 30@30m | 3 | 29.5@30m |

The measured values are corrected with an inverse linear distance extrapolation factor (40 dB/decade) according FCC 15.31 (2).

| Frequency in MHz | Limit ($\mu\text{V/m}$) | Measurement distance (m) | Limits ($\text{dB}\mu\text{V/m}$) |
|------------------|---------------------------|--------------------------|-------------------------------------|
| 30 – 88 | 100@3m | 3 | 40.0@3m |
| 88 – 216 | 150@3m | 3 | 43.5@3m |
| 216 – 960 | 200@3m | 3 | 46.0@3m |
| 960 – 26000 | 500@3m | 3 | 54.0@3m |
| 26000 – 40000 | 500@3m | 1 | 54.0@3m |

The measured values above 26 GHz are corrected with an inverse linear distance extrapolation factor (20 dB/decade).

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: Limit (dBµV/m) = 20 log (Limit (µV/m)/1µV/m)

5.5.3 TEST PROTOCOL

Ambient temperature: 26 °C
 Air Pressure: 1010 hPa
 Humidity: 27 %
 WLAN b-Mode; 20 MHz; 1 Mbit/s
 Applied duty cycle correction (AV): 0.1 dB

| Ch. No. | Ch. Center Freq. [MHz] | Spurious Freq. [MHz] | Spurious Level [dBµV/m] | Detector | RBW [kHz] | Limit [dBµV/m] | Margin to Limit [dB] | Limit Type |
|---------|------------------------|----------------------|-------------------------|----------|-----------|----------------|----------------------|------------|
| 1 | 2412 | 1703.6 | 38.5 | AV | 1000 | 54.0 | 15.5 | RB |
| 1 | 2412 | 2386.0 | 42.0 | AV | 1000 | 54.0 | 12.0 | RB |
| 1 | 2412 | 4824.0 | 44.8 | AV | 1000 | 54.0 | 9.2 | RB |
| 1 | 2412 | 15598.6 | 42.0 | AV | 1000 | 54.0 | 12.0 | RB |
| 1 | 2412 | 15602.3 | 56.1 | PEAK | 1000 | 74.0 | 17.9 | RB |
| 11 | 2462 | 1704.3 | 39.1 | AV | 1000 | 54.0 | 14.9 | RB |
| 11 | 2462 | 2487.9 | 41.0 | AV | 1000 | 54.0 | 13.0 | RB |
| 11 | 2462 | 4924.1 | 43.0 | AV | 1000 | 54.0 | 11.0 | RB |
| 11 | 2462 | 7386.8 | 47.3 | AV | 1000 | 54.0 | 6.7 | RB |
| 11 | 2462 | 15609.3 | 41.9 | AV | 1000 | 54.0 | 12.1 | RB |
| 11 | 2462 | 15617.6 | 55.8 | PEAK | 1000 | 74.0 | 18.2 | RB |
| 11 | 2462 | 17805.6 | 45.5 | AV | 1000 | 54.0 | 8.5 | RB |
| 11 | 2462 | 17836.7 | 59.6 | PEAK | 1000 | 74.0 | 14.4 | RB |
| 11 | 2462 | 2486.7 | 52.9 | PEAK | 1000 | 74.0 | 21.1 | RB |
| 6 | 2437 | 1703.8 | 37.8 | AV | 1000 | 54.0 | 16.2 | RB |
| 6 | 2437 | 4873.9 | 43.4 | AV | 1000 | 54.0 | 10.6 | RB |
| 6 | 2437 | 7311.6 | 44.5 | AV | 1000 | 54.0 | 9.5 | RB |
| 6 | 2437 | 14489.5 | 40.3 | AV | 1000 | 54.0 | 13.7 | RB |
| 6 | 2437 | 14496.1 | 54.1 | PEAK | 1000 | 74.0 | 19.9 | RB |
| 6 | 2437 | 15598.1 | 41.9 | AV | 1000 | 54.0 | 12.1 | RB |
| 6 | 2437 | 15599.3 | 56.3 | PEAK | 1000 | 74.0 | 17.7 | RB |
| 6 | 2437 | 16163.5 | 54.5 | PEAK | 1000 | 74.0 | 19.5 | RB |
| 6 | 2437 | 16168.0 | 40.6 | AV | 1000 | 54.0 | 13.4 | RB |
| 6 | 2437 | 17824.1 | 45.6 | AV | 1000 | 54.0 | 8.4 | RB |
| 6 | 2437 | 17824.1 | 59.8 | PEAK | 1000 | 74.0 | 14.2 | RB |

WLAN g-Mode; 20 MHz; 6 Mbit/s
 Applied duty cycle correction (AV): 0.1 dB

| Ch. No. | Ch. Center Freq. [MHz] | Spurious Freq. [MHz] | Spurious Level [dBµV/m] | Detector | RBW [kHz] | Limit [dBµV/m] | Margin to Limit [dB] | Limit Type |
|---------|------------------------|----------------------|-------------------------|----------|-----------|----------------|----------------------|------------|
| 6 | 2437 | 1704.1 | 40.6 | AV | 1000 | 54.0 | 13.4 | RB |
| 6 | 2437 | 7316.3 | 36.7 | AV | 1000 | 54.0 | 17.3 | RB |
| 6 | 2437 | 7316.3 | 57.2 | PEAK | 1000 | 74.0 | 16.8 | RB |
| 11 | 2462 | 1704.1 | 40.6 | AV | 1000 | 54.0 | 13.4 | RB |
| 11 | 2462 | 2483.7 | 39.4 | AV | 1000 | 54.0 | 14.6 | RB |
| 11 | 2462 | 2483.7 | 58.6 | PEAK | 1000 | 74.0 | 15.4 | RB |
| 11 | 2462 | 7390.1 | 39.2 | AV | 1000 | 54.0 | 14.8 | RB |
| 11 | 2462 | 7390.1 | 60.7 | PEAK | 1000 | 74.0 | 13.3 | RB |
| 1 | 2412 | 1704.3 | 38.0 | AV | 1000 | 54.0 | 16.0 | RB |
| 1 | 2412 | 2388.6 | 62.3 | PEAK | 1000 | 74.0 | 11.7 | RB |
| 1 | 2412 | 2389.9 | 40.2 | AV | 1000 | 54.0 | 13.8 | RB |
| 1 | 2412 | 2389.9 | 63.6 | PEAK | 1000 | 74.0 | 10.4 | RB |


WLAN n-Mode; 20 MHz; MCS0
Applied duty cycle correction (AV): 0.1 dB

| Ch. No. | Ch. Center Freq. [MHz] | Spurious Freq. [MHz] | Spurious Level [dBμV/m] | Detector | RBW [kHz] | Limit [dBμV/m] | Margin to Limit [dB] | Limit Type |
|---------|------------------------|----------------------|-------------------------|----------|-----------|----------------|----------------------|------------|
| 11 | 2462 | 1704.1 | 53.0 | PEAK | 1000 | 74.0 | 21.0 | RB |
| 11 | 2462 | 1704.4 | 36.6 | AV | 1000 | 54.0 | 17.4 | RB |
| 11 | 2462 | 2483.5 | 44.2 | AV | 1000 | 54.0 | 9.8 | RB |
| 11 | 2462 | 2483.5 | 68.1 | PEAK | 1000 | 74.0 | 5.9 | RB |
| 11 | 2462 | 7384.1 | 39.4 | AV | 1000 | 54.0 | 14.6 | RB |
| 11 | 2462 | 7390.9 | 60.6 | PEAK | 1000 | 74.0 | 13.4 | RB |

Remark: Please see next sub-clause for the measurement plot.

5.5.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = WLAN b, Operating Frequency = mid,
Measurement range = 30 MHz - 1 GHz
(S01_ab01_WLAN)

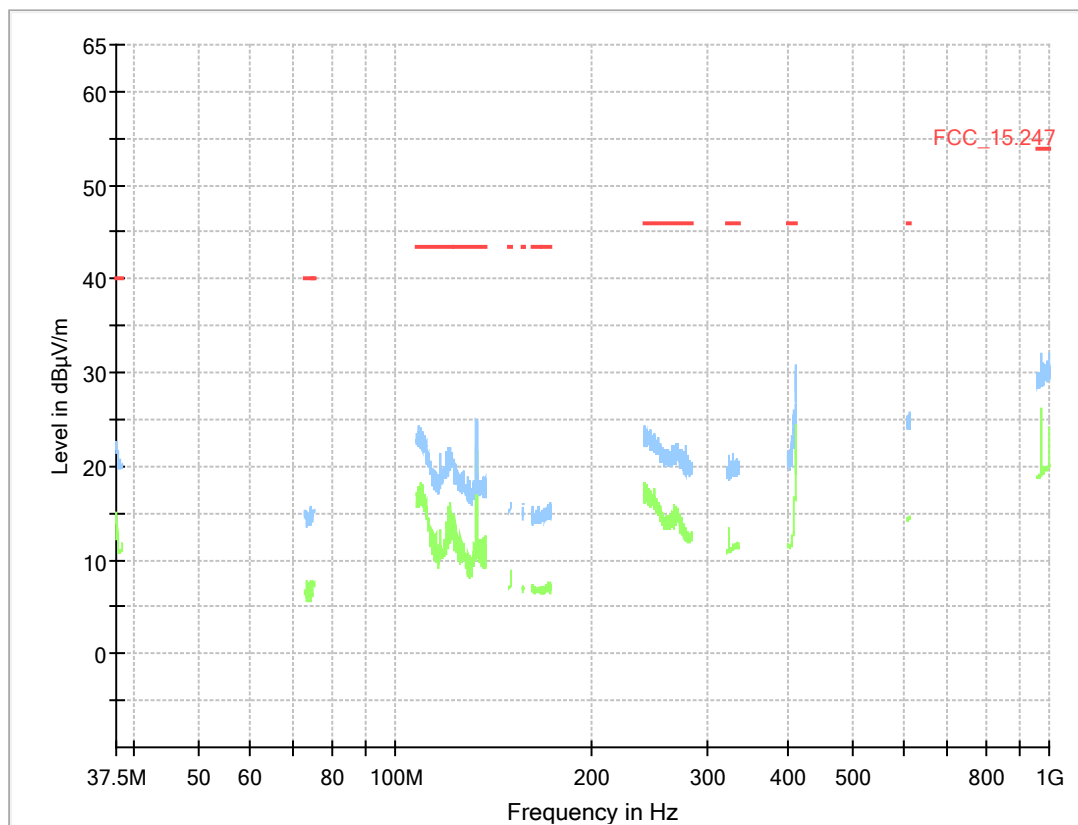


Final_Result

| Frequency (MHz) | QuasiPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) | Comment |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|---------|
| --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |

Radio Technology = WLAN b, Operating Frequency = mid,
Measurement range = 9 kHz - 30 MHz
(S01_ab01_WLAN)

Common Information


| | |
|--------------------------------|---|
| Test Description: | Radiated Emissions, Test Site: Semi Anechoic Chamber @ 3 m |
| Test Standard: | FCC §15.247 |
| EUT / Setup Code: | DE1050020ab01 |
| Operating Conditions: | WLAN 2.4G, BT |
| Operator Name: | WES/RICHWOL |
| Comment: | |
| x-Orientation (indicate h=100) | loop plane vertical, vector in measurement axis directed to EUT |
| y-Orientation (indicate h=200) | loop plane vertical, vector perpendicular to measurement axis |
| z-Orientation (indicate h=300) | loop plane horizontal, normal vector directed to ground |
| Legend: | Trace: blue = Peak; green = AV, Star = critical frequency; Rhombus: blue = final QP |

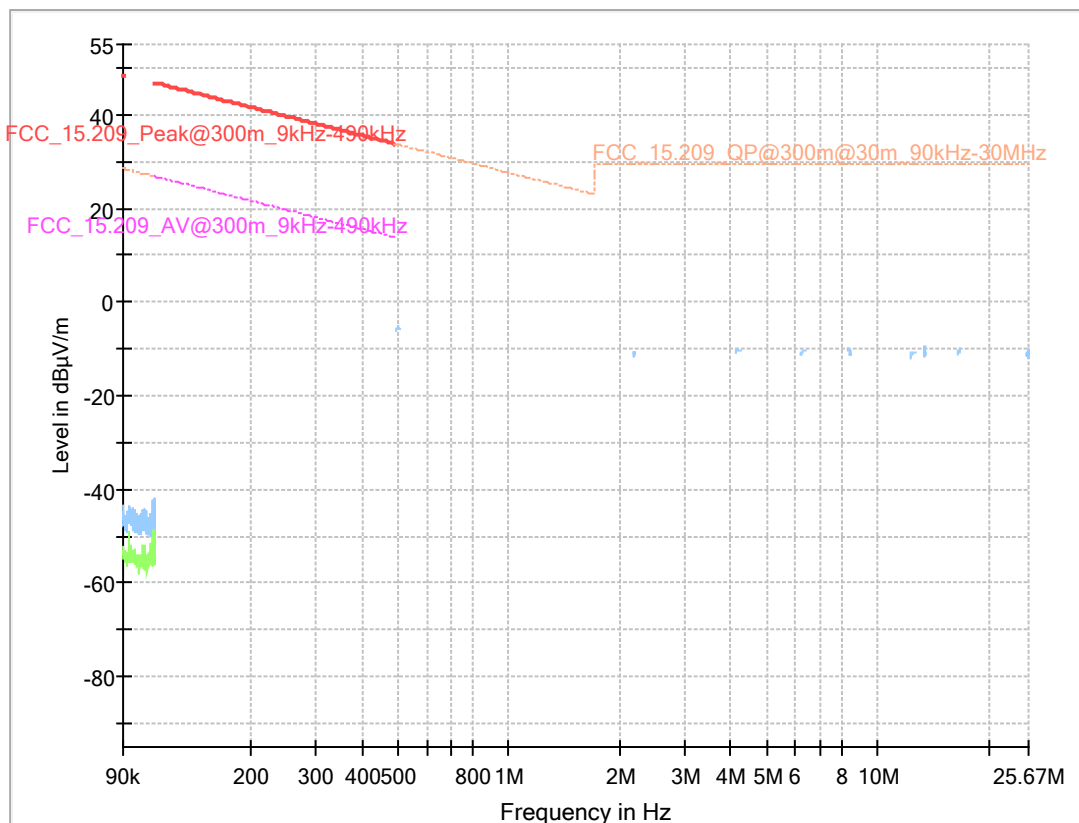

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-----------------|-----------------|-------------|---------------|--------------|
| --- | --- | --- | --- | --- | --- | --- | --- | --- |


Radio Technology = WLAN b, Operating Frequency = high,
Measurement range = 1 GHz - 26 GHz
(S01_ab01_WLAN)

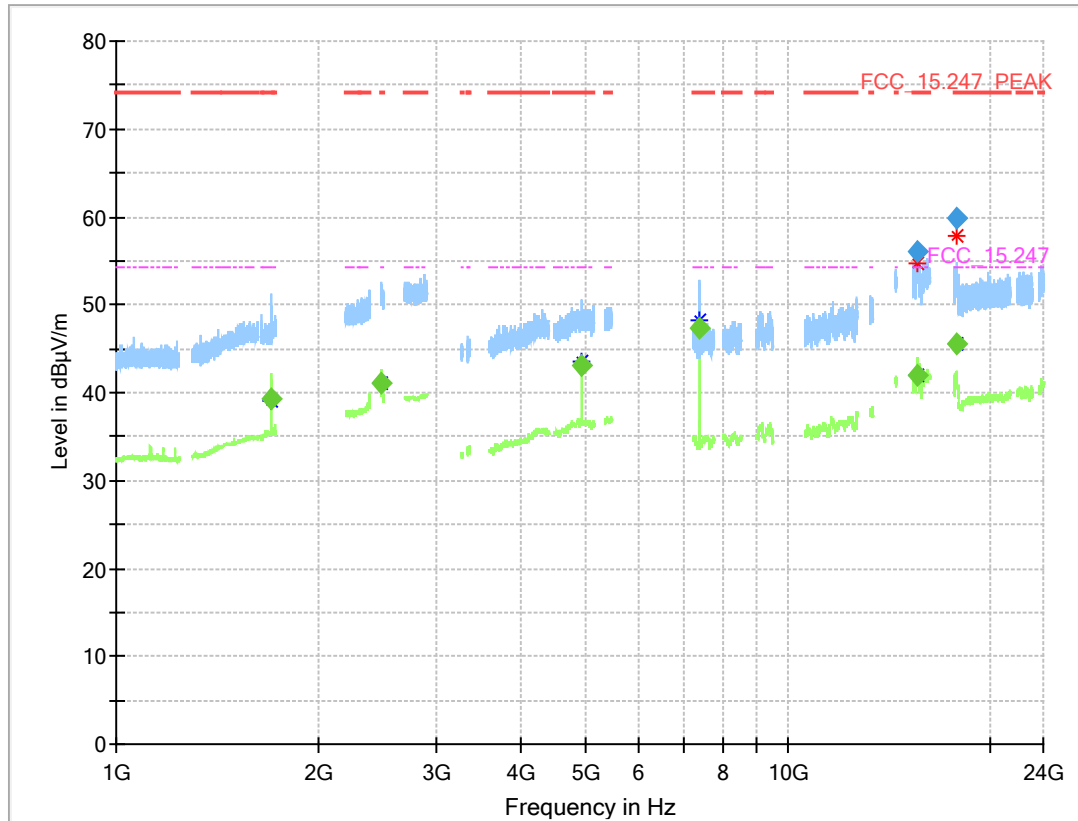

Final_Result (Rhombus)

| Frequency (MHz) | MaxPeak (dBμV/m) | CAverage (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Elevation (deg) |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|-----------------|
| 1704.250 | --- | 39.0 | 54.00 | 14.98 | 1000.0 | 1000.000 | 150.0 | V | -128.0 | 75.0 |
| 2487.873 | --- | 40.9 | 54.00 | 13.05 | 1000.0 | 1000.000 | 150.0 | H | -143.0 | 87.0 |
| 4924.125 | --- | 42.9 | 54.00 | 11.08 | 1000.0 | 1000.000 | 150.0 | H | 116.0 | 78.0 |
| 7386.750 | --- | 47.2 | 54.00 | 6.85 | 1000.0 | 1000.000 | 150.0 | V | -150.0 | 95.0 |
| 15609.250 | --- | 41.8 | 54.00 | 12.23 | 1000.0 | 1000.000 | 150.0 | V | -71.0 | -3.0 |
| 15617.608 | 55.8 | --- | 74.00 | 18.16 | 1000.0 | 1000.000 | 150.0 | H | -38.0 | 100.0 |
| 17805.600 | --- | 45.4 | 54.00 | 8.62 | 1000.0 | 1000.000 | 150.0 | V | 109.0 | 5.0 |
| 17836.650 | 59.6 | --- | 74.00 | 14.36 | 1000.0 | 1000.000 | 150.0 | V | -116.0 | 15.0 |

Radio Technology = WLAN n 20 MHz, Operating Frequency = high,
Measurement range = 1 GHz - 26 GHz
(S01_ab01_WLAN)

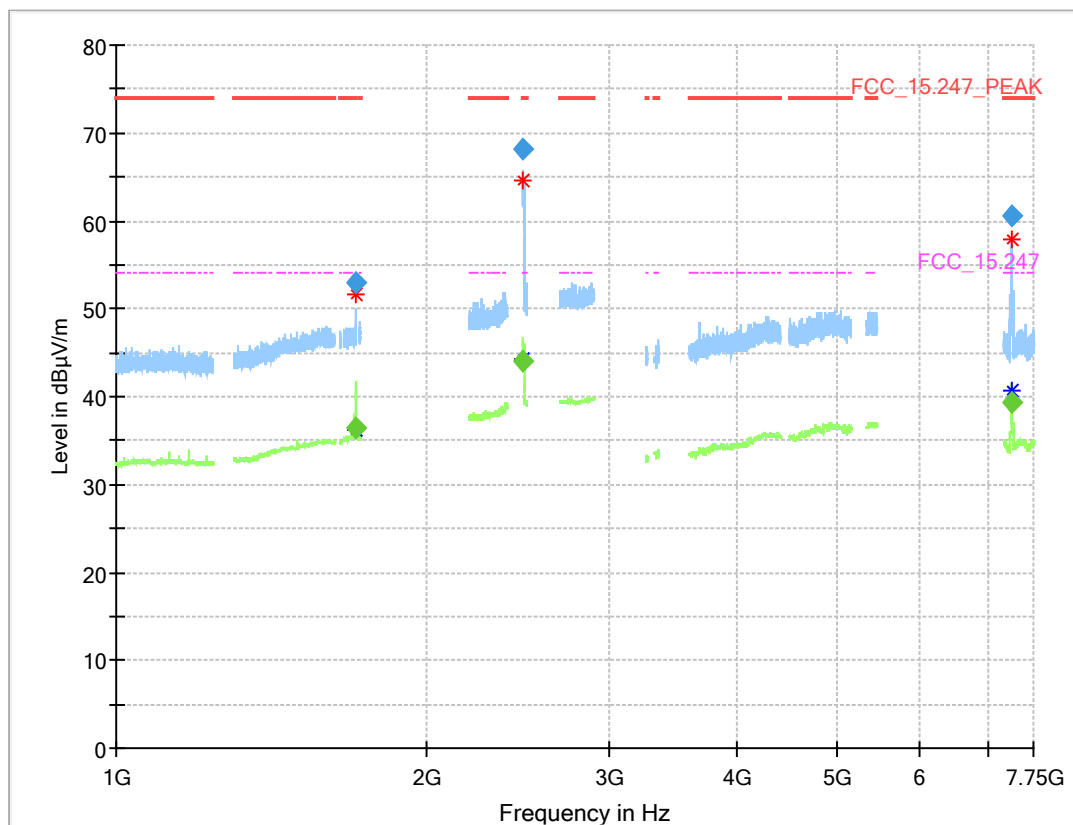

Final_Result (Rhombus)

| Frequency (MHz) | MaxPeak (dBµV/m) | CAverage (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Elevation (deg) |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|-----------------|
| 1704.125 | 53.0 | --- | 74.00 | 21.02 | 1000.0 | 1000.000 | 150.0 | V | -178.0 | 105.0 |
| 1704.375 | --- | 36.5 | 54.00 | 17.47 | 1000.0 | 1000.000 | 150.0 | V | -122.0 | 75.0 |
| 2483.500 | --- | 44.1 | 54.00 | 9.87 | 1000.0 | 1000.000 | 150.0 | H | -41.0 | -12.0 |
| 2483.500 | 68.1 | --- | 74.00 | 5.90 | 1000.0 | 1000.000 | 150.0 | H | -41.0 | 0.0 |
| 7384.125 | --- | 39.3 | 54.00 | 14.66 | 1000.0 | 1000.000 | 150.0 | V | -150.0 | 94.0 |
| 7390.875 | 60.6 | --- | 74.00 | 13.45 | 1000.0 | 1000.000 | 150.0 | V | -154.0 | 105.0 |

5.5.5 TEST EQUIPMENT USED

- Radiated Emissions

5.6 BAND EDGE COMPLIANCE CONDUCTED

Standard **FCC Part 15 Subpart C**

The test was performed according to:
ANSI C63.10

5.6.1 TEST DESCRIPTION

For the conducted measurement, the Equipment Under Test (EUT) is placed in a shielded room. The reference power was measured in the test case "Spurious RF Conducted Emissions". The EUT was connected to the spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Lower Band Edge:
Minimum frequency: 2397.0 MHz
Upper Band Edge
Maximum frequency: 2485.0 MHz
- Span:
Bluetooth: 6 MHz
WLAN: 25 / 45 / 85 MHz [depending on channel bandwidth]
- Detector: Peak
- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Sweep time: 5 ms
- Sweeps: 2000
- Trace: Maxhold

5.6.2 TEST REQUIREMENTS / LIMITS

FCC Part 15.247 (d)

"In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. ...

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c))."

For the conducted measurement the RF power at the band edge shall be "at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power..."

5.6.3 TEST PROTOCOL

WLAN b-Mode; 20 MHz; 1 Mbit/s

| Channel No. | Channel Center Frequency [MHz] | Band Edge Freq. [MHz] | Spurious Level [dBm] | Detector | RBW [kHz] | Ref. Level [dBm] | Limit [dBm] | Margin to Limit [dB] |
|-------------|--------------------------------|-----------------------|----------------------|----------|-----------|------------------|-------------|----------------------|
| 1 | 2412 | 2400.0 | -41.6 | PEAK | 100 | 2.6 | -27.4 | 14.2 |
| 11 | 2462 | 2483.5 | -45.3 | PEAK | 100 | 2.5 | -27.5 | 17.8 |

WLAN g-Mode; 20 MHz; 6 Mbit/s

| Channel No. | Channel Center Frequency [MHz] | Band Edge Freq. [MHz] | Spurious Level [dBm] | Detector | RBW [kHz] | Ref. Level [dBm] | Limit [dBm] | Margin to Limit [dB] |
|-------------|--------------------------------|-----------------------|----------------------|----------|-----------|------------------|-------------|----------------------|
| 1 | 2412 | 2400.0 | -39.4 | PEAK | 100 | -1.9 | -31.9 | 7.5 |
| 11 | 2462 | 2483.5 | -47.6 | PEAK | 100 | -2.1 | -32.1 | 15.5 |


WLAN n-Mode; 20 MHz; MCS0

| Channel No. | Channel Center Frequency [MHz] | Band Edge Freq. [MHz] | Spurious Level [dBm] | Detector | RBW [kHz] | Ref. Level [dBm] | Limit [dBm] | Margin to Limit [dB] |
|-------------|--------------------------------|-----------------------|----------------------|----------|-----------|------------------|-------------|----------------------|
| 1 | 2412 | 2400.0 | -42.5 | PEAK | 100 | -2.1 | -32.1 | 10.4 |
| 11 | 2462 | 2483.5 | -46.0 | PEAK | 100 | -2.2 | -32.2 | 13.8 |

Remark: Please see next sub-clause for the measurement plot.

5.6.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = WLAN g, Operating Frequency = low, Band Edge = low
(S01_aa01_WLAN)

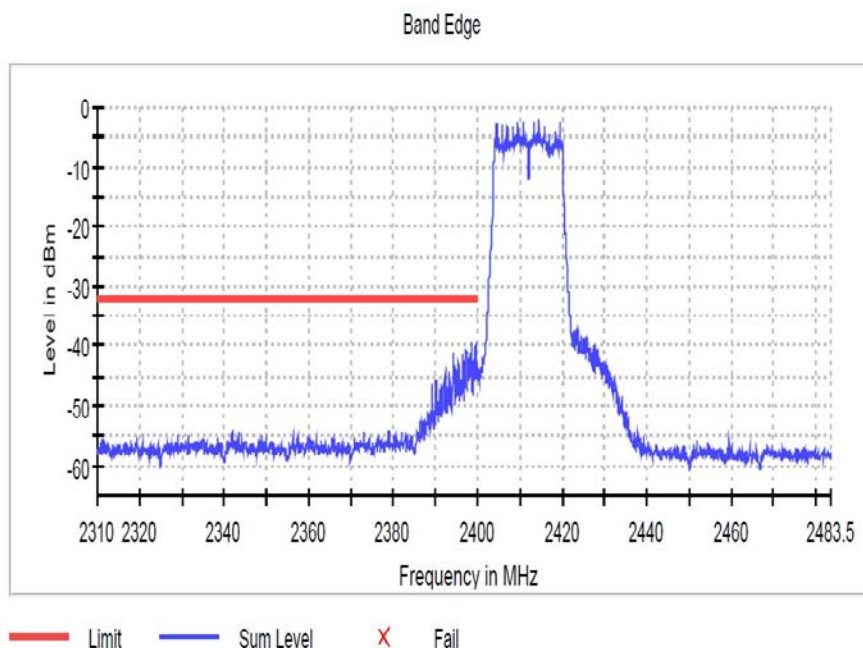

5.6.5 TEST EQUIPMENT USED

- R&S TS8997

5.7 BAND EDGE COMPLIANCE RADIATED

Standard **FCC Part 15 Subpart C**

The test was performed according to:
ANSI C63.10

5.7.1 TEST DESCRIPTION

Please see test description for the test case "Spurious Radiated Emissions"

5.7.2 TEST REQUIREMENTS / LIMITS

For band edges connected to a restricted band, the limits are specified in Section 15.209(a)

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

| Frequency in MHz | Limit (μV/m) | Measurement distance (m) | Limits (dBμV/m) |
|------------------|------------------|--------------------------|--------------------|
| 0.009 – 0.49 | 2400/F(kHz)@300m | 3 | (48.5 – 13.8)@300m |
| 0.49 – 1.705 | 24000/F(kHz)@30m | 3 | (33.8 – 23.0)@30m |
| 1.705 – 30 | 30@30m | 3 | 29.5@30m |

The measured values are corrected with an inverse linear distance extrapolation factor (40 dB/decade) according FCC 15.31 (2).

| Frequency in MHz | Limit (μV/m) | Measurement distance (m) | Limits (dBμV/m) |
|------------------|--------------|--------------------------|-----------------|
| 30 – 88 | 100@3m | 3 | 40.0@3m |
| 88 – 216 | 150@3m | 3 | 43.5@3m |
| 216 – 960 | 200@3m | 3 | 46.0@3m |
| 960 - 26000 | 500@3m | 3 | 54.0@3m |
| 26000 - 40000 | 500@3m | 1 | 54.0@3m |

The measured values above 26 GHz are corrected with an inverse linear distance extrapolation factor (20 dB/decade).

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: $\text{Limit (dBμV/m)} = 20 \log (\text{Limit (μV/m)}/1\mu\text{V/m})$

5.7.3 TEST PROTOCOL

WLAN b-Mode; 20 MHz; 1 Mbit/s

Applied duty cycle correction (AV): 0.1 dB

| Ch. No. | Ch. Center Freq. [MHz] | Band Edge Freq. [MHz] | Spurious Level [dBμV/m] | Detector | RBW [kHz] | Limit [dBμV/m] | Margin to Limit [dB] | Limit Type |
|---------|------------------------|-----------------------|-------------------------|----------|-----------|----------------|----------------------|------------|
| 11 | 2462 | 2483.5 | 52.9 | PEAK | 1000 | 74.0 | 21.1 | BE |
| 11 | 2462 | 2483.5 | 41.0 | AV | 1000 | 54.0 | 13.0 | BE |

WLAN g-Mode; 20 MHz; 6 Mbit/s

Applied duty cycle correction (AV): 0.1 dB

| Ch. No. | Ch. Center Freq. [MHz] | Band Edge Freq. [MHz] | Spurious Level [dBμV/m] | Detector | RBW [kHz] | Limit [dBμV/m] | Margin to Limit [dB] | Limit Type |
|---------|------------------------|-----------------------|-------------------------|----------|-----------|----------------|----------------------|------------|
| 11 | 2462 | 2483.5 | 58.6 | PEAK | 1000 | 74.0 | 15.4 | BE |
| 11 | 2462 | 2483.5 | 39.4 | AV | 1000 | 54.0 | 14.6 | BE |

WLAN n-Mode; 20 MHz; MCS0


Applied duty cycle correction (AV): 0.1 dB

| Ch. No. | Ch. Center Freq. [MHz] | Band Edge Freq. [MHz] | Spurious Level [dBμV/m] | Detector | RBW [kHz] | Limit [dBμV/m] | Margin to Limit [dB] | Limit Type |
|---------|------------------------|-----------------------|-------------------------|----------|-----------|----------------|----------------------|------------|
| 11 | 2462 | 2483.5 | 64.6 | PEAK | 1000 | 74.0 | 9.4 | BE |
| 11 | 2462 | 2483.5 | 44.4 | AV | 1000 | 54.0 | 9.6 | BE |

Remark: Please see next sub-clause for the measurement plot.

5.7.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = WLAN n 20 MHz, Operating Frequency = high, Band Edge = high
(S01_ab01_WLAN)

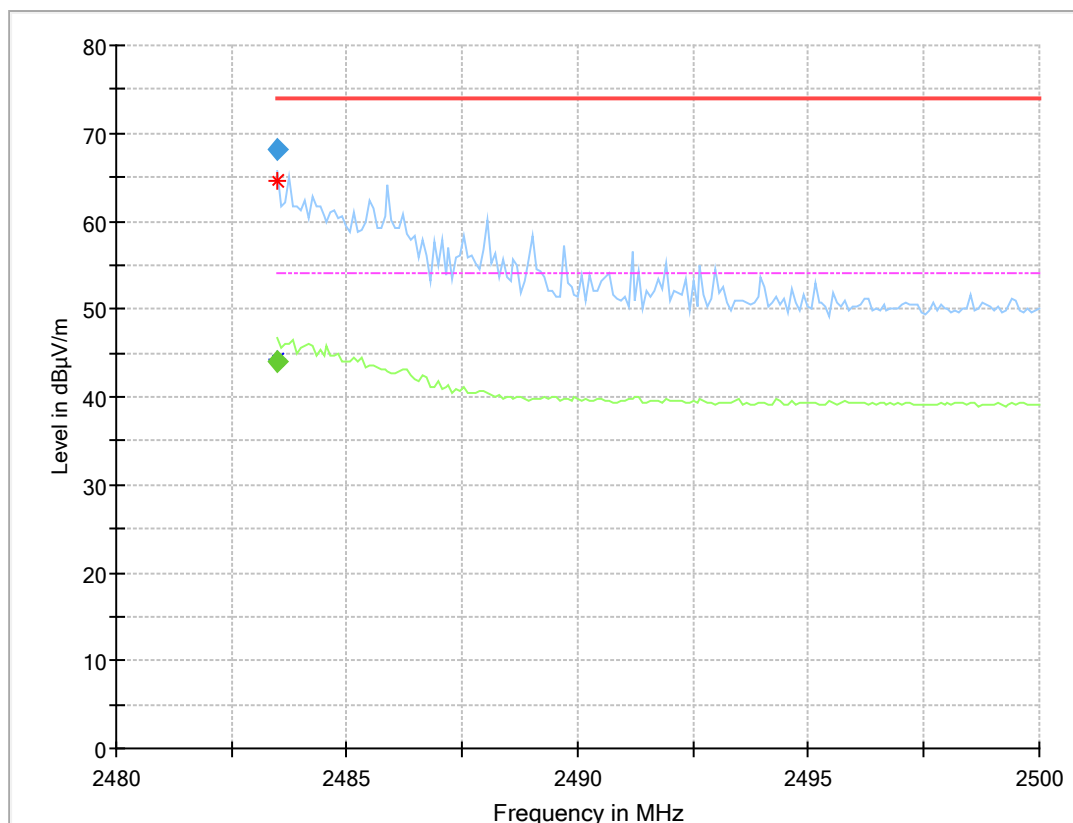

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | CAverage (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Elevation (deg) |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|-----------------|
| 2483.500 | --- | 44.1 | 54.00 | 9.87 | 1000.0 | 1000.000 | 150.0 | H | -41.0 | -12.0 |
| 2483.500 | 68.1 | --- | 74.00 | 5.90 | 1000.0 | 1000.000 | 150.0 | H | -41.0 | 0.0 |

5.7.5 TEST EQUIPMENT USED

- Radiated Emissions

5.8 POWER DENSITY

Standard **FCC Part 15 Subpart C**

The test was performed according to:
ANSI C63.10

5.8.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up in a shielded room to perform the Power Density measurements.

The results recorded were measured with the modulation which produces the worst-case (highest) power density.

The EUT was connected to the spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Resolution Bandwidth (RBW): 3 kHz
- Video Bandwidth (VBW): 30 kHz
- Trace: Maxhold
- Sweeps: 2000
- Sweep time: 5 ms
- Detector: Peak

5.8.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.247 (e)

For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

...

The same method of determining the conducted output power shall be used to determine the power spectral density.

FCC Part 15, Subpart C, §15.247 (f)

(f) For the purposes of this section, hybrid systems are those that employ a combination of both frequency hopping and digital modulation techniques.

...

The power spectral density conducted from the intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission

5.8.3 TEST PROTOCOL

| | |
|----------------------|----------|
| Ambient temperature: | 24 °C |
| Air Pressure: | 1010 hPa |
| Humidity: | 27 % |

WLAN b-Mode; 20 MHz; 1
Mbit/s

| Band | Channel No. | Frequency [MHz] | Power Density [dBm/100kHz] | Limit [dBm/3kHz] | Margin to Limit [dB] |
|-------------|-------------|-----------------|----------------------------|------------------|----------------------|
| 2.4 GHz ISM | 1 | 2412 | -5.2 | 8.0 | 13.2 |
| | 6 | 2437 | -5.5 | 8.0 | 13.5 |
| | 11 | 2462 | -5.3 | 8.0 | 13.3 |

WLAN g-Mode; 20 MHz; 6
Mbit/s

| Band | Channel No. | Frequency [MHz] | Power Density [dBm/100kHz] | Limit [dBm/3kHz] | Margin to Limit [dB] |
|-------------|-------------|-----------------|----------------------------|------------------|----------------------|
| 2.4 GHz ISM | 1 | 2412 | -10.3 | 8.0 | 18.3 |
| | 6 | 2437 | -10.1 | 8.0 | 18.1 |
| | 11 | 2462 | -10.2 | 8.0 | 18.2 |

WLAN n-Mode; 20 MHz;
MCS0

| Band | Channel No. | Frequency [MHz] | Power Density [dBm/100kHz] | Limit [dBm/3kHz] | Margin to Limit [dB] |
|-------------|-------------|-----------------|----------------------------|------------------|----------------------|
| 2.4 GHz ISM | 1 | 2412 | -10.6 | 8.0 | 18.6 |
| | 6 | 2437 | -10.2 | 8.0 | 18.2 |
| | 11 | 2462 | -10.6 | 8.0 | 18.6 |


Remark: Please see next sub-clause for the measurement plot.

5.8.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = WLAN b, Operating Frequency = low
(S01_aa01_WLAN)

Result

| DUT Frequency (MHz) | Frequency (MHz) | PSD (dBm) | Limit Max (dBm) | Result |
|---------------------|-----------------|-----------|-----------------|--------|
| 2412.000000 | 2411.275000 | -5.152 | 8.0 | PASS |

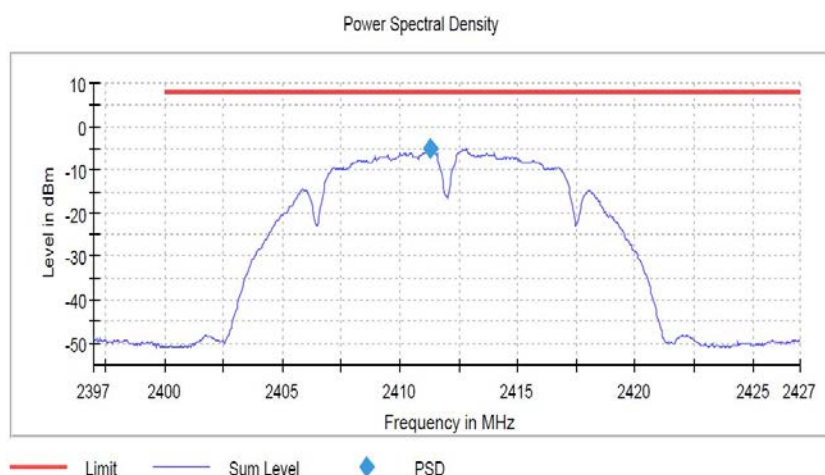

5.8.5 TEST EQUIPMENT USED

- R&S TS8997

6 TEST EQUIPMENT

1 R&S TS8997
EN300328/301893 Test Lab

| Ref. No. | Device Name | Description | Manufacturer | Serial Number | Last Calibration | Calibration Due |
|----------|-----------------------------|--|--|----------------|------------------|-----------------|
| 1.1 | SMB100A | Signal Generator 9 kHz - 6 GHz | Rohde & Schwarz | 107695 | 2017-07 | 2020-07 |
| 1.2 | FSV30 | Signal Analyzer 10 Hz - 30 GHz | Rohde & Schwarz | 103005 | 2018-04 | 2020-04 |
| 1.3 | Fluke 177 | Digital Multimeter 03 (Multimeter) | Fluke Europe B.V. | 86670383 | 2020-04 | 2022-04 |
| 1.4 | Temperature Chamber VT 4002 | Temperature Chamber Vötsch 03 | Vötsch | 58566002150010 | 2018-04 | 2020-04 |
| 1.5 | A8455-4 | 4 Way Power Divider (SMA) | | - | | |
| 1.6 | Opus10 THI (8152.00) | T/H Logger 03 | Lufft Mess- und Regeltechnik GmbH | 7482 | 2019-06 | 2021-06 |
| 1.7 | UNI-T UT195E | True RMS Digital Multimeter | UNI-T UNI-TREND TECHNOLOGY (CHINA) CO., LTD. | C190729561 | | |
| 1.8 | SMBV100A | Vector Signal Generator 9 kHz - 6 GHz | Rohde & Schwarz | 259291 | 2019-11 | 2022-11 |
| 1.9 | OSP120 | Switching Unit with integrated power meter | Rohde & Schwarz | 101158 | 2018-05 | 2021-05 |
| 1.10 | Temperature Chamber VT 4002 | Temperature Chamber Vötsch 05 | Vötsch | 58566080550010 | 2018-04 | 2020-04 |

2 Radiated Emissions
Lab to perform radiated emission tests

| Ref. No. | Device Name | Description | Manufacturer | Serial Number | Last Calibration | Calibration Due |
|----------|----------------------|--------------------------------------|------------------------------------|---------------|------------------|-----------------|
| 2.1 | MFS | Rubidium Frequency Normal MFS | Datum GmbH | 002 | 2019-10 | 2020-10 |
| 2.2 | N5000/NP | Filter for EUT, 2 Lines, 250 V, 16 A | ETS-LINDGREN | 241515 | | |
| 2.3 | Opus10 TPR (8253.00) | T/P Logger 13 | Lufft Mess- und Regeltechnik GmbH | 13936 | 2019-05 | 2021-05 |
| 2.4 | ESW44 | EMI Receiver / Spectrum Analyzer | Rohde & Schwarz GmbH & Co. KG | 101603 | 2019-12 | 2021-12 |
| 2.5 | Anechoic Chamber 01 | SAC/FAR, 10.58 m x 6.38 m x 6.00 m | Frankonia | none | 2018-06 | 2020-06 |
| 2.6 | FS-Z60 | Harmonic Mixer 40 - 60 GHz | Rohde & Schwarz Messgerätebau GmbH | 100178 | | |

| Ref. No. | Device Name | Description | Manufacturer | Serial Number | Last Calibration | Calibration Due |
|----------|-------------------------|--|------------------------------------|--------------------|------------------|-----------------|
| 2.7 | FS-Z220 | Harmonic Mixer 140 - 220 GHz | Rohde & Schwarz Messgerätebau GmbH | 101005 | 2020-03 | 2023-03 |
| 2.8 | SGH-05 | Standard Gain / Pyramidal Horn Antenna (140 - 220 GHz) | RPG-Radiometer Physics GmbH | 075 | | |
| 2.9 | HL 562 ULTRALOG | Biconical-log-per antenna (30 MHz - 3 GHz) with HL 562E biconicals | Rohde & Schwarz GmbH & Co. KG | 830547/003 | 2018-07 | 2021-07 |
| 2.10 | AMF-7D00101800-30-10P-R | Broadband Amplifier 100 MHz - 18 GHz | Miteq | | | |
| 2.11 | 5HC2700/12750-1.5-KK | High Pass Filter | Trilithic | 9942012 | | |
| 2.12 | ASP 1.2/1.8-10 kg | Antenna Mast | Maturo GmbH | - | | |
| 2.13 | Anechoic Chamber 03 | FAR, 8.80m x 4.60m x 4.05m (l x w x h) | Albatross Projects | P26971-647-001-PRB | 2018-06 | 2020-06 |
| 2.14 | SMBV100A | Vector Signal Generator 9 kHz - 3.2 GHz (GNSS / Broadcast Signalling Unit) | Rohde & Schwarz GmbH & Co. KG | 260001 | 2018-01 | 2021-01 |
| 2.15 | Fluke 177 | Digital Multimeter 03 (Multimeter) | Fluke Europe B.V. | 86670383 | 2020-04 | 2022-04 |
| 2.16 | WRD1920/1980-5/22-5EESD | Tunable Band Reject Filter | Wainwright Instruments GmbH | 11 | | |
| 2.17 | TDS 784C | Digital Oscilloscope [SA2] (Aux) | Tektronix | B021311 | | |
| 2.18 | foRS232 Unit 2 | Fibre optic link RS232 | PONTIS Messtechnik GmbH | 4031516037 | | |
| 2.19 | PONTIS Con4101 | PONTIS Camera Controller | | 6061510370 | | |
| 2.20 | NRVD | Power Meter | Rohde & Schwarz GmbH & Co. KG | 828110/016 | 2019-08 | 2020-08 |
| 2.21 | OLS-1 R | Fibre optic link USB 1.1 | Ingenieurbüro Scheiba | 018 | | |
| 2.22 | HF 906 | Double-ridged horn | Rohde & Schwarz | 357357/002 | 2018-09 | 2021-09 |
| 2.23 | JS4-18002600-32-5P | Broadband Amplifier 18 GHz - 26 GHz | Miteq | 849785 | | |
| 2.24 | FSW 43 | Spectrum Analyzer | Rohde & Schwarz | 103779 | 2019-02 | 2021-02 |
| 2.25 | 3160-09 | Standard Gain / Pyramidal Horn Antenna 26.5 GHz | EMCO Elektronik GmbH | 00083069 | | |

| Ref. No. | Device Name | Description | Manufacturer | Serial Number | Last Calibration | Calibration Due |
|----------|------------------------|---|------------------------------------|---------------|------------------|-----------------|
| 2.26 | foRS232 Unit 1 | Fibre optic link RS232 | PONTIS Messtechnik GmbH | 4021516036 | | |
| 2.27 | FSP3 | Spectrum Analyzer | Rohde & Schwarz GmbH & Co. KG | 836722/011 | | |
| 2.28 | SGH-19 | Standard Gain / Pyramidal Horn Antenna (40 - 60 GHz) | RPG-Radiometer Physics GmbH | 093 | | |
| 2.29 | WHKX 7.0/18G-8SS | High Pass Filter | Wainwright Instruments GmbH | 09 | | |
| 2.30 | DS 420S | Turn Table 2 m diameter | HD GmbH | 420/573/99 | | |
| 2.31 | 4HC1600/12750-1.5-KK | High Pass Filter | Trilithic | 9942011 | | |
| 2.32 | foUSB-M Converter 2 | Fibre optic link USB 2.0 | PONTIS Messtechnik GmbH | 4471520061 | | |
| 2.33 | WRCD1879.8-0.2/40-10EE | Notch Filter Ultra Stable | Wainwright Instruments GmbH | 16 | | |
| 2.34 | SMB100A | Signal Generator 100 kHz - 40 GHz | Rohde & Schwarz Vertriebs-GmbH | 181486 | 2019-11 | 2021-11 |
| 2.35 | JS4-00102600-42-5A | Broadband Amplifier 30 MHz - 26 GHz | Miteq | 619368 | | |
| 2.36 | TT 1.5 WI | Turn Table | Maturo GmbH | - | | |
| 2.37 | HL 562 ULTRALOG | Biconical-log-per Antenna (30 MHz - 3 GHz) | Rohde & Schwarz GmbH & Co. KG | 100609 | 2019-05 | 2022-05 |
| 2.38 | HF 906 | Double-ridged horn | Rohde & Schwarz | 357357/001 | 2018-03 | 2021-03 |
| 2.39 | foCAN (v 4.0) | Fibre optic link CAN | Audivo GmbH (PONTIS EMC) | 492 1607 014 | | |
| 2.40 | FS-Z325 | Harmonic Mixer 220 - 325 GHz | Rohde & Schwarz Messgerätebau GmbH | 101006 | | |
| 2.41 | CMW500 | CMW500 Callbox OIL-RE, SUW | Rohde & Schwarz GmbH & Co. KG | 155999-Ei | 2019-09 | 2022-09 |
| 2.42 | CMU 200 | "CMU1" Universal Radio Communication Tester | Rohde & Schwarz GmbH & Co. KG | 102366 | 2017-12 | 2020-12 |
| 2.43 | 3160-10 | Standard Gain / Pyramidal Horn Antenna 40 GHz | EMCO Elektronik GmbH | 00086675 | | |
| 2.44 | MA4985-XP-ET | Bore Sight Antenna Mast | innco systems GmbH | none | | |
| 2.45 | SGH-08 | Standard Gain / Pyramidal Horn Antenna (90 - 140 GHz) | RPG-Radiometer Physics GmbH | 064 | | |
| 2.46 | CBT | Bluetooth Tester "CBT-02" incl. BLE-Option | Rohde & Schwarz | 100302 | 2018-03 | 2021-03 |

| Ref. No. | Device Name | Description | Manufacturer | Serial Number | Last Calibration | Calibration Due |
|----------|----------------------|--|--|------------------------|------------------|-----------------|
| 2.47 | CMW500 | CMW500 Callbox OIL-RE, SUW | Rohde & Schwarz GmbH & Co. KG | 163529-bw | 2017-07 | 2020-07 |
| 2.48 | A8455-4 | 4 Way Power Divider (SMA) | | - | | |
| 2.49 | SGH-12 | Standard Gain / Pyramidal HornAntenna (60 - 90 GHz) | RPG-Radiometer Physics GmbH | 326 | | |
| 2.50 | JUN-AIR Mod. 6-15 | Air Compressor | JUN-AIR Deutschland GmbH | 612582 | | |
| 2.51 | foEthernet_M | Fibre optic link Ethernet / Gb-LAN | PONTIS Messtechnik GmbH | 4841516023 | | |
| 2.52 | 5HC3500/18000-1.2-KK | High Pass Filter | Trilithic | 200035008 | | |
| 2.53 | FS-Z140 | Harmonic Mixer 90 -140 GHz | Rohde & Schwarz Messgerätebau GmbH | 101007 | 2020-03 | 2023-03 |
| 2.54 | OLS-1 M | Fibre optic link USB 1.1 | Ingenieurbüro Scheiba | 018 | | |
| 2.55 | HFH2-Z2 | Loop Antenna | Rohde & Schwarz | 829324/006 | 2018-01 | 2021-01 |
| 2.56 | Voltcraft M-3860M | Digital Multimeter 01 (Multimeter) | Conrad | IJ096055 | | |
| 2.57 | CMW 500 | callbox, 2G, 3G, LTE, WLAN, BT, Audio | Rohde & Schwarz GmbH & Co. KG | 149268-Qf | 2018-04 | 2021-04 |
| 2.58 | Opus10 THI (8152.00) | T/H Logger 12 | Lufft Mess- und Regeltechnik GmbH | 12482 | 2019-06 | 2021-06 |
| 2.59 | ESR 7 | EMI Receiver / Spectrum Analyzer | Rohde & Schwarz | 101424 | 2019-01 | 2021-01 |
| 2.60 | UNI-T UT195E | True RMS Digital Multimeter | UNI-T UNI-TREND TECHNOLOGY (CHINA) CO., LTD. | C190729561 | | |
| 2.61 | foEthernet_M | Fibre optic link Ethernet / Gb-LAN | PONTIS Messtechnik GmbH | 4841516022 | | |
| 2.62 | JS4-00101800-35-5P | Broadband Amplifier 30 MHz - 18 GHz | Miteq | 896037 | | |
| 2.63 | AS 620 P | Antenna Mast (pneumatic polarisation) | HD GmbH | 620/37 | | |
| 2.64 | 6005D (30 V / 5 A) | Laboratory Power Supply 120 V 60 Hz | Peaktech | 81062045 | | |
| 2.65 | TD1.5-10kg | EUT Tilt Device (Rohacell) | Maturo GmbH | TD1.5-10kg/024/3790709 | | |
| 2.66 | SGH-03 | Standard Gain / Pyramidal Horn Antenna (220 - 325 GHz) | RPG-Radiometer Physics GmbH | 060 | | |
| 2.67 | FS-Z90 | Harmonic Mixer 60 - 90 GHz | Rohde & Schwarz Messgerätebau GmbH | 101686 | | |

| Ref. No. | Device Name | Description | Manufacturer | Serial Number | Last Calibration | Calibration Due |
|----------|-------------------------|---------------------------------------|---------------------------------------|-----------------------|------------------|-----------------|
| 2.68 | Innco Systems CO3000 | Controller for bore sight mast SAC | innco systems GmbH | CO3000/967/39371016/L | | |
| 2.69 | NRV-Z1 | Sensor Head B | Rohde & Schwarz GmbH & Co. KG | 827753/006 | 2019-08 | 2020-08 |
| 2.70 | HF 907-2 | Double-ridged horn | Rohde & Schwarz | 102817 | 2019-04 | 2022-04 |
| 2.71 | foCAN (v 4.0) | Fibre optic link CAN | Audivo GmbH (PONTIS EMC) | 492 1607 013 | | |
| 2.72 | PAS 2.5 - 10 kg | Antenna Mast | Maturo GmbH | - | | |
| 2.73 | AFS42-00101800-25-S-42 | Broadband Amplifier 25 MHz - 18 GHz | Miteq | 2035324 | | |
| 2.74 | WRCA800/960-0.2/40-6EEK | Tunable Notch Filter | Mainwright Instruments GmbH | 20 | | |
| 2.75 | AM 4.0 | Antenna Mast 4 m | Maturo GmbH | AM4.0/180/11920513 | | |
| 2.76 | HF 907 | Double-ridged horn | Rohde & Schwarz | 102444 | 2018-07 | 2021-07 |
| 2.77 | E4408B | Spectrum Analyser (9 kHz to 26.5 GHz) | Agilent Technologies Deutschland GmbH | MY45103714 | | |

The calibration interval is the time interval between "Last Calibration" and "Calibration Due"

7 ANTENNA FACTORS, CABLE LOSS AND SAMPLE CALCULATIONS

This chapter contains the antenna factors with their corresponding path loss of the used measurement path for all antennas as well as the insertion loss of the LISN.

7.1 LISN R&S ESH3-Z5 (150 KHZ – 30 MHZ)

| Frequency MHz | Corr. dB | LISN insertion loss ESH3- Z5 dB | cable loss (incl. 10 dB atten- uator) dB |
|------------------|-------------|--|--|
| 0.15 | 10.1 | 0.1 | 10.0 |
| 5 | 10.3 | 0.1 | 10.2 |
| 7 | 10.5 | 0.2 | 10.3 |
| 10 | 10.5 | 0.2 | 10.3 |
| 12 | 10.7 | 0.3 | 10.4 |
| 14 | 10.7 | 0.3 | 10.4 |
| 16 | 10.8 | 0.4 | 10.4 |
| 18 | 10.9 | 0.4 | 10.5 |
| 20 | 10.9 | 0.4 | 10.5 |
| 22 | 11.1 | 0.5 | 10.6 |
| 24 | 11.1 | 0.5 | 10.6 |
| 26 | 11.2 | 0.5 | 10.7 |
| 28 | 11.2 | 0.5 | 10.7 |
| 30 | 11.3 | 0.5 | 10.8 |

Sample calculation

$$U_{\text{LISN}} (\text{dB } \mu\text{V}) = U (\text{dB } \mu\text{V}) + \text{Corr. (dB)}$$

U = Receiver reading

LISN Insertion loss = Voltage Division Factor of LISN

Corr. = sum of single correction factors of used LISN, cables, switch units (if used)

Linear interpolation will be used for frequencies in between the values in the table.

7.2 ANTENNA R&S HFH2-Z2 (9 KHZ – 30 MHZ)

| Frequency MHz | AF HFH-Z2) dB (1/m) | Corr. dB | cable loss 1 (inside chamber) dB | cable loss 2 (outside chamber) dB | cable loss 3 (switch unit) dB | cable loss 4 (to receiver) dB | distance corr. (-40 dB/ decade) dB | d _{Limit} (meas. distance (limit) m | d _{used} (meas. distance (used) m |
|------------------|---------------------------|-------------|--|---|---|---|--|--|--|
| 0.009 | 20.50 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.01 | 20.45 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.015 | 20.37 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.02 | 20.36 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.025 | 20.38 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.03 | 20.32 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.05 | 20.35 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.08 | 20.30 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.1 | 20.20 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.2 | 20.17 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.3 | 20.14 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.49 | 20.12 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.490001 | 20.12 | -39.6 | 0.1 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 0.5 | 20.11 | -39.6 | 0.1 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 0.8 | 20.10 | -39.6 | 0.1 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 1 | 20.09 | -39.6 | 0.1 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 2 | 20.08 | -39.6 | 0.1 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 3 | 20.06 | -39.6 | 0.1 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 4 | 20.05 | -39.5 | 0.2 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 5 | 20.05 | -39.5 | 0.2 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 6 | 20.02 | -39.5 | 0.2 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 8 | 19.95 | -39.5 | 0.2 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 10 | 19.83 | -39.4 | 0.2 | 0.1 | 0.2 | 0.1 | -40 | 30 | 3 |
| 12 | 19.71 | -39.4 | 0.2 | 0.1 | 0.2 | 0.1 | -40 | 30 | 3 |
| 14 | 19.54 | -39.4 | 0.2 | 0.1 | 0.2 | 0.1 | -40 | 30 | 3 |
| 16 | 19.53 | -39.3 | 0.3 | 0.1 | 0.2 | 0.1 | -40 | 30 | 3 |
| 18 | 19.50 | -39.3 | 0.3 | 0.1 | 0.2 | 0.1 | -40 | 30 | 3 |
| 20 | 19.57 | -39.3 | 0.3 | 0.1 | 0.2 | 0.1 | -40 | 30 | 3 |
| 22 | 19.61 | -39.3 | 0.3 | 0.1 | 0.2 | 0.1 | -40 | 30 | 3 |
| 24 | 19.61 | -39.3 | 0.3 | 0.1 | 0.2 | 0.1 | -40 | 30 | 3 |
| 26 | 19.54 | -39.3 | 0.3 | 0.1 | 0.2 | 0.1 | -40 | 30 | 3 |
| 28 | 19.46 | -39.2 | 0.3 | 0.1 | 0.3 | 0.1 | -40 | 30 | 3 |
| 30 | 19.73 | -39.1 | 0.4 | 0.1 | 0.3 | 0.1 | -40 | 30 | 3 |

Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

distance correction = $-40 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values

7.3 ANTENNA R&S HL562 (30 MHz – 1 GHz)

($d_{\text{Limit}} = 3 \text{ m}$)

| Frequency | AF R&S HL562 | Corr. |
|-----------|--------------------|-------|
| MHz | dB (1/m) | dB |
| 30 | 18.6 | 0.6 |
| 50 | 6.0 | 0.9 |
| 100 | 9.7 | 1.2 |
| 150 | 7.9 | 1.6 |
| 200 | 7.6 | 1.9 |
| 250 | 9.5 | 2.1 |
| 300 | 11.0 | 2.3 |
| 350 | 12.4 | 2.6 |
| 400 | 13.6 | 2.9 |
| 450 | 14.7 | 3.1 |
| 500 | 15.6 | 3.2 |
| 550 | 16.3 | 3.5 |
| 600 | 17.2 | 3.5 |
| 650 | 18.1 | 3.6 |
| 700 | 18.5 | 3.6 |
| 750 | 19.1 | 4.1 |
| 800 | 19.6 | 4.1 |
| 850 | 20.1 | 4.4 |
| 900 | 20.8 | 4.7 |
| 950 | 21.1 | 4.8 |
| 1000 | 21.6 | 4.9 |

| cable loss 1 (inside chamber) | cable loss 2 (outside chamber) | cable loss 3 (switch unit) | cable loss 4 (to receiver) | distance corr. (-20 dB/ decade) | d_{Limit} (meas. distance (limit)) | d_{used} (meas. distance (used)) |
|--|---|-------------------------------------|-------------------------------------|--|--|--|
| dB | dB | dB | dB | dB | m | m |
| 0.29 | 0.04 | 0.23 | 0.02 | 0.0 | 3 | 3 |
| 0.39 | 0.09 | 0.32 | 0.08 | 0.0 | 3 | 3 |
| 0.56 | 0.14 | 0.47 | 0.08 | 0.0 | 3 | 3 |
| 0.73 | 0.20 | 0.59 | 0.12 | 0.0 | 3 | 3 |
| 0.84 | 0.21 | 0.70 | 0.11 | 0.0 | 3 | 3 |
| 0.98 | 0.24 | 0.80 | 0.13 | 0.0 | 3 | 3 |
| 1.04 | 0.26 | 0.89 | 0.15 | 0.0 | 3 | 3 |
| 1.18 | 0.31 | 0.96 | 0.13 | 0.0 | 3 | 3 |
| 1.28 | 0.35 | 1.03 | 0.19 | 0.0 | 3 | 3 |
| 1.39 | 0.38 | 1.11 | 0.22 | 0.0 | 3 | 3 |
| 1.44 | 0.39 | 1.20 | 0.19 | 0.0 | 3 | 3 |
| 1.55 | 0.46 | 1.24 | 0.23 | 0.0 | 3 | 3 |
| 1.59 | 0.43 | 1.29 | 0.23 | 0.0 | 3 | 3 |
| 1.67 | 0.34 | 1.35 | 0.22 | 0.0 | 3 | 3 |
| 1.67 | 0.42 | 1.41 | 0.15 | 0.0 | 3 | 3 |
| 1.87 | 0.54 | 1.46 | 0.25 | 0.0 | 3 | 3 |
| 1.90 | 0.46 | 1.51 | 0.25 | 0.0 | 3 | 3 |
| 1.99 | 0.60 | 1.56 | 0.27 | 0.0 | 3 | 3 |
| 2.14 | 0.60 | 1.63 | 0.29 | 0.0 | 3 | 3 |
| 2.22 | 0.60 | 1.66 | 0.33 | 0.0 | 3 | 3 |
| 2.23 | 0.61 | 1.71 | 0.30 | 0.0 | 3 | 3 |

($d_{\text{Limit}} = 10 \text{ m}$)

| | | |
|------|------|------|
| 30 | 18.6 | -9.9 |
| 50 | 6.0 | -9.6 |
| 100 | 9.7 | -9.2 |
| 150 | 7.9 | -8.8 |
| 200 | 7.6 | -8.6 |
| 250 | 9.5 | -8.3 |
| 300 | 11.0 | -8.1 |
| 350 | 12.4 | -7.9 |
| 400 | 13.6 | -7.6 |
| 450 | 14.7 | -7.4 |
| 500 | 15.6 | -7.2 |
| 550 | 16.3 | -7.0 |
| 600 | 17.2 | -6.9 |
| 650 | 18.1 | -6.9 |
| 700 | 18.5 | -6.8 |
| 750 | 19.1 | -6.3 |
| 800 | 19.6 | -6.3 |
| 850 | 20.1 | -6.0 |
| 900 | 20.8 | -5.8 |
| 950 | 21.1 | -5.6 |
| 1000 | 21.6 | -5.6 |

| | | | | | | |
|------|------|------|------|-------|----|---|
| 0.29 | 0.04 | 0.23 | 0.02 | -10.5 | 10 | 3 |
| 0.39 | 0.09 | 0.32 | 0.08 | -10.5 | 10 | 3 |
| 0.56 | 0.14 | 0.47 | 0.08 | -10.5 | 10 | 3 |
| 0.73 | 0.20 | 0.59 | 0.12 | -10.5 | 10 | 3 |
| 0.84 | 0.21 | 0.70 | 0.11 | -10.5 | 10 | 3 |
| 0.98 | 0.24 | 0.80 | 0.13 | -10.5 | 10 | 3 |
| 1.04 | 0.26 | 0.89 | 0.15 | -10.5 | 10 | 3 |
| 1.18 | 0.31 | 0.96 | 0.13 | -10.5 | 10 | 3 |
| 1.28 | 0.35 | 1.03 | 0.19 | -10.5 | 10 | 3 |
| 1.39 | 0.38 | 1.11 | 0.22 | -10.5 | 10 | 3 |
| 1.44 | 0.39 | 1.20 | 0.19 | -10.5 | 10 | 3 |
| 1.55 | 0.46 | 1.24 | 0.23 | -10.5 | 10 | 3 |
| 1.59 | 0.43 | 1.29 | 0.23 | -10.5 | 10 | 3 |
| 1.67 | 0.34 | 1.35 | 0.22 | -10.5 | 10 | 3 |
| 1.67 | 0.42 | 1.41 | 0.15 | -10.5 | 10 | 3 |
| 1.87 | 0.54 | 1.46 | 0.25 | -10.5 | 10 | 3 |
| 1.90 | 0.46 | 1.51 | 0.25 | -10.5 | 10 | 3 |
| 1.99 | 0.60 | 1.56 | 0.27 | -10.5 | 10 | 3 |
| 2.14 | 0.60 | 1.63 | 0.29 | -10.5 | 10 | 3 |
| 2.22 | 0.60 | 1.66 | 0.33 | -10.5 | 10 | 3 |
| 2.23 | 0.61 | 1.71 | 0.30 | -10.5 | 10 | 3 |

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + \text{AF (dB 1/m)} + \text{Corr. (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

distance correction = $-20 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$

Linear interpolation will be used for frequencies in between the values in the table.

Tables show an extract of values.

7.4 ANTENNA R&S HF907 (1 GHZ – 18 GHZ)

| Frequency | AF R&S HF907 | Corr. |
|-----------|--------------------|-------|
| MHz | dB (1/m) | dB |
| 1000 | 24.4 | -19.4 |
| 2000 | 28.5 | -17.4 |
| 3000 | 31.0 | -16.1 |
| 4000 | 33.1 | -14.7 |
| 5000 | 34.4 | -13.7 |
| 6000 | 34.7 | -12.7 |
| 7000 | 35.6 | -11.0 |

| cable loss 1 (relay + cable inside chamber) | cable loss 2 (outside chamber) | cable loss 3 (switch unit, atten- uator & pre-amp) | cable loss 4 (to receiver) | | |
|--|---|--|----------------------------------|--|--|
| dB | dB | dB | dB | | |
| 0.99 | 0.31 | -21.51 | 0.79 | | |
| 1.44 | 0.44 | -20.63 | 1.38 | | |
| 1.87 | 0.53 | -19.85 | 1.33 | | |
| 2.41 | 0.67 | -19.13 | 1.31 | | |
| 2.78 | 0.86 | -18.71 | 1.40 | | |
| 2.74 | 0.90 | -17.83 | 1.47 | | |
| 2.82 | 0.86 | -16.19 | 1.46 | | |

| Frequency | AF R&S HF907 | Corr. |
|-----------|--------------------|-------|
| MHz | dB (1/m) | dB |
| 3000 | 31.0 | -23.4 |
| 4000 | 33.1 | -23.3 |
| 5000 | 34.4 | -21.7 |
| 6000 | 34.7 | -21.2 |
| 7000 | 35.6 | -19.8 |

| cable loss 1 (relay inside chamber) | cable loss 2 (inside chamber) | cable loss 3 (outside chamber) | cable loss 4 (switch unit, atten- uator & pre-amp) | cable loss 5 (to receiver) | used for FCC 15.247 |
|---|--|---|--|----------------------------------|------------------------------|
| dB | dB | dB | dB | dB | |
| 0.47 | 1.87 | 0.53 | -27.58 | 1.33 | |
| 0.56 | 2.41 | 0.67 | -28.23 | 1.31 | |
| 0.61 | 2.78 | 0.86 | -27.35 | 1.40 | |
| 0.58 | 2.74 | 0.90 | -26.89 | 1.47 | |
| 0.66 | 2.82 | 0.86 | -25.58 | 1.46 | |

| Frequency | AF R&S HF907 | Corr. |
|-----------|--------------------|-------|
| MHz | dB (1/m) | dB |
| 7000 | 35.6 | -57.3 |
| 8000 | 36.3 | -56.3 |
| 9000 | 37.1 | -55.3 |
| 10000 | 37.5 | -56.2 |
| 11000 | 37.5 | -55.3 |
| 12000 | 37.6 | -53.7 |
| 13000 | 38.2 | -53.5 |
| 14000 | 39.9 | -56.3 |
| 15000 | 40.9 | -54.1 |
| 16000 | 41.3 | -54.1 |
| 17000 | 42.8 | -54.4 |
| 18000 | 44.2 | -54.7 |

| cable loss 1 (relay inside chamber) | cable loss 2 (High Pass) | cable loss 3 (pre- amp) | cable loss 4 (inside chamber) | cable loss 5 (outside chamber) | cable loss 6 (to receiver) |
|---|-----------------------------------|----------------------------------|--|---|-------------------------------------|
| dB | dB | dB | dB | dB | dB |
| 0.56 | 1.28 | -62.72 | 2.66 | 0.94 | 1.46 |
| 0.69 | 0.71 | -61.49 | 2.84 | 1.00 | 1.53 |
| 0.68 | 0.65 | -60.80 | 3.06 | 1.09 | 1.60 |
| 0.70 | 0.54 | -61.91 | 3.28 | 1.20 | 1.67 |
| 0.80 | 0.61 | -61.40 | 3.43 | 1.27 | 1.70 |
| 0.84 | 0.42 | -59.70 | 3.53 | 1.26 | 1.73 |
| 0.83 | 0.44 | -59.81 | 3.75 | 1.32 | 1.83 |
| 0.91 | 0.53 | -63.03 | 3.91 | 1.40 | 1.77 |
| 0.98 | 0.54 | -61.05 | 4.02 | 1.44 | 1.83 |
| 1.23 | 0.49 | -61.51 | 4.17 | 1.51 | 1.85 |
| 1.36 | 0.76 | -62.36 | 4.34 | 1.53 | 2.00 |
| 1.70 | 0.53 | -62.88 | 4.41 | 1.55 | 1.91 |

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Tables show an extract of values.

7.5 ANTENNA EMCO 3160-09 (18 GHZ – 26.5 GHZ)

| Frequency | AF EMCO 3160-09 | Corr. | cable loss 1 (inside chamber) | cable loss 2 (pre- amp) | cable loss 3 (inside chamber) | cable loss 4 (switch unit) | cable loss 5 (to receiver) |
|-----------|-----------------------|-------|--|----------------------------------|--|-------------------------------------|-------------------------------------|
| MHz | dB (1/m) | dB | dB | dB | dB | dB | dB |
| 18000 | 40.2 | -23.5 | 0.72 | -35.85 | 6.20 | 2.81 | 2.65 |
| 18500 | 40.2 | -23.2 | 0.69 | -35.71 | 6.46 | 2.76 | 2.59 |
| 19000 | 40.2 | -22.0 | 0.76 | -35.44 | 6.69 | 3.15 | 2.79 |
| 19500 | 40.3 | -21.3 | 0.74 | -35.07 | 7.04 | 3.11 | 2.91 |
| 20000 | 40.3 | -20.3 | 0.72 | -34.49 | 7.30 | 3.07 | 3.05 |
| 20500 | 40.3 | -19.9 | 0.78 | -34.46 | 7.48 | 3.12 | 3.15 |
| 21000 | 40.3 | -19.1 | 0.87 | -34.07 | 7.61 | 3.20 | 3.33 |
| 21500 | 40.3 | -19.1 | 0.90 | -33.96 | 7.47 | 3.28 | 3.19 |
| 22000 | 40.3 | -18.7 | 0.89 | -33.57 | 7.34 | 3.35 | 3.28 |
| 22500 | 40.4 | -19.0 | 0.87 | -33.66 | 7.06 | 3.75 | 2.94 |
| 23000 | 40.4 | -19.5 | 0.88 | -33.75 | 6.92 | 3.77 | 2.70 |
| 23500 | 40.4 | -19.3 | 0.90 | -33.35 | 6.99 | 3.52 | 2.66 |
| 24000 | 40.4 | -19.8 | 0.88 | -33.99 | 6.88 | 3.88 | 2.58 |
| 24500 | 40.4 | -19.5 | 0.91 | -33.89 | 7.01 | 3.93 | 2.51 |
| 25000 | 40.4 | -19.3 | 0.88 | -33.00 | 6.72 | 3.96 | 2.14 |
| 25500 | 40.5 | -20.4 | 0.89 | -34.07 | 6.90 | 3.66 | 2.22 |
| 26000 | 40.5 | -21.3 | 0.86 | -35.11 | 7.02 | 3.69 | 2.28 |
| 26500 | 40.5 | -21.1 | 0.90 | -35.20 | 7.15 | 3.91 | 2.36 |

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values.

7.6 ANTENNA EMCO 3160-10 (26.5 GHZ – 40 GHZ)

| Frequency | AF EMCO 3160-10 | Corr. | cable loss 1 (inside chamber) | cable loss 2 (outside chamber) | cable loss 3 (switch unit) | cable loss 4 (to receiver) | distance corr. (-20 dB/ decade) | d _{Limit} (meas. distance (limit)) | d _{used} (meas. distance (used)) |
|-----------|-----------------------|-------|--|---|-------------------------------------|-------------------------------------|--|--|--|
| GHz | dB (1/m) | dB | dB | dB | dB | dB | dB | m | m |
| 26.5 | 43.4 | -11.2 | 4.4 | | | | -9.5 | 3 | 1.0 |
| 27.0 | 43.4 | -11.2 | 4.4 | | | | -9.5 | 3 | 1.0 |
| 28.0 | 43.4 | -11.1 | 4.5 | | | | -9.5 | 3 | 1.0 |
| 29.0 | 43.5 | -11.0 | 4.6 | | | | -9.5 | 3 | 1.0 |
| 30.0 | 43.5 | -10.9 | 4.7 | | | | -9.5 | 3 | 1.0 |
| 31.0 | 43.5 | -10.8 | 4.7 | | | | -9.5 | 3 | 1.0 |
| 32.0 | 43.5 | -10.7 | 4.8 | | | | -9.5 | 3 | 1.0 |
| 33.0 | 43.6 | -10.7 | 4.9 | | | | -9.5 | 3 | 1.0 |
| 34.0 | 43.6 | -10.6 | 5.0 | | | | -9.5 | 3 | 1.0 |
| 35.0 | 43.6 | -10.5 | 5.1 | | | | -9.5 | 3 | 1.0 |
| 36.0 | 43.6 | -10.4 | 5.1 | | | | -9.5 | 3 | 1.0 |
| 37.0 | 43.7 | -10.3 | 5.2 | | | | -9.5 | 3 | 1.0 |
| 38.0 | 43.7 | -10.2 | 5.3 | | | | -9.5 | 3 | 1.0 |
| 39.0 | 43.7 | -10.2 | 5.4 | | | | -9.5 | 3 | 1.0 |
| 40.0 | 43.8 | -10.1 | 5.5 | | | | -9.5 | 3 | 1.0 |

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)


Linear interpolation will be used for frequencies in between the values in the table.

distance correction = $-20 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$

Linear interpolation will be used for frequencies in between the values in the table.


Table shows an extract of values.

8 SETUP DRAWINGS

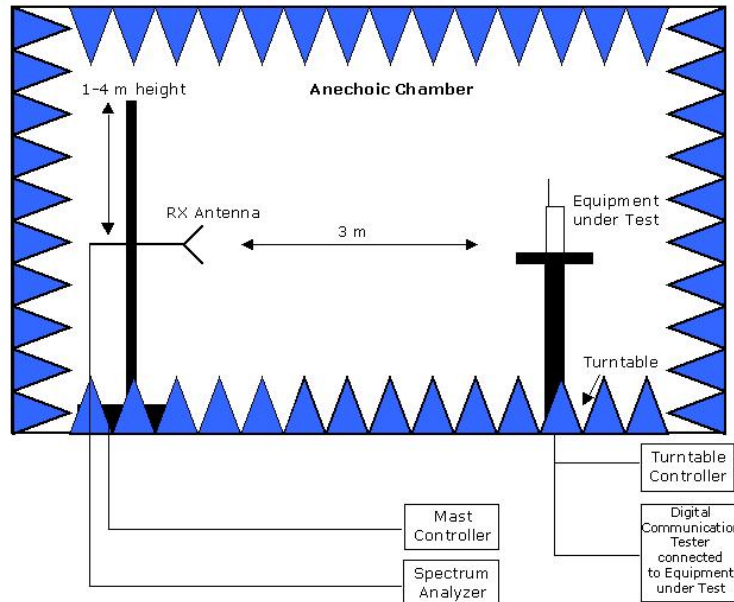

Remark: Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.

Drawing 1: Setup in the Anechoic chamber. For measurements below 1 GHz the ground was replaced by a conducting ground plane.

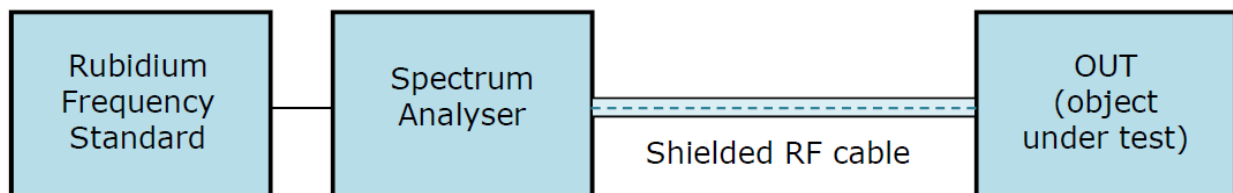


Drawing 2: Setup for conducted radio tests.

9 MEASUREMENT UNCERTAINTIES

| Test Case | Parameter | Uncertainty |
|--------------------------------------|--------------------|--------------------------------|
| AC Power Line | Power | ± 3.4 dB |
| Field Strength of spurious radiation | Power | ± 5.5 dB |
| 6 dB / 26 dB / 99% Bandwidth | Power Frequency | ± 2.9 dB ± 11.2 kHz |
| Conducted Output Power | Power | ± 2.2 dB |
| Band Edge Compliance | Power Frequency | ± 2.2 dB ± 11.2 kHz |
| Frequency Stability | Frequency | ± 25 Hz |
| Power Spectral Density | Power | ± 2.2 dB |

The measurement uncertainties for all parameters are calculated with an expansion factor (coverage factor) $k = 1.96$. This means, that the true value is in the corresponding interval with a probability of 95 %.

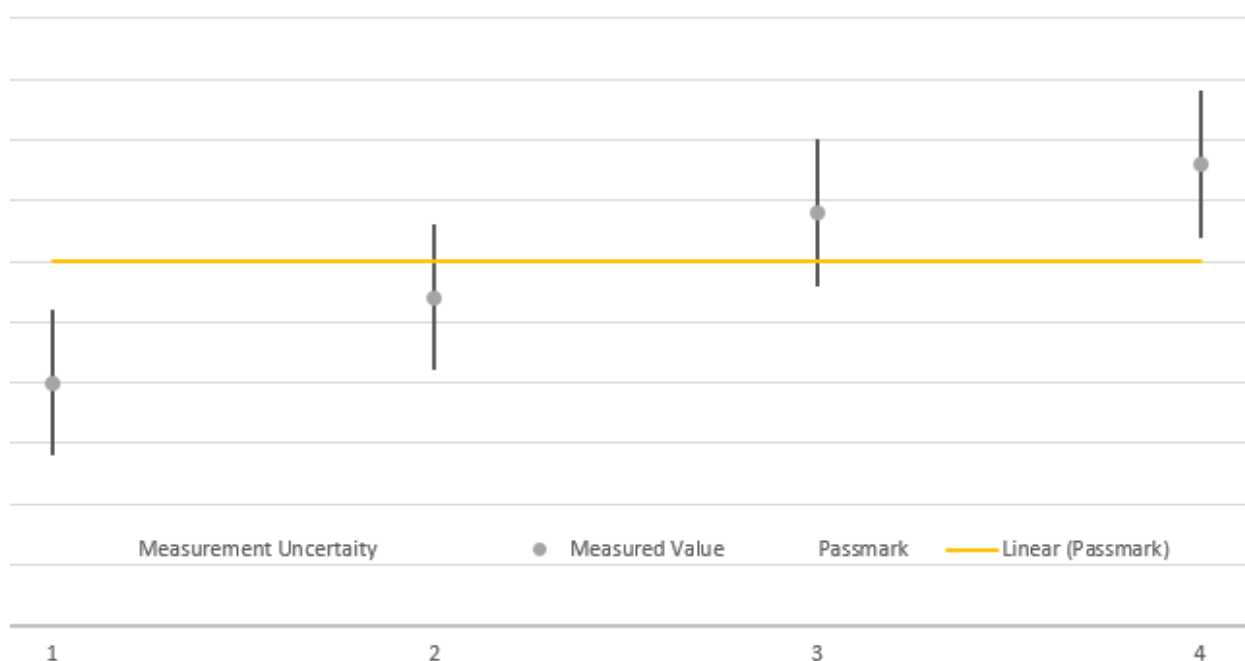

The verdicts in this test report are given according the above diagram:

| Case | Measured Value | Uncertainty Range | Verdict |
|------|-----------------|-------------------|---------|
| 1 | below pass mark | below pass mark | Passed |
| 2 | below pass mark | within pass mark | Passed |
| 3 | above pass mark | within pass mark | Failed |
| 4 | above pass mark | above pass mark | Failed |

That means, the laboratory applies, as decision rule (see ISO/IEC 17025:2017), the so called shared risk principle.

10 PHOTO REPORT

Please see separate photo report.