

Report No.: SUCR241100043803

Rev.: 01 Page: 1 of 37

TEST REPORT

Application No.: SUCR2411000438TL

Applicant: Gosuncn Technology Group Co., Ltd.

6F, 2819 KaiChuang Blvd., Science Town, Huangpu District, Guangzhou City, **Address of Applicant:**

Guangdong, China.

Manufacturer: Gosuncn Technology Group Co., Ltd.

6F, 2819 KaiChuang Blvd., Science Town, Huangpu District, Guangzhou City, Address of Manufacturer:

Guangdong, China.

EUT Description: LTE OBDII Dongle

Model No.: **GD201E**

Trade Mark: **GOSUNCN**

FCC ID: 2APNR-GD201E

Standards: 47 CFR Part 2

> 47 CFR Part 22 47 CFR Part 24 47 CFR Part 27 47 CFR Part 90

Date of Receipt: November 04, 2024

Date of Test: November 05, 2024 ~ November 17, 2024

Date of Issue: November 20, 2024

PASS * Test Result:

Nature Shen

In the configuration tested, the EUT detailed in this report complied with the standards specified

Prepared by: Nature Shen/ Project

Manager

Approved by: Cloud Peng/

Technical Manager

Cloud Peng

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lems-and-Conditions-and-Condit

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980

www.sgsgroup.com.cn

Witten Jakob .

MS/ST Reporter and String (A) (a) (b), (1



Report No.: SUCR241100043803

Rev.: 01 2 of 37 Page:

Version

	Revision Record					
Version	Version Chapter Date Modifier Remark					
01		November 20, 2024		Original		

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lems-and-Conditions-and-Conditions-and-Conditions-Bens-e-Document, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/lems-and-Conditions/Eens-e-Document, aspx.
Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's side responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SIS-IST frames for skill Science (a) (a) (1), (1) Webs down



Report No.: SUCR241100043803

Rev.: 01 Page: 3 of 37

Contents

Ve	rsion		2
1		est Summary	
	1.1	LTE Cat-M1 Band 5/ LTE Cat-M1 Band 26(824~849 MHz)	
	1.2	LTE Cat-M1 Band 2	
	1.3	LTE Cat-M1 Band 4 / LTE Cat-M1 Band 66	6
	1.4	LTE Cat-M1 Band 12	7
	1.5	LTE Cat-M1 Band 13	8
	1.6	LTE Cat-M1 Band 26(814~824 MHz)	10
2	G	eneral Information	12
	2.1	Details of Client	12
	2.2	Test Location	12
	2.3	Test Facility	12
	2.4	General Description of EUT	13
	2.5	Test Mode	14
	2.6	Test Environment	14
	2.7	Description of Support Units	14
	2.8	Technical Specification	15
	2.9	Test Frequencies	16
3	D	escription of Tests	22
	3.1	Conducted Output Power	22
	3.2	Effective (Isotropic) Radiated Power of Transmitter	23
	3.3	Occupied Bandwidth	24
	3.4	Band Edge at Antenna Terminals	25
	3.5	Spurious And Harmonic Emissions at Antenna Terminal	26
	3.6	Peak-Average Ratio	27
	3.7	Field Strength of Spurious Radiation	28
	3.8	Frequency Stability / Temperature Variation	30
	3.9	Test Setups	31
	3.10	Test Conditions	33
4	M	ain Test Instruments	34
5		easurement Uncertainty	
6	A	ppendixes	37

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lems-and-Conditions-and-Conditions-and-Conditions-Bens-e-Document, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/lems-and-Conditions/Eens-e-Document, aspx.
Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's side responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SIS-IST Season for and Series Series (D), U1 Webs down



Report No.: SUCR241100043803

Rev.: 01 4 of 37 Page:

1 **Test Summary**

1.1 LTE Cat-M1 Band 5/ LTE Cat-M1 Band 26(824~849 MHz)

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §22.913(a)(5)	ERP ≤ 7 W	Section 1 of Appendix B	Pass
Peak-Average Ratio	§22.913(d)	Limit≤13 dB	Reference report R1907A0446- R1/R7	Pass
Modulation Characteristics	§2.1047	Digital modulation	Reference report R1907A0446- R1/R7	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Reference report R1907A0446- R1/R7	Pass
Band Edges Compliance	§2.1051, §22.917(a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Reference report R1907A0446- R1/R7	Pass
Spurious Emission at Antenna Terminals	§2.1051, §22.917(a)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.	Reference report R1907A0446- R1/R7	Pass
Field Strength of Spurious Radiation	§2.1053, §22.917(a)	FCC: ≤ -13 dBm/100 kHz.	Section 7 of Appendix B	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §22.355	±2.5ppm.	Reference report R1907A0446- R1/R7	Pass

Remark:

The Effective (Isotropic) Radiated Power Output Data and Field Strength of Spurious Radiation were fully tested in this report, and other items data please refer to the test report R1907A0446-R1/R7.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lems-and-Conditions-and-Conditions-and-Conditions-Bens-e-Document, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/lems-and-Conditions/Eens-e-Document, aspx.
Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's side responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980

Writes Laboration

MS-GST, Francis Technic Science (A) (a) (1), (1)



Report No.: SUCR241100043803

Rev.: 01 Page: 5 of 37

1.2 LTE Cat-M1 Band 2

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §24.232(c)	EIRP ≤ 2 W	Section 1 of Appendix B	Pass
Peak-Average Ratio	§24.232(d)	Limit≤13 dB	Reference report R1907A0446- R2	Pass
Modulation Characteristics	§2.1047	Digital modulation	Reference report R1907A0446- R2	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Reference report R1907A0446- R2	Pass
Band Edges Compliance	§2.1051, §24.238(a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Reference report R1907A0446- R2	Pass
Spurious Emission at Antenna Terminals	§2.1051, §24.238(a)	≤ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	Reference report R1907A0446- R2	Pass
Field Strength of Spurious Radiation	§2.1053, §24.238(a)	≤ -13 dBm/1 MHz.	Section 7 of Appendix B	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §24.235	Within authorized bands of operation/frequency block.	Reference report R1907A0446- R2	Pass

Remark:

The Effective (Isotropic) Radiated Power Output Data and Field Strength of Spurious Radiation were fully tested in this report, and other items data please refer to the test report R1907A0446-R2.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.ferms-end-Conditions-ferms-end-Conditions-end-Conditions-end-Conditions-ferms-end-Conditions-end-Conditi

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980

www.sgsgroup.com.cr

Writes Laboration

MS-GST frames for sind Sevice (Acros) (D), C1



Report No.: SUCR241100043803

Rev.: 01 Page: 6 of 37

1.3 LTE Cat-M1 Band 4 / LTE Cat-M1 Band 66

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(d)(4)	EIRP ≤ 1 W	Section 1 of Appendix B	Pass
Peak-Average Ratio	§27.50(d)(5)	Limit≤13 dB	Reference report R1907A0446- R3	Pass
Modulation Characteristics	§2.1047	Digital modulation	Reference report R1907A0446- R3	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Reference report R1907A0446- R3	Pass
Band Edges Compliance	§2.1051, §27.53(h)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Reference report R1907A0446- R3	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(h)	≤ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	Reference report R1907A0446- R3	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(h)	≤ -13 dBm/1 MHz.	Section 7 of Appendix B	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/frequency block.	Reference report R1907A0446- R3	Pass

Remark:

The Effective (Isotropic) Radiated Power Output Data and Field Strength of Spurious Radiation were fully tested in this report, and other items data please refer to the test report R1907A0446-R3.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.ferms-end-Conditions-ferms-end-Conditions-end-Conditions-end-Conditions-ferms-end-Conditions-end-Conditi

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980

www.sgsgroup.com.cn

Writes Laboration

MS-GST frames for sind Sevice (Acros) (D), C1



Report No.: SUCR241100043803

Rev.: 01 7 of 37 Page:

1.4 LTE Cat-M1 Band 12

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046 §27.50(c)(10)	ERP≤3W.	Section 1 of Appendix B	Pass
Peak-Average Ratio		Limit≤13 dB	Reference report R1907A0446- R3	Pass
Modulation Characteristics	§2.1047	Digital modulation	Reference report R1907A0446- R3	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Reference report R1907A0446- R3	Pass
Band Edges Compliance	§2.1051, §27.53(g)	≤ 43+10log10(P[Watts])	Reference report R1907A0446- R3	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(g)	≤ 43+10log10(P[Watts])	Reference report R1907A0446- R3	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(g)	FCC: ≤ -13 dBm/100 kHz.	Section 7 of Appendix B	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/frequency block.	Reference report R1907A0446- R3	Pass

The Effective (Isotropic) Radiated Power Output Data and Field Strength of Spurious Radiation were fully tested in this report, and other items data please refer to the test report R1907A0446-R3.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lems-and-Conditions-and-Conditions-and-Conditions-Bens-e-Document, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/lems-and-Conditions/Eens-e-Document, aspx.
Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's side responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

MS-GST frames for sind Sevice (Acros) (D), C1 Writes Laboration



Report No.: SUCR241100043803

Rev.: 01 8 of 37 Page:

1.5 LTE Cat-M1 Band 13

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(b)(10)	ERP ≤ 3 W.	Section 1 of Appendix B	Pass
Peak-Average Ratio		Limit≤13 dB	Reference report R1907A0446- R3	Pass
Modulation Characteristics	§2.1047	Digital modulation	Reference report R1907A0446- R3	Pass
Bandwidth	§2.1049,	OBW: No limit. EBW: No limit.	Reference report R1907A0446- R3	Pass
Band Edges Compliance	§2.1051, §27.53(c)	≤ 43+10log10(P[Watts])	Reference report R1907A0446- R3	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(c) §27.53(f)	≤ -13 dBm/100 kHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges. On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than 65 + 10 log (P) dB in a 6.25 kHz band segment, for mobile and portable stations. For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to −70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and −80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.	Reference report R1907A0446- R3	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(c) §27.53(f)	FCC: ≤ -13 dBm/100 kHz. For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to −70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and −80 dBW	Section 7 of Appendix B	Pass

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lems-and-Conditions-and-Conditions-and-Conditions-Bens-e-Document, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/lems-and-Conditions/Eens-e-Document, aspx.
Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's side responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

MS-37 frame for six Series (A) (A) (1), (1) South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980

Webs down



Report No.: SUCR241100043803

Rev.: 01 9 of 37 Page:

		EIRP for discrete emissions of less than 700 Hz bandwidth.		
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/frequency block.	Reference report R1907A0446- R3	Pass

Remark:

The Effective (Isotropic) Radiated Power Output Data and Field Strength of Spurious Radiation were fully tested in this report, and other items data please refer to the test report R1907A0446-R3.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lems-and-Conditions-and-Conditions-and-Conditions-Bens-e-Document, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/lems-and-Conditions/Eens-e-Document, aspx.
Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's side responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

MS-GST frames for sind Sevice (Acros) (D), C1 Webs down



Report No.: SUCR241100043803

Rev.: 01

10 of 37 Page:

1.6 LTE Cat-M1 Band 26(814~824 MHz)

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Transmitter	FCC Rule No.	Requirements	Test Result	verdict
Conducted Power Output	§2.1046, §90.635(b)	< 100 W.	Section 1 of Appendix B	Pass
Peak-Average Ratio		Limit≤13 dB	Reference report R1907A0446- R8	Pass
Modulation Characteristics	§2.1047	Digital modulation	Reference report R1907A0446- R8	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Reference report R1907A0446- R8	Pass
Emission Mask	§2.1051 § 90.691(a)	For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 116 Log10(f/6.1) decibels or 50+10Log10(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.	Reference report R1907A0446- R8	Pass
Spurious Emission at Antenna Terminals	§2.1051, §90.691	< 43 + 10Log10(P[Watts]) for all out-of-band emissions	Reference report R1907A0446- R8	Pass
Field Strength of Spurious Radiation	§2.1053, §90.691	< 43 + 10Log10(P[Watts]) for all out-of-band emissions	Section 7 of Appendix B	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §90.213	Within authorized bands of operation/frequency block.	Reference report R1907A0446- R8	Pass
Domark:				

Remark:

The Effective (Isotropic) Radiated Power Output Data and Field Strength of Spurious Radiation were fully

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lems-and-Conditions-and-Conditions-and-Conditions-Bens-e-Document, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/lems-and-Conditions/Eens-e-Document, aspx.
Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's side responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SIS-IST, framer for skell \$4 ton (\$2 to) (1), (1) South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980 www.sgsgroup.com.cn

Marin de de



Report No.: SUCR241100043803

Rev.: 01

11 of 37 Page:

tested in this report, and other items data please refer to the test report R1907A0446-R8.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lems-and-Conditions-and-Conditions-and-Conditions-Bens-e-Document, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/lems-and-Conditions/Eens-e-Document, aspx.
Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's side responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

MS-GST frames for sind Sevice (Acros) (D), C1 Webs down



Report No.: SUCR241100043803

Rev.: 01

12 of 37 Page:

General Information

2.1 Details of Client

Applicant:	Gosuncn Technology Group Co., Ltd.
Address of Applicant:	6F, 2819 KaiChuang Blvd., Science Town, Huangpu District, Guangzhou City, Guangdong, China.
Manufacturer:	Gosuncn Technology Group Co., Ltd.
Address of Manufacturer:	6F, 2819 KaiChuang Blvd., Science Town, Huangpu District, Guangzhou City, Guangdong, China.

2.2 Test Location

Company:	SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Address:	South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone
Post code:	215000
Test engineer:	Levi Li, King-p Li

2.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA (Certificate No. 6336.01)

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

Innovation, Science and Economic Development Canada

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

FCC –Designation Number: CN1312

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an

accredited testing laboratory. Designation Number: CN1312.

Test Firm Registration Number: 717327

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lems-and-Conditions-and-Condit

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

MS/ST Reporter and String (A) (a) (b), (1 Witter St. P.



Report No.: SUCR241100043803

Rev.: 01

13 of 37 Page:

2.4 General Description of EUT

EUT Description:	LTE OBDII Dongle				
Model No.:	GD201E				
Trade Mark:	GOSUNCN				
Hardware Version:	GD201_HW_V1.0				
Software Version:	BG95M3LAR02A03				
Power Supply:	12V, 24V				
INACL.	RF Conducted	869267079780	628		
IMEI:	RSE	866088070670	088070670090		
Antenna Type:	LDS Antenna				
	⊠Provided by client				
	LTE Cat-M1 Band 2: 1.0	3dBi LTI	E Cat-M1 I	Band 4:	0.73dBi
Antenna Gain:	LTE Cat-M1 Band 5: -0.3	3dBi LTI	E Cat-M1 I	Band 12:	-0.55dBi
	LTE Cat-M1 Band 13: -1.2	26dBi LTI	LTE Cat-M1 Band 26: -0.33dBi		
	LTE Cat-M1 Band 66: 0.7	3dBi			
DE Cablat	0.8dB(Below 1GHz)	.0dB(1.0~2.4GF	łz)	1.2dB(2.4	~3.4GHz)
RF Cable*:	1.5dB(Above 3.4GHz)		<u>'</u>		
N (*O' ()		11 (1 12 4		••	

Note: *Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information, SGS is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.

As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lems-and-Conditions-and-Condit

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

MS-GST, Francis Technic Science (A) (a) (1), (1) Writes Laboration



Report No.: SUCR241100043803

Rev.: 01

14 of 37 Page:

2.5 Test Mode

Test Mode	Test Modes Description		
LTE/TM1	M1 LTE system, QPSK modulation		
Remark: The test mode(s) are selected according to relevant radio technology specifications.			

2.6 Test Environment

Environment Parameter		101.0 kPa Selected Values During Tests			
Relative Humidity		44-46 %	RH Ambient		
Value		Temperature(°C)	Voltage(V)		
NTNV		22~23	12, 24		
LTLV		-20	9		
LTHV		-20	32		
HTLV		55	9		
HTHV		55	32		
Remark:					
NV: Normal Voltage LV: Low		/ Extreme Test Voltage	HV: High Extreme Test Voltage		
NT: Normal Temperature L	_T: Low	Extreme Test Temperature	HT: High Extreme Test Temperature		

2.7 Description of Support Units

The EUT has been tested as an independent unit.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lems-and-Conditions-and-Conditions-and-Conditions-Bens-e-Document, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/lems-and-Conditions/Eens-e-Document, aspx.
Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's side responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SISKST Search for hird String (8) (a) (b) (1) Marin de de



Report No.: SUCR241100043803

Rev.:

15 of 37 Page:

2.8 Technical Specification

Characteristics	Description						
Radio System Type							
	Band		TX			RX	
	LTE Cat-M1 B	and 2	1850 to 19	10 MHz		1930 t	o 1990 MHz
	LTE Cat-M1 B	and 4	1710 to 17	55 MHz		2110 t	o 2155 MHz
	LTE Cat-M1 B	and 5	824 to 849	MHz		869 to	894 MHz
Supported Frequency Range	LTE Cat-M1 B	and 12	699 to 716	MHz		729 to	746 MHz
	LTE Cat-M1 B	and 13	777 to 787	MHz		746 to	756 MHz
	LTE Cat-M1 B	and 26	814 to 824	MHz		859 to	869 MHz
	(814 to 824 MI		01110021			000 10	000 1111 12
	LTE Cat-M1 B		824 to 849	MHz		869 to 894 MHz	
	(824 to 849 Mi		1710 to 1780 MHz		2110 to 2200 MHz		
	LTE Cat-M1 B		1710 10 17	80 MHZ		21101	0 2200 WHZ
	LTE Cat-M1 Band 2	and 2	⊠1.4 MHz	⊠3 MHz	z [⊠5 MHz	⊠10 MHz
		u. 1 u _	⊠15 MHz	⊠20 M⊦	Ηz		
	LTE Cat M4 D	and 4	⊠1.4 MHz	⊠3 MH2	z [⊠5 MHz	⊠10 MHz
	LTE Cat-M1 B	and 4	⊠15 MHz	⊠20 MH	Ηz		
	LTE Cat-M1 B	and 5	⊠1.4 MHz	⊠3 MH2	z [⊴5 MHz	⊠10 MHz
Cupported Chappal Bandwidth	LTE Cat-M1 B	and 12	⊠1.4 MHz	⊠3 MH2	z [⊠5 MHz	⊠10 MHz
Supported Channel Bandwidth	LTE Cat-M1 B	and 13	⊠5 MHz	⊠10 M⊦	Ηz		
	LTE Cat-M1 B (814 to 824 MI		⊠1.4 MHz	⊠3 MHz	z [⊴5 MHz	⊠10 MHz
	LTE Cat-M1 B	and 26	⊠1.4 MHz	⊠ 3 MHz	z [⊠5 MHz	⊠10 MHz
	(824 to 849 MI	Hz)	⊠15 MHz				
	LTE Cat-M1 Band 66		⊠1.4 MHz ⊠15MHz	⊠3 MH2 ⊠20MH	_	⊠5 MHz	⊠10 MHz
Characteristics	Description						

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lems-and-Conditions-and-Conditions-and-Conditions-Bens-e-Document, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/lems-and-Conditions/Eens-e-Document, aspx.
Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's side responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com MS-37 frame for six Series (A) (A) (1), (1)

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980

Webs down



Report No.: SUCR241100043803

Rev.: 01

16 of 37 Page:

2.9 Test Frequencies

Took Mode	Dan du dalth	TV / DV		RF Channel	
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
			Channel 18607	Channel 18900	Channel 19193
		TX	1850.7 MHz	1880 MHz	1909.3 MHz
	1.4MHz	RX	Channel 607	Channel 900	Channel 1193
		KA	1930.7 MHz	1960 MHz	1989.3 MHz
			Channel 18615	Channel 18900	Channel 19185
		TX	1851.5 MHz	1880 MHz	1908.5 MHz
	3MHz	RX	Channel 615	Channel 900	Channel 1185
		INA	1931.5 MHz	1960 MHz	1988.5 MHz
	5MHz	TX	Channel 18625	Channel 18900	Channel 19175
			1852.5 MHz	1880 MHz	1907.5 MHz
		RX	Channel 625	Channel 900	Channel1175
LTE Cat-M1			1932.5 MHz	1960 MHz	1987.5 MHz
Band 2	10MHz		Channel 18650	Channel 18900	Channel 19150
		TX	1855 MHz	1880 MHz	1905 MHz
		RX	Channel 650	Channel 900	Channel 1150
			1935 MHz	1960 MHz	1985 MHz
			Channel 18675	Channel 18900	Channel 19125
		TX	1857.5 MHz	1880 MHz	1902.5 MHz
	15MHz	RX	Channel 675	Channel 900	Channel 1125
		INA	1937.5 MHz	1960 MHz	1982.5 MHz
			Channel 18700	Channel 18900	Channel 19100
		TX	1860 MHz	1880 MHz	1900 MHz
	20MHz	RX	Channel 700	Channel 900	Channel 1100
		INΛ	1940 MHz	1960 MHz	1980 MHz

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lems-and-Conditions-and-Conditions-and-Conditions-Bens-e-Document, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/lems-and-Conditions/Eens-e-Document, aspx.
Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's side responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

MS-37 frame for six Series (A) (A) (1), (1) South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980

Webs down



Report No.: SUCR241100043803

Rev.:

Page: 17 of 37

Toot Mode	Bandwidth	TV / DV		RF Channel	
Test Mode	Danuwidin	TX / RX	Low (L)	Middle (M)	High (H)
			Channel 19957	Channel 20175	Channel 20393
		TX	1710.7 MHz	1732.5 MHz	1754.3 MHz
	1.4MHz	RX	Channel 1975	Channel 2175	Channel 2375
		KX	2112.5 MHz	2132.5MHz	2152.5 MHz
			Channel 19965	Channel 20175	Channel 20385
		TX	1711.5 MHz	1732.5 MHz	1753.5 MHz
	3MHz	RX	Channel 2000	Channel 2175	Channel 2350
		KA	2115 MHz	2132.5MHz	2150 MHz
			Channel 19975	Channel 20175	Channel 20375
	5MHz	TX	1712.5 MHz	1732.5 MHz	1752.5 MHz
		RX	Channel 1975	Channel 2175	Channel 2375
LTE Cat-M1			2112.5 MHz	2132.5MHz	2152.5 MHz
Band 4	10MHz	TX	Channel 20000	Channel 20175	Channel 20350
			1715 MHz	1732.5 MHz	1750 MHz
		RX	Channel 2000	Channel 2175	Channel 2350
			2115 MHz	2132.5MHz	2150 MHz
		TX	Channel 20025	Channel 20175	Channel 20325
			1717.5 MHz	1732.5 MHz	1747.5 MHz
	15MHz	RX	Channel 2025	Channel 2175	Channel 2325
		100	2117.5 MHz	2132.5MHz	2147.5 MHz
			Channel 20050	Channel 20175	Channel 20300
		TX	1720 MHz	1732.5 MHz	1745 MHz
	20MHz	DV	Channel 2050	Channel 2175	Channel 2300
		RX	2120 MHz	2132.5MHz	2145 MHz

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lems-and-Conditions-and-Conditions-and-Conditions-Bens-e-Document, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/lems-and-Conditions/Eens-e-Document, aspx.
Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's side responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SIS-IST Search for and School School Co. (1) South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980 Webs down



Report No.: SUCR241100043803

Rev.: 01

18 of 37 Page:

Toot Mode	Dandwidth	TV / DV	RF Channel		
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
			Channel 20407	Channel 20525	Channel 20643
		TX	824.7 MHz	836.5 MHz	848.3 MHz
	1.4MHz	RX	Channel 2407	Channel 2525	Channel 2643
		KA	869.7 MHz	881.5 MHz	893.3 MHz
			Channel 20415	Channel 20525	Channel 20635
		TX	825.5 MHz	836.5 MHz	847.5 MHz
	3MHz	RX	Channel 2415	Channel 2525	Channel 2635
LTE Cat-M1			870.5 MHz	881.5 MHz	892.5 MHz
Band 5		TX	Channel 20425	Channel 20525	Channel 20625
			826.5 MHz	836.5 MHz	846.5 MHz
	5MHz	RX	Channel 2425	Channel 2525	Channel 2625
			871.5 MHz	881.5 MHz	891.5 MHz
	_		Channel 20450	Channel 20525	Channel 20600
		TX	829 MHz	836.5 MHz	844 MHz
	10MHz	RX	Channel 2450	Channel 2525	Channel 2600
		INΛ	874 MHz	881.5 MHz	889 MHz

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lems-and-Conditions-and-Conditions-and-Conditions-Bens-e-Document, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/lems-and-Conditions/Eens-e-Document, aspx.
Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's side responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SIS-IST Search for and School School Co. (1) South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980 Webs down



Report No.: SUCR241100043803

Rev.: 01

Page: 19 of 37

Took Mode	Dan dwidth	TV / DV		RF Channel	
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
			Channel 23017	Channel 23095	Channel 23173
		TX	699.7 MHz	707.5 MHz	715.3 MHz
	1.4MHz	RX	Channel 5017	Channel 5095	Channel 5173
		KA	729.7 MHz	737.5 MHz	745.3 MHz
			Channel 23025	Channel 23095	Channel 23165
		TX	700.5 MHz	707.5 MHz	714.5 MHz
	3MHz	RX	Channel 5025	Channel 5095	Channel 5165
LTE Cat-M1			730.5 MHz	737.5 MHz	744.5 MHz
Band 12		TX	Channel 23035	Channel 23095	Channel 23155
			701.5 MHz	707.5 MHz	713.5 MHz
	5MHz	RX	Channel 5035	Channel 5095	Channel 5155
			731.5 MHz	737.5 MHz	743.5 MHz
			Channel 23060	Channel 23095	Channel 23130
		TX	704 MHz	707.5 MHz	711 MHz
	10MHz	RX	Channel 5060	Channel 5095	Channel 5130
		INA	734 MHz	737.5 MHz	741 MHz

Test Mode	Bandwidth	TX / RX	RF Channel		
rest Mode	Danuwiuin	IA/NA	Low (L)	Middle (M)	High (H)
			Channel 23025	Channel 23230	Channel 23255
	5MHz	TX	779.5 MHz	782 MHz	784.5 MHz
		RX	Channel 5205	Channel 5230	Channel 5255
LTE Cat-M1 Band 13 10MH			748.5 MHz	751 MHz	753.5 MHz
		TX	Channel 23230	Channel 23230	Channel 23230
			782 MHz	782 MHz	782 MHz
	10MHz	RX	Channel 5230	Channel 5230	Channel 5230
		INA	751 MHz	751 MHz	751 MHz

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Document at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR241100043803

Rev.: 01

Page: 20 of 37

Tank Marda	Danielo dala	TV / DV		RF Channel	
Test Mode	t Mode Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
			Channel 26697	Channel 26740	Channel 26783
		TX	814.7 MHz	819 MHz	823.3 MHz
	1.4MHz	RX	Channel 8697	Channel 8740	Channel 8783
		KA	859.7 MHz	864MHz	868.3 MHz
			Channel 26705	Channel 26740	Channel 26775
	3MHz	TX	815.5 MHz	819 MHz	822.5 MHz
1.75.0 (114		RX	Channel 8705	Channel 8740	Channel 8775
LTE Cat-M1			860.5 MHz	864MHz	867.5 MHz
Band 26		TX	Channel 26715	Channel 26740	Channel 26765
(814-824)			816.5 MHz	819 MHz	821.5 MHz
	5MHz	RX	Channel 8715	Channel 8740	Channel 8755
			861.5 MHz	864MHz	866.5 MHz
			Channel 26740	Channel 26740	Channel 26740
		TX	819 MHz	819 MHz	819 MHz
	10MHz	DY	Channel 8740	Channel 8740	Channel 8740
	RX		864MHz	864MHz	864MHz

Test Mode	Bandwidth	TX / RX		RF Channel	
rest Mode	Dandwidth	IA/KA	Low (L)	Middle (M)	High (H)
			Channel 26797	Channel 26915	Channel 27033
		TX	824.7 MHz	836.5 MHz	848.3 MHz
	1.4MHz	RX	Channel 8697	Channel 8915	Channel 9033
		KA	859.7 MHz	881.5 MHz	893.3 MHz
			Channel 26805	Channel 26915	Channel 27025
		TX	825.5 MHz	836.5 MHz	847.5 MHz
	3MHz	DV	Channel 8805	Channel 8915	Channel 9025
		RX	860.5 MHz	881.5 MHz	892.5 MHz
	5MHz	TX	Channel 26815	Channel 26915	Channel 27015
LTE Cat-M1			826.5 MHz	836.5 MHz	846.5 MHz
Band26		RX	Channel 8815	Channel 8915	Channel 9015
(824-849)			871.5 MHz	881.5 MHz	891.5 MHz
		TX	Channel 26840	Channel 26915	Channel 26990
			829 MHz	836.5 MHz	844 MHz
	10MHz	DV	Channel 8840	Channel 8915	Channel 8990
		RX	874 MHz	881.5 MHz	889 MHz
			Channel 26865	Channel 26915	Channel 26965
		TX	831.5 MHz	836.5 MHz	841.5 MHz
	15MHz	RX	Channel 8865	Channel 8915	Channel 8965
	KX		876.5 MHz	881.5 MHz	886.5 MHz

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Document at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980

12) 62992980 www.sgsgroup.cor

Webs down

305-331, framer for sind Sevices (A) (A) (D), (1)



Report No.: SUCR241100043803

Rev.: 01

21 of 37 Page:

				RF Channel	
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
			Channel 131979	Channel 132322	Channel 132665
		TX	1710.7 MHz	1745 MHz	1779.3 MHz
	1.4MHz	RX	Channel 66443	Channel 66786	Channel 67329
		KA.	2110.7 MHz	2145MHz	2199.3 MHz
			Channel 131987	Channel 132322	Channel 132657
		TX	1711.5 MHz	1745 MHz	1778.5MHz
	3MHz	RX	Channel 66451	Channel 66786	Channel 67321
		INA	2111.5 MHz	2145MHz	2198.5MHz
			Channel 131997	Channel 132322	Channel 132647
	5MHz	TX	1712.5 MHz	1745 MHz	1777.5 MHz
		RX	Channel 66461	Channel 66786	Channel 67311
LTE Cat-M1			2112.5 MHz	2145MHz	2197.5 MHz
Band66	10MHz	TX	Channel 132022	Channel 132322	Channel 132622
			1715 MHz	1745 MHz	1775 MHz
		RX	Channel 66486	Channel 66786	Channel 67286
			2115 MHz	2145MHz	2195 MHz
			Channel 132047	Channel 132322	Channel 132597
		TX	1717.5 MHz	1745 MHz	1772.5 MHz
	15MHz	RX	Channel 66511	Channel 66786	Channel 67261
		100	2117.5 MHz	2145MHz	2192.5 MHz
			Channel 132072	Channel 132322	Channel 132572
		TX	1720 MHz	1745 MHz	1770 MHz
	20MHz	DV	Channel 66536	Channel 66786	Channel 67236
		RX	2120 MHz	2145MHz	2190 MHz

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lems-and-Conditions-and-Conditions-and-Conditions-Bens-e-Document, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/lems-and-Conditions/Eens-e-Document, aspx.
Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's side responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SIS-IST Search for and School School Co. (1) Webs down



Report No.: SUCR241100043803

Rev.: 01

Page: 22 of 37

Description of Tests 3

3.1 Conducted Output Power

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.2.1

The transmitter output was connected to a calibrated coaxial cable, attenuator and power meter, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss to the power reading. The tests were performed at three frequencies (low channel, middle channel and high channel) and on the highest power levels, which can be setup on the transmitters.

Remark: Reference test setup 1

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lems-and-Conditions-and-Conditions-and-Conditions-Bens-e-Document, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/lems-and-Conditions/Eens-e-Document, aspx.
Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's side responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SIS-IST frame-feministries (W. a) D. L1 Writer Jakob ...



Report No.: SUCR241100043803

Rev.: 01

23 of 37 Page:

3.2 Effective (Isotropic) Radiated Power of Transmitter

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8.4

Calculate power in dBm by the following formula:

ERP (dBm) = Conducted Power (dBm) + antenna gain (dBd)

EIRP(dBm) = Conducted Power (dBm) + antenna gain (dBi)

EIRP=ERP+2.15dB

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lems-and-Conditions-and-Conditions-and-Conditions-Bens-e-Document, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/lems-and-Conditions/Eens-e-Document, aspx.
Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's side responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

MS-GST frame for hind Sevice (Acros) (D), C1 Writes Laboration



Report No.: SUCR241100043803

01 Rev.:

Page: 24 of 37

3.3 Occupied Bandwidth

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 4.2 & 4.3

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel, middle channel and high channel). The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

Remark: Reference test setup 1

Test Settings

- 1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- 2. RBW = 1 5% of the expected OBW
- VBW ≥ 3 x RBW
- 4 Detector = Peak
- 5. Trace mode = max hold
- Sweep = auto couple
- The trace was allowed to stabilize
- 8. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within
 - 1 5% of the 99% occupied bandwidth observed in Step 7

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-and-C reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SISSECTION OF FRANCE AND THE Writer Street

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR241100043803

01 Rev.:

Page: 25 of 37

3.4 Band Edge at Antenna Terminals

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser. the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at two frequencies (low channel and high channel).in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to rms.

Remark: Reference test setup 1

Test Settings

- 1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW > 1% of the emission bandwidth
- VBW > 3 x RBW
- Detector = RMS
- Number of sweep points ≥ 2 x Span/RBW
- Trace mode = trace average for continuous emissions, max hold for pulse emissions
- Sweep time = auto couple
- 9. The trace was allowed to stabilize

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Termsreproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SIS-IST frame-feministries (W. a) D. L1 Writer Street

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR241100043803

Rev.: 01

Page: 26 of 37

3.5 Spurious And Harmonic Emissions at Antenna Terminal

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyzer. the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel). The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

Remark: Reference test setup 1

Test Settings

- 1. Start frequency was set to 9kHz and stop frequency was set to at least 10* the fundamental frequency(Separated into at least two plots per channel)
- 2. Detector = RMS
- 3. Trace mode = trace average for continuous emissinos, max hold for pulse emissions
- 4. Sweep time = auto couple
- 5. The trace was allowed to stabilize
- 6. Please see test notes below for RBW and VBW settings

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Termsreproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

MS/ST Reporter and String (A) (a) (b), (1 Writer Street

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR241100043803

01 Rev.:

Page: 27 of 37

3.6 Peak-Average Ratio

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.7.2

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode.

Remark: Reference test setup 1

Test Settings

- The signal analyzer's CCDF measurement profile is enabled.
- Frequency = carrier center frequency
- 3. Measurement BW > Emission bandwidth of signal
- The signal analyzer was set to collect one million samples to generate the CCDF curve
- 5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Termsreproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SISSECTION OF FRANCE AND THE Writer Street

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR241100043803

Rev.: 01

Page: 28 of 37

3.7 Field Strength of Spurious Radiation

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8

Below 1GHz test procedure as below:

- 1). The EUT was powered ON and placed on a 80cm high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). Test the EUT in the lowest channel, the middle channel ,the Highest channel.
- 5). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 6). Repeat above procedures until all frequencies measured was complete.

E (dBμV/m) = Measured amplitude level (dBμV) + (Cable Loss (dB) + Antenna Factor (dB/m) – AMP(dB)) EIRP (dBm) = E (dB μ V/m) + 20 log D - 104.8; where D is the measurement distance in meters

Above 1GHz test procedure as below:

- 1) Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber
- 2) Calculate power in dBm by the following formula:

E (dBμV/m) = Measured amplitude level (dBμV) + (Cable Loss (dB) + Antenna Factor (dB/m) – AMP(dB)) EIRP (dBm) = E (dBμV/m) + 20 log D - 104.8; where D is the measurement distance in meters

- 3). Test the EUT in the lowest channel, the middle channel the Highest channel
- 4). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 5). Repeat above procedures until all frequencies measured was complete

Remark1: Reference test setup 2

Remark2: The emission below 18G were measured at a 3m test distance, while emissions above 18GHz were measured at a 1m test distance. At a measurement distance of 1 meter the limit line was increased by 20*LOG(3/1) = 9.54 dB.

Remark: Reference test setup 2

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & AMP. The basic equation with a sample calculation is as follows:

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier (dB)

Level = Reading Level + AF + Factor -95.26

Margin = Limit - Level

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SISSECTION OF FRANCE AND THE Writer Street

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



SUCR241100043803 Report No.:

Rev.: 01

Page: 29 of 37

2) Scan from 9kHz to 40GHz, The disturbance between 9KHz to 30MHz and 18GHz to 40GHz was very low, and the harmonics were the highest point could be found when testing, so only the harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3) All modes have been tested, but only the worst case data displayed in this report.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lems-and-Conditions-and-Condit

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

MS-GST, Francis Technic Science (A) (a) (1), (1) Writer Jakob ...



Report No.: SUCR241100043803

01 Rev.:

Page: 30 of 37

3.8 Frequency Stability / Temperature Variation

Measurement Procedure:

Frequency stability testing is performed in accordance with the guidelines of FCC KDB 971168 D01 V03r01; Section 9

- . The frequency stability of the transmitter is measured by:
- a.) Temperature: The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5 ppm) of the center frequency.

Time Period and Procedure:

- 1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
- 2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Remark: Reference test setup 3

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be The control of the content of the company of the company of the company of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SISSECTION OF FRANCE AND THE




Report No.: SUCR241100043803

Rev.: 01


Page: 31 of 37

3.9 Test Setups

3.9.1 **Test Setup 1**

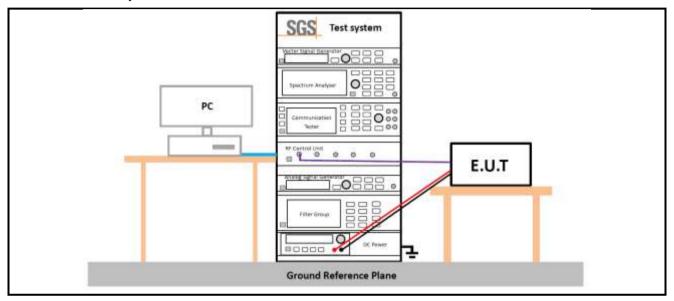

3.9.2 **Test Setup 2**

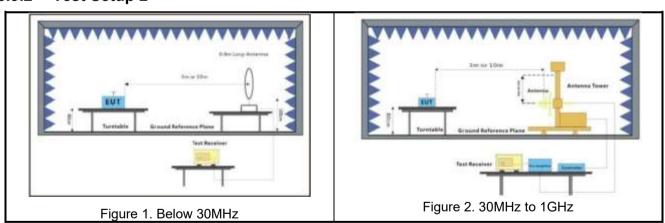

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lems-and-Conditions-and-Conditions-and-Conditions-Bens-e-Document, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/lems-and-Conditions/Eens-e-Document, aspx.
Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's side responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SIS-IST frame-feministries (W. a) D. L1




Report No.: SUCR241100043803

Rev.: 01

32 of 37 Page:

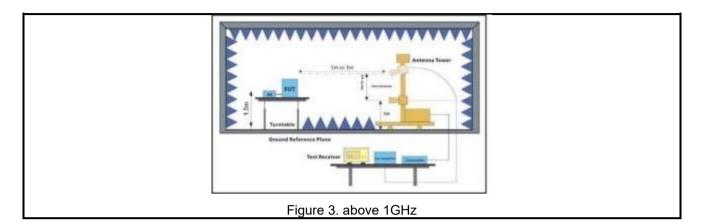

3.9.3 **Test Setup 3**

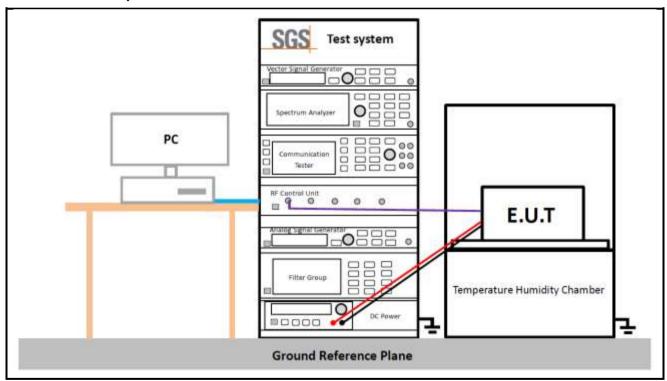

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lems-and-Conditions-and-Conditions-and-Conditions-Bens-e-Document, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/lems-and-Conditions/Eens-e-Document, aspx.
Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's side responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SIS-IST frame-feministries (W. a) D. L1



Report No.: SUCR241100043803

Rev.: 01

33 of 37 Page:

3.10Test Conditions

Transmit Output Power Data - Average Power, Total				
Test Case Test Conditions				
Test Environment	Ambient Climate & Rated Voltage			
Test Setup	Test Setup 1			
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)			
Test Mode	LTE/TM1			

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lems-and-Conditions-and-Conditions-and-Conditions-Bens-e-Document, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/lems-and-Conditions/Eens-e-Document, aspx.
Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's side responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SIS-IST frame for and Scientific Scientific (1) Webs down



Report No.: SUCR241100043803

Rev.: 01

34 of 37 Page:

Main Test Instruments

RF conducted test					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Shielding Room	Brilliant-emc	N/A	SUWI-04-01- 06	11/9/2022	11/8/2025
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01- 07	2/18/2024	2/17/2025
Signal Analyzer	ROHDE&SCHWARZ	FSV3030	SUWI-01-02- 02	5/8/2024	5/7/2025
Measurement Software	Tonscend	J1120 RFAuto Test System	SUWI-02-03- 01	NCR	NCR
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02- 04	5/8/2024	5/7/2025
Wideband Radio Communication Tester	Anritsu	MT8821C	SUWI-01-26- 03	11/21/2023	11/20/2024
RF Control Unit	Tonscend	JS0806-1	SUWI-02-20- 01	NCR	NCR

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lems-and-Conditions-and-Conditions-and-Conditions-Bens-e-Document, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/lems-and-Conditions/Eens-e-Document, aspx.
Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's side responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

MS-GST frames for sind Sevice (Acros) (D), C1 Webs down



Report No.: SUCR241100043803

Rev.: 01

35 of 37 Page:

RSE Test System					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-01	6/3/2023	6/2/2026
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-05	2/18/2024	2/17/2025
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	5/8/2024	5/7/2025
Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-07	11/21/2023	11/20/2024
Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	2/1/2024	1/31/2025
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	VULB 9163	SUWI-01-11-01	5/13/2023	5/12/2025
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9120D	SUWI-01-11-02	5/13/2023	5/12/2025
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9170	SUWI-01-11-03	5/12/2023	5/11/2025
Active Loop Antenna	SCHWRZBECK MESS- ELEKTRONIK	FMZB 1519B	SUWI-01-21-01	5/13/2023	5/12/2025
Amplifier	Tonscend	TAP9K3G40	SUWI-01-14-01	2/1/2024	1/31/2025
Amplifier	Tonscend	TAP01018050	SUWI-01-14-02	2/1/2024	1/31/2025
Amplifier	Tonscend	TAP18040048	SUWI-01-14-03	2/1/2024	1/31/2025
Wideband Radio Communication Tester	Anritsu	MT8821C	SUWI-01-26-03	11/21/2023	11/20/2024
Measurement Software	Tonscend	JS32-RE V4.0.0.0	SUWI-02-09-04	NCR	NCR

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lems-and-Conditions-and-Conditions-and-Conditions-Bens-e-Document, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/lems-and-Conditions/Eens-e-Document, aspx.
Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's side responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SIS-IST Search for and School School Co. (1) Webs down



Report No.: SUCR241100043803

Rev.: 01

36 of 37 Page:

5 **Measurement Uncertainty**

For a 95% confidence level (k = 2), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

No.	Item	Measurement Uncertainty	
1	Total RF power, conducted	±0.54dB	
7		± 3.13dB (9k -30MHz)	
	Radiated Emission	± 4.8dB (30M -1GHz)	
		± 4.8dB (1GHz to 18GHz)	
		± 4.80dB (Above 18GHz)	

The U_{lab} (lab Uncertainty) is less than $U_{\text{cispr/ETSI}}$ (CISPR/ETSI Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;

non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lems-and-Conditions-and-Condit

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SIS-IST, framer for skell \$4 ton (\$2 to) (1), (1) Writer St. W. W.



Report No.: SUCR241100043803

Rev.:

37 of 37 Page:

6 Appendixes

Appendix A.3	WWAN Setup Photos
Appendix B.1	LTE Cat-M1 Band 2
Appendix B.2	LTE Cat-M1 Band 4
Appendix B.3	LTE Cat-M1 Band 5
Appendix B.4	LTE Cat-M1 Band 12
Appendix B.5	LTE Cat-M1 Band 13
Appendix B.6	LTE Cat-M1 Band 26(814-824)
Appendix B.7	LTE Cat-M1 Band 26(824-849)
Appendix B.8	LTE Cat-M1 Band 66

---End of Report---

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lems-and-Conditions-and-Conditions-and-Conditions-Bens-e-Document, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/lems-and-Conditions/Eens-e-Document, aspx.
Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's side responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

MS-GST frames for sind Sevice (Acros) (D), C1 Webs down