

 MOTOROLA SOLUTIONS	    CERTIFICATE 2518.08 SAMM 825																														
MOTOROLA PENANG ADV. COMM. LABORATORY Motorola Solutions Malaysia Sdn. Bhd. Plot 2A Medan Bayan Lepas, Mukim 12, S.W.D. 11900 Bayan Lepas, Penang, Malaysia.	FCC / ISED TEST REPORT Report Revision : Rev.A																														
<table><tr><td>Date/s Tested</td><td>: 18-July-2024 - 05-September-2024</td></tr><tr><td>Report Issue Date</td><td>: 20-September-2024</td></tr><tr><td>Manufacturer/Location</td><td>: Motorola Solutions Malaysia Sdn Bhd Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia</td></tr><tr><td>Requestor</td><td>: R THAYAPARAN DANESHKUMAR AL</td></tr><tr><td>Product Type</td><td>: Portable</td></tr><tr><td>Product Marketing Name (PMN)</td><td>: R5</td></tr><tr><td>Hardware Version Identification Number (HVIN)</td><td>: AAH07JDH9SA1AN</td></tr><tr><td>Frequency Band</td><td>: 2.402 - 2.480 GHz</td></tr><tr><td>Max RF Output Power</td><td>: 12.59 mWatts</td></tr><tr><td>Applicant Name</td><td>: Motorola Solutions Inc</td></tr><tr><td>Applicant Address</td><td>: Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia</td></tr><tr><td>FCC Registrations</td><td>: 461337</td></tr><tr><td>IC Registrations</td><td>: MY0001</td></tr><tr><td>Firmware Version Identification Number (FVIN)</td><td>: B02.25.01.0019</td></tr></table> The equipment was tested accordance to the requirement listed below: <table><tr><td>(2.4GHz BT) FCC 47CFR Part 15C ISED RSS 247 Issue 3 February 2017</td><td>PASS</td></tr></table>		Date/s Tested	: 18-July-2024 - 05-September-2024	Report Issue Date	: 20-September-2024	Manufacturer/Location	: Motorola Solutions Malaysia Sdn Bhd Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia	Requestor	: R THAYAPARAN DANESHKUMAR AL	Product Type	: Portable	Product Marketing Name (PMN)	: R5	Hardware Version Identification Number (HVIN)	: AAH07JDH9SA1AN	Frequency Band	: 2.402 - 2.480 GHz	Max RF Output Power	: 12.59 mWatts	Applicant Name	: Motorola Solutions Inc	Applicant Address	: Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia	FCC Registrations	: 461337	IC Registrations	: MY0001	Firmware Version Identification Number (FVIN)	: B02.25.01.0019	(2.4GHz BT) FCC 47CFR Part 15C ISED RSS 247 Issue 3 February 2017	PASS
Date/s Tested	: 18-July-2024 - 05-September-2024																														
Report Issue Date	: 20-September-2024																														
Manufacturer/Location	: Motorola Solutions Malaysia Sdn Bhd Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia																														
Requestor	: R THAYAPARAN DANESHKUMAR AL																														
Product Type	: Portable																														
Product Marketing Name (PMN)	: R5																														
Hardware Version Identification Number (HVIN)	: AAH07JDH9SA1AN																														
Frequency Band	: 2.402 - 2.480 GHz																														
Max RF Output Power	: 12.59 mWatts																														
Applicant Name	: Motorola Solutions Inc																														
Applicant Address	: Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia																														
FCC Registrations	: 461337																														
IC Registrations	: MY0001																														
Firmware Version Identification Number (FVIN)	: B02.25.01.0019																														
(2.4GHz BT) FCC 47CFR Part 15C ISED RSS 247 Issue 3 February 2017	PASS																														
This report shall not be reproduced without written approval from an officially designated representative of the Motorola Penang Adv. Comm. Laboratory. The results and statements contained in this report pertain only to the device(s) evaluated.																															
Prepared By:  NUR ALIEYA BINTI MAT YUSOFF Test Personnel	Approved Signatory: MAHESHVARAN A/L RAJAGOPAL Responsible Engineer																														

Table of Contents

1.0. General Information..... 3

2.0. Summary of Test Results 4

3.0. Measurement Uncertainty 5

4.0. Equipment List..... 6

5.0. Test Mode Applicability and Test Channel Detail 7

6.0. Transmitter Test Parameters 8

6.1. Conducted RF Output Power (Peak)..... 8

6.1.1. Test Setup 8

6.1.2. Test Limits: 8

6.1.3. Test Data: 8

6.2. 20dB Channel Bandwidth..... 12

6.2.1. Test Setup 12

6.2.2. Test Limits: 12

6.2.3. Test Data: 12

6.3. Band-edge Conducted Spurious Emission..... 16

6.3.1. Test Setup 16

6.3.2. Test Limits..... 16

6.3.3. Test Result..... 16

6.4. Dwell time on each channel..... 20

6.4.1. Test Setup 20

6.4.2. Test Limits: 20

6.4.3. Test Result..... 21

6.5. Number of hopping Frequency 25

6.5.1. Test Setup 25

6.5.2. Test Limits: 25

6.5.3. Test Result..... 25

6.6. Channel Separation 27

6.6.1. Test Setup 27

6.6.2. Test Limits: 27

6.6.3. Test Result..... 27

6.7. Conducted Spurious Emission 31

6.7.1. Test Setup 31

6.7.2. Test Limits: 31

6.7.3. Test Data: 31

6.8. Radiated Emission within restricted Bands 35

6.8.1. Test Setup 35

6.8.2. Test Limits: 36

6.8.3. Test Data: 37

6.9. AC Powerline Conducted Emission..... 87

6.9.1. Test Setup 87

6.9.2. Test Limits: 88

6.9.3. Test Result..... 89

REVISION HISTORY

Revision History	Description	Date	Originator
Rev. A	Initial Report	13-September-2024	Alieya

1.0. General Information

EUT Description:

Technologies	2.4GHz BT
TX Frequency range	2402MHz – 2480MHz
Modulation Type	GFSK, Pi/4 DQPSK,8DPSK
Connector type	PROGRAMMING, TEST & ALIGNMENT CABLE
Antenna type	PIFA

The EUT contains following accessory devices and data cable:

Item	Brand	Model or P/N
BATT IMPRES LIION TIA4950 IP68 3200T	MOTOROLA	PMNN4890A
VHF WHIP ANT ,136-174MHZ	MOTOROLA	PMAD4147A
BATT IMPRES LIION IP68 3200T HICAP	MOTOROLA	PMNN4889A
CHARGER DEKSTOP MULTI UNIT IMPRES 2 1 Display External Power Supply 100–240 VAC– US/NA	MOTOROLA	PMPN4284B

Channel number and frequency information:

79 channels are provided to this EUT:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, the EUT is to comply with the requirements of the following standards:

FCC 47 CFR Part 15 Subpart C
KDB 558074 D01 15.247 Meas Guidance v05
ANSI C63.10-2013

Deviation from standard

Not applicable as no deviation from standard test method

Modifications to EUT

For RF conducted measurements a pigtail was soldered out of the board while for radiated measurements there were no modifications to the device

2.0. Summary of Test Results

FCC Clause	ISED Clause	Test Item	Result	Remark	Serial number tested	Tested by
15.247 (b)(1)	RSS-247 5.4(b)	Conducted RF Output Power (Peak)	Pass	Highest output power: 10.022 dBm (10.051 mW)	651EAK0146	Alieya
15.247 (a)(1)	RSS-247 5.1(a) RSS-247 5.1(b)	(1) 20dB Channel Bandwidth (2) Channel Separation	Pass	GFSK – 0.863 MHz (863KF1D) Pi/4 DQPSK – 1.170 MHz (1M17G1D) 8DPSK – 1.173 MHz (1M17G1D)	651EAK0146	Alieya
15.247(a)(1)(iii)	RSS-247 5.1(d)	Number of hopping Frequency used	Pass	Meet the limit requirement.	651EAK0146	Alieya
15.247(a)(1)(iii)	RSS-247 5.1(d)	Dwell time on each channel	Pass	Meet the limit requirement.	651EAK0146	Alieya
15.247 (d)	RSS-247 5.5	Band Edge Conducted Spurious Emission	Pass	Worst case emission: -44.93 dB	651EAK0146	Alieya
15.247 (d)	RSS-247 5.5	Conducted Spurious Emission	Pass	Worst case emission: -45.307 dBm	651EAK0146	Alieya
15.205, 15.209, 15.247 (d)	RSS-247 5.5	Radiated Emission within Restricted Bands	Pass	Worst case emission: RBE: 43.1760dBuV/m (margin: 10.8240dB) RSE: 33.5867dBuV/m (margin: 9.9133dB)	651EAK0033, 651EAK0054, 651EAK0048	Nazrin, Rezza, Fuad
15.207	RSS-Gen 8.8	AC Powerline Conducted Emission	NA	Meet the limit requirement.	651EAK0033, 651EAK0054, 651EAK0048	Shidee
15.203	-	Antenna Requirement	NA	Internal antenna is not accessible to the end-user	NA	NA

3.0. Measurement Uncertainty

Measurement	Frequency	Expanded Uncertainty (k=1.96) (±dB)
AC Power Line Conducted Spurious Emission	150KHz ~ 30MHz	3.48
Radiated Emissions up to 1 GHz	30MHz ~ 1000MHz	5.88
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.84
	18GHz ~ 40GHz	6.02
Conducted Spurious Emissions	9kHz ~ 12.75GHz	2.82

4.0. Equipment List

Bluetooth ATE # 1 (SW Version: Ate Main_3.1.12_R1)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
CHAMBER	SH-641	92003820	04-Jul-24	04-Jul-25
PULSE SENSOR	MA2411B	1726287	22-Aug-23	22-Aug-24
PULSE POWER METER	ML2495A	1845014	16-Aug-23	16-Aug-24
SPECTRUM ANALYZER	E4440A	MY48250517	08-Nov-23	08-Nov-24
POWER SUPPLY	6652A	3640A02967	15-Oct-23	15-Oct-24

Radiated Emission Station (SW Version: EMC FCC RE v1.6.5)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
DRG HORN FREQ.	SAS-571	1143	08-Mar-23	08-Mar-25
DRG HORN FREQ.	SAS-571	720	18-Apr-23	18-Apr-25
DC Power Supply	6623A	3302A02585	30-Jul-24	30-Jul-25
SIGNAL GENERATOR	SMB 100A	182511	04-Sep-21	04-Dec-24
EMI TEST RECEIVER	ESW44	101750	08-Aug-24	07-Aug-25
BILOG ANTENNA	CBL6112B	2950	14-Dec-23	14-Dec-24
BILOG ANTENNA	CBL6112B	2964	25-Sep-23	25-Sep-24
DATA LOGGER THERMOHYGROMETER	SDL500	A.016800	26-Jun-24	26-Jun-25
BROAD-BAND HORN ANTENNA	BBHA9170	BBHA9170255	13-Mar-24	13-Mar-25
PREAMPLIFIER	PAM-0118P	574	19-Mar-24	19-Mar-25
LOOP ANTENNA	6502	00203479	06-Mar-24	06-Mar-25
5m SEMI-ANECHOIC CHAMBER	S800-HX	J2308	Not Required	Not Required
SYSTEM CONTROLLER	SC104V	050806-1	Not Required	Not Required
TURNTABLE FLUSH MOUNT 2M	FM2011	NA	Not Required	Not Required
ANTENNA POSITIONING TOWER	TLT2	NA	Not Required	Not Required
PREAMPLIFIER 18-40GHz	Miteq Hi Gain Sucoflex	002	Not Required	Not Required

AC Powerline Station (SW Version: EMC32 Ver.10.60.10)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
DATA LOGGER	DSB	16344143	05-Jul-24	05-Jul-25
V-NETWORK 2-LINE	ENV216V	101039	13-Dec-23	13-Dec-24
EMI TEST RECEIVER	ESCI	100225	08-May-24	08-May-25
PROGRAMMABLE AC SOURCE	61604	616040003502	15-Dec-23	15-Dec-24

5.0. Test Mode Applicability and Test Channel Detail

Radiated Emission Test (Above 1GHz)

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Environmental Conditions
Test Mode	0 to 78	0,39,78	FHSS	GFSK, Pi/4 DQPSK,8DPSK	23.8°C, 67.9%RH

Radiated Emission Test (Below 1GHz)

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Environmental Conditions
Test Mode	0 to 78	0,39,78	FHSS	GFSK, Pi/4 DQPSK,8DPSK	23.8°C, 67.9%RH

Power Line Conducted Emission Test

☐ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☐ Following channel(s) was (were) selected for the final test as listed below.

NAEUT Configure Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Environmental Conditions
Application Mode	0 to 78	AUTO	FHSS	AUTO	NA

Antenna Port Conducted Measurement:

☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).


☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Environmental Conditions
Test Mode	0 to 78	0,39,78	FHSS	GFSK, Pi/4 DQPSK,8DPSK	25°C, 54.8%RH

6.0. Transmitter Test Parameters

6.1. Conducted RF Output Power (Peak)

6.1.1. Test Setup



- a) Check and ensure the spectrum analyzer well calibrate.
- b) Turn on the EUT and set EUT to transmit maximum data rate with hopping disable.
- c) Connect EUT's antenna terminal to spectrum analyzer with a low loss cable.
- d) Setting of Spectrum analyzer :
 - a. RBW = > 20 dB bandwidth
 - b. VBW = RBW
 - c. Detector mode = Peak
 - d. AMPLITUDE → Scale/Div = 10 dB
 - e. Trace = Max hold
 - f. Sweep = auto
- e) Measure the captured power within the band and recording the plot.
- f) Repeat above procedure with other different mode of operation.


6.1.2. Test Limits:

Normal Condition (25 ° C)
≤ 125mW (or 20.9dBm)


6.1.3. Test Data:

Test Conditions		Test Frequency (GHz)	Results	
Modulation	Voltage(V)		dBm	Status
GFSK	7.50	2.4020	9.598	Pass
		2.4410	9.510	Pass
		2.4800	9.558	Pass
Pi/4DQPSK	7.50	2.4020	9.738	Pass
		2.4410	9.581	Pass
		2.4800	9.590	Pass
8DPSK	7.50	2.4020	10.022	Pass
		2.4410	9.869	Pass
		2.4800	9.938	Pass


The Conducted RF Output Power test with result at low frequency, GFSK.

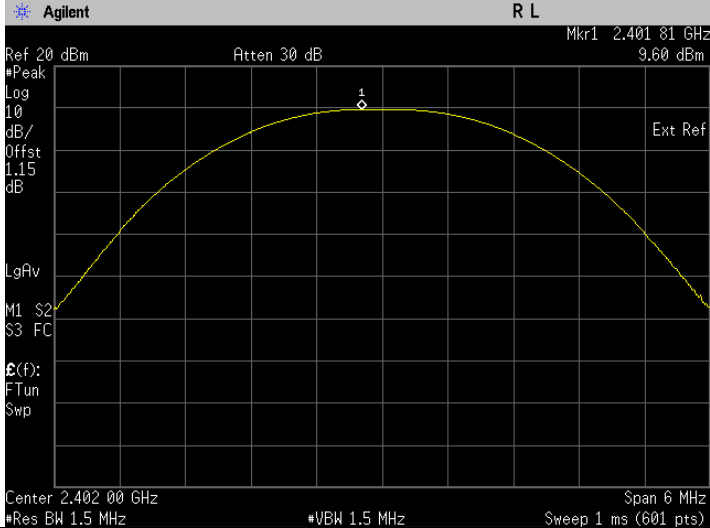


The Conducted RF Output Power test with result at mid frequency, GFSK.

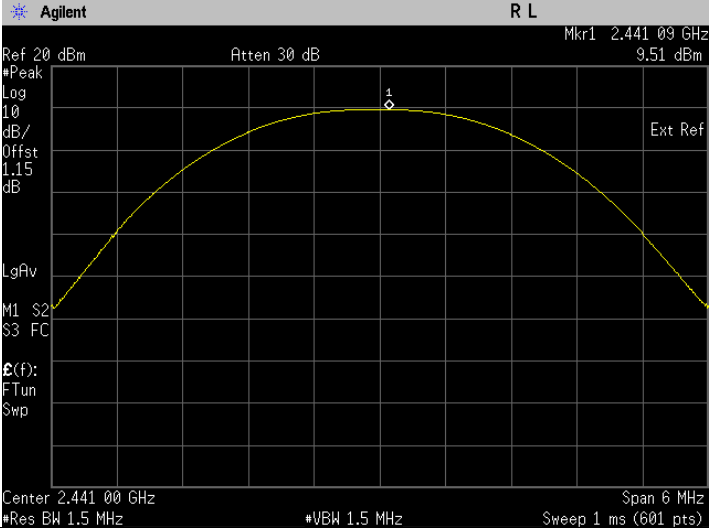


The Conducted RF Output Power test with result at high frequency, GFSK.

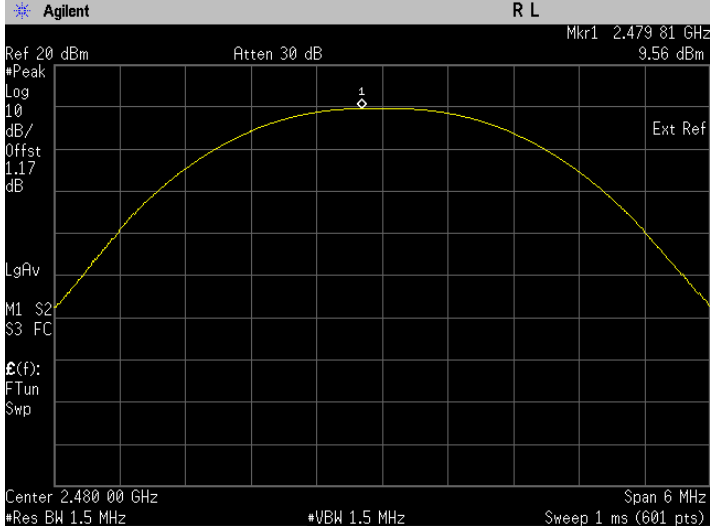


The Conducted RF Output Power test with result at low frequency, Pi/4 DQPSK.

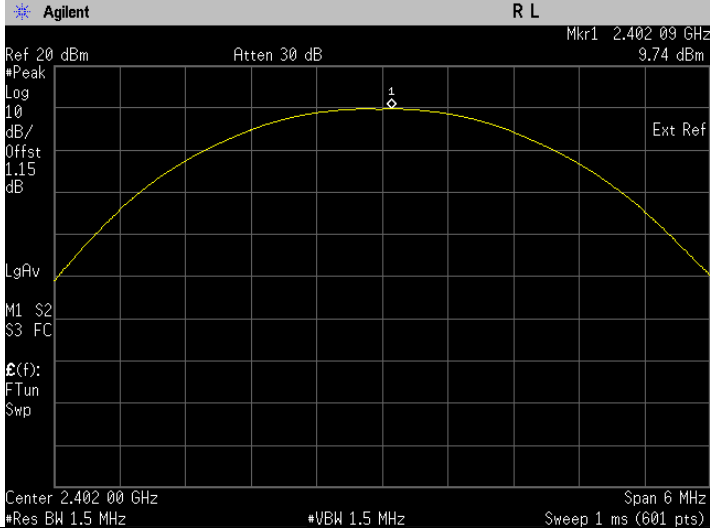


The Conducted RF Output Power test with result at mid frequency, Pi/4 DQPSK.

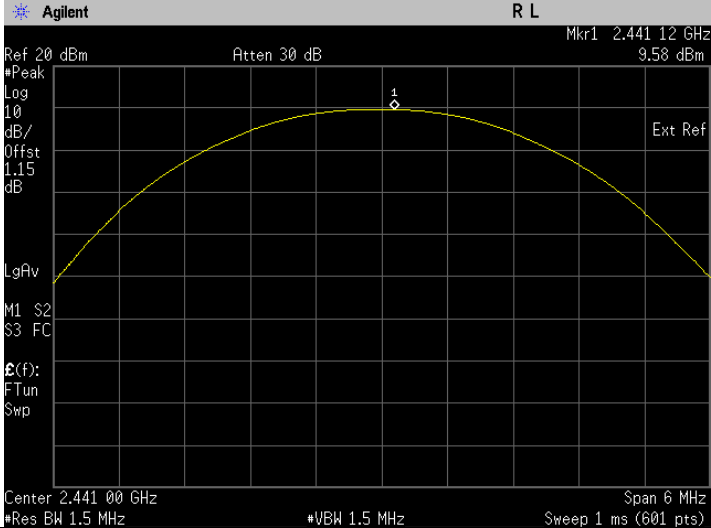


The Conducted RF Output Power test with result at high frequency, Pi/4 DQPSK.

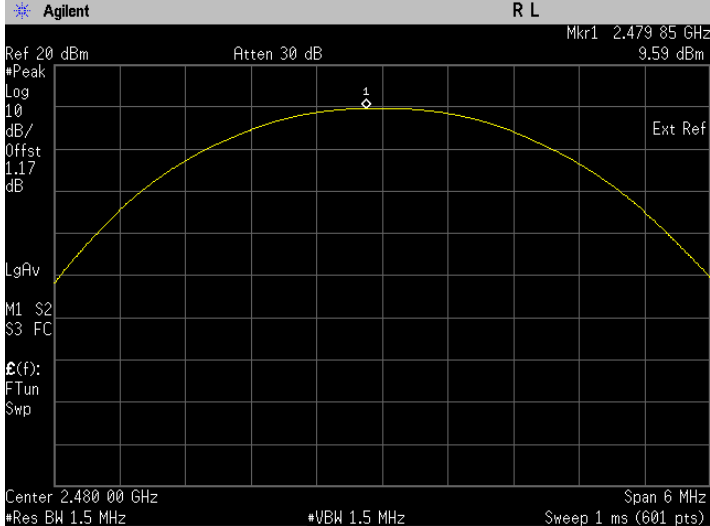


The Conducted RF Output Power test with result at low frequency, 8DPSK.

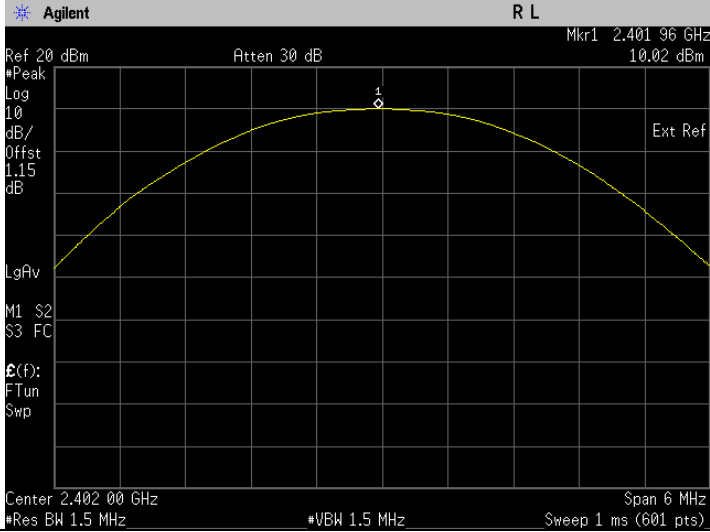

The Conducted RF Output Power test with result at mid frequency, 8DPSK.

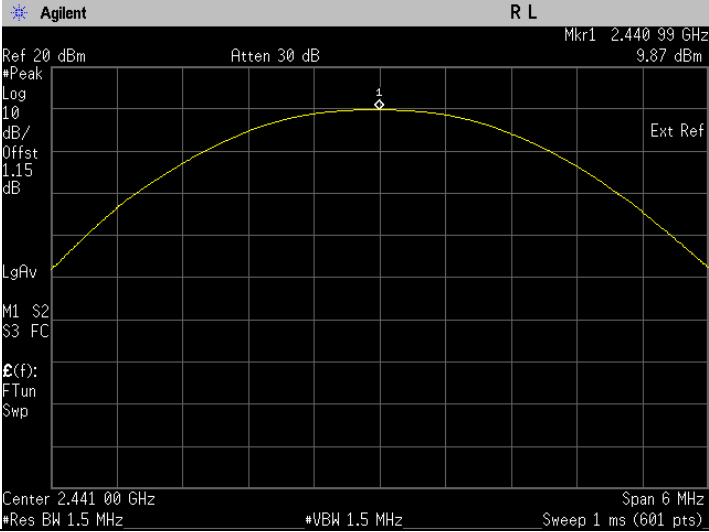


The Conducted RF Output Power test with result at high frequency, 8DPSK.

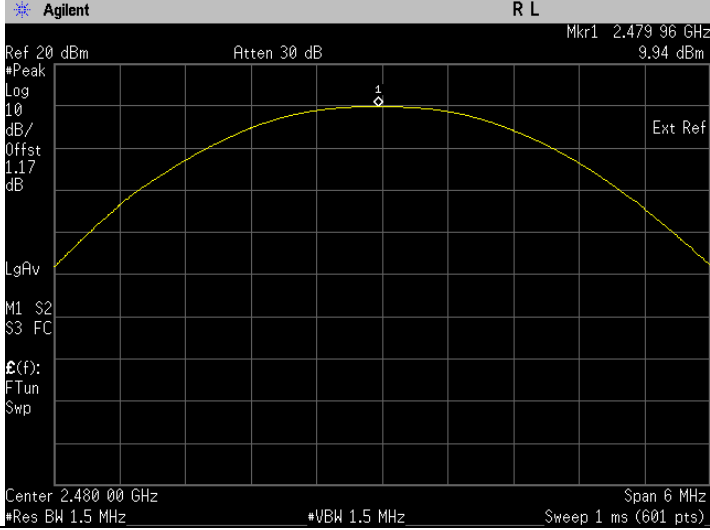

6.2. 20dB Channel Bandwidth

6.2.1. Test Setup




- a) Check and ensure the spectrum analyzer well calibrate.
- b) Turn on the EUT and set EUT to transmit maximum data rate with hopping disable.
- c) Connect EUT's antenna terminal to spectrum analyzer with a low loss cable.
- d) Setting of Spectrum analyzer :
 - a. RBW = 30 kHz
 - b. VBW = 100 kHz
 - c. SPAN = 3 MHz, center on test frequency
 - d. AMPLITUDE → Scale/Div = 10 dB
 - e. Detector mode = Peak
 - f. Trace = Max hold
 - g. Sweep = auto
- e) Measure the freq different of two frequencies that were attenuated 20dB from peak of the emission & record the frequency difference as the emission bandwidth.
- f) Save the plot result from spectrum analyzer screen.
- g) Repeat above procedure with other different mode of operation.


6.2.2. Test Limits:


Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

6.2.3. Test Data:

Test Conditions		Test Frequency TX (GHz)	Results (MHz)		
Modulation Type	Voltage(V)		20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Status
GFSK	7.50	2.4020	0.960	0.858	Pass
		2.4410	0.962	0.858	Pass
		2.4800	0.963	0.863	Pass
Pi/4 DQPSK	7.50	2.4020	1.319	1.169	Pass
		2.4410	1.317	1.169	Pass
		2.4800	1.313	1.170	Pass
8DPSK	7.50	2.4020	1.305	1.172	Pass
		2.4410	1.305	1.173	Pass
		2.4800	1.304	1.172	Pass

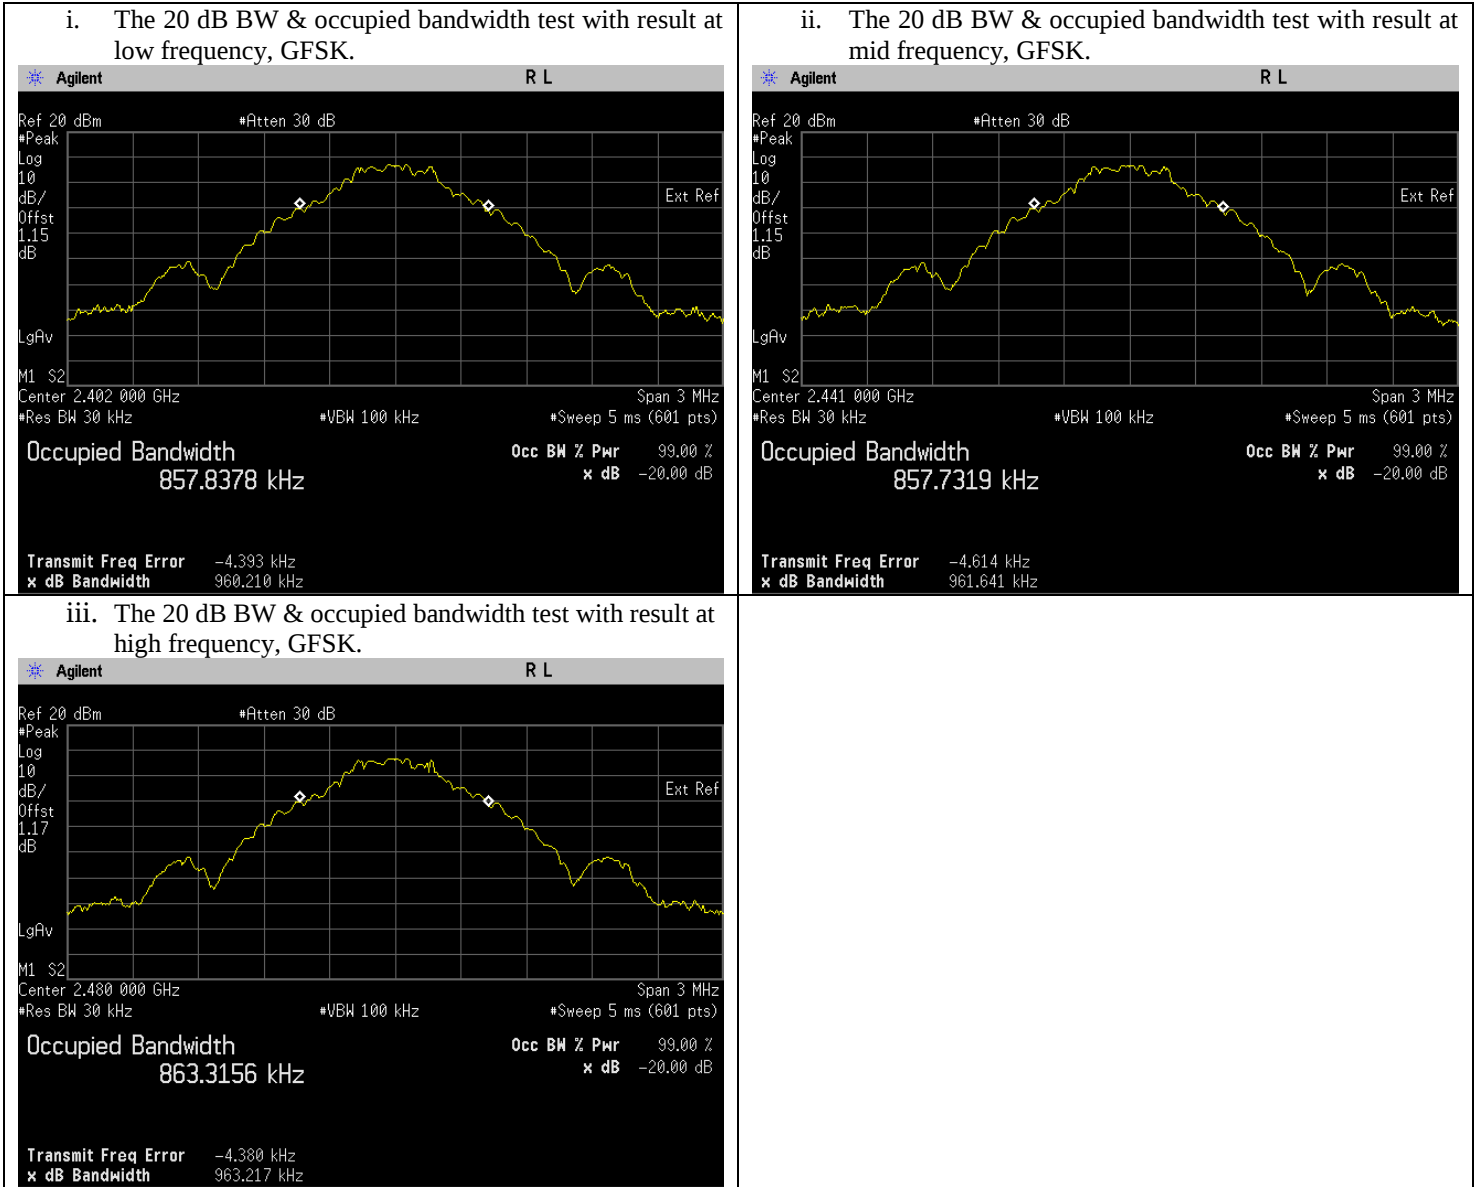


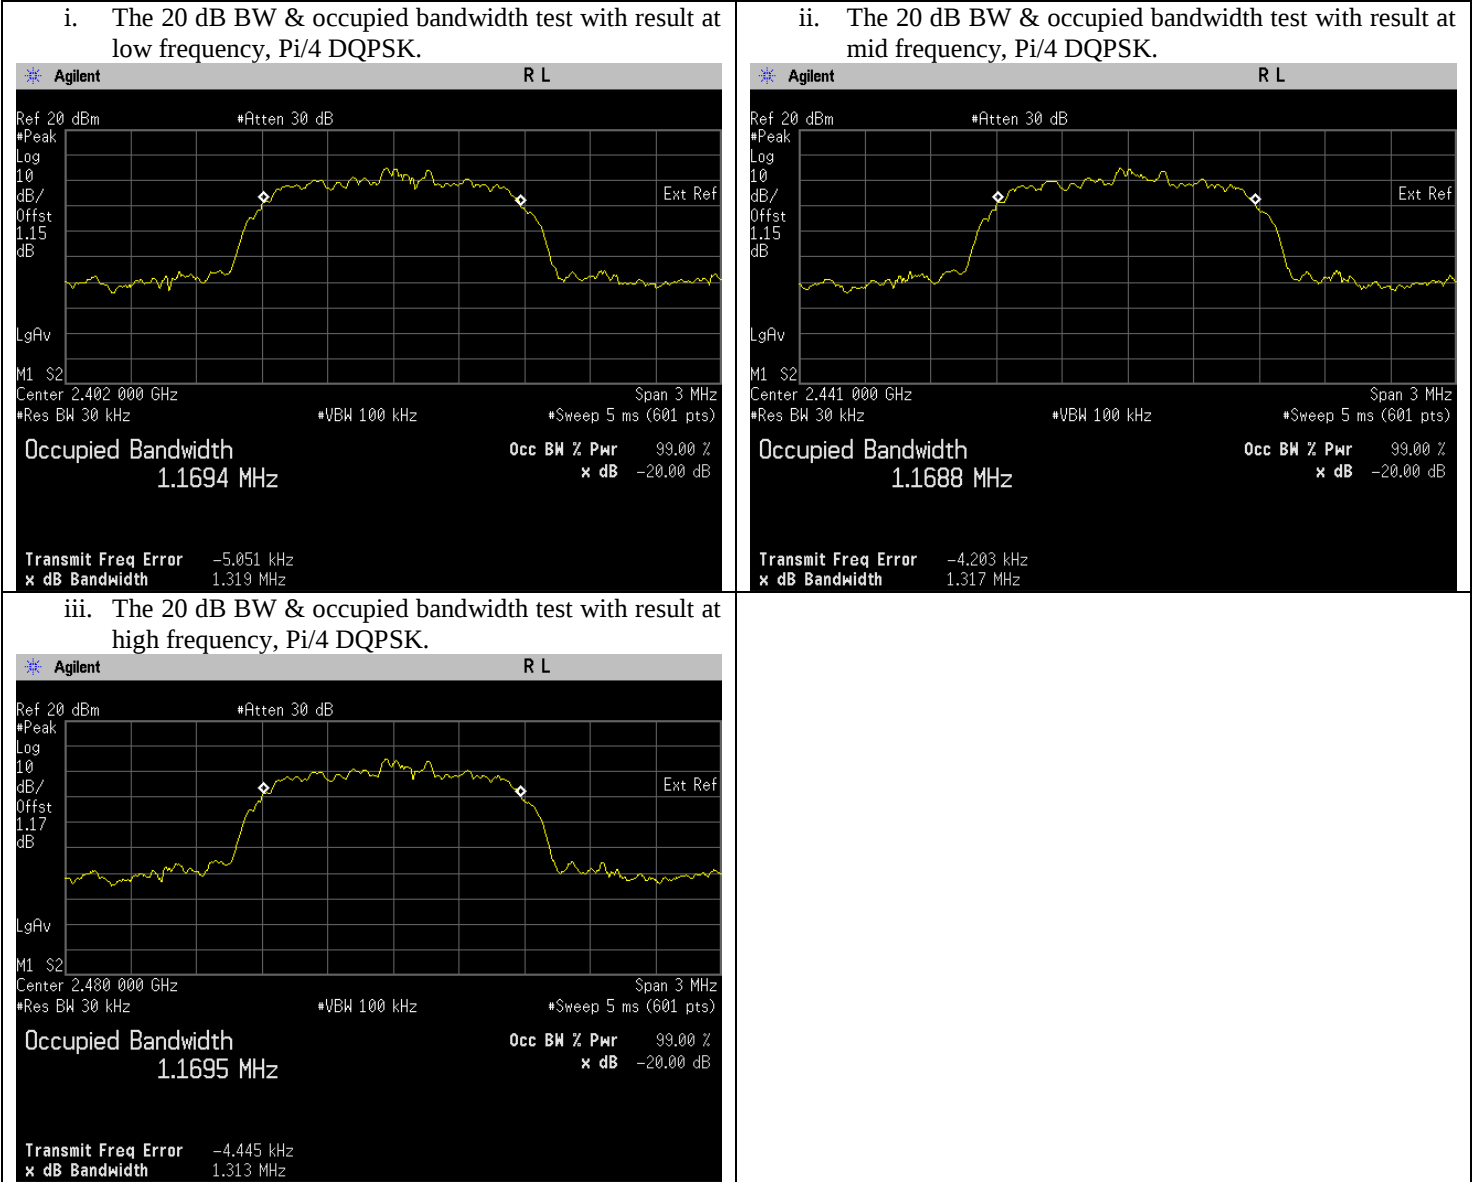

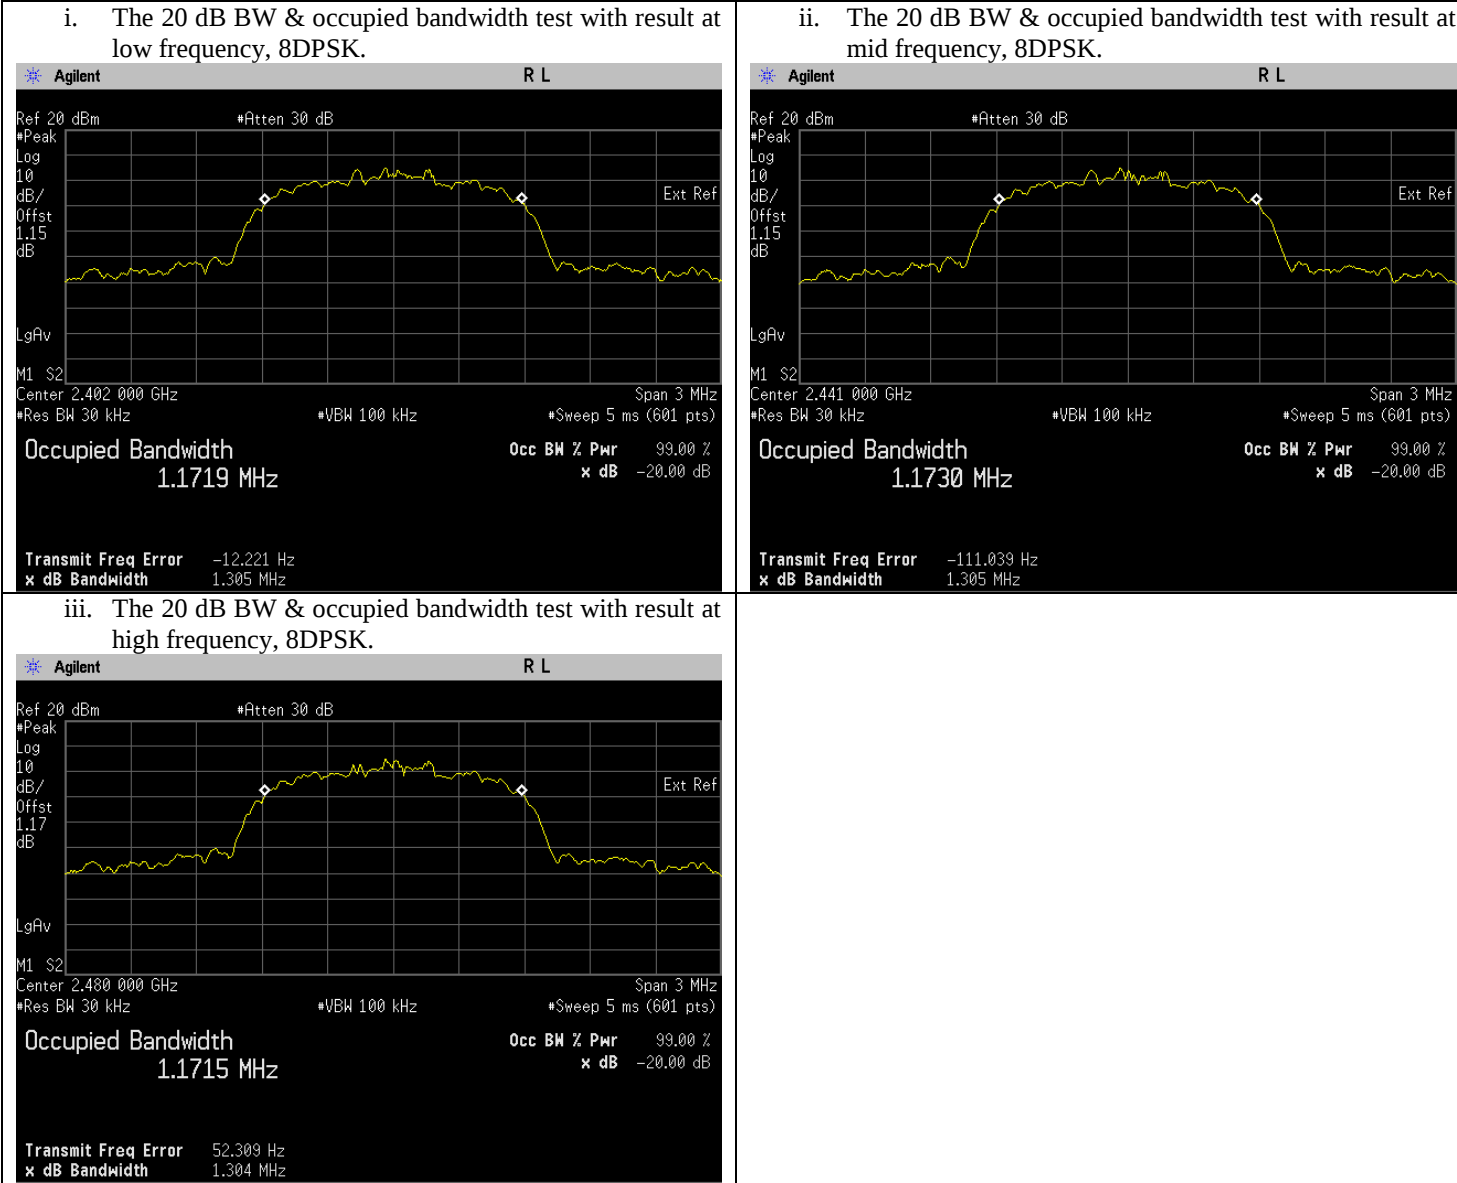

6.3. Band-edge Conducted Spurious Emission

6.3.1. Test Setup



- a) Check and ensure the spectrum analyzer well calibrate.
- b) Turn on the EUT and keep the EUT in hopping mode.
- c) Connect EUT's antenna terminal to spectrum analyzer with a low loss cable.
- d) Setting of Spectrum analyzer :
 - a. RBW = 100 kHz
 - b. VBW = 300 kHz
 - c. SPAN = 4 MHz (Low channel) or 6MHz(High Channel)
 - d. Detector mode = Peak
 - e. AMPLITUDE → Scale/Div = 10 dB
 - f. Trace = Max hold
 - g. Sweep = auto
- e) Measure the captured band edge emission result and recording the plot.
- f) Repeat above on EUT with hopping disable.
- g) Repeat above procedure with other different test frequency.


6.3.2. Test Limits

Normal Condition (25 ° C)
Shall be at least 20 dB below the peak power.


6.3.3. Test Result

Test Conditions		Hopping Method	Test Frequency(GHz)	Results	
Modulation	Voltage(V)			dB	Status
GFSK	7.50	Enabled (continuously)	2.4020	-50.38	Pass
			2.4800	-54.15	Pass
		Disabled (constantly)	2.4020	-49.03	Pass
			2.4800	-54.91	Pass
Pi/4 DQPSK	7.50	Enabled (continuously)	2.4020	-51.68	Pass
			2.4800	-58.47	Pass
		Disabled (constantly)	2.4020	-48.82	Pass
			2.4800	-55.22	Pass
8DPSK	7.50	Enabled (continuously)	2.4020	-48.89	Pass
			2.4800	-57.20	Pass
		Disabled (constantly)	2.4020	-44.93	Pass
			2.4800	-52.42	Pass


i. The highest band edge emission at low carrier frequency with hopping function enabled, GFSK

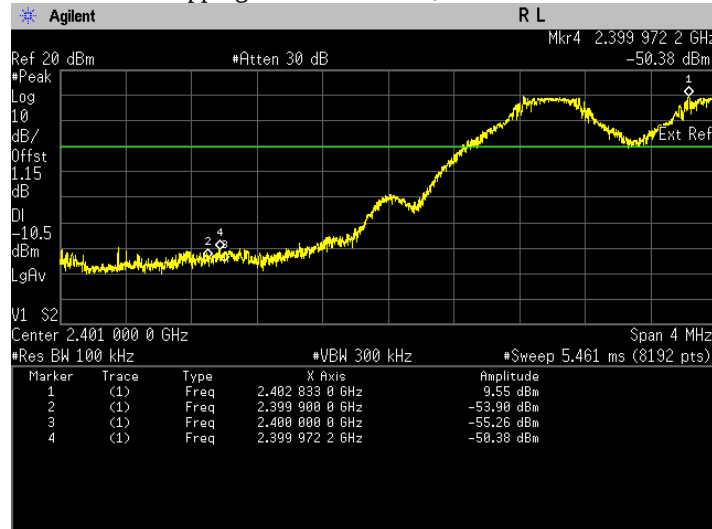


ii. The highest band edge emission at high carrier frequency with hopping function enabled, GFSK

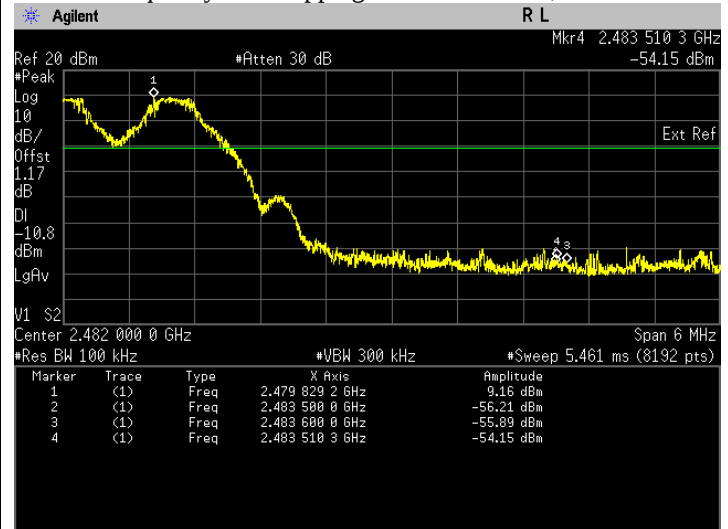


iii. The highest band edge emission at low carrier frequency with hopping function disabled, GFSK

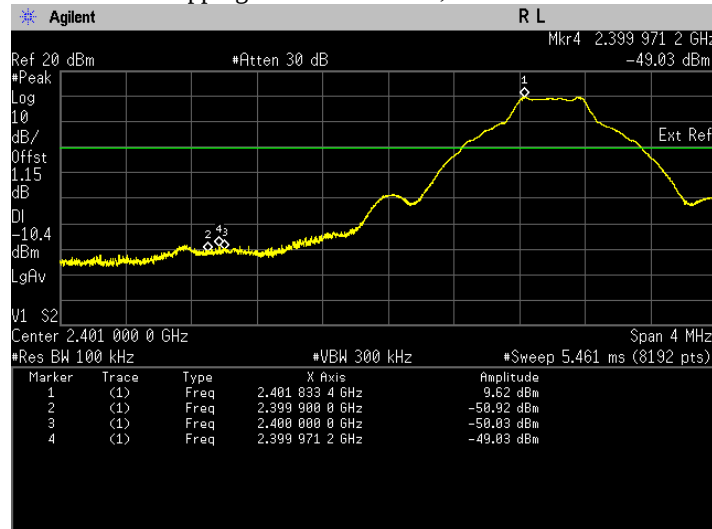


iv. The highest band edge emission at high carrier frequency with hopping function disabled, GFSK

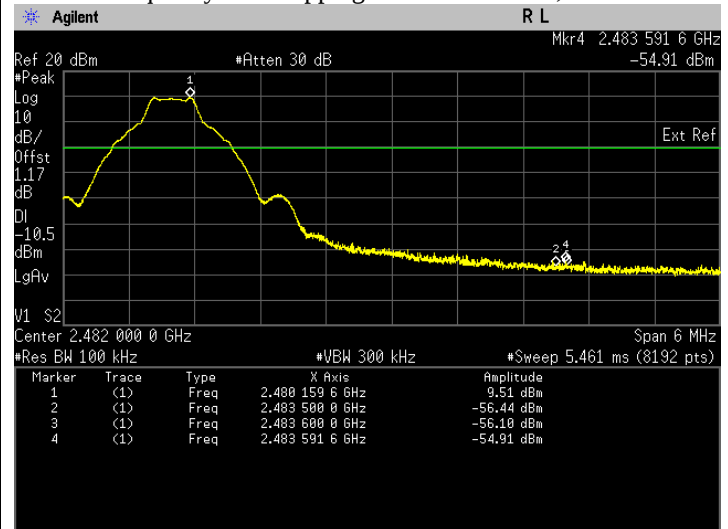


i. The highest band edge emission at low carrier frequency with hopping function enabled, Pi/4 DQPSK

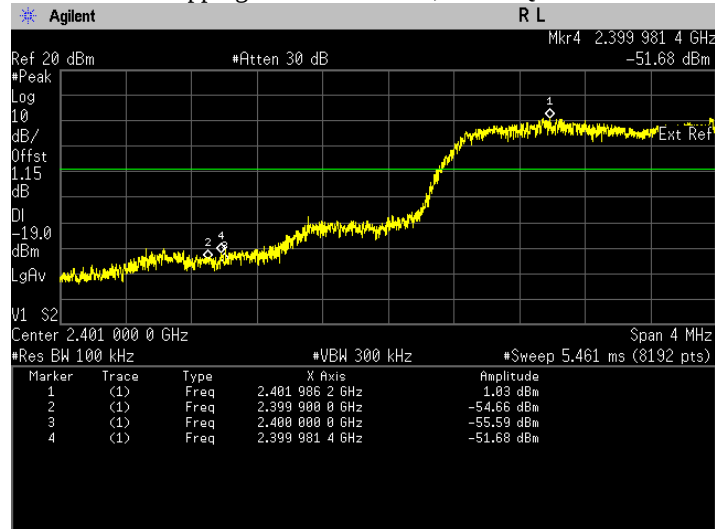


ii. The highest band edge emission at high carrier frequency with hopping function enabled, Pi/4 DQPSK

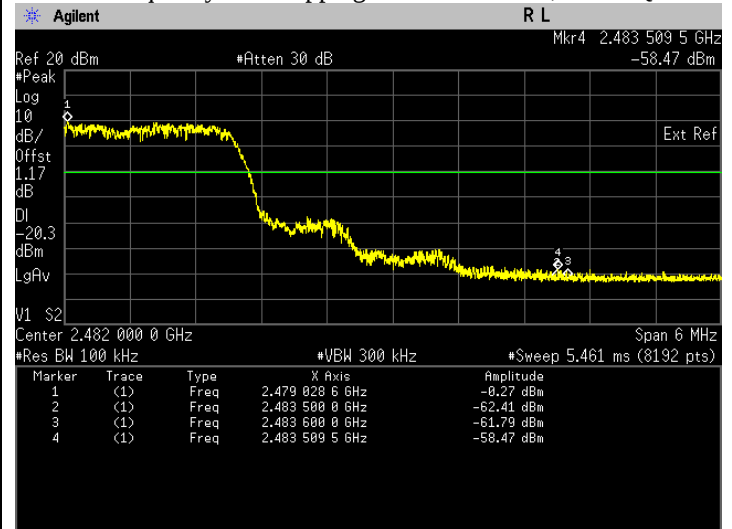


iii. The highest band edge emission at low carrier frequency with hopping function disabled, Pi/4 DQPSK

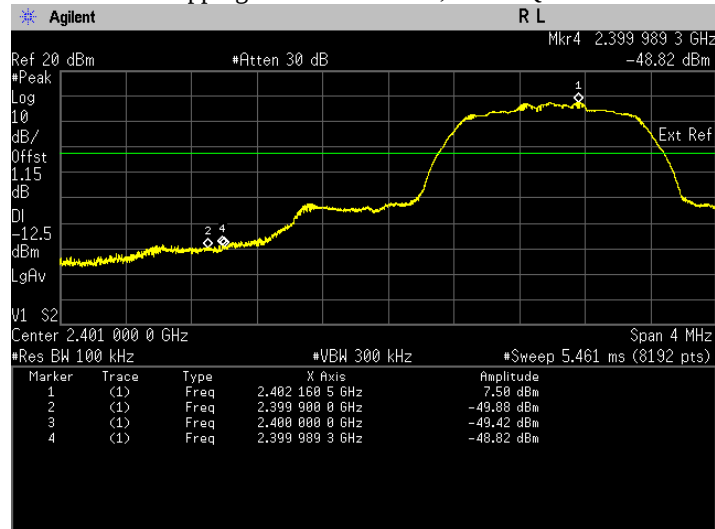


iv. The highest band edge emission at high carrier frequency with hopping function disabled, Pi/4 DQPSK

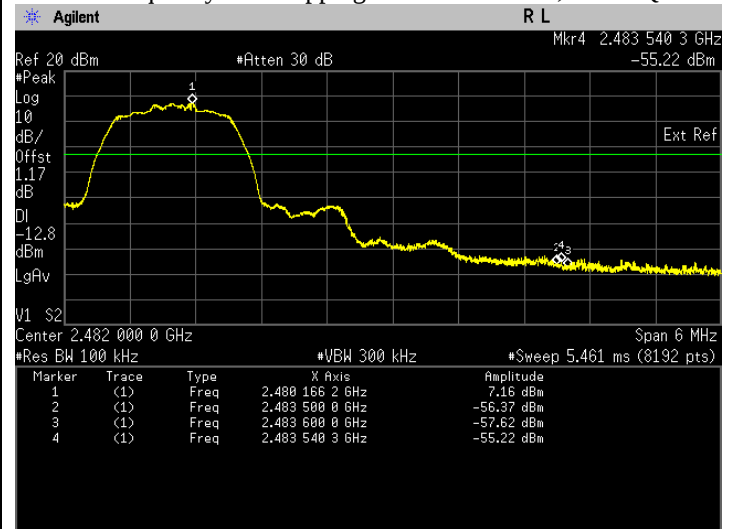


i. The highest band edge emission at low carrier frequency with hopping function enabled, 8DPSK

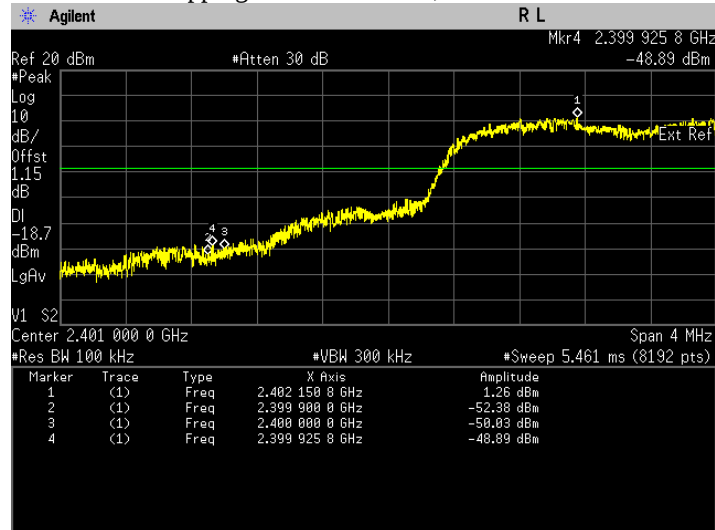


ii. The highest band edge emission at high carrier frequency with hopping function enabled, 8DPSK

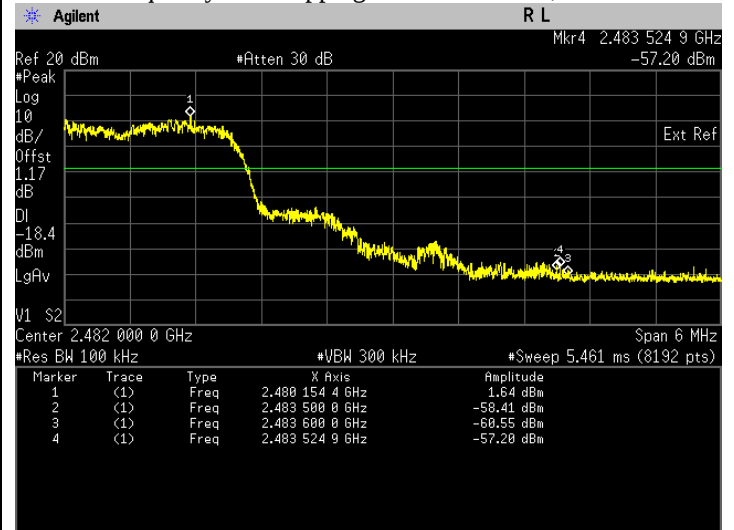

iii. The highest band edge emission at low carrier frequency with hopping function disabled, 8DPSK

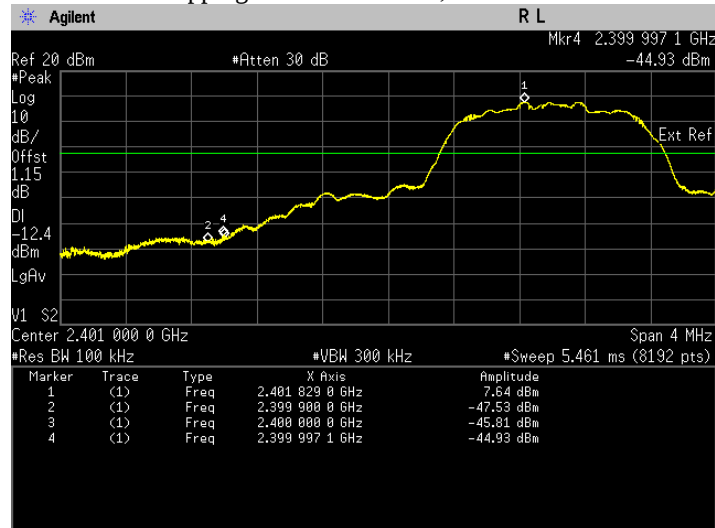


iv. The highest band edge emission at high carrier frequency with hopping function disabled, 8DPSK

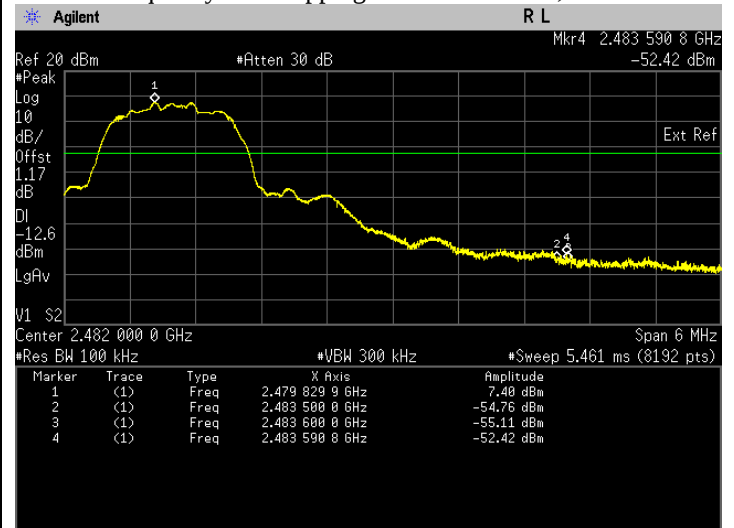

6.4. Dwell time on each channel

6.4.1. Test Setup



- a) Check and ensure the spectrum analyzer well calibrate.
- b) Turn on the EUT and keep the EUT in hopping mode.
- c) Connect EUT's antenna terminal to spectrum analyzer with a low loss cable.
- d) Setting of Spectrum analyzer :
 - a. RBW = 100 kHz
 - b. VBW = 300 kHz
 - c. SPAN = Zero SPAN, center on hopping frequency
 - d. Detector mode = Peak
 - e. Trace = Max hold
 - f. Sweep time = 5second
 - g. Sweep = Single
- e) Measure total numbers of transmissions occur in 5 second and save the plot.
- f) Change the setting of spectrum analyzer :
 - a. RBW = 100 kHz
 - b. VBW = 300 kHz
 - c. Sweep time = sufficient to capture dwell time for 1 transmission
 - d. Sweep = Single
- g) Measure dwell time for 1 transmission and save the plot.
- h) Calculate accumulate dwell time in a given period equal to number of hopping frequencies x 0.4
- i) Repeat above procedure with other different mode of operation.

6.4.2. Test Limits:


Normal Condition (25 ° C)
$\leq 400\text{ms}$

6.4.3. Test Result


Test Conditions			Data Package	Results			
Modulation	Voltage (V)	Test Frequency (GHz)		No. of transmiss ion in 5s (a)	Dwell time in one transmission (b) (msec)	Total accumulate dwell time in 31.6s. (c) (msec)	Status
GFSK	7.50	2.4410	DH1	51	0.399	128.605680	Pass
			DH3	22	1.654	229.972160	Pass
			DH5	18	2.903	330.245280	Pass
Pi/4 DQPSK	7.50		DH1	49	0.401	124.181680	Pass
			DH3	23	1.653	240.280080	Pass
			DH5	19	2.900	348.232000	Pass
8 DPSK	7.50		DH1	50	0.398	125.768000	Pass
			DH3	29	1.651	302.595280	Pass
			DH5	12	2.901	220.011840	Pass

****Note:** Total dwell time 31.6s (79Hopping*0.4), (c) = (a) x 6.32 x (b)


i. Dwell Time at DH1, GFSK

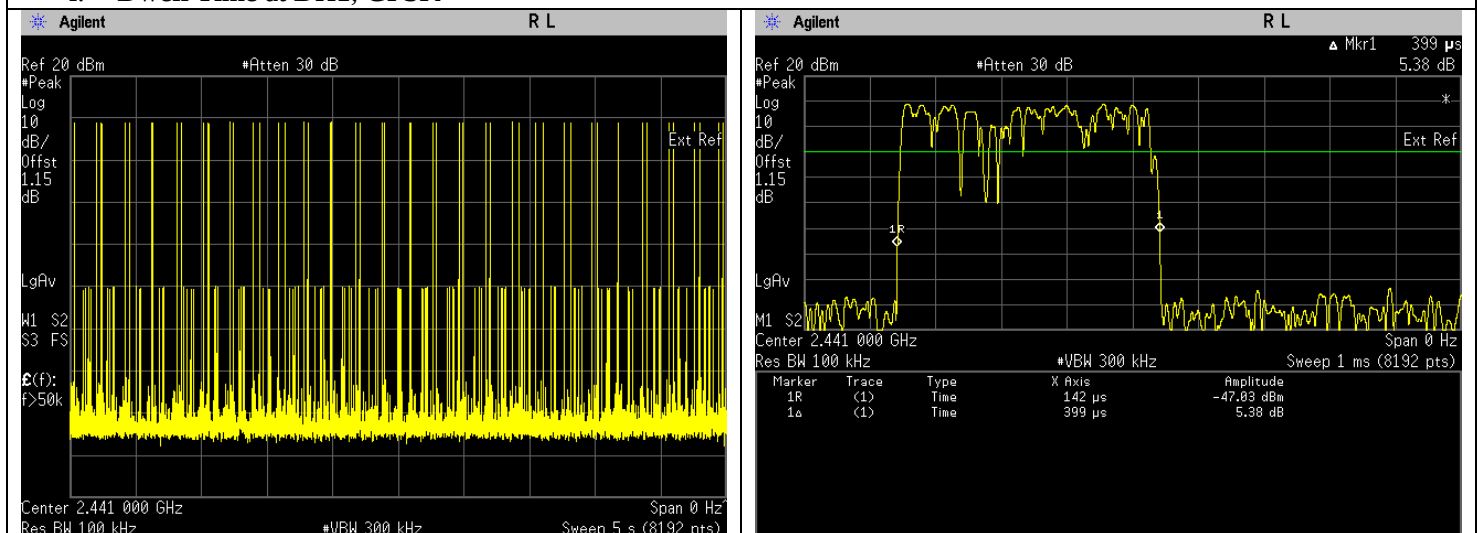


ii. Dwell Time at DH3, GFSK

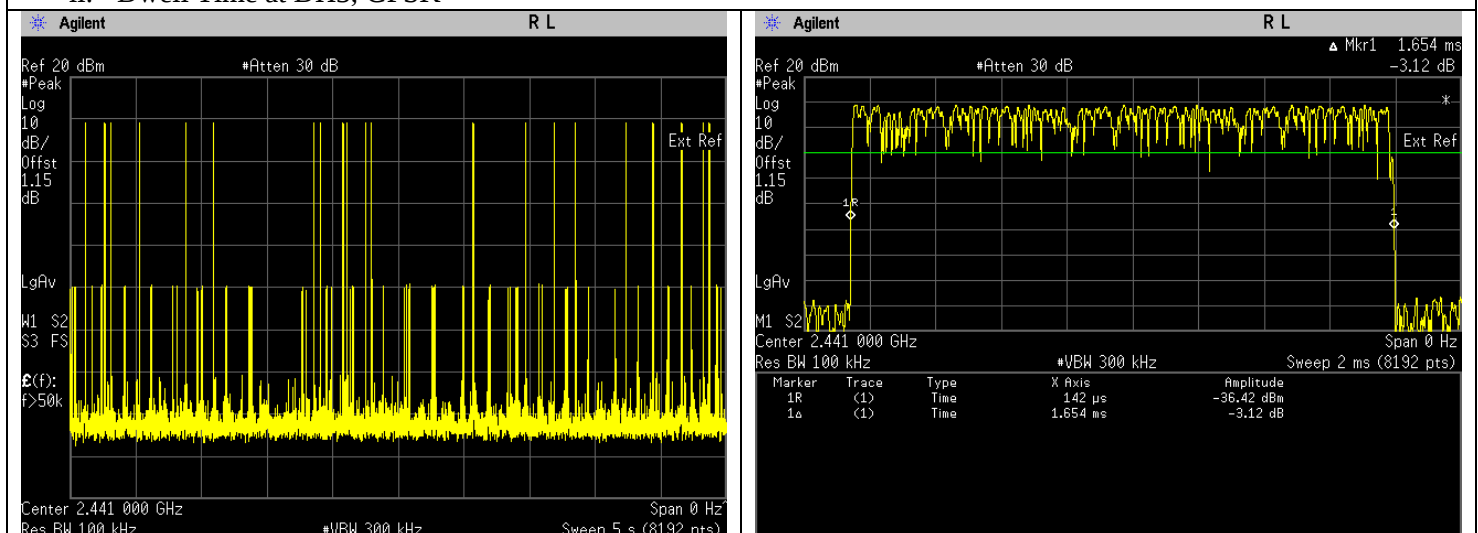


iii. Dwell Time at DH5, GFSK

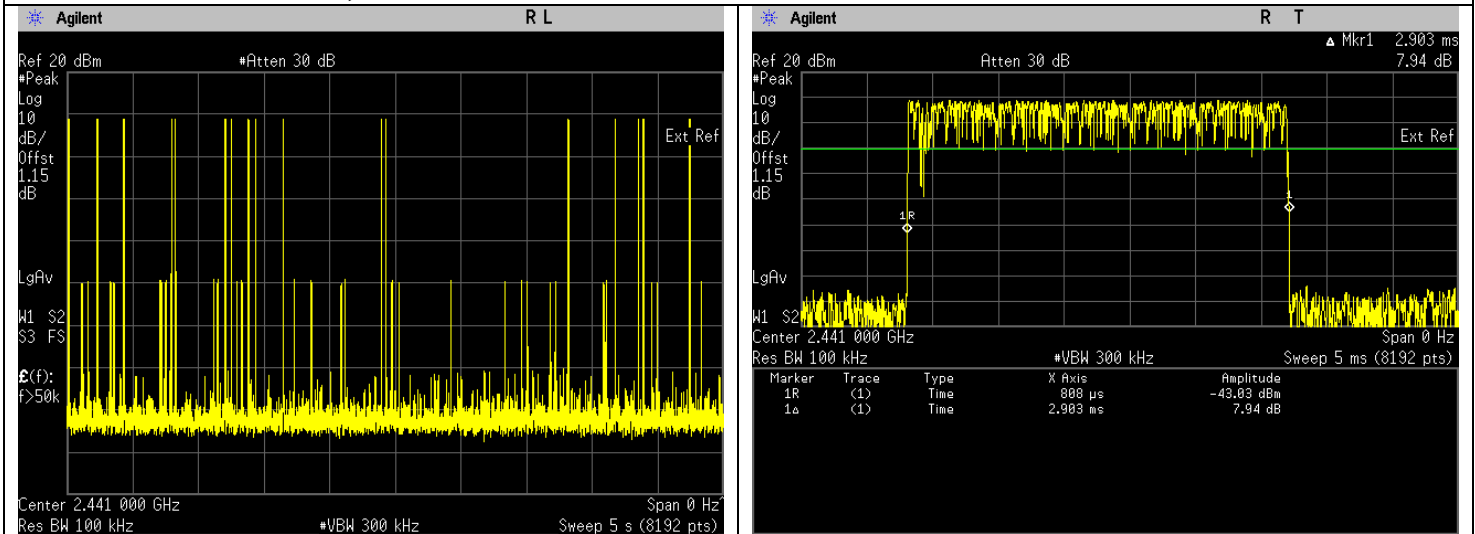


iv. Dwell Time at DH1, PI/4DQPSK

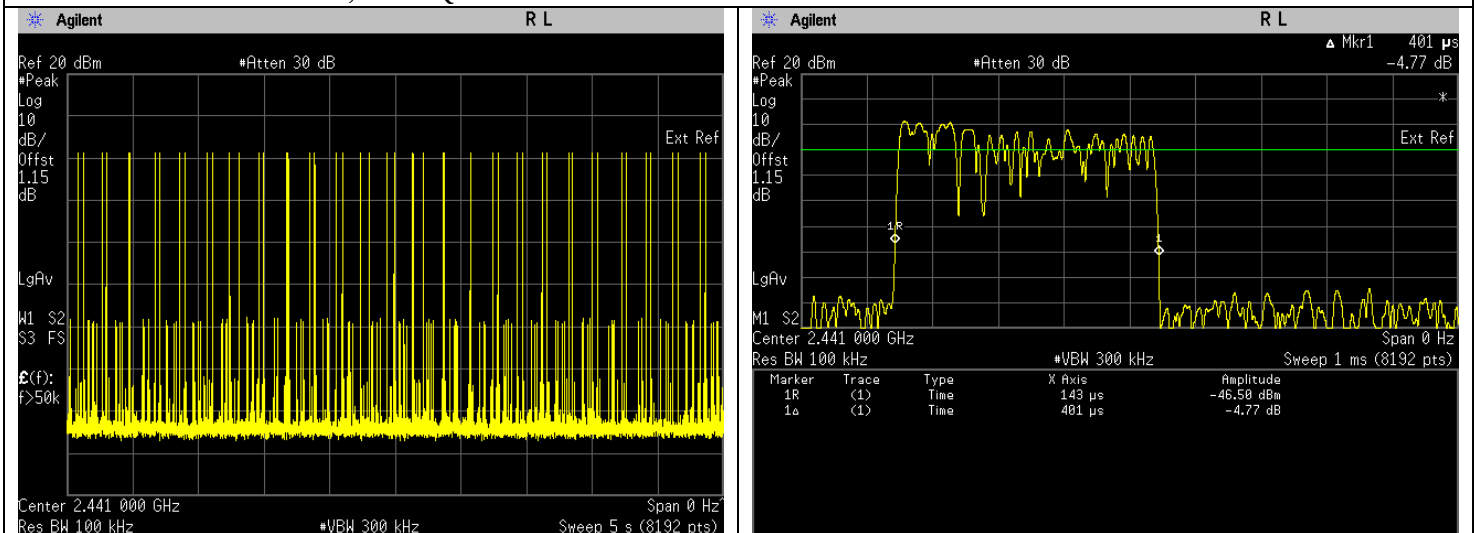


v. Dwell Time at DH3, PI/4DQPSK

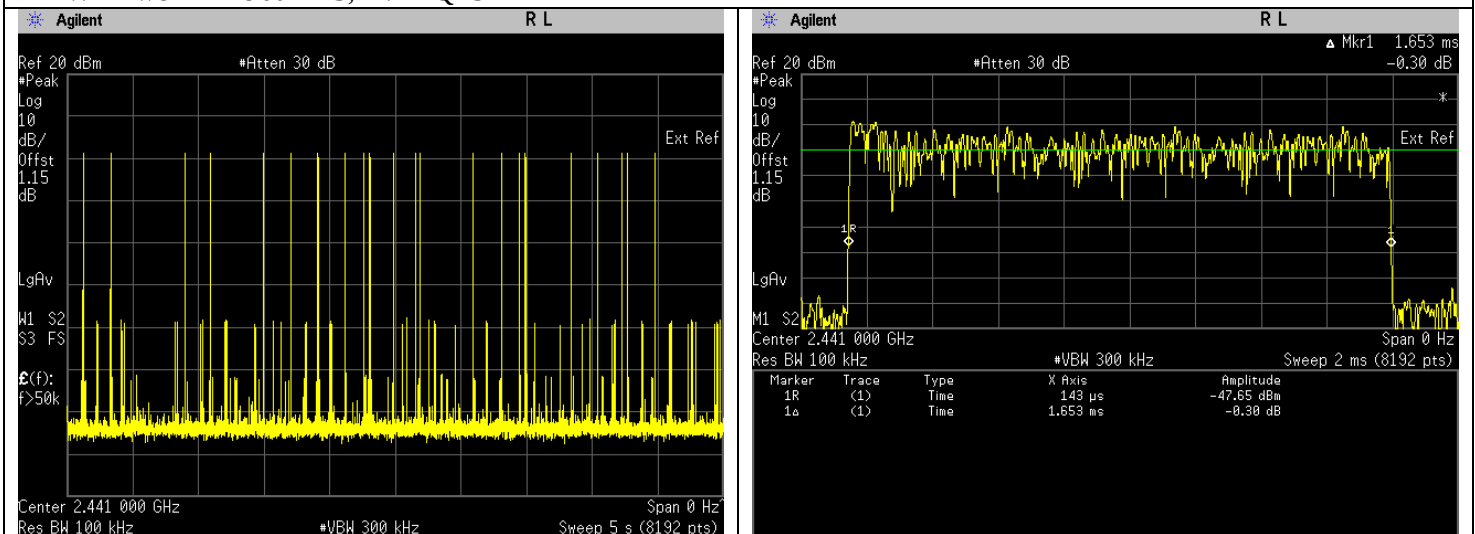


vi. Dwell Time at DH5, PI/4DQPSK

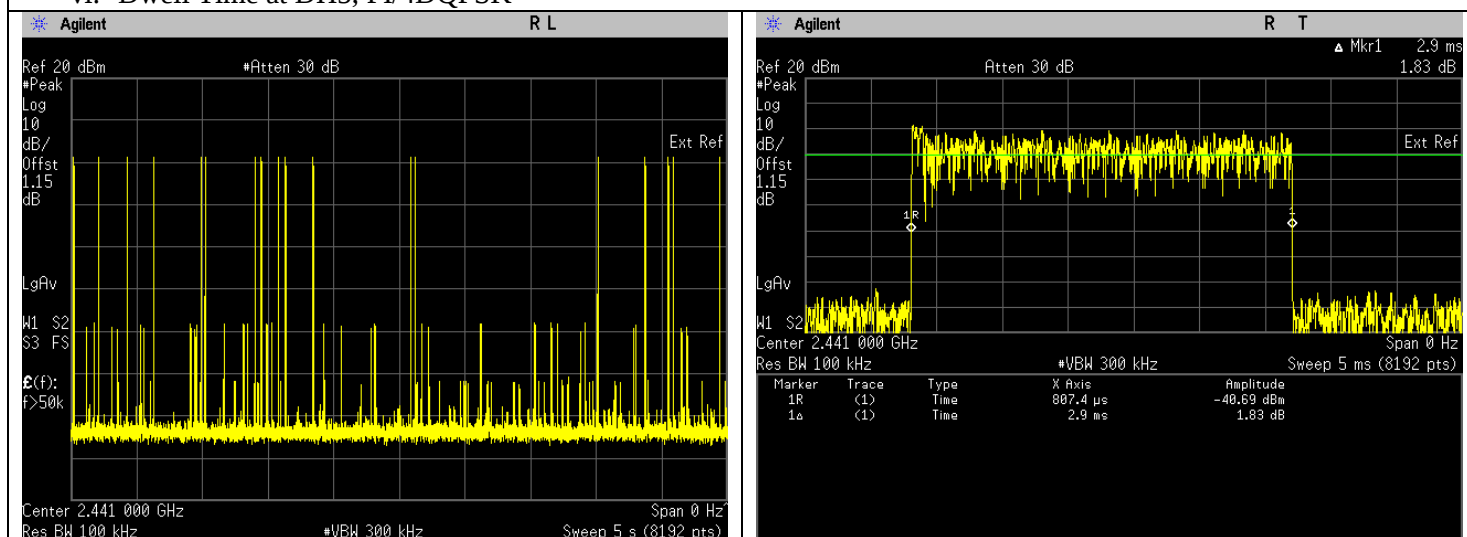


vii. Dwell Time at DH1, 8DQPSK

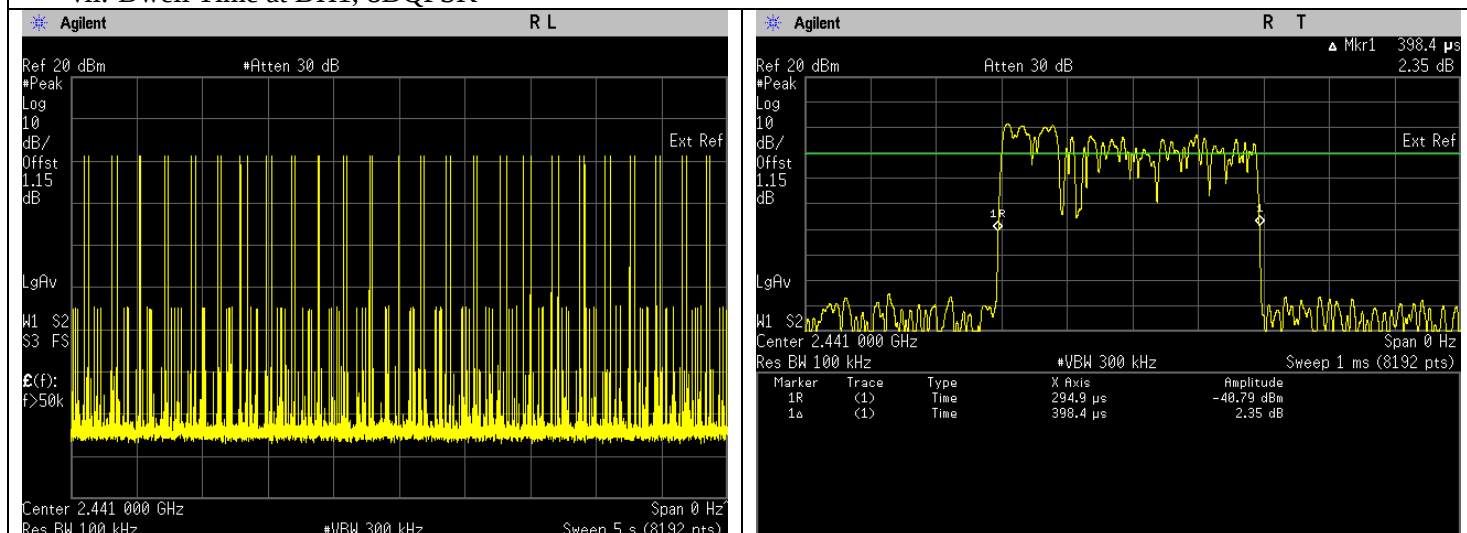


viii. Dwell Time at DH3, 8DQPSK

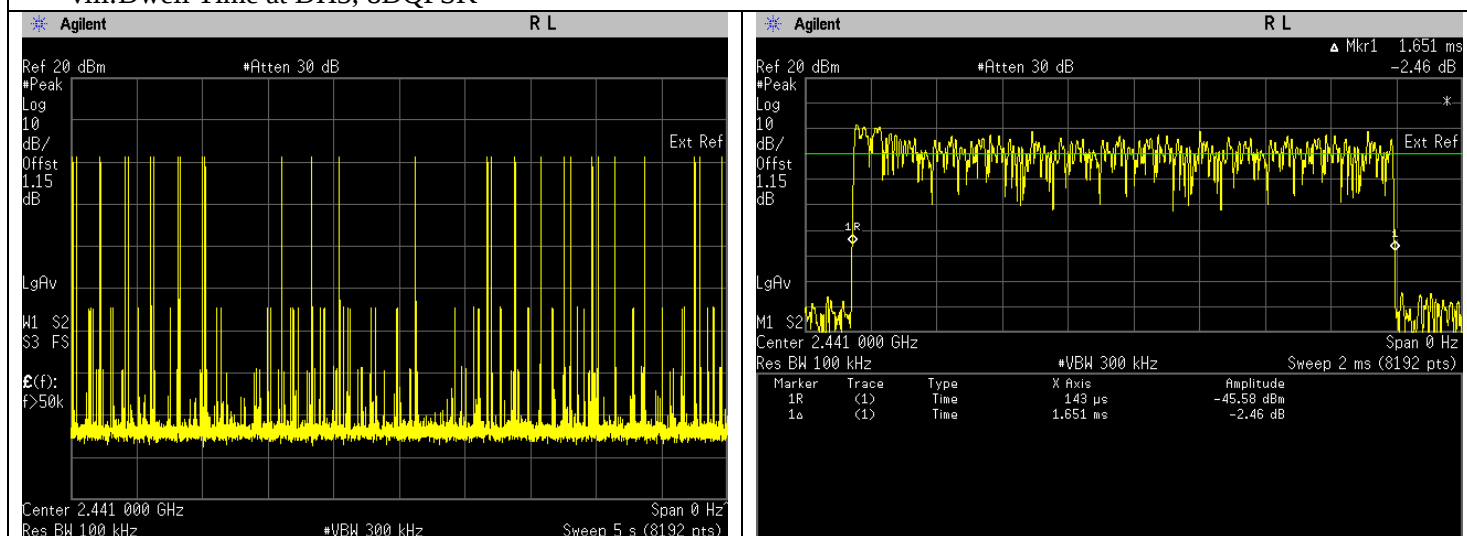

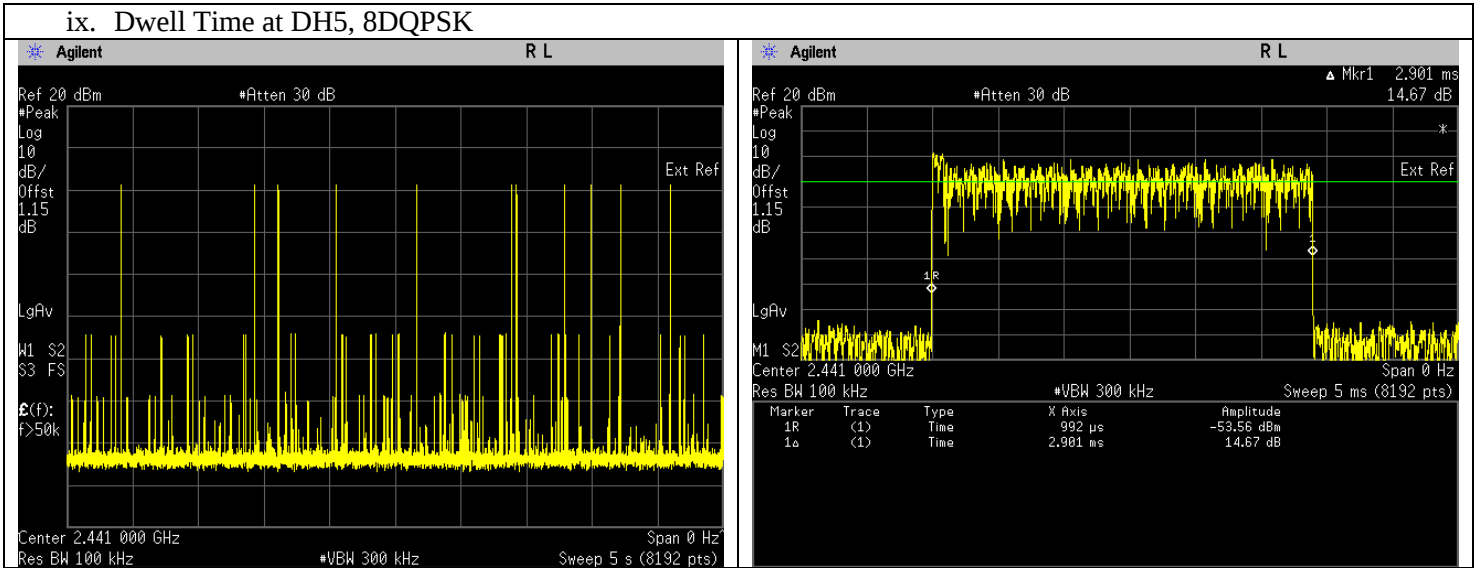

6.5. Number of hopping Frequency

6.5.1. Test Setup




- a) Check and ensure the spectrum analyzer well calibrate.
- b) Turn on the EUT and keep the EUT in hopping mode.
- c) Connect EUT's antenna terminal to spectrum analyzer with a low loss cable.
- d) Setting of Spectrum analyzer :
 - a. RBW = 300 kHz
 - b. VBW = 300 kHz
 - c. Detector mode = Peak
 - d. Trace = Max hold
- e) Allow the trace to stabilized & save the plot result from spectrum analyzer screen.
- f) Count number of channel frequency in the operating.
- g) Repeat above procedure for other test frequency.

6.5.2. Test Limits:

Normal Condition (25 ° C)
≥ 15


6.5.3. Test Result

Test Conditions		Sweep Range (GHz)	Results	
Modulation	Voltage(V)		No. of Hopping Frequencies	Status
GFSK	7.50	2.4000-2.4835	79	Pass
Pi/4DQPSK	7.50	2.4000-2.4835	79	Pass
8DPSK	7.50	2.4000-2.4835	79	Pass

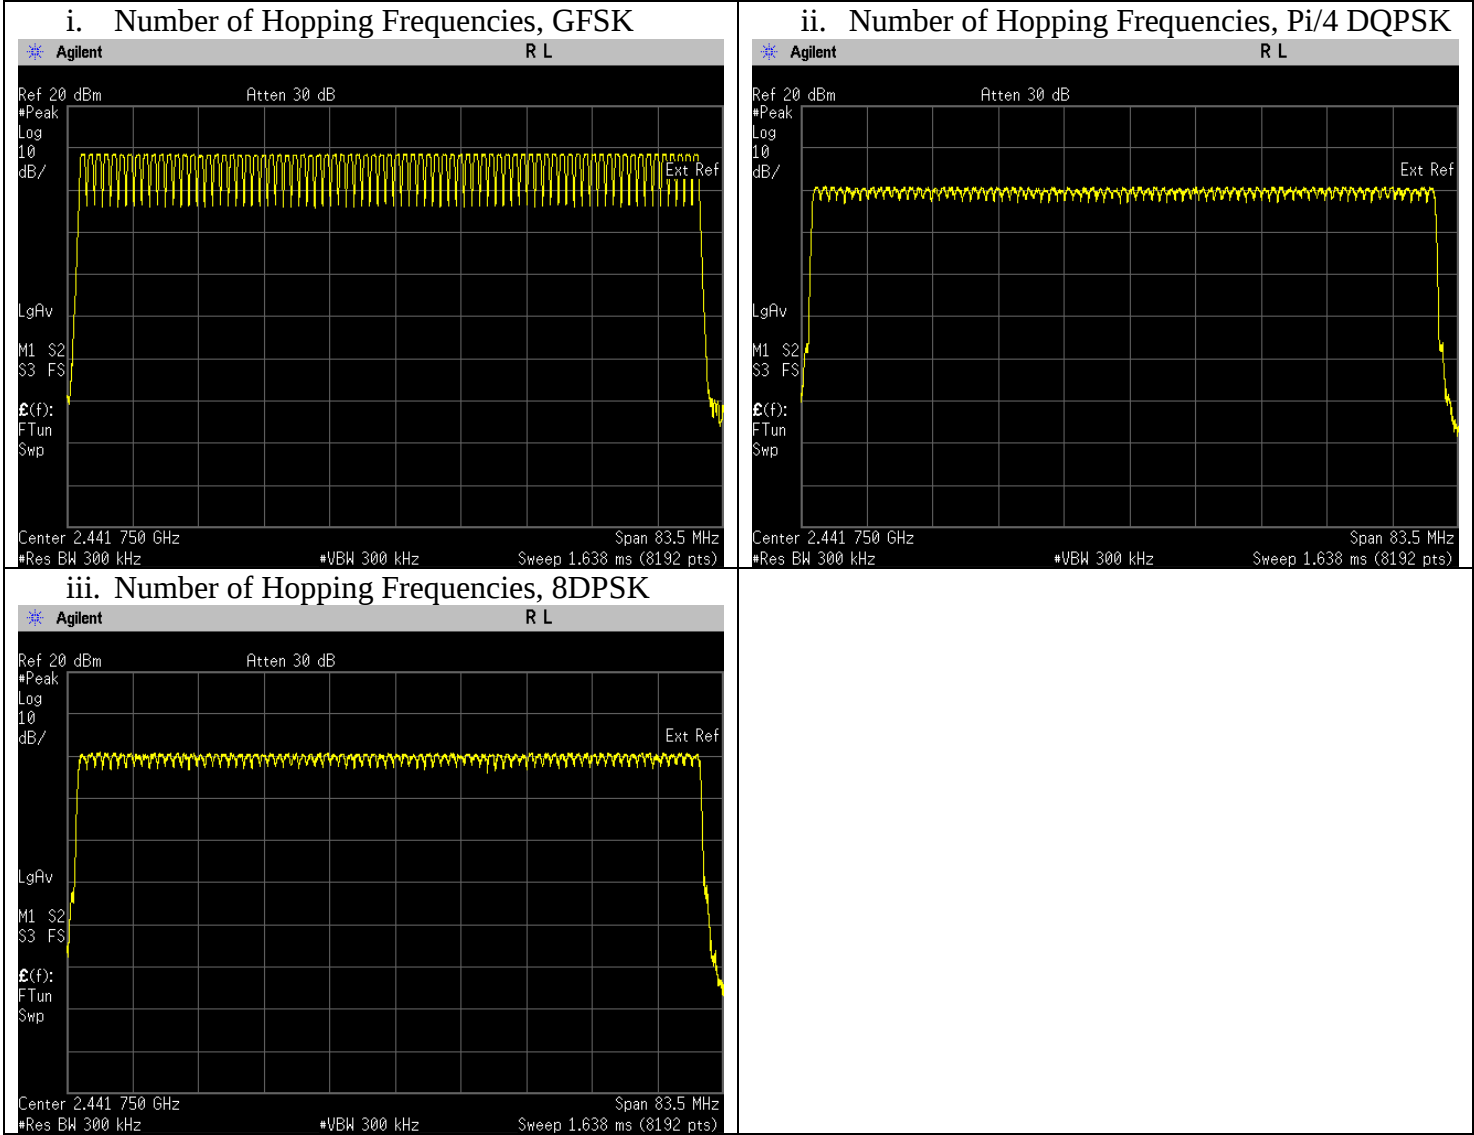

6.6. Channel Separation

6.6.1. Test Setup



- Check and ensure the spectrum analyzer well calibrate.
- Turn on the EUT and keep the EUT in hopping mode.
- Connect EUT's antenna terminal to spectrum analyzer with a low loss cable.
- Setting of Spectrum analyzer :
 - RBW = 300 kHz
 - VBW = 300 kHz
 - SPAN = 3 MHz, center on test frequency
 - AMPLITUDE → Scale/Div = 5 dB
 - Detector mode = Peak
 - Trace = Max hold
 - Sweep = auto
- Measure the frequency different of these two adjacent channels with marker delta function & record the measurement results.
- Repeat above procedure with other different mode of operation.


6.6.2. Test Limits:

Normal Condition (25 ° C)
≥ 2/3 of 20dB Bandwidth


6.6.3. Test Result

Test Conditions		Test Frequency (GHz)	Results			
Modulation	Voltage(V)		Test Data Adjacent Channel Separation (MHz)	20dB Bandwidth (MHz)	Min Limit = 2/3 of 20dB Bandwidth (kHz)	Status
GFSK	7.50	2.4020	1.000	0.960	640.000	Pass
		2.4410	0.995	0.962	641.333	Pass
		2.4800	0.995	0.963	642.000	Pass
Pi/4DQPSK	7.50	2.4020	1.000	1.319	879.333	Pass
		2.4410	0.994	1.317	878.000	Pass
		2.4800	0.994	1.313	875.333	Pass
8DPSK	7.50	2.4020	0.992	1.305	870.000	Pass
		2.4410	1.000	1.305	870.000	Pass
		2.4800	1.000	1.304	869.333	Pass


The Conducted RF Output Power test with result at low frequency,GFSK.

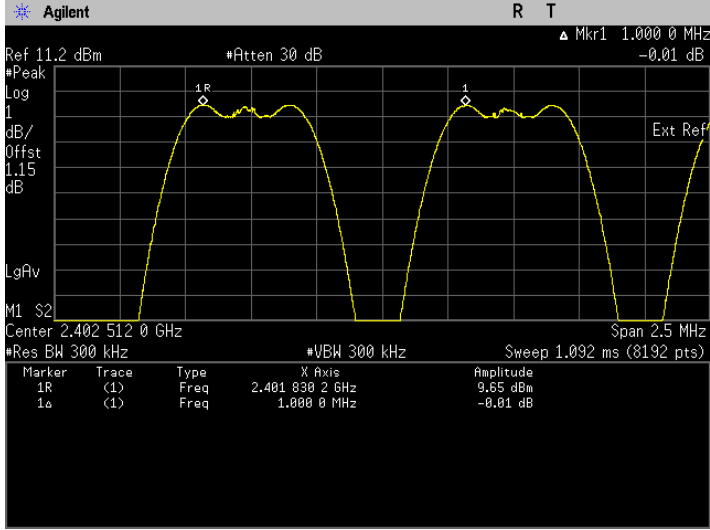


The Conducted RF Output Power test with result at mid frequency, GFSK.

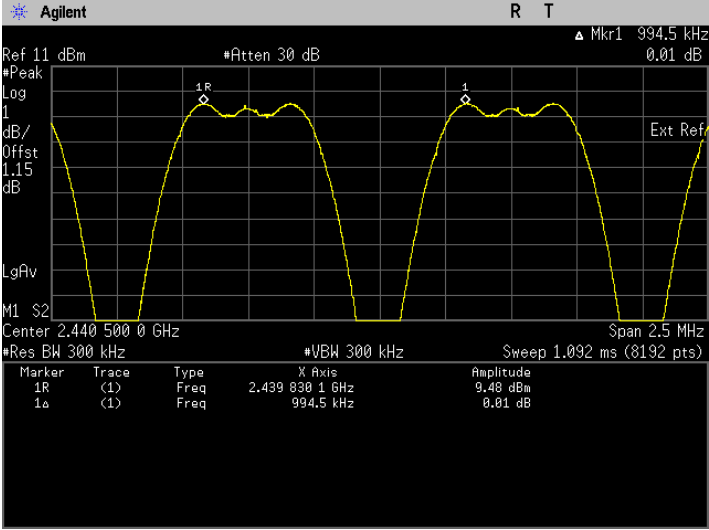


The Conducted RF Output Power test with result at high frequency, GFSK.

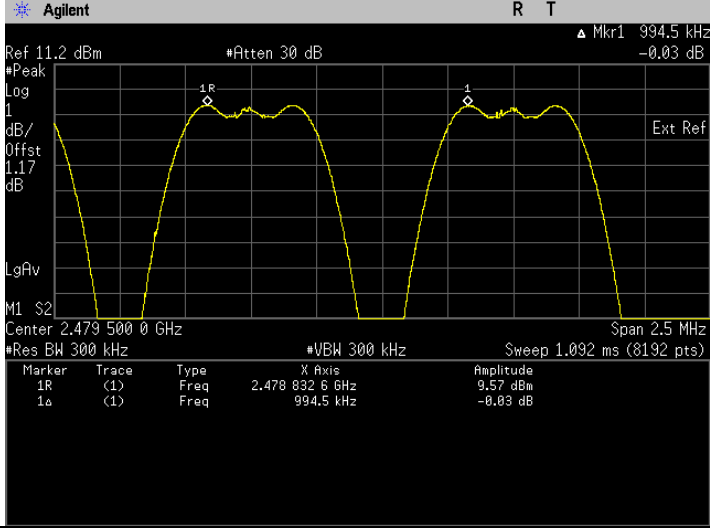


The Conducted RF Output Power test with result at low frequency, Pi/4 DQPSK.

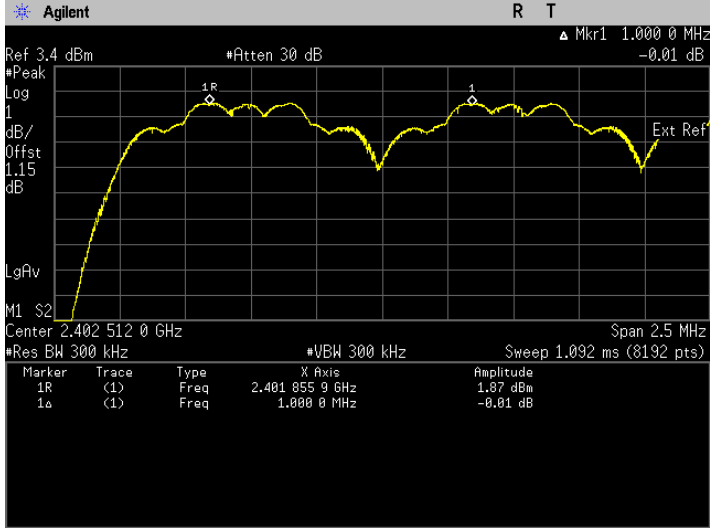


The Conducted RF Output Power test with result at mid frequency, Pi/4 DQPSK.

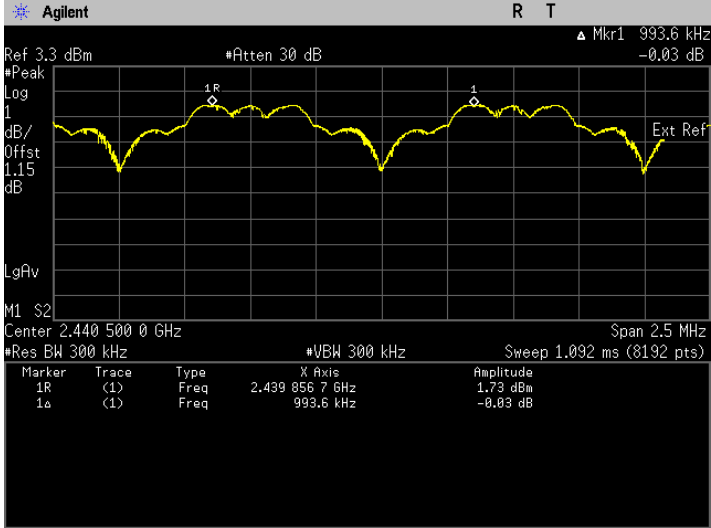


The Conducted RF Output Power test with result at high frequency, Pi/4 DQPSK.

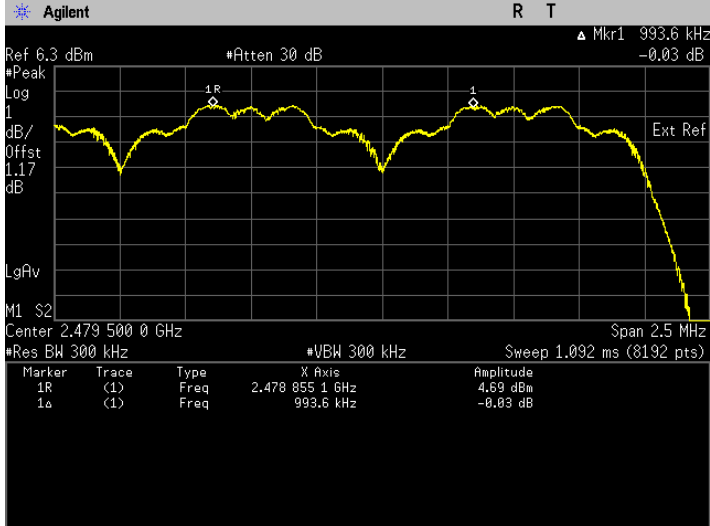


The Conducted RF Output Power test with result at low frequency, 8DPSK.

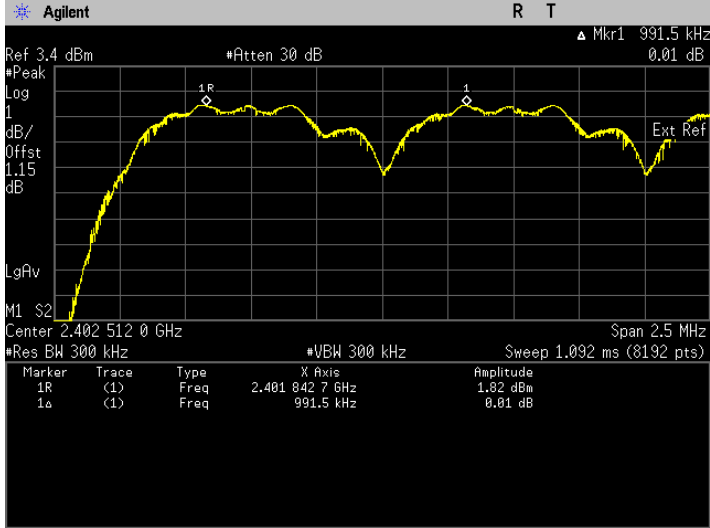

The Conducted RF Output Power test with result at mid frequency, 8DPSK.

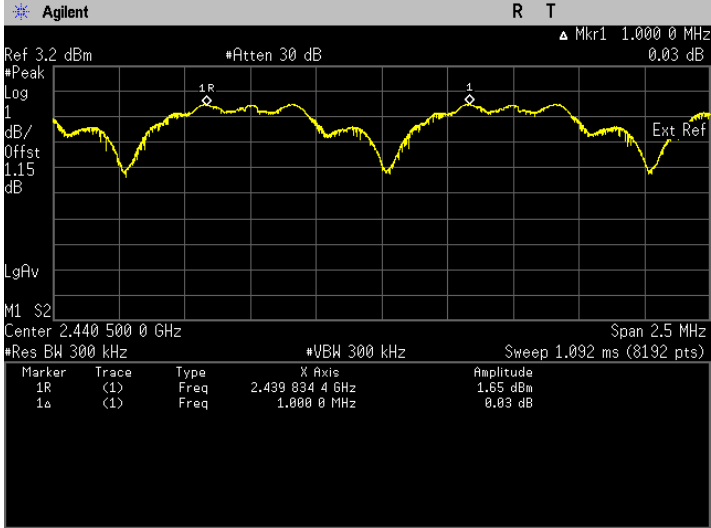


The Conducted RF Output Power test with result at high frequency, 8DPSK.

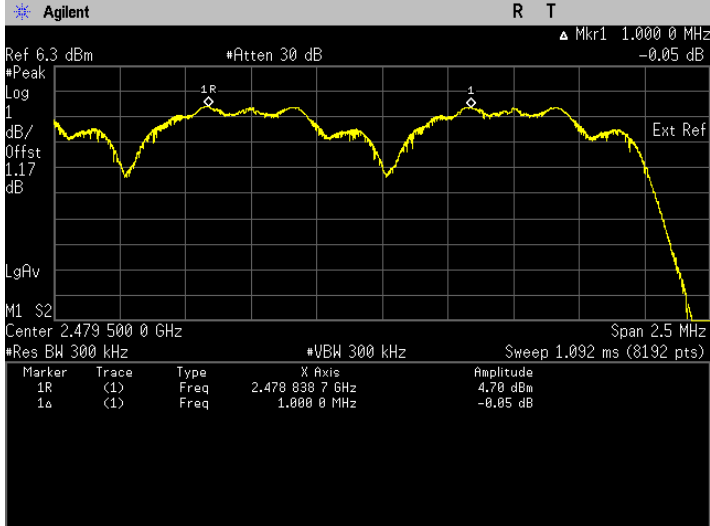

6.7. Conducted Spurious Emission

6.7.1. Test Setup



- a) Check and ensure the spectrum analyzer well calibrate.
- b) Turn on the EUT and set EUT to transmit maximum data rate with hopping disable.
- c) Connect EUT's antenna terminal to spectrum analyzer with a low loss cable.
- d) Setting of Spectrum analyzer :
 - a. RBW = 100 kHz
 - b. VBW = 300 kHz
 - c. SPAN = Cover until 10th harmonic
 - d. Detector mode = Peak
 - e. AMPLITUDE → Scale/Div = 10 dB
 - f. Trace = Max hold
 - g. Sweep = auto
- e) Measure the captured spurious emission result and recording the plot.
- f) Repeat above procedure with other different mode of operation.

6.7.2. Test Limits:


Normal Condition (25 ° C)
Shall be at least 20 dB below for peak power.

6.7.3. Test Data:


Test Conditions			Results		
Modulation	Voltage(V)	Test Frequency (GHz)	Spurs (MHz)	Level (dBm)	Status
GFSK	7.50	2.4020	2496.000	-45.838	Pass
		2.4410	2335.000	-45.958	Pass
		2.4800	2380.000	-45.307	Pass
Pi/4 DQPSK	7.50	2.4020	2301.000	-48.652	Pass
		2.4410	24851.000	-50.627	Pass
		2.4800	2588.000	-48.747	Pass
8DPSK	7.50	2.4020	2301.000	-48.750	Pass
		2.4410	2338.000	-48.471	Pass
		2.4800	24857.000	-50.063	Pass

GFSK Modulation:


- The high emission level within the assigned band at low carrier frequency.

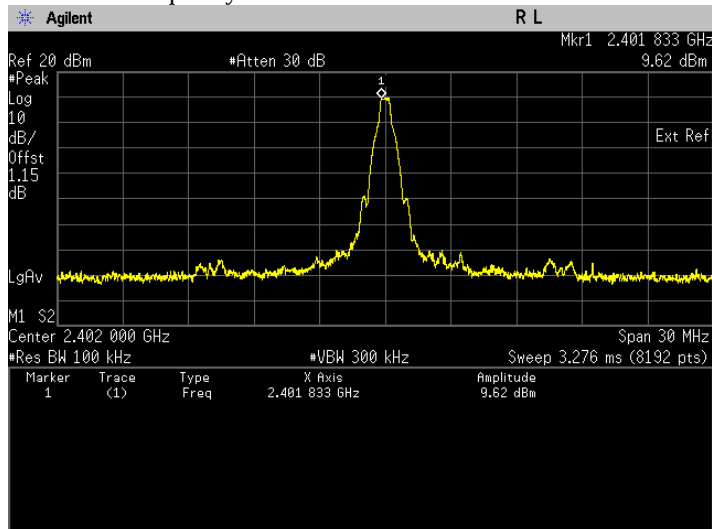


- Spurious emission measurement in 30MHz – 25GHz at low carrier frequency.

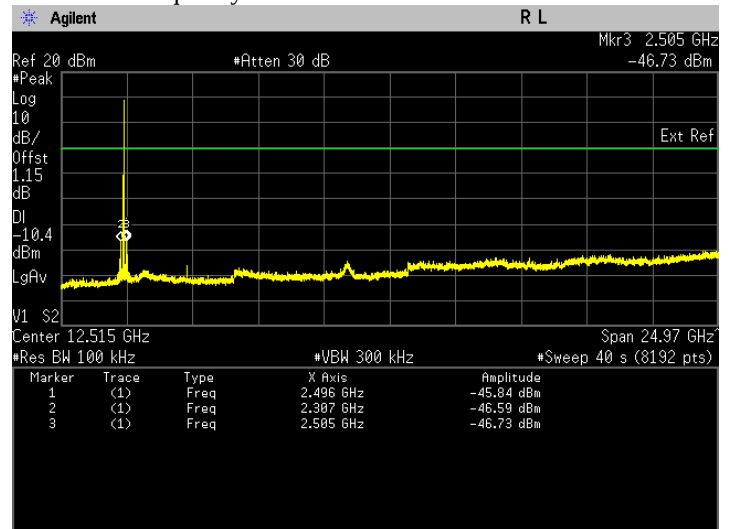


- The high emission level within the assigned band at mid carrier frequency.

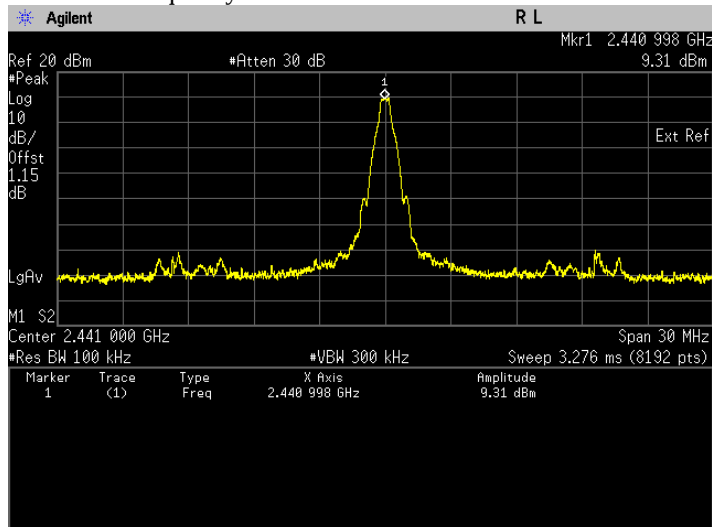


- Spurious emission measurement in 30MHz – 25GHz at mid carrier frequency.

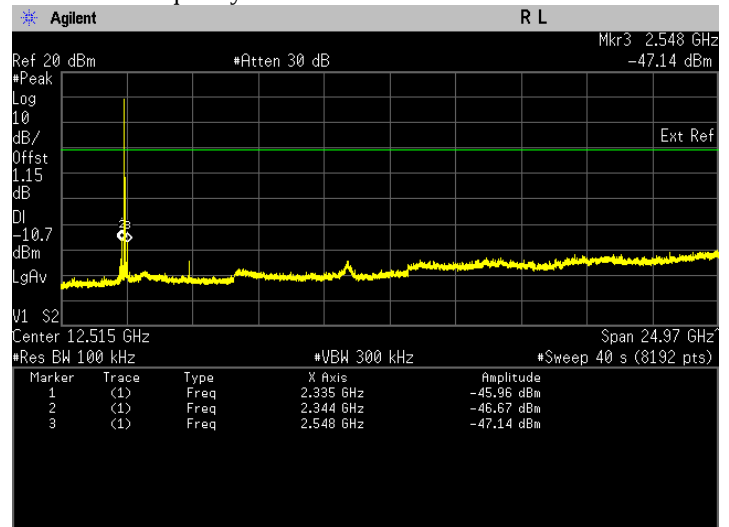

- The high emission level within the assigned band at high carrier frequency.

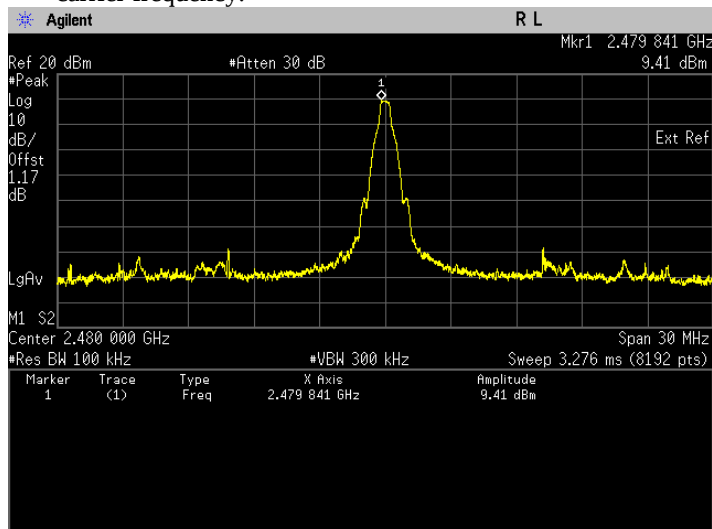


- Spurious emission measurement in 30MHz – 25GHz at high carrier frequency.

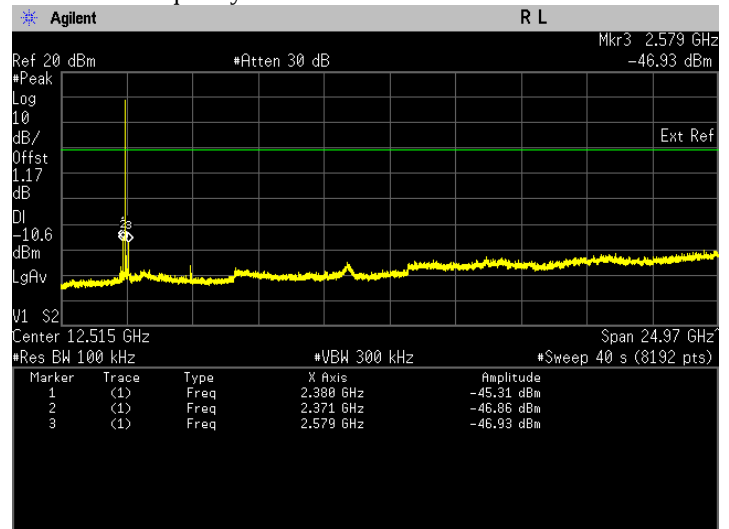


Pi/4 DQPSK Modulation:


i. The high emission level within the assigned band at low carrier frequency.

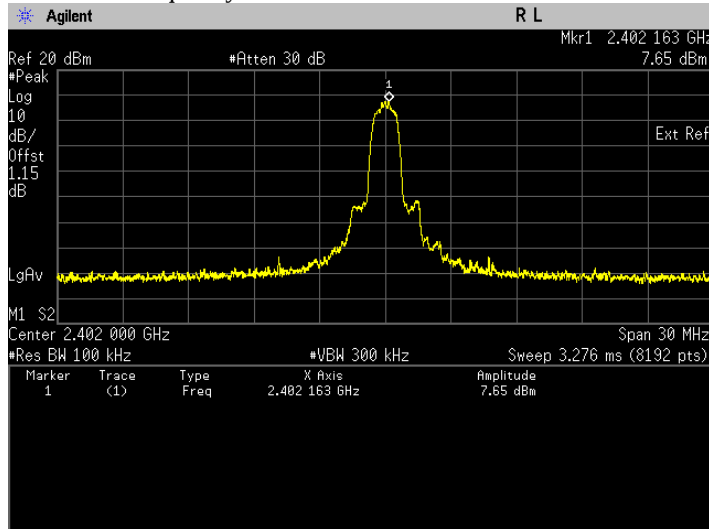


ii. Spurious emission measurement in 30MHz – 25GHz at low carrier frequency.

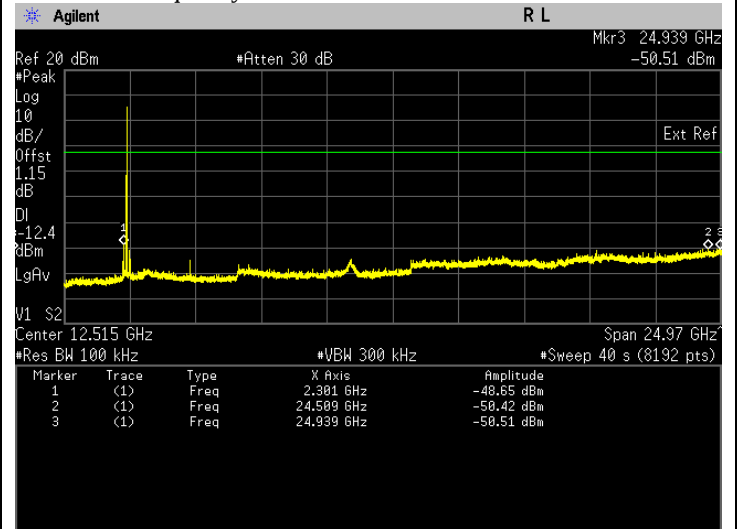


iii. The high emission level within the assigned band at mid carrier frequency.

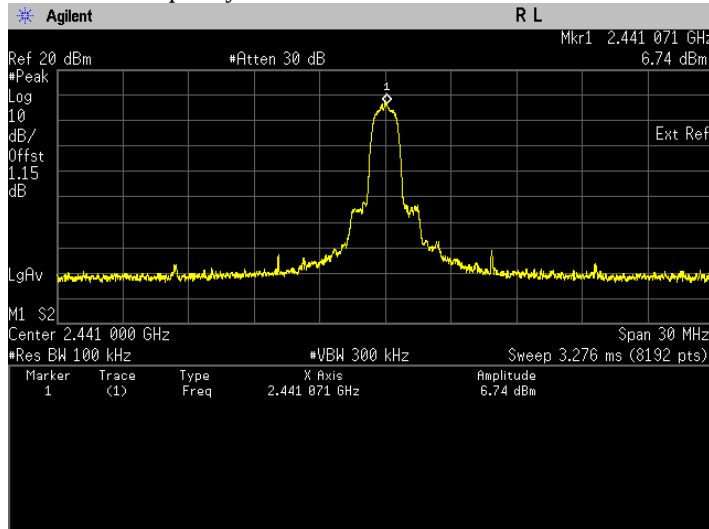


iv. Spurious emission measurement in 30MHz – 25GHz at mid carrier frequency.

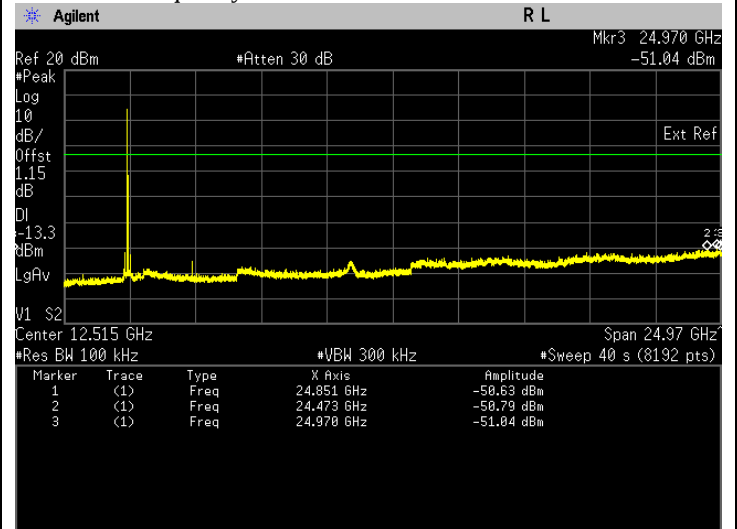

v. The high emission level within the assigned band at high carrier frequency.

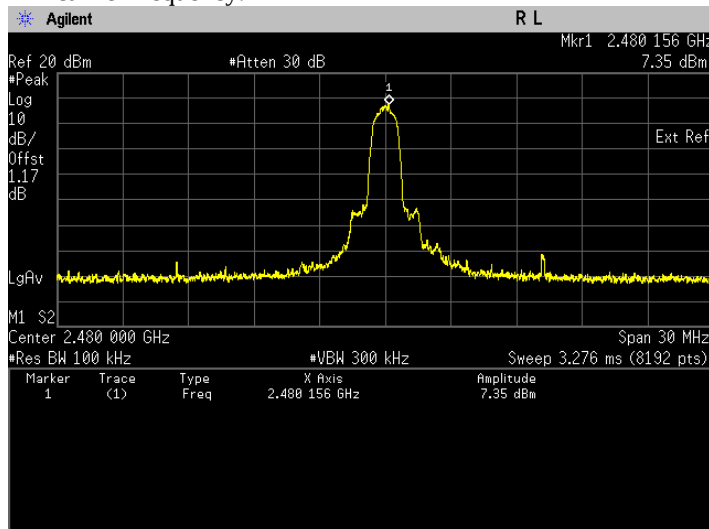


vi. Spurious emission measurement in 30MHz – 25GHz at high carrier frequency.

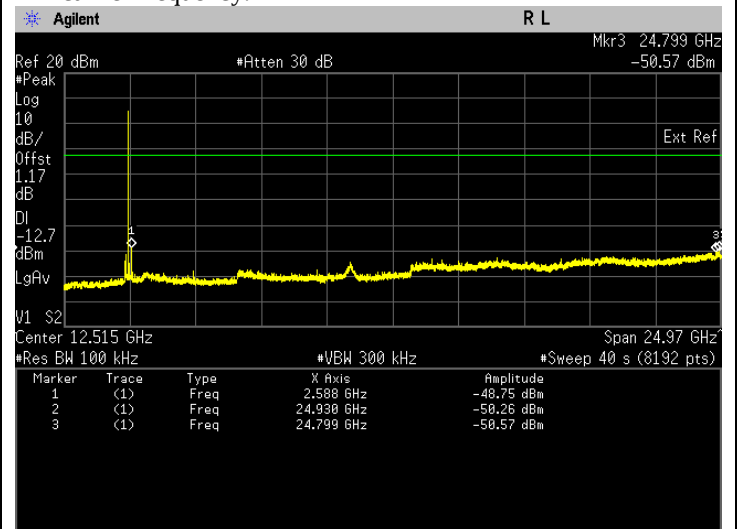


8DPSK Modulation:


i. The high emission level within the assigned band at low carrier frequency.

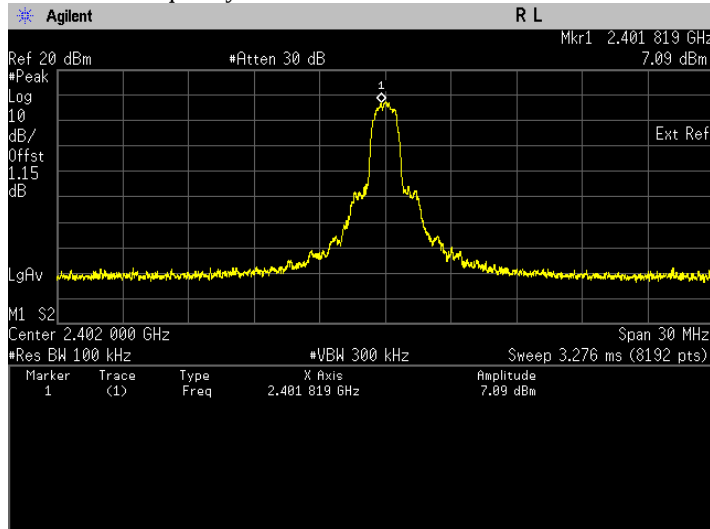


ii. Spurious emission measurement in 30MHz – 25GHz at low carrier frequency.

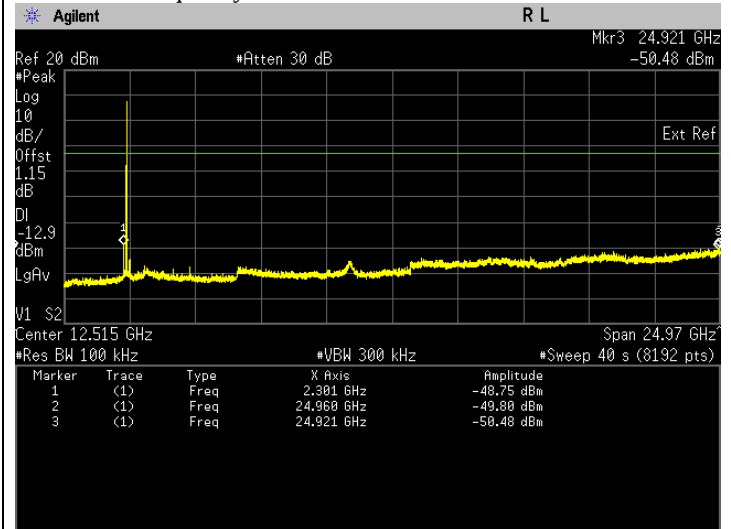


iii. The high emission level within the assigned band at mid carrier frequency.

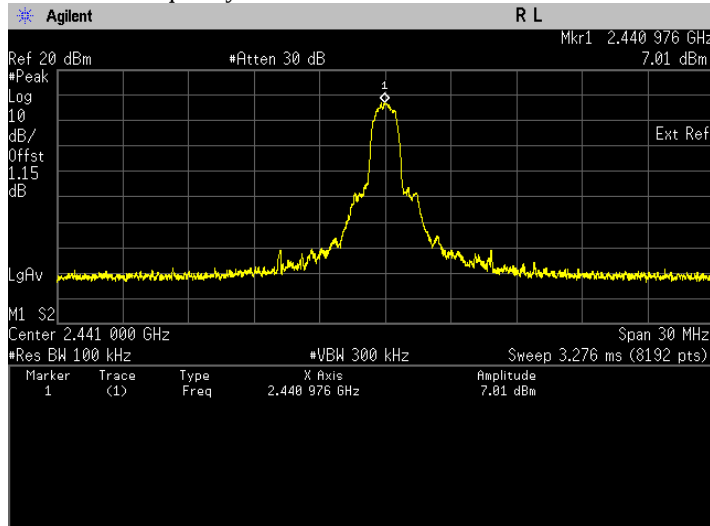


iv. Spurious emission measurement in 30MHz – 25GHz at mid carrier frequency.

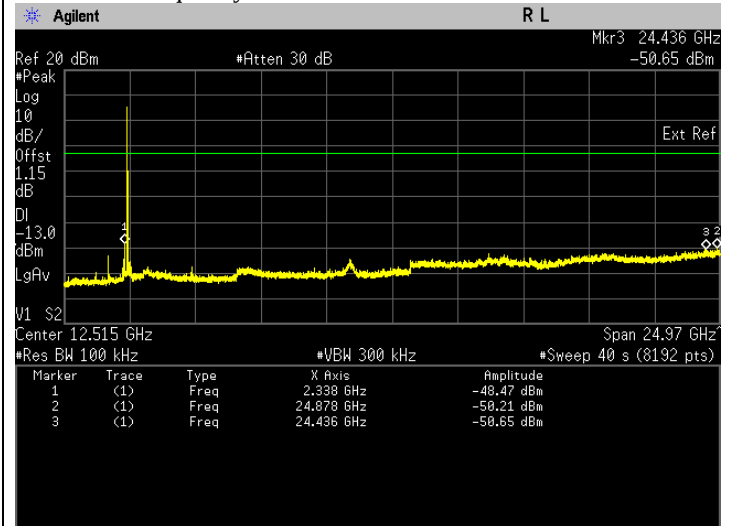

v. The high emission level within the assigned band at high carrier frequency.

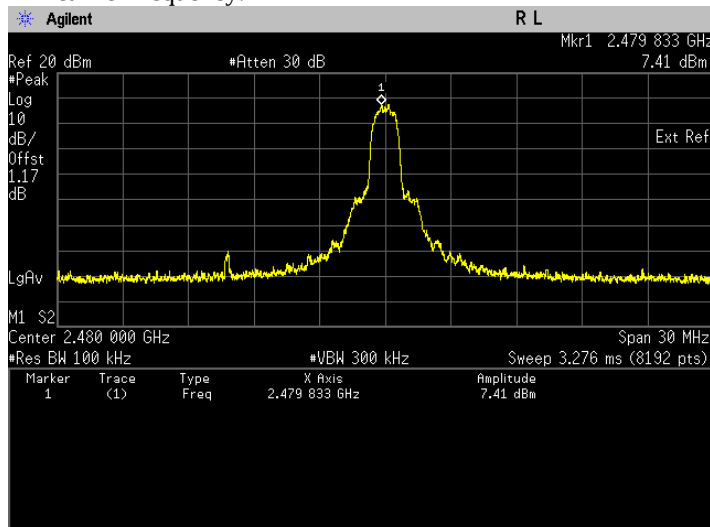


vi. Spurious emission measurement in 30MHz – 25GHz at high carrier frequency.

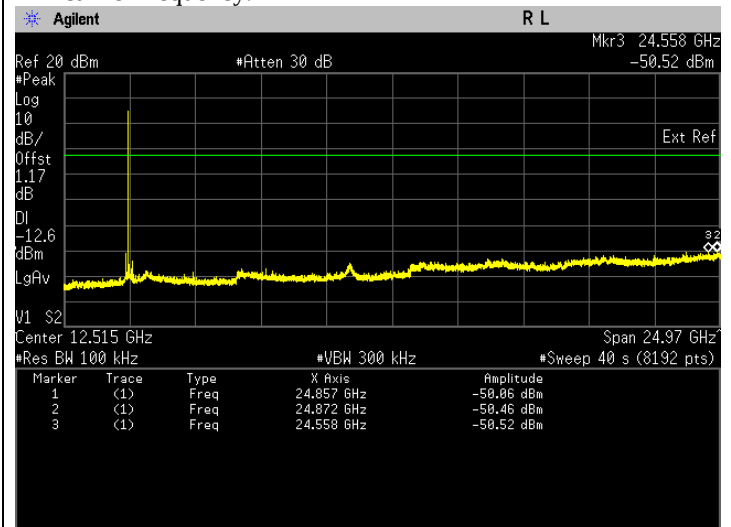

6.8. Radiated Emission within restricted Bands

6.8.1. Test Setup

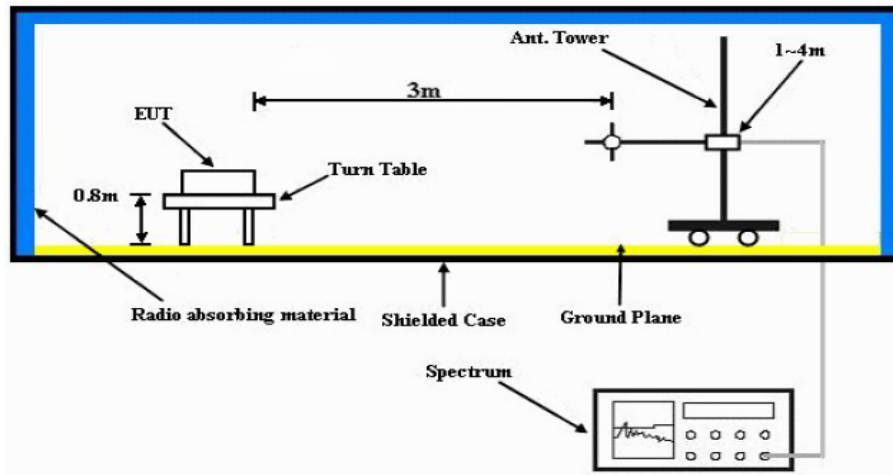

- The EUT is placed on the top of a rotating table 0.8m (<1GHz) or 1.5m (>1GHz) above the ground at a 3m semi-anechoic chamber. The table is rotated 360 degrees to determine the position of the highest radiation.
- The EUT is set 3m away from the interference-receiving antenna, which is mounted on the top of a variable-height antenna tower.
- The antenna is Bilog/Horn antenna depend on which frequency range uses, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT is arranged to its worst case and then the antenna is tuned to heights from 1m to 4m and the rotatable table is turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system is set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode is fall within the range of 10dB from the limit specified, the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. Otherwise, the testing could be stopped and the peak values of the EUT would be reported.

NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection at frequency below 1GHz.
- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

6.8.2. Test Limits:

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

NOTE:

- The lower limit shall apply at the transition frequencies.
- Emission level (dBuV/m) = 20 log Emission level (uV/m).
- For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Test: Bluetooth SAC Restricted Band Edge

Model Number: AAH07JDH9SA1AN S/N: 651EAK0033 EMC SR ID#: 0680N01-EMC-00008
Battery: PMNN4890A Softpot power (9dBm) Accessory: PMAD4147A
Test Channel: Low Test Frequency: 2402.0000 MHz Test Standard: ANSI C63.10-2013
Worst Case Plane: Z-Plane (GFSK)


Vertical Radiated Emission Result

[illegible]


Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Humidity (%): 67.9
Test Date: Tue, 30 Jul, 2024

Restricted Band Edge (Low Channel, Vertical, Peak) graphical screen shot

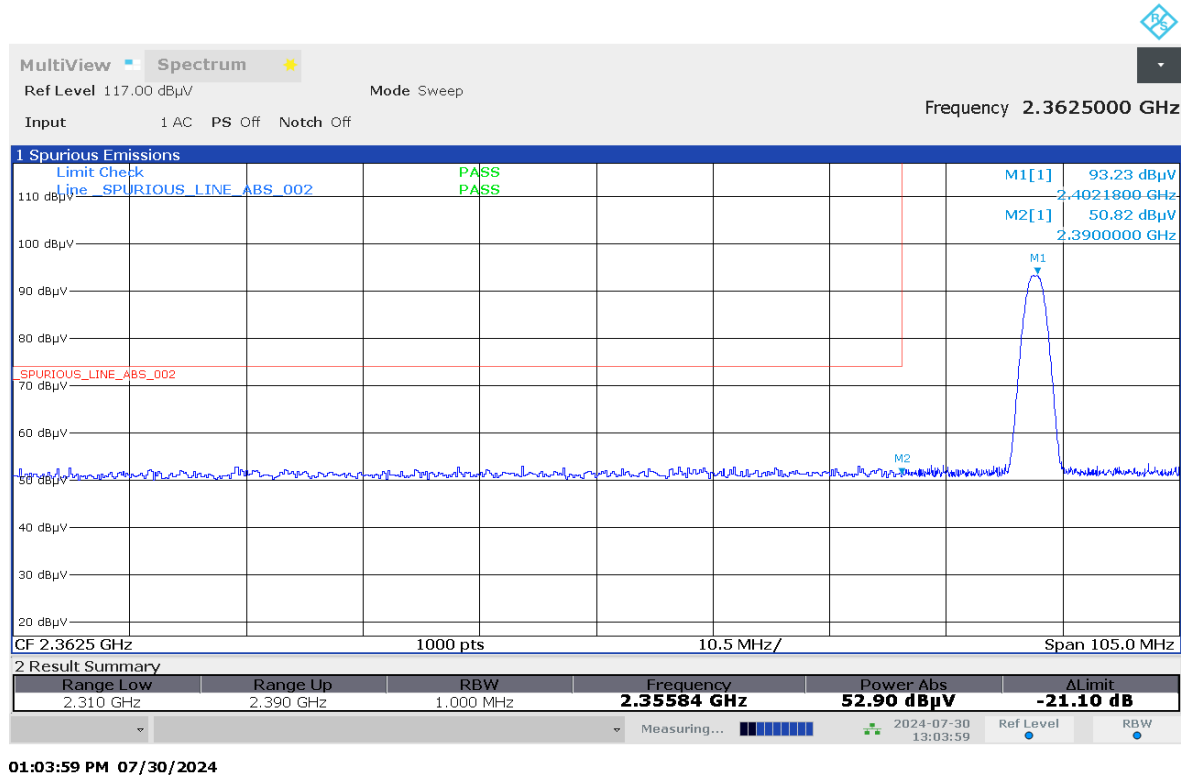


Restricted Band Edge (Low Channel, Horizontal, Peak) graphical screen shot

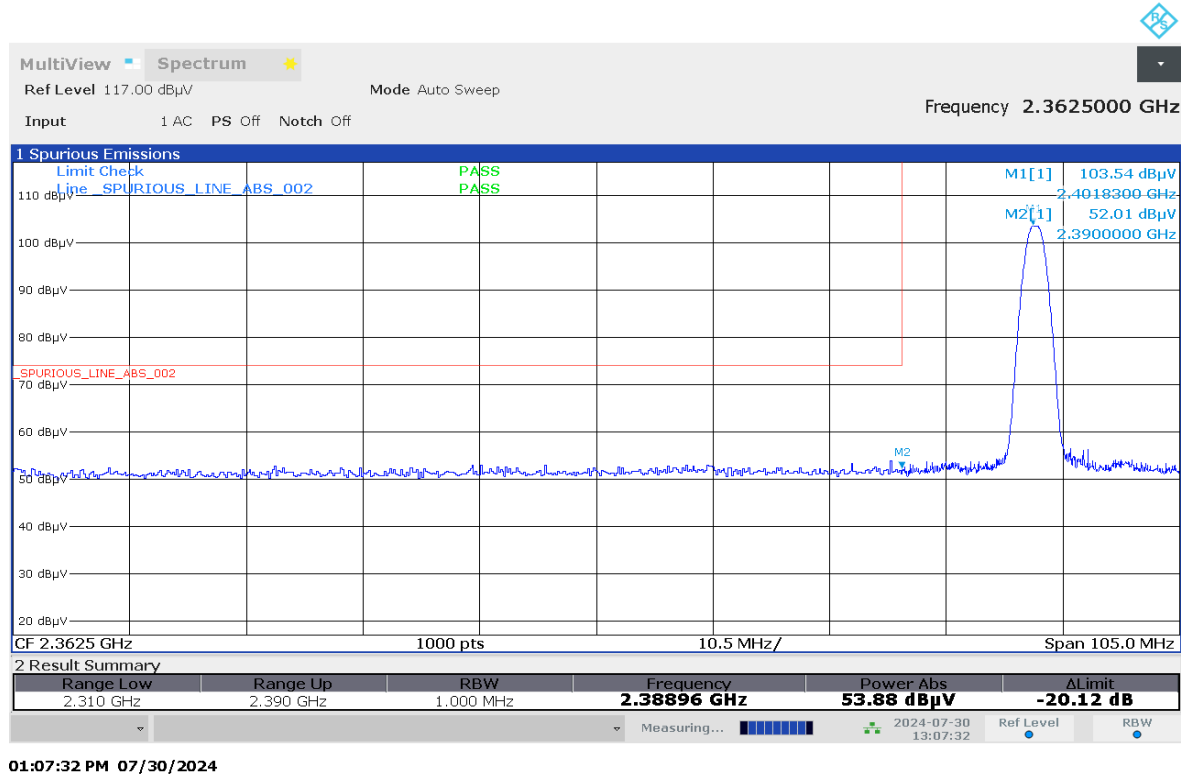

Restricted Band Edge (Low Channel, Vertical, Average) graphical screen shot



Restricted Band Edge (Low Channel, Horizontal, Average) graphical screen shot

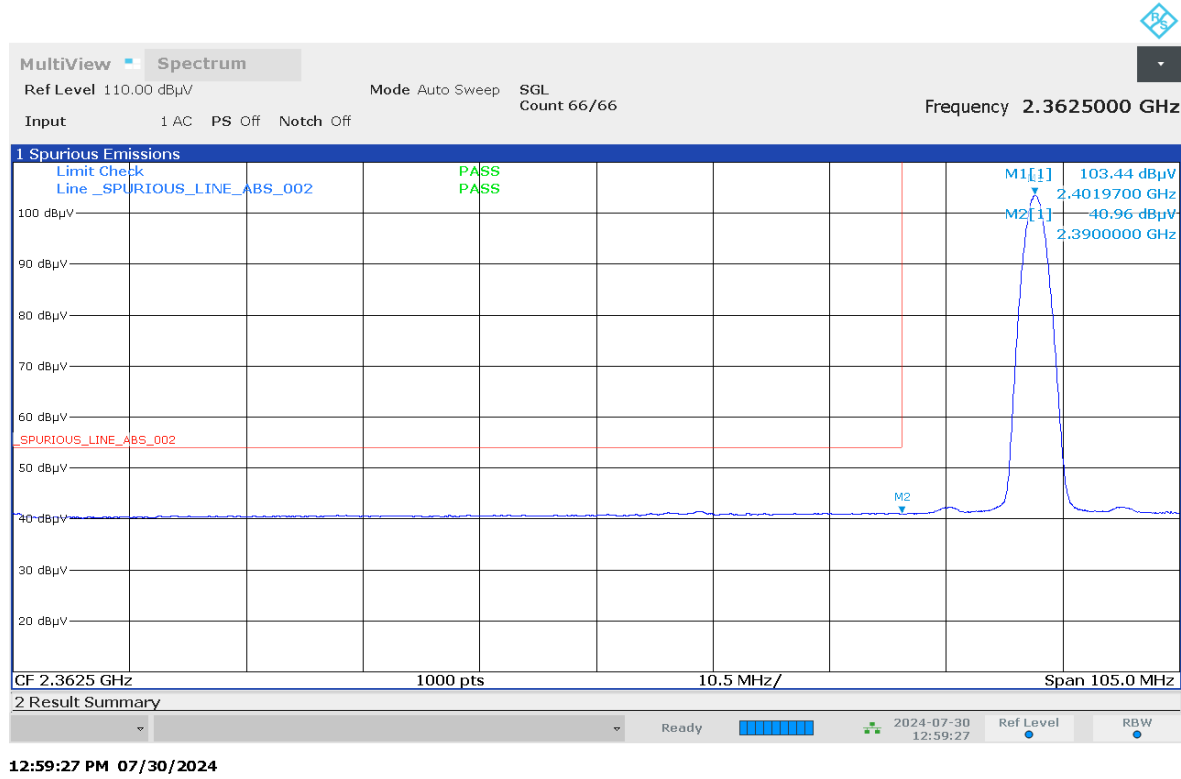


Restricted Band Edge (High Channel) tabular data


Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Humidity (%): 67.9
Test Date: Tue, 30 Jul, 2024


Restricted Band Edge (High Channel, Vertical, Peak) graphical screen shot

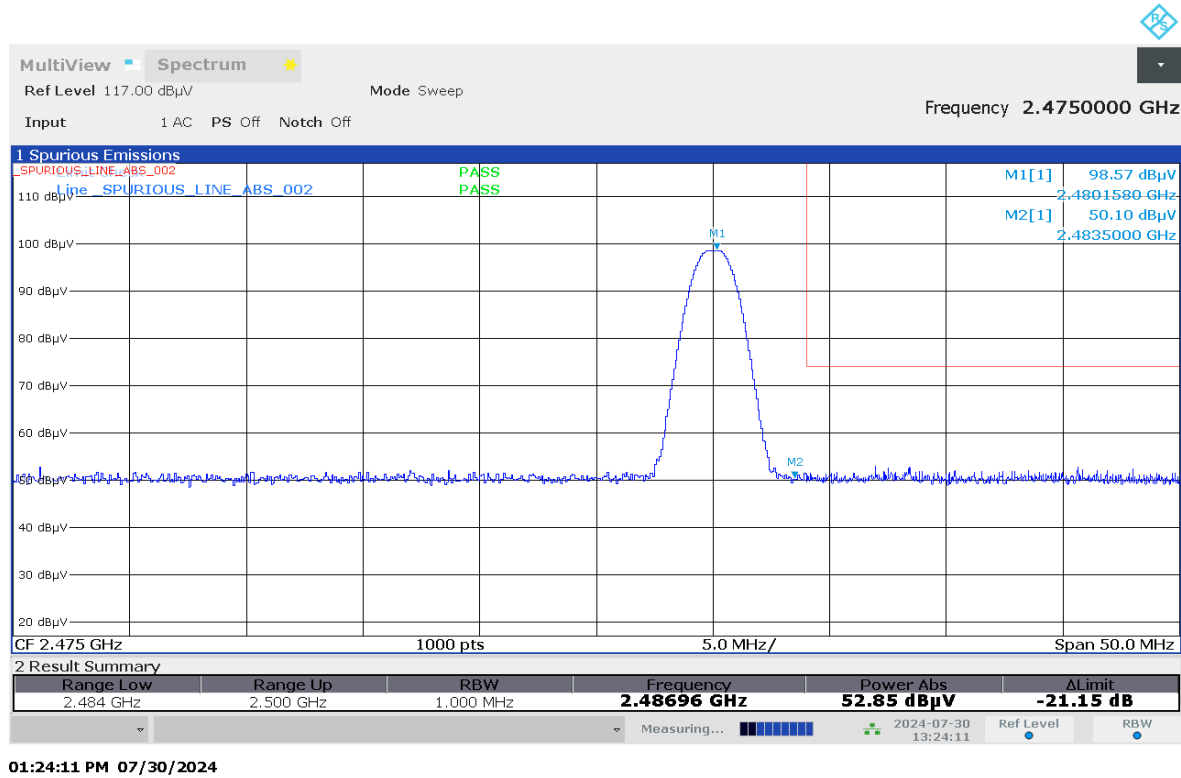


Restricted Band Edge (High Channel, Horizontal, Peak) graphical screen shot

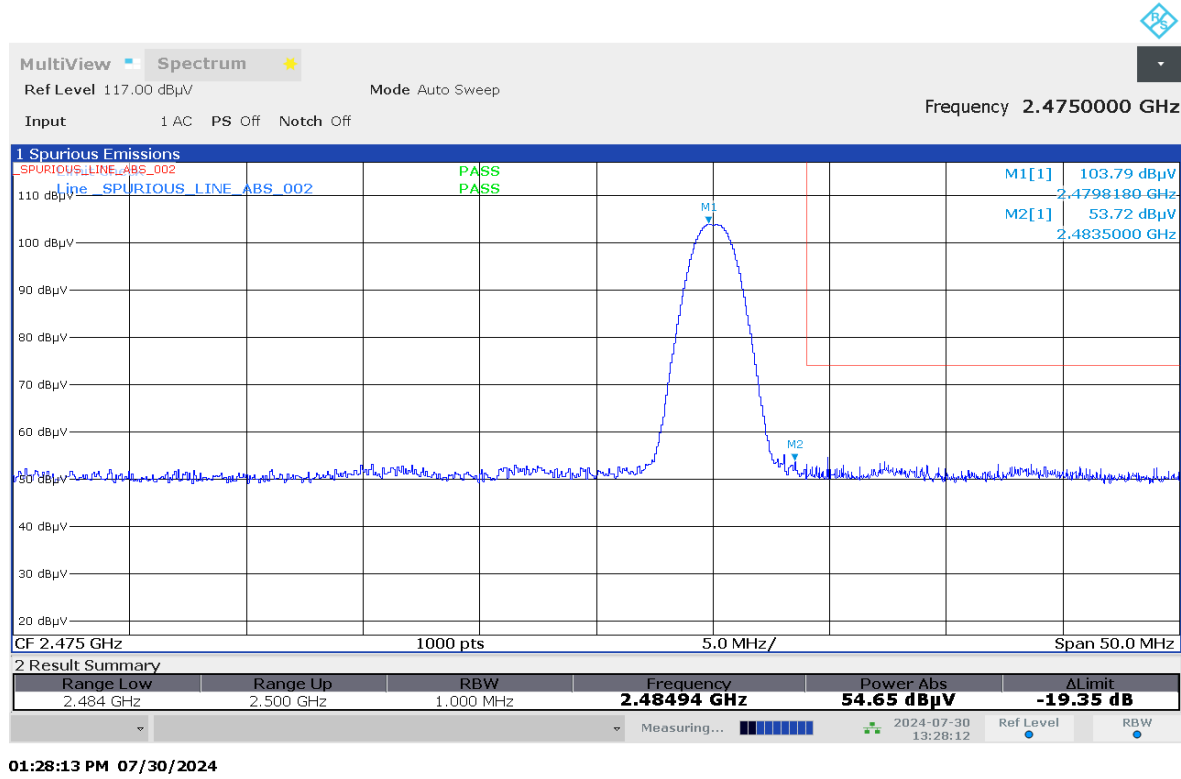

Restricted Band Edge (High Channel, Vertical, Average) graphical screen shot

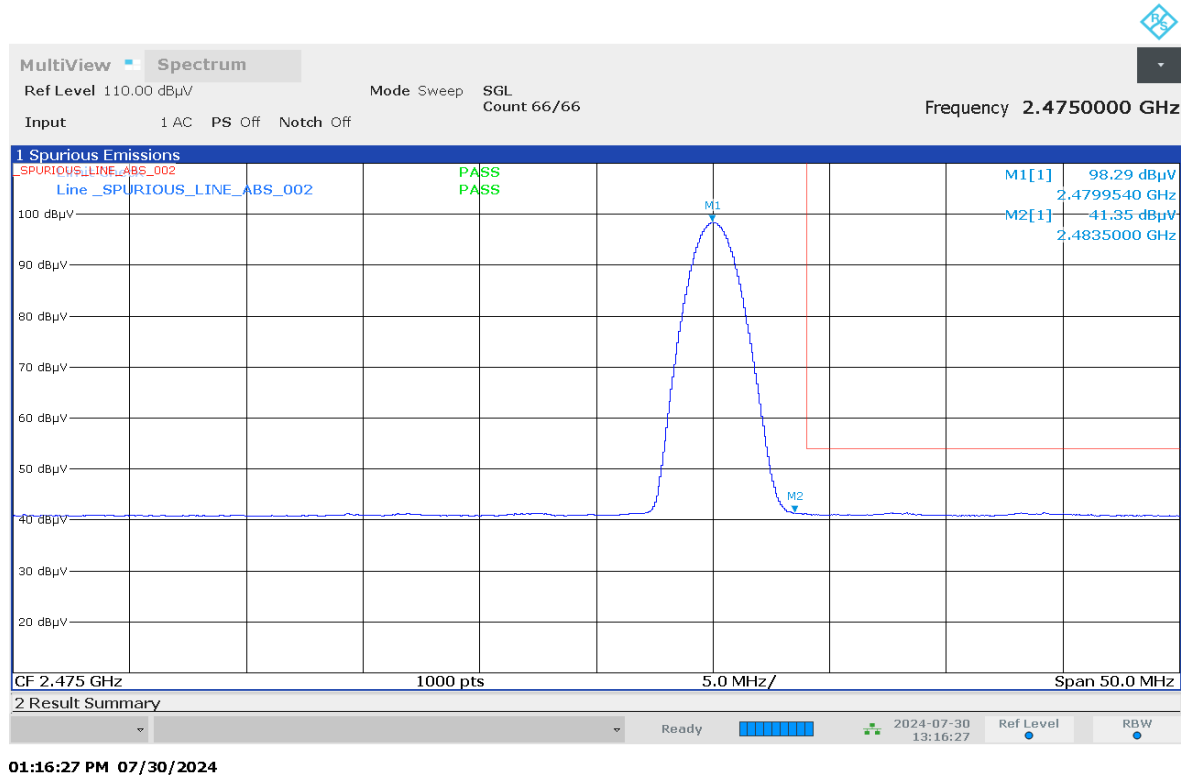

Restricted Band Edge (High Channel, Horizontal, Average) graphical screen shot

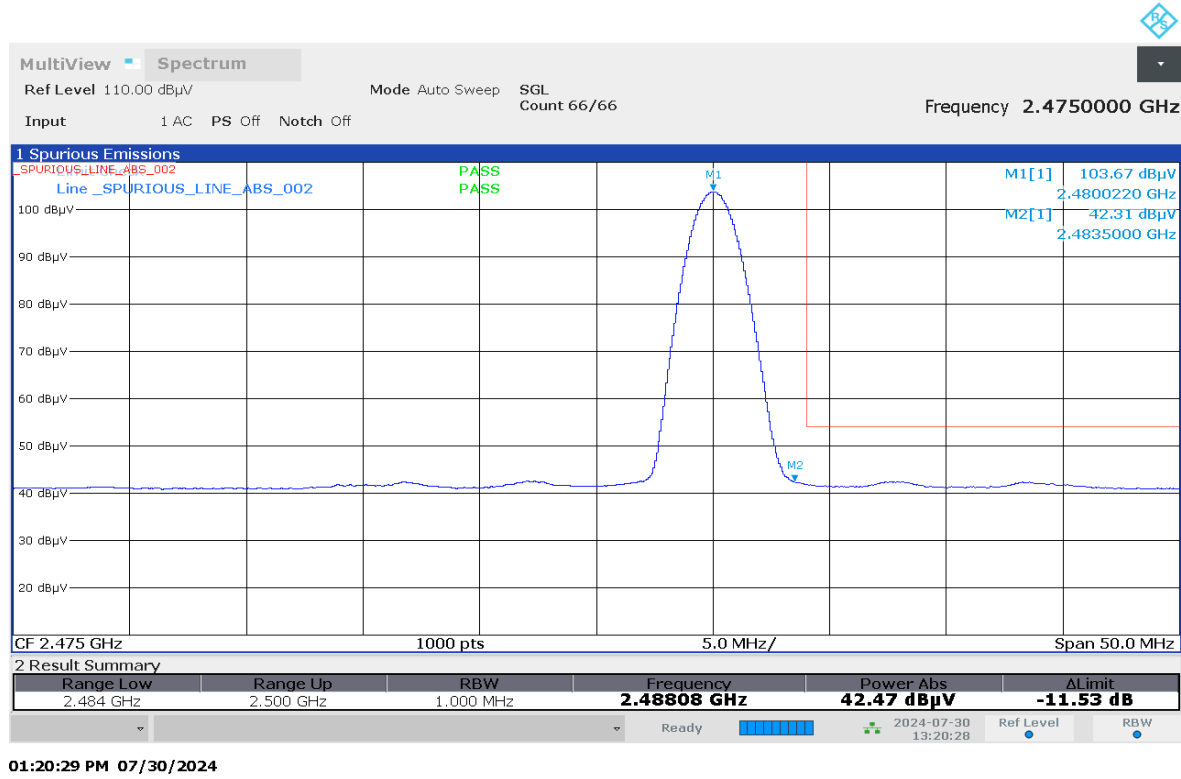

Test: Bluetooth SAC Restricted Band Edge


Vertical Radiated Emission Result

Horizontal Radiated Emission Result


Remarks:
Pass Result

Humidity (%): 67.9
Test Date: Tue, 30 Jul, 2024


Restricted Band Edge (Low Channel, Vertical, Peak) graphical screen shot

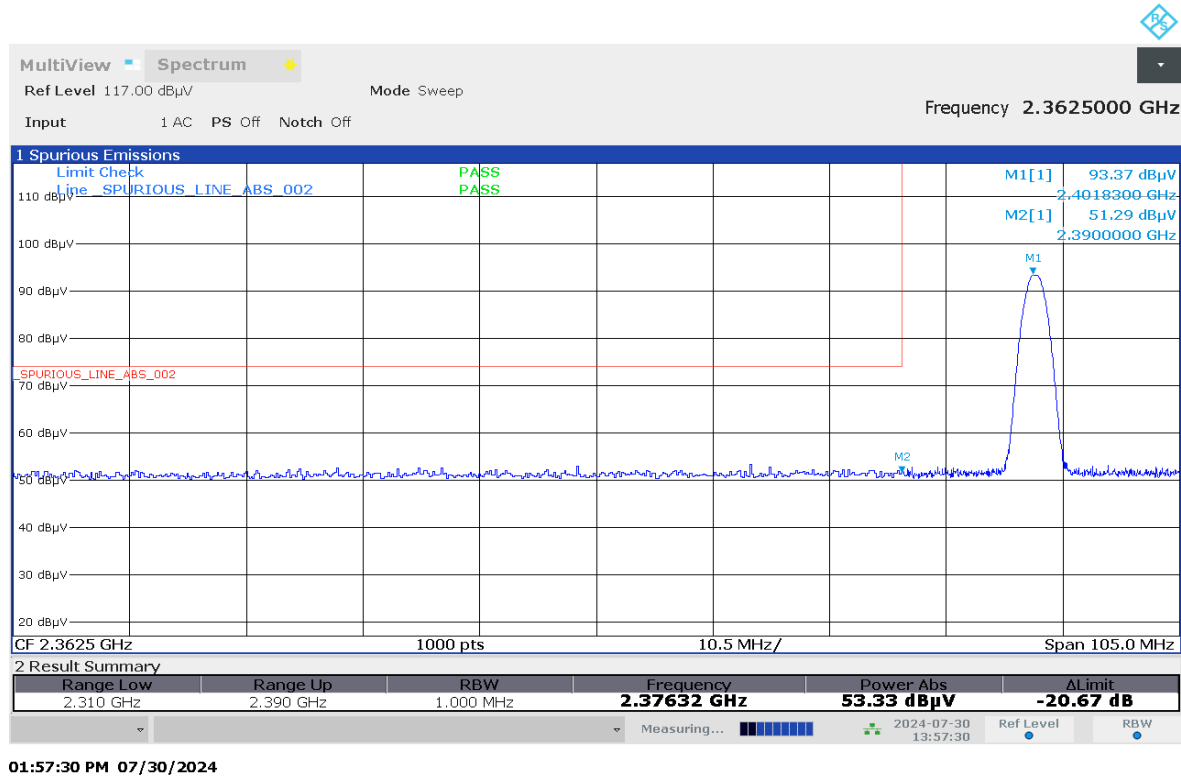


Restricted Band Edge (Low Channel, Horizontal, Peak) graphical screen shot

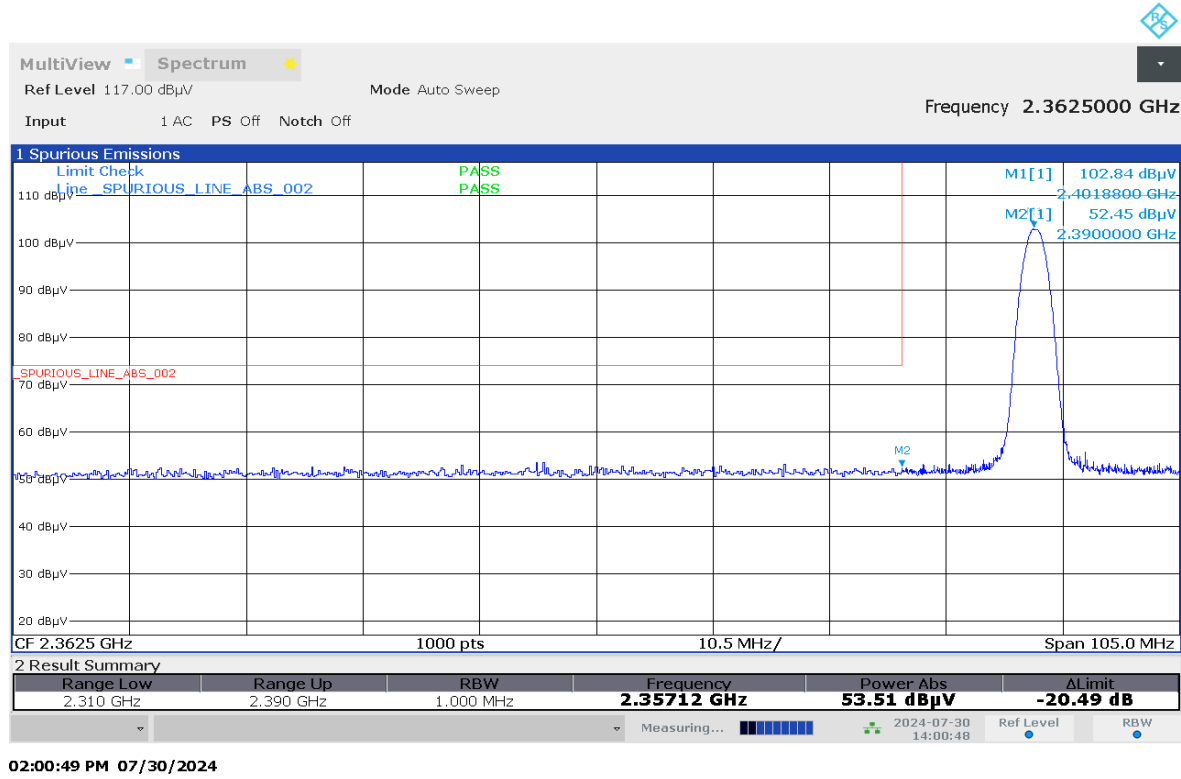

Restricted Band Edge (Low Channel, Vertical, Average) graphical screen shot

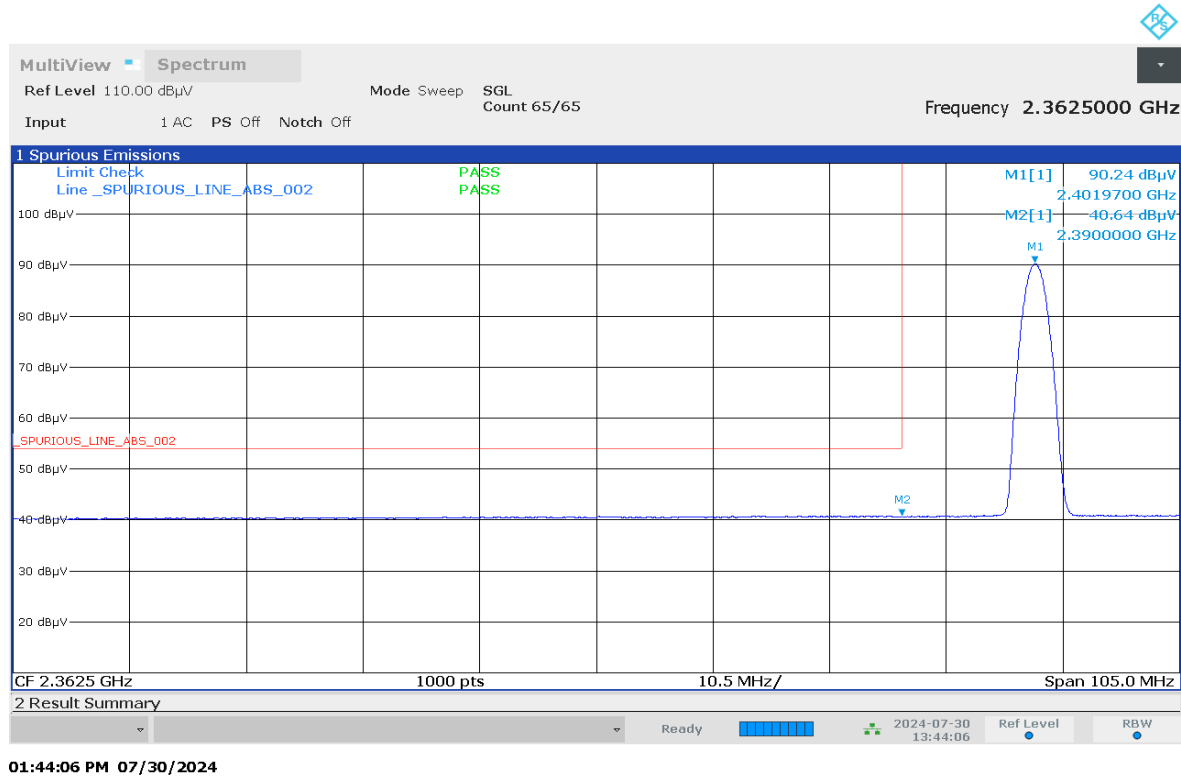

Restricted Band Edge (Low Channel, Horizontal, Average) graphical screen shot

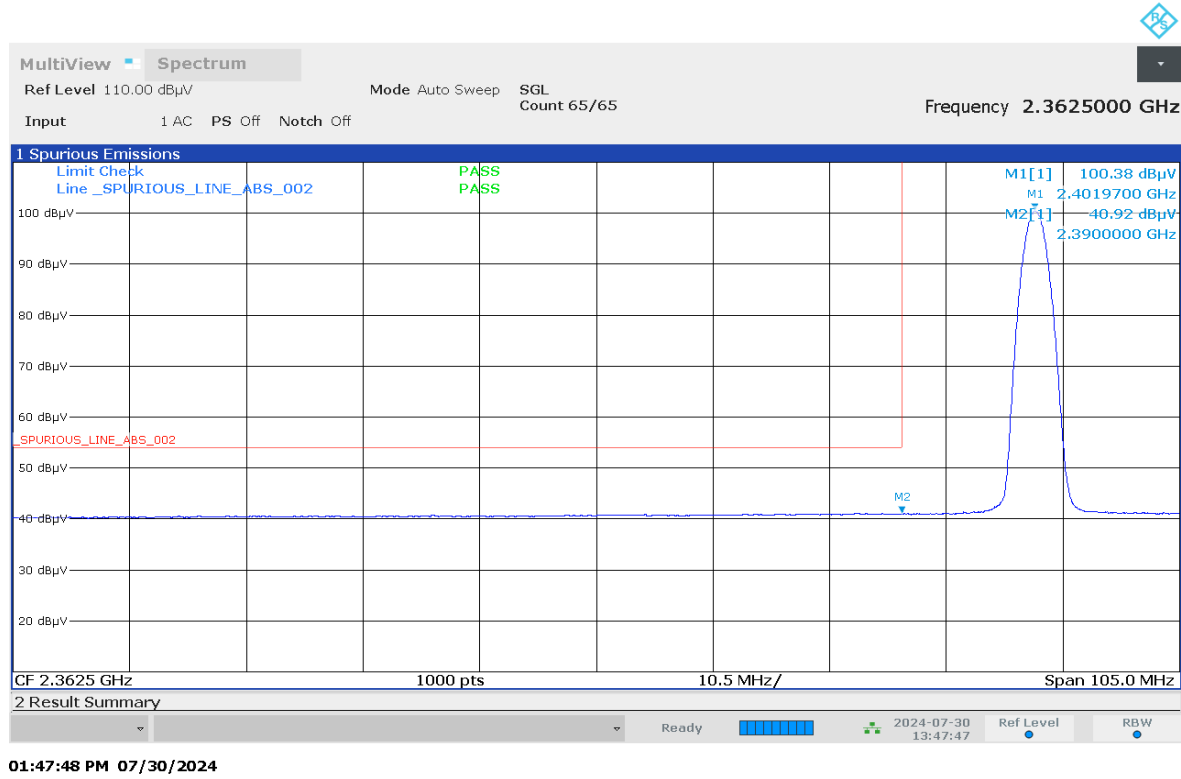


Restricted Band Edge (High Channel) tabular data


Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Humidity (%): 67.9
Test Date: Tue, 30 Jul, 2024


Restricted Band Edge (High Channel, Vertical, Peak) graphical screen shot

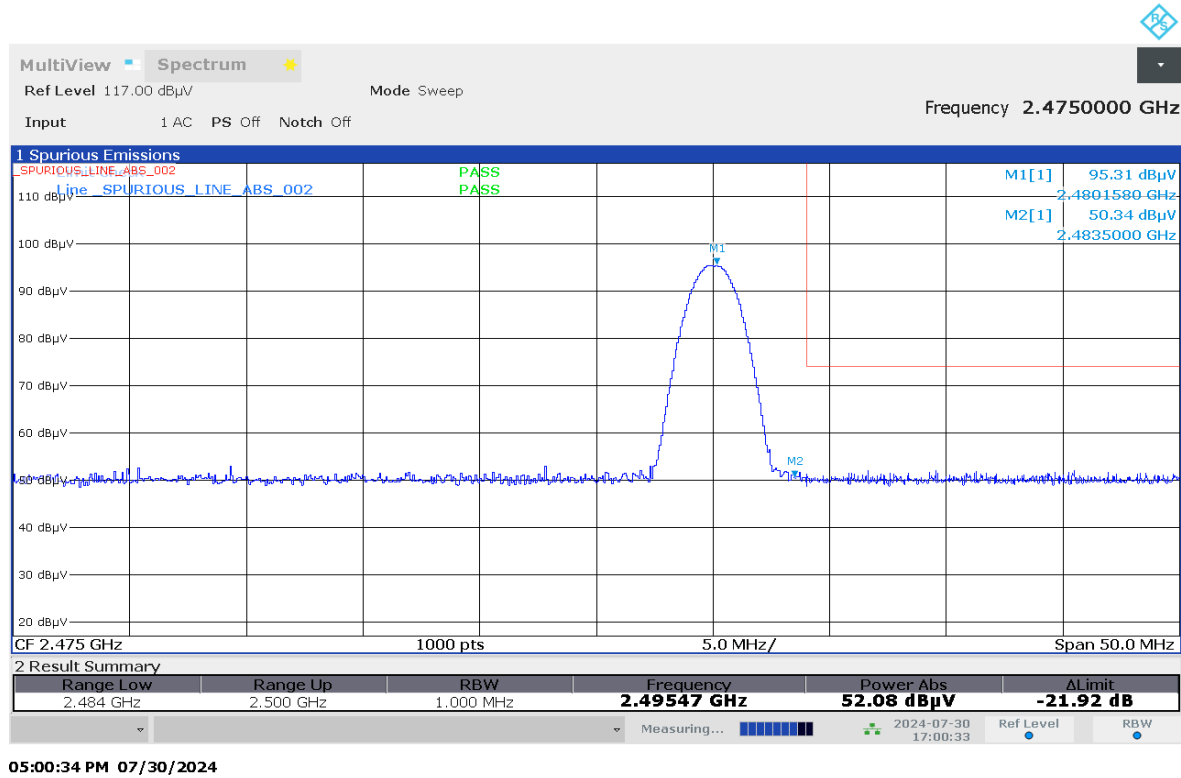


Restricted Band Edge (High Channel, Horizontal, Peak) graphical screen shot

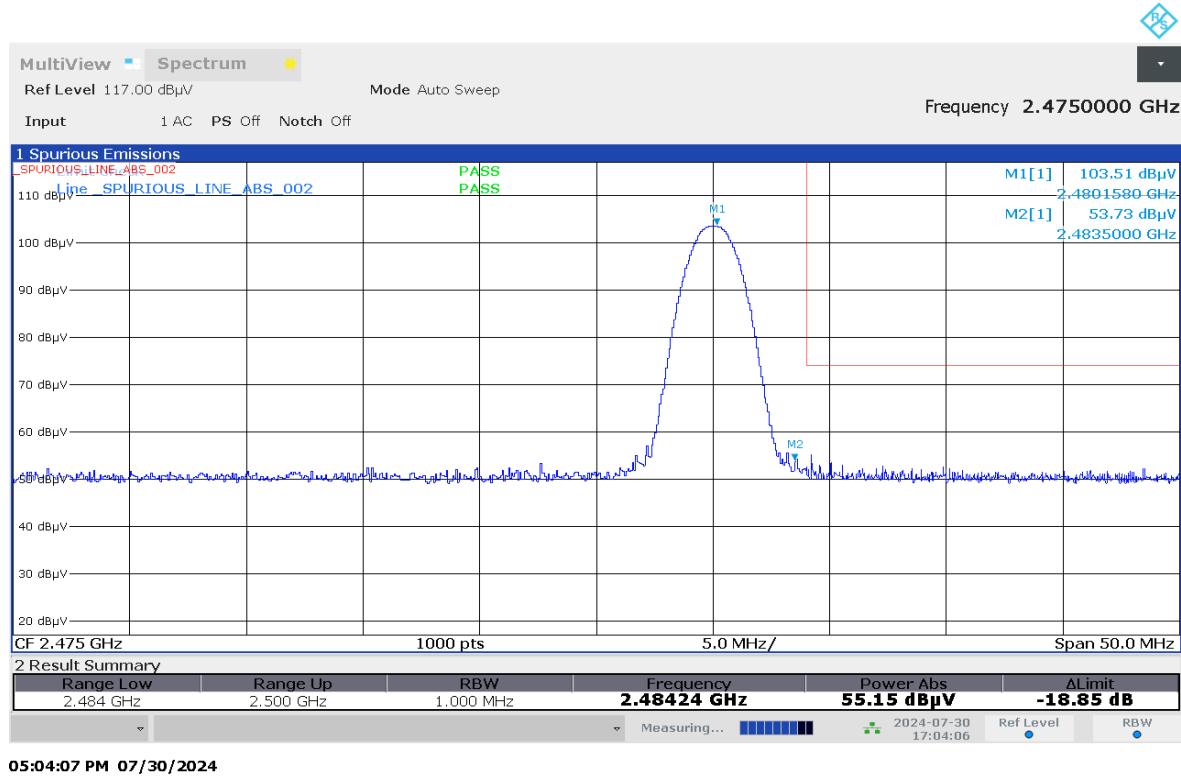

Restricted Band Edge (High Channel, Vertical, Average) graphical screen shot

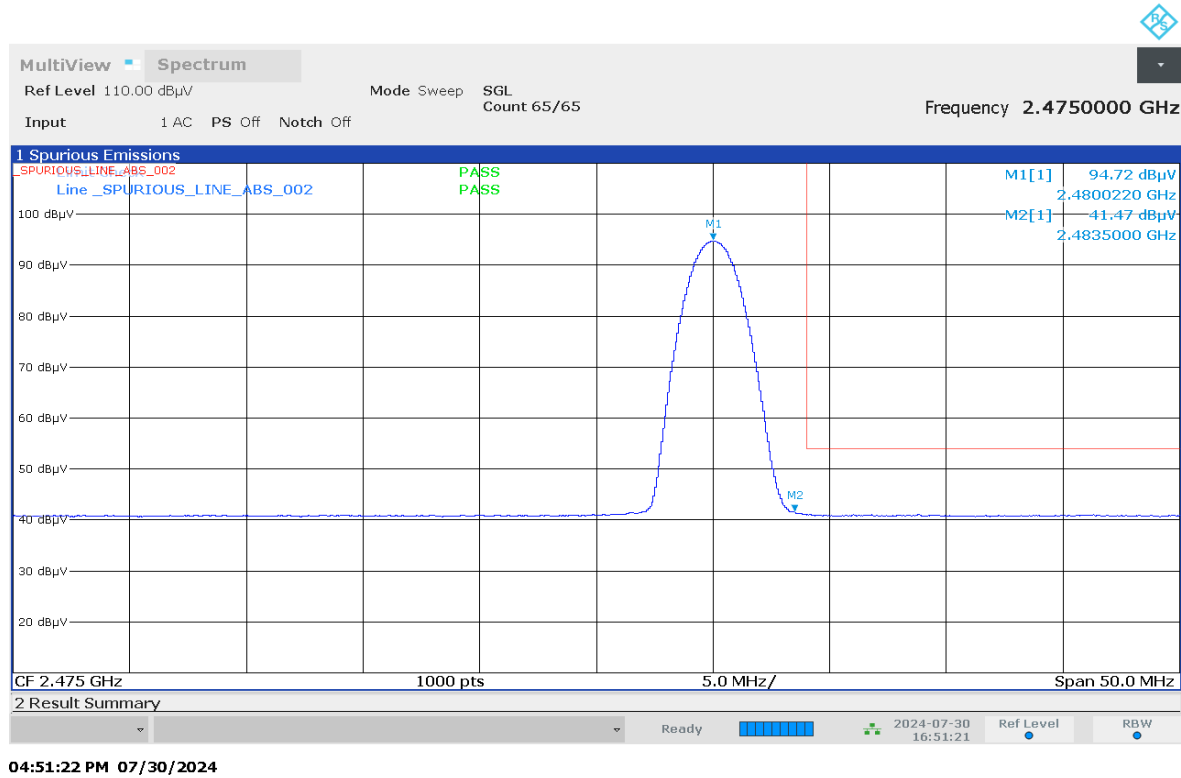

Restricted Band Edge (High Channel, Horizontal, Average) graphical screen shot

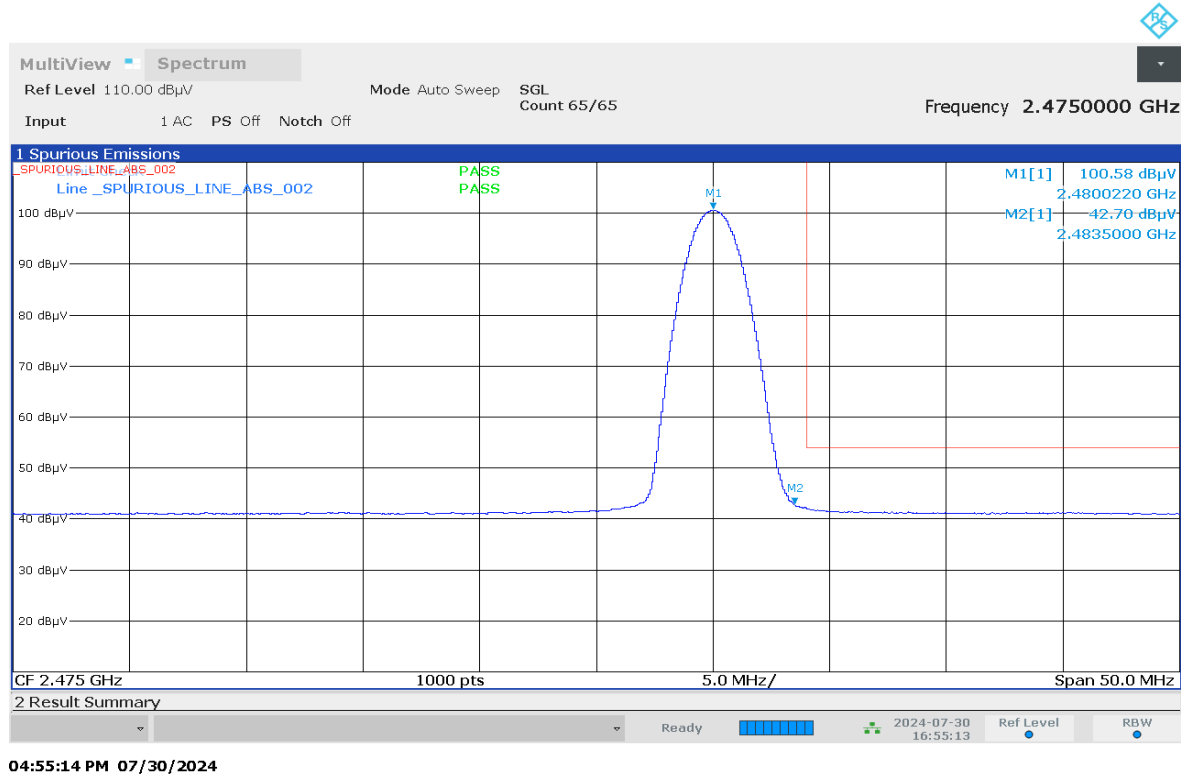


Restricted Band Edge (Low Channel) tabular data


Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Humidity (%): 67.9
Test Date: Tue, 30 Jul, 2024


Restricted Band Edge (Low Channel, Vertical, Peak) graphical screen shot

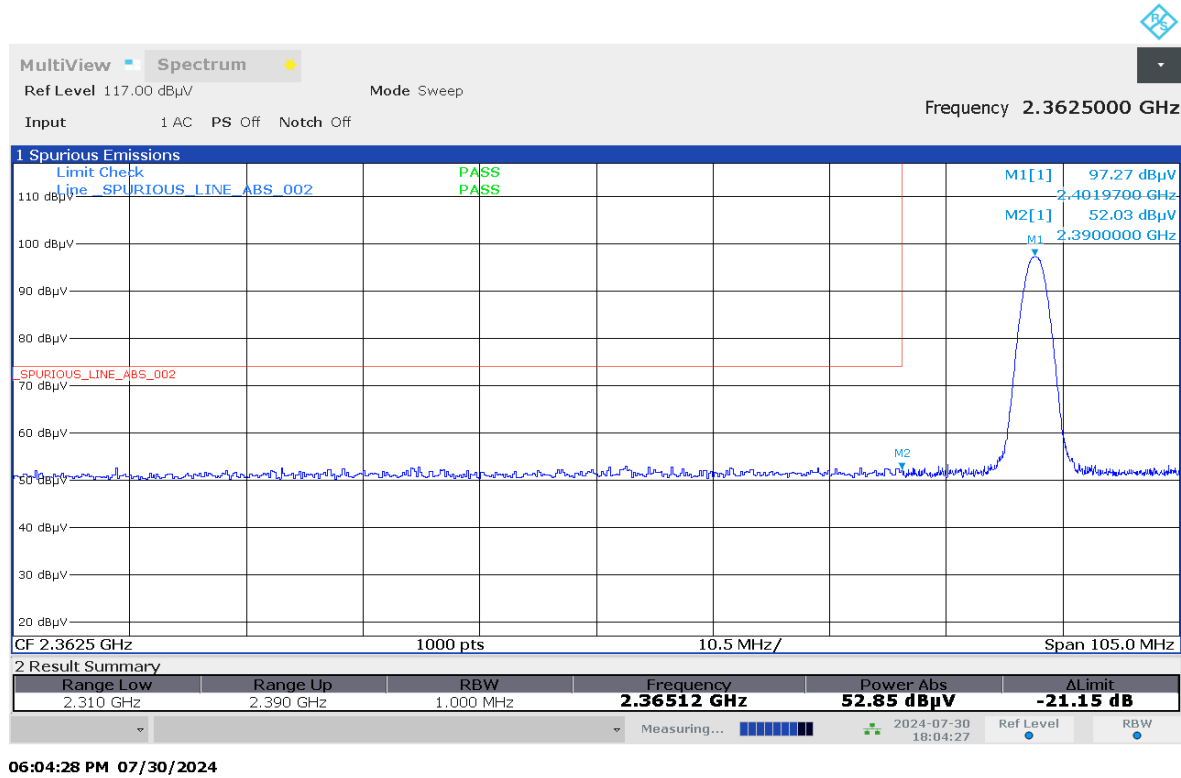

Restricted Band Edge (Low Channel, Horizontal, Peak) graphical screen shot

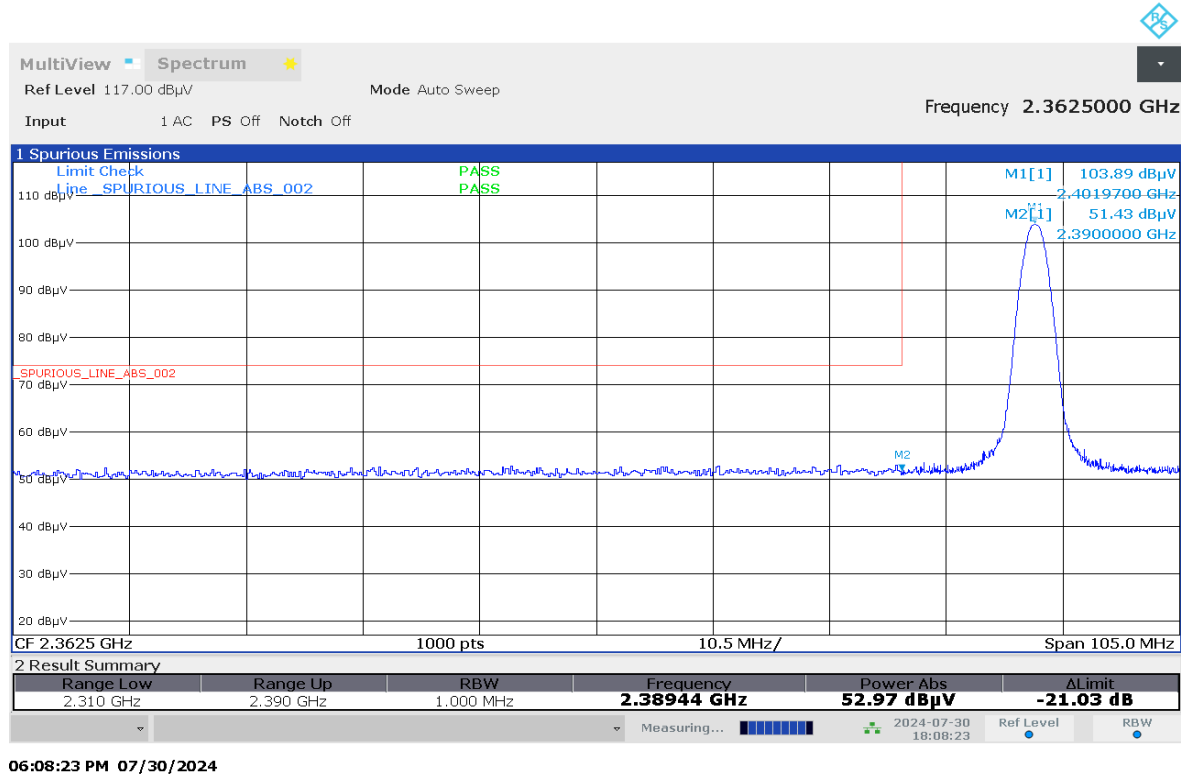

Restricted Band Edge (Low Channel, Vertical, Average) graphical screen shot

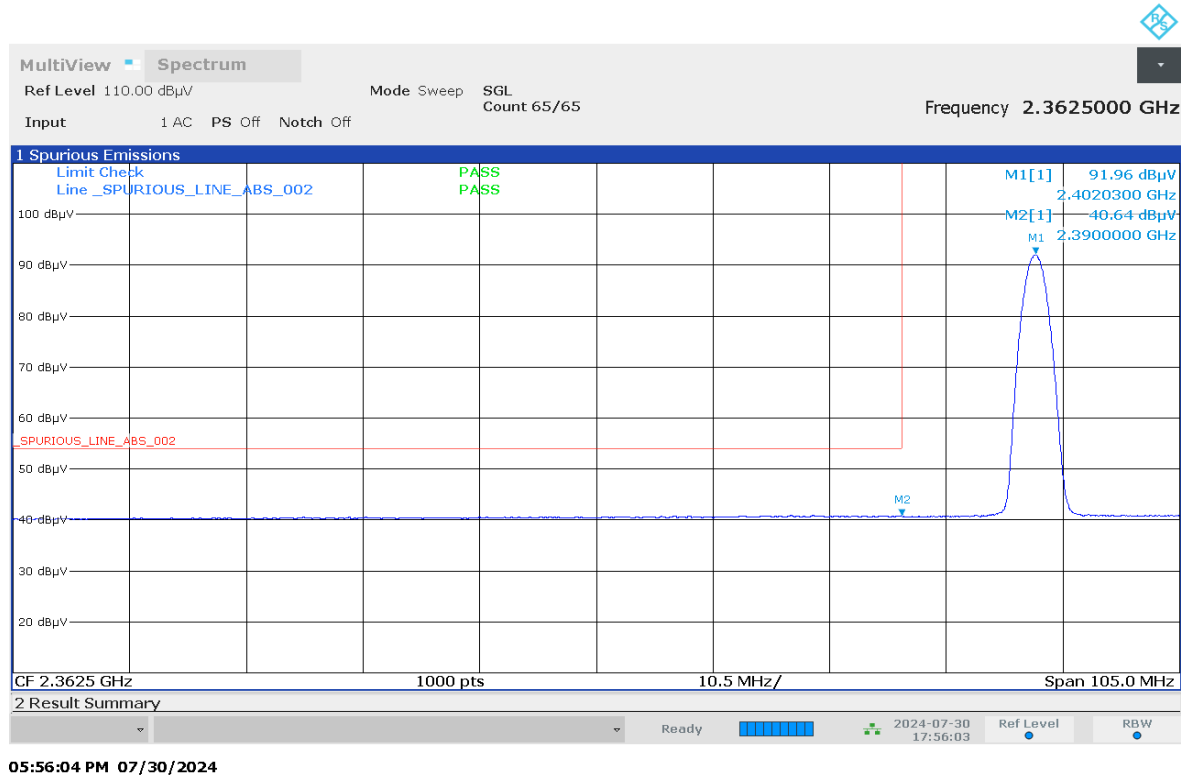

Restricted Band Edge (Low Channel, Horizontal, Average) graphical screen shot




Restricted Band Edge (High Channel) tabular data


Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Humidity (%): 67.9
Test Date: Wed, 31 Jul, 2024


Restricted Band Edge (High Channel, Vertical, Peak) graphical screen shot

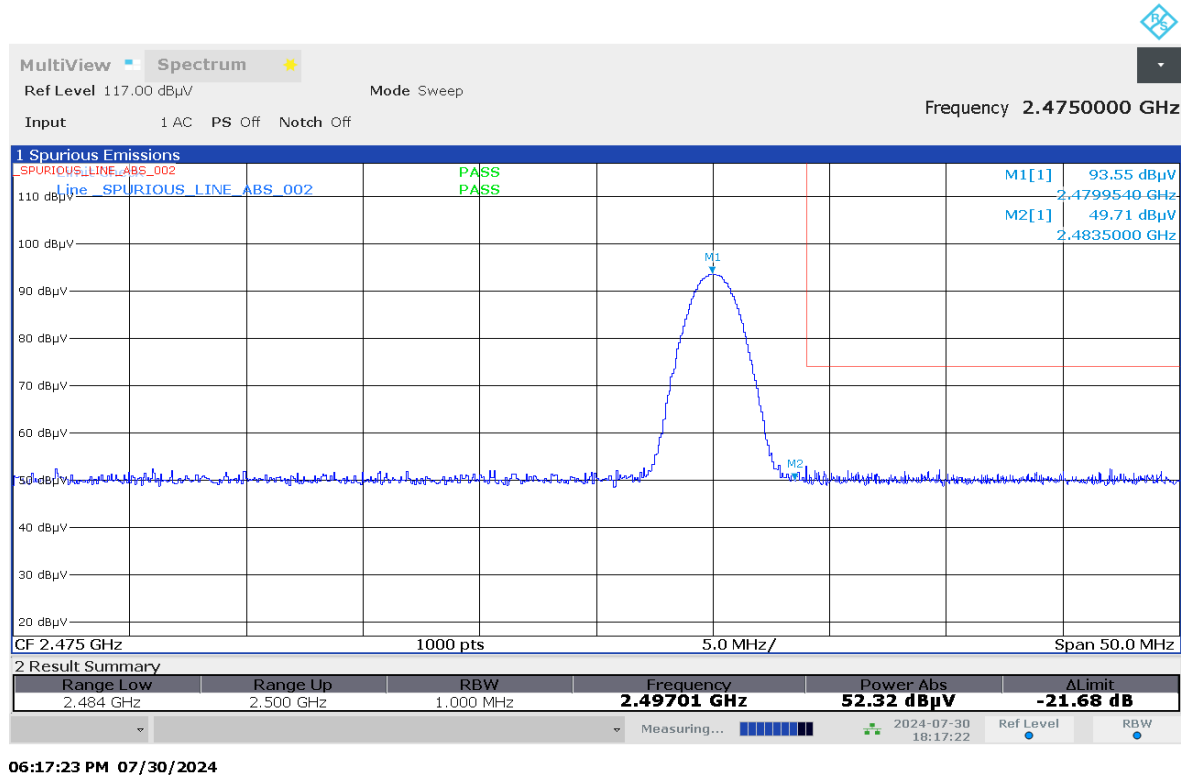


Restricted Band Edge (High Channel, Horizontal, Peak) graphical screen shot

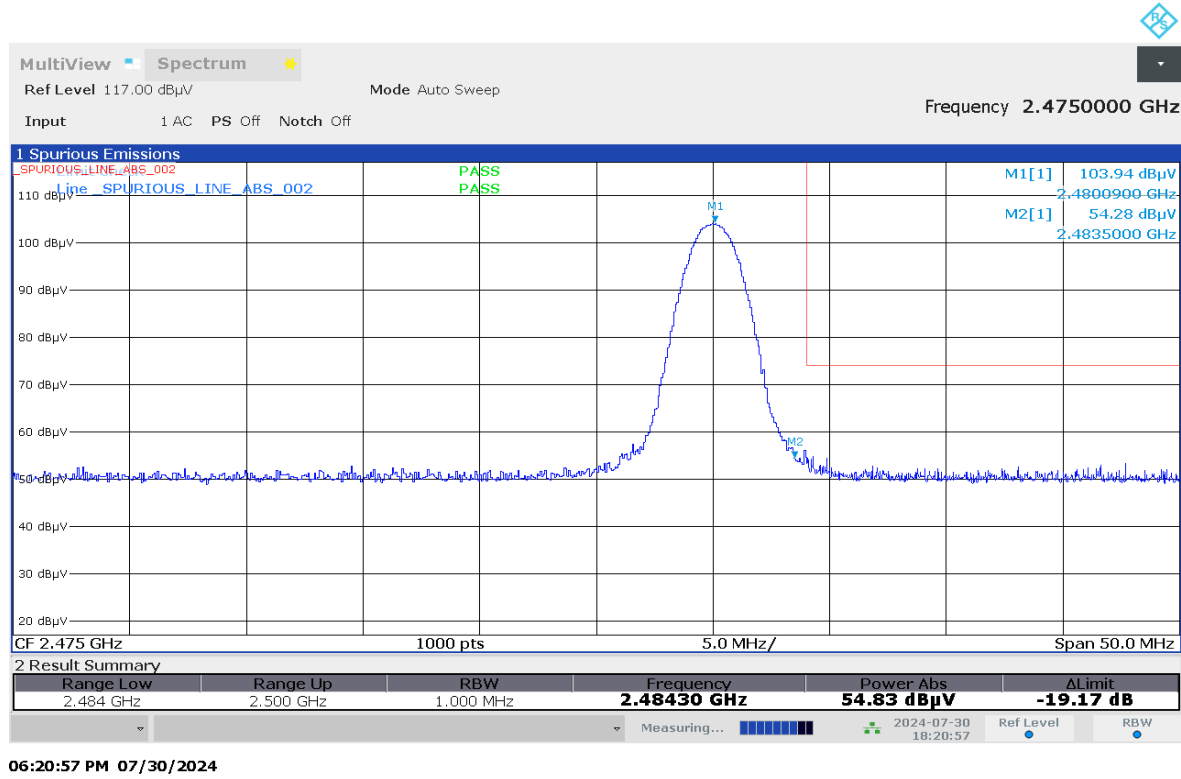

Restricted Band Edge (High Channel, Vertical, Average) graphical screen shot

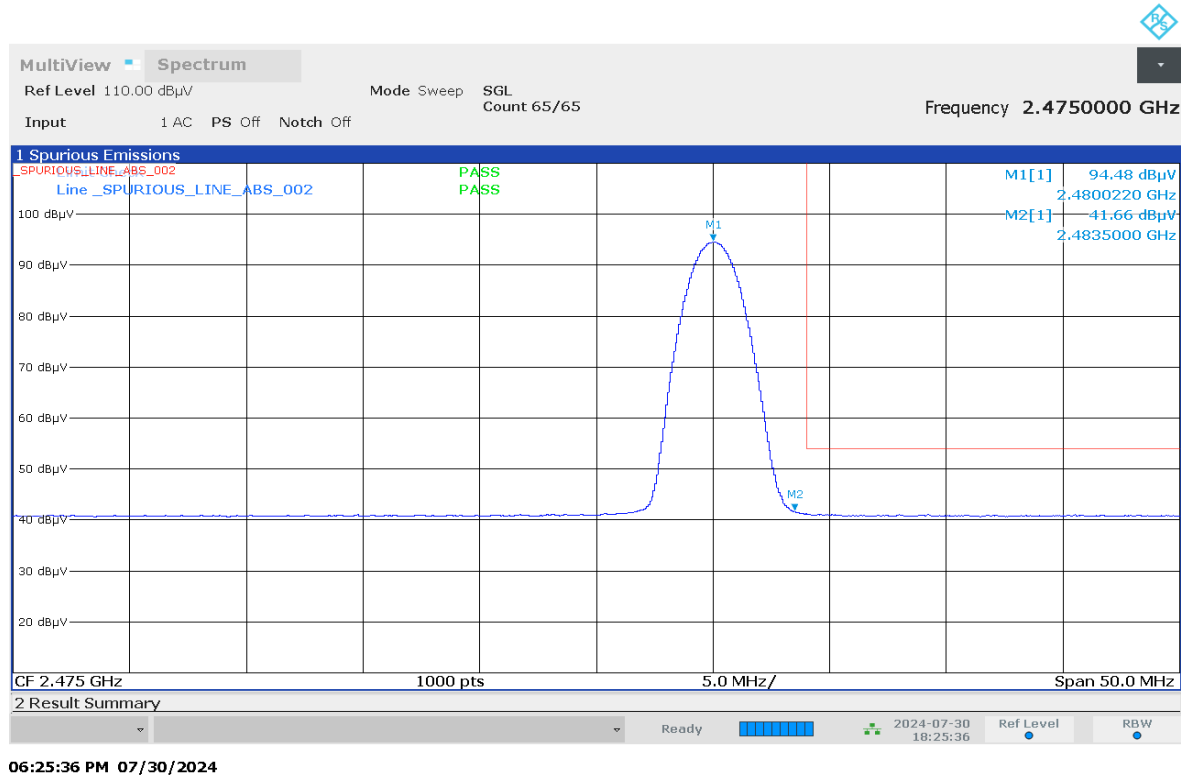

Restricted Band Edge (High Channel, Horizontal, Average) graphical screen shot

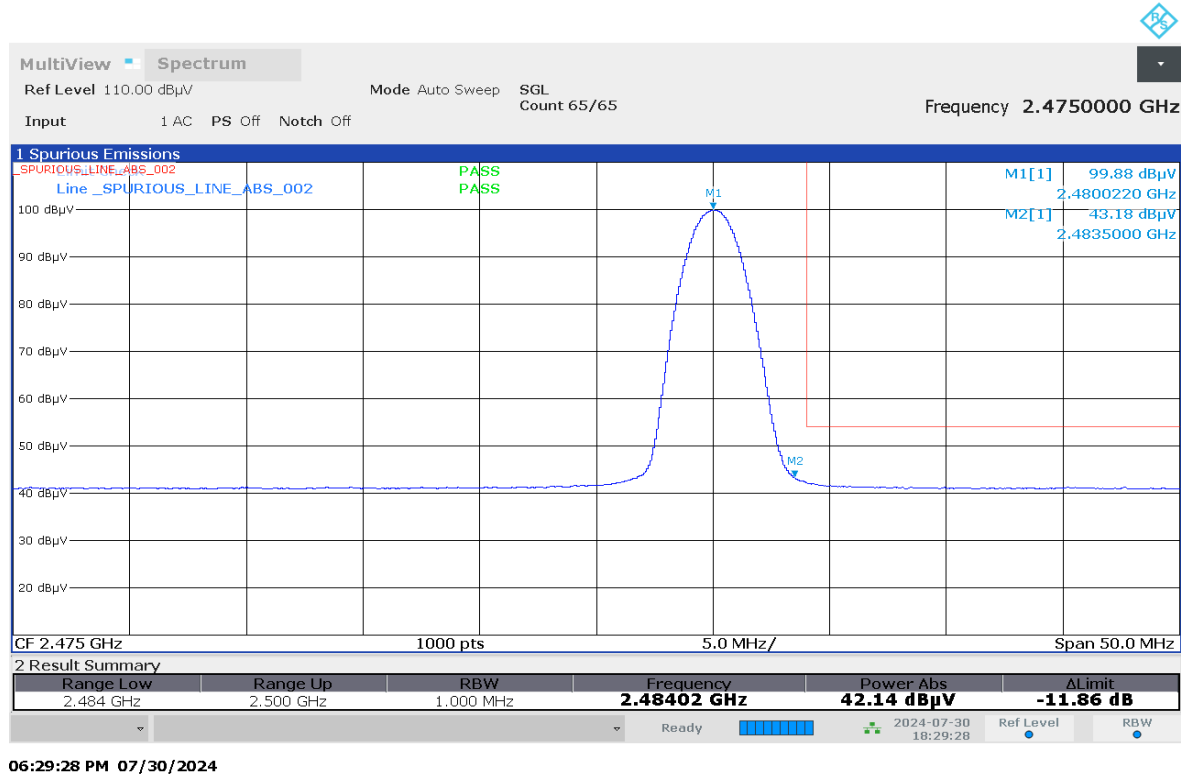

Test: Bluetooth SAC Transmitter Radiated Emission

Model#: AAH07JDH9SA1AN S/N: 651EAK0033 EMC SR ID#: 0680N01-EMC-00008

Battery: PMNN4890A Softpot power (9dBm) Accessory: PMAD4147A

Test Channel: Low Test Frequency: 2402.0000 MHz Test Standard: ANSI C63.10-2013

Worst Case Plane: Z-Plane (GFSK)

Radiated Emission (Low Channel) tabular data

Vertical Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dBµV/m)	Spur level PK (dBµV/m)	Spur level AV (dBµV/m)	Limit QPK (dBµV/m)	Limit PK (dBµV/m)	Limit AV (dBµV/m)	Margin QPK (dBµV/m)	Margin PK (dBµV/m)	Margin AV (dBµV/m)	Carrier PK Power (dBµV/m)
4804	-	48.1014**	-	-	74.0000	-	-	25.8986	-	-
7206	-	52.7213**	-	-	84.3522	-	-	31.6309	-	104.3522
9608	-	55.7439**	-	-	84.3522	-	-	28.6083	-	104.3522
12010	-	62.8501**	49.5947**	-	74.0000	54.0000	-	11.1499	4.4053	-
14412	-	62.8881**	-	-	84.3522	-	-	21.4641	-	104.3522
16814	-	66.3482**	-	-	84.3522	-	-	18.0040	-	104.3522
19216	-	40.7480**	-	-	74.0000	-	-	33.2520	-	-
21618	-	40.7776**	-	-	84.3522	-	-	43.5746	-	104.3522
24020	-	40.3623**	-	-	84.3522	-	-	43.9899	-	104.3522
Horizontal Radiated Emission Result										
4804	-	47.0032**	-	-	74.0000	-	-	26.9968	-	-
7206	-	52.8335**	-	-	84.3522	-	-	31.5187	-	104.3522
9608	-	55.6107**	-	-	84.3522	-	-	28.7415	-	104.3522
12010	-	63.5074**	49.5974**	-	74.0000	54.0000	-	10.4926	4.4026	-
14412	-	64.2273**	-	-	84.3522	-	-	20.1249	-	104.3522
16814	-	66.7872**	-	-	84.3522	-	-	17.5650	-	104.3522
19216	-	40.3115**	-	-	74.0000	-	-	33.6885	-	-
21618	-	41.0886**	-	-	84.3522	-	-	43.2636	-	104.3522
24020	-	40.1393**	-	-	84.3522	-	-	44.2129	-	104.3522

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Temperature (degC): 23.8 Humidity (%): 67.9


Test Performed by: Nazrin & Rezza Test Date: Fri, 2 Aug, 2024

System MU: 5.88 dB (30-1000MHz), 5.84 dB (1000-18000MHz), 6.02 dB (18000MHz-40000MHz)


Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported.


VERTICAL, PK

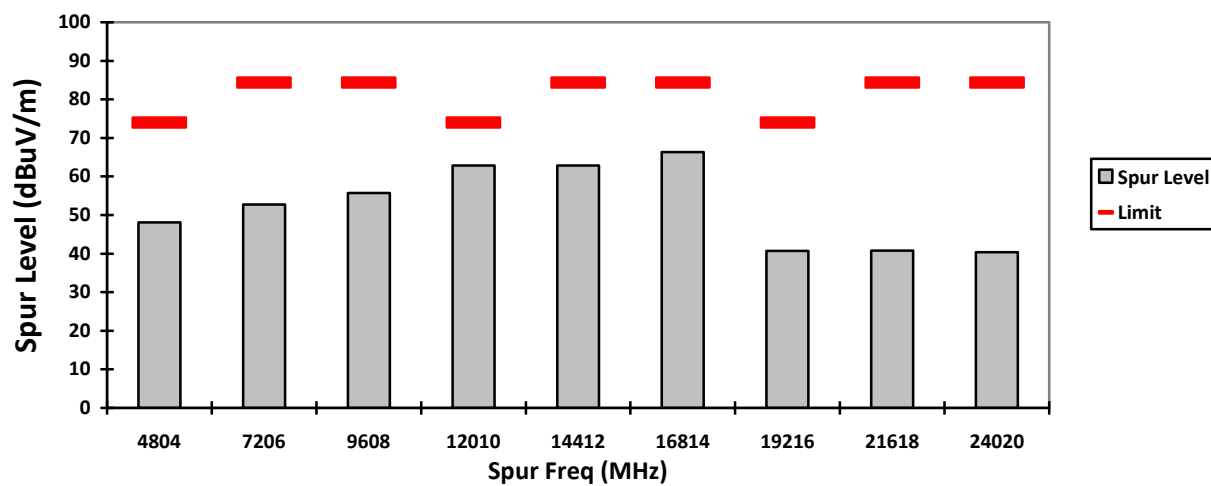


HORIZONTAL, PK

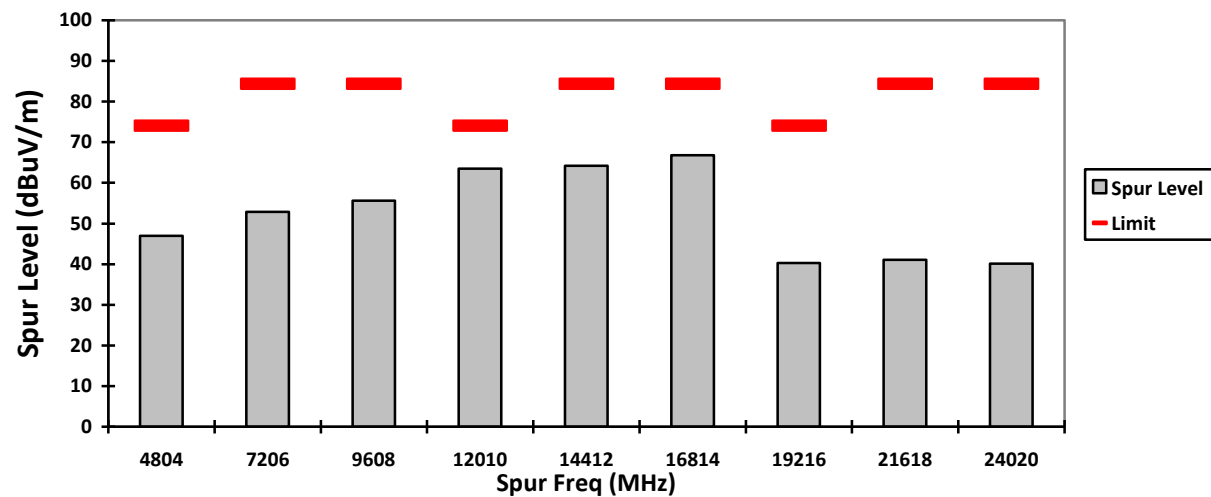

VERTICAL, AV

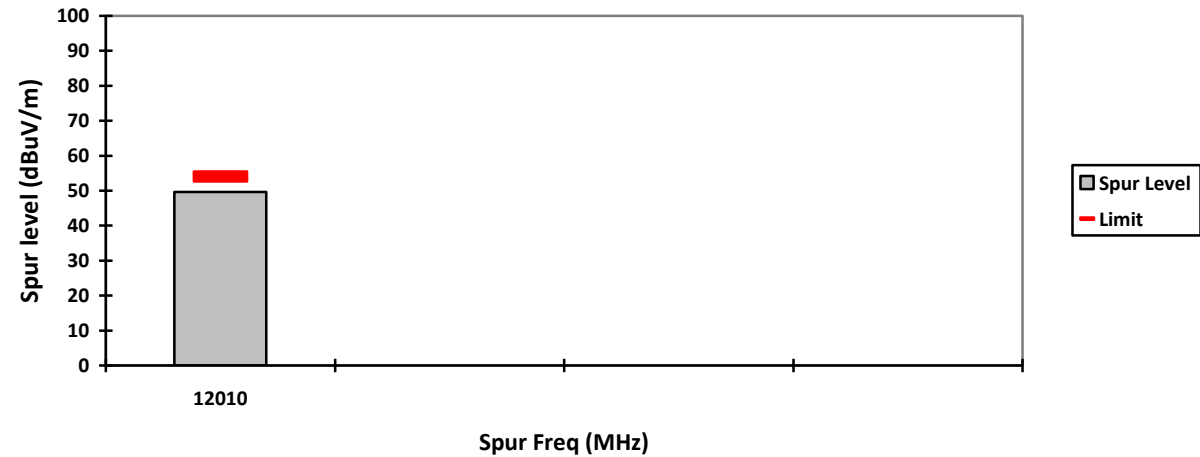

HORIZONTAL, AV

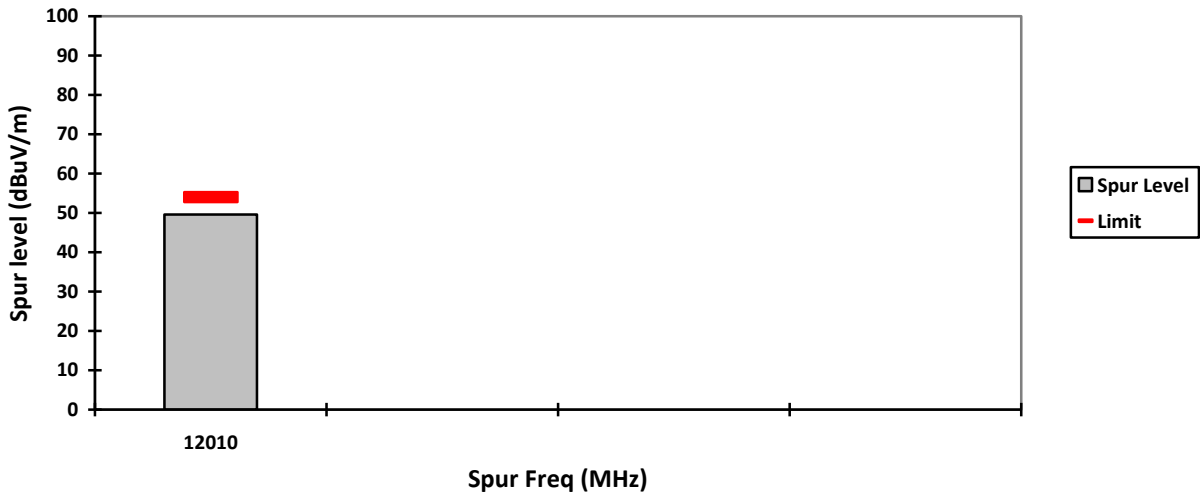

Test: Bluetooth SAC Transmitter Radiated Emission

Model#: AAH07JDH9SA1AN S/N: 651EAK0033 EMC SR ID#: 0680N01-EMC-00008

Battery: PMNN4890A Softpot power (9dBm) Accessory: PMAD4147A

Test Channel: Mid Test Frequency: 2441.0000 MHz Test Standard: ANSI C63.10-2013

Worst Case Plane: Z-Plane (GFSK)

Radiated Emission (Mid Channel) tabular data

Vertical Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dBµV/m)	Spur level PK (dBµV/m)	Spur level AV (dBµV/m)	Limit QPK (dBµV/m)	Limit PK (dBµV/m)	Limit AV (dBµV/m)	Margin QPK (dBµV/m)	Margin PK (dBµV/m)	Margin AV (dBµV/m)	Carrier PK Power (dBµV/m)
4882	-	47.5907**	-	-	74.0000	-	-	26.4093	-	-
7323	-	56.8869**	42.9557**	-	74.0000	54.0000	-	17.1131	11.0443	-
9764	-	54.5378**	-	-	84.3522	-	-	29.8144	-	104.3522
12205	-	63.7901**	49.7657**	-	74.0000	54.0000	-	10.2099	4.2343	-
14646	-	64.7580**	-	-	84.3522	-	-	19.5942	-	104.3522
17087	-	68.6210**	-	-	84.3522	-	-	15.7312	-	104.3522
19528	-	39.4795**	-	-	74.0000	-	-	34.5205	-	-
21969	-	41.3969**	-	-	84.3522	-	-	42.9553	-	104.3522
24410	-	41.1916**	-	-	84.3522	-	-	43.1606	-	104.3522
Horizontal Radiated Emission Result										
4882	-	49.7659**	-	-	74.0000	-	-	24.2341	-	-
7323	-	56.1599**	42.9860**	-	74.0000	54.0000	-	17.8401	11.0140	-
9764	-	56.2230**	-	-	84.3522	-	-	28.1292	-	104.3522
12205	-	63.6719**	49.9508**	-	74.0000	54.0000	-	10.3281	4.0492	-
14646	-	63.6837**	-	-	84.3522	-	-	20.6685	-	104.3522
17087	-	69.7373**	-	-	84.3522	-	-	14.6149	-	104.3522
19528	-	39.7948**	-	-	74.0000	-	-	34.2052	-	-
21969	-	42.3408**	-	-	84.3522	-	-	42.0114	-	104.3522
24410	-	40.3734**	-	-	84.3522	-	-	43.9788	-	104.3522

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Temperature (degC): 23.8 Humidity (%): 67.9


Test Performed by: Nazrin & Rezza Test Date: Fri, 2 Aug, 2024

System MU: 5.88 dB (30-1000MHz), 5.84 dB (1000-18000MHz), 6.02 dB (18000MHz-40000MHz)


Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported.


VERTICAL, PK

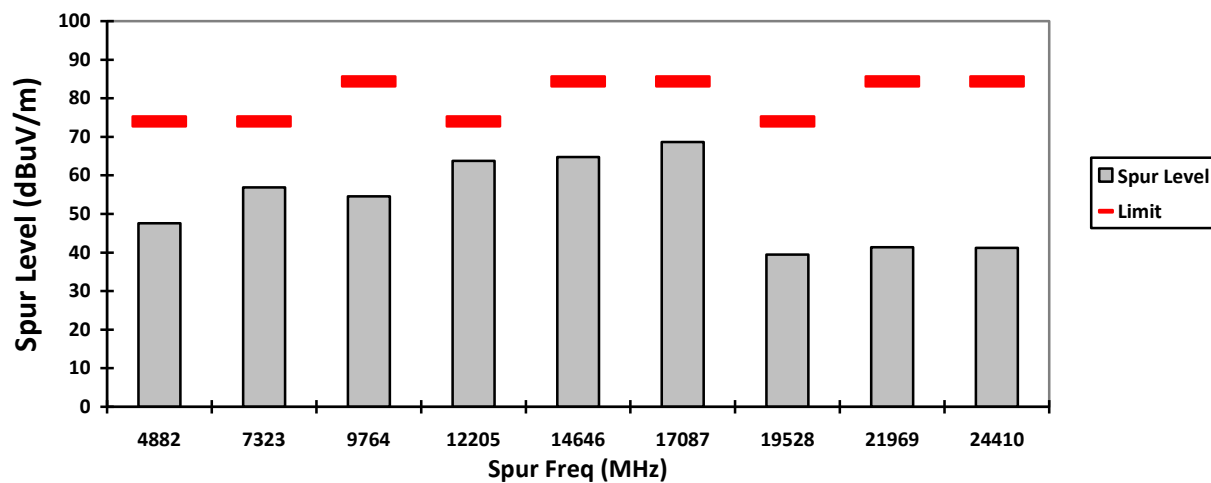


HORIZONTAL, PK

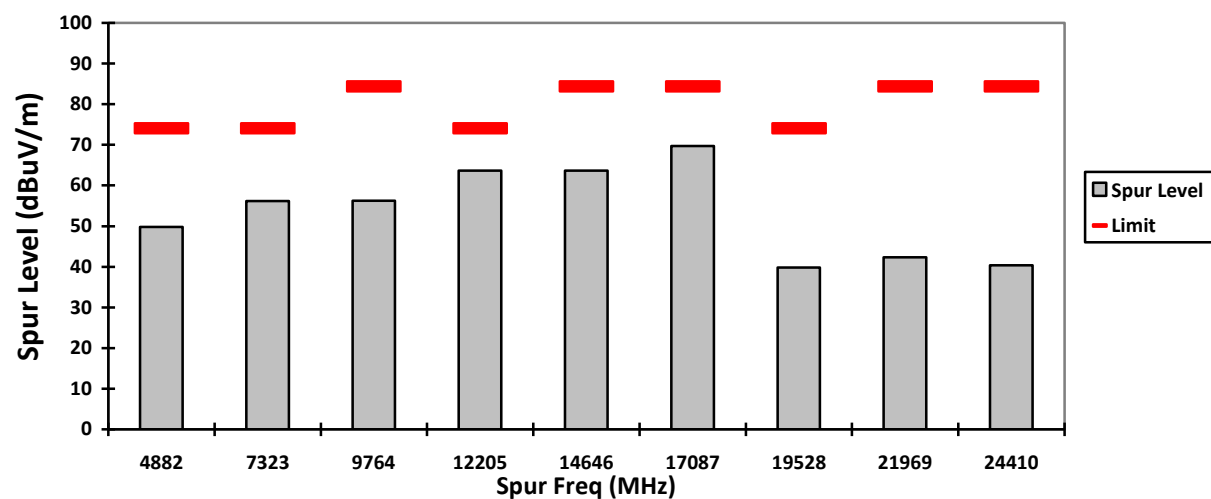

VERTICAL, AV

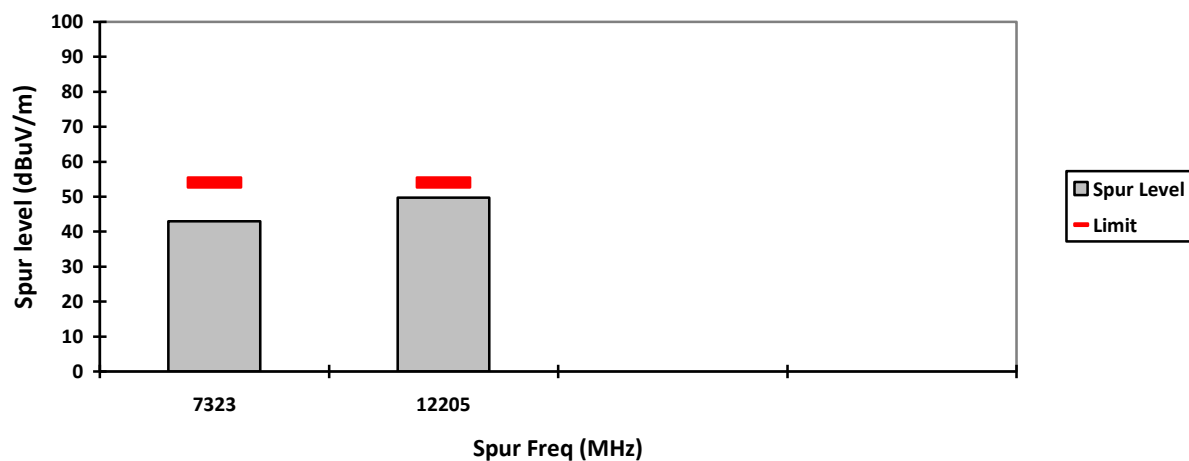

HORIZONTAL, AV

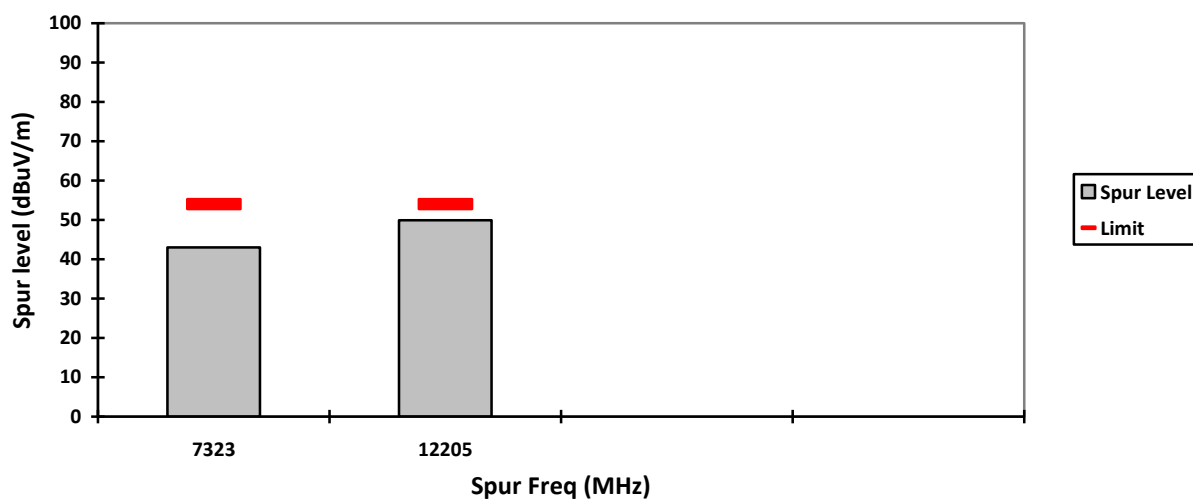

Test: Bluetooth SAC Transmitter Radiated Emission

Model#: AAH07JDH9SA1AN S/N: 651EAK0033 EMC SR ID#: 0680N01-EMC-00008

Battery: PMNN4890A Softpot power (9dBm) Accessory: PMAD4147A

Test Channel: High Test Frequency: 2480.0000 MHz Test Standard: ANSI C63.10-2013

Worst Case Plane: Z-Plane (GFSK)

Radiated Emission (High Channel) tabular data

Vertical Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dBµV/m)	Spur level PK (dBµV/m)	Spur level AV (dBµV/m)	Limit QPK (dBµV/m)	Limit PK (dBµV/m)	Limit AV (dBµV/m)	Margin QPK (dBµV/m)	Margin PK (dBµV/m)	Margin AV (dBµV/m)	Carrier PK Power (dBµV/m)
4960	-	49.1801**	-	-	74.0000	-	-	24.8199	-	-
7440	-	56.2008**	33.7008**	-	74.0000	54.0000	-	17.7992	20.2992	-
9920	-	54.1337**	-	-	84.3522	-	-	30.2185	-	104.3522
12400	-	64.2583**	41.7583**	-	74.0000	54.0000	-	9.7417	12.2417	-
14880	-	64.4635**	-	-	84.3522	-	-	19.8887	-	104.3522
17360	-	68.9081**	-	-	84.3522	-	-	15.4441	-	104.3522
19840	-	40.9464**	-	-	74.0000	-	-	33.0536	-	-
22320	-	41.4498**	-	-	74.0000	-	-	32.5502	-	-
24800	-	40.7186**	-	-	84.3522	-	-	43.6336	-	104.3522
Horizontal Radiated Emission Result										
4960	-	47.9348**	-	-	74.0000	-	-	26.0652	-	-
7440	-	56.4458**	33.9458**	-	74.0000	54.0000	-	17.5542	20.0542	-
9920	-	54.9937**	-	-	84.3522	-	-	29.3585	-	104.3522
12400	-	64.1181**	41.6181**	-	74.0000	54.0000	-	9.8819	12.3819	-
14880	-	64.9079**	-	-	84.3522	-	-	19.4443	-	104.3522
17360	-	70.0982**	-	-	84.3522	-	-	14.2540	-	104.3522
19840	-	40.5795**	-	-	74.0000	-	-	33.4205	-	-
22320	-	42.4752**	-	-	74.0000	-	-	31.5248	-	-
24800	-	41.9357**	-	-	84.3522	-	-	42.4165	-	104.3522

Remarks:	Marginal Result	Fail Result
Pass Result		

Temperature (degC): 23.8 Humidity (%): 67.9


Test Performed by: Nazrin & Rezza Test Date: Fri, 2 Aug, 2024

System MU: 5.88 dB (30-1000MHz), 5.84 dB (1000-18000MHz), 6.02 dB (18000MHz-40000MHz)


Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported.


VERTICAL, PK

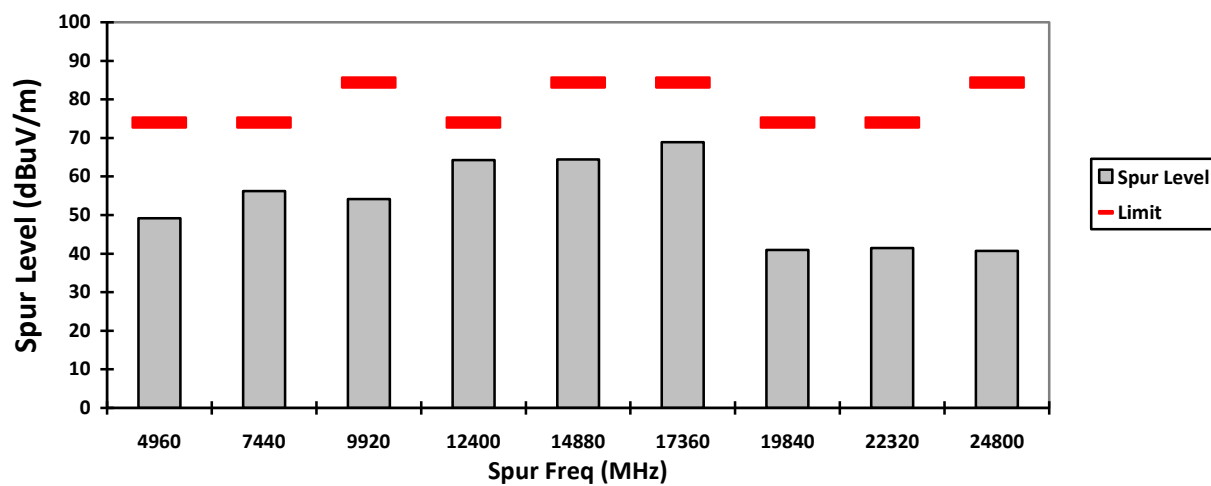


HORIZONTAL, PK

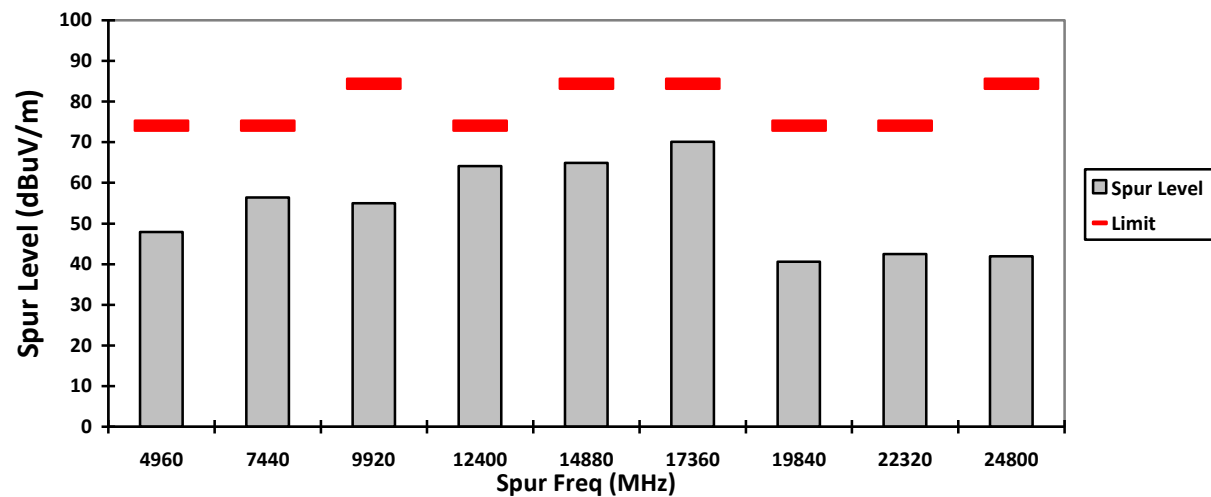

VERTICAL, AV

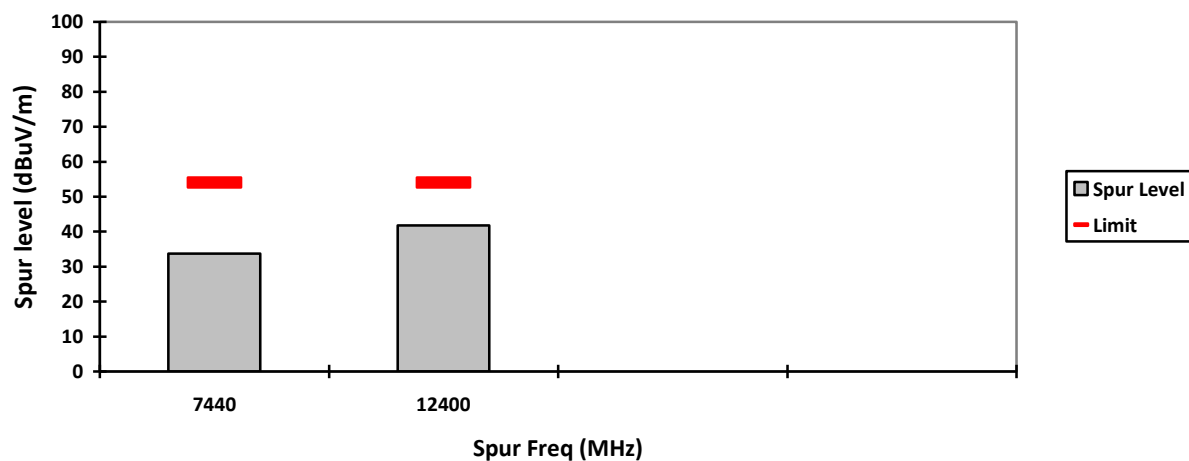

HORIZONTAL, AV

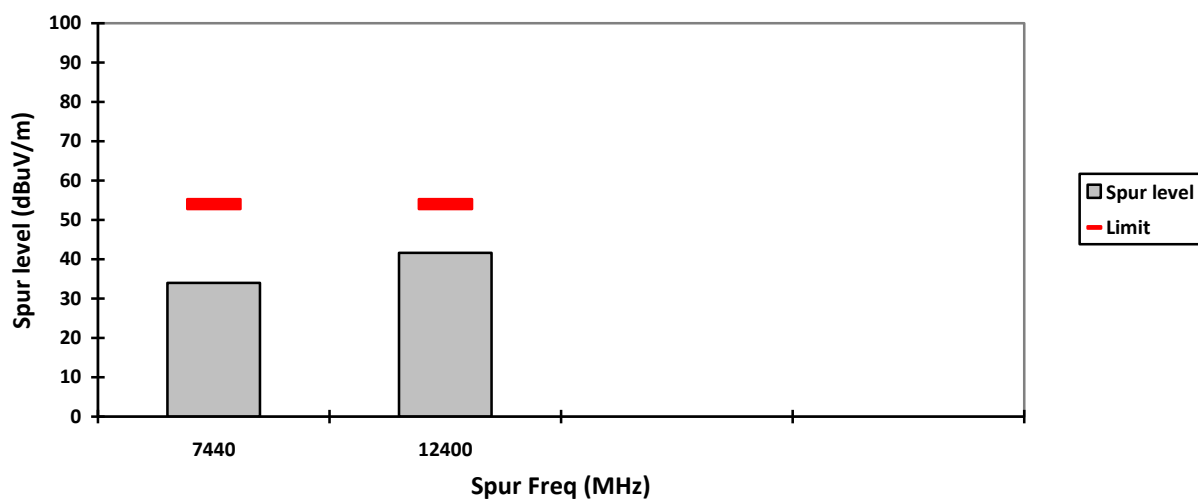

NOTE:

Transmitter Duty Cycle Calculation, FCC Rule 15.35 (b,c)

Based on the Bluetooth Specification Version 2.1+EDR, and worst case AFH mode, transmitter ON time is independent of packet type (DH1, DH3 and DH5) and packet length, the AFH mode Duty cycle connection factor as below:


Channel hop rate = 800 hops/second (AFH Mode)
Adjusted channel hop rate for DH5 mode = 133.33 hops/second
Time per channel hop = $1 / 133.33 \text{ hops/second} = 7.5 \text{ ms}$
Time to cycle through all channels = $7.5 \times 20 \text{ channels} = 150 \text{ ms}$
Number of times transmitter hits on one channel = $100 \text{ ms} / 150 \text{ ms} = 1 \text{ time(s)}$
Worst case dwell time = 7.5 ms
Duty cycle connection factor = $20\log_{10} (7.5\text{ms} / 100\text{ms}) = -22.5 \text{ dB}$

Radiated Emission (Low Channel) tabular data


Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
***Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported.**


VERTICAL, PK

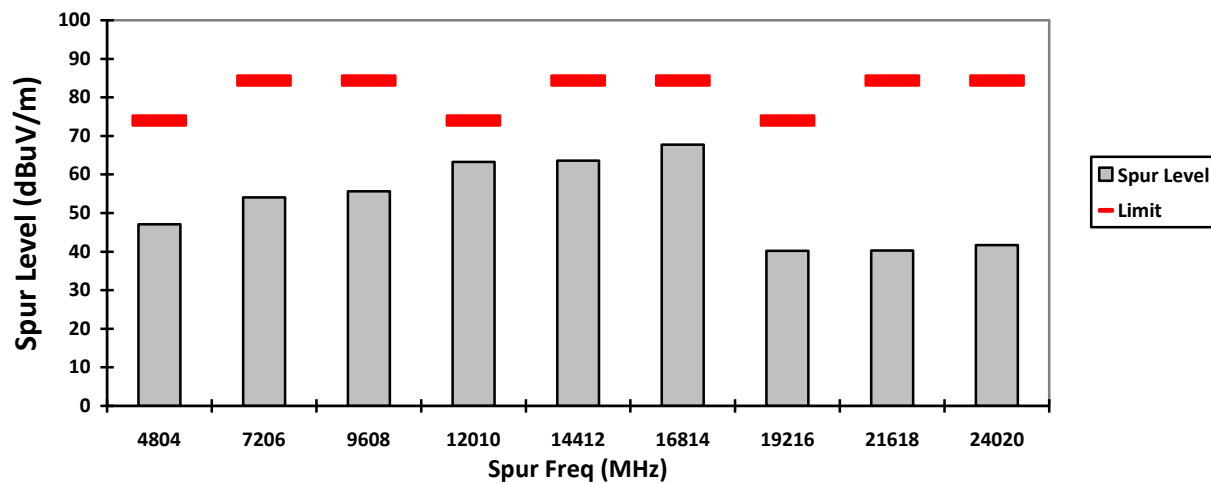


HORIZONTAL, PK

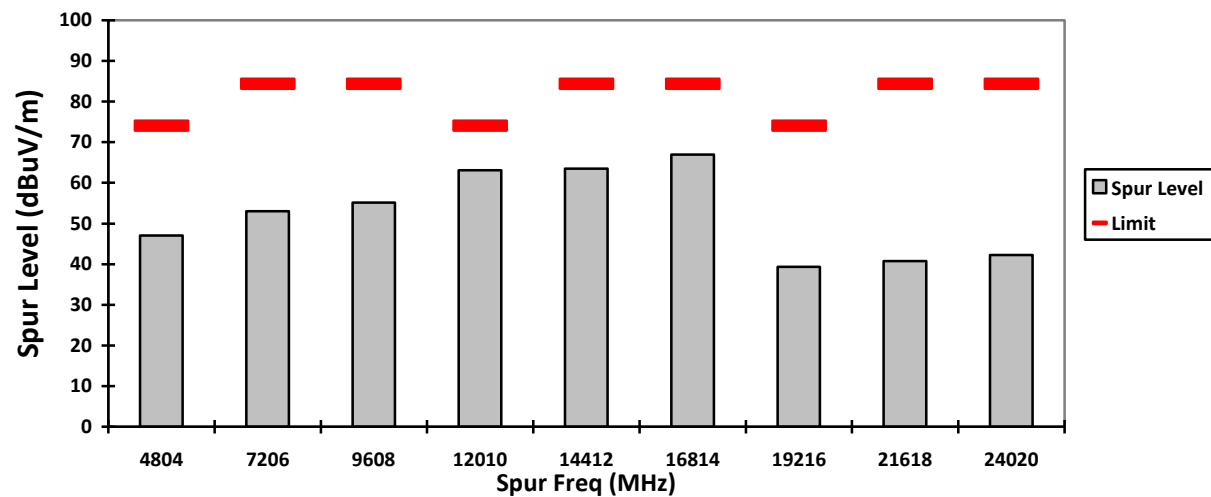

VERTICAL, AV

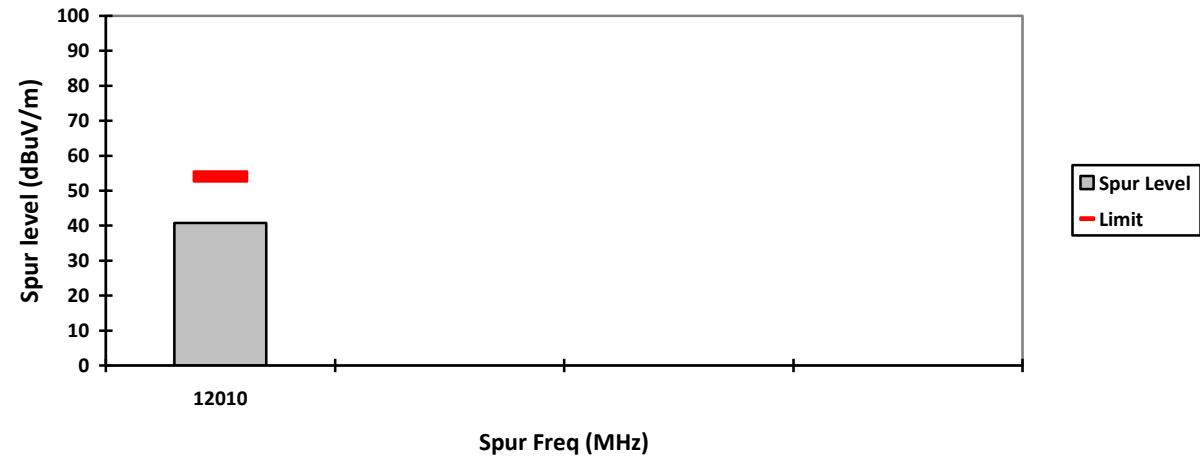

HORIZONTAL, AV

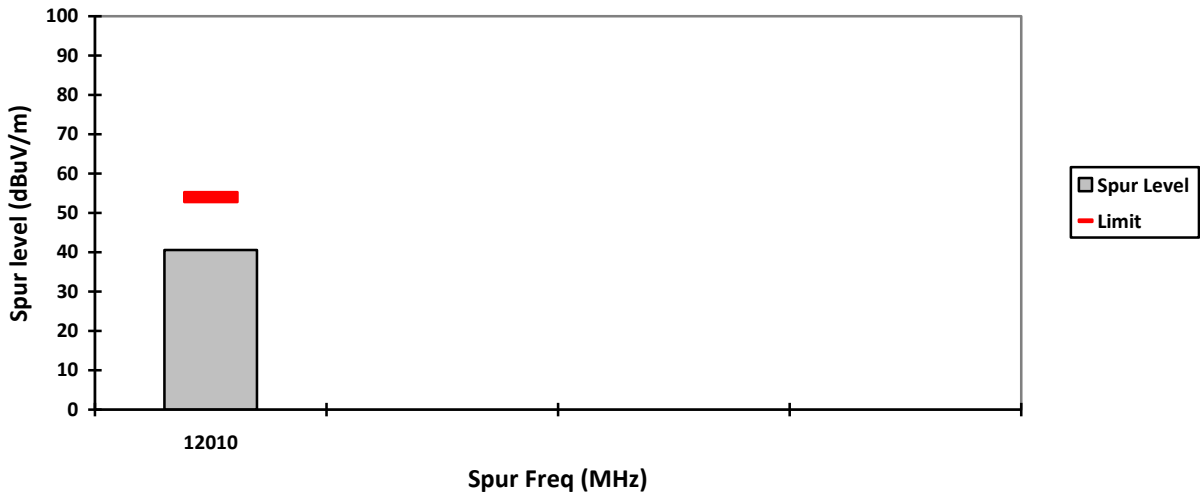

Test: Bluetooth SAC Transmitter Radiated Emission

Model#: AAH07JDH9SA1AN S/N: 651EAK0033 EMC SR ID#: 0680N01-EMC-00008

Battery: PMNN4890A Softpot power (10dBm) Accessory: PMAD4147A

Test Channel: Mid Test Frequency: 2441.0000 MHz Test Standard: ANSI C63.10-2013

Worst Case Plane: Z-Plane (Pi/4 DQPSK)

Radiated Emission (Mid Channel) tabular data

Vertical Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dBµV/m)	Spur level PK (dBµV/m)	Spur level AV (dBµV/m)	Limit QPK (dBµV/m)	Limit PK (dBµV/m)	Limit AV (dBµV/m)	Margin QPK (dBµV/m)	Margin PK (dBµV/m)	Margin AV (dBµV/m)	Carrier PK Power (dBµV/m)
4882	-	48.0592**	-	-	74.0000	-	-	25.9408	-	-
7323	-	56.5168**	34.0168**	-	74.0000	54.0000	-	17.4832	19.9832	-
9764	-	57.3168**	-	-	84.3522	-	-	27.0354	-	104.3522
12205	-	63.2476**	40.7476**	-	74.0000	54.0000	-	10.7524	13.2524	-
14646	-	64.5100**	-	-	84.3522	-	-	19.8422	-	104.3522
17087	-	68.0134**	-	-	84.3522	-	-	16.3388	-	104.3522
19528	-	39.2829**	-	-	74.0000	-	-	34.7171	-	-
21969	-	40.5719**	-	-	84.3522	-	-	43.7803	-	104.3522
24410	-	41.1291**	-	-	84.3522	-	-	43.2231	-	104.3522
Horizontal Radiated Emission Result										
4882	-	48.8096**	-	-	74.0000	-	-	25.1904	-	-
7323	-	56.3079**	33.8079**	-	74.0000	54.0000	-	17.6921	20.1921	-
9764	-	53.9668**	-	-	84.3522	-	-	30.3854	-	104.3522
12205	-	63.7948**	41.2948**	-	74.0000	54.0000	-	10.2052	12.7052	-
14646	-	63.9587**	-	-	84.3522	-	-	20.3935	-	104.3522
17087	-	69.1500**	-	-	84.3522	-	-	15.2022	-	104.3522
19528	-	38.6964**	-	-	74.0000	-	-	35.3036	-	-
21969	-	42.2058**	-	-	84.3522	-	-	42.1464	-	104.3522
24410	-	42.1337**	-	-	84.3522	-	-	42.2185	-	104.3522

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Temperature (degC): 22.8 Humidity (%): 63.5


Test Performed by: Nazrin & Rezza Test Date: Fri, 2 Aug, 2024

System MU: 5.88 dB (30-1000MHz), 5.84 dB (1000-18000MHz), 6.02 dB (18000MHz-40000MHz)


Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported.


VERTICAL, PK

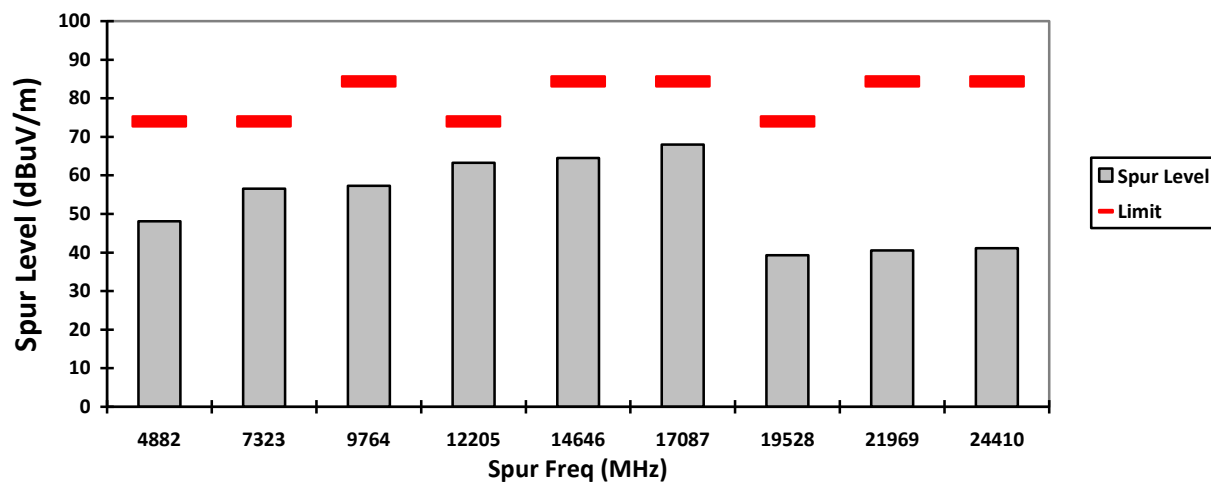


HORIZONTAL, PK

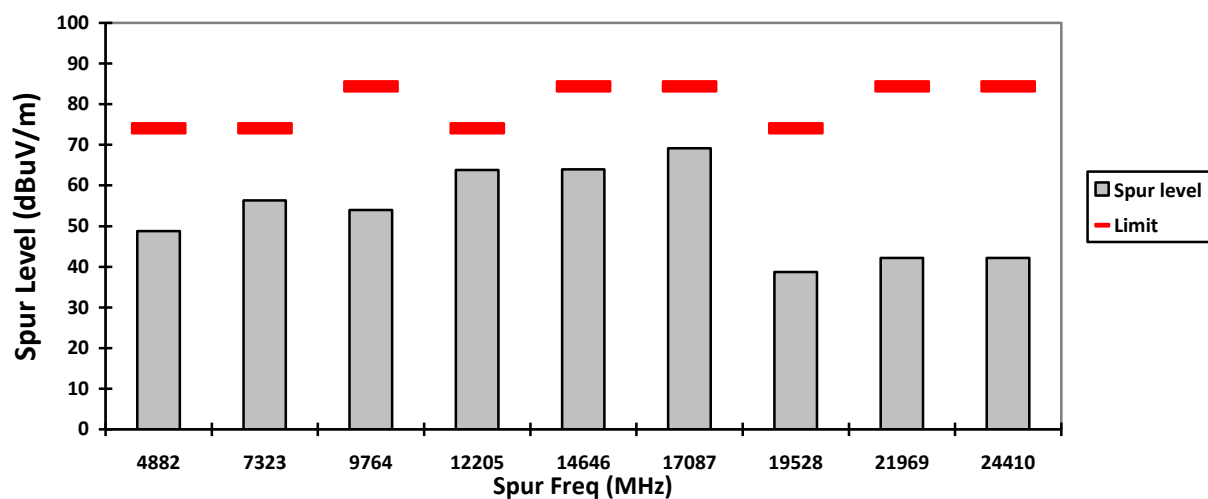

VERTICAL, AV

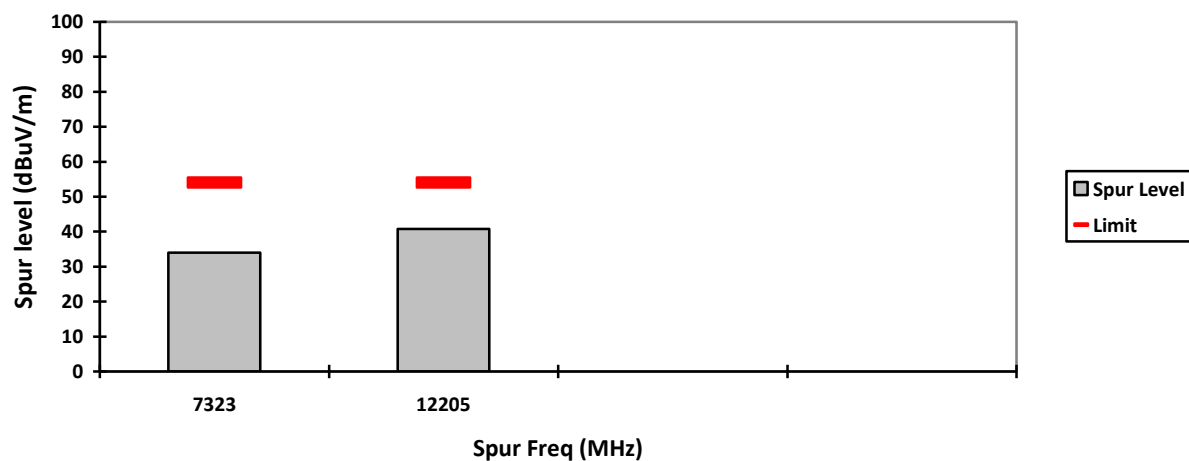

HORIZONTAL, AV

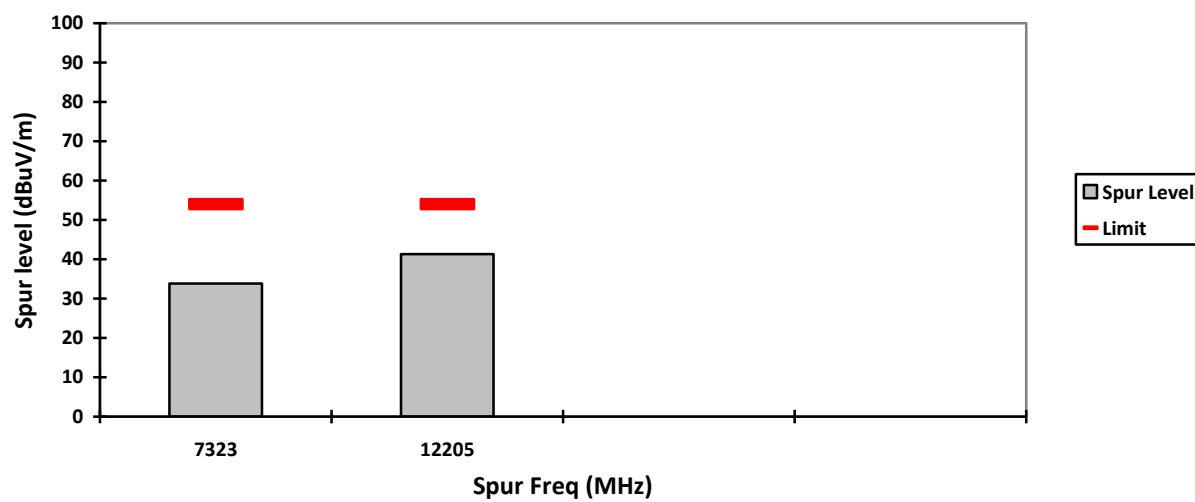


Radiated Emission (High Channel) tabular data


Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
***Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported.**


VERTICAL, PK

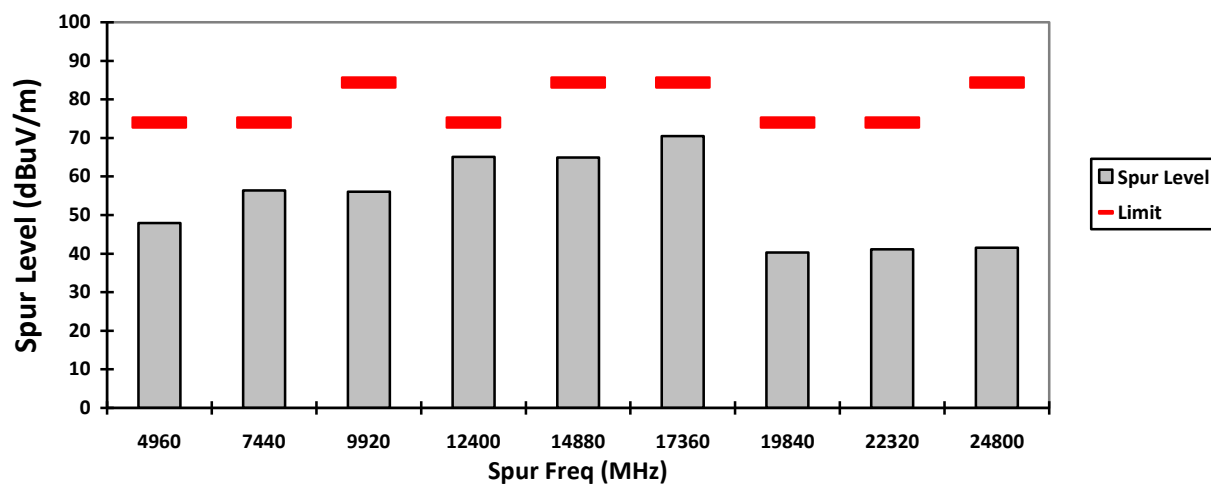


HORIZONTAL, PK

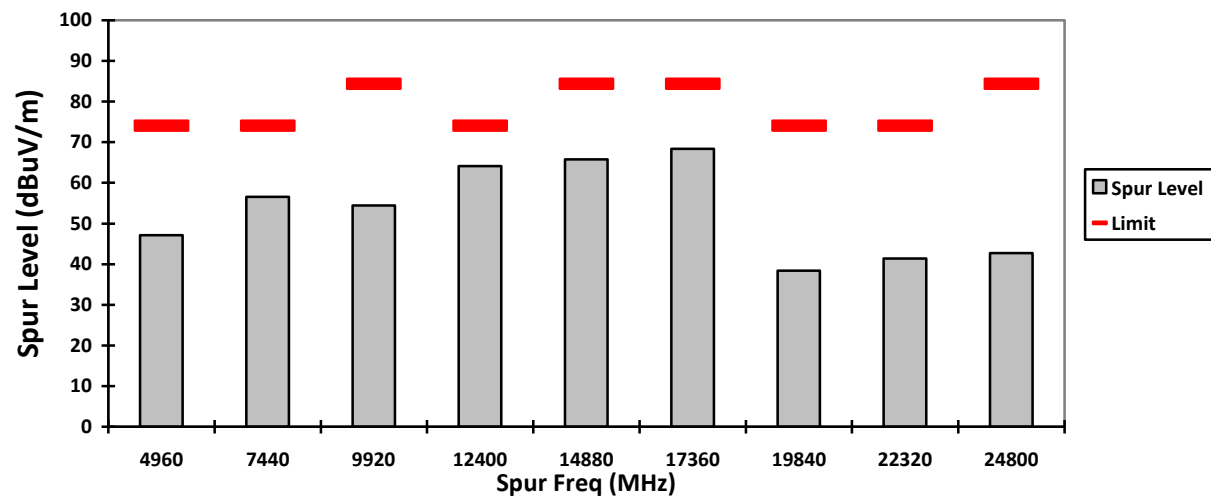

VERTICAL, AV

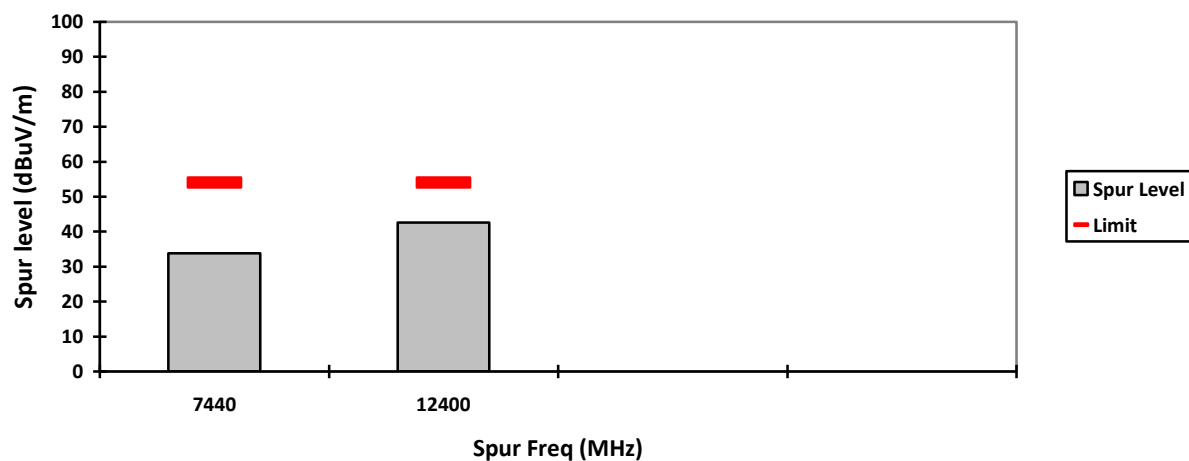

HORIZONTAL, AV

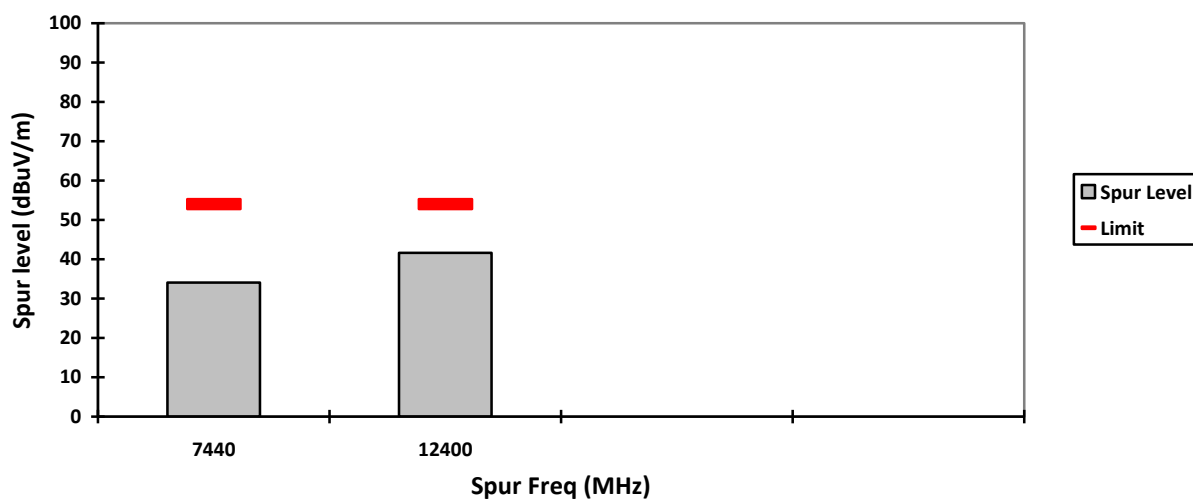

NOTE:

Transmitter Duty Cycle Calculation, FCC Rule 15.35 (b,c)

Based on the Bluetooth Specification Version 2.1+EDR, and worst case AFH mode, transmitter ON time is independent of packet type (DH1, DH3 and DH5) and packet length, the AFH mode Duty cycle connection factor as below:

Channel hop rate = 800 hops/second (AFH Mode)
Adjusted channel hop rate for DH5 mode = 133.33 hops/second
Time per channel hop = $1 / 133.33 \text{ hops/second} = 7.5 \text{ ms}$
Time to cycle through all channels = $7.5 \times 20 \text{ channels} = 150 \text{ ms}$
Number of times transmitter hits on one channel = $100 \text{ ms} / 150 \text{ ms} = 1 \text{ time(s)}$
Worst case dwell time = 7.5 ms
Duty cycle connection factor = $20\log_{10} (7.5\text{ms} / 100\text{ms}) = -22.5 \text{ dB}$

Test: Bluetooth SAC Transmitter Radiated Emission

Model#: AAH07JDH9SA1AN S/N: 651EAK0033 EMC SR ID#: 0680N01-EMC-00008

Battery: PMNN4890A Softpot power (10dBm) Accessory: PMAD4147A

Test Channel: Low Test Frequency: 2402.0000 MHz Test Standard: ANSI C63.10-2013

Worst Case Plane: Z-Plane (8DPSK)

Radiated Emission (Low Channel) tabular data

Vertical Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dBµV/m)	Spur level PK (dBµV/m)	Spur level AV (dBµV/m)	Limit QPK (dBµV/m)	Limit PK (dBµV/m)	Limit AV (dBµV/m)	Margin QPK (dBµV/m)	Margin PK (dBµV/m)	Margin AV (dBµV/m)	Carrier PK Power (dBµV/m)
4804	-	47.3574**	-	-	74.0000	-	-	26.6426	-	-
7206	-	52.9715**	-	-	84.3522	-	-	31.3807	-	104.3522
9608	-	55.7829**	-	-	84.3522	-	-	28.5693	-	104.3522
12010	-	63.1422**	40.6422**	-	74.0000	54.0000	-	10.8578	13.3578	-
14412	-	63.4386**	-	-	84.3522	-	-	20.9136	-	104.3522
16814	-	67.2212**	-	-	84.3522	-	-	17.1310	-	104.3522
19216	-	39.5163**	-	-	74.0000	-	-	34.4837	-	-
21618	-	40.9989**	-	-	84.3522	-	-	43.3533	-	104.3522
24020	-	40.3877**	-	-	84.3522	-	-	43.9645	-	104.3522
Horizontal Radiated Emission Result										
4804	-	47.6685**	-	-	74.0000	-	-	26.3315	-	-
7206	-	53.2273**	-	-	84.3522	-	-	31.1249	-	104.3522
9608	-	55.1901**	-	-	84.3522	-	-	29.1621	-	104.3522
12010	-	63.3752**	40.8752**	-	74.0000	54.0000	-	10.6248	13.1248	-
14412	-	63.6245**	-	-	84.3522	-	-	20.7277	-	104.3522
16814	-	66.9085**	-	-	84.3522	-	-	17.4437	-	104.3522
19216	-	39.8281**	-	-	74.0000	-	-	34.1719	-	-
21618	-	41.0256**	-	-	84.3522	-	-	43.3266	-	104.3522
24020	-	40.4065**	-	-	84.3522	-	-	43.9457	-	104.3522

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Temperature (degC): 23.8 Humidity (%): 67.9


Test Performed by: Nazrin & Rezza Test Date: Fri, 2 Aug, 2024

System MU: 5.88 dB (30-1000MHz), 5.84 dB (1000-18000MHz), 6.02 dB (18000MHz-40000MHz)


Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported.


VERTICAL, PK

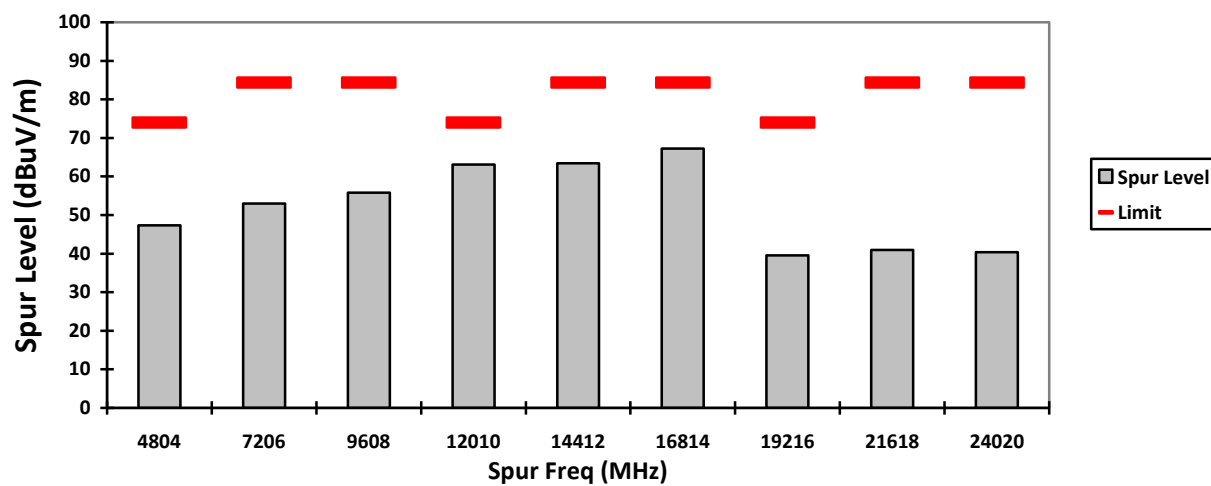


HORIZONTAL, PK

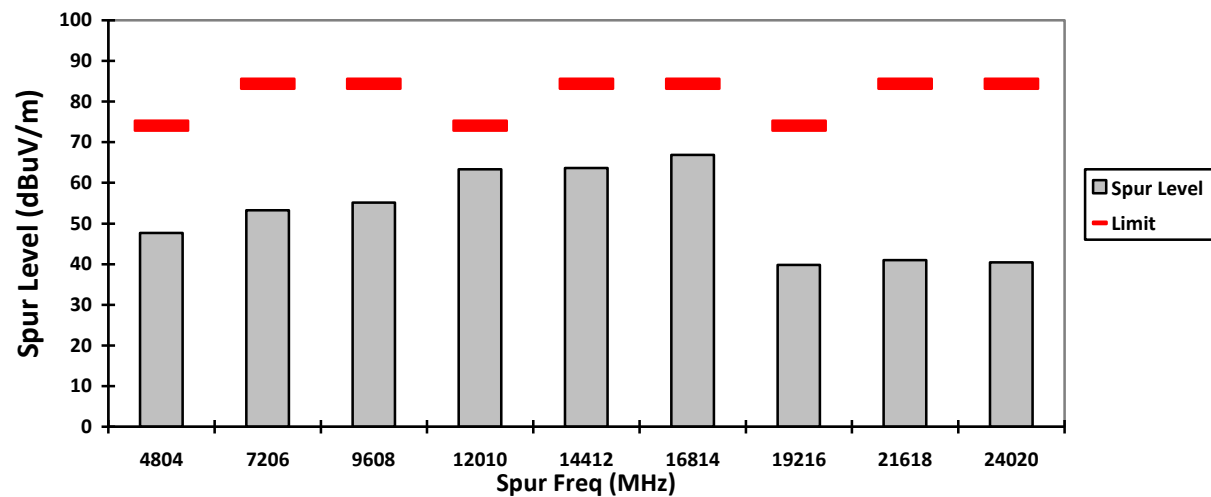

VERTICAL, AV

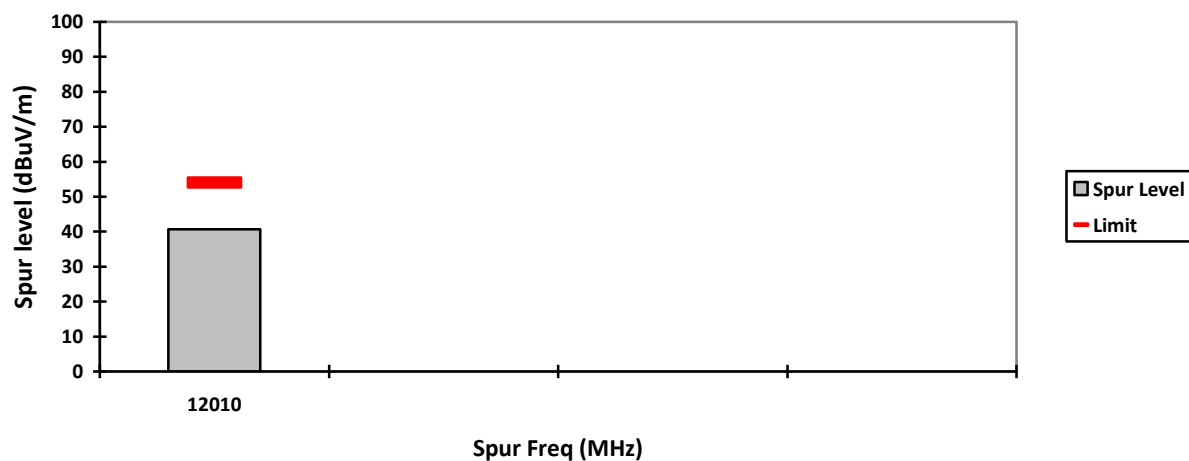

HORIZONTAL, AV

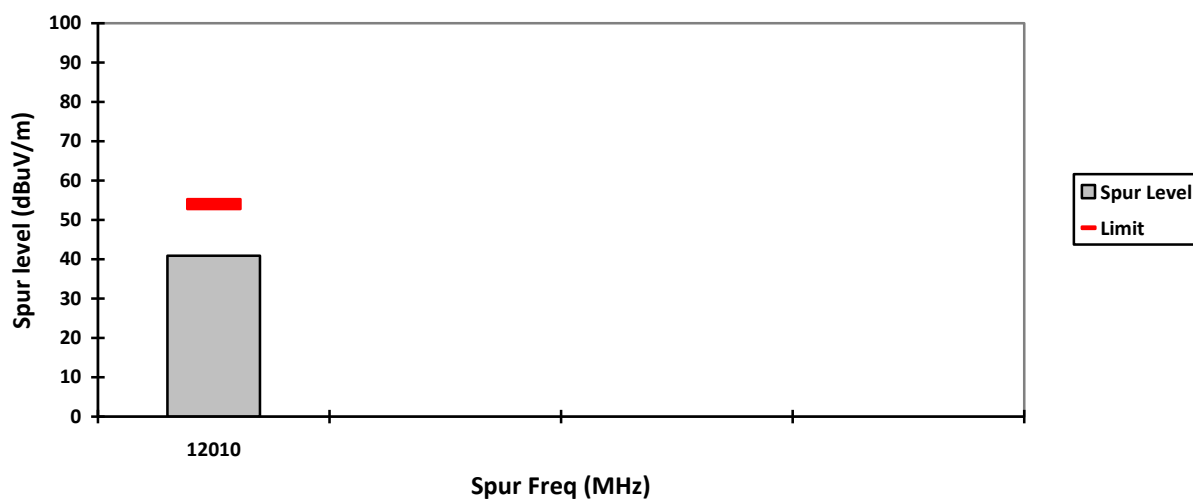

Test: Bluetooth SAC Transmitter Radiated Emission

Model#: AAH07JDH9SA1AN S/N: 651EAK0033 EMC SR ID#: 0680N01-EMC-00008

Battery: PMNN4890A Softpot power (10dBm) Accessory: PMAD4147A

Test Channel: Mid Test Frequency: 2441.0000 MHz Test Standard: ANSI C63.10-2013

Worst Case Plane: Z-Plane (8DPSK)

Radiated Emission (Mid Channel) tabular data

Vertical Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dBµV/m)	Spur level PK (dBµV/m)	Spur level AV (dBµV/m)	Limit QPK (dBµV/m)	Limit PK (dBµV/m)	Limit AV (dBµV/m)	Margin QPK (dBµV/m)	Margin PK (dBµV/m)	Margin AV (dBµV/m)	Carrier PK Power (dBµV/m)
4882	-	49.2479**	-	-	74.0000	-	-	24.7521	-	104.3522
7323	-	56.5908**	34.0908**	-	74.0000	54.0000	-	17.4092	19.9092	-
9764	-	55.8346**	-	-	84.3522	-	-	28.5176	-	104.3522
12205	-	63.6420**	41.1420**	-	74.0000	54.0000	-	10.3580	12.8580	-
14646	-	64.6196**	-	-	84.3522	-	-	19.7326	-	104.3522
17087	-	69.6543**	-	-	84.3522	-	-	14.6979	-	104.3522
19528	-	38.9783**	-	-	74.0000	-	-	35.0217	-	104.3522
21969	-	41.9338**	-	-	84.3522	-	-	42.4184	-	104.3522
24410	-	41.2153**	-	-	84.3522	-	-	43.1369	-	104.3522
Horizontal Radiated Emission Result										
4882	-	47.4425**	-	-	74.0000	-	-	26.5575	-	104.3522
7323	-	56.5201**	34.0201**	-	74.0000	54.0000	-	17.4799	19.9799	-
9764	-	54.4768**	-	-	84.3522	-	-	29.8754	-	104.3522
12205	-	63.8046**	41.3046**	-	74.0000	54.0000	-	10.1954	12.6954	-
14646	-	64.0105**	-	-	84.3522	-	-	20.3417	-	104.3522
17087	-	68.5266**	-	-	84.3522	-	-	15.8256	-	104.3522
19528	-	38.8638**	-	-	74.0000	-	-	35.1362	-	104.3522
21969	-	41.4684**	-	-	84.3522	-	-	42.8838	-	104.3522
24410	-	41.4234**	-	-	84.3522	-	-	42.9288	-	104.3522

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Temperature (degC): 23.8 Humidity (%): 67.9


Test Performed by: Nazrin & Rezza Test Date: Fri, 2 Aug, 2024

System MU: 5.88 dB (30-1000MHz), 5.84 dB (1000-18000MHz), 6.02 dB (18000MHz-40000MHz)


Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported.


VERTICAL, PK

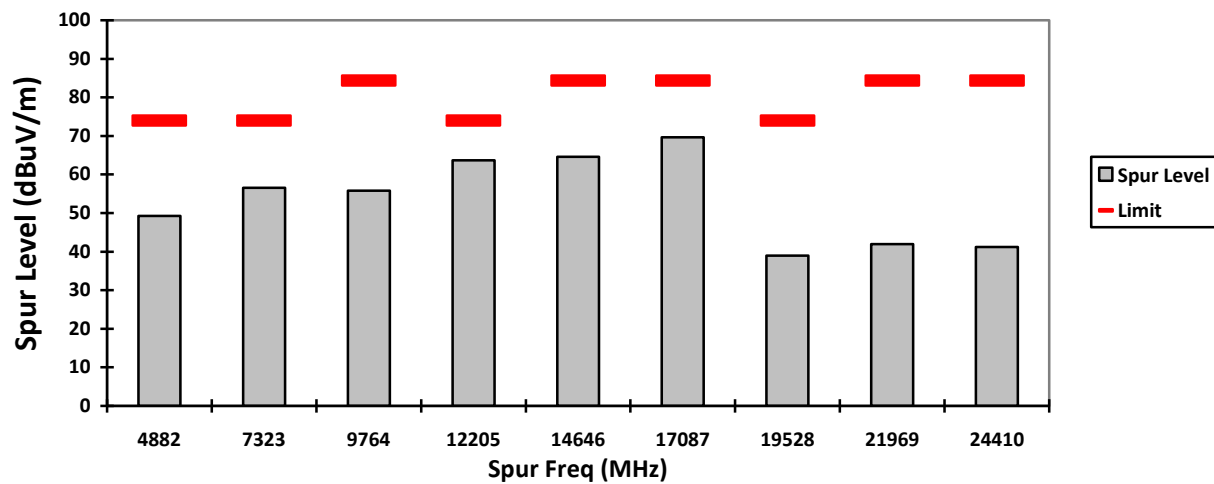


HORIZONTAL, PK

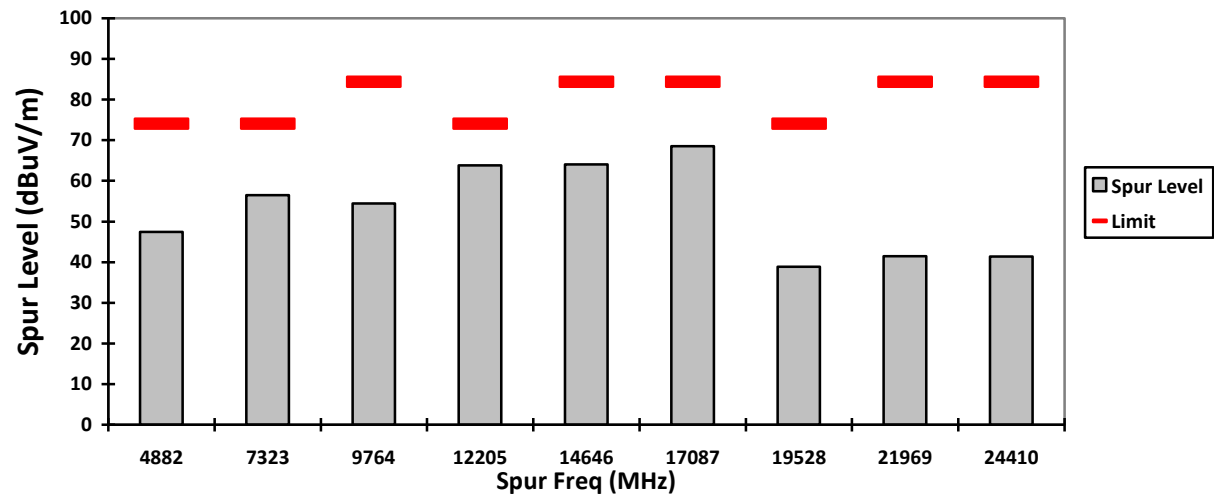

VERTICAL, AV

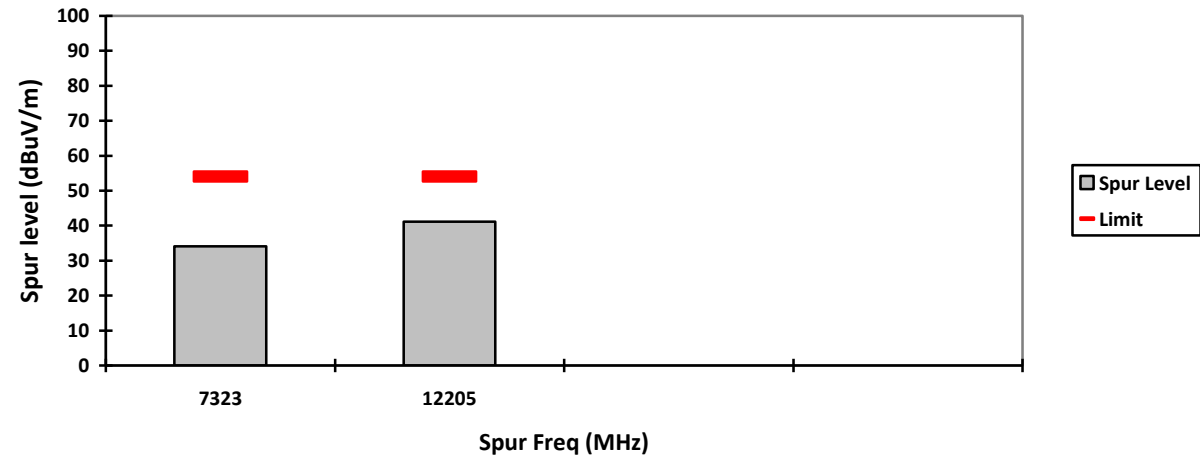

HORIZONTAL, AV

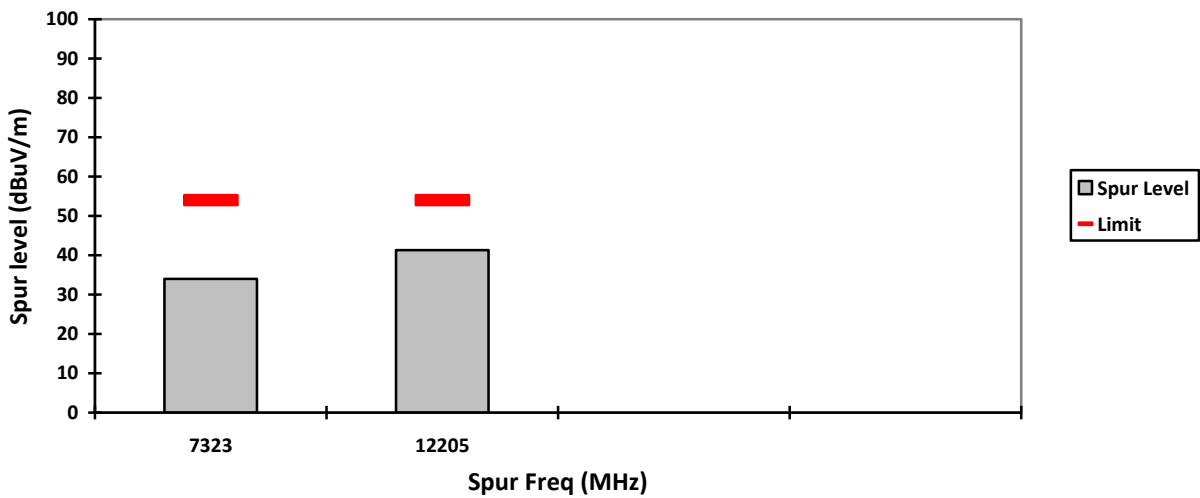

Test: Bluetooth SAC Transmitter Radiated Emission

Model#: AAH07JDH9SA1AN S/N: 651EAK0033 EMC SR ID#: 0680N01-EMC-00008

Battery: PMNN4890A Softpot power (10dBm) Accessory: PMAD4147A

Test Channel: High Test Frequency: 2480.0000 MHz Test Standard: ANSI C63.10-2013

Worst Case Plane: Z-Plane (8DPSK)

Radiated Emission (High Channel) tabular data

Vertical Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dBµV/m)	Spur level PK (dBµV/m)	Spur level AV (dBµV/m)	Limit QPK (dBµV/m)	Limit PK (dBµV/m)	Limit AV (dBµV/m)	Margin QPK (dBµV/m)	Margin PK (dBµV/m)	Margin AV (dBµV/m)	Carrier PK Power (dBµV/m)
4960	-	48.8265**	-	-	74.0000	-	-	25.1735	-	-
7440	-	56.9323**	34.4323**	-	74.0000	54.0000	-	17.0677	19.5677	-
9920	-	55.3783**	-	-	84.3522	-	-	28.9739	-	104.3522
12400	-	64.3310**	41.8310**	-	74.0000	54.0000	-	9.6690	12.1690	-
14880	-	65.4337**	-	-	84.3522	-	-	18.9185	-	104.3522
17360	-	69.5197**	-	-	84.3522	-	-	14.8325	-	104.3522
19840	-	38.7571**	-	-	74.0000	-	-	35.2429	-	-
22320	-	42.6857**	-	-	74.0000	-	-	31.3143	-	-
24800	-	41.5519**	-	-	84.3522	-	-	42.8003	-	104.3522
Horizontal Radiated Emission Result										
4960	-	48.1349**	-	-	74.0000	-	-	25.8651	-	-
7440	-	56.9427**	34.4427**	-	74.0000	54.0000	-	17.0573	19.5573	-
9920	-	54.6457**	-	-	84.3522	-	-	29.7065	-	104.3522
12400	-	64.2188**	41.7188**	-	74.0000	54.0000	-	9.7812	12.2812	-
14880	-	65.3909**	-	-	84.3522	-	-	18.9613	-	104.3522
17360	-	69.9067**	-	-	84.3522	-	-	14.4455	-	104.3522
19840	-	39.9100**	-	-	74.0000	-	-	34.0900	-	-
22320	-	41.5886**	-	-	74.0000	-	-	32.4114	-	-
24800	-	42.7592**	-	-	84.3522	-	-	41.5930	-	104.3522

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Temperature (degC): 23.8 Humidity (%): 67.9


Test Performed by: Nazrin & Rezza Test Date: Fri, 2 Aug, 2024

System MU: 5.88 dB (30-1000MHz), 5.84 dB (1000-18000MHz), 6.02 dB (18000MHz-40000MHz)


Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported.


VERTICAL, PK

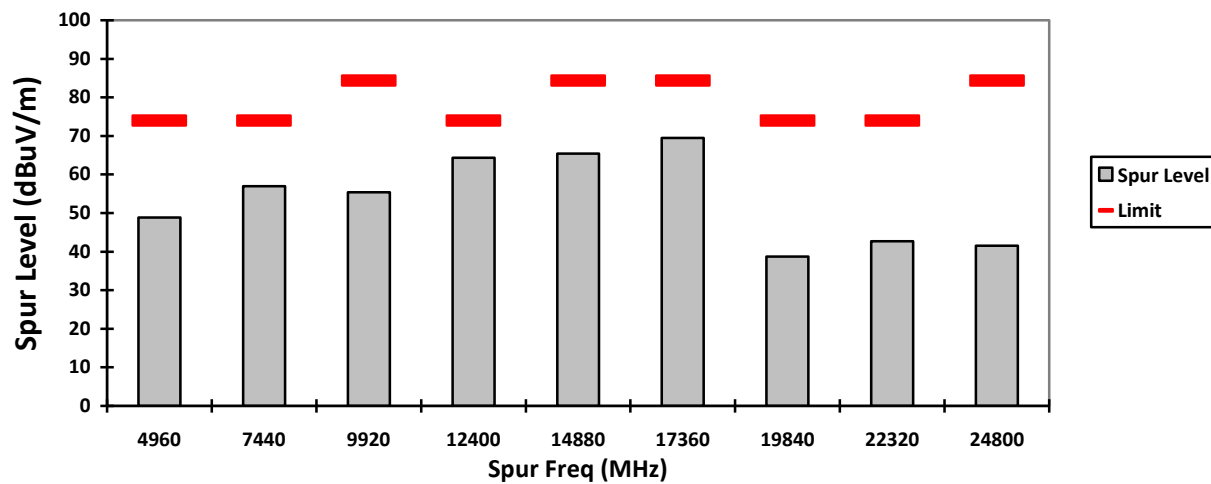


HORIZONTAL, PK

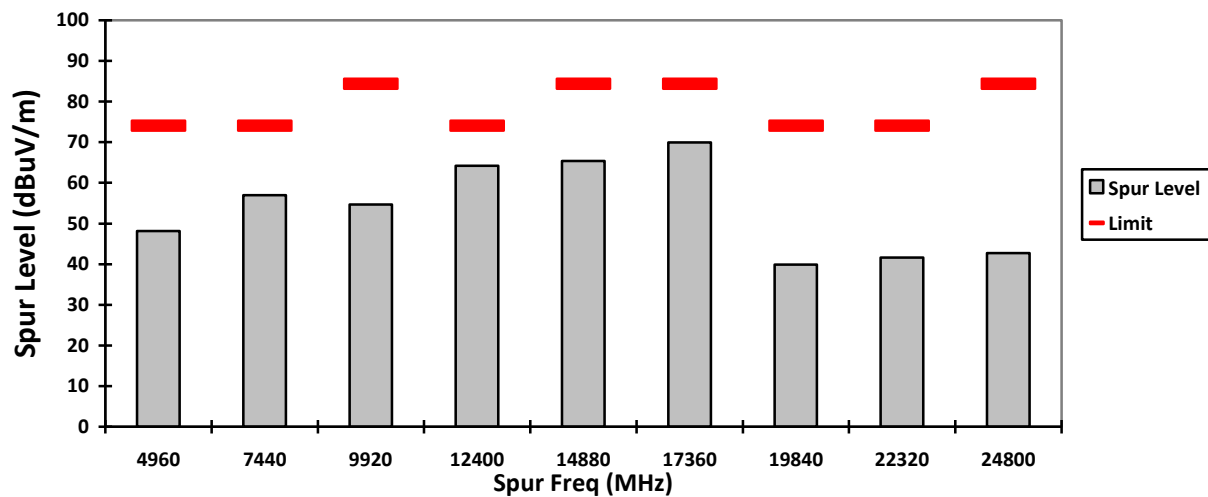

VERTICAL, AV

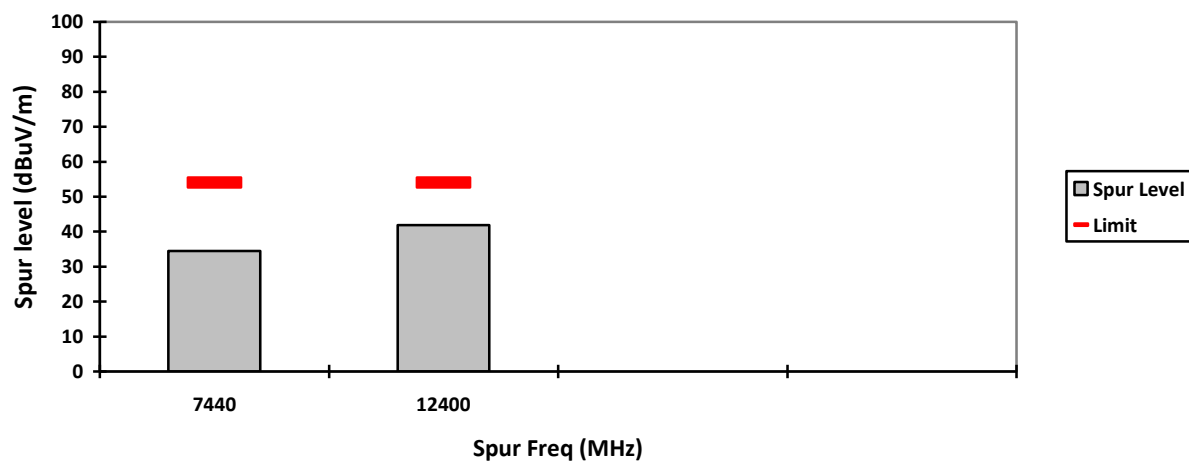

HORIZONTAL, AV

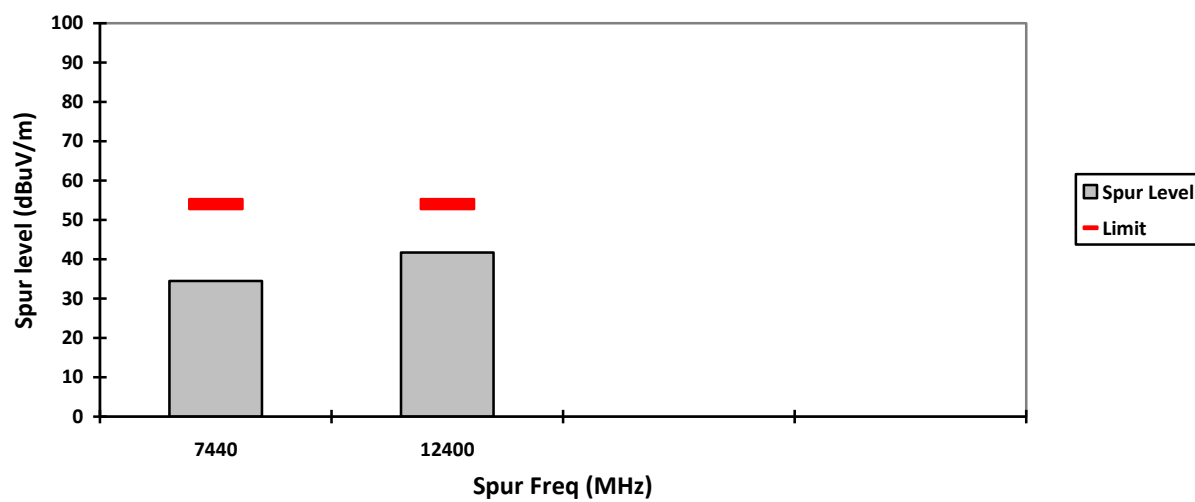


NOTE:

Transmitter Duty Cycle Calculation, FCC Rule 15.35 (b,c)


Based on the Bluetooth Specification Version 2.1+EDR, and worst case AFH mode, transmitter ON time is independent of packet type (DH1, DH3 and DH5) and packet length, the AFH mode Duty cycle connection factor as below:

Channel hop rate = 800 hops/second (AFH Mode)
Adjusted channel hop rate for DH5 mode = 133.33 hops/second
Time per channel hop = $1 / 133.33 \text{ hops/second} = 7.5 \text{ ms}$
Time to cycle through all channels = $7.5 \times 20 \text{ channels} = 150 \text{ ms}$
Number of times transmitter hits on one channel = $100 \text{ ms} / 150 \text{ ms} = 1 \text{ time(s)}$
Worst case dwell time = 7.5 ms
Duty cycle connection factor = $20\log_{10} (7.5\text{ms} / 100\text{ms}) = -22.5 \text{ Db}$

VERTICAL, QPK

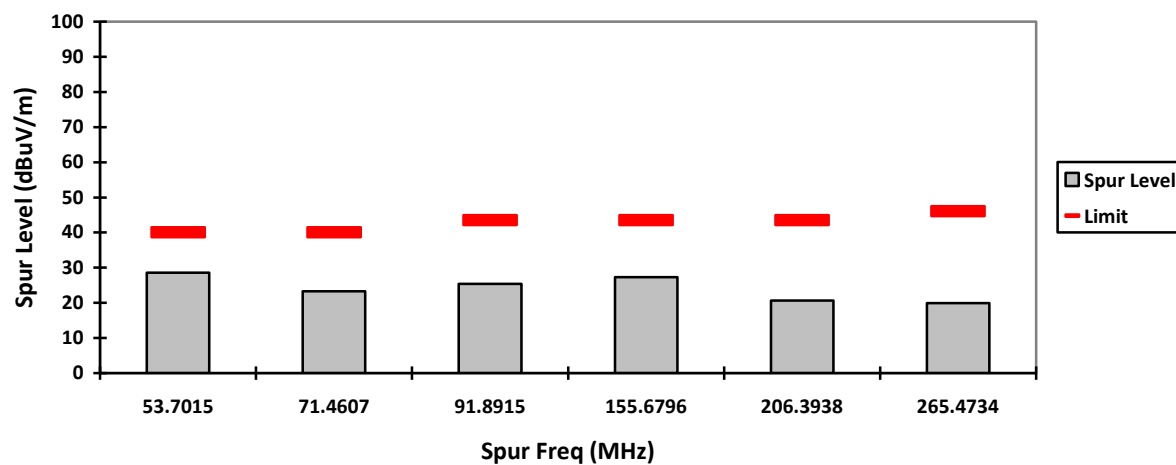


HORIZONTAL, QPK

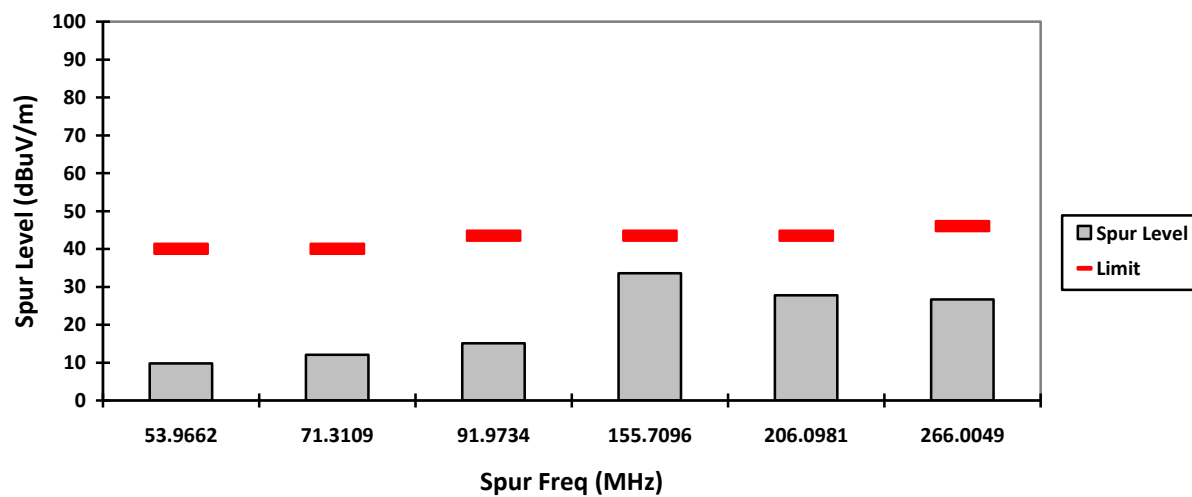

6.9. AC Powerline Conducted Emission

6.9.1. Test Setup

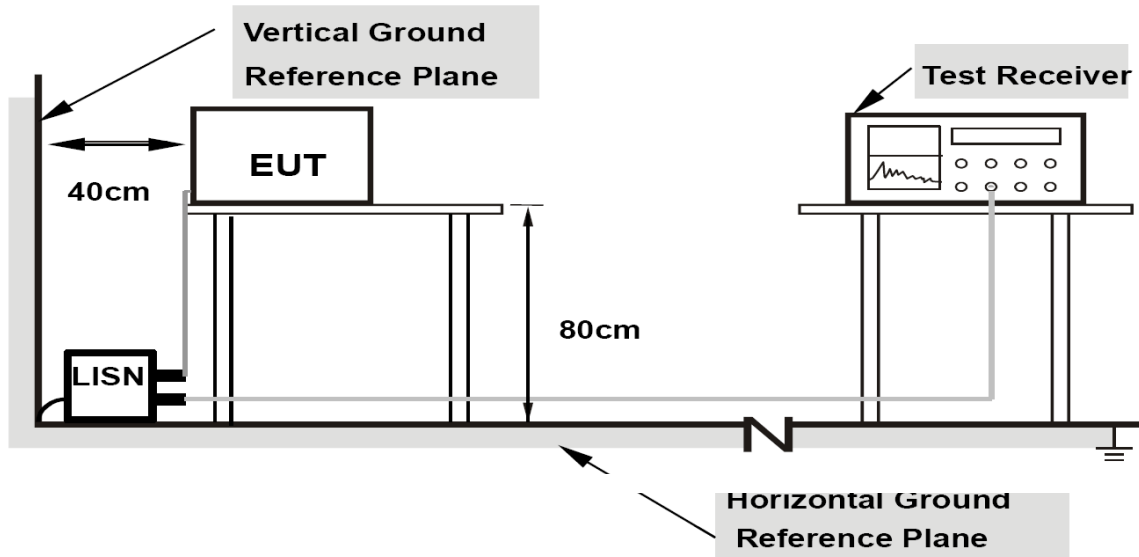

- 1) Tests were conducted for both Receive and Transmit Mode of the EUT.
- 2) The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50uH of coupling impedance for the measuring instrument.
- 3) Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- 4) The frequency range from 150 kHz to 30MHz was measured.

6.9.2. Test Limits:

For AC Power Line Conducted Test Limit can be Class A or B depends on product classification.

**Limits for conducted disturbance at the mains ports
of class A ITE**

Frequency range MHz	Limits dB(μ V)	
	Quasi-peak	Average
0,15 to 0,50	79	66
0,50 to 30	73	60
NOTE The lower limit shall apply at the transition frequency.		

Table 1: Limits for Conducted Disturbance at the Mains Ports of Class A ITE.

**Limits for conducted disturbance at the mains ports
of class B ITE**

Frequency range MHz	Limits dB(μ V)	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50
NOTE 1 The lower limit shall apply at the transition frequencies. NOTE 2 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.		


Table 2: Limits for Conducted Disturbance at the Mains Ports of Class B ITE

6.9.3. Test Result

120 VAC, 60Hz


1) Ambient

Full Spectrum

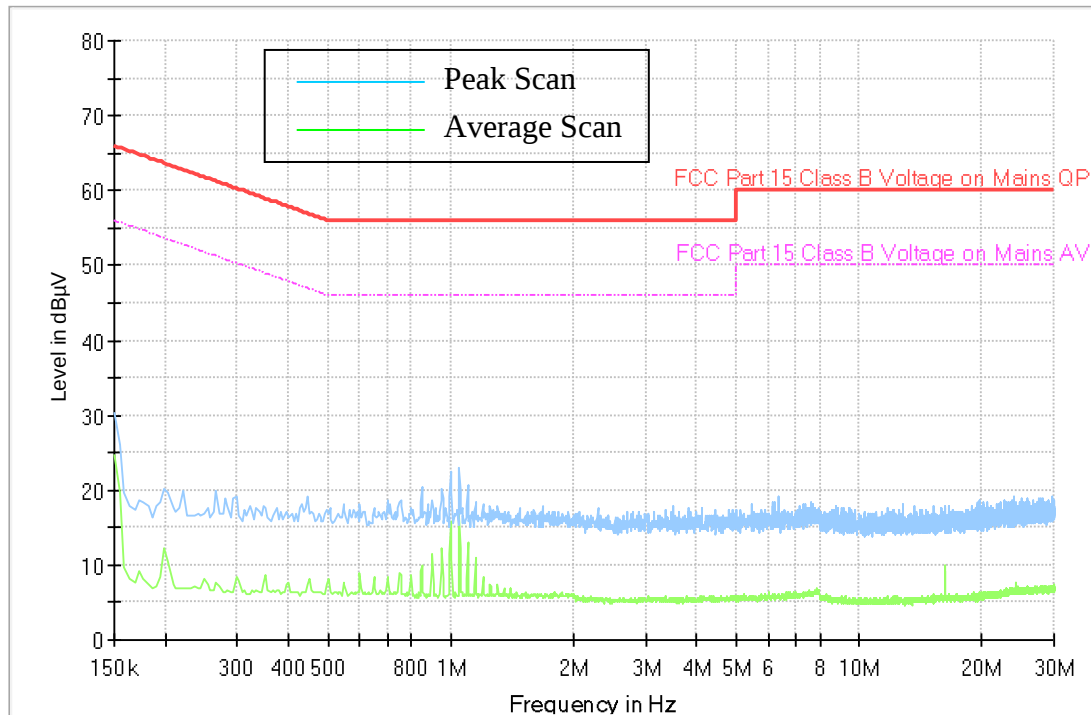


2) Charger Alone

Full Spectrum

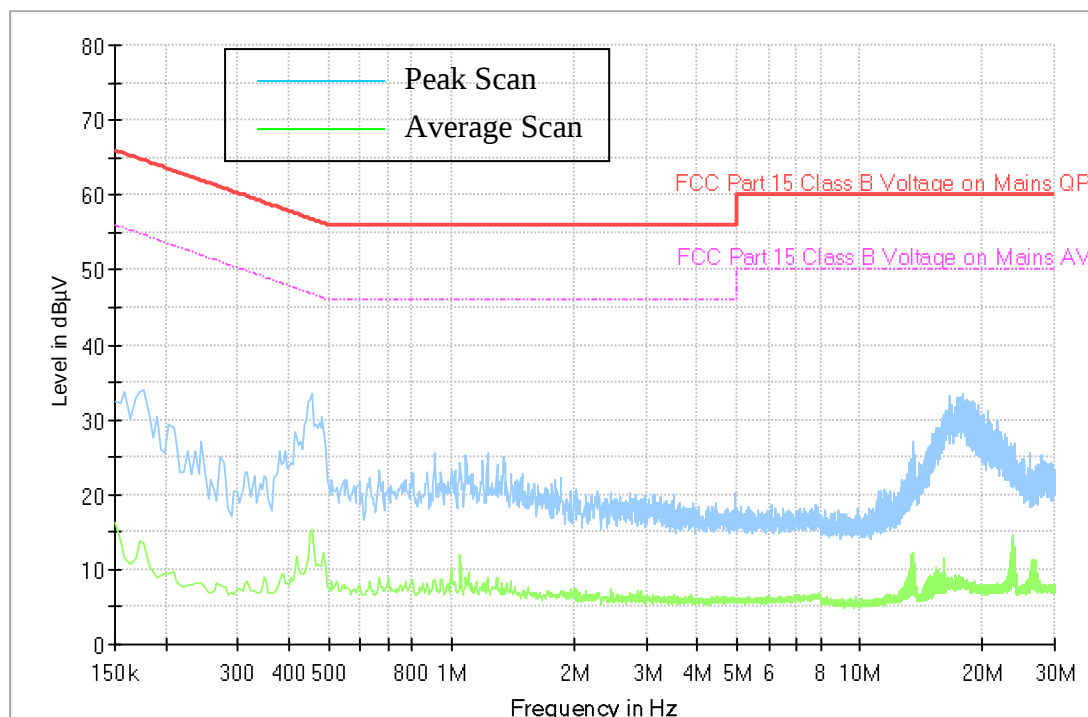


3) Charger + Radio Off

Full Spectrum

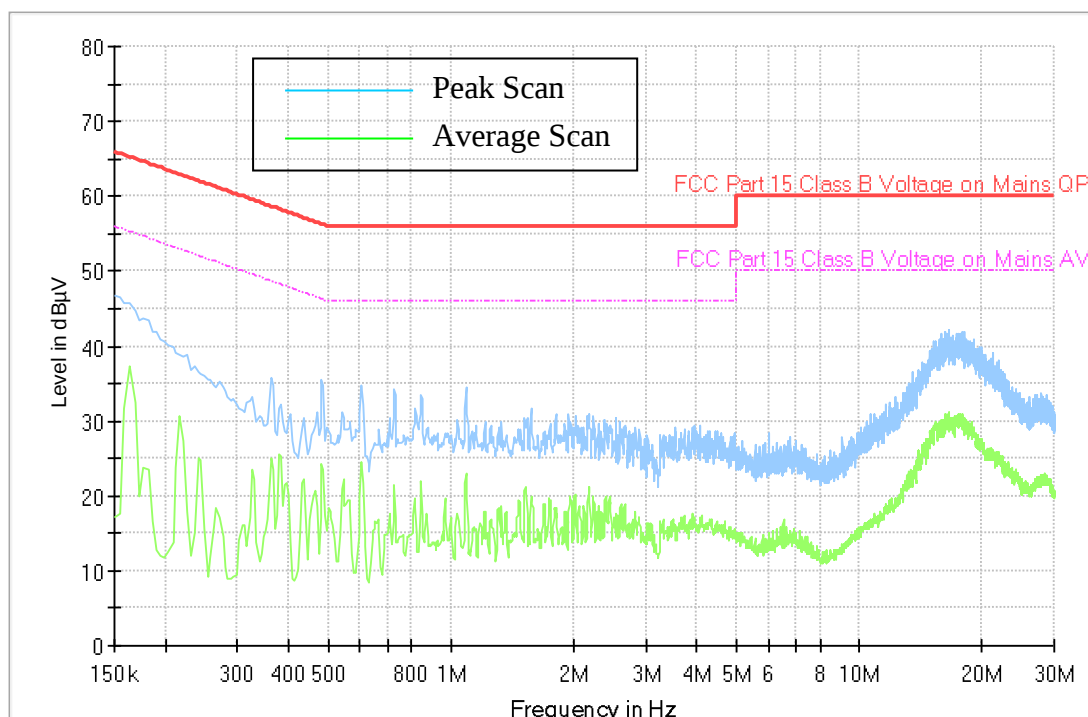

4) Charger + Radio Standby

Full Spectrum

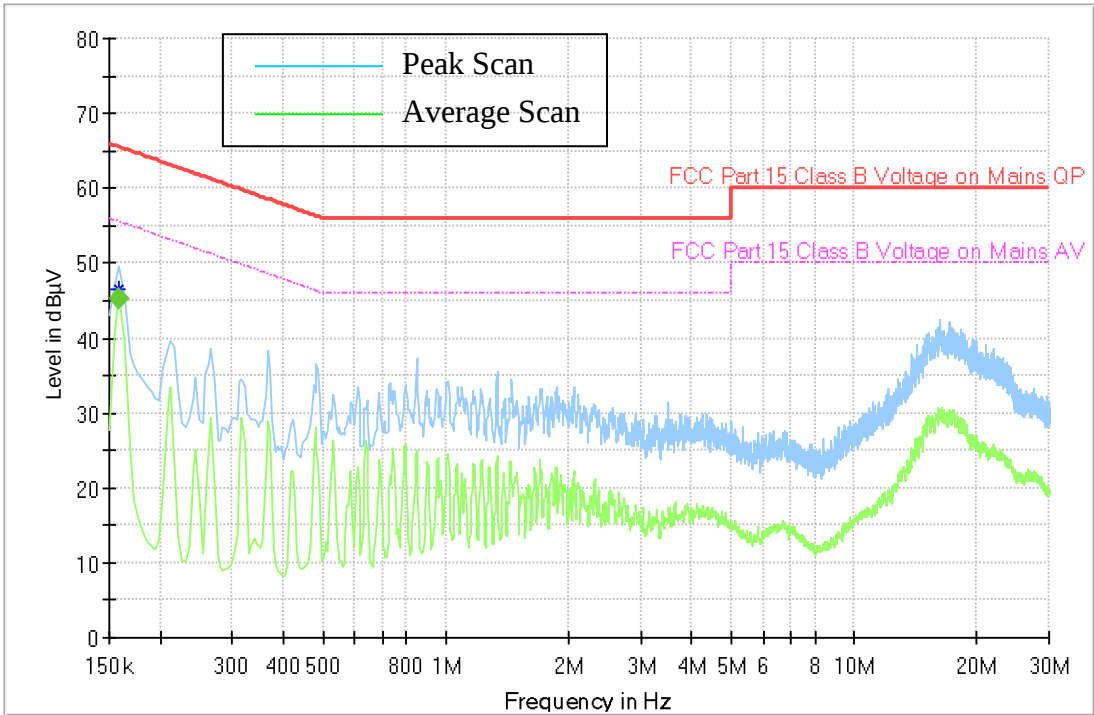


Quasipeak and Average Measurement

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.159000	---	45.15	55.52	10.37	L1	ON	10.6

5) Charger + Radio TX BT 8DPSK

Full Spectrum

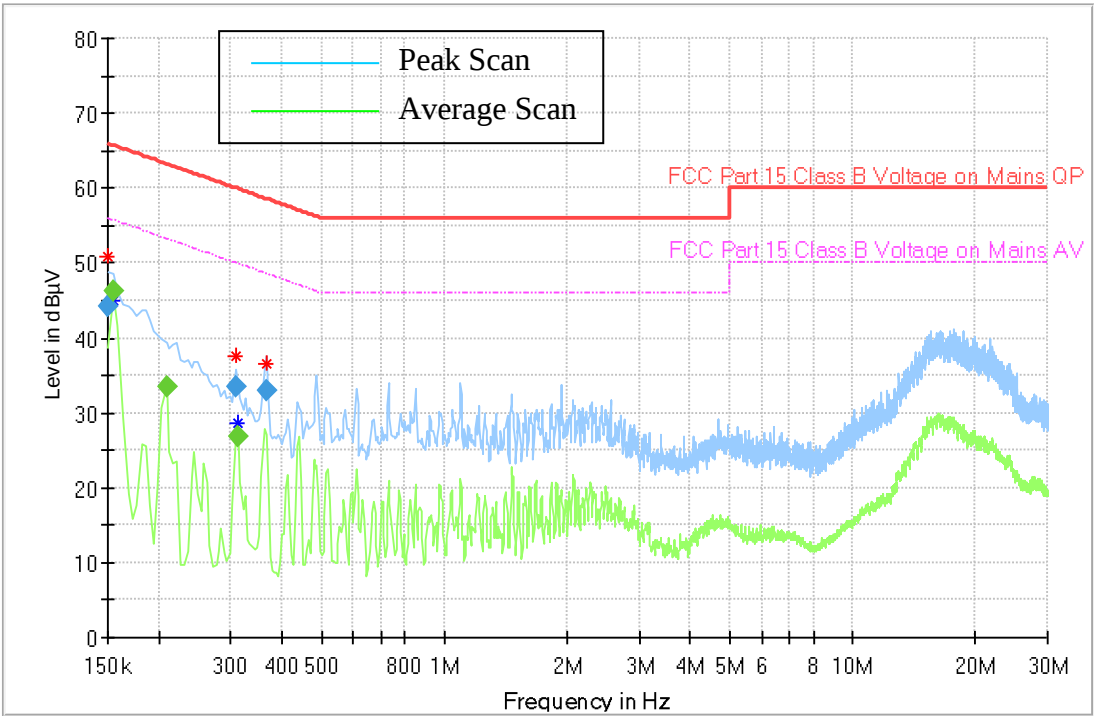

Quasipeak and Average Measurement

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	44.21	---	66.00	21.79	L1	ON	10.4
0.154500	---	46.36	55.75	9.40	L1	ON	10.5
0.208500	---	33.61	53.27	19.65	L1	ON	10.5
0.307500	33.54	---	60.04	26.50	L1	ON	10.5
0.312000	---	26.72	49.92	23.20	L1	ON	10.6
0.366000	32.87	---	58.59	25.72	L1	ON	10.7

END OF TEST REPORT