



**Test Report**  
**AIR-CAP1532E-B-K9**

**FCC ID: LDK102089P**

**5725-5850 MHz**

**Antenna gain 14dBi**



**Against the following Specifications:**

**CFR47 Part 15.407**

**Cisco Systems**

170 West Tasman Drive

San Jose, CA 95134

	
<b>Author:</b> Jose Aguirre <b>Tested By</b>	<b>Approved By:</b> Jim Nicolson <b>Title:</b> Technical Leader, Engineering <b>Revision:</b> 2

This report replaces any previously entered test report under EDCS – **EDCS 1518111**. This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.



This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.

<b>SECTION 1: OVERVIEW .....</b>	<b>3</b>
<b>SECTION 2: ASSESSMENT INFORMATION .....</b>	<b>4</b>
2.1 GENERAL .....	4
2.2 DATE OF TESTING.....	6
2.3 REPORT ISSUE DATE .....	6
2.4 TESTING FACILITIES .....	6
2.5 EQUIPMENT ASSESSED (EUT).....	6
2.6 EUT DESCRIPTION .....	7
<b>SECTION 3: RESULT SUMMANRY .....</b>	<b>8</b>
3.1 RESULTS SUMMARY TABLE .....	8
<b>SECTION 4: SAMPLE DETAILS.....</b>	<b>10</b>
<b>APPENSIX A:     EMISSION TEST RESULTS.....</b>	<b>11</b>
CONDUCTED TEST SETUP DIAGRAM.....	11
TARGET MAXIMUM CHANNEL POWER .....	11
A.1     6dB BANDWIDTH.....	12
A.2     99% AND 26dB BANDWIDTH .....	19
A.3     MAXIMUM CONDUCTED OUTPUT POWER.....	26
A.4     POWER SPECTRAL DENSITY .....	30
A.4     CONDUCTED SPURIOUS EMISSIONS.....	37
A.5     CONDUCTED BAND EDGE.....	45
<b>APPENDIX B:     EMISSION TEST RESULTS.....</b>	<b>50</b>
RADIATED EMISSION SETUP DIAGRAM-BELOW 1G .....	50
RADIATED EMISSION SETUP DIAGRAM-ABOVE 1G .....	50
B.1     RADIATED SPURIOUS EMISSIONS .....	51
B.2     RADIATED EMISSIONS 30MHZ TO 1GHZ .....	62
B.3     AC CONDUCTED EMISSIONS .....	64
PHOTOGRAPHS OF SETUP .....	66
<b>APPENDIX C:     LIST OF TEST EQUIPMENT USED TO PERFORM THE TEST.....</b>	<b>70</b>
<b>APPENDIX E:     ABBREVIATION KEY AND DEFINITIONS .....</b>	<b>72</b>



## **Section 1: Overview**

The samples were assessed against the tests detailed in section 3 under the requirements of the following specifications:

<b>Specifications:</b>
CFR47 Part 15.407

Measurements were made in accordance with

- ANSI C63.10:2013
- KDB 789033 D02 General UNII Test Procedures New Rules v01
- KDB 662911 D01 Multiple Transmitter Output
- KDB 558074 D01 Meas Guidance v03r03



## Section 2: Assessment Information

### 2.1 General

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on the samples submitted. The testing was performed by and for the use of Cisco systems Inc:

With regard to this assessment, the following points should be noted:

- a) The results contained in this report relate only to the items tested and were obtained in the period between the date of the initial assessment and the date of issue of the report. Manufactured products will not necessarily give identical results due to production and measurement tolerances.
- b) The apparatus was set up and exercised using the configuration and modes of operation defined in this report only.
- c) Where relevant, the apparatus was only assessed using the susceptibility criteria defined in this report and the Test Assessment Plan (TAP).
- d) All testing was performed under the following environmental conditions:

Temperature	15°C to 35°C (54°F to 95°F)
Atmospheric Pressure	860mbar to 1060mbar (25.4" to 31.3")
Humidity	10% to 75*%
- e) All AC testing was performed at one or more of the following supply voltages:

110V 60 Hz (+/-20%)
---------------------

### Units of Measurement

The units of measurements defined in the appendices are reported in specific terms, which are test dependent. Where radiated measurements are concerned these are defined at a particular distance. Basic voltage measurements are defined in units of [dBuV]

As an example, the basic calculation for all measurements is as follows:

$$\text{Emission level [dBuV]} = \text{Indicated voltage level [dBuV]} + \text{Cable Loss [dB]} + \text{Other correction factors [dB]}$$

The combinations of correction factors are dependent upon the exact test configurations [see test equipment lists for further details] and may include:-

Antenna Factors, Pre Amplifier Gain, LISN Loss, Pulse Limiter Loss and Filter Insertion Loss..

Note: to convert the results from dBuV/m to uV/m use the following formula:-

$$\text{Level in uV/m} = \text{Common Antilogarithm} [(X \text{ dBuV/m})/20] = Y \text{ uV/m}$$

## Measurement Uncertainty Values

voltage and power measurements	$\pm 2$ dB
conducted EIRP measurements	$\pm 1.4$ dB
radiated measurements	$\pm 3.2$ dB
frequency measurements	$\pm 2.4 \cdot 10^{-7}$
temperature measurements	$\pm 0.54^{\circ}$
humidity measurements	$\pm 2.3\%$
DC and low frequency measurements	$\pm 2.5\%$

Where relevant measurement uncertainty levels have been estimated for tests performed on the apparatus. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Radiated emissions (expanded uncertainty, confidence interval 95%)

30 MHz - 300 MHz	+/- 3.8 dB
300 MHz - 1000 MHz	+/- 4.3 dB
1 GHz - 10 GHz	+/- 4.0 dB
10 GHz - 18GHz	+/- 8.2 dB
18GHz - 26.5GHz	+/- 4.1 dB
26.5GHz - 40GHz	+/- 3.9 dB

Conducted emissions (expanded uncertainty, confidence interval 95%)

30 MHz – 40GHz	+/- 0.38 dB
----------------	-------------

A product is considered to comply with a requirement if the nominal measured value is below the limit line. The product is considered to not be in compliance in case the nominal measured value is above the limit line.

**This report must not be reproduced except in full, without written approval of Cisco Systems.**

**2.2 Date of testing**

07-Jul-15 - 08-Aug-15

**2.3 Report Issue Date**

18-August-2015

Cisco uses an electronic system to issue, store and control the revision of test reports. This system is called the Engineering Document Control System (EDCS). The actual report issue date is embedded into the original file on EDCS. Any copies of this report, either electronic or paper, that are not on EDCS must be considered uncontrolled.

**2.4 Testing facilities**

This assessment was performed by:

**Testing Laboratory**

Cisco Systems, Inc.,  
125 West Tasman Drive  
San Jose, CA 95134, USA

**Registration Numbers for Industry Canada**

<b>Cisco System Site</b>	<b>Address</b>	<b>Site Identifier</b>
Building P, 10m Chamber	125 West Tasman Dr San Jose, CA 95134	Company #: 2461N-2
Building P, 5m Chamber	125 West Tasman Dr San Jose, CA 95134	Company #: 2461N-1
Building I, 5m Chamber	285 W. Tasman Drive San Jose, California 95134	Company #: 2461M-1

**Test Engineers**

Jose Aguirre

**2.5 Equipment Assessed (EUT)**

AIR-CAP1532E-B-K9



## 2.6 EUT Description

The **Error! Reference source not found.** Cisco Aironet 802.11ac Radio support the following modes of operation. The modes are further defined in the radio Theory of Operation. The modes included in this report represent the worst case data for all modes.

802.11n/ac - Non HT-20, One Antenna, 6 to 54 Mbps  
 802.11n/ac - Non HT-20, Two Antennas, 6 to 54 Mbps

802.11n/ac - HT-20, One Antenna, M0 to M7  
 802.11n/ac - HT-20, Two Antennas, M0 to M7  
 802.11n/ac - HT-20, Two Antennas, M8 to M15

802.11n/ac - HT-20 Beam Forming, Two Antennas, M0 to M7  
 802.11n/ac - HT-20 Beam Forming, Two Antennas, M8 to M15

802.11n/ac - HT-20 STBC, Two Antennas, M0 to M7

802.11n/ac - Non HT-40 Duplicate, One Antenna, 6 to 54 Mbps  
 802.11n/ac - Non HT-40 Duplicate, Two Antennas, 6 to 54 Mbps

802.11n/ac - HT-40, One Antenna, M0 to M7  
 802.11n/ac - HT-40, Two Antennas, M0 to M7  
 802.11n/ac - HT-40, Two Antennas, M8 to M15

802.11n/ac - HT-40 Beam Forming, Two Antennas, M0 to M7  
 802.11n/ac - HT-40 Beam Forming, Two Antennas, M8 to M15

802.11n/ac - HT-40 STBC, Two Antennas, M0 to M7

The following antennas are supported by this product series.  
 The data included in this report represent the worst case data for all antennas.

Frequency	Part Number	Antenna Type	Antenna Gain (dBi)	>30 degree 5 GHz Antenna Gain (dBi)
<b>5 GHz</b>	AIR-ANT5180V-N	Single Band Omni	8	-3
	AIR-ANT5114P2M-N	Single Band, Directional Patch	14	5
<b>2.4/5 GHz</b>	AIR-ANT2547V-N=	Dual-band Omni	4 / 7	-6
	AIR-ANT2547VG-N=	Dual-band Omni, Gray	4 / 7	-6
	AIR-ANT2588P3M-N=	Dual-band/Dual Polarized Directional, Patch	8 / 8	1



## Section 3: Result Summary

### 3.1 Results Summary Table

#### Conducted emissions

Basic Standard	Technical Requirements / Details	Result
FCC 15.407	<b>6dB Bandwidth:</b> Systems using digital modulation techniques may operate in the 2400-2483.5MHz band. The minimum 6dB bandwidth shall be at least 500 kHz.	Pass
FCC 15.407	<b>99% &amp; 26 dB Bandwidth:</b> The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. There is no limit for 99% OBW.  The 26 dB emission is the width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.	Pass
FCC 15.407	<b>Output Power:</b> For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.	Pass
FCC 15.407	<b>Power Spectral Density:</b> <b>15.407</b> The maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.	Pass
FCC 15.407	<b>Conducted Spurious Emissions / Band-Edge:</b> For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.	Pass
FCC 15.407 FCC 15.209 FCC 152.05	<b>Restricted band:</b> Unwanted emissions falling within the restricted bands, as defined in FCC 15.205 (a) must also comply with the radiated emission limits specified in FCC 15.209 (a).	Pass



**Radiated Emissions (General requirements)**

Basic Standard	Technical Requirements / Details	Result
FCC 15.407 FCC 15.209 FCC 15.205	<b>TX Spurious Emissions:</b> Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the filed strength limits table in this section.	Pass
FCC 15.207	<b>AC conducted Emissions:</b> Except when the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply, either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table in these sections. The more stringent limit applies at the frequency range boundaries.	Pass

\* MPE calculation is recorded in a separate report



## Section 4: Sample Details

Note: Each sample was evaluated to ensure that its condition was suitable to be used as a test sample prior to the commencement of testing.

### 4.1 Sample Details

Sample No.	Equipment Details	Manufacturer	Hardware Rev.	Firmware Rev.	Software Rev.	Serial Number
S01	AIR-CAP1532E-B-K9	Cisco Systems	P2	ap1g3-k9w7-mx.153	Cisco IOS 15.3	RFDPP1AE004
S02*	AIR-PWR-C	Meanwell	A0	NA	NA	EB46E93226

(\*) S02 and S04 are support equipment Power supplies for EUT S01 and S03

### 4.2 System Details

System #	Description	Samples
1	AIR-CAP1532E-B-K9	S01
2	AIR-PWR-C	S02

### 4.3 Mode of Operation Details

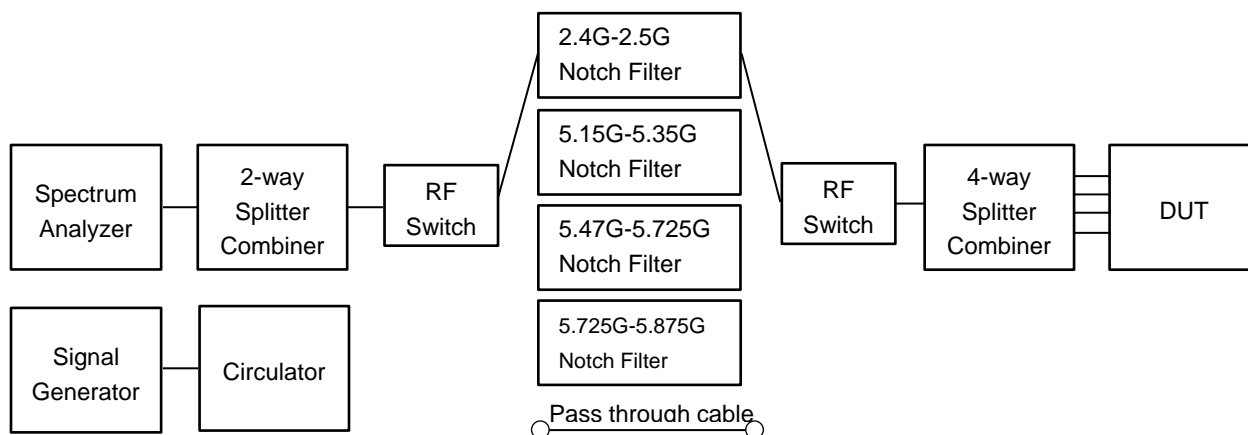
Mode#	Description	Comments
1	Continuous Transmitting	Continuous Transmitting >=98% duty cycle

All measurements were made in accordance with

- ANSI C63.10:2013
- KDB 789033 D02 General UNII Test Procedures New Rules v01
- KDB 662911 D01 Multiple Transmitter Output
- KDB 558074 D01 Meas Guidance v03r03

## Appendix A: Emission Test Results

### Conducted Test Setup Diagram



## Target Maximum Channel Power

The following table details the maximum supported Total Channel Power for all operating modes.

Operating Mode	Maximum Channel Power (dBm)	
	Frequency (MHz)	
	5745	5785
Non HT-20, 6 to 54 Mbps	17	22
Non HT-20 Beam Forming, 6 to 54 Mbps	17	21
HT-20, M0 to M15, M0 to M9 1-0ss	16	21
HT-20 Beam Forming, M0 to M15, M0 to M9 1-0ss	16	21
HT-20 STBC, M0 to M7	16	21
	5755	5795
Non HT-40, 6 to 54 Mbps	12	18
HT-40, M0 to M15, M0 to M9 1-0ss	9	18
HT-40 Beam Forming, M0 to M15, M0 to M9 1-0ss	9	18
HT-40 STBC, M0 to M7	9	18



## A.1 6dB Bandwidth

**15.407** Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

### Test Procedure

Ref. KDB 558074 D01 DTS Meas Guidance v03r03  
ANSI C63.10: 2013

#### 6 BW

##### Test Procedure

1. Set the radio in the continuous transmitting mode.
2. Allow the trace to stabilize.
3. Setting the x-dB bandwidth mode to -6dB within the measurement set up function.
4. Select the automatic OBW measurement function of an instrument to perform bandwidth measurement.
5. Capture graphs and record pertinent measurement data.

Ref. KDB 558074 D01 DTS Meas Guidance v03r03  
ANSI C63.10: 2013 section 11.8.2 Option 2

#### 6 BW

##### Test parameters

X dB BW = 6dB (using the OBW function of the spectrum analyzer)  
Span = Large enough to capture the entire EBW  
RBW = 100 KHz  
VBW  $\geq 3 \times$  RBW  
Sweep = Auto couple  
Detector = Peak or where practical sample shall be used  
Trace = Max. Hold

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>

#### Tested By :

Jose Aguirre

#### Date of testing:

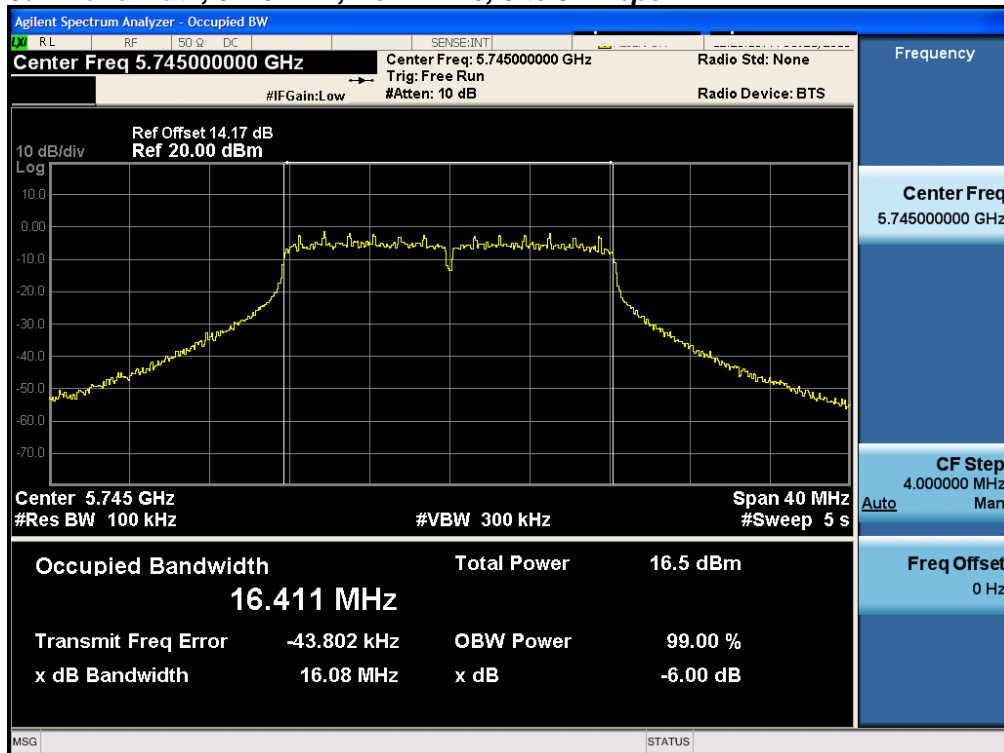
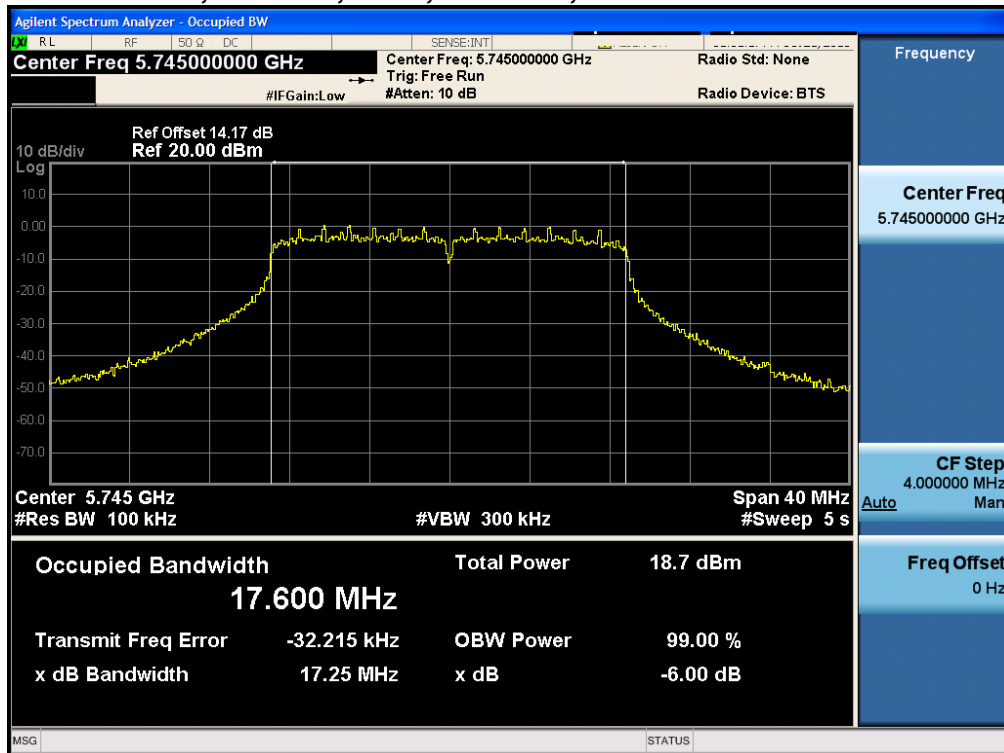
07-Jul-15 - 08-Aug-15

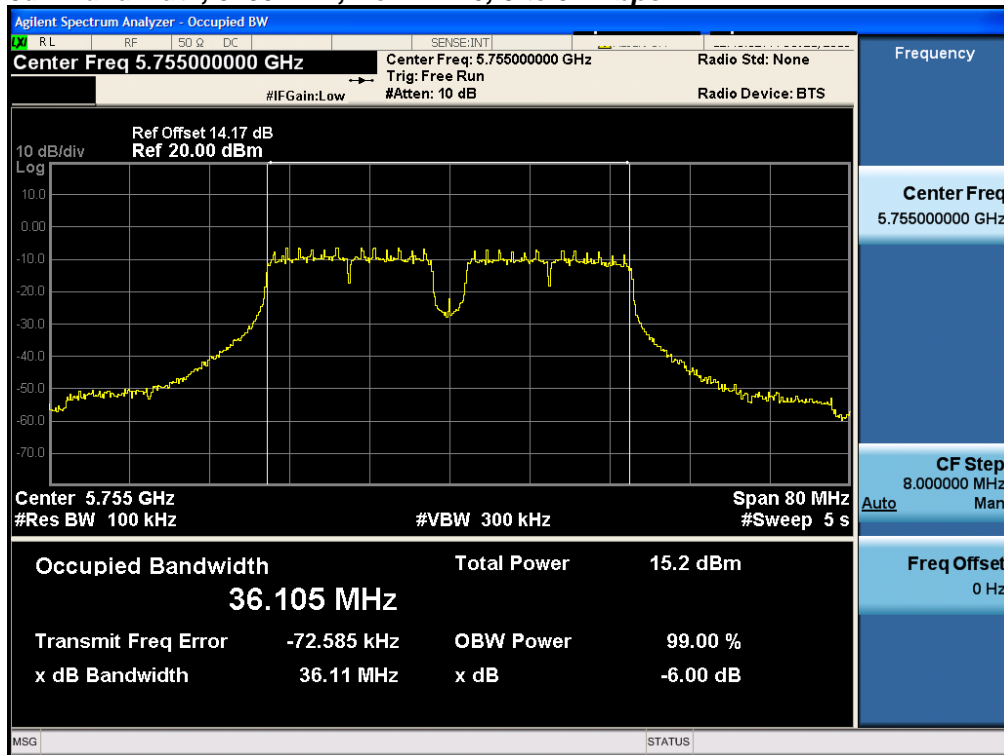
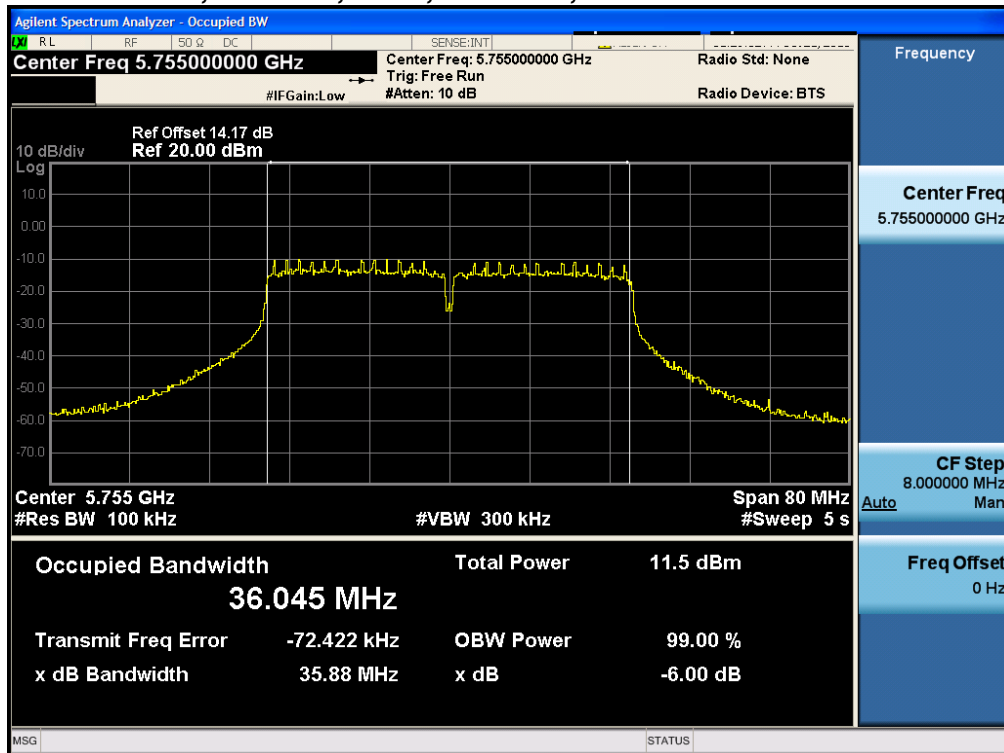
#### Test Result : PASS

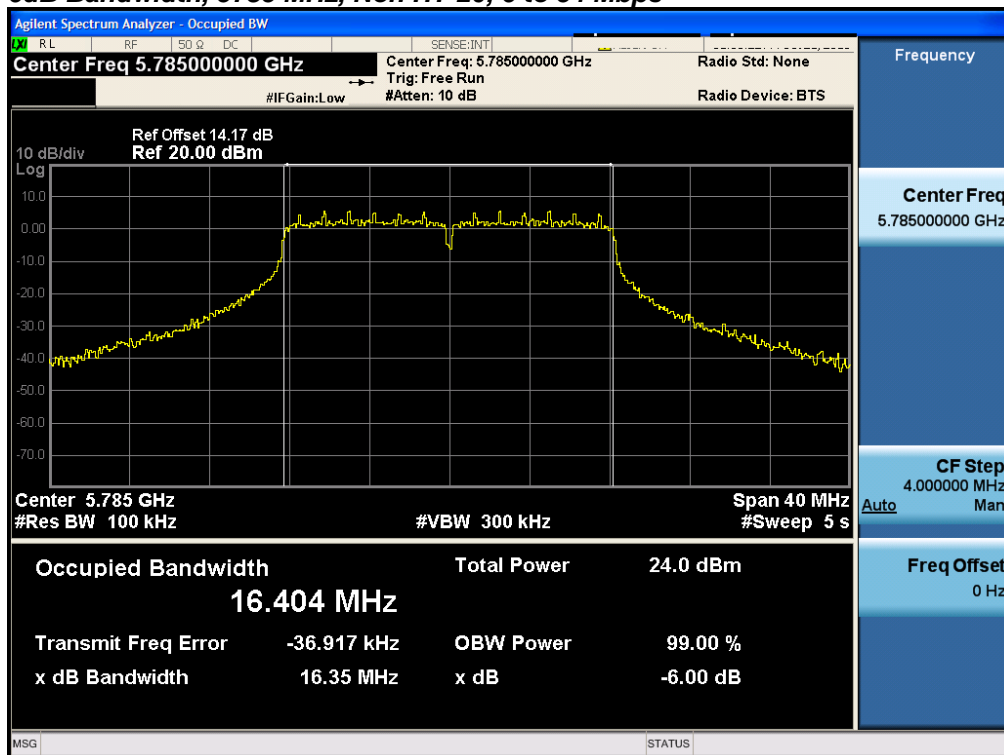
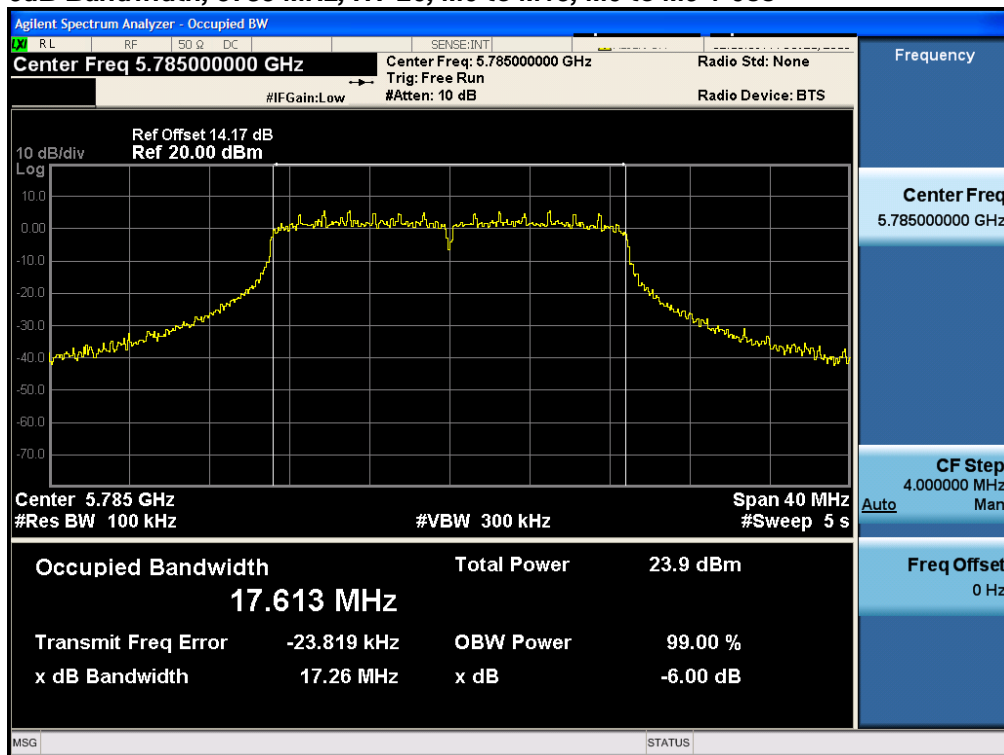
See Appendix C for list of test equipment



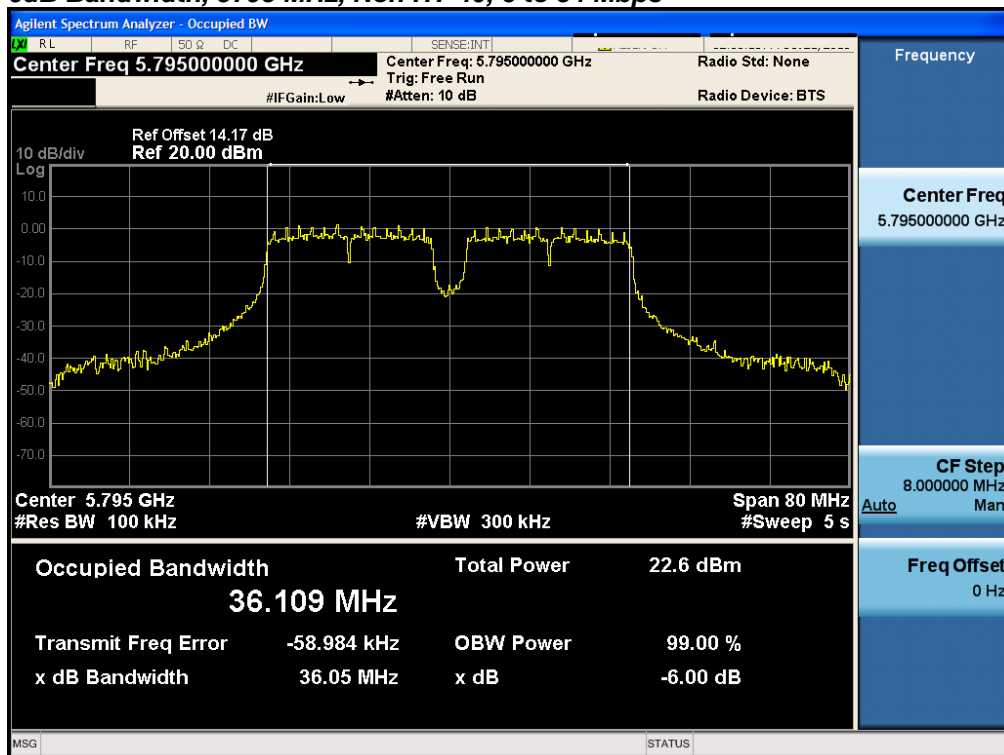
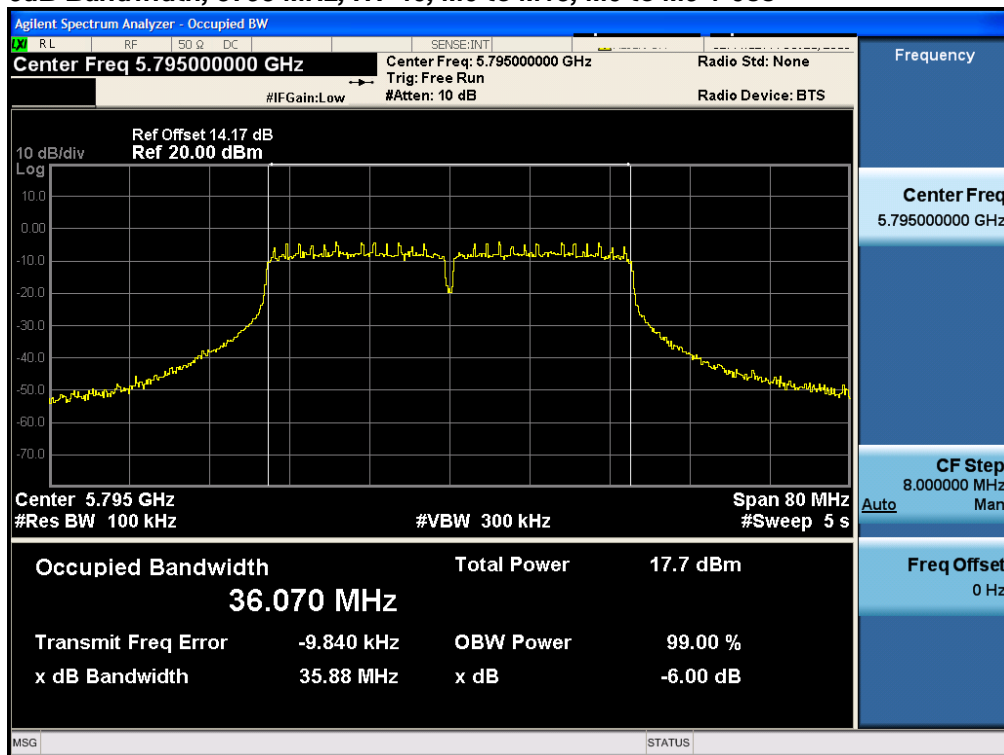
Frequency (MHz)	Mode	Data Rate (Mbps)	6dB BW (MHz)	Limit (kHz)	Margin (MHz)
5745	Non HT-20, 6 to 54 Mbps	6	16.1	>500	15.6
	HT-20, M0 to M15, M0 to M9 1-0ss	m0	17.2	>500	16.7
5755	Non HT-40, 6 to 54 Mbps	6	36.1	>500	35.6
	HT-40, M0 to M15, M0 to M9 1-0ss	m0	35.9	>500	35.4
5785	Non HT-20, 6 to 54 Mbps	6	16.4	>500	15.9
	HT-20, M0 to M15, M0 to M9 1-0ss	m0	17.3	>500	16.8
5795	Non HT-40, 6 to 54 Mbps	6	36.1	>500	35.6
	HT-40, M0 to M15, M0 to M9 1-0ss	m0	35.9	>500	35.4
5825	Non HT-20, 6 to 54 Mbps	6	16.3	>500	15.8
	HT-20, M0 to M15, M0 to M9 1-0ss	m0	17.1	>500	16.6

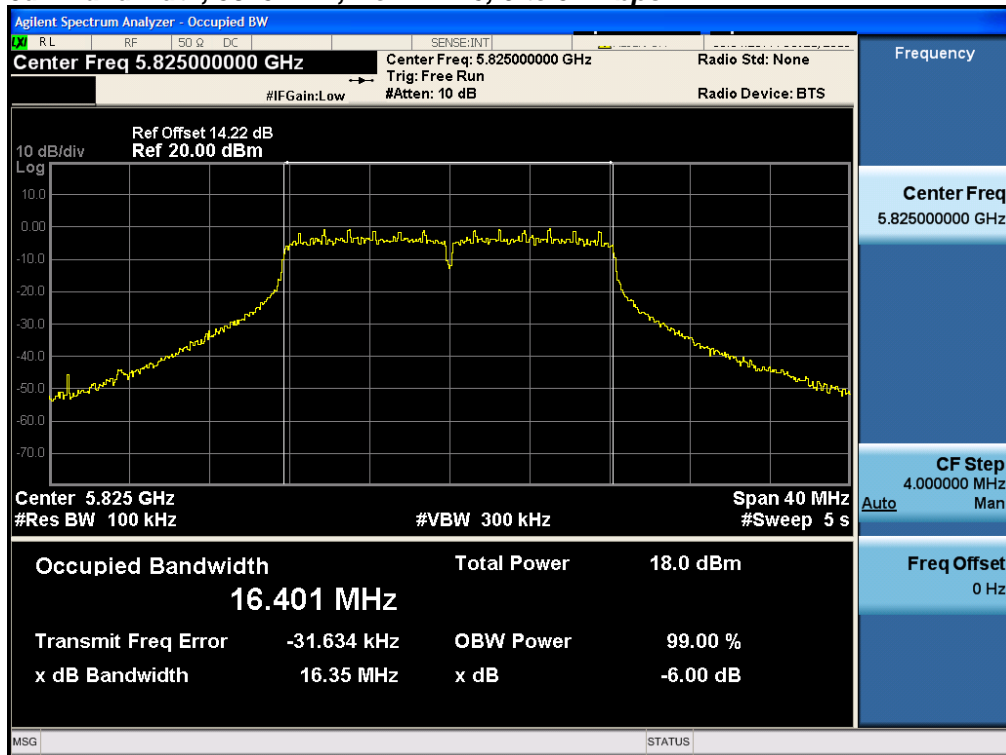
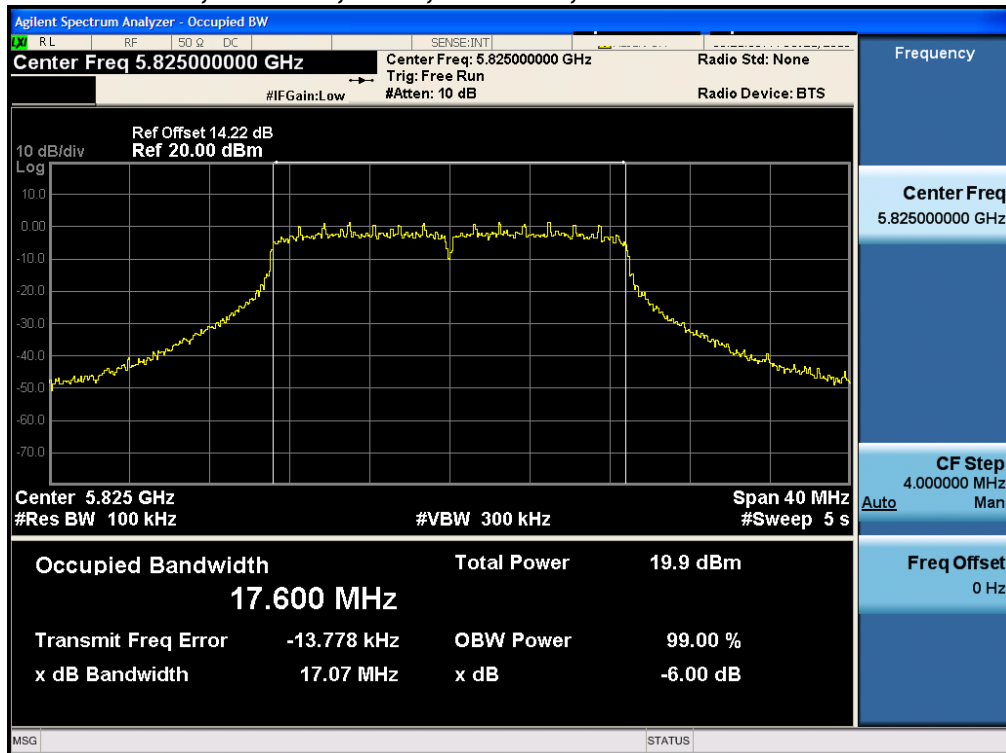
**6dB Bandwidth, 5745 MHz, Non HT-20, 6 to 54 Mbps****6dB Bandwidth, 5745 MHz, HT-20, M0 to M15, M0 to M9 1-0ss**

**6dB Bandwidth, 5755 MHz, Non HT-40, 6 to 54 Mbps****6dB Bandwidth, 5755 MHz, HT-40, M0 to M15, M0 to M9 1-0ss**

**6dB Bandwidth, 5785 MHz, Non HT-20, 6 to 54 Mbps****6dB Bandwidth, 5785 MHz, HT-20, M0 to M15, M0 to M9 1-0ss**



**6dB Bandwidth, 5795 MHz, Non HT-40, 6 to 54 Mbps****6dB Bandwidth, 5795 MHz, HT-40, M0 to M15, M0 to M9 1-0ss**

**6dB Bandwidth, 5825 MHz, Non HT-20, 6 to 54 Mbps****6dB Bandwidth, 5825 MHz, HT-20, M0 to M15, M0 to M9 1-0ss**



## A.2 99% and 26dB Bandwidth

**FCC 15.407** The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. There is no limit for 99% OBW.

The 26 dB emission is the width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.

### Test Procedure

Ref. ANSI C63.10: 2013 Section 6.9.3

#### 99% BW and EBW (-26dB)

##### Test Procedure

1. Set the radio in the continuous transmitting mode.
2. Allow the trace to stabilize.
3. Setting the x-dB bandwidth mode to -26dB and OBW power function to 99% within the measurement set up function.
4. Select the automatic OBW measurement function of an instrument to perform bandwidth measurement.
5. Capture graphs and record pertinent measurement data.

Ref. ANSI C63.10: 2013 Section 6.9.3

#### 99% BW and EBW (-26dB)

##### Test parameters

Span = 1.5 x to 5.0 times OBW

RBW = approx. 1% to 5% of the OBW

VBW  $\geq 3 \times$  RBW

Detector = Peak or where practical sample shall be used

Trace = Max. Hold

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>

**Tested By :**

Jose Aguirre

**Date of testing:**

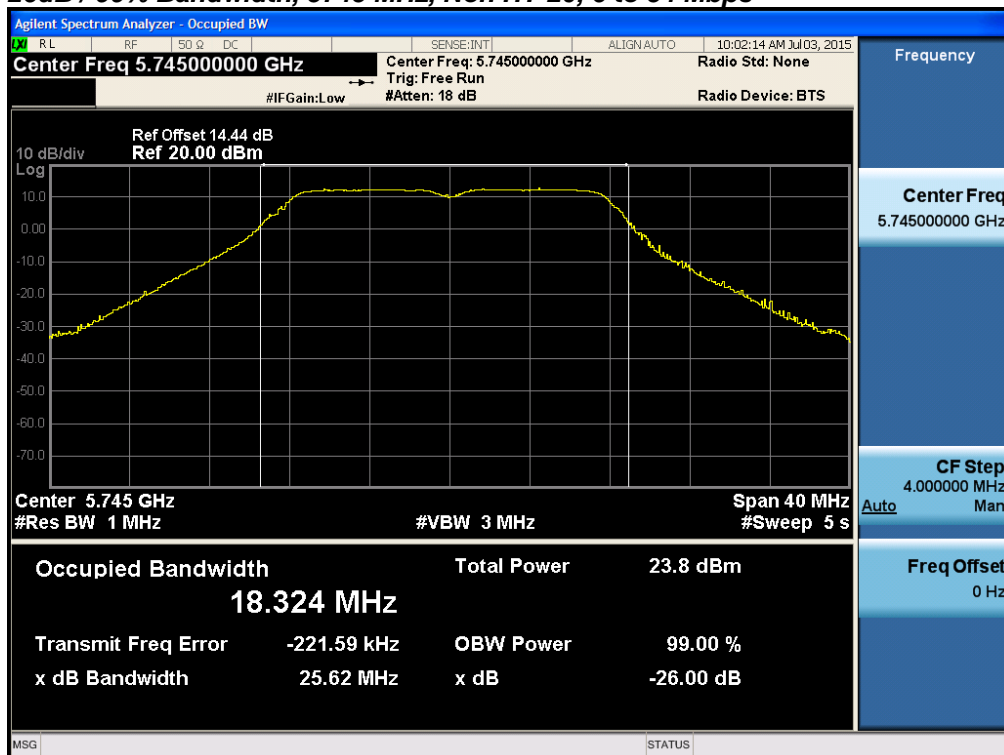
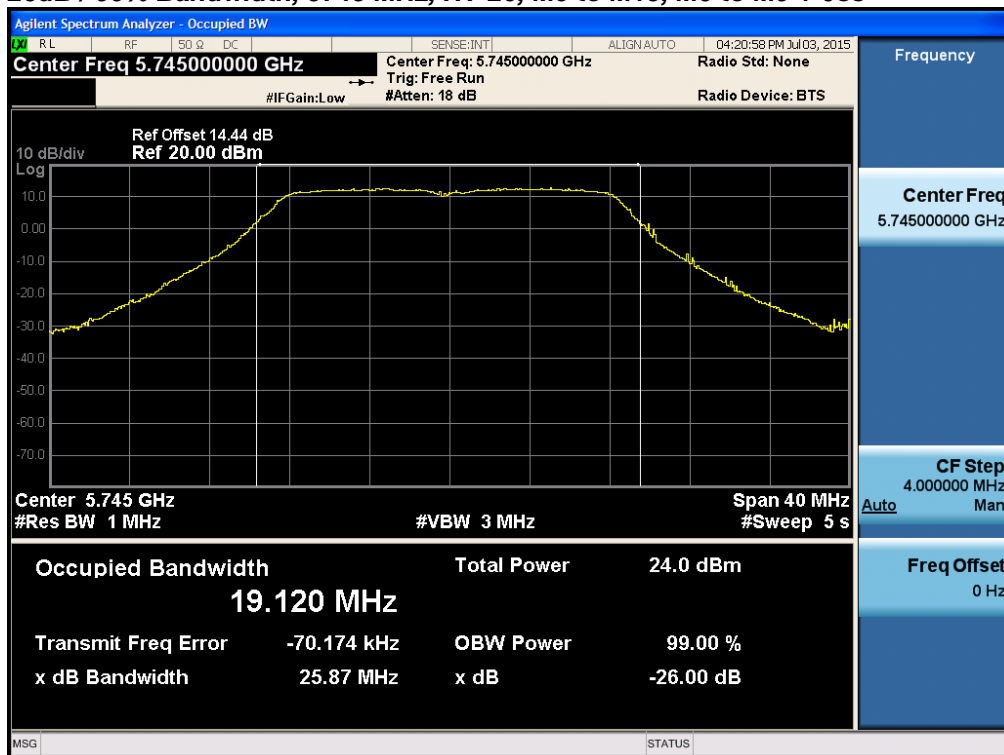
07-Jul-15 - 08-Aug-15

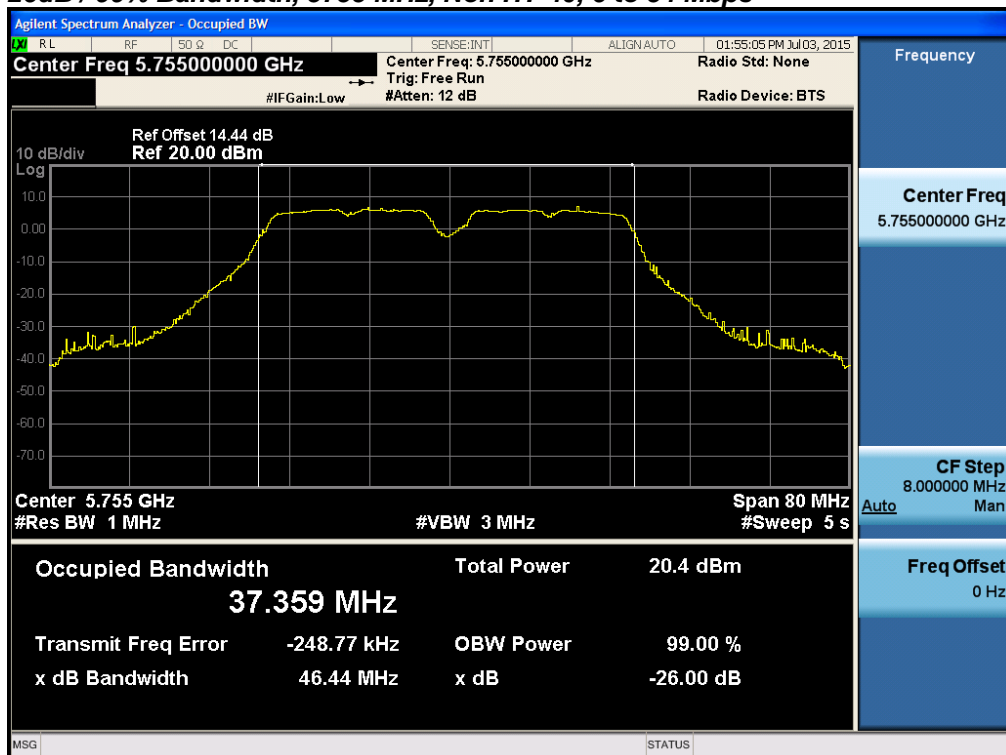
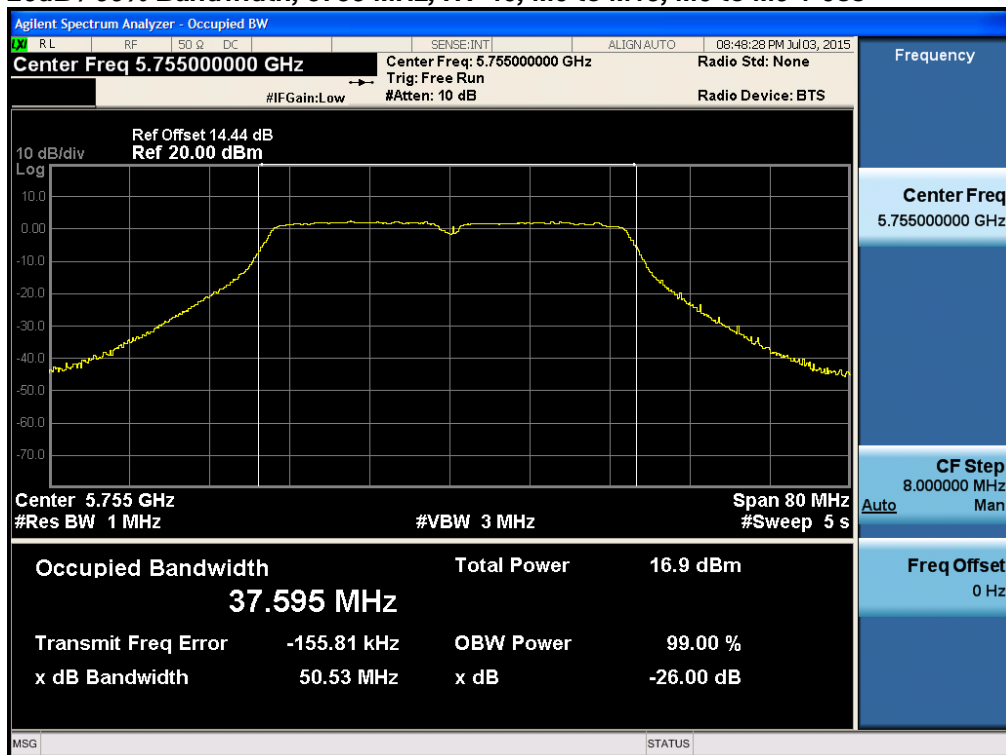
**Test Result : PASS**

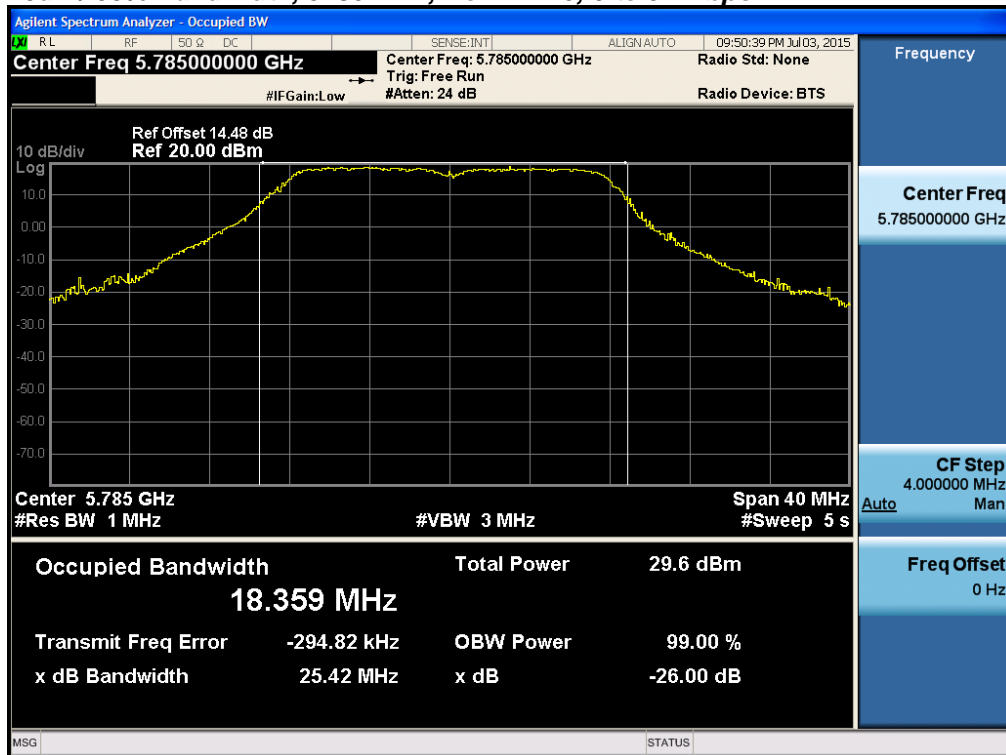
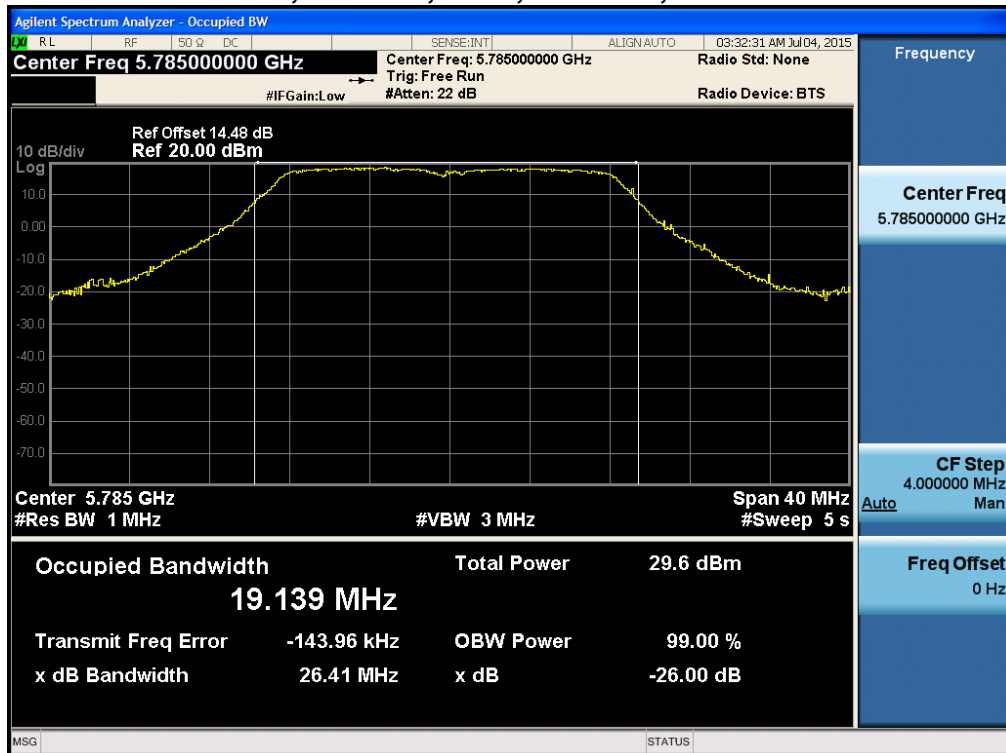
See Appendix C for list of test equipment

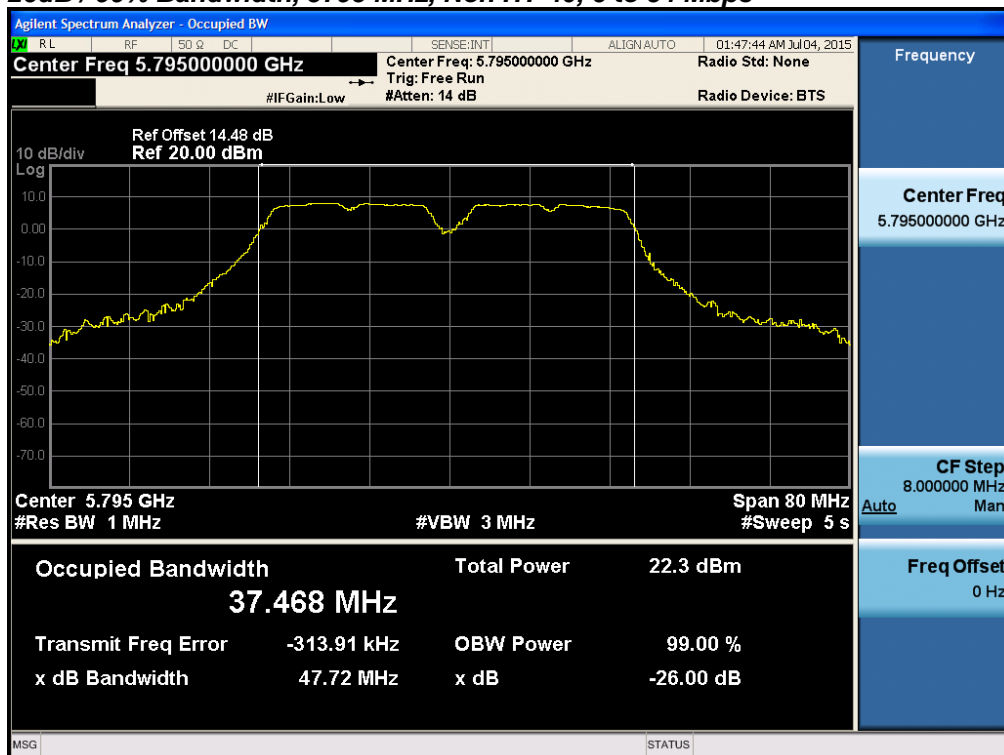
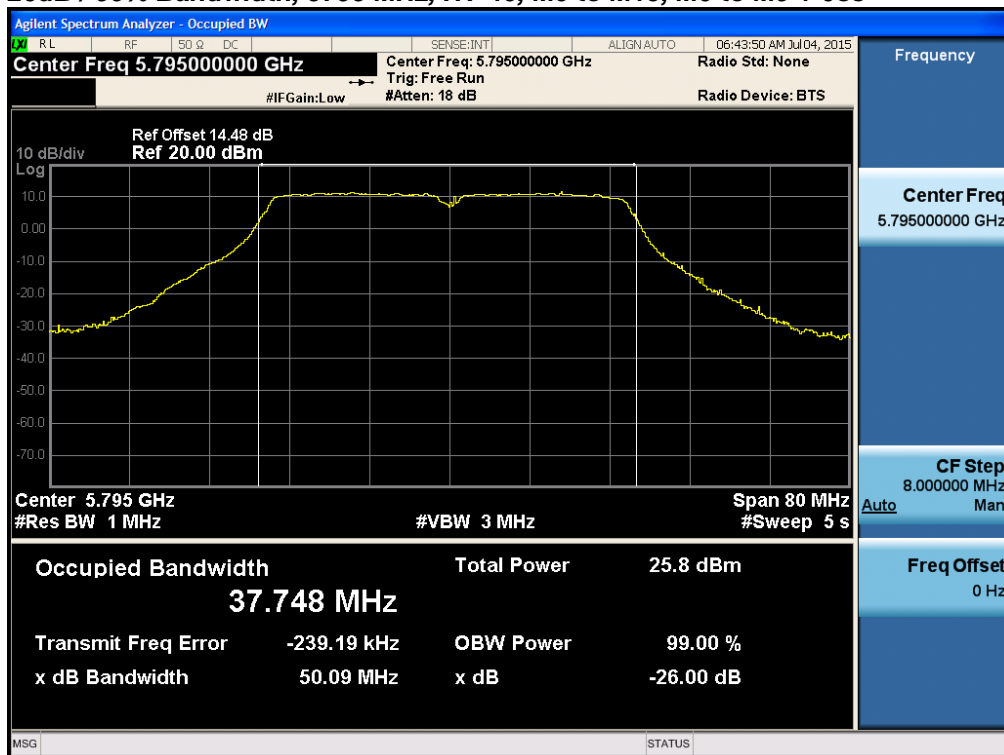


Frequency (MHz)	Mode	Data Rate (Mbps)	26dB BW (MHz)	99% BW (MHz)
5745	Non HT-20, 6 to 54 Mbps	6	25.0	18.3
	HT-20, M0 to M15, M0 to M9 1-0ss	m0	25.9	19.1
5755	Non HT-40, 6 to 54 Mbps	6	47.3	37.4
	HT-40, M0 to M15, M0 to M9 1-0ss	m0	49.5	37.6
5785	Non HT-20, 6 to 54 Mbps	6	25.3	18.4
	HT-20, M0 to M15, M0 to M9 1-0ss	m0	26.1	19.2
5795	Non HT-40, 6 to 54 Mbps	6	47.1	37.4
	HT-40, M0 to M15, M0 to M9 1-0ss	m0	50.5	37.7
5825	Non HT-20, 6 to 54 Mbps	6	24.9	18.2
	HT-20, M0 to M15, M0 to M9 1-0ss	m0	25.9	19.0

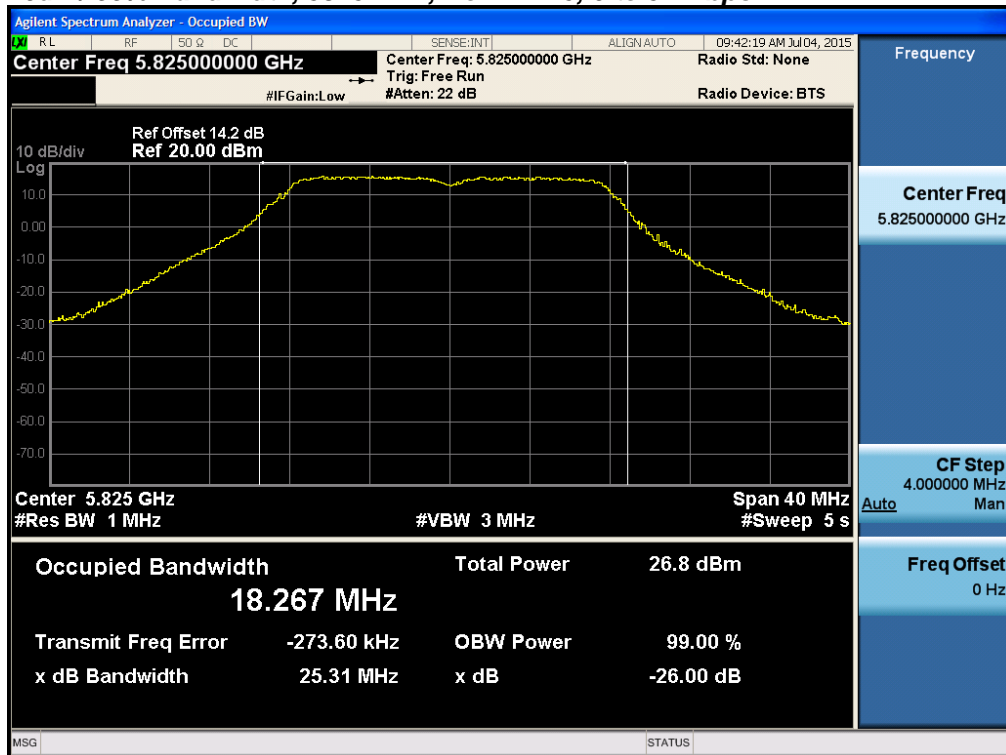
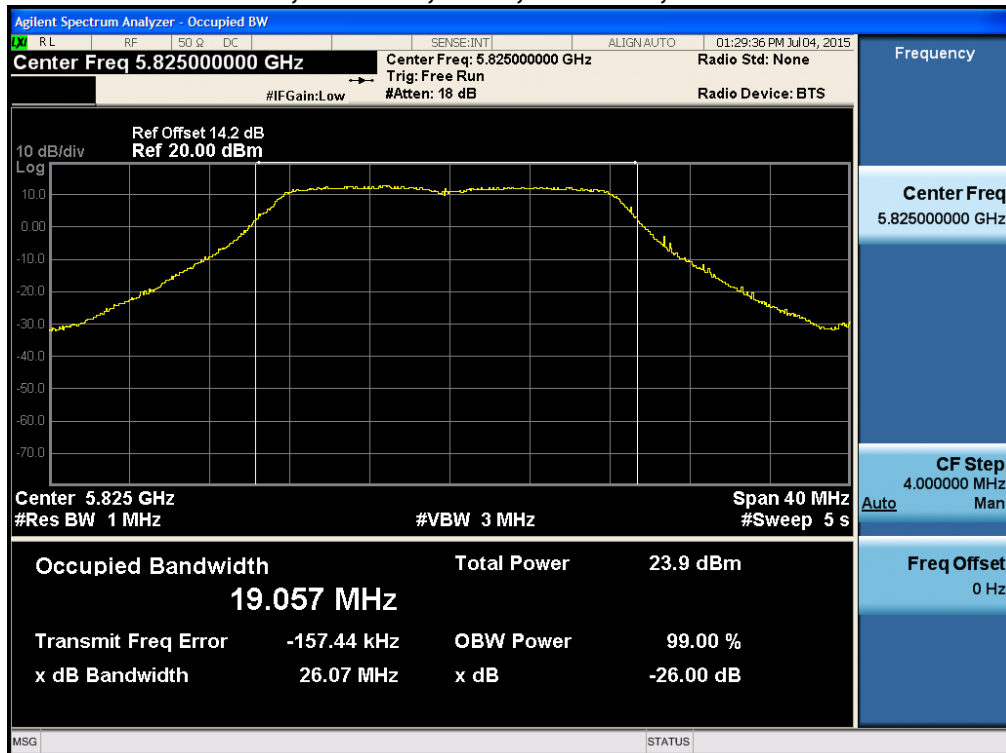
**26dB / 99% Bandwidth, 5745 MHz, Non HT-20, 6 to 54 Mbps****26dB / 99% Bandwidth, 5745 MHz, HT-20, M0 to M15, M0 to M9 1-0ss**

**26dB / 99% Bandwidth, 5755 MHz, Non HT-40, 6 to 54 Mbps****26dB / 99% Bandwidth, 5755 MHz, HT-40, M0 to M15, M0 to M9 1-0ss**

**26dB / 99% Bandwidth, 5785 MHz, Non HT-20, 6 to 54 Mbps****26dB / 99% Bandwidth, 5785 MHz, HT-20, M0 to M15, M0 to M9 1-0ss**

**26dB / 99% Bandwidth, 5795 MHz, Non HT-40, 6 to 54 Mbps****26dB / 99% Bandwidth, 5795 MHz, HT-40, M0 to M15, M0 to M9 1-0ss**



**26dB / 99% Bandwidth, 5825 MHz, Non HT-20, 6 to 54 Mbps****26dB / 99% Bandwidth, 5825 MHz, HT-20, M0 to M15, M0 to M9 1-0ss**



### A.3 Maximum Conducted Output Power

#### 15.407 a.3

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

The maximum supported antenna gain is 6dBi. The peak correlated gain for each mode is listed in the table below. See the Theory of Operation for details on the correlated gain for each mode.

#### Test Procedure

Ref. KDB 558074 D01 DTS Meas Guidance v03r03

ANSI C63.10: 2013

Maximum Conducted Output power
Test Procedure
<ol style="list-style-type: none"> <li>1. Set the radio in the continuous transmitting mode at full power</li> <li>2. Compute power by integrating the spectrum across the EBW (or alternatively entire 99% OBW) of the signal using the instrument's band power measurement function. The integration shall be performed using the spectrum analyzer band-power measurement function with band limits set equal to the EBW or the OBW band edges.</li> <li>3. Capture graphs and record pertinent measurement data.</li> </ol>

Ref. 558074 D01 DTS Meas Guidance v03r03 section 9.2 **Method AVGSA-1**

ANSI C63.10: 2013 section 11.9.2 **Method AVGSA-1**

Maximum Conducted Output power
Test parameters
Span = >1.5 times the OBW RBW = 1MHz VBW $\geq 3 \times$ RBW Sweep = Auto couple Detector = Sample Trace = Trace Average 100

The "measure-and-sum technique" is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. (ANSI C63.10: 2013, section 14.3.2.2)

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>



<b>Tested By :</b> Jose Aguirre	<b>Date of testing:</b> 07-Jul-15 - 08-Aug-15
<b>Test Result : PASS</b>	

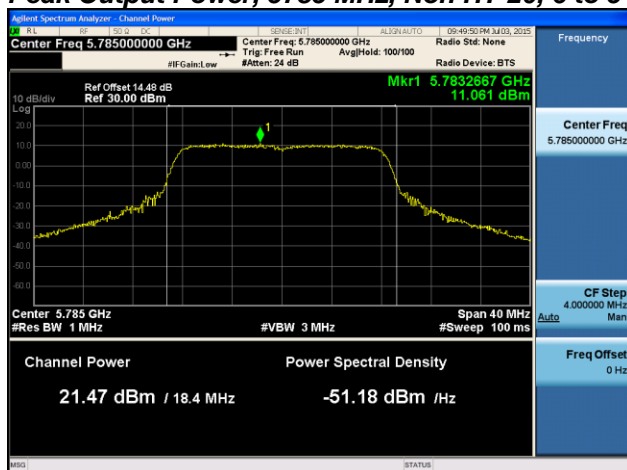
See Appendix C for list of test equipment



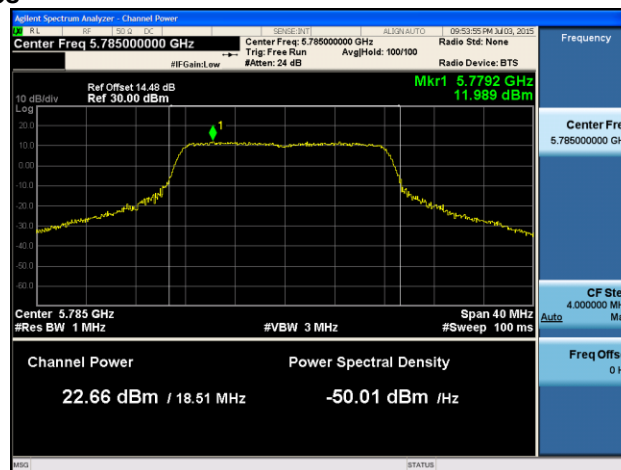
Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Max Power (dBm)	Tx 2 Max Power (dBm)	Total Tx Channel Power (dBm)	Limit (dBm)	Margin (dB)
5745	Non HT-20, 6 to 54 Mbps	1	14	15.8		15.8	30.0	14.2
	Non HT-20, 6 to 54 Mbps	2	14	13.7	15.1	17.5	30.0	12.5
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	14	13.7	15.1	17.5	30.0	12.5
	HT-20, M0 to M7	1	14	15.8		15.8	30.0	14.2
	HT-20, M0 to M7	2	14	12.8	14.0	16.5	30.0	13.5
	HT-20, M8 to M15	2	14	12.8	14.0	16.5	30.0	13.5
	HT-20 Beam Forming, M0 to M7	2	14	12.8	14.0	16.5	30.0	13.5
	HT-20 Beam Forming, M8 to M15	2	14	12.8	14.0	16.5	30.0	13.5
	HT-20 STBC, M0 to M7	2	14	12.8	14.0	16.5	30.0	13.5
5755	Non HT-40, 6 to 54 Mbps	1	14	12.2		12.2	30.0	17.8
	Non HT-40, 6 to 54 Mbps	2	14	5.1	6.4	8.8	30.0	21.2
	HT-40, M0 to M7	1	14	8.5		8.5	30.0	21.5
	HT-40, M0 to M7	2	14	5.7	7.0	9.4	30.0	20.6
	HT-40, M8 to M15	2	14	5.7	7.0	9.4	30.0	20.6
	HT-40 Beam Forming, M0 to M7	2	14	5.7	7.0	9.4	30.0	20.6
	HT-40 Beam Forming, M8 to M15	2	14	5.7	7.0	9.4	30.0	20.6
	HT-40 STBC, M0 to M7	2	14	5.7	7.0	9.4	30.0	20.6
5785	Non HT-20, 6 to 54 Mbps	1	14	21.5		21.5	30.0	8.5
	Non HT-20, 6 to 54 Mbps	2	14	21.5	22.7	25.2	30.0	4.8
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	14	21.5	22.7	25.2	30.0	4.8
	HT-20, M0 to M7	1	14	21.4		21.4	30.0	8.6
	HT-20, M0 to M7	2	14	21.4	22.6	25.1	30.0	4.9
	HT-20, M8 to M15	2	14	21.4	22.6	25.1	30.0	4.9
	HT-20 Beam Forming, M0 to M7	2	14	21.4	22.6	25.1	30.0	4.9
	HT-20 Beam Forming, M8 to M15	2	14	21.4	22.6	25.1	30.0	4.9
	HT-20 STBC, M0 to M7	2	14	21.4	22.6	25.1	30.0	4.9

5795	Non HT-40, 6 to 54 Mbps	1	14	16.1		16.1	30.0	13.9
	Non HT-40, 6 to 54 Mbps	2	14	14.0	15.2	17.7	30.0	12.3
	HT-40, M0 to M7	1	14	17.5		17.5	30.0	12.5
	HT-40, M0 to M7	2	14	14.6	15.7	18.2	30.0	11.8
	HT-40, M8 to M15	2	14	14.6	15.7	18.2	30.0	11.8
	HT-40 Beam Forming, M0 to M7	2	14	14.6	15.7	18.2	30.0	11.8
	HT-40 Beam Forming, M8 to M15	2	14	14.6	15.7	18.2	30.0	11.8
	HT-40 STBC, M0 to M7	2	14	14.6	15.7	18.2	30.0	11.8
5825	Non HT-20, 6 to 54 Mbps	1	14	18.6		18.6	30.0	11.4
	Non HT-20, 6 to 54 Mbps	2	14	13.8	14.1	17.0	30.0	13.0
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	14	13.8	14.1	17.0	30.0	13.0
	HT-20, M0 to M7	1	14	15.6		15.6	30.0	14.4
	HT-20, M0 to M7	2	14	13.6	14.1	16.9	30.0	13.1
	HT-20, M8 to M15	2	14	13.6	14.1	16.9	30.0	13.1
	HT-20 Beam Forming, M0 to M7	2	14	13.6	14.1	16.9	30.0	13.1
	HT-20 Beam Forming, M8 to M15	2	14	13.6	14.1	16.9	30.0	13.1
	HT-20 STBC, M0 to M7	2	14	13.6	14.1	16.9	30.0	13.1

### Peak Output Power, 5785 MHz, Non HT-20, 6 to 54 Mbps



Antenna A



Antenna B

## A.4 Power Spectral Density

### 15.407

The power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### Test Procedure

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v01

<b>Power Spectral Density</b>
Test Procedure
<ol style="list-style-type: none"> <li>1. Connect the antenna port(s) to the spectrum analyzer input.</li> <li>2. Set the radio in the continuous transmitting mode at full power</li> <li>3. Configure Spectrum analyzer as per test parameters below and Peak search marker</li> <li>4. Capture graphs and record pertinent measurement data.</li> </ol>

Ref. KDB 789033 D02 v01 section F.5

<b>Power Spectral Density</b>
Test parameters
Span = >1.5 times the OBW RBW = 500 kHz. VBW $\geq$ 3 x RBW Sweep = 10s Detector = Peak Trace = Single Sweep Marker = Peak Search

The "Measure and add 10 log(N) dB technique", where N is the number of outputs, is used for measuring in-band Power Spectral Density. With this technique, spectrum measurements are performed at each output of the device, and the quantity 10 log(4) (or 6dB) is added to the worst case spectrum value before comparing to the emission limit. (ANSI C63.10 2013 section 14.3.2.3)

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>

<b>Tested By :</b> Jose Aguirre	<b>Date of testing:</b> 07-Jul-15 - 08-Aug-15
<b>Test Result : PASS</b>	

See Appendix C for list of test equipment

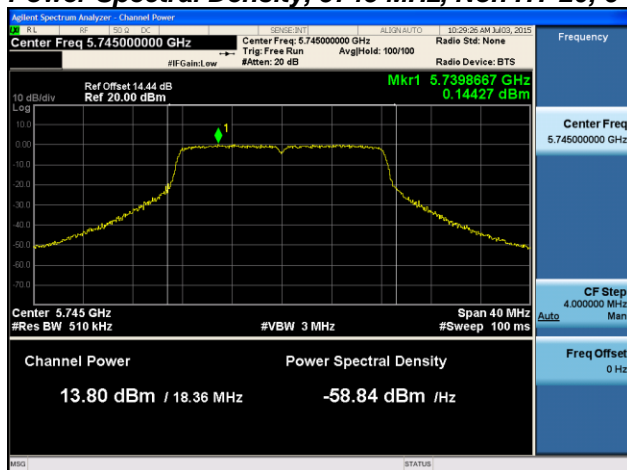
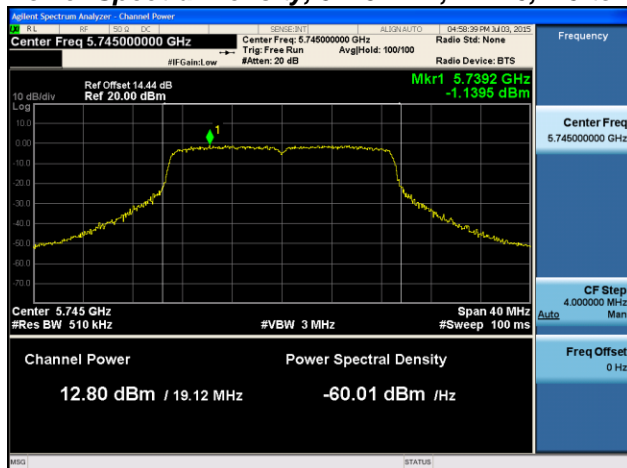
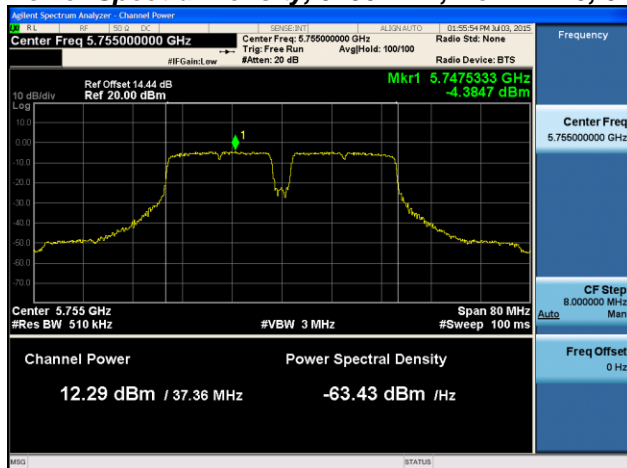


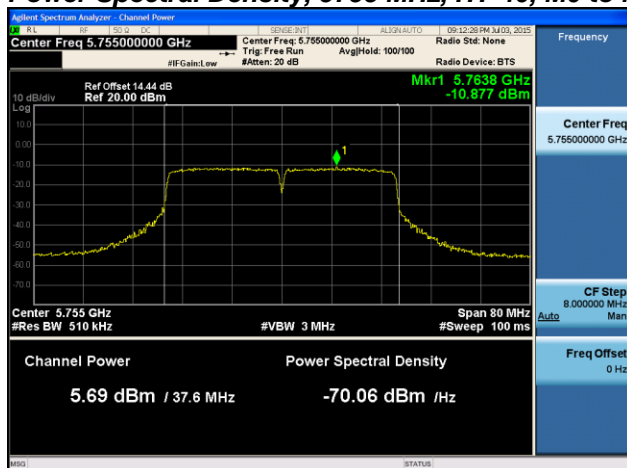
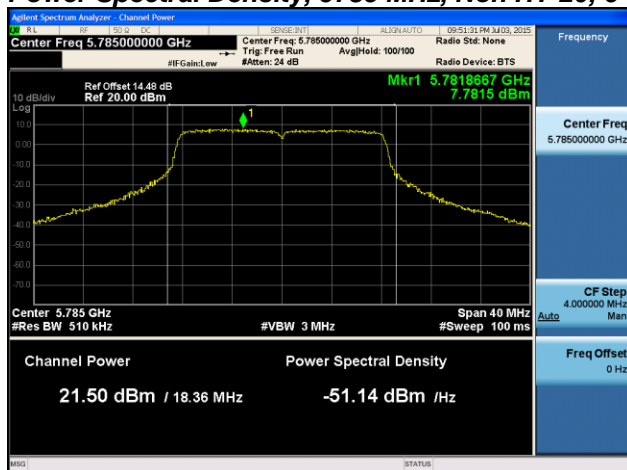
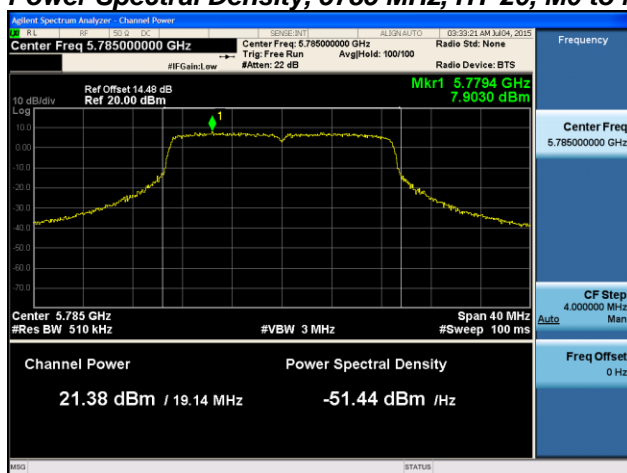
Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 PSD (dBm/MHz)	Tx 2 PSD (dBm/MHz)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)
5745	Non HT-20, 6 to 54 Mbps	1	14	2.0		2.0	22.0	20.0
	Non HT-20, 6 to 54 Mbps	2	14	0.1	1.4	3.8	22.0	18.2
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	14	0.1	1.4	3.8	22.0	18.2
	HT-20, M0 to M7	1	14	1.7		1.7	22.0	20.3
	HT-20, M0 to M7	2	14	-1.1	0.4	2.7	22.0	19.3
	HT-20, M8 to M15	2	14	-1.1	0.4	2.7	22.0	19.3
	HT-20 Beam Forming, M0 to M7	2	14	-1.1	0.4	2.7	22.0	19.3
	HT-20 Beam Forming, M8 to M15	2	14	-1.1	0.4	2.7	22.0	19.3
	HT-20 STBC, M0 to M7	2	14	-1.1	0.4	2.7	22.0	19.3
5755	Non HT-40, 6 to 54 Mbps	1	14	-4.4		-4.4	22.0	26.4
	Non HT-40, 6 to 54 Mbps	2	14	-11.4	-10.3	-7.8	22.0	29.8
	HT-40, M0 to M7	1	14	-8.2		-8.2	22.0	30.2
	HT-40, M0 to M7	2	14	-10.9	-10.1	-7.5	22.0	29.5
	HT-40, M8 to M15	2	14	-10.9	-10.1	-7.5	22.0	29.5
	HT-40 Beam Forming, M0 to M7	2	14	-10.9	-10.1	-7.5	22.0	29.5
	HT-40 Beam Forming, M8 to M15	2	14	-10.9	-10.1	-7.5	22.0	29.5
	HT-40 STBC, M0 to M7	2	14	-10.9	-10.1	-7.5	22.0	29.5
5785	Non HT-20, 6 to 54 Mbps	1	14	7.8		7.8	22.0	14.2
	Non HT-20, 6 to 54 Mbps	2	14	7.8	8.9	11.4	22.0	10.6
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	14	7.8	8.9	11.4	22.0	10.6
	HT-20, M0 to M7	1	14	7.9		7.9	22.0	14.1
	HT-20, M0 to M7	2	14	7.9	8.7	11.3	22.0	10.7
	HT-20, M8 to M15	2	14	7.9	8.7	11.3	22.0	10.7
	HT-20 Beam Forming, M0 to M7	2	14	7.9	8.7	11.3	22.0	10.7
	HT-20 Beam Forming, M8 to M15	2	14	7.9	8.7	11.3	22.0	10.7
	HT-20 STBC, M0 to M7	2	14	7.9	8.7	11.3	22.0	10.7

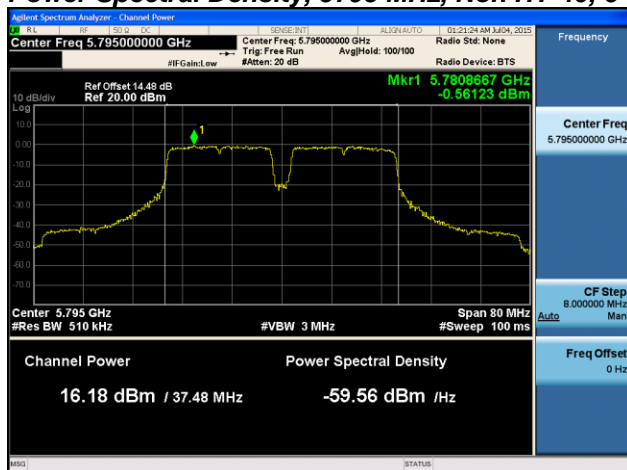
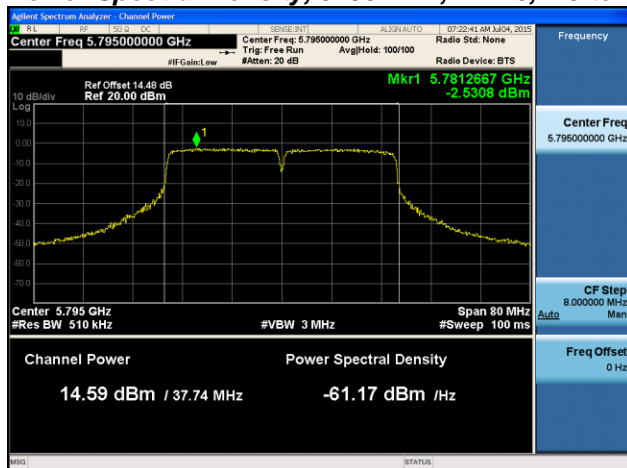
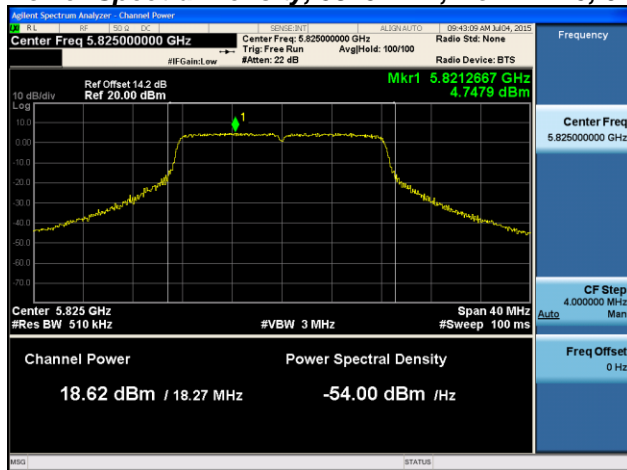


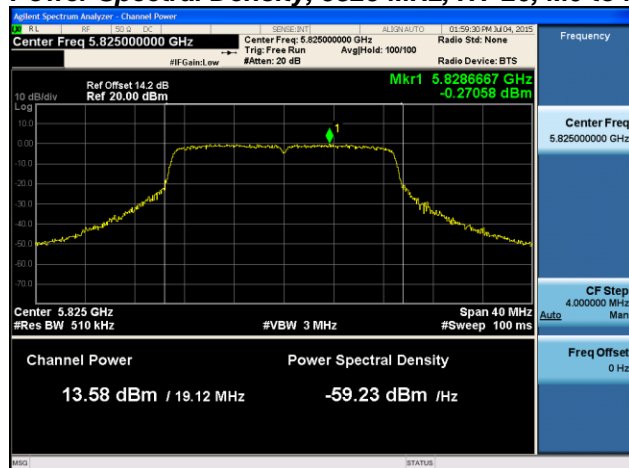
5795	Non HT-40, 6 to 54 Mbps	1	14	-0.6		-0.6	22.0	22.6
	Non HT-40, 6 to 54 Mbps	2	14	-2.5	-1.5	1.0	22.0	21.0
	HT-40, M0 to M7	1	14	0.5		0.5	22.0	21.5
	HT-40, M0 to M7	2	14	-2.5	-1.4	1.1	22.0	20.9
	HT-40, M8 to M15	2	14	-2.5	-1.4	1.1	22.0	20.9
	HT-40 Beam Forming, M0 to M7	2	14	-2.5	-1.4	1.1	22.0	20.9
	HT-40 Beam Forming, M8 to M15	2	14	-2.5	-1.4	1.1	22.0	20.9
	HT-40 STBC, M0 to M7	2	14	-2.5	-1.4	1.1	22.0	20.9
5825	Non HT-20, 6 to 54 Mbps	1	14	4.7		4.7	22.0	17.3
	Non HT-20, 6 to 54 Mbps	2	14	0.2	0.4	3.3	22.0	18.7
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	14	0.2	0.4	3.3	22.0	18.7
	HT-20, M0 to M7	1	14	1.6		1.6	22.0	20.4
	HT-20, M0 to M7	2	14	-0.3	0.3	3.0	22.0	19.0
	HT-20, M8 to M15	2	14	-0.3	0.3	3.0	22.0	19.0
	HT-20 Beam Forming, M0 to M7	2	14	-0.3	0.3	3.0	22.0	19.0
	HT-20 Beam Forming, M8 to M15	2	14	-0.3	0.3	3.0	22.0	19.0
	HT-20 STBC, M0 to M7	2	14	-0.3	0.3	3.0	22.0	19.0



**Power Spectral Density, 5745 MHz, Non HT-20, 6 to 54 Mbps****Power Spectral Density, 5745 MHz, HT-20, M0 to M15, M0 to M9 1-0ss****Power Spectral Density, 5755 MHz, Non HT-40, 6 to 54 Mbps**

**Power Spectral Density, 5755 MHz, HT-40, M0 to M15, M0 to M9 1-0ss****Power Spectral Density, 5785 MHz, Non HT-20, 6 to 54 Mbps****Power Spectral Density, 5785 MHz, HT-20, M0 to M15, M0 to M9 1-0ss**

**Power Spectral Density, 5795 MHz, Non HT-40, 6 to 54 Mbps****Power Spectral Density, 5795 MHz, HT-40, M0 to M15, M0 to M9 1-0ss****Power Spectral Density, 5825 MHz, Non HT-20, 6 to 54 Mbps**

**Power Spectral Density, 5825 MHz, HT-20, M0 to M15, M0 to M9 1-0ss**

Antenna A



## A.4 Conducted Spurious Emissions

**15.407** (b) *Undesirable emission limits.* Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

(7) The provisions of §15.205 apply to intentional radiators operating under this section.

### Test Procedure

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v01  
ANSI C63.10: 2013

#### Conducted Spurious Emissions

##### Test Procedure

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Place the radio in continuous transmit mode. Use the procedures in KDB 789033 D02 General UNII Test Procedures New Rules v01 to substitute conducted measurements in place of radiated measurements.
3. Configure Spectrum analyzer as per test parameters below (be sure to enter all losses between the transmitter output and the spectrum analyzer).
4. Record the marker waveform peak to spur difference. Also measure any emissions in the restricted bands.
5. The "measure-and-sum technique" is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. The worst case output is recorded.
6. Capture graphs and record pertinent measurement data.

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v01  
ANSI C63.10: 2013 section 12.7.7.3 (average) & 12.7.6 (peak)

#### Conducted Spurious Emissions

##### Test parameters

Span = 30MHz to 18GHz / 18GHz to 40GHz  
RBW = 1 MHz  
VBW  $\geq 3 \times$  RBW for Peak, 1kHz for Average  
Sweep = Auto couple  
Detector = Peak  
Trace = Max Hold.



System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>

<b>Tested By :</b> Jose Aguirre	<b>Date of testing:</b> 07-Jul-15 - 08-Aug-15
<b>Test Result : PASS</b>	

See Appendix C for list of test equipment



Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Total Conducted Spur (dBm)	Limit (dBm)	Margin (dB)
5745	Non HT-20, 6 to 54 Mbps	1	14	-71.0		-57.0	-41.25	15.8
	Non HT-20, 6 to 54 Mbps	2	14	-71.2	-71.3	-54.2	-41.25	13.0
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	14	-71.2	-71.3	-54.2	-41.25	13.0
	HT-20, M0 to M7	1	14	-71.2		-57.2	-41.25	16.0
	HT-20, M0 to M7	2	14	-71.0	-71.2	-54.1	-41.25	12.8
	HT-20, M8 to M15	2	14	-71.0	-71.2	-54.1	-41.25	12.8
	HT-20 Beam Forming, M0 to M7	2	14	-71.0	-71.2	-54.1	-41.25	12.8
	HT-20 Beam Forming, M8 to M15	2	14	-71.0	-71.2	-54.1	-41.25	12.8
	HT-20 STBC, M0 to M7	2	14	-71.0	-71.2	-54.1	-41.25	12.8
5755	Non HT-40, 6 to 54 Mbps	1	14	-71.2		-57.2	-41.25	16.0
	Non HT-40, 6 to 54 Mbps	2	14	-68.1	-68.3	-51.2	-41.25	9.9
	HT-40, M0 to M7	1	14	-68.2		-54.2	-41.25	13.0
	HT-40, M0 to M7	2	14	-68.3	-68.3	-51.3	-41.25	10.0
	HT-40, M8 to M15	2	14	-68.3	-68.3	-51.3	-41.25	10.0
	HT-40 Beam Forming, M0 to M7	2	14	-68.3	-68.3	-51.3	-41.25	10.0
	HT-40 Beam Forming, M8 to M15	2	14	-68.3	-68.3	-51.3	-41.25	10.0
	HT-40 STBC, M0 to M7	2	14	-68.3	-68.3	-51.3	-41.25	10.0
5785	Non HT-20, 6 to 54 Mbps	1	14	-71.2		-57.2	-41.25	16.0
	Non HT-20, 6 to 54 Mbps	2	14	-71.2	-70.6	-53.9	-41.25	12.6
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	14	-71.2	-70.6	-53.9	-41.25	12.6
	HT-20, M0 to M7	1	14	-71.1		-57.1	-41.25	15.9
	HT-20, M0 to M7	2	14	-71.1	-70.5	-53.8	-41.25	12.5
	HT-20, M8 to M15	2	14	-71.1	-70.5	-53.8	-41.25	12.5
	HT-20 Beam Forming, M0 to M7	2	14	-71.1	-70.5	-53.8	-41.25	12.5
	HT-20 Beam Forming, M8 to M15	2	14	-71.1	-70.5	-53.8	-41.25	12.5
	HT-20 STBC, M0 to M7	2	14	-71.1	-70.5	-53.8	-41.25	12.5



5795	Non HT-40, 6 to 54 Mbps	1	14	-71.1		-57.1	-41.25	15.9
	Non HT-40, 6 to 54 Mbps	2	14	-71.1	-71.2	-54.1	-41.25	12.9
	HT-40, M0 to M7	1	14	-71.3		-57.3	-41.25	16.1
	HT-40, M0 to M7	2	14	-71.5	-71.3	-54.4	-41.25	13.1
	HT-40, M8 to M15	2	14	-71.5	-71.3	-54.4	-41.25	13.1
	HT-40 Beam Forming, M0 to M7	2	14	-71.5	-71.3	-54.4	-41.25	13.1
	HT-40 Beam Forming, M8 to M15	2	14	-71.5	-71.3	-54.4	-41.25	13.1
	HT-40 STBC, M0 to M7	2	14	-71.5	-71.3	-54.4	-41.25	13.1
5825	Non HT-20, 6 to 54 Mbps	1	14	-71.9		-57.9	-41.25	16.7
	Non HT-20, 6 to 54 Mbps	2	14	-71.8	-71.7	-54.7	-41.25	13.5
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	14	-71.8	-71.7	-54.7	-41.25	13.5
	HT-20, M0 to M7	1	14	-71.8		-57.8	-41.25	16.6
	HT-20, M0 to M7	2	14	-71.9	-71.9	-54.9	-41.25	13.6
	HT-20, M8 to M15	2	14	-71.9	-71.9	-54.9	-41.25	13.6
	HT-20 Beam Forming, M0 to M7	2	14	-71.9	-71.9	-54.9	-41.25	13.6
	HT-20 Beam Forming, M8 to M15	2	14	-71.9	-71.9	-54.9	-41.25	13.6
	HT-20 STBC, M0 to M7	2	14	-71.9	-71.9	-54.9	-41.25	13.6

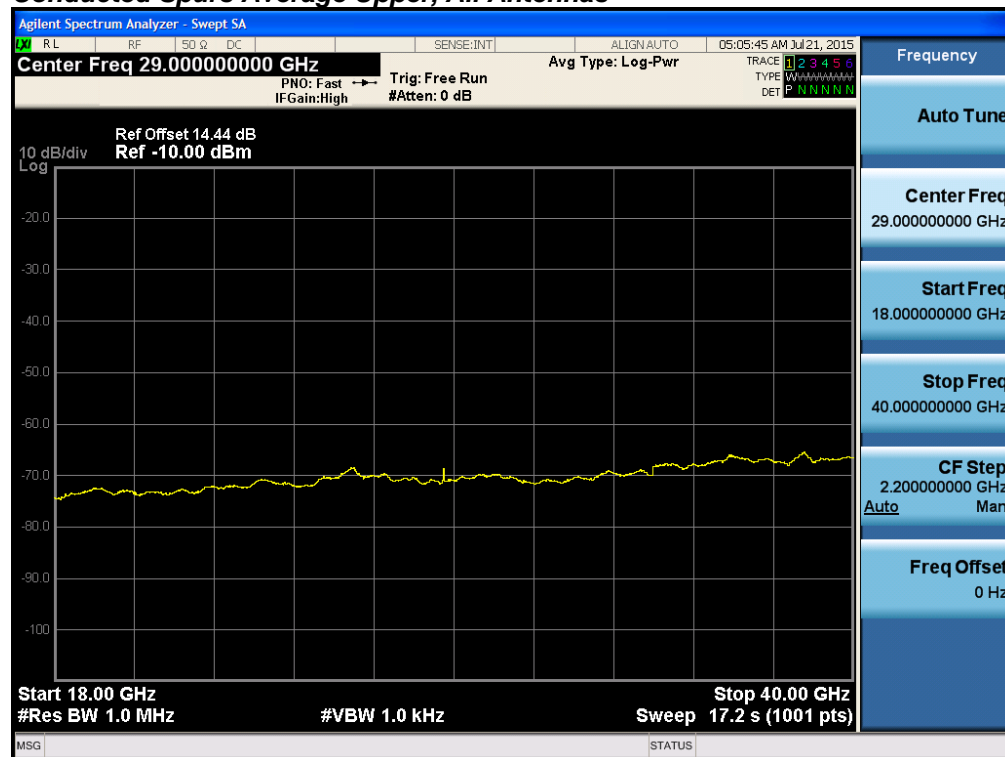
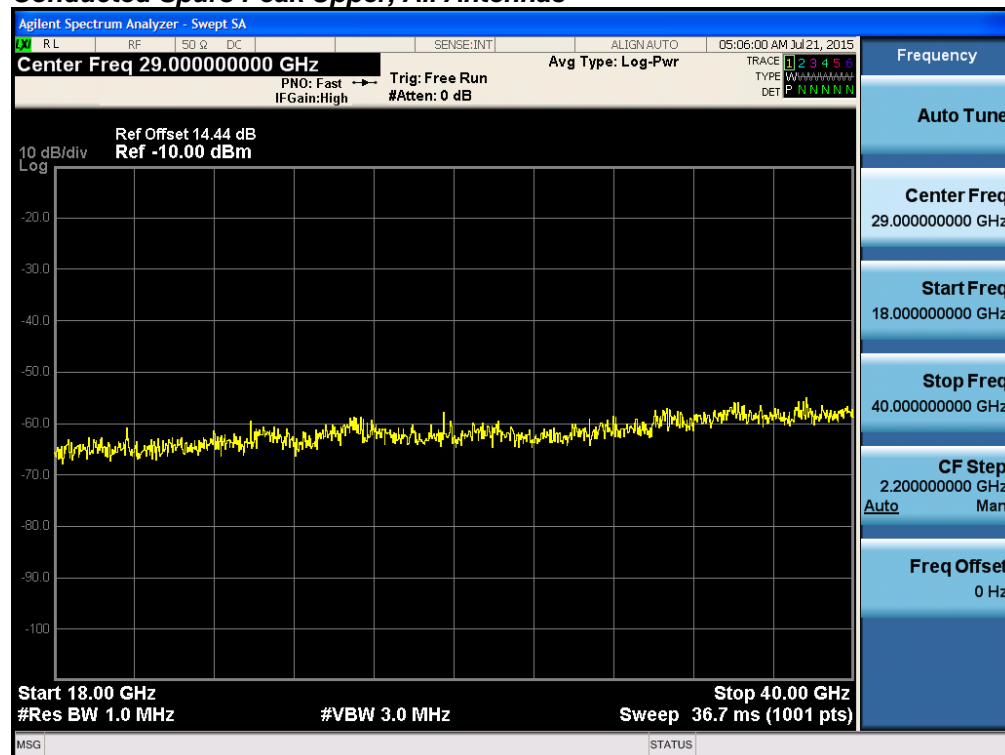


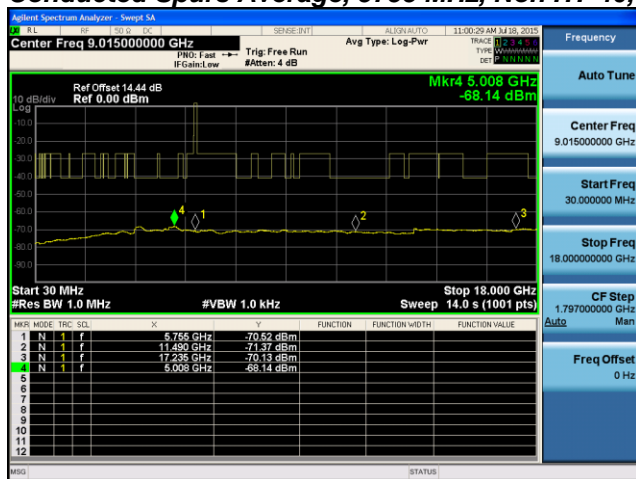
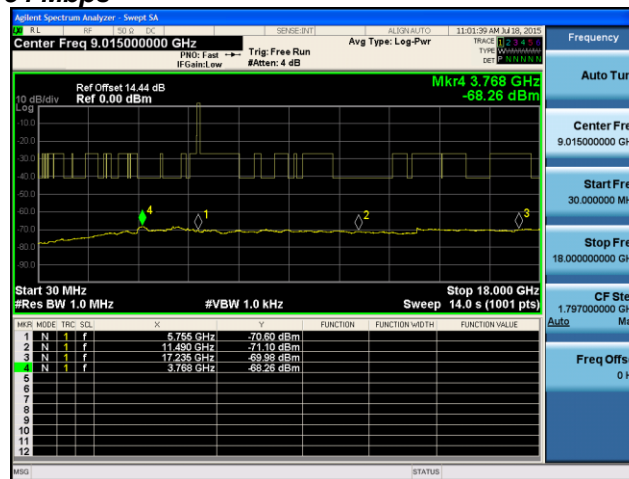
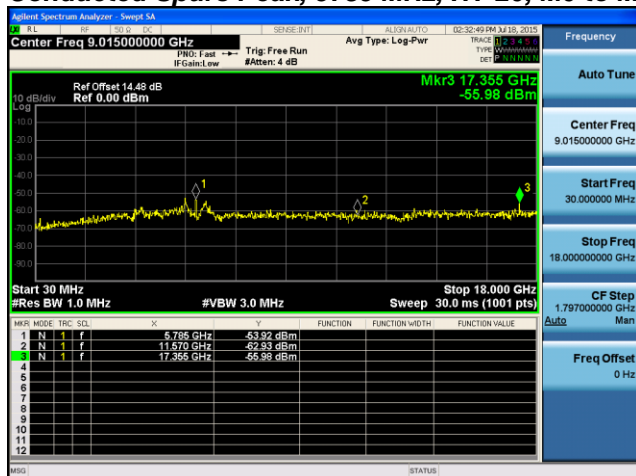
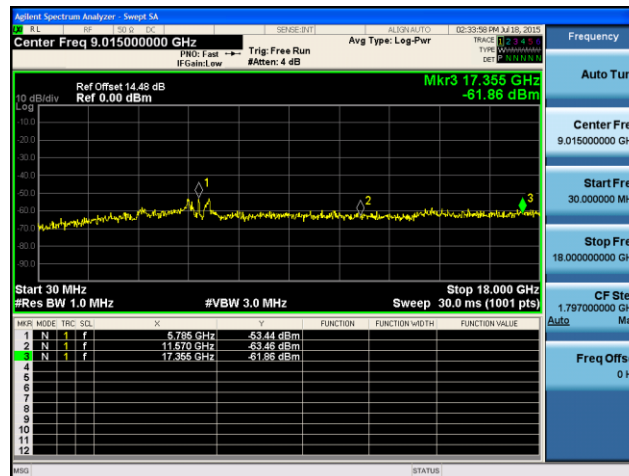


Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Total Conducted Spur (dBm)	Limit (dBm)	Margin (dB)
5745	Non HT-20, 6 to 54 Mbps	1	14	-61.4		-47.4	-21.25	26.2
	Non HT-20, 6 to 54 Mbps	2	14	-61.5	-61.9	-44.7	-21.25	23.4
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	14	-61.5	-61.9	-44.7	-21.25	23.4
	HT-20, M0 to M7	1	14	-61.3		-47.3	-21.25	26.1
	HT-20, M0 to M7	2	14	-62.0	-62.6	-45.3	-21.25	24.0
	HT-20, M8 to M15	2	14	-62.0	-62.6	-45.3	-21.25	24.0
	HT-20 Beam Forming, M0 to M7	2	14	-62.0	-62.6	-45.3	-21.25	24.0
	HT-20 Beam Forming, M8 to M15	2	14	-62.0	-62.6	-45.3	-21.25	24.0
	HT-20 STBC, M0 to M7	2	14	-62.0	-62.6	-45.3	-21.25	24.0
5755	Non HT-40, 6 to 54 Mbps	1	14	-61.4		-47.4	-21.25	26.2
	Non HT-40, 6 to 54 Mbps	2	14	-61.4	-60.7	-44.0	-21.25	22.8
	HT-40, M0 to M7	1	14	-61.8		-47.8	-21.25	26.6
	HT-40, M0 to M7	2	14	-59.9	-62.8	-44.1	-21.25	22.9
	HT-40, M8 to M15	2	14	-59.9	-62.8	-44.1	-21.25	22.9
	HT-40 Beam Forming, M0 to M7	2	14	-59.9	-62.8	-44.1	-21.25	22.9
	HT-40 Beam Forming, M8 to M15	2	14	-59.9	-62.8	-44.1	-21.25	22.9
	HT-40 STBC, M0 to M7	2	14	-59.9	-62.8	-44.1	-21.25	22.9
5785	Non HT-20, 6 to 54 Mbps	1	14	-61.0		-47.0	-21.25	25.8
	Non HT-20, 6 to 54 Mbps	2	14	-61.0	-60.1	-43.5	-21.25	22.3
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	14	-61.0	-60.1	-43.5	-21.25	22.3
	HT-20, M0 to M7	1	14	-56.0		-42.0	-21.25	20.8
	HT-20, M0 to M7	2	14	-56.0	-61.9	-41.0	-21.25	19.8
	HT-20, M8 to M15	2	14	-56.0	-61.9	-41.0	-21.25	19.8
	HT-20 Beam Forming, M0 to M7	2	14	-56.0	-61.9	-41.0	-21.25	19.8
	HT-20 Beam Forming, M8 to M15	2	14	-56.0	-61.9	-41.0	-21.25	19.8
	HT-20 STBC, M0 to M7	2	14	-56.0	-61.9	-41.0	-21.25	19.8



5795	Non HT-40, 6 to 54 Mbps	1	14	-61.7		-47.7	-21.25	26.5
	Non HT-40, 6 to 54 Mbps	2	14	-60.7	-60.1	-43.4	-21.25	22.1
	HT-40, M0 to M7	1	14	-61.3		-47.3	-21.25	26.1
	HT-40, M0 to M7	2	14	-61.3	-62.1	-44.7	-21.25	23.4
	HT-40, M8 to M15	2	14	-61.3	-62.1	-44.7	-21.25	23.4
	HT-40 Beam Forming, M0 to M7	2	14	-61.3	-62.1	-44.7	-21.25	23.4
	HT-40 Beam Forming, M8 to M15	2	14	-61.3	-62.1	-44.7	-21.25	23.4
	HT-40 STBC, M0 to M7	2	14	-61.3	-62.1	-44.7	-21.25	23.4
5825	Non HT-20, 6 to 54 Mbps	1	14	-62.1		-48.1	-21.25	26.9
	Non HT-20, 6 to 54 Mbps	2	14	-63.1	-61.7	-45.3	-21.25	24.1
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	14	-63.1	-61.7	-45.3	-21.25	24.1
	HT-20, M0 to M7	1	14	-61.5		-47.5	-21.25	26.3
	HT-20, M0 to M7	2	14	-60.6	-59.8	-43.2	-21.25	21.9
	HT-20, M8 to M15	2	14	-60.6	-59.8	-43.2	-21.25	21.9
	HT-20 Beam Forming, M0 to M7	2	14	-60.6	-59.8	-43.2	-21.25	21.9
	HT-20 Beam Forming, M8 to M15	2	14	-60.6	-59.8	-43.2	-21.25	21.9
	HT-20 STBC, M0 to M7	2	14	-60.6	-59.8	-43.2	-21.25	21.9

**Conducted Spurs Average Upper, All Antennas****Conducted Spurs Peak Upper, All Antennas**

**Conducted Spurs Average, 5755 MHz, Non HT-40, 6 to 54 Mbps****Antenna A****Antenna B****Conducted Spurs Peak, 5785 MHz, HT-20, M0 to M7****Antenna A****Antenna B**



## A.5 Conducted Band edge

**15.407** (b) *Undesirable emission limits.* Except as shown in paragraph (b) (7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in 15.209.

(7) The provisions of §15.205 apply to intentional radiators operating under this section.

(8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits

### Test Procedure

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v01  
ANSI C63.10: 2013

#### Conducted Band edge

##### Test Procedure

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Place the radio in continuous transmit mode. Use the procedures in ANSI C63.10: 2013 to substitute conducted measurements in place of radiated measurements.
3. Configure Spectrum analyzer as per test parameters below (be sure to enter all losses between the transmitter output and the spectrum analyzer).
4. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands.
5. The "measure-and-sum technique" is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. The worst case output is recorded.
6. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands
7. Capture graphs and record pertinent measurement data.

Ref. ANSI C63.10: 2013 section 12.7.6 (peak) & 12.7.7.3 (average, Method VB-A (Alternative))

#### Conducted Band edge

##### Test parameters restricted Band

RBW = 1 MHz  
VBW  $\geq 3 \times$  RBW for Peak, 100Hz for Average  
Sweep = Auto couple  
Detector = Peak  
Trace = Max Hold.



System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>

<b>Tested By :</b> Jose Aguirre	<b>Date of testing:</b> 07-Jul-15 - 08-Aug-15
<b>Test Result : PASS</b>	

See Appendix C for list of test equipment

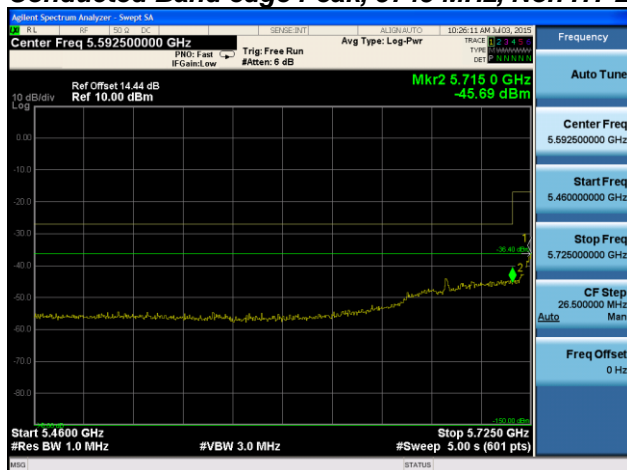
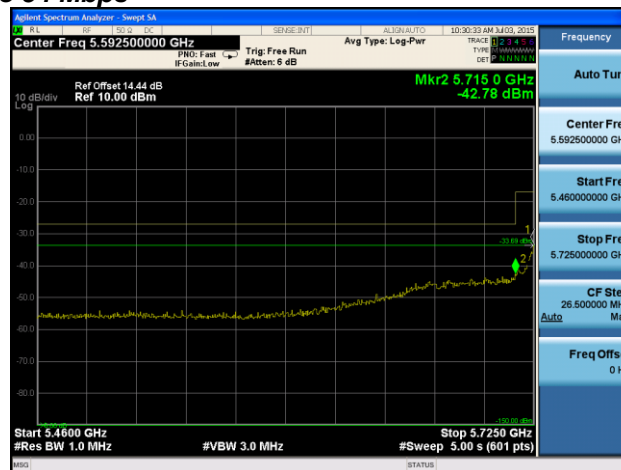
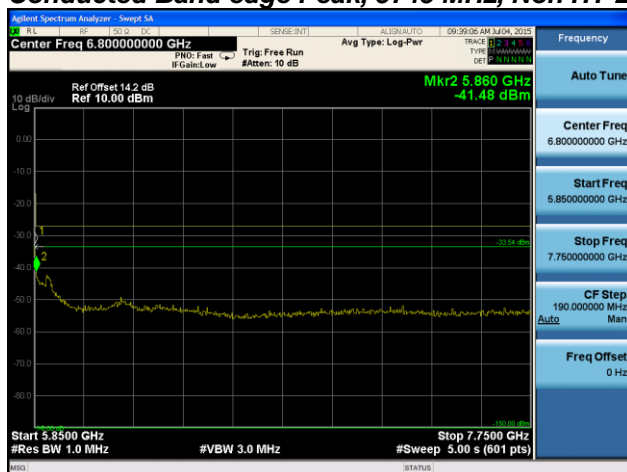


Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Bandedge Level (dBm)	Tx 2 Bandedge Level (dBm)	Total Tx Bandedge Level (dBm)	Limit (dBm)	Margin (dB)
5745	Non HT-20, 6 to 54 Mbps	1	14	-42.7		-28.7	-27.00	1.7
	Non HT-20, 6 to 54 Mbps	2	14	-45.7	-42.8	-27.0	-27.00	0.0
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	14	-45.7	-42.8	-27.0	-27.00	0.0
	HT-20, M0 to M7	1	14	-41.1		-27.1	-27.00	0.1
	HT-20, M0 to M7	2	14	-45.0	-43.8	-27.3	-27.00	0.3
	HT-20, M8 to M15	2	14	-45.0	-43.8	-27.3	-27.00	0.3
	HT-20 Beam Forming, M0 to M7	2	14	-45.0	-43.8	-27.3	-27.00	0.3
	HT-20 Beam Forming, M8 to M15	2	14	-45.0	-43.8	-27.3	-27.00	0.3
	HT-20 STBC, M0 to M7	2	14	-45.0	-43.8	-27.3	-27.00	0.3
5755	Non HT-40, 6 to 54 Mbps	1	14	-42.6		-28.6	-27.00	1.6
	Non HT-40, 6 to 54 Mbps	2	14	-44.0	-44.3	-27.1	-27.00	0.1
	HT-40, M0 to M7	1	14	-31.6		-17.6	-17.00	0.6
	HT-40, M0 to M7	2	14	-44.5	-43.8	-27.1	-27.00	0.1
	HT-40, M8 to M15	2	14	-44.5	-43.8	-27.1	-27.00	0.1
	HT-40 Beam Forming, M0 to M7	2	14	-44.5	-43.8	-27.1	-27.00	0.1
	HT-40 Beam Forming, M8 to M15	2	14	-44.5	-43.8	-27.1	-27.00	0.1
	HT-40 STBC, M0 to M7	2	14	-44.5	-43.8	-27.1	-27.00	0.1
5795	Non HT-40, 6 to 54 Mbps	1	14	-42.7		-28.7	-27.00	1.7
	Non HT-40, 6 to 54 Mbps	2	14	-44.6	-45.0	-27.8	-27.00	0.8
	HT-40, M0 to M7	1	14	-42.2		-28.2	-27.00	1.2
	HT-40, M0 to M7	2	14	-45.5	-45.8	-28.6	-27.00	1.6
	HT-40, M8 to M15	2	14	-45.5	-45.8	-28.6	-27.00	1.6
	HT-40 Beam Forming, M0 to M7	2	14	-45.5	-45.8	-28.6	-27.00	1.6
	HT-40 Beam Forming, M8 to M15	2	14	-45.5	-45.8	-28.6	-27.00	1.6
	HT-40 STBC, M0 to M7	2	14	-45.5	-45.8	-28.6	-27.00	1.6
5825	Non HT-20, 6 to 54 Mbps	1	14	-41.5		-27.5	-27.00	0.5
	Non HT-20, 6 to 54 Mbps	2	14	-48.3	-45.0	-29.3	-27.00	2.3
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	14	-48.3	-45.0	-29.3	-27.00	2.3
	HT-20, M0 to M7	1	14	-41.9		-27.9	-27.00	0.9
	HT-20, M0 to M7	2	14	-46.0	-43.5	-27.6	-27.00	0.6
	HT-20, M8 to M15	2	14	-46.0	-43.5	-27.6	-27.00	0.6



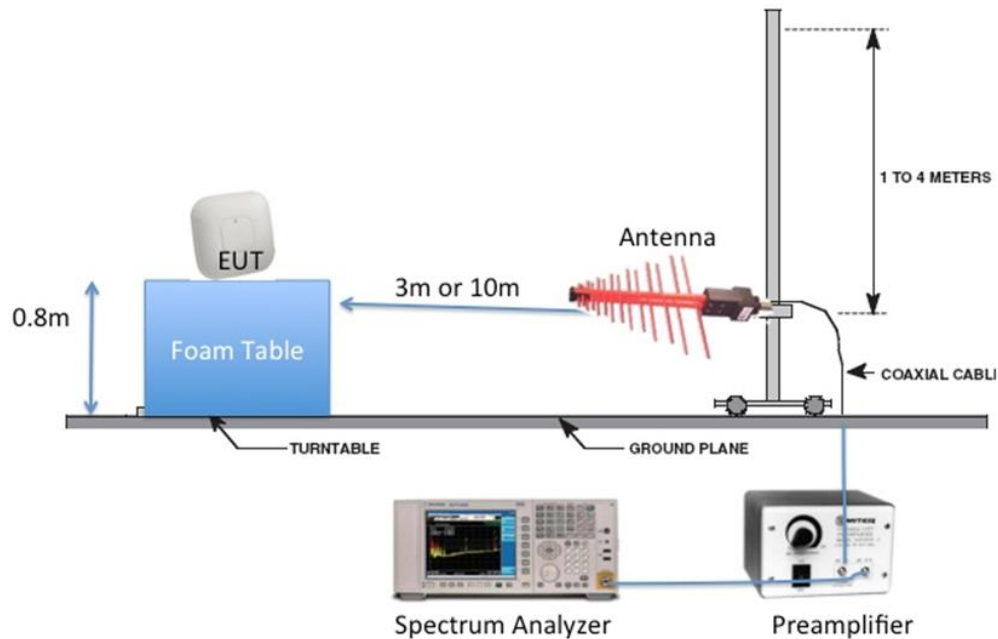
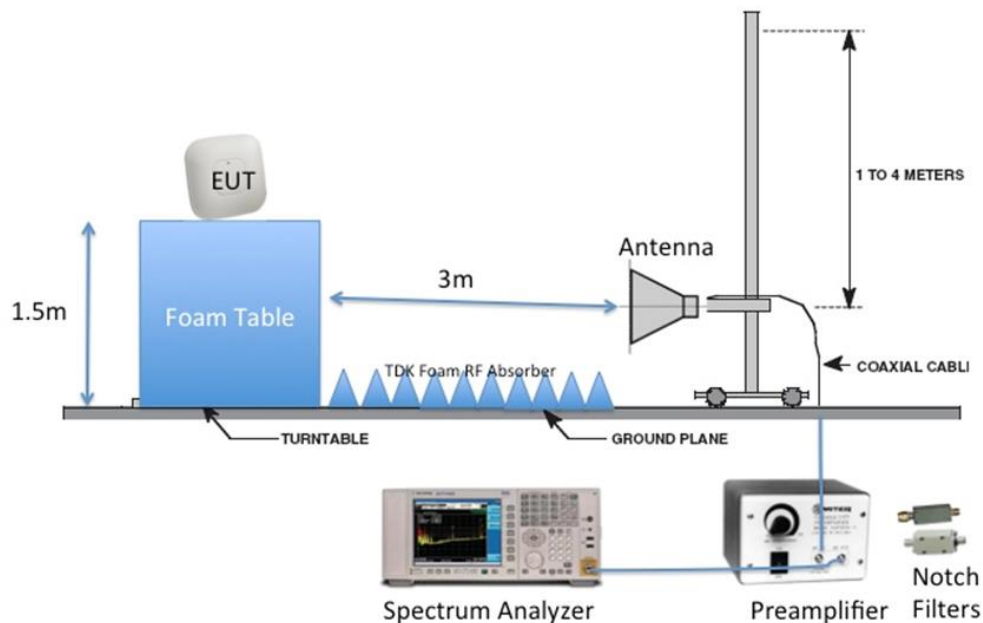
	HT-20 Beam Forming, M0 to M7	2	14	-46.0	-43.5	-27.6	-27.00	0.6
	HT-20 Beam Forming, M8 to M15	2	14	-46.0	-43.5	-27.6	-27.00	0.6
	HT-20 STBC, M0 to M7	2	14	-46.0	-43.5	-27.6	-27.00	0.6



**Conducted Band edge Peak, 5745 MHz, Non HT-20, 6 to 54 Mbps****Antenna A****Antenna B****Conducted Band edge Peak, 5745 MHz, Non HT-20, 6 to 54 Mbps****Antenna A**

**Appendix B: Emission Test Results**

**Testing Laboratory:** Cisco Systems, Inc., 170 West Tasman Drive, San Jose, CA 95134, USA

**Radiated Emission Setup Diagram-Below 1G****Radiated Emission Setup Diagram-Above 1G**



## B.1 Radiated Spurious Emissions

**15.407** (b) *Undesirable emission limits.* Except as shown in paragraph (b) (7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in 15.209.
- (7) The provisions of §15.205 apply to intentional radiators operating under this section.
- (8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits

**Ref.** ANSI C63.10: 2013 section 12.7.6 (peak) & 12.7.7.3 (average)

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

Span:	1GHz – 18 GHz/18GHz-26G/26GHz-40GHz
Reference Level:	80 dBuV
Attenuation:	10 dB
Sweep Time:	Coupled
Resolution Bandwidth:	1MHz
Video Bandwidth:	3 MHz for peak, 1 KHz for average
Detector:	Peak

Terminate the access Point RF ports with 50 ohm loads.

Maximize Turntable (find worst case table angle), Maximize Antenna (find worst case height)

Save 2 plots:     1) Average plot (Vertical and Horizontal), Limit= 54dBuV/m @3m  
                          2) Peak plot (Vertical and Horizontal), Limit = 74dBuV/m @3m

Place a marker at the end of the restricted band closest to the transmit frequency to show compliance.  
 Also measure any emissions in the restricted bands.

This report represents the worst case data for all supported operating modes and antennas. There are no measurable emissions above 18 GHz.

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>

<b>Tested By :</b> Jose Aguirre	<b>Date of testing:</b> 07-Jul-15 - 08-Aug-15
<b>Test Result : PASS</b>	

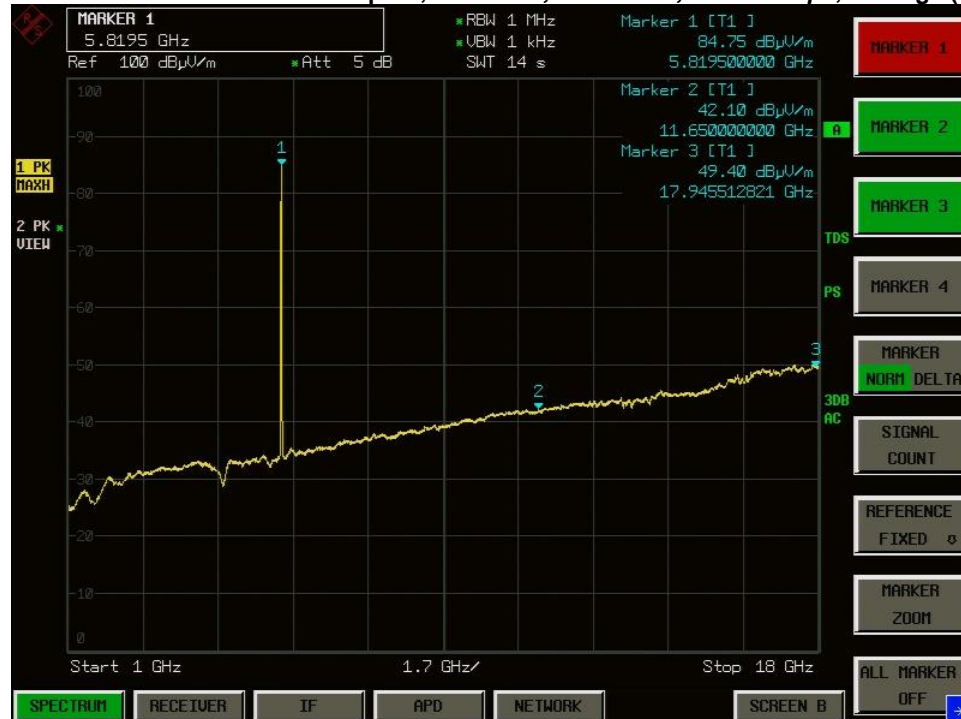
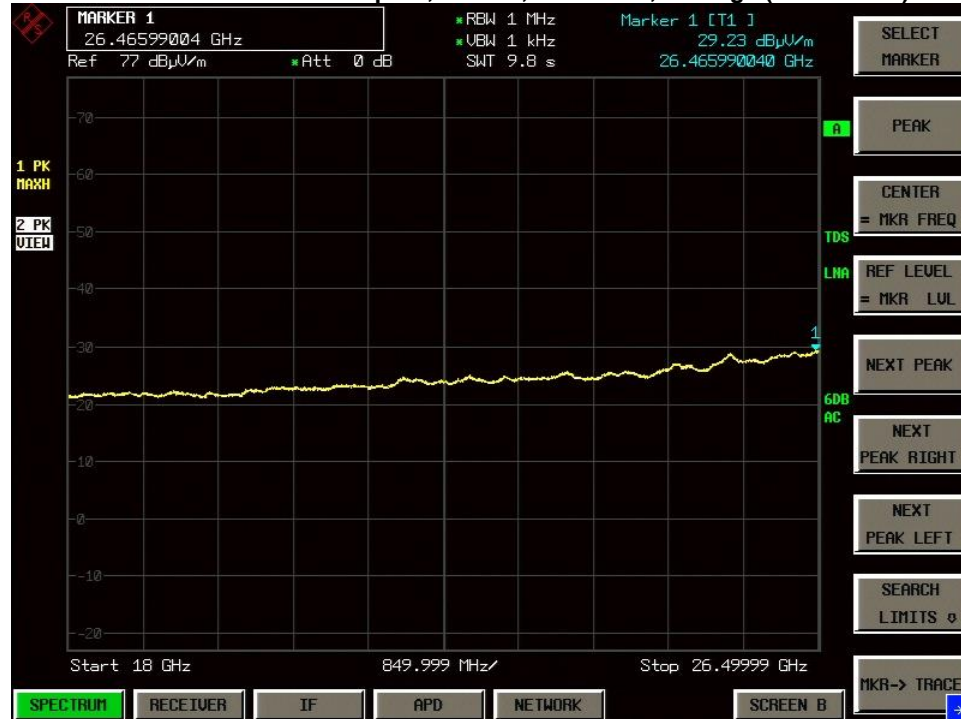
See Appendix C for list of test equipment

**B.1.A Transmitter Radiated Spurious Emissions-Average Worst Case**

Frequency (MHz)	Mode	Data Rate (Mbps)	Spurious Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (MHz)
5745	Non HT-20, 6 to 54 Mbps	6	49.8	54	4.2
5755	HT-40, M0 to M15	m0	49.6	54	4.4
5785	Non HT-20, 6 to 54 Mbps	6	49.9	54	4.1
5795	HT-40, M0 to M15	M0	49.9	54	4.1
5825	Non HT-20, 6 to 54 Mbps	6	49.5	54	4.5

**B.1.A.1 Radiated Transmitter Spurs, 5745 MHz, Non HT-20, 6 to 54 Mbps, Average (1-18GHz)****B.1.A.2 Radiated Transmitter Spurs, 5755 MHz, HT-40, M0 to M15, Average (1-18GHz)**

**B.1.A.4 Radiated Transmitter Spurs, 5785 MHz, Non HT-20, 6 to 54 Mbps, Average (1-18GHz)****B.1.A.5 Radiated Transmitter Spurs, 5795 MHz, HT-40, M0 to M15, Average (1-18GHz)**

**B.1.A.6 Radiated Transmitter Spurs, 5825 MHz, Non HT-20, 6 to 54 Mbps, Average (1-18GHz)****B.1.A.7 Radiated Transmitter Spurs, All rate, All modes, Average (18-26.5GHz)**





## B.1.A.9 Radiated Transmitter Spurs, All rate, All modes, Average (26.5- 40GHz)





**B.1.P Transmitter Radiated Spurious Emissions-Peak Worst Case**

Frequency (MHz)	Mode	Data Rate (Mbps)	Spurious Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (MHz)
5745	Non HT-20, 6 to 54 Mbps	6	62.5	74	11.5
5755	HT-40, M0 to M15	m0	62.1	74	11.9
5785	Non HT-20, 6 to 54 Mbps	6	63.1	74	10.9
5795	HT-40, M0 to M15	M0	61.9	74	12.1
5825	Non HT-20, 6 to 54 Mbps	6	61.3	74	12.7

The screenshot displays a Spectrum Analyzer interface with a dark background. The main plot area shows a signal spectrum with a red trace and a yellow trace. The red trace has several peaks, with the highest one labeled 'Peak' and 'Peak1'. The yellow trace shows a rising signal level across the frequency range. The x-axis is labeled 'Start 1 GHz', '1.7 GHz', and 'Stop 18 GHz'. The y-axis is labeled 'Peak', 'PS', and '3dB AC'. The interface includes various control buttons and markers on the right side, such as 'MARKER 1', 'MARKER 2', 'MARKER 3', 'MARKER 4', 'MARKER', 'NORM DELTA', 'SIGNAL COUNT', 'REFERENCE FIXED', 'MARKER ZOOM', 'ALL MARKER', and 'OFF'. The top of the screen shows a 'MARKER 1' box with '5.743 GHz' and 'Ref 100 dBuV/m'. The bottom of the screen shows a 'SPECTRUM' button and a 'RECEIVER' button.

**MARKER 1**  
5.743 GHz  
Ref 100 dBuV/m  
\*Att 5 dB

\*RBW 1 MHz  
\*VBW 3 MHz  
\*SMT 100 ms

Marker 1 [T1]  
96.46 dBuV/m  
5.743000000 GHz

Marker 2 [T1]  
55.40 dBuV/m  
11.490000000 GHz

Marker 3 [T1]  
62.45 dBuV/m  
17.881000000 GHz

1 PK  
MAXH

2 PK  
VIEW

Peak  
Peak1

3  
PS

3dB  
AC

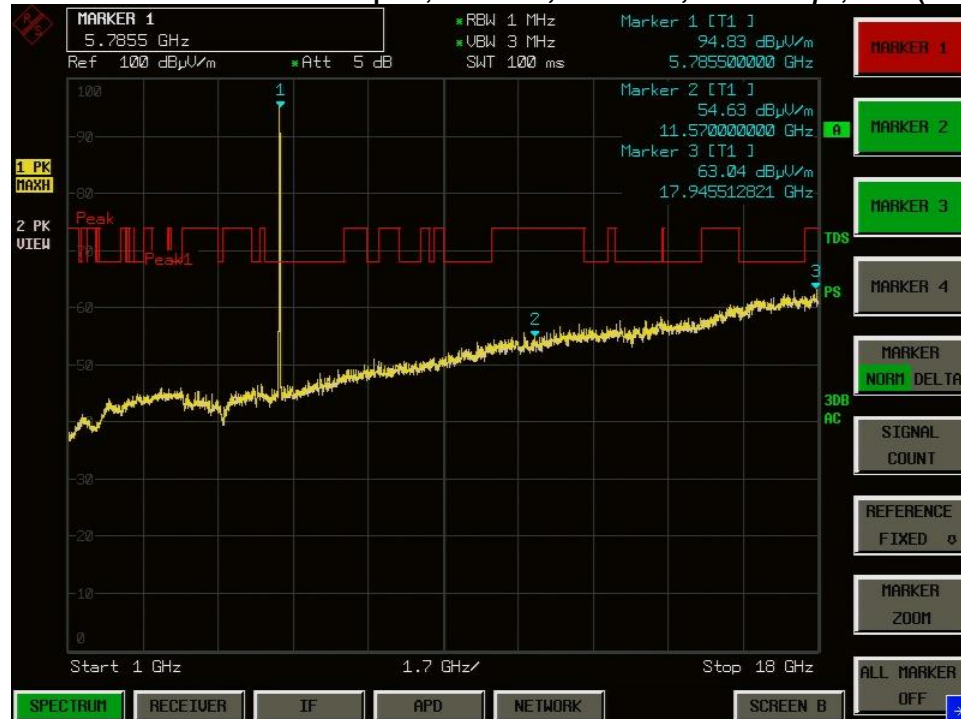
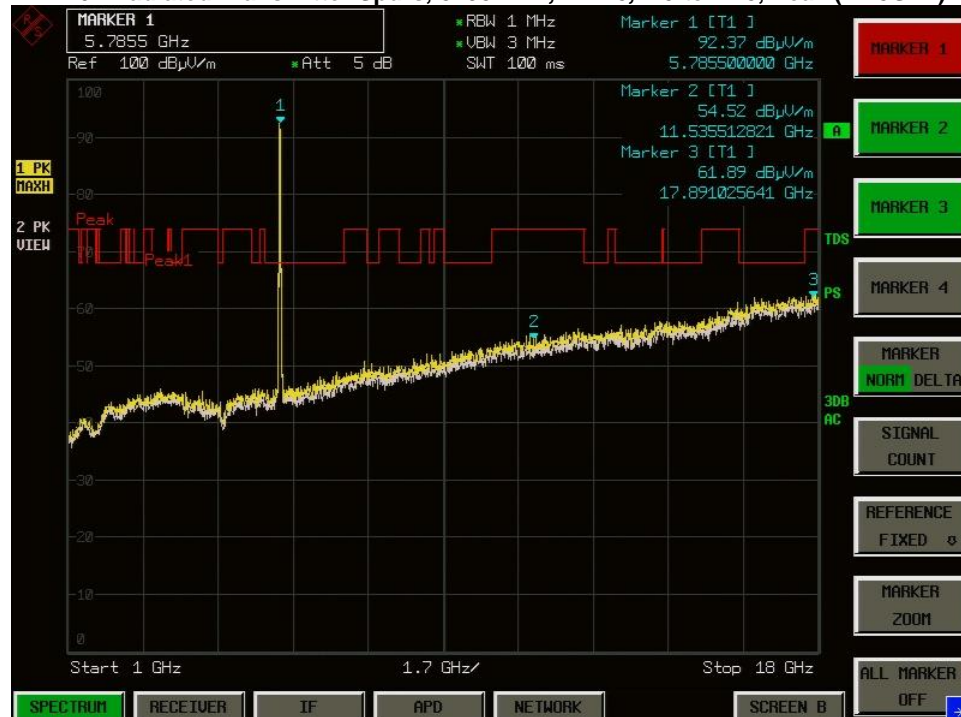
Start 1 GHz  
1.7 GHz  
Stop 18 GHz

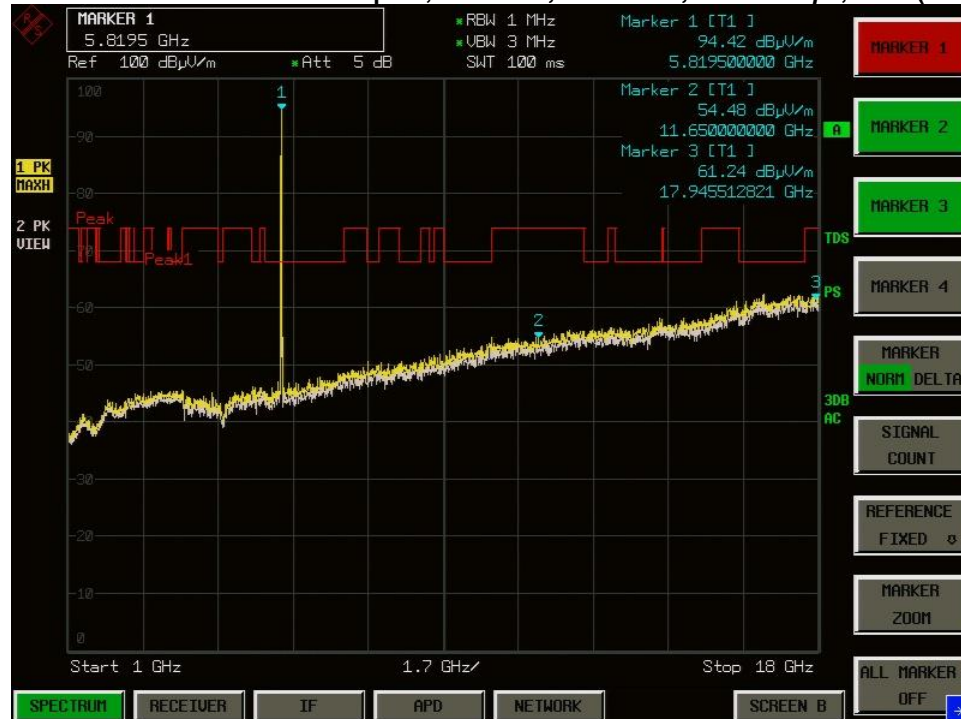
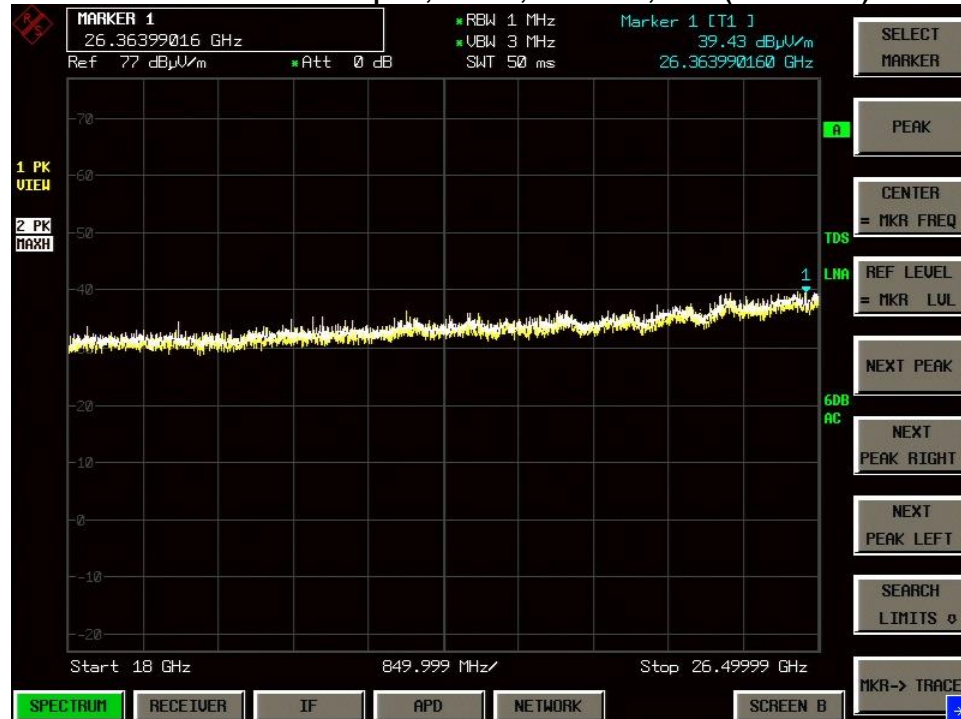
SPECTRUM  
RECEIVER  
IF  
APD  
NETWORK  
SCREEN B

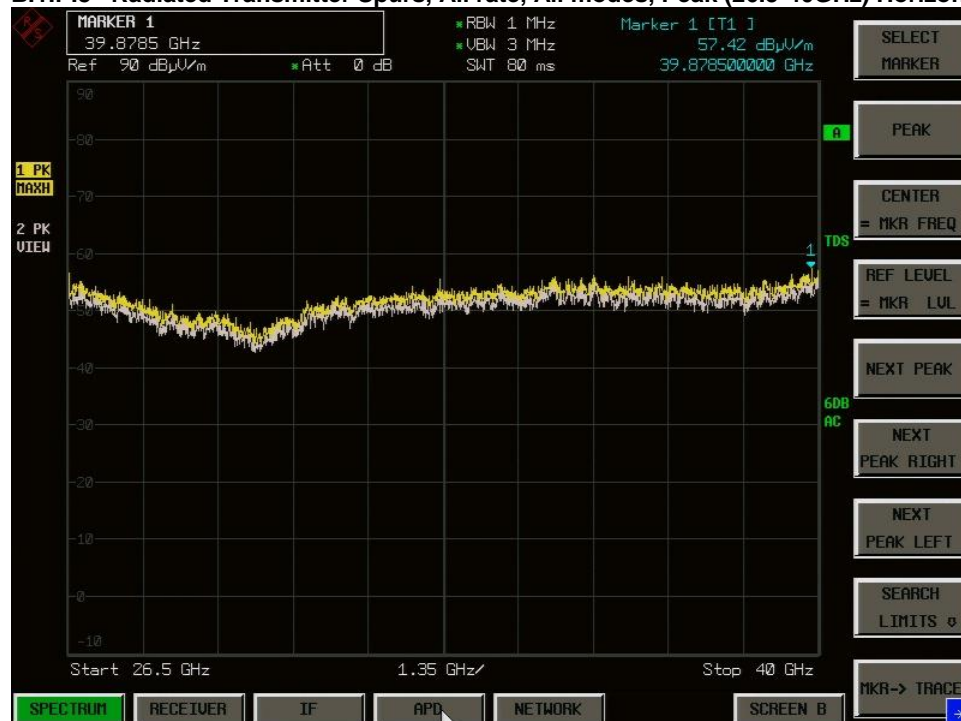
MARKER 1  
MARKER 2  
MARKER 3  
MARKER 4  
MARKER  
NORM DELTA  
SIGNAL COUNT  
REFERENCE FIXED  
MARKER ZOOM  
ALL MARKER  
OFF

The screenshot displays a Spectrum Analyzer interface with the following components:

- Top Panel:**
  - MARKER 1:** 5.7685 GHz, Ref 100 dBμV/m, Att 5 dB.
  - RBW:** 1 MHz, **VBW:** 3 MHz, **SMT:** 100 ms.
  - Marker 1 [T1]:** 92.79 dBμV/m, 5.76850000 GHz.
- Left Panel:**
  - 1 PK MAXH:** 1 PK VIEW.
  - 2 PK VIEW:** Peak, Peak1.
- Right Panel:**
  - MARKER 2:** 54.79 dBμV/m, 11.513782051 GHz.
  - MARKER 3:** 62.03 dBμV/m, 17.918269231 GHz.
  - MARKER 4:** (Empty)
  - MARKER NORM DELTA:** (Empty)
  - SIGNAL COUNT:** (Empty)
  - REFERENCE FIXED:** (Empty)
  - MARKER ZOOM:** (Empty)
  - ALL MARKER OFF:** (Empty)
- Bottom Panel:**
  - SPECTRUM:** (Selected)
  - RECEIVER:** (Empty)
  - IF:** (Empty)
  - APD:** (Empty)
  - NETWORK:** (Empty)
  - SCREEN B:** (Empty)
- Plot Area:**
  - Y-axis:** Power level in dBμV/m, ranging from 0 to 100.
  - X-axis:** Frequency in GHz, ranging from 1 to 18.
  - Signal:** A red line representing the signal spectrum, showing a sharp peak at 5.7685 GHz (Marker 1) and a broader peak at 17.918269231 GHz (Marker 3).
  - Background:** A yellow grid.

**B.1.P.4 Radiated Transmitter Spurs, 5785 MHz, Non HT-20, 6 to 54 Mbps, Peak (1-18GHz)****B.1.P.6 Radiated Transmitter Spurs, 5795 MHz, HT-40, M0 to M15, Peak (1-18GHz)**

**B.1.P.6 Radiated Transmitter Spurs, 5825 MHz, Non HT-20, 6 to 54 Mbps, Peak (1-18GHz)****B.1.P.7 Radiated Transmitter Spurs, All rate, All modes, Peak (18-26.5GHz) Horizontal & Vertical**

**B.1.P.8 Radiated Transmitter Spurs, All rate, All modes, Peak (26.5-40GHz) Horizontal & Vertical**



## B.2 Radiated Emissions 30MHz to 1GHz

### FCC 15.205 / 15.209

(7) The provisions of 15.205 apply to intentional radiators operating under this section.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in 15.209.

Ref. ANSI C63.10: 2013 section 6.5

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

Span:	30MHz – 1GHz
Reference Level:	80 dBuV
Attenuation:	10 dB
Sweep Time:	Coupled
Resolution Bandwidth:	100kHz
Video Bandwidth:	300kHz
Detector:	Peak for Pre-scan, Quasi-Peak

Compliance shall be determined using CISPR quasi-peak detection; however, peak detection is permitted as an alternative to quasi-peak detection.

Terminate the access Point RF ports with 50 ohm loads.

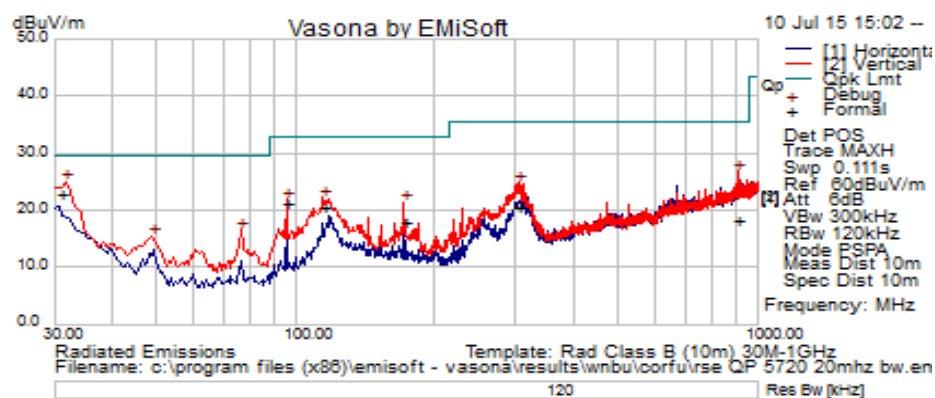
Maximize Turntable (find worst case table angle), Maximize Antenna (find worst case height)

This report represents the worst case data for all supported operating modes and antennas.

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>

<b>Tested By :</b> Jose Aguirre	<b>Date of testing:</b> 07-Jul-15 - 08-Aug-15
<b>Test Result : PASS</b>	

See Appendix C for list of test equipment



Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	P ol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
114.431	33.65	1.28	-14.32	20.62	Quasi Max	V	391	69	33	-12.38	Pass
906.063	20.34	3.33	-5.4	18.27	Quasi Max	V	318	92	35.5	-17.23	Pass
31	30.17	0.66	-7.73	23.1	Quasi Max	V	166	153	29.5	-6.4	Pass
171.831	32.43	1.57	-15.89	18.1	Quasi Max	V	154	194	33	-14.9	Pass
305.306	31.94	2.08	-13.53	20.49	Quasi Max	V	109	196	35.5	-15.01	Pass
95.356	39.05	1.14	-18.76	21.42	Quasi Max	V	104	294	33	-11.58	Pass



## B.3 AC Conducted Emissions

**FCC 15.207** Except when the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply, either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table in these sections. The more stringent limit applies at the frequency range boundaries.

### Measurement Procedure

Accordance with ANSI C63.10:2013 section 6.2

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

Span: 150 KHz – 30 MHz  
Attenuation: 10 dB  
Sweep Time: Coupled  
Resolution Bandwidth: 9 KHz  
Video Bandwidth: 30 KHz  
Detector: Quasi-Peak / Average

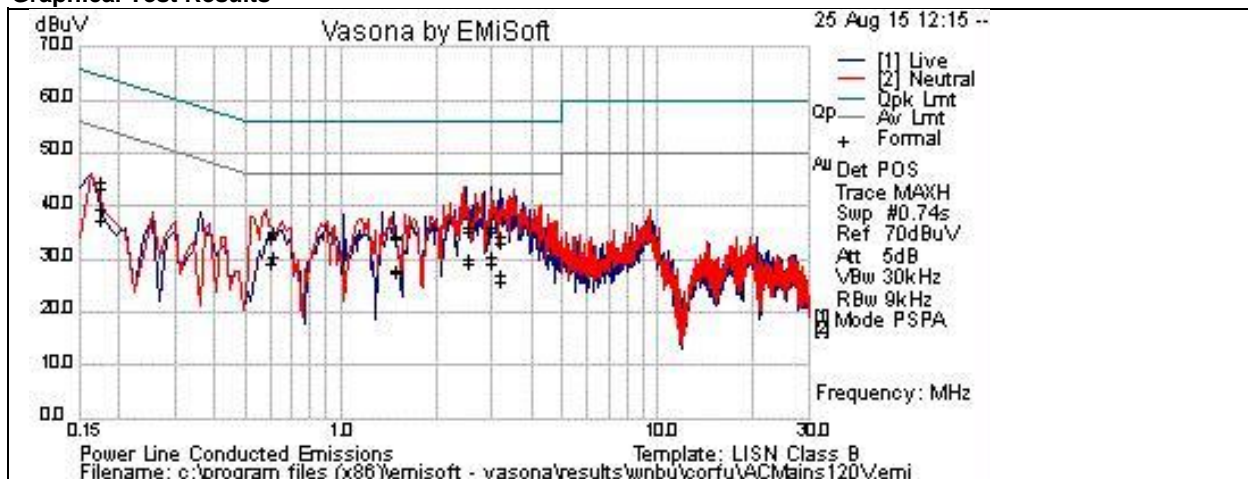
System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>

<b>Tested By :</b> Jose Aguirre	<b>Date of testing:</b> 07-Jul-15 - 08-Aug-15
<b>Test Result : PASS</b>	

See Appendix C for list of test equipment



## Graphical Test Results



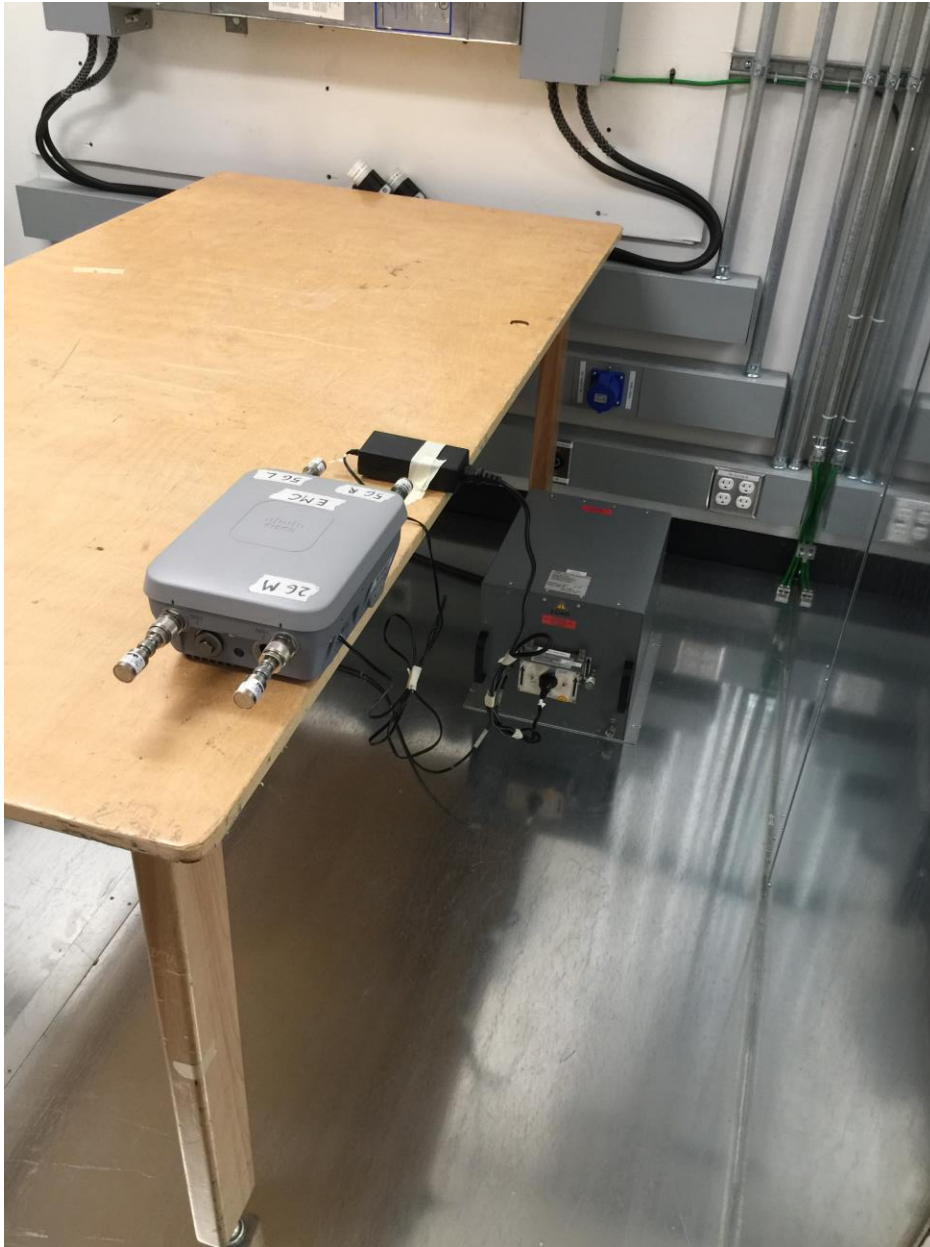
### Test Results Table

Frequency MHz	Raw dBuV	Cable Loss	Factors dB	Level dBuV	Measurement Type	Line	Limit dBuV	Margin dB	Pass /Fail	Comments
0.606	15	20	0	35	Qp	L	56	-21	Pass	
2.508	16.2	20	0	36.2	Qp	L	56	-19.8	Pass	
2.986	16.2	20	0.1	36.2	Qp	L	56	-19.8	Pass	
0.173	23.6	20.9	0	44.6	Qp	L	64.8	-20.2	Pass	
1.478	14.5	20	0	34.5	Qp	L	56	-21.5	Pass	
3.18	14.3	20	0	34.3	Qp	L	56	-21.7	Pass	
2.986	15	20	0.1	35	Qp	N	56	-21	Pass	
2.508	15.1	20	0	35.1	Qp	N	56	-20.9	Pass	
3.18	12.8	20	0	32.8	Qp	N	56	-23.2	Pass	
0.604	13.7	20	0	33.8	Qp	N	56	-22.2	Pass	
0.173	22.4	20.9	0	43.4	Qp	N	64.8	-21.4	Pass	
1.478	13.9	20	0	33.9	Qp	N	56	-22.1	Pass	
0.606	10.4	20	0	30.4	Av	L	46	-15.6	Pass	
2.508	10.1	20	0	30.1	Av	L	46	-15.9	Pass	
2.986	10.6	20	0.1	30.7	Av	L	46	-15.3	Pass	
0.173	18.5	20.9	0	39.5	Av	L	54.8	-15.3	Pass	
1.478	7.9	20	0	27.9	Av	L	46	-18.1	Pass	
3.18	7	20	0	27.1	Av	L	46	-18.9	Pass	
2.986	9.3	20	0.1	29.3	Av	N	46	-16.7	Pass	
2.508	9.3	20	0	29.3	Av	N	46	-16.7	Pass	
3.18	5.6	20	0	25.7	Av	N	46	-20.3	Pass	
0.604	9	20	0	29.1	Av	N	46	-16.9	Pass	
0.173	16.5	20.9	0	37.5	Av	N	54.8	-17.4	Pass	
1.478	7.4	20	0	27.4	Av	N	46	-18.6	Pass	

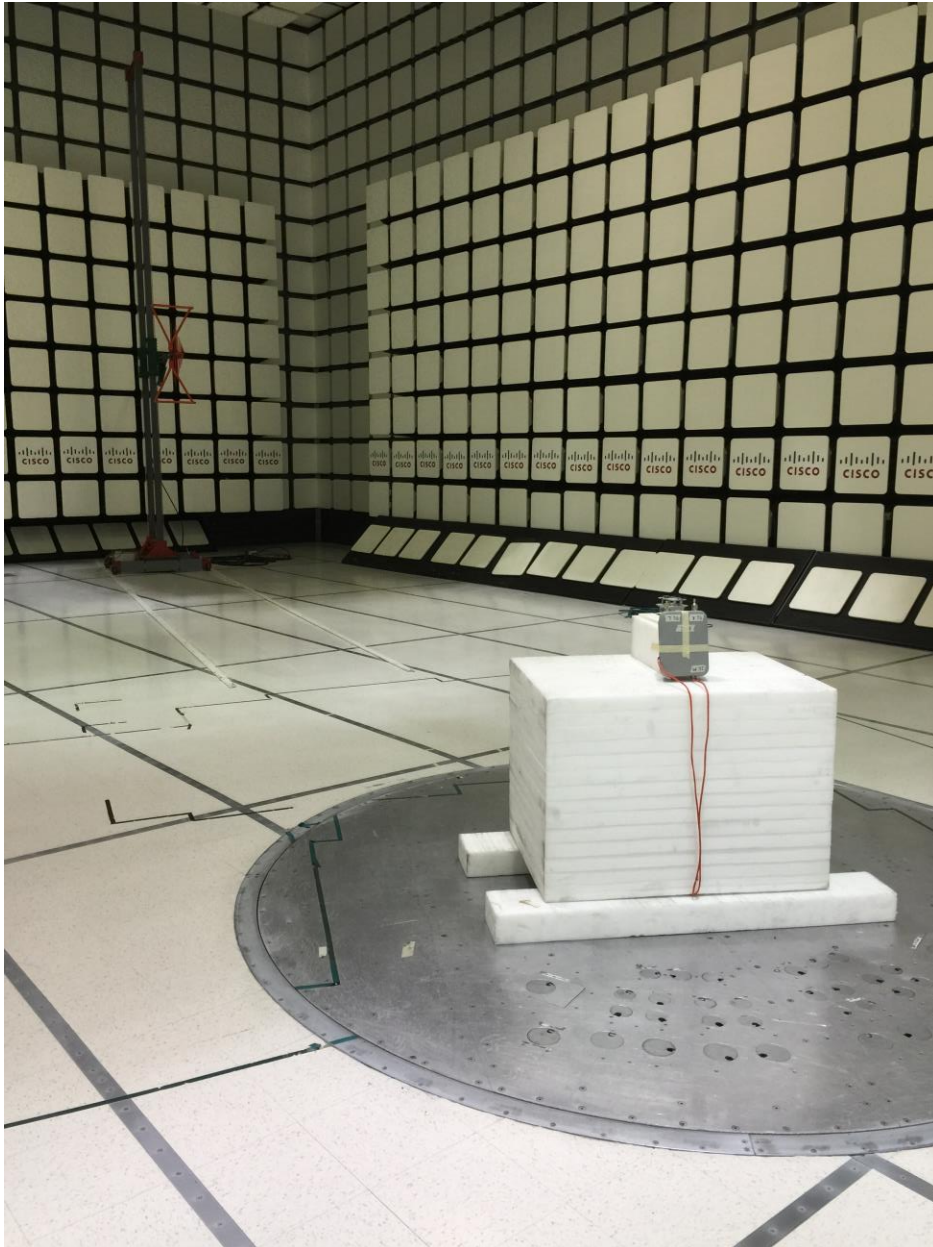
**Photographs of setup****Title: AIR-CAP1532E-B-K9 Conducted Test Setup**

This is a dual band 2.4GHz / 5GHz device. All ports in this test set up photo are connected as all testing is automated. Section 2.6 of this test report given an overview of the different Tx antenna combinations used by this device.

**AIR-CAP1532E-B-K9 AC Mains Conducted Emissions setup**

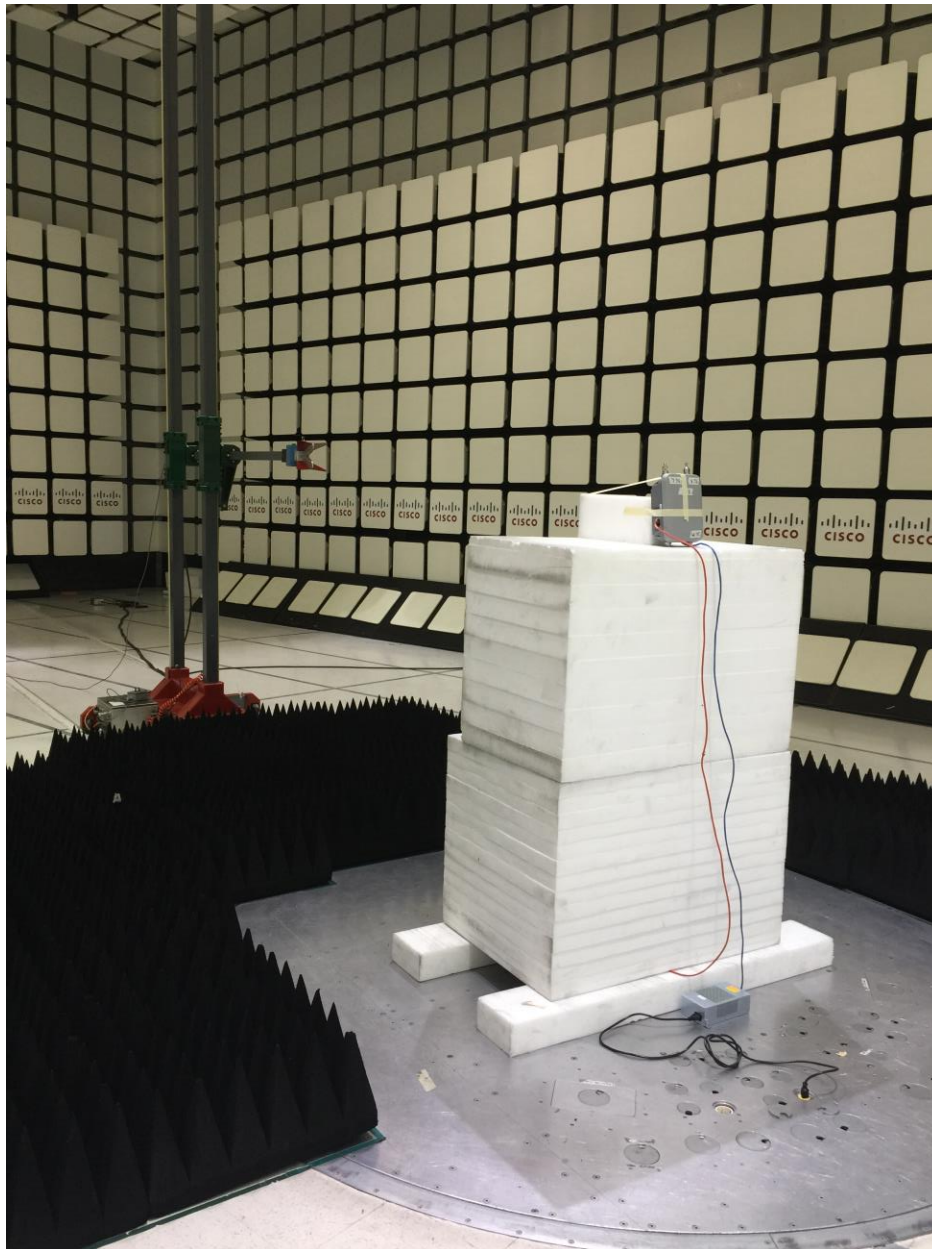


**AIR-CAP1532E-B-K9 Radiated Emissions setup 30MHz – 1GHz**





**AIR-CAP1532E-B-K9** Radiated Emissions setup above 1GHz





## Appendix C: List of Test Equipment Used to perform the test

Equip#	Manufacturer/ Model	Description	Last Cal	Next Due	Test Item
<b>Test Equipment used for Radiated Emissions</b>					
CIS008447	Cisco / NSA 10m Chamber	NSA 10m Chamber	14-Oct-14	14-Oct-15	B.2
CIS030652	Sunol Sciences / JB1	Combination Antenna, 30MHz-2GHz	5-Nov-14	5-Nov-15	B.2
CIS033988	Agilent /E4446A	PSA Spectrum Analyzer	9-Dec-14	9-Dec-15	B.1
CIS041929	Newport /iBTHP-5-DB9	5 inch Temp/RH/Press Sensor w/20ft cable	20-Dec-14	20-Dec-15	B.1, B.2
CIS024998	MICRO-COAX / UFB197C-1-0240-504504	Coaxial RF Cable, 26.5 GHz	11-Mar-15	11-Mar-16	B.1, B.2
CIS035284	ETS Lindgren / 3117	Double Ridged Horn Antenna	16-Sep-14	16-Sep-15	B.1
CIS049516	Keysight / N9030A	PXA Spectrum Analyzer	12-Nov-14	12-Nov-15	B.1, B.2
CIS043124	Cisco /Above 1GHz Site Cal	Above 1GHz Cspr Site Verification	15-Jan-15	15-Jan-16	B.1
CIS008166	HP / 8491B Opt 010	10dB Attenuator	2-Feb-15	2-Feb-16	B.1
CIS020975	Micro-Coax / UFB311A-0-1344-520520	RF Coaxial Cable, to 18GHz, 134.4 in	18-Feb-15	18-Feb-16	B.1, B.2
CIS030559	Micro-Coax / UFB311A-1-0950-504504	RF Coaxial Cable, to 18GHz, 95 in	20-Feb-15	20-Feb-16	B.1, B.2
CIS003003	HP / 83731B	Synthesized Signal Generator	13-Mar-15	13-Mar-16	B.1
CIS005691	Miteq / NSP1800-25-S1	Broadband Preamplifier (1-18GHz)	25-Jun-15	25-Jun-16	B.1
CIS041979	Cisco / 1840	18-40GHz EMI Test Head/Verification Fixture	13-Jul-15	13-Jul-16	B.1
CIS047410	Agilent / N9038A	EMI Receiver	17-Feb-15	17-Feb-16	B.1, B.2
CIS051642	Huber+Suhner / Sucoflex 106PA	RF N Type Cable 8.5m	10-Feb-15	10-Feb-16	B.1, B.2
<b>Test Equipment used for AC Mains Conducted Emissions</b>					
CIS008192	Fischer Custom Communications FCC-450B-2.4-N	Instrumentation Limiter	28-JUL-15	28-JUL-16	B.3
CIS008197	TTE /H613-150K-50-21378	Hi Pass Filter - 150KHz cutoff	16-APR-15	16-APR-16	B.3
CIS008471	Bird / 5-T-MB	50 Ohm, 5W Terminator, Type BNC	18-SEP-14	18-SEP-15	B.3
CIS019337	Fischer Custom Communications FCC-LISN-50/250-50-2-01	LISN	08-SEP-14	08-SEP-15	B.3
CIS019136	Fischer Custom Communications FCC-801-M3-32A	Power Line Coupling/Decoupling Network	12-NOV-14	12-NOV-15	B.3
CIS023874	Fischer Custom Communications FCC-LISN-PA-NEMA-5-15	Power Adaptor, Polarized 120VAC	08-SEP-14	08-SEP-15	B.3
CIS035235	Lufkin / HY1035CME	5 Meter Tape Measure	Cal Not Required	N/A	B.3
CIS036031	York / CNE V	Comparison Noise Emitter	Cal Not Required	N/A	B.3
CIS039110	Coleman /RG-223	25 ft BNC cable	24-NOV-14	24-NOV-15	B.3
CIS045050	ROHDE & SCHWARZ/ ESCI	EMI Test Receiver	31-Oct-2014	31 Oct 2015	B.3
<b>RF Conducted at output antenna port</b>					
CIS050721	N9030A/ Keysight	PXA Signal Analyzer	13-Apr-16	13-Apr-16	A1 thru A4



CIS054609	ZFSC-2-10G /Mini-Circuits	Splitter	01-June-15	01-June-16	A1 thru A4
CIS054608	D3C2060 / Ditom	Splitter	01-June-15	01-June-16	A1 thru A4
CIS054607	PS4-09-452/4S/ Pulsar	Splitter	01-June-15	01-June-16	A1 thru A4
CIS054606	BRC50705-02/ Micro-Tronics	Notch Filter	01-June-15	01-June-16	A1 thru A4
CIS054605	BRC50703-02 / Micro-Tronics	Notch Filter	01-June-15	01-June-16	A1 thru A4
CIS054604	BRC50704-02/ Micro-Tronics	Notch Filter	01-June-15	01-June-16	A1 thru A4
CIS054603	BRM50702-02/ Micro-Tronics	Notch Filter	01-June-15	01-June-16	A1 thru A4
CIS054637	BWS30-W2/ Aeroflex	SMA 30dB Attenuator	02-June-15	02-June-16	A1 thru A4
CIS054636	BWS20-W2/ Aeroflex	20dB SMA Attenuator	02-June-15	02-June-16	A1 thru A4
CIS054625	RA08-S1S1-24/Megaphase	SMA cable 24"	02-June-15	02-June-16	A1 thru A4
CIS054624	RA08-S1S1-18/Megaphase	SMA cable 18"	02-June-15	02-June-16	A1 thru A4
CIS054623	RA08-S1S1-18/Megaphase	SMA cable 18"	02-June-15	02-June-16	A1 thru A4
CIS054622	RA08-S1S1-18/Megaphase	SMA cable 18"	02-June-15	02-June-16	A1 thru A4
CIS054621	RA08-S1S1-18/Megaphase	SMA cable 18"	02-June-15	02-June-16	A1 thru A4



## Appendix E: Abbreviation Key and Definitions

The following table defines abbreviations used within this test report.

Abbreviation	Description	Abbreviation	Description
EMC	Electro Magnetic Compatibility	°F	Degrees Fahrenheit
EMI	Electro Magnetic Interference	°C	Degrees Celsius
EUT	Equipment Under Test	Temp	Temperature
ITE	Information Technology Equipment	S/N	Serial Number
TAP	Test Assessment Schedule	Qty	Quantity
ESD	Electro Static Discharge	emf	Electromotive force
EFT	Electric Fast Transient	RMS	Root mean square
EDCS	Engineering Document Control System	Qp	Quasi Peak
Config	Configuration	Av	Average
CIS#	Cisco Number (unique identification number for Cisco test equipment)	Pk	Peak
Cal	Calibration	kHz	Kilohertz ( $1 \times 10^3$ )
EN	European Norm	MHz	MegaHertz ( $1 \times 10^6$ )
IEC	International Electro technical Commission	GHz	Gigahertz ( $1 \times 10^9$ )
CISPR	International Special Committee on Radio Interference	H	Horizontal
CDN	Coupling/Decoupling Network	V	Vertical
LISN	Line Impedance Stabilization Network	dB	decibel
PE	Protective Earth	V	Volt
GND	Ground	kV	Kilovolt ( $1 \times 10^3$ )
L1	Line 1	$\mu$ V	Microvolt ( $1 \times 10^{-6}$ )
L2	Line2	A	Amp
L3	Line 3	$\mu$ A	Micro Amp ( $1 \times 10^{-6}$ )
DC	Direct Current	mS	Milli Second ( $1 \times 10^{-3}$ )
RAW	Uncorrected measurement value, as indicated by the measuring device	$\mu$ S	Micro Second ( $1 \times 10^{-6}$ )
RF	Radio Frequency	$\mu$ S	Micro Second ( $1 \times 10^{-6}$ )
SLCE	Signal Line Conducted Emissions	m	Meter
Meas dist	Measurement distance	Spec dist	Specification distance
N/A or NA	Not Applicable	SL	Signal Line (or Telecom Line)
P	Power Line	L	Live Line
N	Neutral Line	R	Return
S	Supply	AC	Alternating Current





**End**