

**CFR 47 FCC PART 15 SUBPART C  
ISED RSS-210 ISSUE 11**

**CERTIFICATION TEST REPORT**

*For*

**433 Remote Control**

**MODEL NUMBER: CF2001RMN**

**FCC ID: 2AB2Q-CF2001RMN  
IC: 10256A-CF2001RMN**

**REPORT NUMBER: 4791720895-1-RF-1**

**ISSUE DATE: May 16, 2025**

*Prepared for*

**LEEDARSON LIGHTING CO., LTD.**

**Xingtai Industrial Park, Economic Development Zone of Changtai  
County, Zhangzhou city, Fujian Province, China**

*Prepared by*

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch**

**Room 101, Building 2, No.4, Information Road, Songshan Lake, Dongguan,  
Guangdong, China**

**Tel: +86 769 22038881**

**Fax: +86 769 33244054**

**Website: [www.ul.com](http://www.ul.com)**

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	May 16, 2025	Initial Issue	

Summary of Test Results			
Clause	Test Items	FCC Rules	Test Results
1	Transmitter Timeout	CFR 47 FCC §15.231 (a) (1) ISED RSS-210 Annex A.1.2	Pass
2	20 dB Bandwidth and 99 % Occupied Bandwidth	CFR 47 FCC §15.231 (c) ISED RSS-210 Annex A.1.4	Pass
3	Radiated Emission	CFR 47 FCC §15.231 (b) CFR 47 FCC §15.205 and §15.209 RSS-210 Annex A.1.3 RSS-GEN Clause 8.9 RSS-GEN Clause 8.10	Pass
4	AC Power Line Conducted Emission	ANSI C63.10-2013, Clause 6.2	NA
5	Antenna Requirement	CFR 47 FCC §15.203 ISED RSS-Gen Clause 6.3	Pass
<p>Note 1: This test report is only published to and used by the applicant, and it is not for evidence purpose in China.</p> <p>Note 2: The measurement result for the sample received is &lt;Pass&gt; according to &lt; CFR 47 FCC PART 15 SUBPART C and ISED RSS-210 ISSUE 11&gt; when &lt;Accuracy Method&gt; decision rule is applied.</p> <p>N/A: In this whole report not applicable.</p>			

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>5</b>
<b>2. TEST METHODOLOGY .....</b>	<b>6</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>6</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>7</b>
4.1. MEASURING INSTRUMENT CALIBRATION .....	7
4.2. MEASUREMENT UNCERTAINTY.....	7
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>8</b>
5.1. DESCRIPTION OF EUT.....	8
5.2. MAXIMUM FIELD STRENGTH.....	8
5.3. DESCRIPTION OF AVAILABLE ANTENNAS.....	8
5.4. TEST ENVIRONMENT.....	9
5.5. DESCRIPTION OF TEST SETUP .....	10
5.6. MEASURING INSTRUMENT AND SOFTWARE USED .....	11
<b>6. ANTENNA PORT TEST RESULTS.....</b>	<b>12</b>
6.1. ON TIME AND DUTY CYCLE.....	12
6.2. TRANSMITTER TIMEOUT .....	14
6.3. 20 dB BANDWIDTH AND 99 % OCCUPIED BANDWIDTH .....	17
6.4. RADIATED TEST RESULTS.....	20
6.4.1. FIELD STRENGTH OF INTENTIONAL EMISSIONS .....	27
6.4.2. SPURIOUS EMISSIONS BELOW 1 GHz AND ABOVE 30 MHz .....	29
6.4.3. SPURIOUS EMISSIONS ABOVE 1 GHz .....	31
6.4.4. SPURIOUS EMISSIONS BELOW 30 MHz.....	33
<b>7. ANTENNA REQUIREMENTS.....</b>	<b>36</b>

## 1. ATTESTATION OF TEST RESULTS

### Applicant Information

Company Name: LEEDARSON LIGHTING CO., LTD.  
Address: Xingtai Industrial Park, Economic Development Zone of Changtai County, Zhangzhou city, Fujian Province, China

### Manufacturer Information

Company Name: LEEDARSON LIGHTING CO., LTD.  
Address: Xingtai Industrial Park, Economic Development Zone of Changtai County, Zhangzhou city, Fujian Province, China

### EUT Information

EUT Name: 433 Remote Control  
Model: CF2001RMN  
Sample Received Date: March 21, 2025  
Sample Status: Normal  
Sample ID: 8269520  
Date of Tested: March 21, 2025~ May 16, 2025


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
ISED RSS-210 Issue 11	PASS
ISED RSS-GEN Issue 5	PASS
CFR 47 FCC PART 15 SUBPART C	PASS

Prepared By:



Johnson Liu  
Laboratory Engineer

Checked By:



Kebo Zhang  
Senior Project Engineer

Approved By:



Stephen Guo  
Operations Manager

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB 414788 D01 Radiated Test Site v01r01, FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2013, RSS-210 Issue 11 and RSS-GEN Issue 5.

## 3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p><b>A2LA (Certificate No.: 4102.01)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p><b>FCC (FCC Designation No.: CN1187)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules.</p> <p><b>ISED (Company No.: 21320)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046.</p>
---------------------------	--

**Note 1:**

All tests measurement facilities use to collect the measurement data are located at Room 101, Building 2, No.4, Information Road, Songshan Lake, Dongguan, Guangdong, China.

**Note 2:**

The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

**Note 3:**

For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognize national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiation Emission test (include Fundamental emission) (9 kHz-30 MHz)	2.2 dB
Radiation Emission test (include Fundamental emission) (30 MHz-1 GHz)	4.00 dB
Radiation Emission test (1 GHz to 26GHz) (include Fundamental emission)	5.78 dB (1 GHz-18 GHz)
	5.23 dB (18 GHz-26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

EUT Name:	433 Remote Control
Model:	CF2001RMN
Modulation	ASK/OOK
Power Supply	AAA 1.5V*2
Center Frequency	433.92 MHz

### 5.2. MAXIMUM FIELD STRENGTH

Frequency (MHz)	Maximum Peak Field Strength (dB $\mu$ V/m)
433.92	75.04

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency (MHz)	Antenna Type	Antenna Gain (dBi)
433.92	PCB antenna	4

Note: The value of the antenna gain was declared by customer.



#### 5.4. TEST ENVIRONMENT

Environment Parameter	Selected Values During Tests	
Relative Humidity	55 ~ 70 %	
Atmospheric Pressure:	101 kPa	
Temperature	TN	23 ~ 28 °C
Voltage:	VL	/
	VN	AAA 1.5V*2
	VH	/

Note: VL= Lower Extreme Test Voltage

VN= Nominal Voltage

VH= Upper Extreme Test Voltage

TN= Normal Temperature

## 5.5. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	P/N
/	/	/	/	/

### I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
/	/	/	/	/	/


### ACCESSORY

Item	Accessory	Brand Name	Model Name	Description
/	/	/	/	/

### SETUP DIAGRAM FOR TEST

The test sample can be into a transmission mode through the power on.  
A fully charged battery was used during the testing process.

### Setup Diagram For Tests



Note: We have pre-test all modes and buttons, only the worst data recorded in the report.

## 5.6. MEASURING INSTRUMENT AND SOFTWARE USED

Radiated Emissions						
Equipment		Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver		KESIGHT	N9038A	MY56400036	Sep.28, 2024	Sep.27, 2025
Hybrid Log Periodic Antenna		TDK	HLP-3003C	130960	June 28, 2024	June.27 2027
Preamplifier		HP	8447D	2944A09099	Sep.28, 2024	Sep.27, 2025
EMI Measurement Receiver		R&S	ESR26	101377	Sep.28, 2024	Sep.27, 2025
Horn Antenna		ETS-Lindgren	3117	00213191	Feb.7,2023	Feb.6,2026
Preamplifier		TDK	PA-02-0118	TRS-305-00067	Sep.28, 2024	Sep.27, 2025
Horn Antenna		Schwarzbeck	BBHA9170	697	Jun 30, 2024	Jun 29, 2027
Preamplifier		TDK	PA-02-2	TRS-307-00003	Sep.28, 2024	Sep.27, 2025
Loop antenna		Schwarzbeck	1519B	00008	Dec.09, 2024	Dec.08, 2027
Software						
Description			Manufacturer	Name	Version	
Test Software for Radiated Emissions			Farad	EZ-EMC	Ver. UL-3A1	
Other instruments						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	EXA Singal Analyzer	Keysight	N9010A	MY55150514	Sep.28, 2024	Sep.27, 2025

## 6. ANTENNA PORT TEST RESULTS

### 6.1. ON TIME AND DUTY CYCLE


#### LIMITS

None; for reporting purposes only

#### PROCEDURE

FCC Reference:	CFR 47 §15.35(c)
Test Method Used:	ANSI C63.10 Section 7.5

#### TEST SETUP

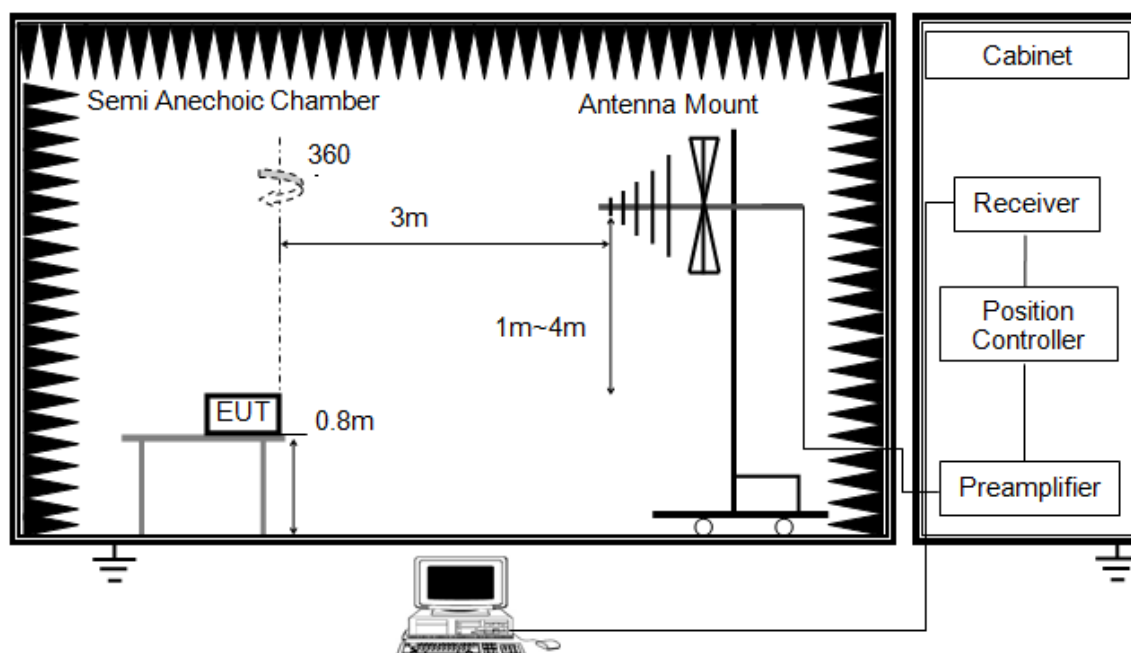

- Set RBW of spectrum analyzer to 3 MHz and VBW to 3 MHz.
- Use a video trigger with the trigger level set to enable triggering only on full pulses.
- Sweep Time is at least a 100 ms.
- Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- Measure the maximum time duration of one single pulse.

#### TEST ENVIRONMENT

Temperature	24.3 °C	Relative Humidity	61 %
Atmosphere Pressure	101 kPa	Test Voltage	AAA 1.5V*2

## RESULTS

Ton1 times (ms)	Numbers of appear	Ton2 times (ms)	Numbers of appear	Total on times (ms)	Period (ms)	Duty Cycle (Linear)	Duty Cycle Correction Factor
0.912	28	0.284	8	27.808	75.87	0.3665	-8.72

Note: Duty Cycle Correction Factor=20log(x).

Where: x is Duty Cycle

Total on times = Ton1\* Numbers of appear + Ton2 \* Numbers of appear  
Period



Ton 1/ Ton 2




## 6.2. TRANSMITTER TIMEOUT

### TEST PROCEDURE

Rule Reference:	CFR 47 FCC §15.231(a) (1)
Test Method Used:	The EUT transmitter was activated and monitored using a spectrum analyser for a period of 10 seconds.

### TEST SETUP

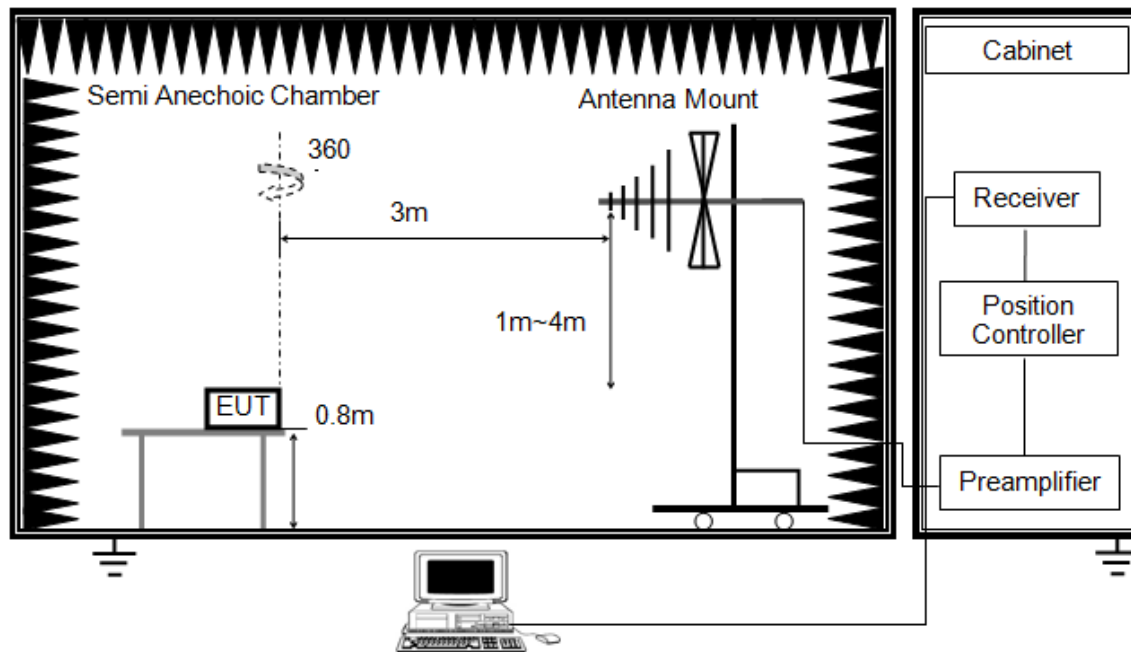

For CFR 47 Part 15.231(a):

- a. Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz.
- b. Use a video trigger with the trigger level set to enable triggering only on full pulses.
- c. Set Sweep Time to 10 s.
- d. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- e. Measure the maximum time duration of one single pulse.

### **LIMITS**


CFR 47 §15.231(a):

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

### **TEST ENVIRONMENT**

Temperature	24.3 °C	Relative Humidity	61 %
Atmosphere Pressure	101 kPa	Test Voltage	AAA 1.5V*2

Manually transmitting mode		
Deactivation Time (seconds)	Limit (seconds)	Result
0.37	5.000	PASS

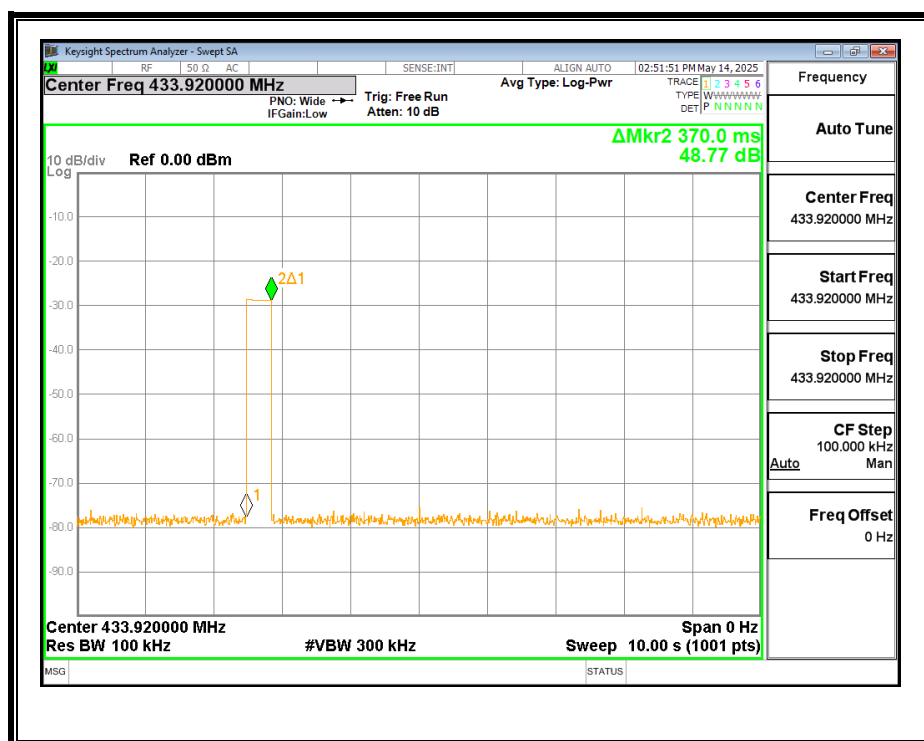



### 6.3. 20 dB BANDWIDTH AND 99 % OCCUPIED BANDWIDTH

#### LIMITS

CFR 47 FCC §15.231 (c).


The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5 % of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

So, the limit calculated as:  $0.0025 * 433.92 \text{ MHz} = 1.0848 \text{ MHz}$

#### TEST PROCEDURE

FCC Reference:	CFR 47 Part 15.231(c)
Test Method Used:	ANSI C63.10 Section 6.9.2

## TEST SETUP

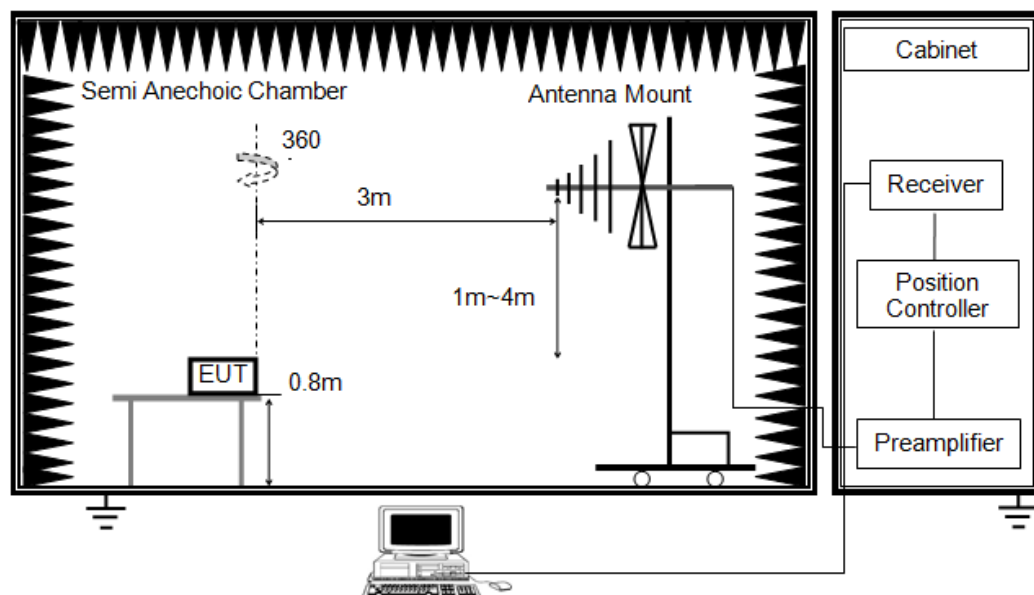

1. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
2. The EUT was placed on a turntable with 0.8 meter above ground.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower
4. Set the spectrum analyzer in the following setting as:  
RBW is set to 1kHz and VBW is set 3kHz.


Note: Because the measured signal is CW or CW-like adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW and the result will be approximately twice the RBW.

## TEST ENVIRONMENT

Temperature	24.3 °C	Relative Humidity	61 %
Atmosphere Pressure	101 kPa	Test Voltage	AAA 1.5V*2

## RESULTS

20 dB Bandwidth (kHz)	99 % Occupied Bandwidth (kHz)	Limit (MHz)	Result
4.916	17.309	1.0848	Pass

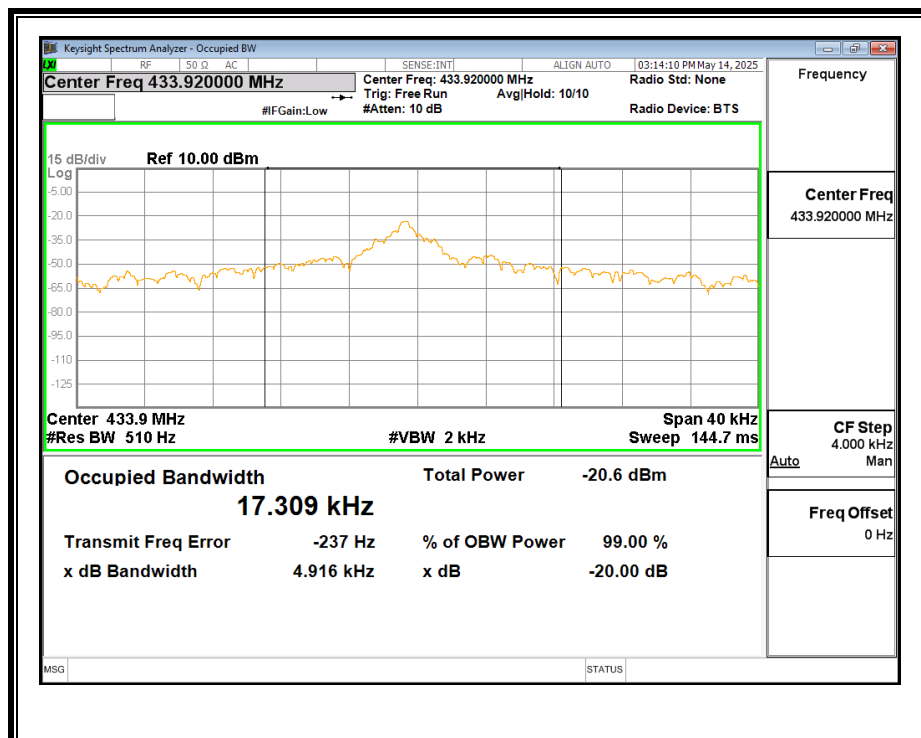

## 6.4. RADIATED TEST RESULTS

### LIMITS

CFR 47 FCC §15.231 (b)

CFR 47 FCC §15.205 and §15.209

1. In addition to the provisions of §15.205, the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emissions (microvolts/meter)
40.66-40.70	2,250	225
70-130	1,250	125
130-174	<sup>1</sup> 1,250 to 3,750	<sup>1</sup> 125 to 375
174-260	3,750	375
260-470	<sup>1</sup> 3,750 to 12,500	<sup>1</sup> 375 to 1,250
Above 470	12,500	1,250

Note:

1. To obtain the average limit at the test frequency the values given in the table of FCC part 15.231(b) have to be linear interpolated and then converted to dBμV/m. The limit at 260 MHz is 3750 μV/m and at 470 MHz it is 12500 μV/m. Limit at 433.92 MHz is calculated as shown in ANSI C63.10 Section 7.6.2:

Limit [μV/m] = Limlower + ΔF [(Limupper – Limlower) / (fupper – flower)]  
where ΔF = fc – flower = 433.92 – 260 = 173.92

Limit = 3750 + 173.92 \* [(12500 – 3750) / (470 -260)]  
= 3750 + 173.92 \* [8750 / 210]  
= 10996.7 μV/m

dBμV/m = 20 \* log (μV/m)  
= 20 \* log (10996.7)

Average Limit at 433.92 MHz = 80.8 dBμV/m

2. If the average limit is specified for the EUT, the peak limit is 20 dB above the average limit as specified in FCC 15.35 (b)

2. Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

\*\*Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.

3. Radiation Disturbance Test Limit for FCC (Class B) (9 kHz-1 GHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Note: (1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements). Note: (2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.

Restricted bands of operation


MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

Note: <sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup>Above 38.6c

## TEST SETUP AND PROCEDURE

Below 30 MHz

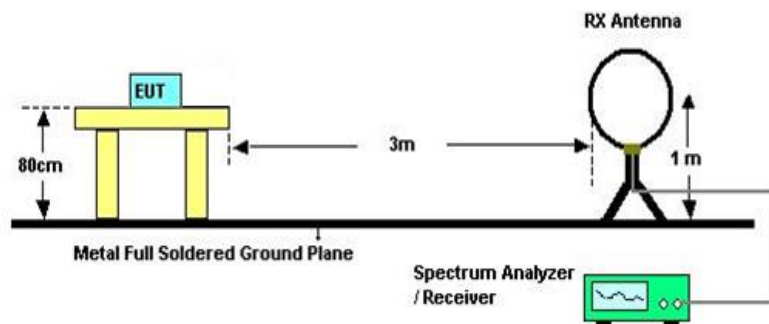


The setting of the spectrum analyser

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of  $377\Omega$ ; For example, the measurement frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to  $Y-51.5 = Z$  dBuA/m, which has the same

Below 1 GHz

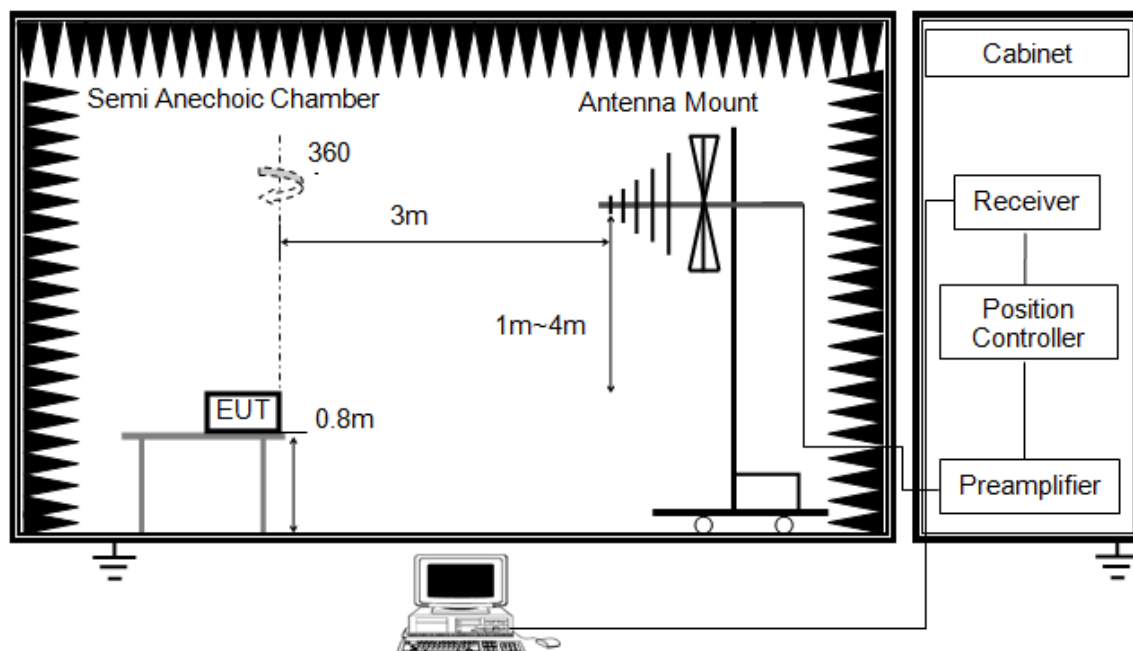


The setting of the spectrum analyser

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
7. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.



Above 1 GHz

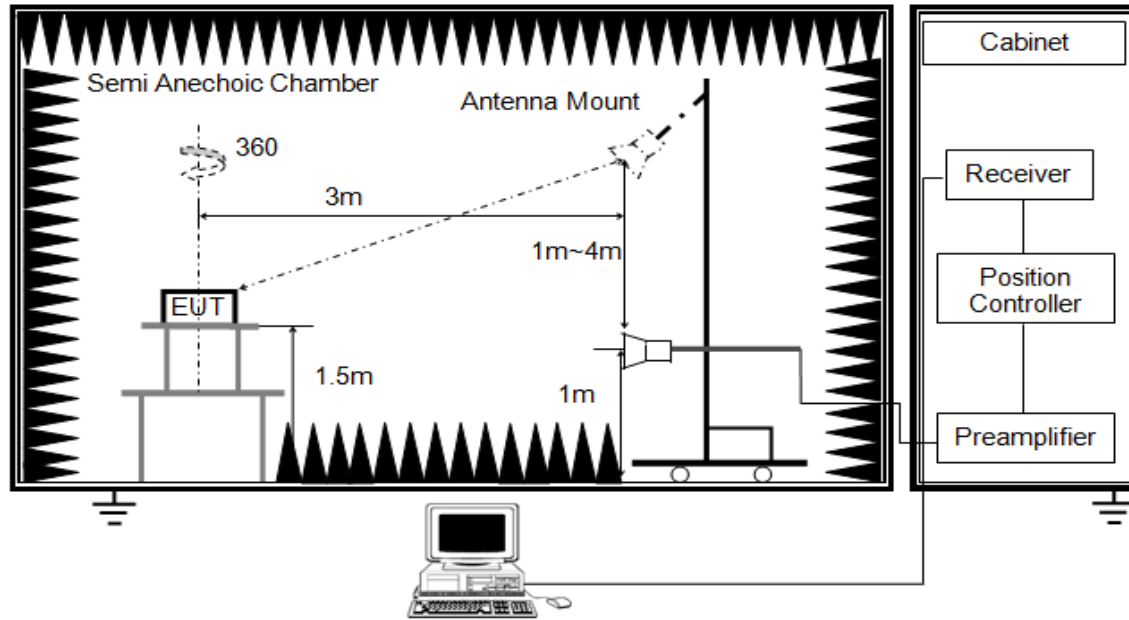


The setting of the spectrum analyser

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements. Where necessary, average emission are determined by applying the Duty Cycle Correction Factor to the peak measurements. For the Duty Cycle and Correction Factor please refer to clause 6.1. ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

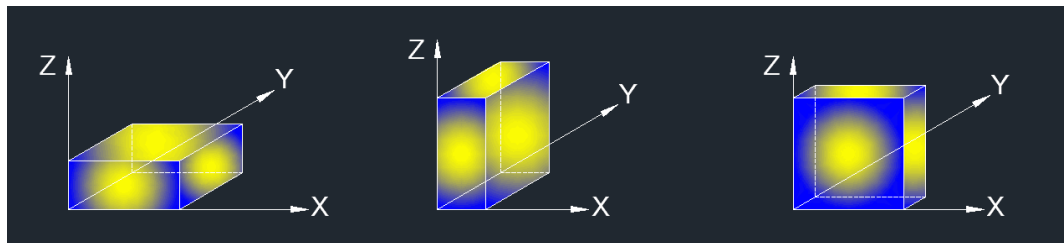

Note: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.


### **TEST ENVIRONMENT**

Radiated Emissions - Below 1 GHz		Radiated Emissions - Above 1 GHz	
Temperature:	22 °C	Temperature:	24.1 °C
Humidity:	58 %	Humidity:	57 %
Atmosphere Pressure	101 kPa	Atmosphere Pressure	101 kPa
Test Voltage	AAA 1.5V*2	Test Voltage	AAA 1.5V*2

### **RESULTS**

## 6.4.1. FIELD STRENGTH OF INTENTIONAL EMISSIONS

### FIELD STRENGTH OF INTENTIONAL EMISSIONS (HORIZONTAL)

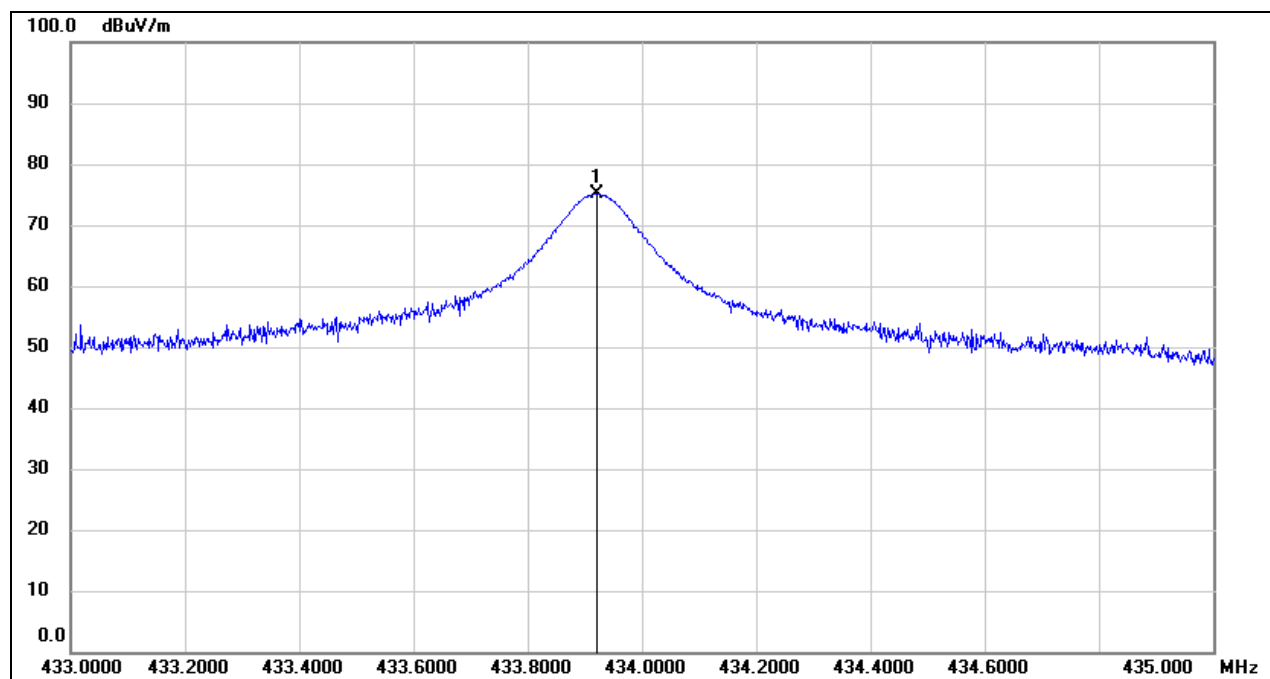


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	433.9200	83.65	-8.61	75.04	100.80	-25.76	peak
/	/	/	/	66.32	80.80	-14.48	AVG

Note: 1. Result Level = Read Level + Correct Factor.

2. Peak: Peak detector.

3. Average Result = Peak Result + Duty Correction Factor.

### FIELD STRENGTH OF INTENTIONAL EMISSIONS (VERTICAL)

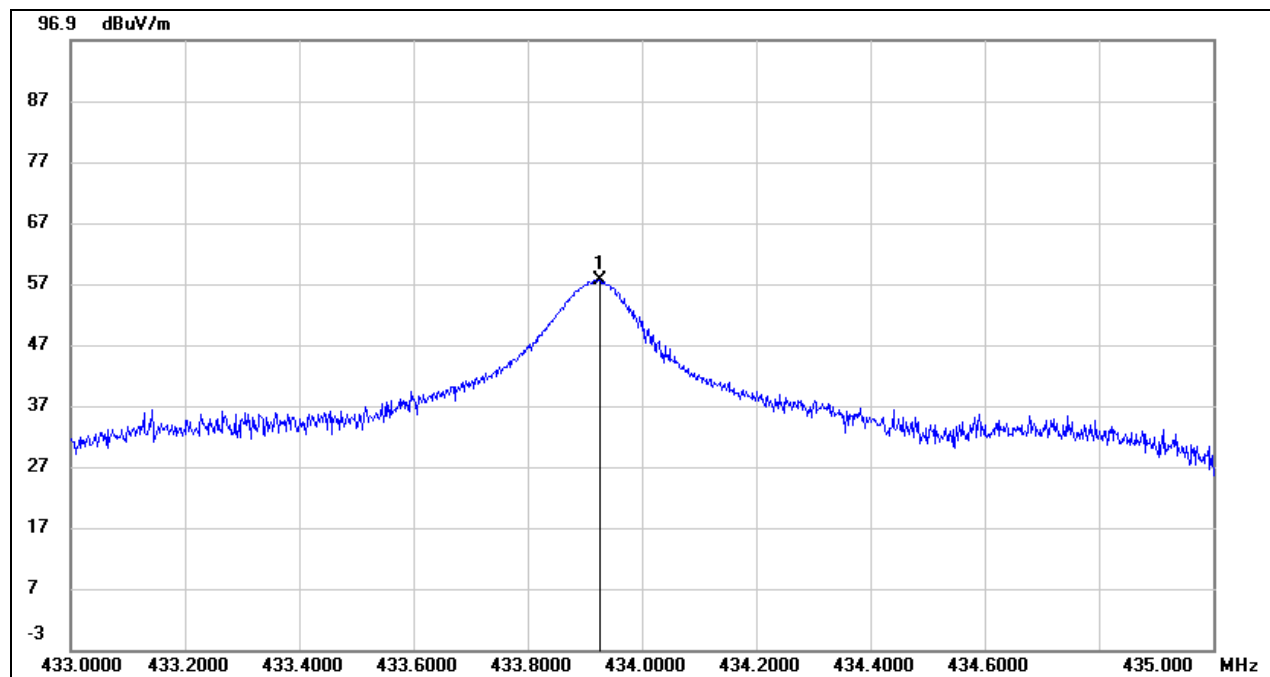

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	433.9240	66.12	-8.61	57.51	100.80	-43.92	peak
/	/	/	/	48.69	80.80	-32.11	AVG


Note: 1. Result Level = Read Level + Correct Factor.

2. Peak: Peak detector.

3. Average Result = Peak Result + Duty Correction Factor.

## 6.4.2. SPURIOUS EMISSIONS BELOW 1 GHz AND ABOVE 30 MHz

### SPURIOUS EMISSIONS (HORIZONTAL)

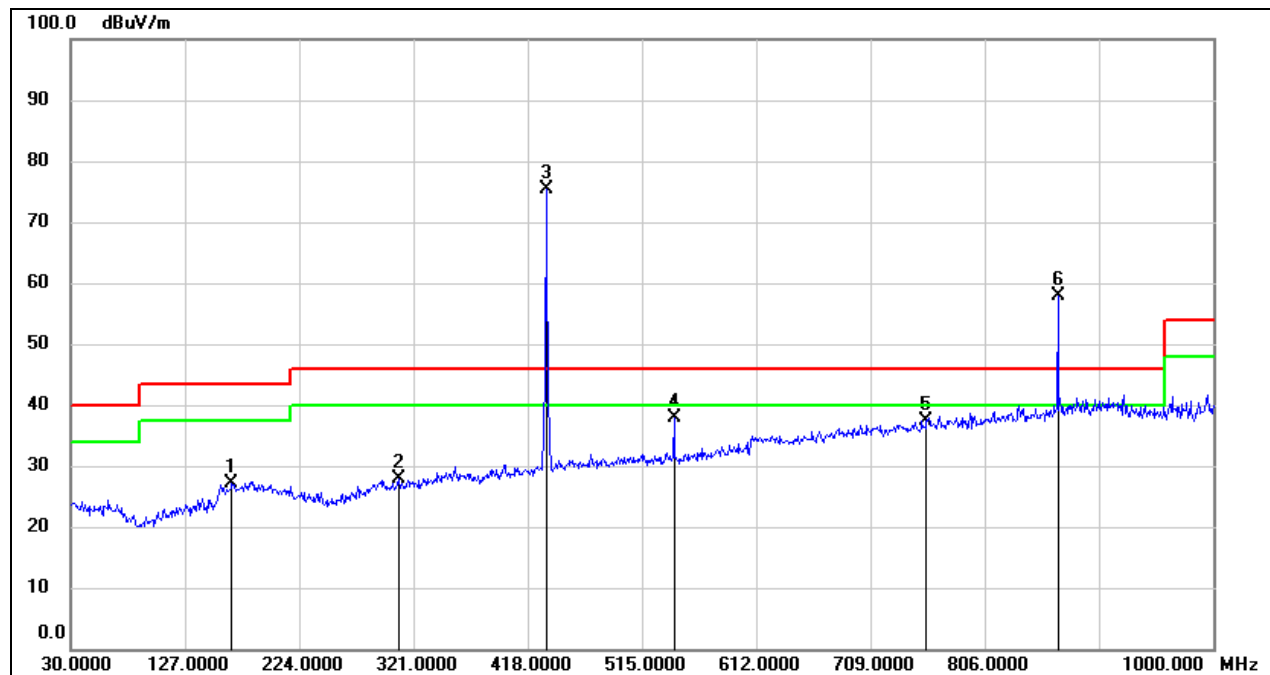

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	166.7700	39.37	-12.32	27.05	43.50	-16.45	QP
2	308.3900	38.97	-11.18	27.79	46.00	-18.21	QP
3	433.9200	84.10	-8.63	75.47	/	/	Fundamental
4	542.1599	45.00	-7.13	37.87	46.00	-8.13	QP
5	756.5300	40.79	-3.42	37.37	46.00	-8.63	QP
6	868.0800	58.98	-0.99	57.99	80.80	-22.81	peak

Note: 1. Result Level = Read Level + Correct Factor.


2. Peak: Peak detector.

3. Average Result = Peak Result + Duty Correction Factor.

4. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

5. Mark 4 is the fundamental frequency and mark 6 is the 2<sup>nd</sup> harmonics.

### FIELD STRENGTH HARMONICS AND SPURIOUS EMISSIONS (VERTICAL)

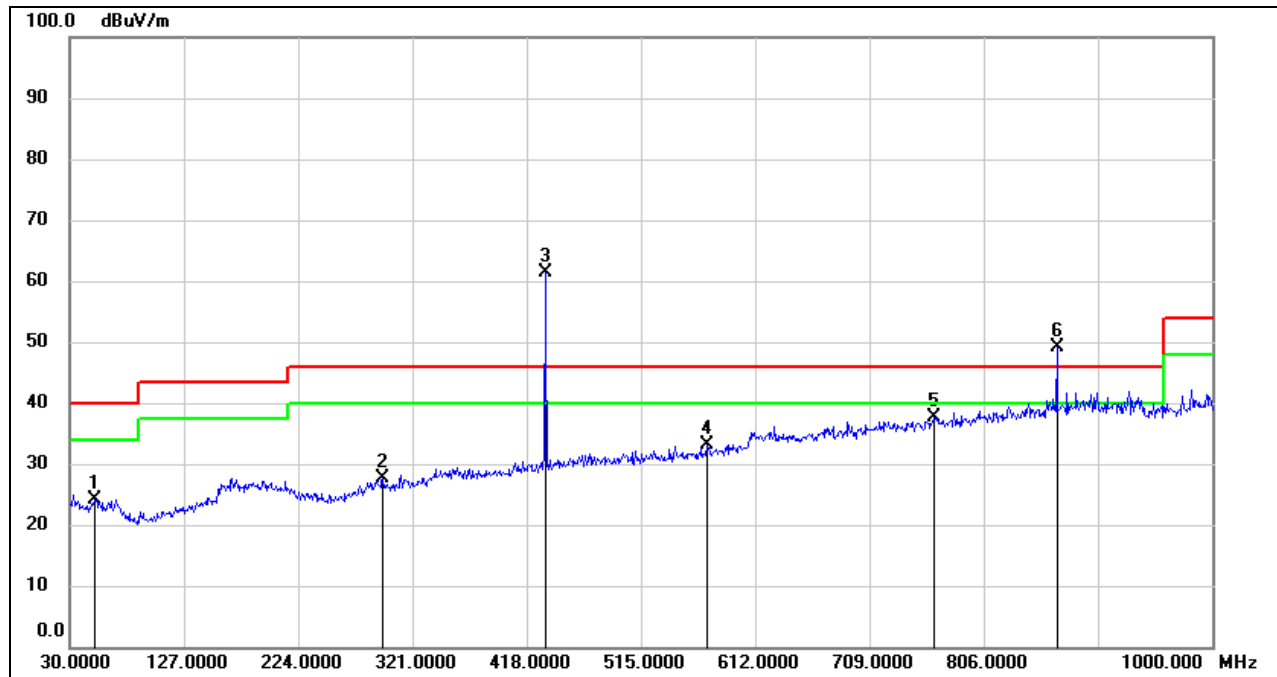

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	51.3400	39.13	-15.07	24.06	40.00	-15.94	QP
2	295.7800	39.50	-11.77	27.73	46.00	-18.27	QP
3	433.9200	69.93	-8.63	61.30	/	/	Fundamental
4	571.2600	39.54	-6.48	33.06	46.00	-12.94	QP
5	763.3200	40.92	-3.29	37.63	46.00	-8.37	QP
6	868.0800	50.18	-0.99	49.19	80.80	-31.61	peak

Note: 1. Result Level = Read Level + Correct Factor.

2. Peak: Peak detector.


3. Average Result = Peak Result + Duty Correction Factor.

4. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

5. Mark 5 is the fundamental frequency.

### 6.4.3. SPURIOUS EMISSIONS ABOVE 1 GHz

#### HARMONICS AND SPURIOUS EMISSIONS (HORIZONTAL)

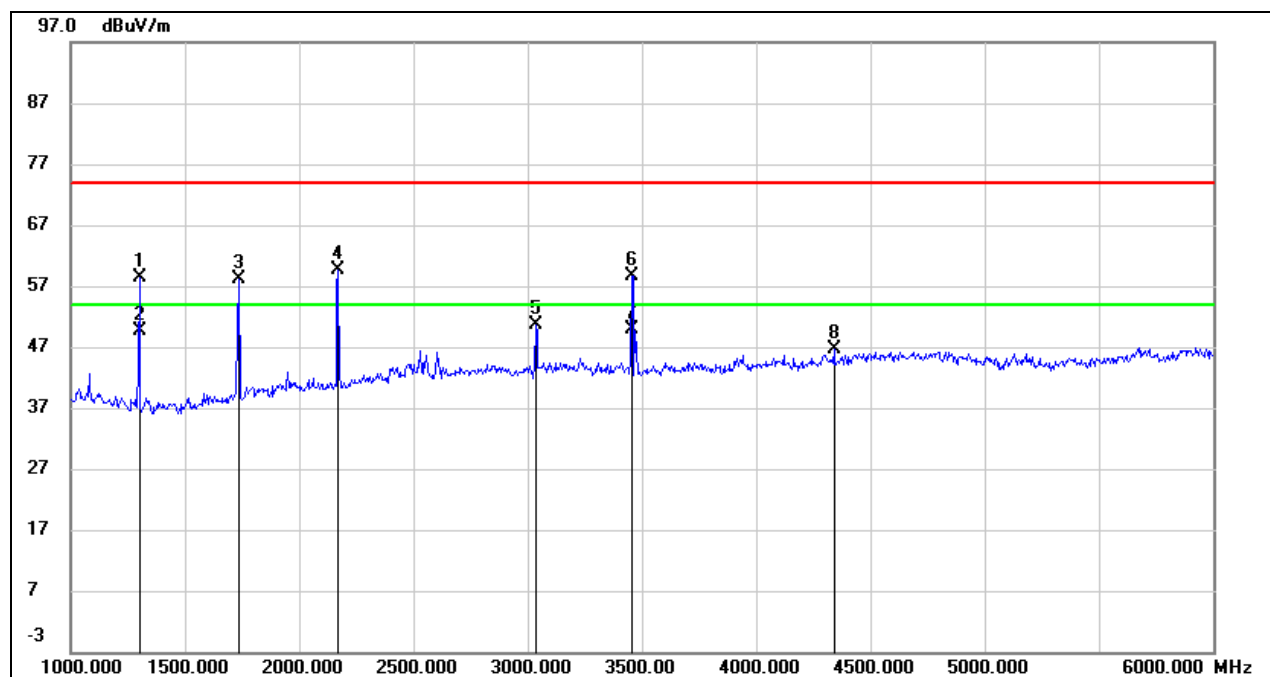

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1300.000	67.71	-9.24	58.47	74.00	-15.53	peak
2	1300.000	58.99	-9.24	49.75	54.00	-4.25	AVG
3	1735.000	65.74	-7.56	58.18	80.80	-22.62	peak
4	2170.000	64.19	-4.59	59.60	80.80	-21.20	peak
5	3035.000	51.37	-0.84	50.53	74.00	-23.47	peak
6	3455.000	59.76	-1.04	58.72	74.00	-15.28	peak
7	3455.000	51.04	-1.04	50.00	54.00	-4.00	AVG
8	4340.000	45.31	1.42	46.73	74.00	-27.27	peak

Note: 1. Result Level = Read Level + Correct Factor.


2. Peak: Peak detector.

3. Average Result = Peak Result + Duty Correction Factor.

4. The average limit for harmonics out of the restrict bands are 60.8 dBuV/m, the average limit in the restrict bands is 54 dBuV/m.

5. If peak result complies with average limit, the average result is deemed to comply with average limit.

### HARMONICS AND SPURIOUS EMISSIONS (VERTICAL)

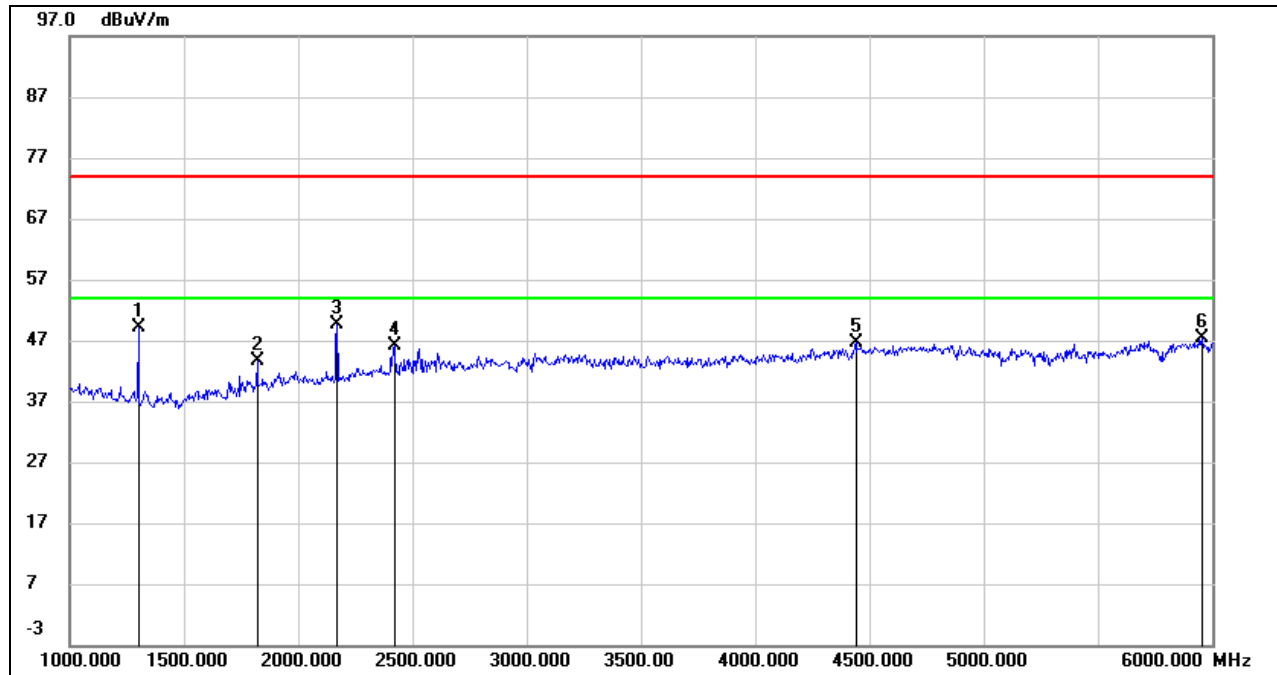

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1300.000	58.48	-9.24	49.24	74.00	-24.76	peak
2	1820.000	50.52	-6.79	43.73	74.00	-30.27	peak
3	2170.000	54.25	-4.59	49.66	74.00	-24.34	peak
4	2420.000	49.92	-3.76	46.16	74.00	-27.84	peak
5	4440.000	44.81	1.78	46.59	74.00	-27.41	peak
6	5955.000	42.48	4.79	47.27	74.00	-26.73	peak

Note: 1. Result Level = Read Level + Correct Factor.

2. Peak: Peak detector.

3. Average Result = Peak Result + Duty Correction Factor.

4. The average limit for harmonics out of the restrict bands are 60.8 dBuV/m, the average limit in the restrict bands is 54 dBuV/m.


5. If peak result complies with average limit, the average result is deemed to comply with average limit.



### 6.4.4. SPURIOUS EMISSIONS BELOW 30 MHz

#### SPURIOUS EMISSIONS (LOOP ANTENNA FACE ON TO THE EUT)

0.09 kHz ~ 150 kHz

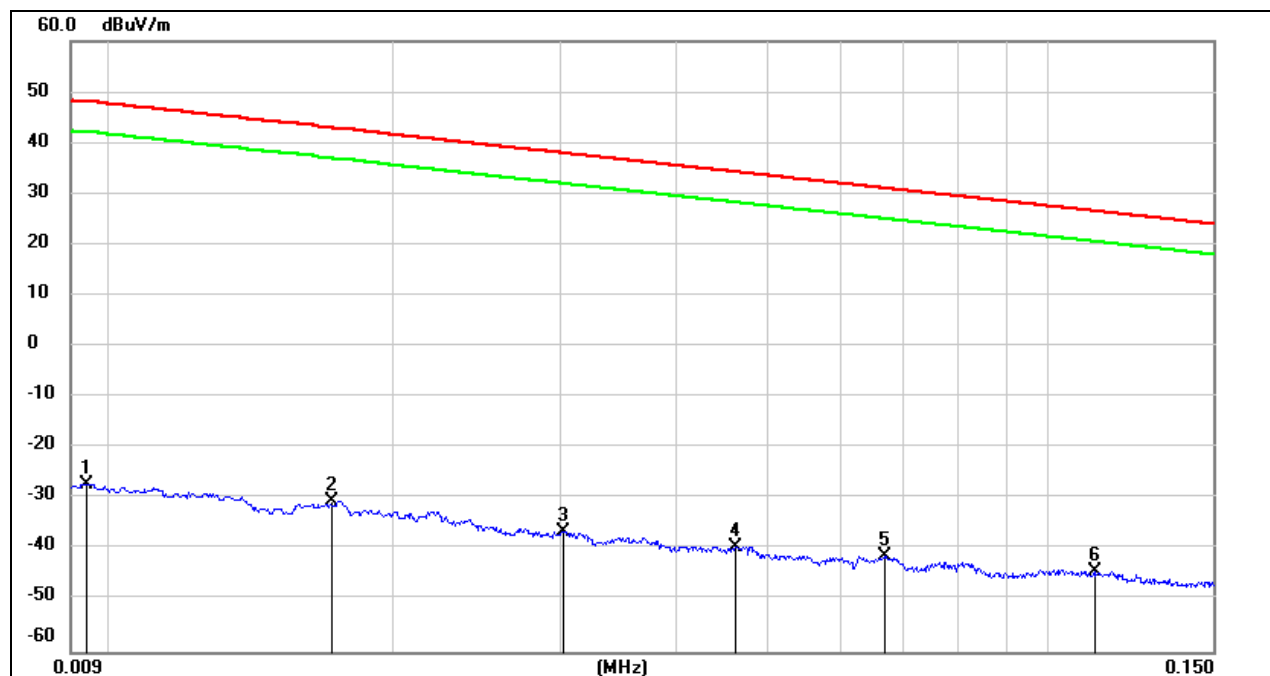


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.0094	74.16	-101.35	-27.19	48.05	-78.69	-3.45	-75.24	peak
2	0.0171	70.88	-101.36	-30.48	42.94	-81.98	-8.56	-73.42	peak
3	0.0303	64.95	-101.39	-36.44	37.97	-87.94	-13.53	-74.41	peak
4	0.0463	62.14	-101.46	-39.32	34.29	-90.82	-17.21	-73.61	peak
5	0.0670	60.22	-101.55	-41.33	31.08	-92.83	-20.42	-72.41	peak
6	0.1121	57.38	-101.76	-44.38	26.61	-95.88	-24.89	-70.99	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

### 150 kHz ~ 490 kHz

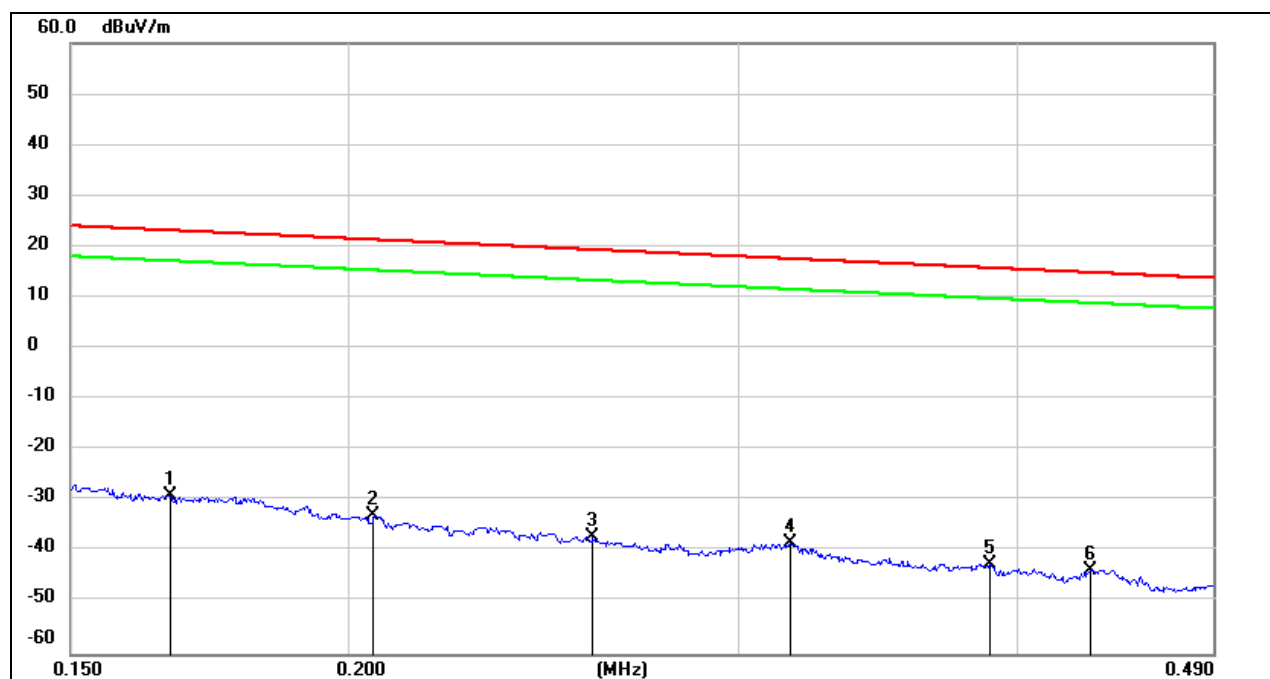


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.1663	72.78	-101.66	-28.88	23.19	-80.38	-28.31	-52.07	peak
2	0.2053	68.79	-101.73	-32.94	21.35	-84.44	-30.15	-54.29	peak
3	0.2575	64.77	-101.80	-37.03	19.39	-88.53	-32.11	-56.42	peak
4	0.3163	63.70	-101.87	-38.17	17.60	-89.67	-33.90	-55.77	peak
5	0.3890	59.46	-101.95	-42.49	15.80	-93.99	-35.70	-58.29	peak
6	0.4314	58.47	-101.99	-43.52	14.90	-95.02	-36.60	-58.42	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

### 490 kHz ~ 30 MHz

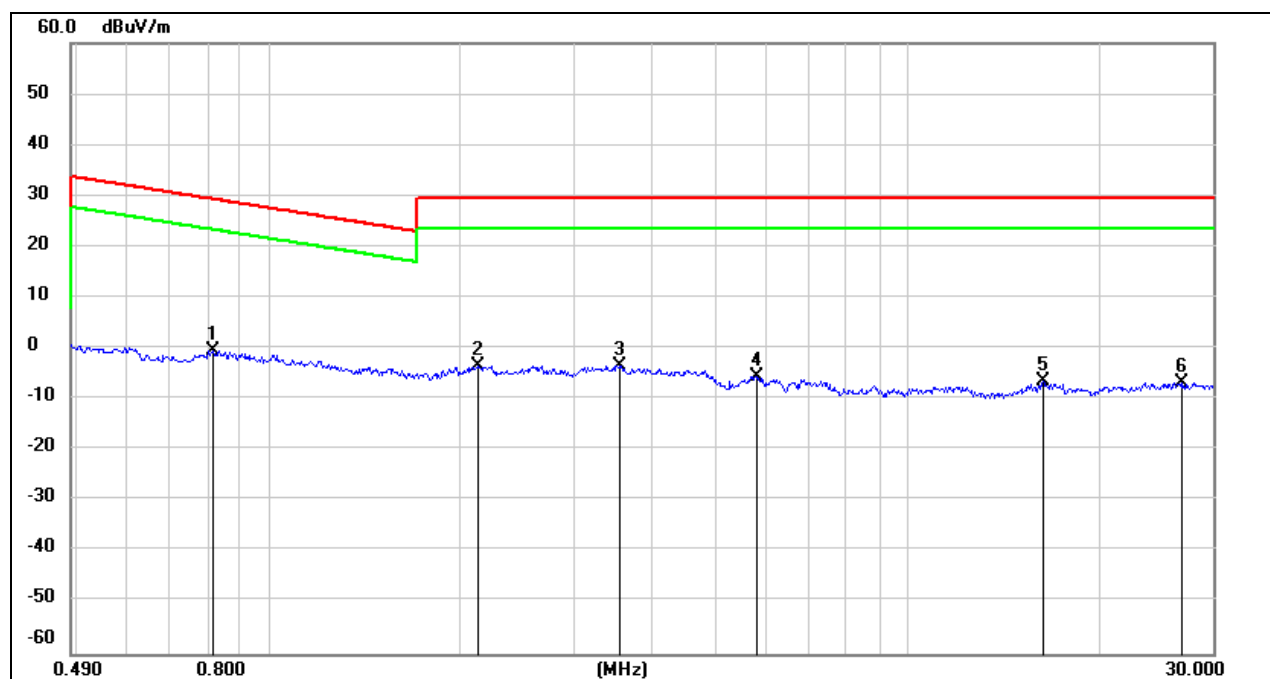

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.8195	61.66	-62.16	-0.50	29.33	-52.00	-22.17	-29.83	peak
2	2.1199	58.33	-61.79	-3.46	29.54	-54.96	-21.96	-33.00	peak
3	3.5590	57.92	-61.44	-3.52	29.54	-55.02	-21.96	-33.06	peak
4	5.8018	55.91	-61.38	-5.47	29.54	-56.97	-21.96	-35.01	peak
5	16.2774	54.41	-60.97	-6.56	29.54	-58.06	-21.96	-36.10	peak
6	26.8719	53.54	-60.27	-6.73	29.54	-58.23	-21.96	-36.27	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

Note: All the modes had been tested, only the worst data was recorded in the report.

## 7. ANTENNA REQUIREMENTS

### APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### RESULTS

Complies

---

**END OF REPORT**