

**SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.**

Report No.: SUCR250200013901

Rev.: 01

Page: 1 of 62

## ***FCC SAR TEST REPORT***

**Application No.:** SUCR2502000139AT  
**Applicant:** Vanstone Electronic (Beijing) Co., Ltd.  
**Manufacturer:** 3F No.2 Building, Aisino Corporation Park 18A, Xingshikou Road, Haidian District, Beijing, China 100195  
**Product Name:** Vanstone Electronic (Beijing) Co., Ltd.  
**Model No.(EUT):** 3F No.2 Building, Aisino Corporation Park 18A, Xingshikou Road, Haidian District, Beijing, China 100195  
**Product Name:** Android POS Terminal  
**Model No.(EUT):** A90 Pro  
**Trade Mark:**   
**FCC ID:** OWLA90-PRO-C  
**Standards:** FCC 47CFR §2.1093  
**Date of Receipt:** 2025-02-27  
**Date of Test:** 2025-03-29 to 2025-05-13  
**Date of Issue:** 2025-05-13  
**Test conclusion:** **PASS \***

\* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



**Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)**



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200013901  
Rev.: 01  
Page: 2 of 62

Revision Record			
Version	Description	Date	Remark
01	Original	2025/05/13	/

Authorized for issue by:		
Prepared By		
		Leon Liu/ Project Manager
Approved By		
		Nick Hu/ Technical Manager



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200013901

Rev.: 01

Page: 3 of 62

# TEST SUMMARY

Frequency Band	Maximum Reported SAR(W/kg)
	Extremity
GSM850	1.80
GSM1900	1.65
WCDMA Band II	2.82
WCDMA Band V	0.97
LTE Band 2	2.55
LTE Band 4	1.69
LTE Band 5	0.66
LTE Band 7	3.05
LTE Band 38	2.44
WI-FI (2.4GHz)	0.89
WI-FI (5GHz)	0.55
BT	0.09
SAR Limited(W/kg)	4.0
Maximum Simultaneous Transmission SAR (W/kg)	
Scenario	Extremity
Sum SAR	3.20
SPLSR	/
SPLSR Limited	0.1

# SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200013901

Rev.: 01

Page: 4 of 62

## CONTENTS

<b>1 General Information</b>	<b>6</b>
1.1 Details of Client	6
1.2 Test Location	6
1.3 Test Facility	6
1.4 General Description of EUT	7
1.4.1 DUT Antenna Locations (Back View)	9
1.5 Test Specification	10
1.6 RF exposure limits	11
<b>2 Laboratory Environment</b>	<b>12</b>
<b>3 SAR Measurements System Configuration</b>	<b>13</b>
3.1 The SAR Measurement System	13
3.2 Isotropic E-field Probe EX3DV4	15
3.3 Data Acquisition Electronics (DAE)	16
3.4 SAM Twin Phantom	16
3.5 ELI Phantom	17
3.6 Device Holder for Transmitters	18
3.7 Measurement procedure	19
3.7.1 Scanning procedure	19
3.7.2 Data Storage	21
3.7.3 Data Evaluation by SEMCAD	21
<b>4 SAR measurement variability and uncertainty</b>	<b>23</b>
4.1 SAR measurement variability	23
4.2 SAR measurement uncertainty	23
<b>5 Description of Test Position</b>	<b>24</b>
5.1 Extremity Exposure Condition	24
5.1.1 Extremity exposure conditions	24
<b>6 SAR System Verification Procedure</b>	<b>25</b>
6.1 Tissue Simulate Liquid	25
6.1.1 Recipes for Tissue Simulate Liquid	25
6.1.2 Measurement for Tissue Simulate Liquid	26
6.2 SAR System Check	27
6.2.1 Justification for Extended SAR Dipole Calibrations	28
6.2.2 Summary System Check Result(s)	29
6.2.3 Detailed System Check Results	29
<b>7 Test Configuration</b>	<b>30</b>
7.1 3G SAR Test Reduction Procedure	30
7.2 Operation Configurations	30
7.2.1 GSM Test Configuration	30
7.2.2 WCDMA Test Configuration	31
7.2.3 WiFi Test Configuration	34
7.2.4 Duty cycle	34
7.2.5 LTE Test Configuration	40
<b>8 Test Result</b>	<b>43</b>



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200013901

Rev.: 01

Page: 5 of 62

<b>8.1 Measurement of RF Conducted Power .....</b>	<b>43</b>
<b>8.2 Measurement of SAR Data.....</b>	<b>45</b>
8.2.1 SAR Result of GSM850.....	46
8.2.2 SAR Result of GSM1900.....	47
8.2.3 SAR Result of WCDMA Band II.....	48
8.2.4 SAR Result of WCDMA Band V .....	49
8.2.5 SAR Result of LTE Band 2 .....	50
8.2.6 SAR Result of LTE Band 4 .....	51
8.2.7 SAR Result of LTE Band 5 .....	52
8.2.8 SAR Result of LTE Band 7 .....	53
8.2.9 SAR Result of LTE Band 38 .....	54
8.2.10 SAR Result of WIFI 2.4G.....	55
8.2.11 SAR Result of WIFI 5G.....	56
8.2.12 SAR Result of BT .....	57
<b>8.3 Multiple Transmitter Evaluation .....</b>	<b>58</b>
8.3.1 Simultaneous SAR SAR test evaluation .....	58
8.3.2 Simultaneous Transmission SAR Summation Scenario.....	59
<b>9 Equipment list .....</b>	<b>61</b>
<b>10 Calibration certificate .....</b>	<b>62</b>
<b>11 Photographs.....</b>	<b>62</b>
<b>Appendix A: Detailed System Check Results .....</b>	<b>62</b>
<b>Appendix B: Detailed Test Results .....</b>	<b>62</b>
<b>Appendix C: Calibration certificate.....</b>	<b>62</b>
<b>Appendix D: Photographs .....</b>	<b>62</b>
<b>Appendix E: Conducted RF Output Power.....</b>	<b>62</b>



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200013901

Rev.: 01

Page: 6 of 62

### 1 General Information

#### 1.1 Details of Client

Applicant:	Vanstone Electronic (Beijing) Co., Ltd.
Address:	3F No.2 Building, Aisino Corporation Park 18A, Xingshikou Road, Haidian District, Beijing, China 100195
Manufacturer:	Vanstone Electronic (Beijing) Co., Ltd.
Address:	3F No.2 Building, Aisino Corporation Park 18A, Xingshikou Road, Haidian District, Beijing, China 100195

#### 1.2 Test Location

Company:	SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Address:	South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone
Post code:	215000
Test Engineer:	Koller Chen; Leon-I Liu

#### 1.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 6336.01)**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

- **Innovation, Science and Economic Development Canada**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

- **FCC –Designation Number: CN1312**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an accredited testing laboratory.

Designation Number: CN1312.

Test Firm Registration Number: 717327


# SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200013901

Rev.: 01

Page: 7 of 62

## 1.4 General Description of EUT

Product Name:	Android POS Terminal		
Model No.(EUT):	A90 Pro		
Trade Mark:			
Product Phase:	Production Unit		
Device Type :	portable device		
Exposure Category:	uncontrolled environment / general population		
Hardware Version:	V1.06		
Software Version:	V1.06		
IMEI:	869737050676607		
Antenna Type:	PIFA antenna		
Device Operating Configurations:			
Modulation Mode:	<b>GSM:</b> GMSK,8PSK; <b>WCDMA:</b> QPSK <b>LTE:</b> QPSK, 16QAM; <b>WIFI:</b> DSSS, OFDM; <b>BT:</b> GFSK, π/4DQPSK,8DPSK <b>NFC:</b> ASK		
Device Class:	B		
GPRS Multi-slots Class:	12	EGPRS Multi-slots Class:	12
HSDPA UE Category:	14	HSUPA UE Category	6
Power Class	4,tested with power level 5(GSM850)		
	1,tested with power level 0(GSM1900)		
	3, tested with power control “all 1”(WCDMA Band)		
	3, tested with power control Max Power(LTE Band)		
Frequency Bands:	Band	Tx (MHz)	Rx (MHz)
	GSM850	824 - 849	869 - 894
	GSM1900	1850 - 1910	1930 - 1990
	WCDMA Band II	1850 - 1910	1930 - 1990
	WCDMA Band V	824 - 849	869 - 894
	LTE Band 2	1850 - 1910	1930 - 1990
	LTE Band 4	1710 - 1755	2110 - 2155
	LTE Band 5	824 - 849	869 - 894
	LTE Band 7	2500 - 2570	2620 - 2690
	LTE Band 38	2570 - 2620	2570 - 2620
	Wi-Fi 2.4G	2402 - 2462	2402 - 2462
	Wi-Fi 5G	5150 - 5250	5150 - 5250
		5250 - 5350	5250 - 5350
		5470 - 5725	5470 - 5725
		5725 - 5850	5725 - 5850
BT	2402~2480	2402~2480	
NFC	13.56MHz	-	
RF Cable:	<input checked="" type="checkbox"/> Provided by the applicant <input type="checkbox"/> Provided by the laboratory		
1# Battery Information:	Model:	BT-901	
	Normal Voltage:	DC3.60V	
	Rated capacity:	5200mAh	
	Battery Type:	Rechargeable Li-polymer Battery	
	Manufacturer	MEI ZHOU BO FU NENG TECHNOLOGY CO.,LTD	
2# Battery Information:	Model:	BT-901	
	Normal Voltage:	DC3.60V	



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200013901

Rev.: 01

Page: 8 of 62

	Rated capacity:	5200mAh
	Battery Type:	Rechargeable Li-polymer Battery
	Manufacturer	Dongguan Rishengzhi New Energy Technology Co.,Ltd.

Note: \*Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information, SGS is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.

As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.





## **SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.**

Report No.: SUCR250200013901

Rev.: 01

Page: 9 of 62

### **1.4.1 DUT Antenna Locations (Back View)**

The DUT Antenna Locations can be referred to Appendix D



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200013901

Rev.: 01

Page: 10 of 62

### 1.5 Test Specification

Identity	Document Title
FCC 47CFR §2.1093	Radiofrequency Radiation Exposure Evaluation: Portable Devices
ANSI/IEEE C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.
IEEE 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
KDB 941225 D01	3G SAR Measurement Procedures v03r01
KDB 941225 D05	SAR for LTE Devices v02r05
KDB 941225 D05A	LTE Rel.10 KDB Inquiry Sheet v01r02
KDB 248227 D01	SAR Guidance for IEEE 802.11 Wi-Fi SAR v02r02
KDB 447498 D04	General RF Exposure Guidance v01
KDB 865664 D01	SAR Measurement 100 MHz to 6 GHz v01r04
KDB 865664 D02	RF Exposure Reporting v01r02
KDB 690783 D01	SAR Listings on Grants v01r03



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200013901

Rev.: 01

Page: 11 of 62

### 1.6 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
<b>Spatial Peak SAR*</b> (Brain*Trunk)	1.60 mW/g	8.00 mW/g
<b>Spatial Average SAR**</b> (Whole Body)	0.08 mW/g	0.40 mW/g
<b>Spatial Peak SAR***</b> (Hands/Feet/Ankle/Wrist)	<b>4.00 mW/g</b>	20.00 mW/g

**Notes:**

\* The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time

\*\* The Spatial Average value of the SAR averaged over the whole body.

\*\*\* The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

**Uncontrolled Environments** are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

**Controlled Environments** are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation.)



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200013901

Rev.: 01

Page: 12 of 62

## 2 Laboratory Environment

Temperature	Min. = 18°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

Table 1: The Ambient Conditions



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200013901

Rev.: 01

Page: 13 of 62

### 3 SAR Measurements System Configuration

#### 3.1 The SAR Measurement System

This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY professional system). A E-field probe is used to determine the internal electric fields. The SAR can be obtained from the equation  $SAR = \sigma (|E|^2) / \rho$  where  $\sigma$  and  $\rho$  are the conductivity and mass density of the tissue-Simulate.

The DASY system for performing compliance tests consists of the following items:

A standard high precision 6-axis robot (Stabile RX family) with controller, teach pendant and software. An arm extension for accommodation the data acquisition electronics (DAE).

A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.


The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.\

## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200013901

Rev.: 01


Page: 14 of 62

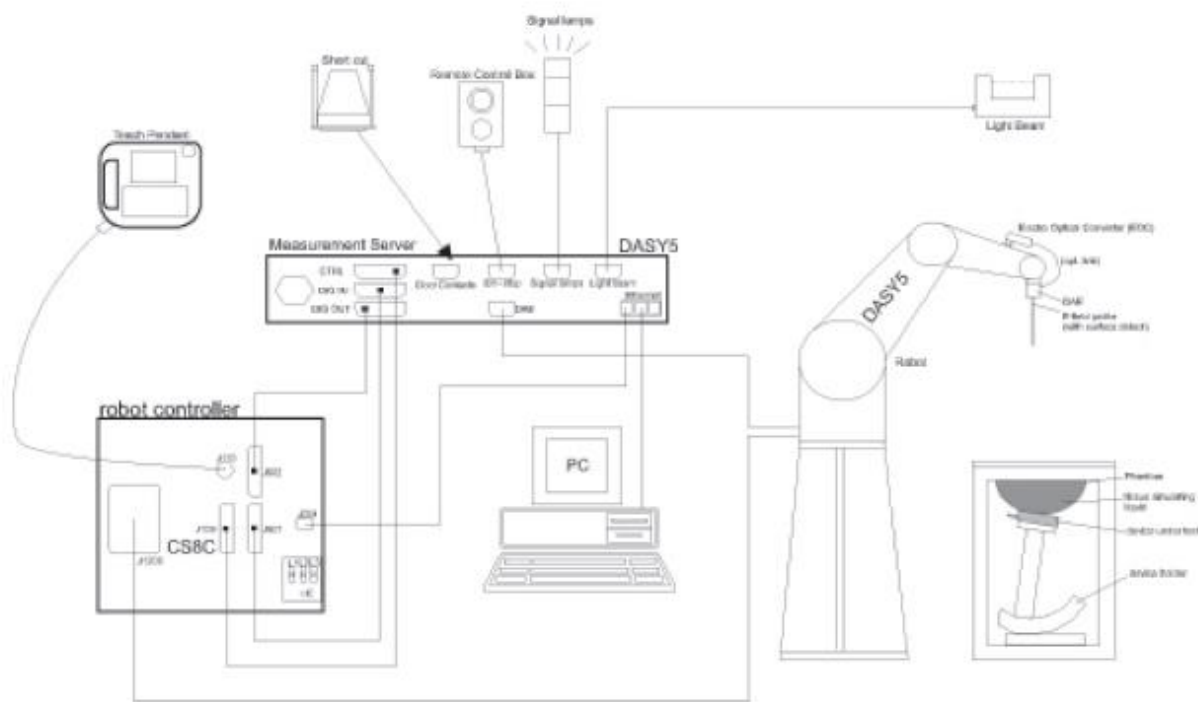


F-1. SAR Measurement System Configuration

- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 7.
- DASY5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand, right-hand and Body Worn usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validating the proper functioning of the system.


### 3.2 Isotropic E-field Probe EX3DV4

	<p>Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)</p>
<b>Calibration</b>	ISO/IEC 17025 <u>calibration service</u> available.
<b>Frequency</b>	<p>10 MHz to &gt; 6 GHz Linearity: <math>\pm 0.2</math> dB (30 MHz to 6 GHz)</p>
<b>Directivity</b>	<p><math>\pm 0.3</math> dB in TSL (rotation around probe axis) <math>\pm 0.5</math> dB in TSL (rotation normal to probe axis)</p>
<b>Dynamic Range</b>	<p>10 <math>\mu</math>W/g to &gt; 100 mW/g Linearity: <math>\pm 0.2</math> dB (noise: typically &lt; 1 <math>\mu</math>W/g)</p>
<b>Dimensions</b>	<p>Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm</p>
<b>Application</b>	<p>High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.</p>
<b>Compatibility</b>	DASY52 SAR and higher, EASY4/MRI

### 3.3 Data Acquisition Electronics (DAE)

<b>Model</b>	DAE	
<b>Construction</b>	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY4/5 embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.	
<b>Measurement Range</b>	-100 to +300 mV (16 bit resolution and two range settings: 4mV, 400mV)	
<b>Input Offset Voltage</b>	< 5μV (with auto zero)	
<b>Input Bias Current</b>	< 50 f A	
<b>Dimensions</b>	60 x 60 x 68 mm	

### 3.4 SAM Twin Phantom

<b>Material</b>	Vinylester, glass fiber reinforced (VE-GF)	
<b>Liquid Compatibility</b>	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)	
<b>Shell Thickness</b>	2 ± 0.2 mm (6 ± 0.2 mm at ear point)	
<b>Dimensions (incl. Wooden Support)</b>	Length: 1000 mm Width: 500 mm Height: adjustable feet	
<b>Filling Volume</b>	approx. 25 liters	
<b>Wooden Support</b>	SPEAG standard phantom table	

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.

Twin SAM V5.0 has the same shell geometry and is manufactured from the same material as Twin SAM V4.0, but has reinforced top structure.




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200013901

Rev.: 01

Page: 17 of 62

### 3.5 ELI Phantom

<b>Material</b>	Vinylester, glass fiber reinforced (VE-GF)	
<b>Liquid Compatibility</b>	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)	
<b>Shell Thickness</b>	2.0 ± 0.2 mm (bottom plate)	
<b>Dimensions</b>	Major axis: 600 mm Minor axis: 400 mm	
<b>Filling Volume</b>	approx. 30 liters	
<b>Wooden Support</b>	SPEAG standard phantom table	

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEEE 1528 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.

ELI V5.0 has the same shell geometry and is manufactured from the same material as ELI4, but has reinforced top structure.

### 3.6 Device Holder for Transmitters



**F-2. Device Holder for Transmitters**

- The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation centres for both scales are the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.
- The DASY device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon=3$  and loss tangent  $\delta=0.02$ . The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200013901

Rev.: 01

Page: 19 of 62

### 3.7 Measurement procedure

#### 3.7.1 Scanning procedure

##### Step 1: Power reference measurement

The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure.

##### Step 2: Area scan

The SAR distribution at the exposed side of the head was measured at a distance of 4mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 15mm\*15mm or 12mm\*12mm or 10mm\*10mm. Based on the area scan data, the area of the maximum absorption was determined by spline interpolation.

##### Step 3: Zoom scan

Around this point, a volume of 32mm\*32mm\*30mm ( $f \leq 2\text{GHz}$ ), 30mm\*30mm\*30mm ( $f$  for 2-3GHz) and 24mm\*24mm\*22mm ( $f$  for 5-6GHz) was assessed by measuring 5x5x7 points ( $f \leq 2\text{GHz}$ ), 7x7x7 points ( $f$  for 2-3GHz) and 7x7x12 points ( $f$  for 5-6GHz). On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

The data at the surface was extrapolated, since the centre of the dipoles is 2.0mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2mm. (This can be variable. Refer to the probe specification). The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip. The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The volume was integrated with the trapezoidal algorithm. One thousand points were interpolated to calculate the average. All neighbouring volumes were evaluated until no neighboring volume with a higher average value was found.

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std. 1528-2013.

## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200013901

Rev.: 01

Page: 20 of 62

			$\leq 3$ GHz	$> 3$ GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			$5 \pm 1$ mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$			$\leq 2$ GHz: $\leq 15$ mm 2 – 3 GHz: $\leq 12$ mm	3 – 4 GHz: $\leq 12$ mm 4 – 6 GHz: $\leq 10$ mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}$ , $\Delta y_{Zoom}$			$\leq 2$ GHz: $\leq 8$ mm 2 – 3 GHz: $\leq 5$ mm*	3 – 4 GHz: $\leq 5$ mm* 4 – 6 GHz: $\leq 4$ mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		$\leq 5$ mm	3 – 4 GHz: $\leq 4$ mm 4 – 5 GHz: $\leq 3$ mm 5 – 6 GHz: $\leq 2$ mm
	graded grid	$\Delta z_{Zoom}(1)$ : between 1" two points closest to phantom surface	$\leq 4$ mm	3 – 4 GHz: $\leq 3$ mm 4 – 5 GHz: $\leq 2.5$ mm 5 – 6 GHz: $\leq 2$ mm
		$\Delta z_{Zoom}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		$\geq 30$ mm	3 – 4 GHz: $\geq 28$ mm 4 – 5 GHz: $\geq 25$ mm 5 – 6 GHz: $\geq 22$ mm

### Step 4: Power reference measurement (drift)

The Power Drift Measurement job measures the field at the same location as the most recent power reference measurement job within the same procedure, and with the same settings. The indicated drift is mainly the variation of the DUT's output power and should vary max.  $\pm 5\%$



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200013901

Rev.: 01

Page: 21 of 62

### 3.7.2 Data Storage

The DASY software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension “.DAE4”. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated. The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [m W/g], [m W/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

### 3.7.3 Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, ai0, ai1, ai2
- Conversion factor	ConvFi	
- Diode compression point	Dcpi	
Device parameters:	- Frequency	f
- Crest factor	cf	
Media parameters:	- Conductivity	ε
- Density	ρ	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot c f / d c p_i$$

With  $V_i$  = compensated signal of channel i ( i = x, y, z )

$U_i$  = input signal of channel i ( i = x, y, z )

cf = crest factor of exciting field (DASY parameter)

dcp i = diode compression point (DASY parameter)

## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200013901

Rev.: 01

Page: 22 of 62

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$$

H-field probes:

$$H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2) / f$$

With  $V_i$  = compensated signal of channel  $i$  ( $i = x, y, z$ )

$Norm_i$  = sensor sensitivity of channel  $i$  ( $i = x, y, z$ )  
[mV/(V/m)<sup>2</sup>] for E-field Probes

$ConvF$  = sensitivity enhancement in solution

$a_{ij}$  = sensor sensitivity factors for H-field probes

$f$  = carrier frequency [GHz]

$E_i$  = electric field strength of channel  $i$  in V/m

$H_i$  = magnetic field strength of channel  $i$  in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \sigma) / (\epsilon \cdot 1000)$$

with  $SAR$  = local specific absorption rate in mW/g

$E_{tot}$  = total field strength in V/m

$\sigma$  = conductivity in [mho/m] or [Siemens/m]

$\epsilon$  = equivalent tissue density in g/cm<sup>3</sup>

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \text{ or } P_{pwe} = H_{tot}^2 \cdot 37.7$$

with  $P_{pwe}$  = equivalent power density of a plane wave in mW/cm<sup>2</sup>

$E_{tot}$  = total electric field strength in V/m

$H_{tot}$  = total magnetic field strength in A/m



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200013901

Rev.: 01

Page: 23 of 62

## 4 SAR measurement variability and uncertainty

### 4.1 SAR measurement variability

Per KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is  $< 0.80$  W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

### 4.2 SAR measurement uncertainty


Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is  $< 1.5$  W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

## 5 Description of Test Position

### 5.1 Extremity Exposure Condition

#### 5.1.1 Extremity exposure conditions

When SAR measurement is necessary for hand-held devices that do not transmit while at the head or torso, a flat phantom may be used. To assess this type of device, the device shall be placed directly against the flat phantom as shown in Figure 11, for the sides of the device that are in contact with the hand for the intended use.

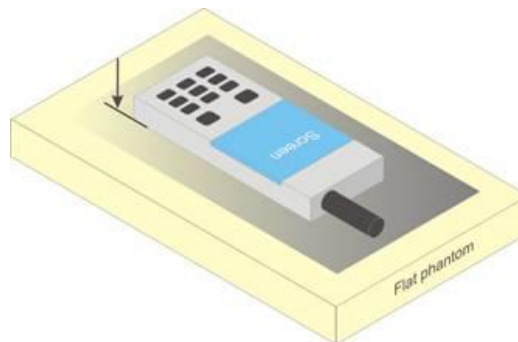

**F-3. Test position for hand-held devices.**





## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200013901

Rev.: 01

Page: 25 of 62

## 6 SAR System Verification Procedure

### 6.1 Tissue Simulate Liquid

#### 6.1.1 Recipes for Tissue Simulate Liquid

The following tables give the recipes for tissue simulating liquids to be used in different frequency bands:

Ingredients (% by weight)	Frequency (MHz)				
	450	700-900	1750-2000	2300-2500	2500-2700
Water	38.56	40.30	55.24	55.00	54.92
Salt (NaCl)	3.95	1.38	0.31	0.2	0.23
Sucrose	56.32	57.90	0	0	0
HEC	0.98	0.24	0	0	0
Bactericide	0.19	0.18	0	0	0
Tween	0	0	44.45	44.80	44.85
Salt: 99+% Pure Sodium Chloride Water: De-ionized, 16 MΩ <sup>+</sup> resistivity Tween: Polyoxyethylene (20) sorbitan monolaurate Sucrose: 98+% Pure Sucrose HEC: Hydroxyethyl Cellulose					
HSL5GHz is composed of the following ingredients: Water: 50-65% Mineral oil: 10-30% Emulsifiers: 8-25% Sodium salt: 0-1.5%					

Table 2: Recipe of Tissue Simulate Liquid



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200013901  
Rev.: 01  
Page: 26 of 62

6.1.2 Measurement for Tissue Simulate Liquid


The Conductivity ( $\sigma$ ) and Permittivity ( $\rho$ ) are listed in bellow table. For the SAR measurement given in this report. The temperature variation of the Tissue Simulate Liquids was  $22\pm2^{\circ}\text{C}$ .

Measurement for Tissue Simulate Liquid							
Tissue Type	Measured Frequency (MHz)	Target Tissue ( $\pm 5\%$ )		Measured Tissue		Liquid Temp.	Test Date
		$\epsilon_r$	$\sigma(\text{S/m})$	$\epsilon_r$	$\sigma(\text{S/m})$	( $^{\circ}\text{C}$ )	
835 Head	835	41.5	0.9	42.434	0.904	21.9	2025/3/29
1750 Head	1750	40.1	1.37	38.901	1.319	22.1	2025/3/30
1950 Head	1950	40.0	1.4	39.116	1.389	22.3	2025/3/31
2450 Head	2450	39.2	1.8	38.933	1.806	22.1	2025/4/2
2450 Head	2450	39.2	1.8	39.413	1.805	22.2	2025/5/13
2600 Head	2600	39.0	1.96	38.605	1.973	21.9	2025/4/3
5250 Head	5250	35.9	4.71	36.884	4.740	22.3	2025/4/4
5600 Head	5600	35.5	5.07	36.016	5.125	22.3	2025/4/4
5750 Head	5750	35.4	5.22	35.835	5.318	22.3	2025/4/4

Table 3: Measurement result of Tissue electric parameters.

### 6.2 SAR System Check

The microwave circuit arrangement for system Check is sketched in F-12. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within  $\pm 10\%$  from the target SAR values. The tests were conducted on the same days as the measurement of the EUT. The obtained results from the system accuracy verification are displayed in the following table (A power level of 250mW (below 3GHz) or 100mW (3-6GHz) was input to the dipole antenna). During the tests, the ambient temperature of the laboratory was in the range  $22\pm 2^{\circ}\text{C}$ , the relative humidity was in the range 60% and the liquid depth above the ear reference points was above  $15\pm 0.5$  cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

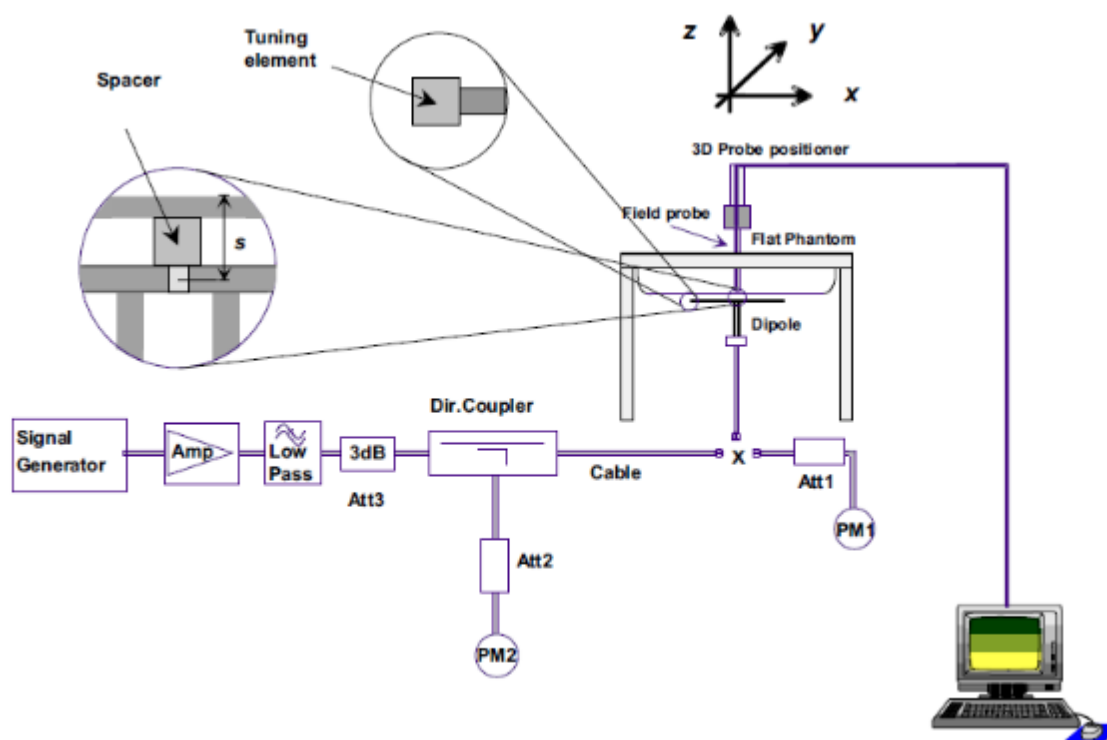

F-1. the microwave circuit arrangement used for SAR system check



## **SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.**

Report No.: SUCR250200013901

Rev.: 01

Page: 28 of 62

### **6.2.1 Justification for Extended SAR Dipole Calibrations**

1) Referring to KDB865664 D01 requirements for dipole calibration, instead of the typical annual calibration recommended by measurement standards, longer calibration intervals of up to three years may be considered when it is demonstrated that the SAR target, impedance and return loss of a dipole have remain stable according to the following requirements. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.

- a) There is no physical damage on the dipole;
- b) System check with specific dipole is within 10% of calibrated value;
- c) Return-loss is within 10% of calibrated measurement;
- d) Impedance is within  $5\Omega$  from the previous measurement.

2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200013901

Rev.: 01

Page: 29 of 62

### 6.2.2 Summary System Check Result(s)

SAR System Validation Result(s)											
Validation Kit		Measured SAR 250mW	Measured SAR 250mW	Measured SAR (normalized to 1W)	Measured SAR (normalized to 1W)	Target SAR (normalized to 1W)	Target SAR (normalized to 1W)	Deviation (Within $\pm 10\%$ )		Liquid Temp. ( $^{\circ}\text{C}$ )	Test Date
		1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	1-g(W/kg)	10-g(W/kg)	1- g(W/kg)	10- g(W/kg)		
D835V2	Head	2.39	1.58	9.56	6.32	9.60	6.16	-0.42%	2.60%	21.9	2025/3/29
D1750V2	Head	8.94	4.77	35.76	19.08	36.30	19.30	-1.49%	-1.14%	22.1	2025/3/30
D1950V3	Head	9.93	5.11	39.72	20.44	40.40	20.80	-1.68%	-1.73%	22.3	2025/3/31
D2450V2	Head	13.10	6.19	52.40	24.76	52.70	24.60	-0.57%	0.65%	22.1	2025/4/2
D2450V2	Head	13.00	6.10	52.00	24.40	52.70	24.60	-1.33%	-0.81%	22.2	2025/5/13
D2600V2	Head	13.50	6.05	54.00	24.20	57.70	25.80	-6.41%	-6.20%	21.9	2025/4/3
Validation Kit		Measured SAR 100mW	Measured SAR 100mW	Measured SAR (normalized to 1W)	Measured SAR (normalized to 1W)	Target SAR (normalized to 1W)	Target SAR (normalized to 1W)	Deviation (Within $\pm 10\%$ )		Liquid Temp. ( $^{\circ}\text{C}$ )	Test Date
		1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	1-g(W/kg)	10-g(W/kg)	1- g(W/kg)	10- g(W/kg)		
D5GHzV2	Head (5.25GHz)	7.54	2.17	75.40	21.70	77.20	21.90	-2.33%	-0.91%	22.3	2025/4/4
	Head (5.6GHz)	8.24	2.37	82.40	23.70	81.10	22.80	1.60%	3.95%	22.3	2025/4/4
	Head (5.75GHz)	7.59	2.16	75.90	21.60	77.80	21.70	-2.44%	-0.46%	22.3	2025/4/4

Table 4: SAR System Check Result.

### 6.2.3 Detailed System Check Results

Please see the Appendix A



## **SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.**

Report No.: SUCR250200013901

Rev.: 01

Page: 30 of 62

## **7 Test Configuration**

### **7.1 3G SAR Test Reduction Procedure**

According to KDB 941225D01, in the following procedures, the mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq 1/4$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as “otherwise” in the applicable procedures; SAR measurement is required for the secondary mode.

### **7.2 Operation Configurations**

#### **7.2.1 GSM Test Configuration**

SAR tests for GSM 850 and GSM 1900, a communication link is set up with a base station by air link. Using CMW500 the power lever is set to “5” and “0” in SAR of GSM 850 and GSM 1900. The tests in the band of GSM 850 and GSM 1900 are performed in the mode of GPRS/EGPRS function. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslot is 5. The EGPRS class is 12 for this EUT, it has at most 4 timeslots in uplink, and at most 4 timeslots in downlink, the maximum total timeslot is 5.

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

The 3G SAR test reduction procedure is applied to 8-PSK EDGE with GMSK GPRS/EDGE as the primary mode



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200013901

Rev.: 01

Page: 32 of 62

The measurements were performed with a Fixed Reference Channel (FRC) and H-Set 1 QPSK.

Parameter	Value
Nominal average inf. bit rate	534 kbit/s
Inter-TTI Distance	3 TTI"s
Number of HARQ Processes	2 Processes
Information Bit Payload	3202 Bits
MAC-d PDU size	336 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	4800 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	9600 SMLs
Coding Rate	0.67
Number of Physical Channel Codes	5

Table 5: settings of required H-Set 1 QPSK acc. to 3GPP 34.121

HS-DSCH Category	Maximum HS-DSCH Codes Received	Minimum Inter-TTI Interval	Maximum H S-DSCH Transport Block Bits/HS-DSCH TTI	Total Soft Channel Bits
1	5	3	7298	19200
2	5	3	7298	28800
3	5	2	7298	28800
4	5	2	7298	38400
5	5	1	7298	57600
6	5	1	7298	67200
7	10	1	14411	115200
8	10	1	14411	134400
9	15	1	25251	172800
10	15	1	27952	172800
11	5	2	3630	14400
12	5	1	3630	28800
13	15	1	34800	259200
14	15	1	42196	259200
15	15	1	23370	345600
16	15	1	27952	345600

Table 6: HSDPA UE category

### b) HSUPA

Due to inner loop power control requirements in HSUPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSUPA should be configured according to the values indicated below as well as other applicable procedures described in the „WCDMA Handset" and „Release 5 HSUPA Data Device" sections of 3G device.



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200013901

Rev.: 01

Page: 33 of 62

Sub-test <sup>1</sup>	$\beta_c$ <sup>2</sup>	$\beta_d$ <sup>3</sup>	$\beta_d$ (SF) <sup>3</sup>	$\beta_c/\beta_d$ <sup>4</sup>	$\beta_{hs}$ <sup>(1)</sup> <sup>5</sup>	$\beta_{ec}$ <sup>6</sup>	$\beta_{ed}$ <sup>7</sup>	$\beta_c$ (SF) (SF) <sup>8</sup>	$\beta_{ed}$ (codes) (codes) <sup>9</sup>	CM <sup>(2)</sup> (dB) <sup>10</sup>	MP R <sup>11</sup> (dB) <sup>12</sup>	AG <sup>(4)</sup> Inde x <sup>13</sup>	E- TFC I <sup>14</sup>
1 <sup>1</sup>	11/15 <sup>(3)</sup>	15/15 <sup>(3)</sup>	64 <sup>15</sup>	11/15 <sup>(3)</sup>	22/15 <sup>16</sup>	209/225 <sup>17</sup>	1039/225 <sup>18</sup>	4 <sup>19</sup>	1 <sup>20</sup>	1.0 <sup>21</sup>	0.0 <sup>22</sup>	20 <sup>23</sup>	75 <sup>24</sup>
2 <sup>1</sup>	6/15 <sup>25</sup>	15/15 <sup>26</sup>	64 <sup>27</sup>	6/15 <sup>28</sup>	12/15 <sup>29</sup>	12/15 <sup>30</sup>	94/75 <sup>31</sup>	4 <sup>32</sup>	1 <sup>33</sup>	3.0 <sup>34</sup>	2.0 <sup>35</sup>	12 <sup>36</sup>	67 <sup>37</sup>
3 <sup>1</sup>	15/15 <sup>38</sup>	9/15 <sup>39</sup>	64 <sup>40</sup>	15/9 <sup>41</sup>	30/15 <sup>42</sup>	30/15 <sup>43</sup>	$\beta_{ed1}:47/15$ $\beta_{ed2}:47/15$ <sup>44</sup>	4 <sup>45</sup>	2 <sup>46</sup>	2.0 <sup>47</sup>	1.0 <sup>48</sup>	15 <sup>49</sup>	92 <sup>50</sup>
4 <sup>1</sup>	2/15 <sup>51</sup>	15/15 <sup>52</sup>	64 <sup>53</sup>	2/15 <sup>54</sup>	4/15 <sup>55</sup>	2/15 <sup>56</sup>	56/75 <sup>57</sup>	4 <sup>58</sup>	1 <sup>59</sup>	3.0 <sup>60</sup>	2.0 <sup>61</sup>	17 <sup>62</sup>	71 <sup>63</sup>
5 <sup>1</sup>	15/15 <sup>(4)</sup>	15/15 <sup>(4)</sup>	64 <sup>64</sup>	15/15 <sup>(4)</sup>	30/15 <sup>65</sup>	24/15 <sup>66</sup>	134/15 <sup>67</sup>	4 <sup>68</sup>	1 <sup>69</sup>	1.0 <sup>70</sup>	0.0 <sup>71</sup>	21 <sup>72</sup>	81 <sup>73</sup>
Note 1: $\Delta ACK$ , $\Delta NACK$ and $\Delta CQI=8$ $A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$ Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$ , $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference. Note 3 : For subtest 1 the $\beta_c/\beta_d$ ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$ Note 4 : For subtest 5 the $\beta_c/\beta_d$ ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$ Note 5 : Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g Note 6: $\beta_{ed}$ can not be set directly; it is set by Absolute Grant Value.													

Table 7: Subtests for UMTS Release 6 HSUPA

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	E-DCH TTI(ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
6 (No DPDCH)	4	8	10	2SF2&2SF	11484	5.76
	4	4	2	4	20000	2.00
7 (No DPDCH)	4	8	2	2SF2&2SF	22996	?
	4	4	10	4	20000	?
NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4. UE categories 1 to 6 support QPSK only. UE category 7 supports QPSK and 16QAM. (TS25.306-7.3.0).						

Table 8: HSUPA UE category

## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200013901

Rev.: 01

Page: 34 of 62


### 7.2.3 WiFi Test Configuration

A Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement.

### 7.2.4 Duty cycle


Wi-Fi 2.4GHz 802.11b:

Duty cycle= 98.90%

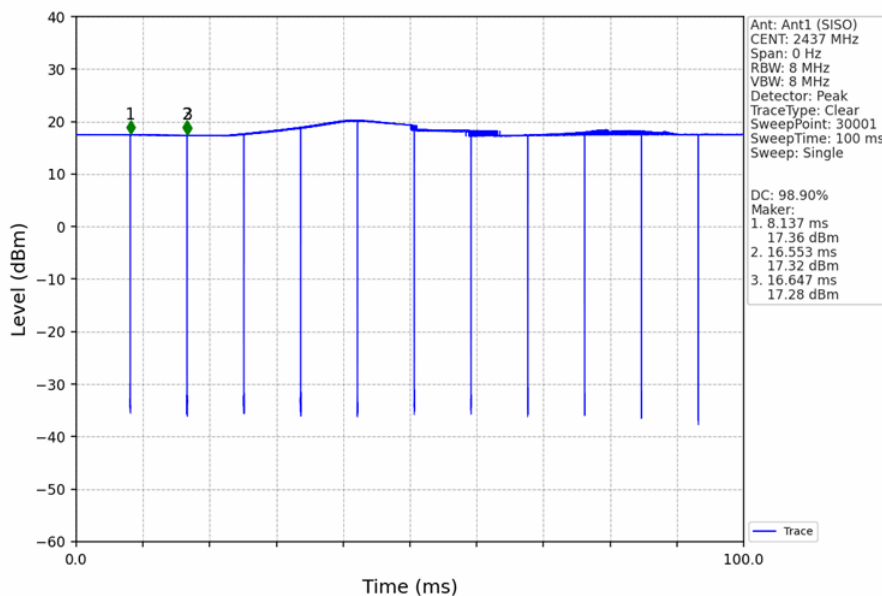

Wi-Fi 5GHz 802.11a:

Duty cycle=93.38%

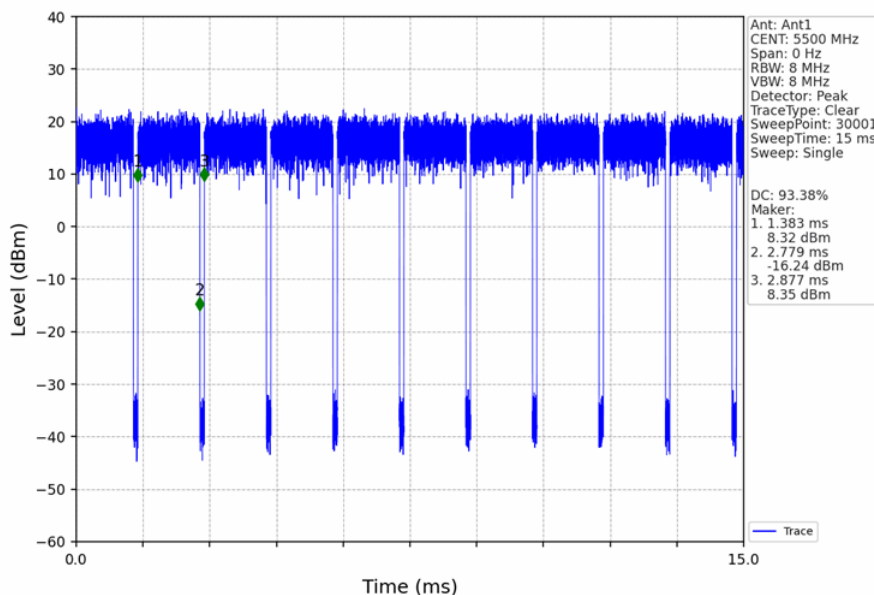

## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200013901

Rev.: 01

Page: 35 of 62

### 7.2.4.1 Initial Test Position SAR Test Reduction Procedure

DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures. The initial test position procedure is described in the following:

- 1) . When the reported SAR of the initial test position is  $\leq 0.4$  W/kg, further SAR measurement is not required for the other (remaining) test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band. SAR is also not required for that exposure configuration in the subsequent test configuration(s).
- 2) . When the reported SAR of the initial test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position using subsequent highest extrapolated or estimated 1-g SAR conditions determined by area scans or next closest/smallest test separation distance and maximum RF coupling test positions based on manufacturer justification, on the highest maximum output power channel, until the reported SAR is  $\leq 0.8$  W/kg or all required test positions (left, right, touch, tilt or subsequent surfaces and edges) are tested.
- 3) . For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested. a) Additional power measurements may be required for this step, which should be limited to those necessary for identifying the subsequent highest output power channels.

### 7.2.4.2 Initial Test Configuration Procedures

An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. For configurations with the same specified or measured maximum output power, additional transmission mode and test channel selection procedures are required. SAR test reduction for subsequent highest output test channels is determined according to *reported* SAR of the initial test configuration.

For next to the ear, hotspot mode and UMC mini-tablet exposure configurations where multiple test positions are required, the initial test position procedure is applied to minimize the number of test positions required for SAR measurement using the initial test configuration transmission mode. For fixed exposure conditions that do not have multiple SAR test positions, SAR is measured in the transmission mode determined by the initial test configuration.

When the *reported* SAR of the initial test configuration is  $> 0.8$  W/kg, SAR measurement is required for subsequent next highest measured output power channel(s) in the initial test configuration until *reported* SAR is  $\leq 1.2$  W/kg or all required channels are tested.

## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200013901

Rev.: 01

Page: 36 of 62

### 7.2.4.3 Subsequent Test Configuration Procedures

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units. The initial test position procedure is applied to next to the ear, UMPC mini-tablet and hotspot mode configurations. When the same maximum output power is specified for multiple transmission modes, additional power measurements may be required to determine if SAR measurements are required for subsequent highest output power channels in a subsequent test configuration. The subsequent test configuration and SAR measurement procedures are described in the following.

- 1) . When SAR test exclusion provisions of KDB Publication 447498 are applicable and SAR measurement is not required for the initial test configuration, SAR is also not required for the next highest maximum output power transmission mode subsequent test configuration(s) in that frequency band or aggregated band and exposure configuration.
- 2) . When the highest *reported* SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg, SAR is not required for that subsequent test configuration.
- 3) . The number of channels in the initial test configuration and subsequent test configuration can be different due to differences in channel bandwidth. When SAR measurement is required for a subsequent test configuration and the channel bandwidth is smaller than that in the initial test configuration, all channels in the subsequent test configuration that overlap with the larger bandwidth channel tested in the initial test configuration should be used to determine the highest maximum output power channel. This step requires additional power measurement to identify the highest maximum output power channel in the subsequent test configuration to determine SAR test reduction.
  - a) SAR should first be measured for the channel with highest measured output power in the subsequent test configuration.
  - b) SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the *reported* SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is  $> 1.2$  W/kg or until all required channels are tested. i) For channels with the same measured maximum output power, SAR should be measured using the channel closest to the center frequency of the larger channel bandwidth channel in the initial test configuration.
- 4) . SAR measurements for the remaining highest specified maximum output power OFDM transmission mode configurations that have not been tested in the initial test configuration (highest maximum output) or subsequent test configuration(s) (subsequent next highest maximum output power) is determined by recursively applying the subsequent test configuration procedures in this section to the remaining configurations according to the following:
  - a) replace “subsequent test configuration” with “next subsequent test configuration” (i.e., subsequent next highest specified maximum output power configuration)
  - b) replace “initial test configuration” with “all tested higher output power configurations”

## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200013901

Rev.: 01

Page: 37 of 62

### 7.2.4.4 2.4 GHz WiFi SAR Procedures

Separate SAR procedures are applied to DSSS and OFDM configurations in the 2.4 GHz band to simplify DSSS test requirements. For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions. When SAR measurement is required for an OFDM configuration, the initial test configuration, subsequent test configuration and initial test position procedures are applied. The SAR test exclusion requirements for 802.11g/n OFDM configurations are described in following.

- **802.11b DSSS SAR Test Requirements**

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) . When the reported SAR of the highest measured maximum output power channel for the exposure configuration is  $\leq 0.8$  W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) . When the reported SAR is  $> 0.8$  W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is  $> 1.2$  W/kg, SAR is required for the third channel; i.e., all channels require testing.

- **2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements**

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3, including sub-sections). SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) . When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) . When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.

- **SAR Test Requirements for OFDM configurations**

When SAR measurement is required for 802.11 g/n OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200013901

Rev.: 01

Page: 38 of 62

### 7.2.4.5 WiFi 5G SAR Test Procedures

#### 7.2.4.5.1 U-NII-1 and U-NII-2A Bands

For devices that operate in only one of the U-NII-1 and U-NII-2A bands, the normally required SAR procedures for OFDM configurations are applied. For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following:

- 1) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest *reported* SAR for a test configuration is  $\leq 1.2$  W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, both bands are tested independently for SAR.
- 2) When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest *reported* SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is  $\leq 1.2$  W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, both bands are tested independently for SAR.
- 3) The two U-NII bands may be aggregated to support a 160 MHz channel on channel number 50. Without additional testing, the maximum output power for this is limited to the lower of the maximum output power certified for the two bands. When SAR measurement is required for at least one of the bands and the highest *reported* SAR adjusted by the ratio of specified maximum output power of aggregated to standalone band is  $> 1.2$  W/kg, SAR is required for the 160 MHz channel. This procedure does not apply to an aggregated band with maximum output higher than the standalone band(s); the aggregated band must be tested independently for SAR. SAR is not required when the 160 MHz channel is operating at a reduced maximum power and also qualifies for SAR test exclusion.

#### 7.2.4.5.2 U-NII-2C and U-NII-3 Bands

The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, all channels that operate at 5.60 – 5.65 GHz must be included to apply the SAR test reduction and measurement procedures.

When the same transmitter and antenna(s) are used for U-NII-2C band and U-NII-3 band or 5.8 GHz band of §15.247, the bands may be aggregated to enable additional channels with 20, 40 or 80 MHz bandwidth to span across the band gap, as illustrated in Appendix B. The maximum output power for the additional band gap channels is limited to the lower of those certified for the bands. Unless band gap channels are permanently disabled, they must be considered for SAR testing. The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. To maintain SAR measurement accuracy and to facilitate test reduction, the channels in U-NII-2C band above 5.65 GHz may be grouped with the 5.8 GHz channels in U-NII-3 or §15.247 band to enable two SAR probe calibration frequency points to cover the bands, including the band gap channels. When band gap channels are supported and the bands are not aggregated for SAR testing, band gap channels must be considered independently in each band according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200013901

Rev.: 01

Page: 39 of 62

### 7.2.4.5.3 OFDM Transmission Mode SAR Test Configuration and Channel Selection Requirements

The initial test configuration for 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple configurations in a frequency band have the same specified maximum output power, the initial test configuration is determined according to the following steps applied sequentially.

- 1) The largest channel bandwidth configuration is selected among the multiple configurations with the same specified maximum output power.
- 2) If multiple configurations have the same specified maximum output power and largest channel bandwidth, the lowest order modulation among the largest channel bandwidth configurations is selected.
- 3) If multiple configurations have the same specified maximum output power, largest channel bandwidth and lowest order modulation, the lowest data rate configuration among these configurations is selected.
- 4) When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n. After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following. These channel selection procedures apply to both the initial test configuration and subsequent test configuration(s), with respect to the default power measurement procedures or additional power measurements required for further SAR test reduction. The same procedures also apply to subsequent highest output power channel(s) selection.
  - The channel closest to mid-band frequency is selected for SAR measurement.
  - For channels with equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.

### 7.2.4.5.4 SAR Test Requirements for OFDM configurations

When SAR measurement is required for 802.11 a/n/ac OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. When the same transmitter and antenna(s) are used for U-NII-1 and U-NII-2A bands, additional SAR test reduction applies. When band gap channels between U-NII-2C band and 5.8 GHz U-NII-3 or §15.247 band are supported, the highest maximum output power transmission mode configuration and maximum output power channel across the bands must be used to determine SAR test reduction, according to the initial test configuration and subsequent test configuration requirements. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

### 7.2.5 LTE Test Configuration

LTE modes were tested according to FCC KDB 941225 D05 publication. Please see notes after the tabulated SAR data for required test configurations. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The Anritsu MT8820C was used for LTE output power measurements and SAR testing. Max power control was used so the UE transmits with maximum output power during SAR testing. SAR must be measured with the maximum TTI (transmit time interval) supported by the device in each LTE configuration.


#### TDD LTE test consideration

For Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

SAR was tested with the highest transmission duty factor (63.33%) using Uplink-downlink configuration 0 and Special subframe configuration 7.

LTE TDD Band support 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Frame structure type 2:

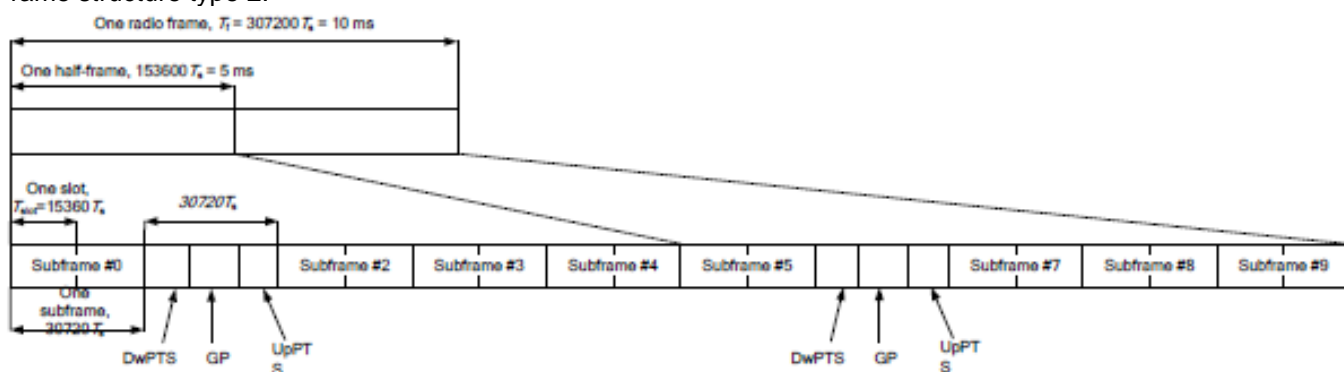

Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	6592.Ts	2192.Ts	2560.Ts	7680.Ts	2192.Ts	2560.Ts
1	19760.Ts			20480.Ts		
2	21952.Ts			23040.Ts		
3	24144.Ts			25600.Ts		
4	26336.Ts			7680.Ts		
5	6592.Ts	4384.Ts	5120.Ts	20480.Ts	4384.Ts	5120.Ts
6	19760.Ts			23040.Ts		
7	21952.Ts			25600.Ts		
8	24144.Ts			-	-	-
9	13168.Ts			-	-	-

Uplink-downlink configurations.



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200013901

Rev.: 01

Page: 41 of 62

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Calculated Duty Cycle=[Extended cyclic prefix in uplink x (Ts) x # of S + # of U]/10ms

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

### A) Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

### B) MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

Modulation	Channel bandwidth / Transmission bandwidth (N <sub>RB</sub> )						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3

### C) A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200013901

Rev.: 01

Page: 42 of 62

### D) Largest channel bandwidth standalone SAR test requirements

#### 1) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is  $\leq 0.8$  W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is  $> 1.45$  W/kg, SAR is required for all three RB offset configurations for that required test channel.

#### 2) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in 1) are applied to measure the SAR for QPSK with 50% RB allocation.

#### 3) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 1) and 2) are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.

#### 4) Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is  $> \frac{1}{2}$  dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is  $> 1.45$  W/kg.

### E) Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is  $> \frac{1}{2}$  dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is  $> 1.45$  W/kg.

## 8 Test Result

### 8.1 Measurement of RF Conducted Power

The detailed conducted power table can refer to Appendix E.

Note:

- 1) . For GSM SAR the time-based average power is relevant. The difference in between depends on the duty cycle of the TDMA signal:

No. of timeslots	1	2	3	4
Duty Cycle	1:8.3	1:4.15	1:2.77	1:2.075
Time based avg. power compared to slotted avg. power	-9.19	-6.18	-4.42	-3.17

- 2) . The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum burst-averaged power based on time slots. The calculated method is shown as below:  
Frame-averaged power =  $10 \times \log (\text{Burst-averaged power mW} \times \text{Slot used} / 8)$ .
- 3) . When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel must be used.
- 4) . Conducted power measurement results of downlink LTE carrier aggregation are provided to quantify downlink only carrier aggregation SAR test exclusion per KDB 941225 D05A. Uplink maximum output power is measured with downlink carrier aggregation active, using the channel with highest measured maximum output power when downlink carrier aggregation is inactive, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than  $\frac{1}{4}$  dB higher than the maximum output power measured when downlink carrier aggregation inactive, therefore SAR evaluation with downlink carrier aggregation can be excluded.

## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200013901

Rev.: 01

Page: 44 of 62


5) . For conducted power of WIFI must be measured at each transmit antenna port according to the DSSS and OFDM transmission configurations in each standalone and aggregated frequency band. For each transmission mode configuration, power must be measured for the highest and lowest channels; and at the mid-band channel(s) when there are at least 3 channels. For configurations with multiple mid-band channels, due to an even number of channels, both channels should be measured. Power measurement is required for the transmission mode configuration with the highest maximum output power specified for production units.

1) When the same highest maximum output power specification applies to multiple transmission modes, the largest channel bandwidth configuration with the lowest order modulation and lowest data rate is measured.

2) When the same highest maximum output power is specified for multiple largest channel bandwidth configurations with the same lowest order modulation or lowest order modulation and lowest data rate, power measurement is required for all equivalent 802.11 configurations with the same maximum output power.

6) . The conducted power of BT is measured with RMS detector.

BT 3DH5 Duty Cycle=74.00%

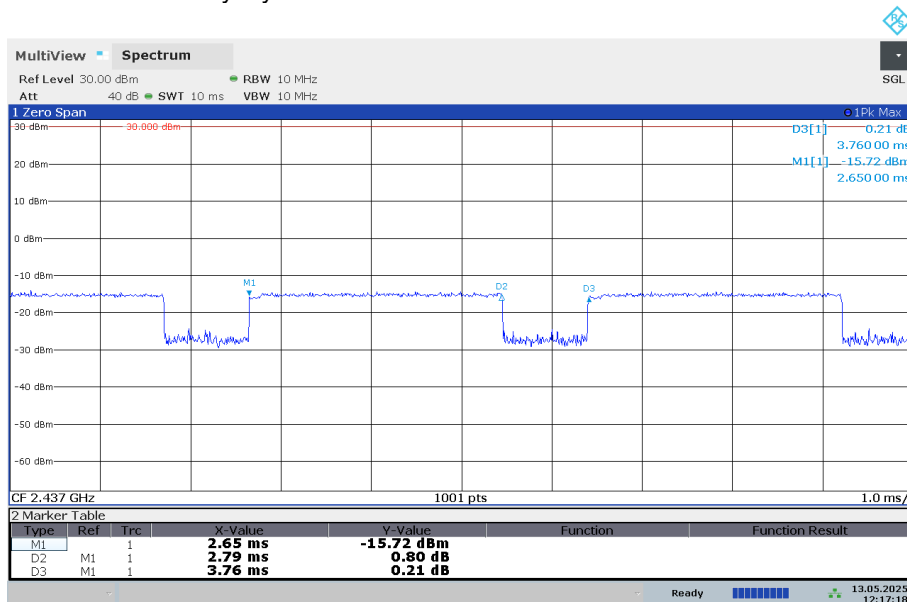

## 8.2 Measurement of SAR Data

**Note:**

- 1) The maximum reported SAR value is marked in **bold**. Graph results refer to Appendix B
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8\text{W/kg}$  for 1-g or  $2.0\text{W/kg}$  for 10-g respectively, when the transmission band is  $\leq 100\text{MHz}$ .
  - $\leq 0.6\text{ W/kg}$  or  $1.5\text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
  - $\leq 0.4\text{ W/kg}$  or  $1.0\text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is  $\geq 200\text{ MHz}$ .
- 3) Maximum bandwidth does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

**WiFi 2.4G:**

- 1) When the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is  $\leq 1.2\text{ W/kg}$ , SAR test for the other 802.11 modes are not required.

**WiFi 5G:**

- 1) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. As the highest reported SAR for a test configuration is  $\leq 1.2\text{ W/kg}$ , SAR is not required for U-NII-1 band for that configuration.
- 2) For Wi-Fi 5G, U-NII-2A (5250-5350 MHz) and U-NII-2C (5470-5725 MHz) bands does not support hotspot function.
- 3) When the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is  $\leq 1.2\text{ W/kg}$ , SAR test for the other 802.11 modes are not required.



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200013901

Rev.: 01

Page: 46 of 62

### 8.2.1 SAR Result of GSM850

GSM850 SAR Test Record										
Test position	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 10-g (W/kg)	Liquid Temp.(°C)
Extremity Test data(Separate 0mm)										
Front side	GPRS 4TS	190/836.6	1:2.075	0.099	-0.02	29.25	29.50	1.059	0.105	21.9
Back side	GPRS 4TS	190/836.6	1:2.075	1.700	0.02	29.25	29.50	1.059	<b>1.801</b>	21.9
Left side	GPRS 4TS	190/836.6	1:2.075	0.128	-0.16	29.25	29.50	1.059	0.136	21.9
Right side	GPRS 4TS	190/836.6	1:2.075	0.175	0.09	29.25	29.50	1.059	0.185	21.9
Top side	GPRS 4TS	190/836.6	1:2.075	0.815	-0.10	29.25	29.50	1.059	0.863	21.9
Bottom side	GPRS 4TS	190/836.6	1:2.075	0.001	0.06	29.25	29.50	1.059	0.001	21.9
Back side-Battery1	GPRS 4TS	190/836.6	1:2.075	1.640	0.01	29.25	29.50	1.059	1.737	21.9



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200013901

Rev.: 01

Page: 47 of 62

### 8.2.2 SAR Result of GSM1900

GSM1900 SAR Test Record										
Test position	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 10-g (W/kg)	Liquid Temp.(°C)
Extremity Test data(Separate 0mm)										
Front side	GPRS 4TS	661/1880	1:2.075	0.089	0.11	26.33	26.50	1.040	0.093	22.3
Back side	GPRS 4TS	661/1880	1:2.075	1.590	0.05	26.33	26.50	1.040	<b>1.653</b>	22.3
Left side	GPRS 4TS	661/1880	1:2.075	0.070	0.13	26.33	26.50	1.040	0.073	22.3
Right side	GPRS 4TS	661/1880	1:2.075	0.260	-0.05	26.33	26.50	1.040	0.270	22.3
Top side	GPRS 4TS	661/1880	1:2.075	0.395	-0.18	26.33	26.50	1.040	0.411	22.3
Bottom side	GPRS 4TS	661/1880	1:2.075	0.023	0.05	26.33	26.50	1.040	0.024	22.3
Back side-Battery1	GPRS 4TS	661/1880	1:2.075	1.550	0.03	26.33	26.50	1.040	1.612	22.3

Test Position	Channel/ Frequency	Measured SAR (1g)	1 <sup>st</sup> Repeated	Ratio	2 <sup>nd</sup> Repeated	3 <sup>rd</sup> Repeated
	(MHz)		SAR (1g)		SAR (1g)	SAR (1g)
Back side	9400/1880	2.55	2.49	1.024096	N/A	N/A
Note: 1) When the original highest measured SAR is $\geq 0.80$ W/kg, the measurement was repeated once.						
2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was $> 1.20$ or when the original or repeated measurement was $\geq 1.45$ W/kg (~ 10% from the 1-g SAR limit).						
3) A third repeated measurement was performed only if the original, first or second repeated measurement was $\geq 1.5$ W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is $> 1.20$ .						
4) Repeated measurements are not required when the original highest measured SAR is $< 0.80$ W/kg						





## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200013901

Rev.: 01

Page: 49 of 62

### 8.2.4 SAR Result of WCDMA Band V

WCDMA Band V SAR Test Record										
Test position	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 10-g (W/kg)	Liquid Temp.(°C)
Extremity Test data(Separate 0mm)										
Front side	RMC	4182/836.4	1:1	0.097	0.03	23.92	24.50	1.143	0.111	21.9
Back side	RMC	4182/836.4	1:1	0.851	0.05	23.92	24.50	1.143	<b>0.973</b>	21.9
Left side	RMC	4182/836.4	1:1	0.112	-0.19	23.92	24.50	1.143	0.128	21.9
Right side	RMC	4182/836.4	1:1	0.165	0.09	23.92	24.50	1.143	0.189	21.9
Top side	RMC	4182/836.4	1:1	0.650	-0.06	23.92	24.50	1.143	0.743	21.9
Bottom side	RMC	4182/836.4	1:1	0.001	-0.08	23.92	24.50	1.143	0.001	21.9
Back side-Battery1	RMC	4182/836.4	1:1	0.847	0.10	23.92	24.50	1.143	0.968	21.9

## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200013901

Rev.: 01

Page: 50 of 62

### 8.2.5 SAR Result of LTE Band 2

LTE Band 2 SAR Test Record											
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 10-g (W/kg)	Liquid Temp.(°C)
Extremity Test data(Separate 0mm 1RB)											
Front side	20	QPSK 1_0	18900/1880	1:1	0.135	0.02	24.31	24.50	1.045	0.141	22.3
Back side	20	QPSK 1_0	18900/1880	1:1	2.440	0.08	24.31	24.50	1.045	<b>2.549</b>	22.3
Back side-Repeat SAR	20	QPSK 1_0	18900/1880	1:1	2.350	-0.05	24.31	24.50	1.045	2.455	22.3
Left side	20	QPSK 1_0	18900/1880	1:1	0.115	-0.08	24.31	24.50	1.045	0.120	22.3
Right side	20	QPSK 1_0	18900/1880	1:1	0.395	-0.01	24.31	24.50	1.045	0.413	22.3
Top side	20	QPSK 1_0	18900/1880	1:1	0.625	-0.03	24.31	24.50	1.045	0.653	22.3
Bottom side	20	QPSK 1_0	18900/1880	1:1	0.038	-0.18	24.31	24.50	1.045	0.040	22.3
Back side	20	QPSK 1_0	18700/1860	1:1	2.380	-0.16	24.29	24.50	1.050	2.498	22.3
Back side	20	QPSK 1_0	19100/1900	1:1	2.330	-0.09	24.26	24.50	1.057	2.462	22.3
Back side-Battery1	20	QPSK 1_0	18900/1880	1:1	2.410	0.16	24.31	24.50	1.045	2.518	22.3
Extremity Test data(Separate 0mm 50%RB)											
Front side	20	QPSK 50_0	18900/1880	1:1	0.086	0.03	23.45	23.50	1.012	0.087	22.3
Back side	20	QPSK 50_0	18900/1880	1:1	2.030	0.11	23.45	23.50	1.012	2.054	22.3
Left side	20	QPSK 50_0	18900/1880	1:1	0.069	-0.04	23.45	23.50	1.012	0.070	22.3
Right side	20	QPSK 50_0	18900/1880	1:1	0.246	-0.19	23.45	23.50	1.012	0.249	22.3
Top side	20	QPSK 50_0	18900/1880	1:1	0.498	0.19	23.45	23.50	1.012	0.504	22.3
Bottom side	20	QPSK 50_0	18900/1880	1:1	0.011	-0.12	23.45	23.50	1.012	0.011	22.3
Back side	20	QPSK 50_0	18700/1860	1:1	1.960	-0.19	23.37	23.50	1.030	2.020	22.3
Back side	20	QPSK 50_0	19100/1900	1:1	2.010	-0.09	23.41	23.50	1.021	2.052	22.3
Extremity Test data(Separate 0mm 100%RB)											
Back side	20	QPSK 100_0	18900/1880	1:1	1.840	0.01	23.09	23.50	1.099	2.022	22.3

Test Position	Channel/ Frequency	Measured SAR (1g)	1 <sup>st</sup> Repeated	Ratio	2 <sup>nd</sup> Repeated	3 <sup>rd</sup> Repeated
	(MHz)		SAR (1g)		SAR (1g)	SAR (1g)
Back side	18900/1880	2.44	2.35	1.03829787	N/A	N/A

Note: 1) When the original highest measured SAR is  $\geq 0.80$  W/kg, the measurement was repeated once.  
2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).  
3) A third repeated measurement was performed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .  
4) Repeated measurements are not required when the original highest measured SAR is  $< 0.80$  W/kg



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200013901

Rev.: 01

Page: 51 of 62

### 8.2.6 SAR Result of LTE Band 4

LTE Band 4 SAR Test Record											
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Extremity Test data(Separate 0mm 1RB)											
Front side	20	QPSK 1_0	20175/1732.5	1:1	0.219	0.02	24.18	24.50	1.076	0.236	22.1
Back side	20	QPSK 1_0	20175/1732.5	1:1	1.570	0.06	24.18	24.50	1.076	<b>1.690</b>	22.1
Left side	20	QPSK 1_0	20175/1732.5	1:1	0.283	-0.11	24.18	24.50	1.076	0.305	22.1
Right side	20	QPSK 1_0	20175/1732.5	1:1	0.578	0.03	24.18	24.50	1.076	0.622	22.1
Top side	20	QPSK 1_0	20175/1732.5	1:1	0.486	-0.05	24.18	24.50	1.076	0.523	22.1
Bottom side	20	QPSK 1_0	20175/1732.5	1:1	0.035	0.09	24.18	24.50	1.076	0.038	22.1
Back side-Battery1	20	QPSK 1_0	20175/1732.5	1:1	1.550	0.14	24.18	24.50	1.076	1.669	22.1
Extremity Test data(Separate 0mm 50%RB)											
Front side	20	QPSK 50_0	20175/1732.5	1:1	0.116	0.13	23.27	23.50	1.054	0.122	22.1
Back side	20	QPSK 50_0	20175/1732.5	1:1	1.250	-0.16	23.27	23.50	1.054	1.318	22.1
Left side	20	QPSK 50_0	20175/1732.5	1:1	0.169	-0.08	23.27	23.50	1.054	0.178	22.1
Right side	20	QPSK 50_0	20175/1732.5	1:1	0.433	0.19	23.27	23.50	1.054	0.457	22.1
Top side	20	QPSK 50_0	20175/1732.5	1:1	0.396	0.04	23.27	23.50	1.054	0.418	22.1
Bottom side	20	QPSK 50_0	20175/1732.5	1:1	0.014	0.16	23.27	23.50	1.054	0.015	22.1



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200013901

Rev.: 01

Page: 52 of 62

### 8.2.7 SAR Result of LTE Band 5

LTE Band 5 SAR Test Record											
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 10-g (W/kg)	Liquid Temp.(°C)
Extremity Test data(Separate 0mm 1RB)											
Front side	10	QPSK 1_0	20525/836.5	1:1	0.075	0.19	24.19	24.50	1.074	0.081	21.9
Back side	10	QPSK 1_0	20525/836.5	1:1	0.614	0.04	24.19	24.50	1.074	<b>0.659</b>	21.9
Left side	10	QPSK 1_0	20525/836.5	1:1	0.084	0.03	24.19	24.50	1.074	0.090	21.9
Right side	10	QPSK 1_0	20525/836.5	1:1	0.118	-0.01	24.19	24.50	1.074	0.127	21.9
Top side	10	QPSK 1_0	20525/836.5	1:1	0.491	0.02	24.19	24.50	1.074	0.527	21.9
Bottom side	10	QPSK 1_0	20525/836.5	1:1	0.001	0.11	24.19	24.50	1.074	0.001	21.9
Back side-Battery1	10	QPSK 1_0	20525/836.5	1:1	0.611	0.09	24.19	24.50	1.074	0.656	21.9
Extremity Test data(Separate 0mm 50%RB)											
Front side	10	QPSK 25_0	20525/836.5	1:1	0.059	0.08	23.11	23.50	1.094	0.065	21.9
Back side	10	QPSK 25_0	20525/836.5	1:1	0.482	-0.09	23.11	23.50	1.094	0.527	21.9
Left side	10	QPSK 25_0	20525/836.5	1:1	0.069	-0.05	23.11	23.50	1.094	0.075	21.9
Right side	10	QPSK 25_0	20525/836.5	1:1	0.083	-0.01	23.11	23.50	1.094	0.091	21.9
Top side	10	QPSK 25_0	20525/836.5	1:1	0.356	-0.07	23.11	23.50	1.094	0.389	21.9
Bottom side	10	QPSK 25_0	20525/836.5	1:1	0.001	-0.03	23.11	23.50	1.094	0.001	21.9

## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200013901

Rev.: 01

Page: 53 of 62

### 8.2.8 SAR Result of LTE Band 7

LTE Band 7 SAR Test Record											
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 10-g (W/kg)	Liquid Temp.(°C)
Extremity Test data(Separate 0mm 1RB)											
Front side	20	QPSK 1_0	21100/2535	1:1	0.091	-0.15	23.19	23.50	1.074	0.098	21.9
Back side	20	QPSK 1_0	21100/2535	1:1	2.840	0.04	23.19	23.50	1.074	<b>3.050</b>	21.9
Back side-Repeat SAR	20	QPSK 1_0	21100/2535	1:1	2.770	0.01	23.19	23.50	1.074	2.975	21.9
Left side	20	QPSK 1_0	21100/2535	1:1	0.128	0.14	23.19	23.50	1.074	0.137	21.9
Right side	20	QPSK 1_0	21100/2535	1:1	0.159	0.05	23.19	23.50	1.074	0.171	21.9
Top side	20	QPSK 1_0	21100/2535	1:1	0.135	0.13	23.19	23.50	1.074	0.145	21.9
Bottom side	20	QPSK 1_0	21100/2535	1:1	0.015	0.06	23.19	23.50	1.074	0.016	21.9
Back side	20	QPSK 1_0	20850/2510	1:1	2.690	0.01	23.07	23.50	1.104	2.970	21.9
Back side	20	QPSK 1_0	21350/2560	1:1	2.740	-0.06	23.15	23.50	1.084	2.970	21.9
Back side-Battery1	20	QPSK 1_0	21100/2535	1:1	2.780	0.14	23.19	23.50	1.074	2.986	21.9
Extremity Test data(Separate 0mm 50%RB)											
Front side	20	QPSK 50_0	21100/2535	1:1	0.076	0.02	21.95	22.50	1.135	0.086	21.9
Back side	20	QPSK 50_0	21100/2535	1:1	2.450	-0.11	21.95	22.50	1.135	2.781	21.9
Left side	20	QPSK 50_0	21100/2535	1:1	0.096	0.00	21.95	22.50	1.135	0.109	21.9
Right side	20	QPSK 50_0	21100/2535	1:1	0.114	-0.17	21.95	22.50	1.135	0.129	21.9
Top side	20	QPSK 50_0	21100/2535	1:1	0.101	0.08	21.95	22.50	1.135	0.115	21.9
Bottom side	20	QPSK 50_0	21100/2535	1:1	0.007	0.18	21.95	22.50	1.135	0.008	21.9
Back side	20	QPSK 50_0	20850/2510	1:1	2.390	0.05	21.90	22.50	1.148	2.744	21.9
Back side	20	QPSK 50_0	21350/2560	1:1	2.330	-0.14	21.79	22.50	1.178	2.744	21.9
Extremity Test data(Separate 0mm 100%RB)											
Back side	20	QPSK 100_0	21100/2535	1:1	2.410	0.03	21.82	22.50	1.169	2.818	21.9

Test Position	Channel/ Frequency	Measured SAR (1g)	1 <sup>st</sup> Repeated	Ratio	2 <sup>nd</sup> Repeated	3 <sup>rd</sup> Repeated
	(MHz)		SAR (1g)		SAR (1g)	SAR (1g)
Back side	21100/2535	2.84	2.77	1.025270758	N/A	N/A

Note: 1) When the original highest measured SAR is  $\geq 0.80$  W/kg, the measurement was repeated once.

2) A second repeated measurement was preformed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).

3) A third repeated measurement was preformed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

4) Repeated measurements are not required when the original highest measured SAR is  $< 0.80$  W/kg

## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200013901

Rev.: 01

Page: 54 of 62

### 8.2.9 SAR Result of LTE Band 38

LTE Band 38 SAR Test Record											
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 10-g (W/kg)	Liquid Temp.(°C)
Extremity Test data(Separate 0mm 1RB)											
Front side	20	QPSK 1_0	38000/2595	1:1.58	0.081	0.10	24.29	24.50	1.050	0.085	21.9
Back side	20	QPSK 1_0	38000/2595	1:1.58	2.320	0.06	24.29	24.50	1.050	<b>2.435</b>	21.9
Back side-Repeat SAR	20	QPSK 1_0	38000/2595	1:1.58	2.260	-0.06	24.29	24.50	1.050	2.372	21.9
Left side	20	QPSK 1_0	38000/2595	1:1.58	0.099	0.14	24.29	24.50	1.050	0.104	21.9
Right side	20	QPSK 1_0	38000/2595	1:1.58	0.130	0.01	24.29	24.50	1.050	0.136	21.9
Top side	20	QPSK 1_0	38000/2595	1:1.58	0.128	-0.01	24.29	24.50	1.050	0.134	21.9
Bottom side	20	QPSK 1_0	38000/2595	1:1.58	0.001	-0.08	24.29	24.50	1.050	0.001	21.9
Back side-Battery1	20	QPSK 1_0	38000/2595	1:1.58	2.280	0.11	24.29	24.50	1.050	2.393	21.9
Extremity Test data(Separate 0mm 50%RB)											
Front side	20	QPSK 50_0	38000/2595	1:1.58	0.066	0.05	23.32	23.50	1.042	0.069	21.9
Back side	20	QPSK 50_0	38000/2595	1:1.58	1.860	0.17	23.32	23.50	1.042	1.939	21.9
Left side	20	QPSK 50_0	38000/2595	1:1.58	0.073	-0.16	23.32	23.50	1.042	0.076	21.9
Right side	20	QPSK 50_0	38000/2595	1:1.58	0.095	-0.12	23.32	23.50	1.042	0.099	21.9
Top side	20	QPSK 50_0	38000/2595	1:1.58	0.086	0.14	23.32	23.50	1.042	0.090	21.9
Bottom side	20	QPSK 50_0	38000/2595	1:1.58	0.001	-0.17	23.32	23.50	1.042	0.001	21.9
Extremity Test data(Separate 0mm 100%RB)											
Back side	20	QPSK 100_0	38000/2595	1:1.58	1.770	0.03	23.11	23.50	1.094	1.936	21.9

Test Position	Channel/ Frequency	Measured SAR (1g)	1 <sup>st</sup> Repeated	Ratio	2 <sup>nd</sup> Repeated	3 <sup>rd</sup> Repeated
	(MHz)		SAR (1g)		SAR (1g)	SAR (1g)
Back side	38000/2595	2.32	2.26	1.026548673	N/A	N/A

Note: 1) When the original highest measured SAR is  $\geq 0.80$  W/kg, the measurement was repeated once.

2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).

3) A third repeated measurement was performed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

4) Repeated measurements are not required when the original highest measured SAR is  $< 0.80$  W/kg



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200013901

Rev.: 01

Page: 55 of 62

### 8.2.10 SAR Result of WIFI 2.4G

Wi-Fi 2.4G SAR Test Record											
Test position	Test mode	Test ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 10-g (W/kg)	Liquid Temp.(°C)
Extremity Test data (Separate 0mm)											
Front side	802.11b	11/2462	98.90%	1.011	0.109	-0.10	14.78	15.00	1.052	0.116	22.1
Back side	802.11b	11/2462	98.90%	1.011	0.138	0.18	14.78	15.00	1.052	0.147	22.1
Left side	802.11b	11/2462	98.90%	1.011	0.027	-0.14	14.78	15.00	1.052	0.029	22.1
Right side	802.11b	11/2462	98.90%	1.011	0.837	-0.19	14.78	15.00	1.052	<b>0.890</b>	22.1
Top side	802.11b	11/2462	98.90%	1.011	0.037	0.09	14.78	15.00	1.052	0.039	22.1
Bottom side	802.11b	11/2462	98.90%	1.011	0.023	-0.02	14.78	15.00	1.052	0.024	22.1
Right side-Battery1	802.11b	11/2462	98.90%	1.011	0.824	0.03	14.78	15.00	1.052	0.876	22.1

## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200013901

Rev.: 01

Page: 56 of 62

### 8.2.11 SAR Result of WIFI 5G

Wi-Fi 5G SAR Test Record											
Test Record											
Test position	Test mode	Test ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 10-g (W/kg)	Liquid Temp.(°C)
Extremity Test data of U-NII-2A(Separate 0mm)											
Front side	802.11a	36/5180	93.38%	1.071	0.017	0.16	15.23	15.50	1.064	0.019	22.3
Back side	802.11a	36/5180	93.38%	1.071	0.049	-0.16	15.23	15.50	1.064	0.056	22.3
Left side	802.11a	36/5180	93.38%	1.071	0.013	-0.14	15.23	15.50	1.064	0.015	22.3
Right side	802.11a	36/5180	93.38%	1.071	0.416	-0.08	15.23	15.50	1.064	0.474	22.3
Top side	802.11a	36/5180	93.38%	1.071	0.109	0.02	15.23	15.50	1.064	0.124	22.3
Bottom side	802.11a	36/5180	93.38%	1.071	0.013	0.01	15.23	15.50	1.064	0.015	22.3
Extremity Test data of U-NII-2C(Separate 0mm)											
Front side	802.11a	100/5500	93.38%	1.071	0.020	0.09	15.17	15.50	1.079	0.023	22.3
Back side	802.11a	100/5500	93.38%	1.071	0.025	-0.11	15.17	15.50	1.079	0.029	22.3
Left side	802.11a	100/5500	93.38%	1.071	0.052	-0.08	15.17	15.50	1.079	0.060	22.3
Right side	802.11a	100/5500	93.38%	1.071	0.408	-0.07	15.17	15.50	1.079	0.471	22.3
Top side	802.11a	100/5500	93.38%	1.071	0.128	0.13	15.17	15.50	1.079	0.148	22.3
Bottom side	802.11a	100/5500	93.38%	1.071	0.011	0.05	15.17	15.50	1.079	0.013	22.3
Extremity Test data of U-NII-3(Separate 0mm)											
Front side	802.11a	149/5745	93.38%	1.071	0.020	-0.17	14.90	15.50	1.148	0.025	22.3
Back side	802.11a	149/5745	93.38%	1.071	0.062	0.02	14.90	15.50	1.148	0.076	22.3
Left side	802.11a	149/5745	93.38%	1.071	0.018	0.09	14.90	15.50	1.148	0.022	22.3
Right side	802.11a	149/5745	93.38%	1.071	0.449	-0.06	14.90	15.50	1.148	<b>0.552</b>	22.3
Top side	802.11a	149/5745	93.38%	1.071	0.156	-0.01	14.90	15.50	1.148	0.192	22.3
Bottom side	802.11a	149/5745	93.38%	1.071	0.032	0.03	14.90	15.50	1.148	0.039	22.3
Right side-Battery1	802.11a	149/5745	93.38%	1.071	0.445	0.12	14.90	15.50	1.148	0.547	22.3





## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200013901

Rev.: 01

Page: 57 of 62

### 8.2.12 SAR Result of BT

Bluetooth SAR Test Record											
Ant9 Test Record											
Test position	Test mode	Test ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 10-g (W/kg)	Liquid Temp.(°C)
Extremity Test data (Separate 0mm)											
Front side	3DH5	39/2441	74.00%	1.351	0.005	0.07	8.95	9.00	1.012	0.007	22.2
Back side	3DH5	39/2441	74.00%	1.351	0.008	0.16	8.95	9.00	1.012	0.011	22.2
Left side	3DH5	39/2441	74.00%	1.351	0.001	0.05	8.95	9.00	1.012	0.001	22.2
Right side	3DH5	39/2441	74.00%	1.351	0.063	-0.02	8.95	9.00	1.012	0.086	22.2
Top side	3DH5	39/2441	74.00%	1.351	0.001	-0.14	8.95	9.00	1.012	0.001	22.2
Bottom side	3DH5	39/2441	74.00%	1.351	0.001	0.17	8.95	9.00	1.012	0.001	22.2
Right side-Battery1	3DH5	39/2441	74.00%	1.351	0.055	0.01	8.95	9.00	1.012	0.075	22.2



**SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.**

Report No.: SUCR250200013901  
Rev.: 01  
Page: 58 of 62

**8.3 Multiple Transmitter Evaluation**

**8.3.1 Simultaneous SAR SAR test evaluation**

**•Simultaneous Transmission Possibilities**

NO	Simultaneous Tx Combination	Extremity
1	WWAN + WLAN2.4GHz	Y
2	WWAN + WLAN5GHz + BT	Y



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200013901

Rev.: 01

Page: 59 of 62

### 8.3.2 Simultaneous Transmission SAR Summation Scenario

Extremity:

Test position		SARmax (W/kg)				Summed SAR	
		WWAN	WiFi 2.4G	WiFi 5G	BT		
		1	2	3	4	1+2	1+3+4
GSM850	Front side	0.105	0.116	0.025	0.007	0.221	0.137
	Back side	1.801	0.147	0.076	0.011	1.948	1.888
	Left side	0.136	0.029	0.060	0.001	0.165	0.197
	Right side	0.185	0.890	0.552	0.086	1.075	0.823
	Top side	0.863	0.039	0.192	0.001	0.902	1.056
	Bottom side	0.001	0.024	0.039	0.001	0.025	0.041
GSM1900	Front side	0.093	0.116	0.025	0.007	0.209	0.125
	Back side	1.653	0.147	0.076	0.011	1.800	1.740
	Left side	0.073	0.029	0.060	0.001	0.102	0.134
	Right side	0.270	0.890	0.552	0.086	1.160	0.908
	Top side	0.411	0.039	0.192	0.001	0.450	0.604
	Bottom side	0.024	0.024	0.039	0.001	0.048	0.064
WCDMA B2	Front side	0.154	0.116	0.025	0.007	0.270	0.186
	Back side	2.822	0.147	0.076	0.011	2.969	2.909
	Left side	0.142	0.029	0.060	0.001	0.171	0.203
	Right side	0.418	0.890	0.552	0.086	1.308	1.056
	Top side	0.643	0.039	0.192	0.001	0.682	0.836
	Bottom side	0.052	0.024	0.039	0.001	0.076	0.092
WCDMA B5	Front side	0.111	0.116	0.025	0.007	0.227	0.143
	Back side	0.973	0.147	0.076	0.011	1.120	1.060
	Left side	0.128	0.029	0.060	0.001	0.157	0.189
	Right side	0.189	0.890	0.552	0.086	1.079	0.827
	Top side	0.743	0.039	0.192	0.001	0.782	0.936
	Bottom side	0.001	0.024	0.039	0.001	0.025	0.041
LTE B2	Front side	0.141	0.116	0.025	0.007	0.257	0.173
	Back side	2.549	0.147	0.076	0.011	2.696	2.636
	Left side	0.120	0.029	0.060	0.001	0.149	0.181
	Right side	0.413	0.890	0.552	0.086	1.303	1.051
	Top side	0.653	0.039	0.192	0.001	0.692	0.846
	Bottom side	0.040	0.024	0.039	0.001	0.064	0.080
LTE B4	Front side	0.236	0.116	0.025	0.007	0.352	0.268
	Back side	1.690	0.147	0.076	0.011	1.837	1.777
	Left side	0.305	0.029	0.060	0.001	0.334	0.366
	Right side	0.622	0.890	0.552	0.086	1.512	1.260
	Top side	0.523	0.039	0.192	0.001	0.562	0.716
	Bottom side	0.038	0.024	0.039	0.001	0.062	0.078
LTE B5	Front side	0.081	0.116	0.025	0.007	0.197	0.113
	Back side	0.659	0.147	0.076	0.011	0.806	0.746
	Left side	0.090	0.029	0.060	0.001	0.119	0.151
	Right side	0.127	0.890	0.552	0.086	1.017	0.765
	Top side	0.527	0.039	0.192	0.001	0.566	0.720
	Bottom side	0.001	0.024	0.039	0.001	0.025	0.041
LTE B7	Front side	0.098	0.116	0.025	0.007	0.214	0.130
	Back side	3.050	0.147	0.076	0.011	3.197	3.137



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200013901

Rev.: 01

Page: 60 of 62

	Left side	0.137	0.029	0.060	0.001	0.166	0.198
	Right side	0.171	0.890	0.552	0.086	1.061	0.809
	Top side	0.145	0.039	0.192	0.001	0.184	0.338
	Bottom side	0.016	0.024	0.039	0.001	0.040	0.056
LTE B38	Front side	0.085	0.116	0.025	0.007	0.201	0.117
	Back side	2.435	0.147	0.076	0.011	2.582	2.522
	Left side	0.104	0.029	0.060	0.001	0.133	0.165
	Right side	0.136	0.890	0.552	0.086	1.026	0.774
	Top side	0.134	0.039	0.192	0.001	0.173	0.327
	Bottom side	0.001	0.024	0.039	0.001	0.025	0.041



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200013901

Rev.: 01

Page: 61 of 62

### 9 Equipment list

Test Platform		SPEAG DASY5 Professional				
Description		SAR Test System				
Software Reference		DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)				
Hardware Reference						
Equipment		Manufacturer	Model	Serial Number	Calibration Date	Due date of calibration
☒	DAE	SPEAG	DAE4	1484	2024-10-15	2025-10-14
☒	Twin Phantom	SPEAG	SAM 8	1824	NCR	NCR
☒	E-Field Probe	SPEAG	EX3DV4	3982	2024-04-29	2025-04-28
☒	Validation Kits	SPEAG	D835V2	4d161	2023-08-25	2026-08-24
☒	Validation Kits	SPEAG	D1750V2	1105	2023-11-03	2026-11-02
☒	Validation Kits	SPEAG	D1950V3	1218	2023-05-04	2026-05-03
☒	Validation Kits	SPEAG	D2450V2	922	2023-08-28	2026-08-27
☒	Validation Kits	SPEAG	D2600V2	1125	2022-06-14	2025-06-13
☒	Validation Kits	SPEAG	D5GHzV2	1174	2023-08-23	2026-08-22
☒	Dielectric parameter probes	SPEAG	DAKS-3.5	1120	2024-08-20	2025-08-19
☒	Vector Network Analyzer and Vector Reflectometer	SPEAG	DAKS_VNA R140	50920	2024-08-19	2025-08-18
☒	Universal Radio Communication Tester	R&S	CMW500	111637	2024-09-12	2025-09-11
☒	RF Bi-Directional Coupler	Agilent	86205-60001	MY31400031	NCR	NCR
☒	Signal Generator	R&S	SMB100A	182393	2025-02-05	2026-02-04
☒	Preamplifier	Qiji	YX28980933	202104001	NCR	NCR
☒	USB Average Power Sensor	Keysight	U2002H	MY5639004	2024-09-10	2025-09-09
☒	USB Average Power Sensor	Agilent	U2002H	MY48200110	2024-11-21	2025-11-20
☒	Attenuator	SHX	TS2-3dB	30704	NCR	NCR
☒	Coaxial low pass filter	Mini-Circuits	VLF-2500(+)	NA	NCR	NCR
☒	Coaxial low pass filter	Microlab Fxr	LA-F13	NA	NCR	NCR
☒	DC POWER SUPPLY	SAKO	SK1730SL5A	NA	NCR	NCR
☒	Speed reading thermometer	LKM	DTM3000	NA	2024-09-14	2025-09-13
☒	Humidity and Temperature Indicator	MingGao	MingGao	NA	2024-09-16	2025-09-15

Note: All the equipments are within the valid period when the tests are performed.



## **SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.**

Report No.: SUCR250200013901  
Rev.: 01  
Page: 62 of 62

### **10 Calibration certificate**

Please see the Appendix C

### **11 Photographs**

Please see the Appendix D

### **Appendix A: Detailed System Check Results**

### **Appendix B: Detailed Test Results**

### **Appendix C: Calibration certificate**

### **Appendix D: Photographs**

### **Appendix E: Conducted RF Output Power**

**---END---**

---