


Appendix B

RF Power Output




Marker 1 [T1] RBW 3 MHz RF Att 60 dB
Ref Lvl 25.86 dBm VBW 3 MHz
37 dBm 1.85016994 GHz SWT 5 ms Unit dBm

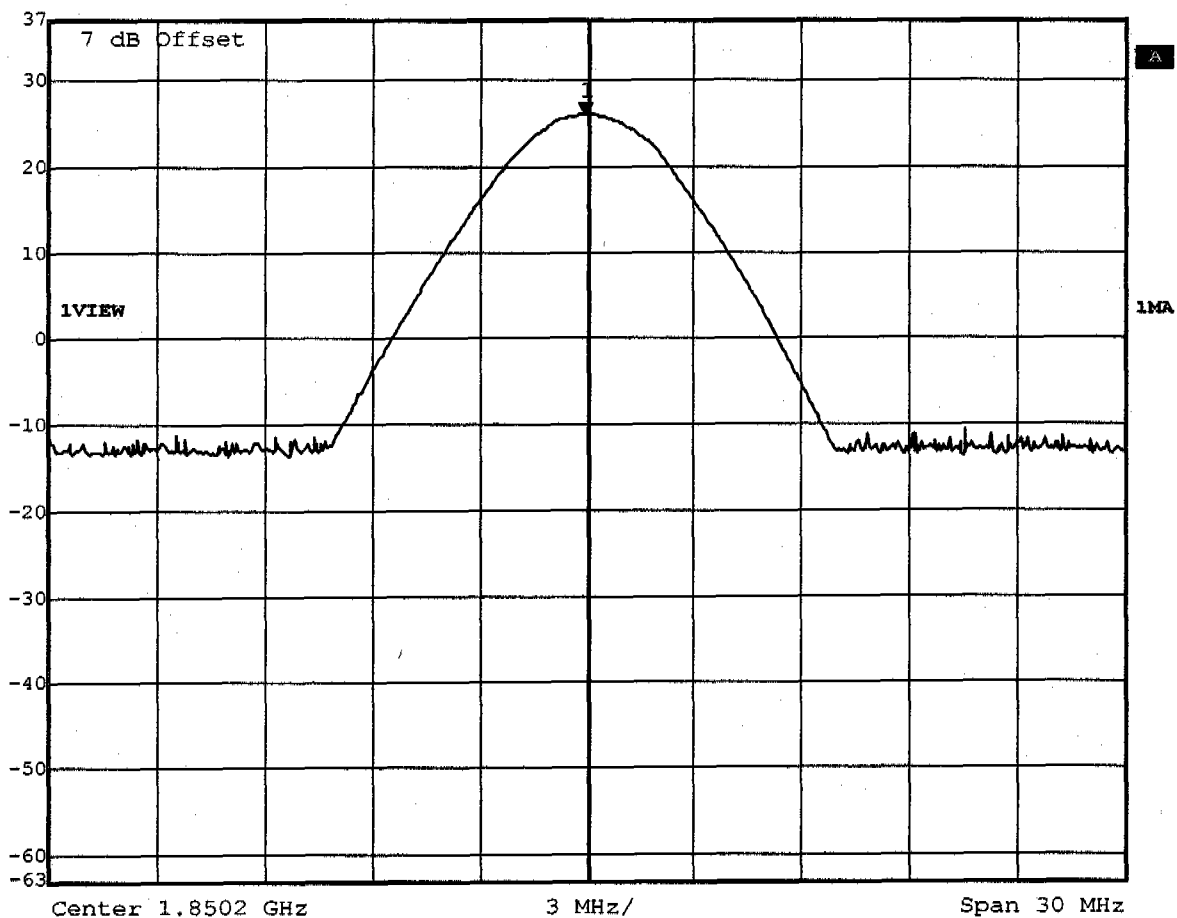

Title: Output Power Conducted Channel 512
Comment A: Peiker -- TPU-Q2426
Date: 15.JUL.2004 11:03:28




Marker 1 [T1] RBW 3 MHz RF Att 60 dB
Ref Lvl 26.30 dBm VBW 3 MHz
37 dBm 1.88009018 GHz SWT 5 ms Unit dBm

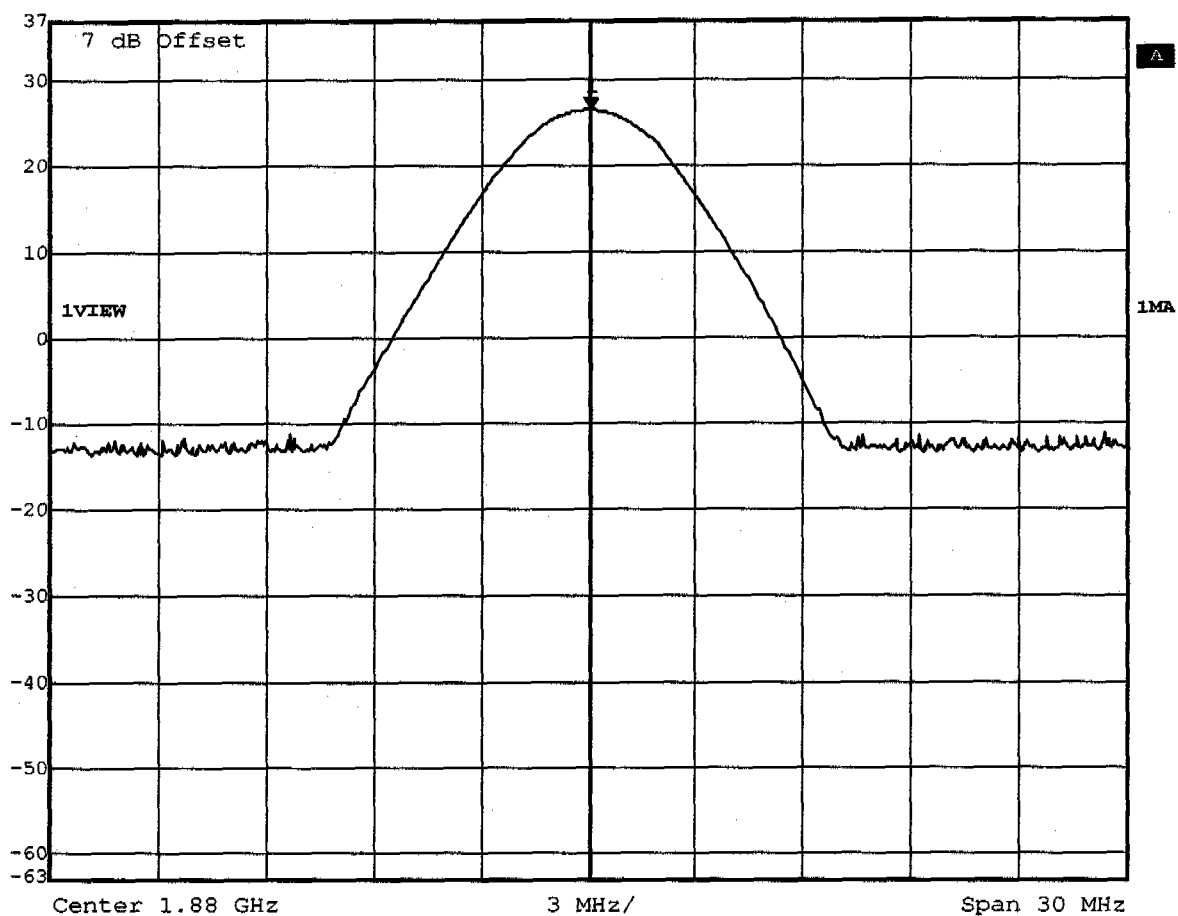

Title: Output Power Conducted Channel 661
Comment A: Peiker -- TPU-Q2426
Date: 15.JUL.2004 11:05:14




Marker 1 [T1] REW 3 MHz RF Att 60 dB
Ref Lvl 26.31 dBm VBW 3 MHz
37 dBm 1.90970982 GHz SWT 5 ms Unit dBm

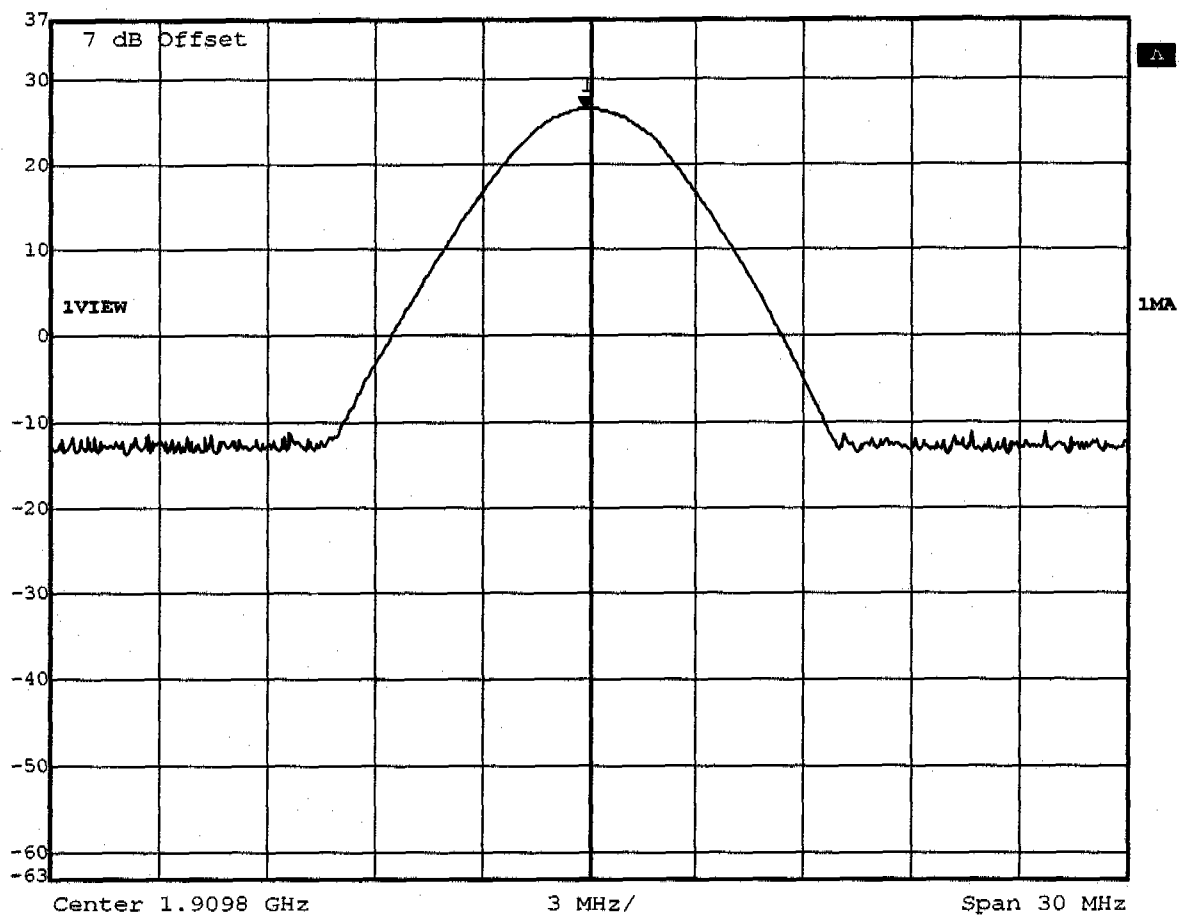

Title: Output Power Conducted Channel 810
Comment A: Peiker -- TPU-Q2426
Date: 15.JUL.2004 11:16:18




Marker 1 [T1] RBW 3 MHz RF Att 50 dB
Ref Lvl 30.86 dBm VBW 3 MHz
36 dBm 824.16993988 MHz SWT 5 ms Unit dBm

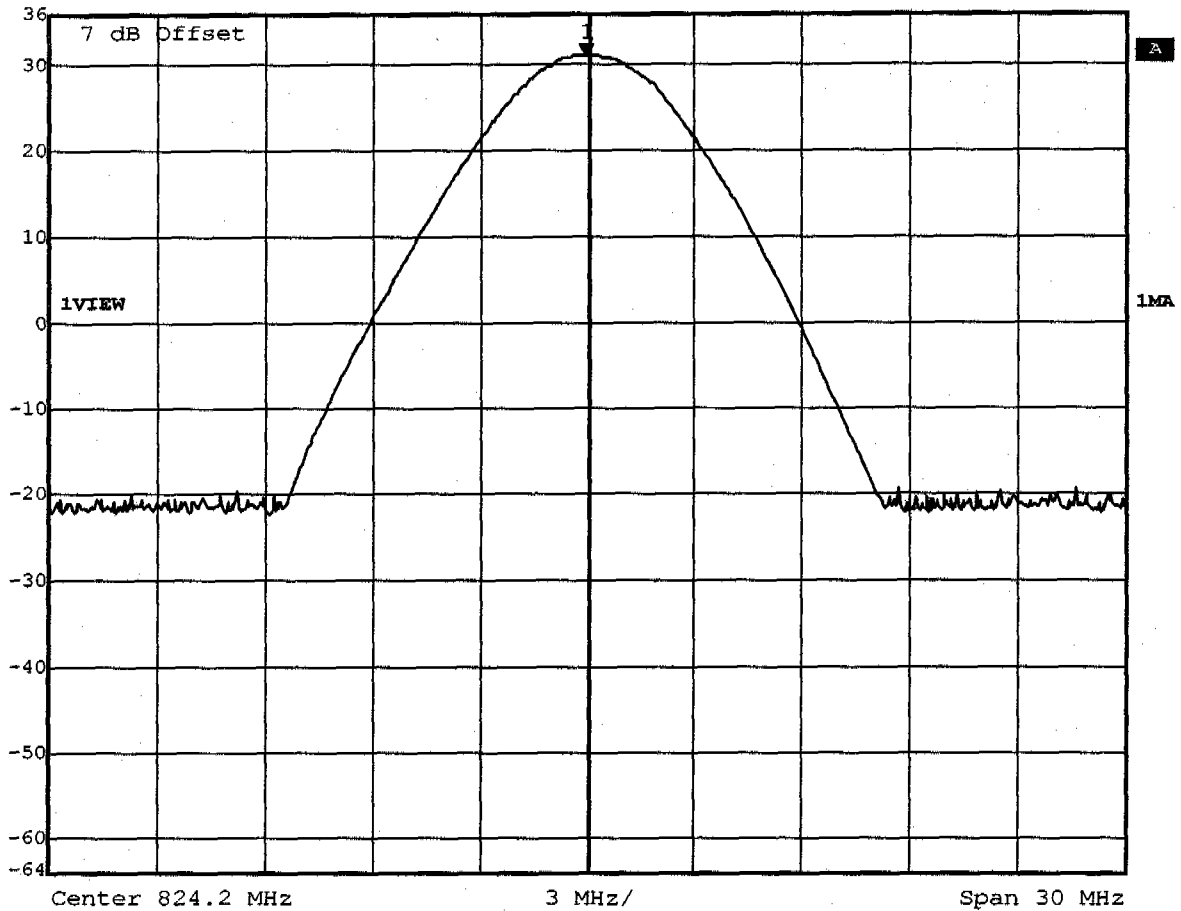

Title: Output Power Conducted Channel 128
Comment A: Peiker -- TPU-Q2426
Date: 15.JUL.2004 10:10:03




Marker 1 [T1] RBW 3 MHz RF Att 50 dB
Ref Lvl 30.72 dBm VBW 3 MHz
36 dBm 836.16993988 MHz SWT 5 ms Unit dBm

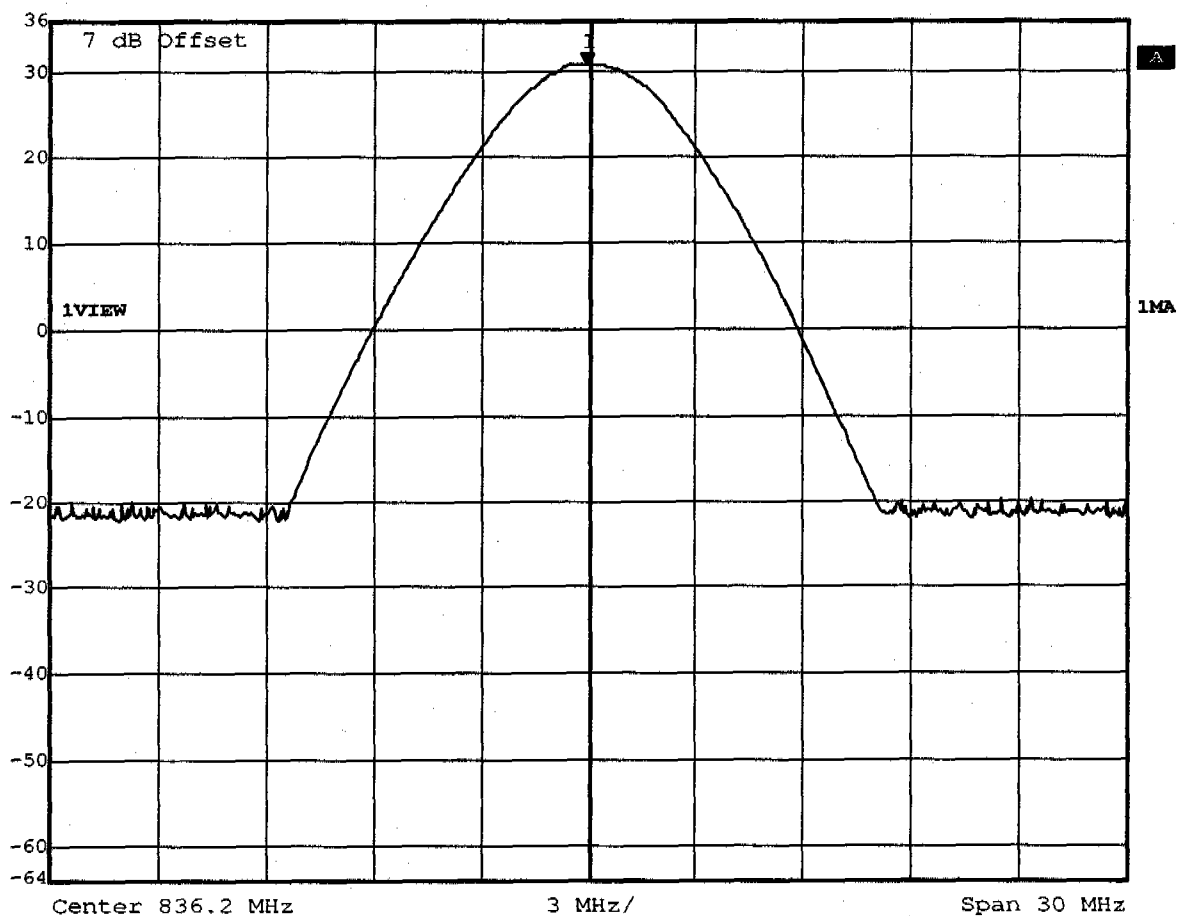

Title: Output Power Conducted Channel 188
Comment A: Peiker -- TPU-Q2426
Date: 15.JUL.2004 10:32:52



Marker 1 [T1] RBW 3 MHz RF Att 50 dB
Ref Lvl 30.58 dBm VBW 3 MHz
36 dBm 848.52945892 MHz SWT 5 ms Unit dBm

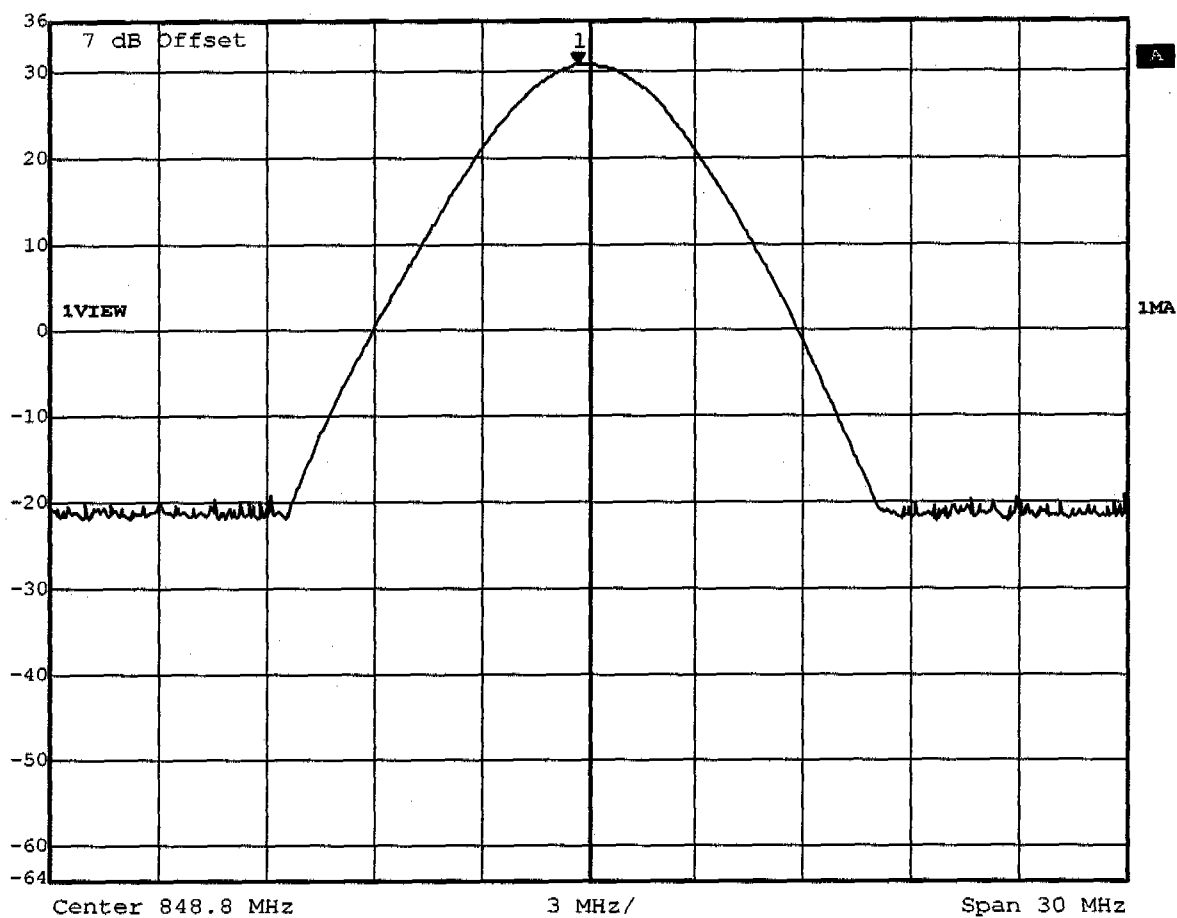


Title: Output Power Conducted Channel 251
Comment A: Peiker -- TPU-Q2426
Date: 15.JUL.2004 10:31:32

Appendix C

ERP, EIRP


Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 512
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §24.232
Comment 1: Dist.: 3m, Ant.: HL025, PCL 0
Comment 2: Freq: 1.850GHz, Pmax: 24.25dBm, RBW: 3MHz

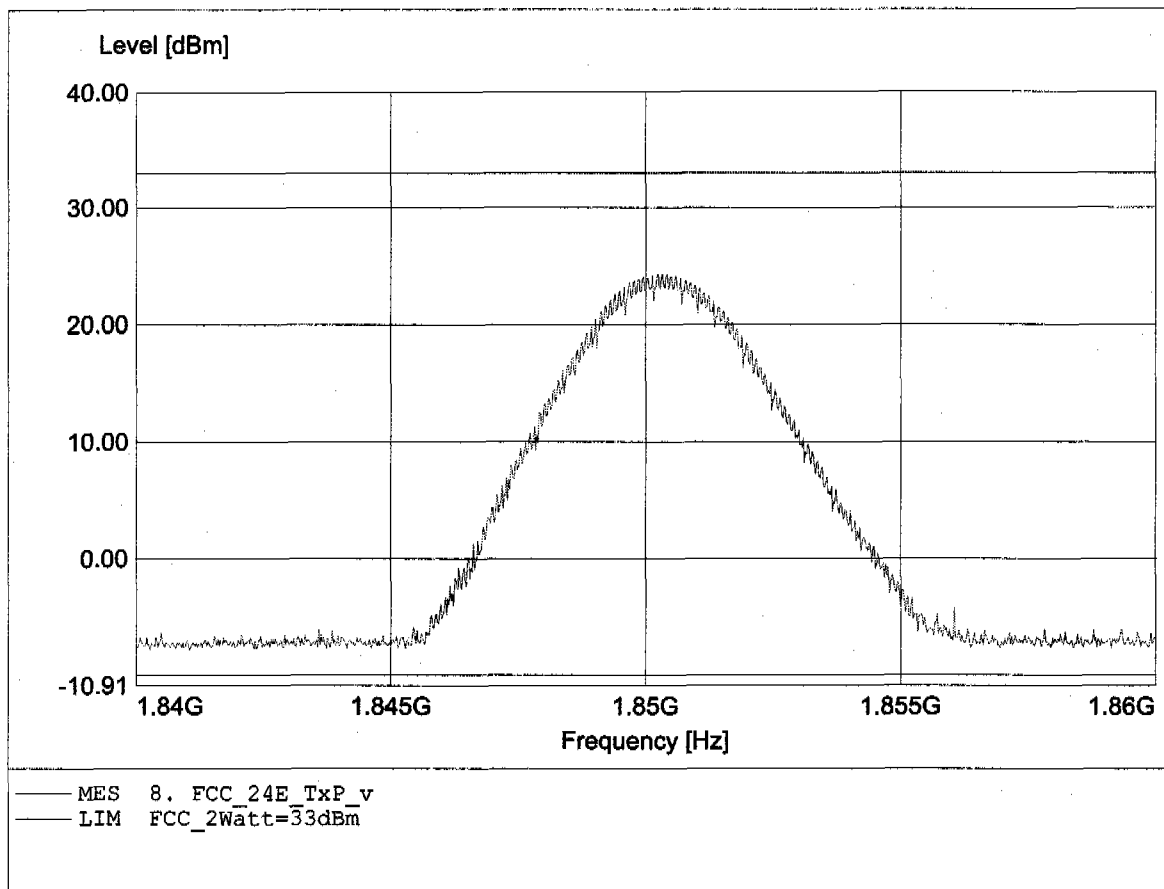


Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 512
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S24.232
Comment 1: Dist.: 3m, Ant.: HL025, PCL 0
Comment 2: Freq: 1.850GHz, Pmax: 21.88dBm, RBW: 3MHz

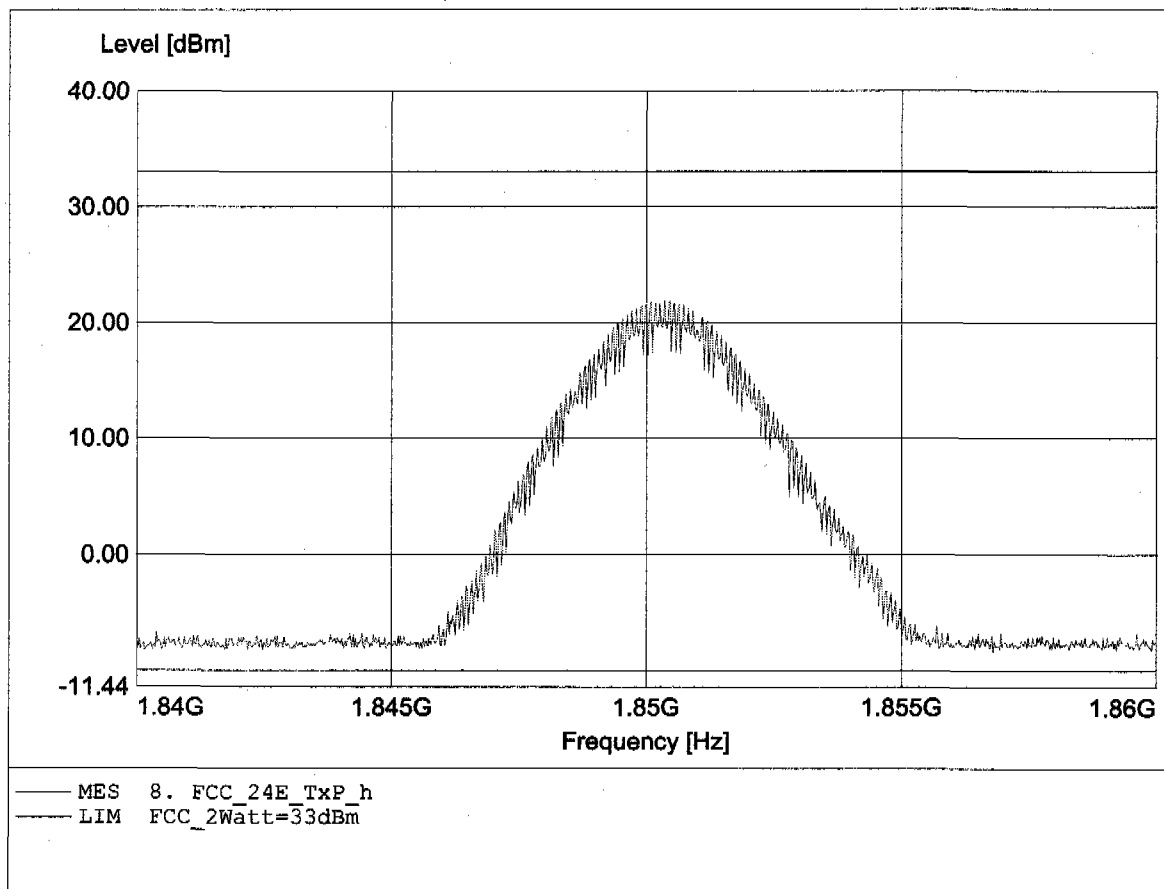


Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 661
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S24.232
Comment 1: Dist.: 3m, Ant.: HL025, PCL 0
Comment 2: Freq: 1.880GHz, Pmax: 26.28dBm, RBW: 3MHz

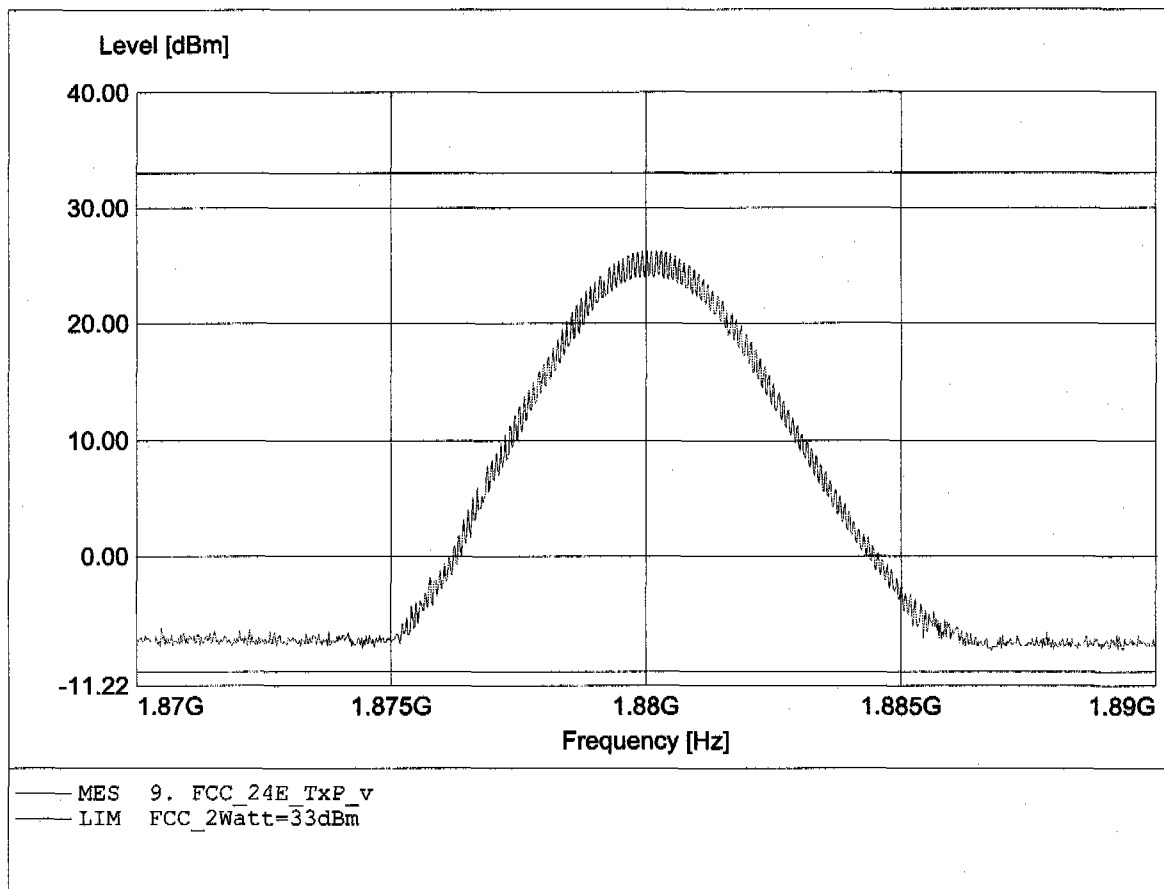


Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 661
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S24.232
Comment 1: Dist.: 3m, Ant.: HL025, PCL 0
Comment 2: Freq: 1.880GHz, Pmax: 23.03dBm, RBW: 3MHz

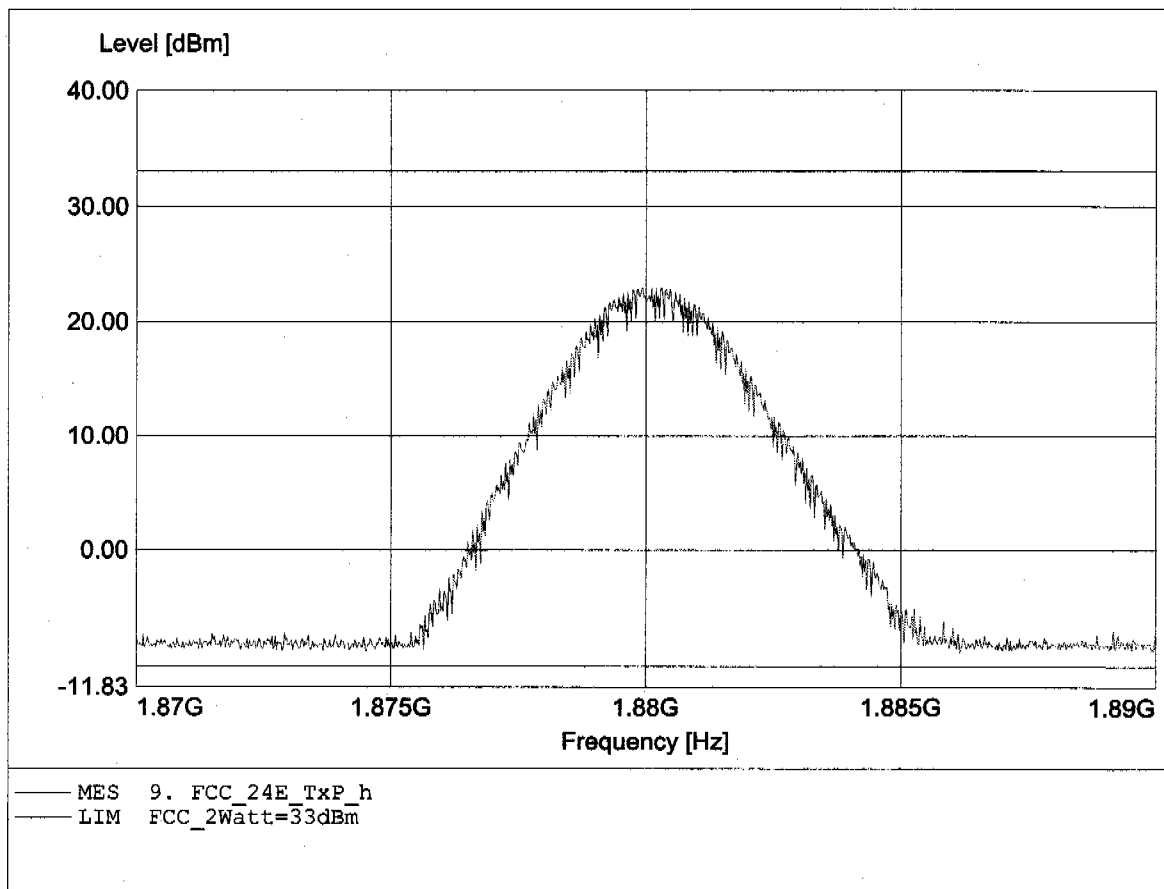


**Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E**

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 810
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S24.232
Comment 1: Dist.: 3m, Ant.: HL025, PCL 0
Comment 2: Freq: 1.910GHz, Pmax: 23.70dBm, RBW: 3MHz

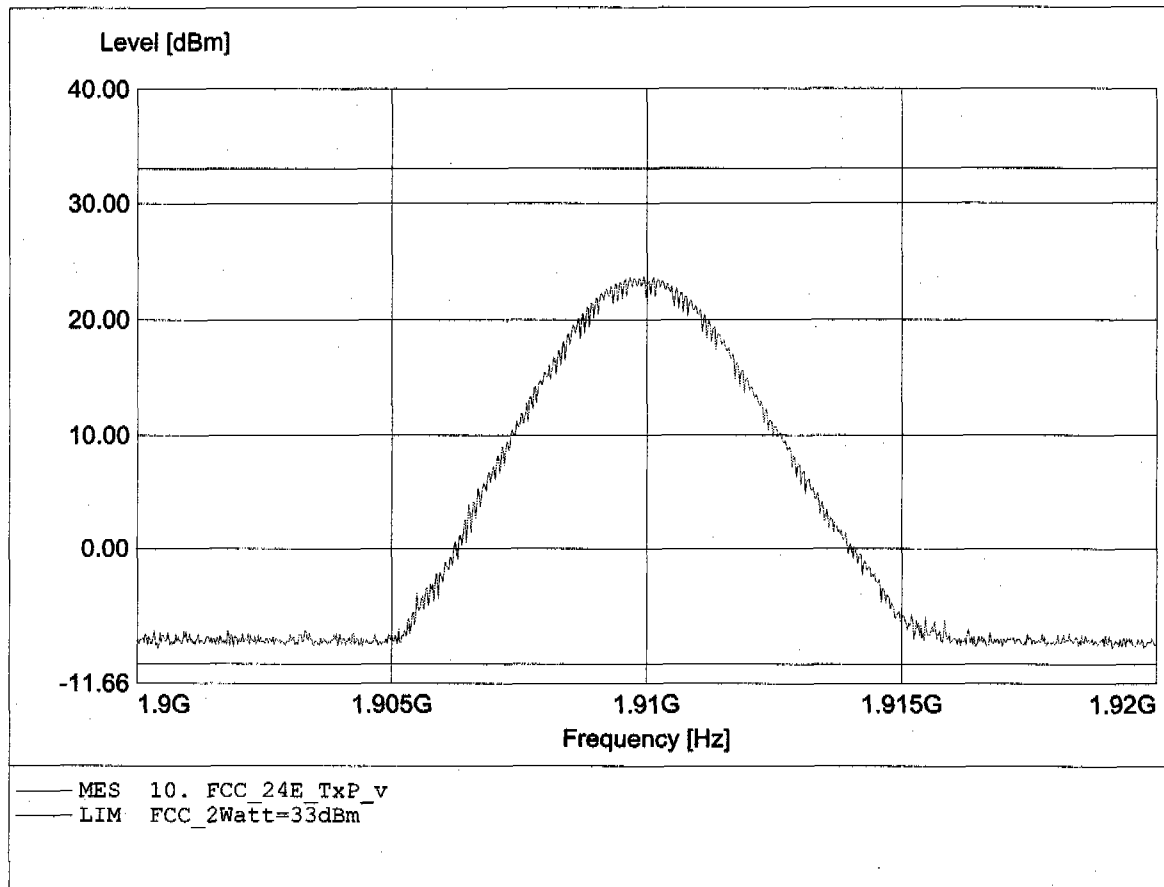


Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 810
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S24.232
Comment 1: Dist.: 3m, Ant.: HL025, PCL 0
Comment 2: Freq: 1.910GHz, Pmax: 22.96dBm, RBW: 3MHz

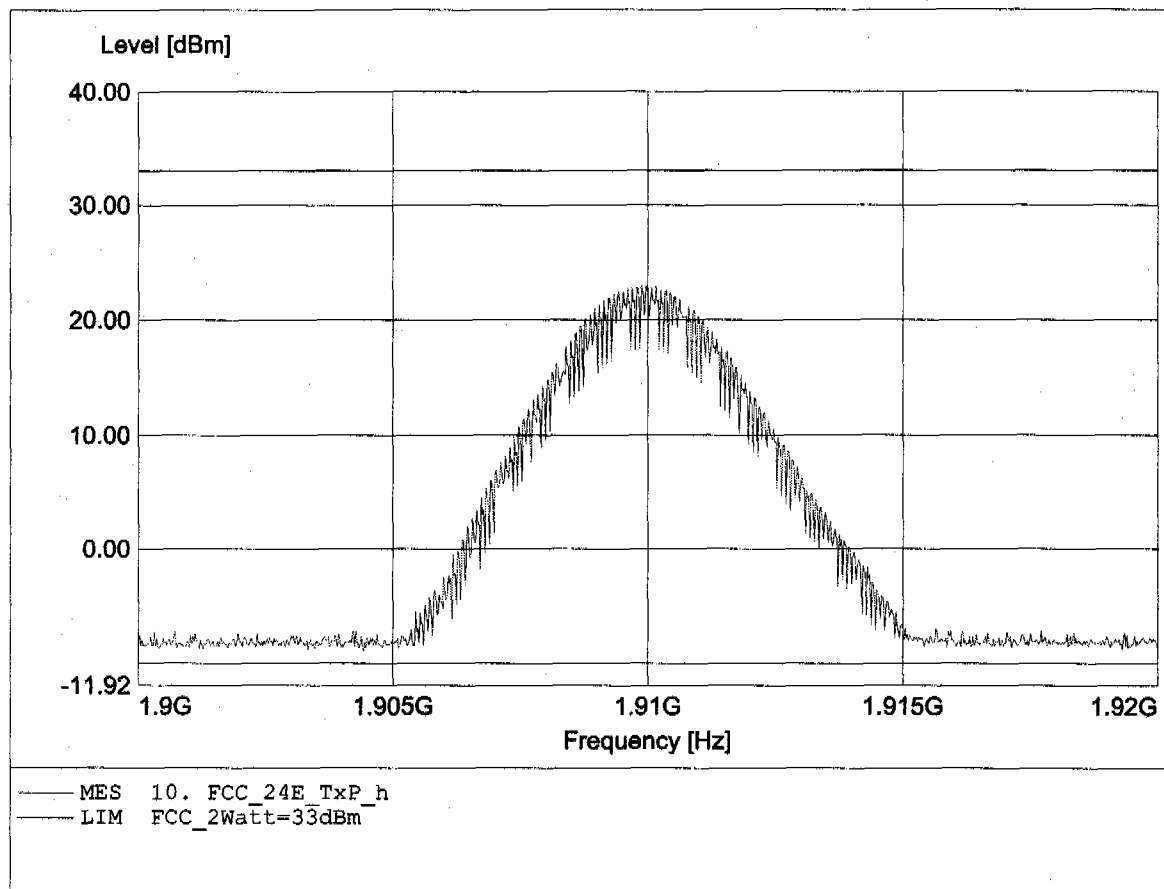


Effective Radiated Power
FCC RULES PART 22 SUBPART H

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 128
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §22.913
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 824.389MHz, Pmax: 27.27dBm, RBW: 3MHz

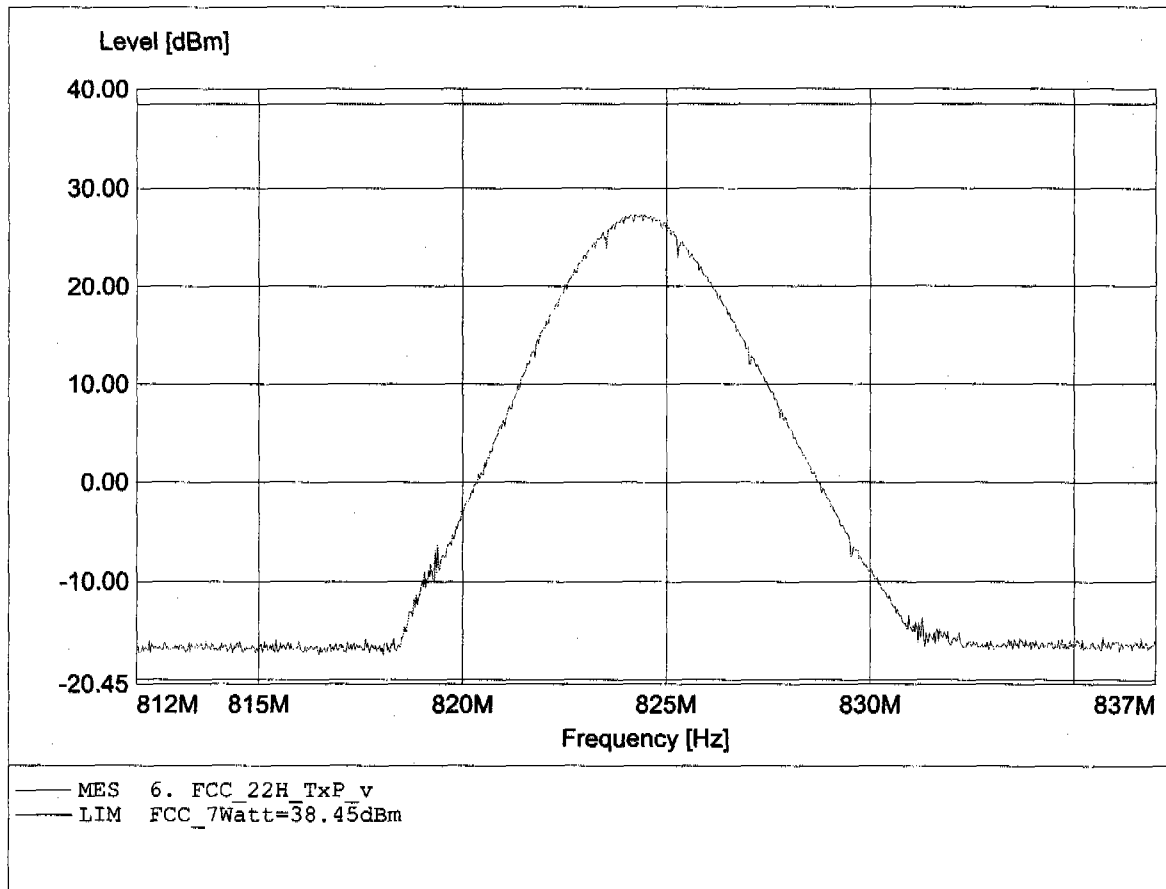


Effective Radiated Power
FCC RULES PART 22 SUBPART H

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 128
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §22.913
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 824.333MHz, Pmax: 25.17dBm, RBW: 3MHz

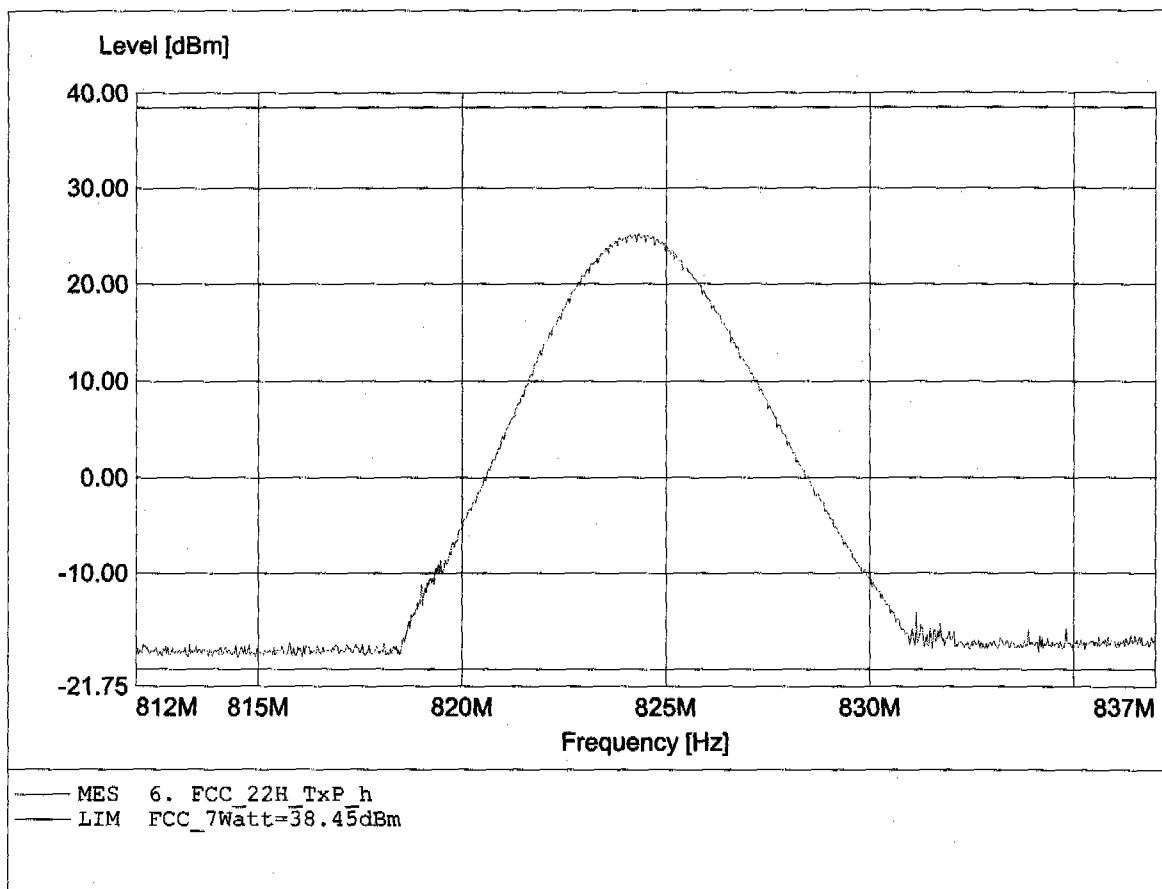


**Effective Radiated Power
FCC RULES PART 22 SUBPART H**

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 188
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §22.913
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 836.133MHz, Pmax: 28.37dBm, RBW: 3MHz

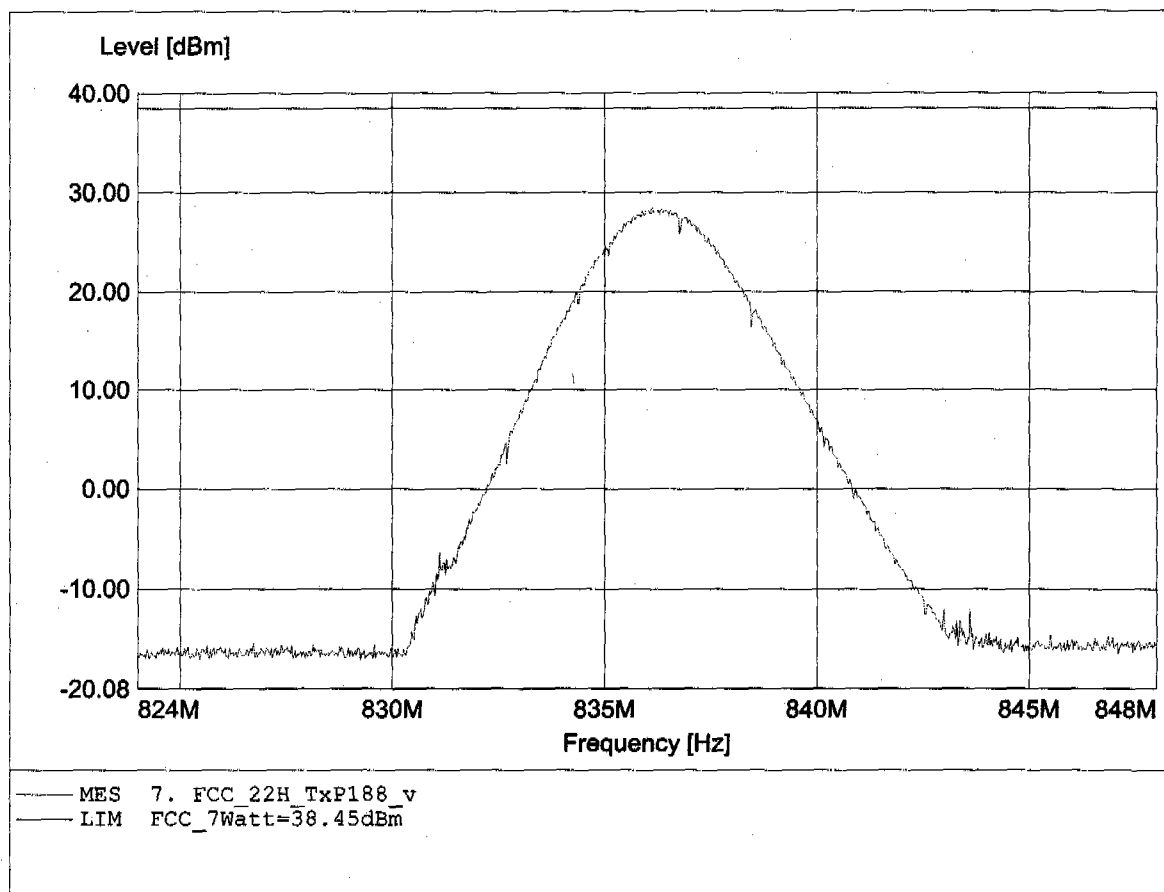


Effective Radiated Power
FCC RULES PART 22 SUBPART H

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 188
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S22.913
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 836.187MHz, Pmax: 25.03dBm, RBW: 3MHz

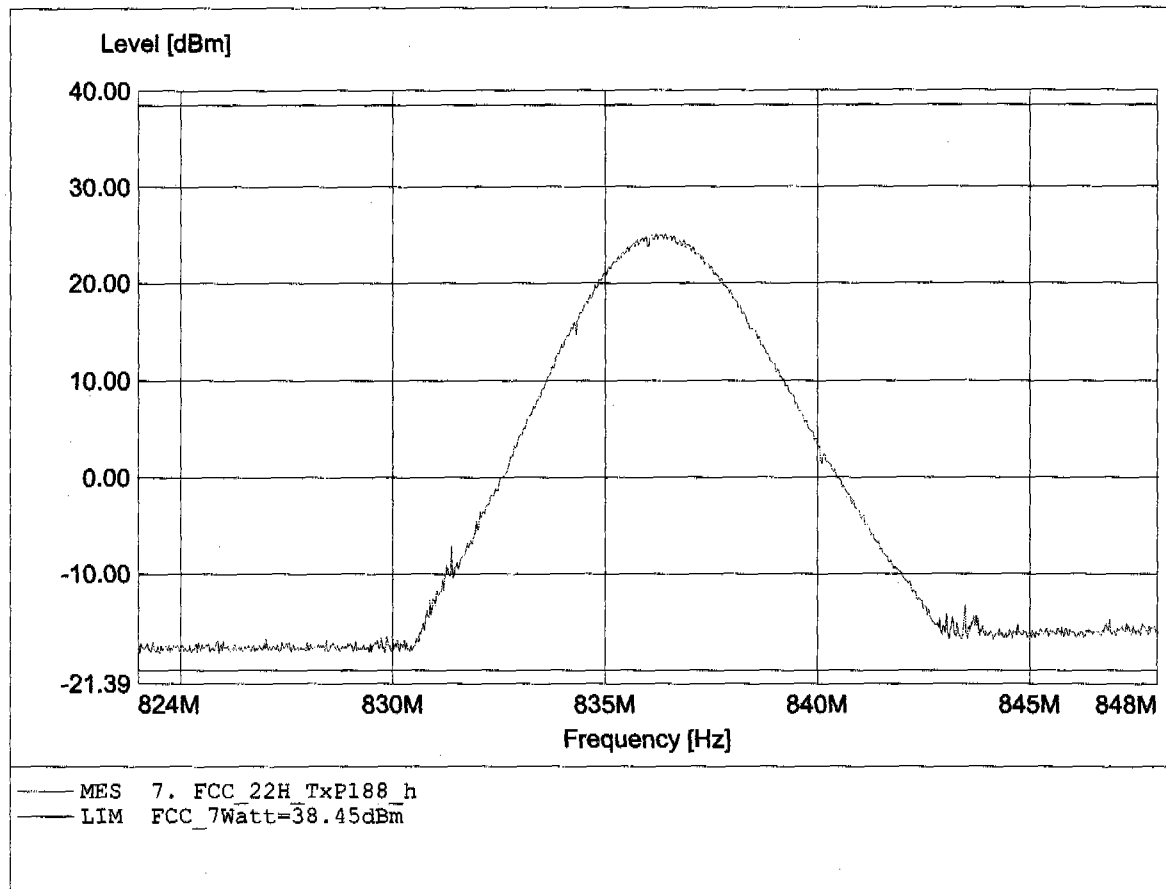


Effective Radiated Power
FCC RULES PART 22 SUBPART H

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 251
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §22.913
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 849.000MHz, Pmax: 29.14dBm, RBW: 3MHz

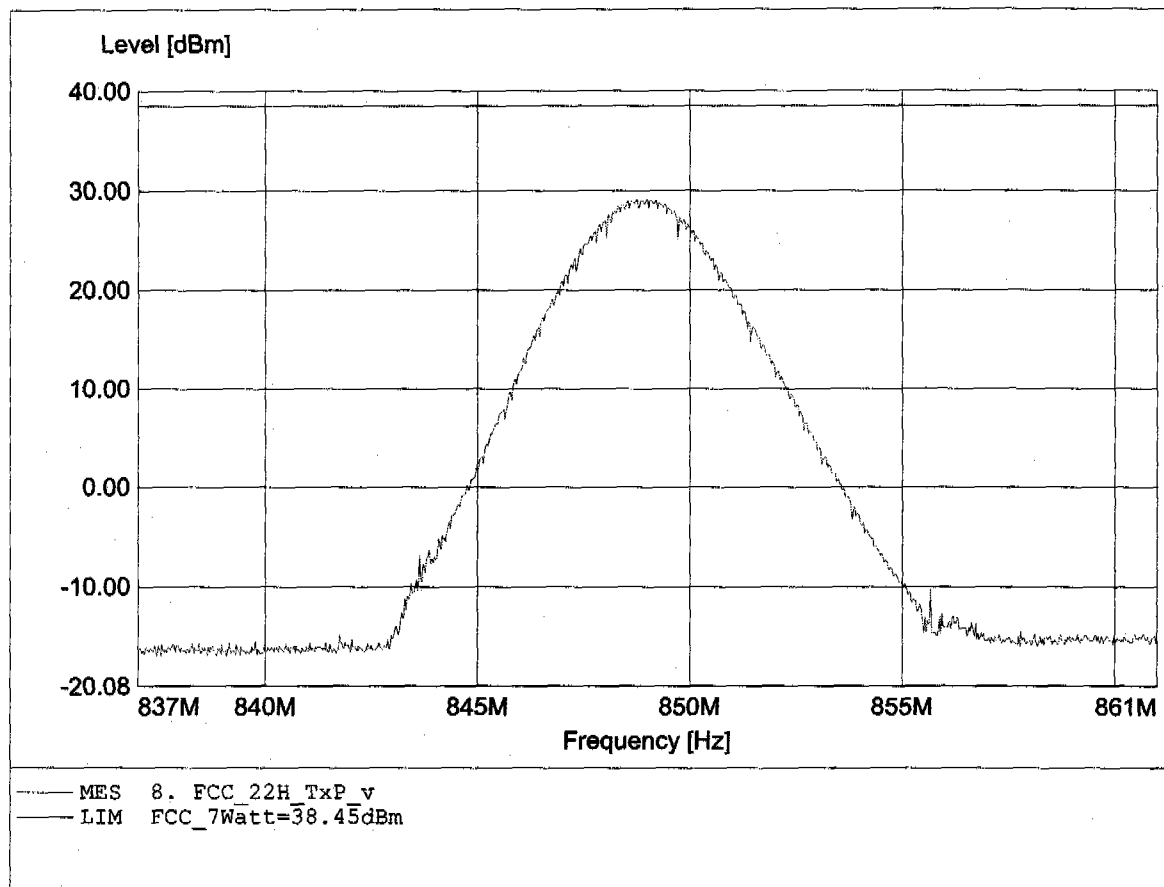

Effective Radiated Power
FCC RULES PART 22 SUBPART H

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 251
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S22.913
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 848.947MHz, Pmax: 26.48dBm, RBW: 3MHz

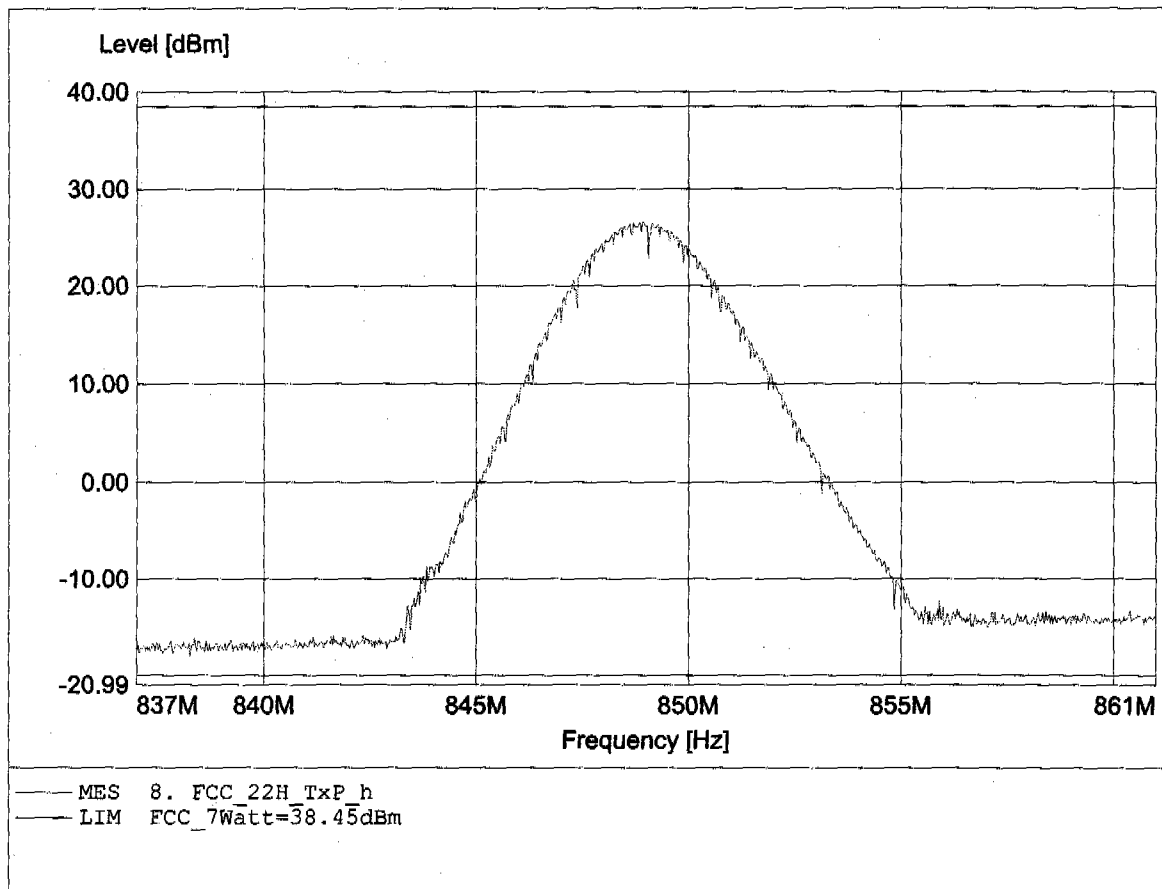

Appendix D

Modulation Requirements

Appendix E

Audio Filter Characteristics

Appendix F


Emission Limitation

Appendix G

Occupied Bandwidth




Marker 1 [T1] RBW 3 kHz RF Att 60 dB
Ref Lvl 17.67 dBm VBW 3 kHz
37 dBm 1.85018297 GHz SWT 280 ms Unit dBm

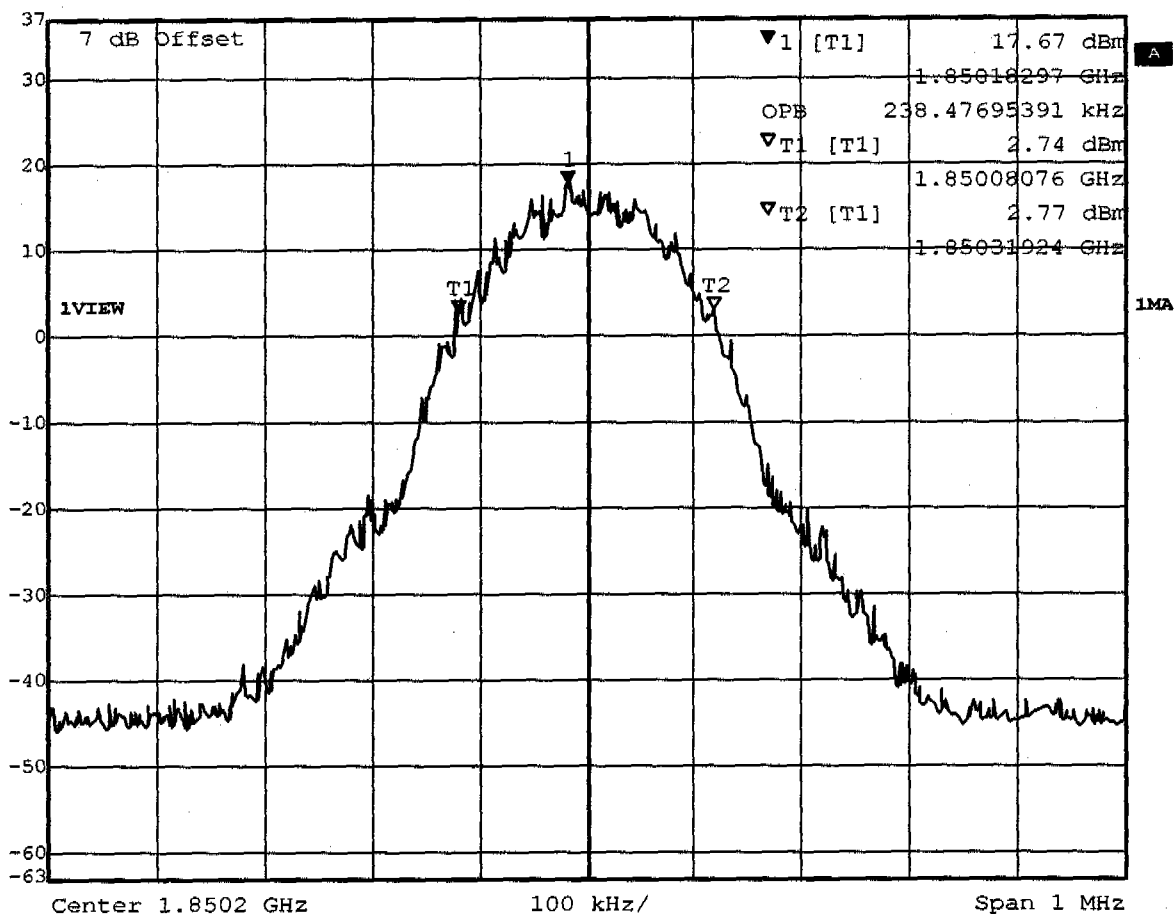

Title: Occupied Power Bandwidth Channel 512
Comment A: Peiker -- TPU-Q2426
Date: 15.JUL.2004 10:59:08




Marker 1 [T1] RBW 3 kHz RF Att 60 dB
Ref Lvl 18.51 dBm VBW 3 kHz
37 dBm 1.87998497 GHz SWT 280 ms Unit dBm

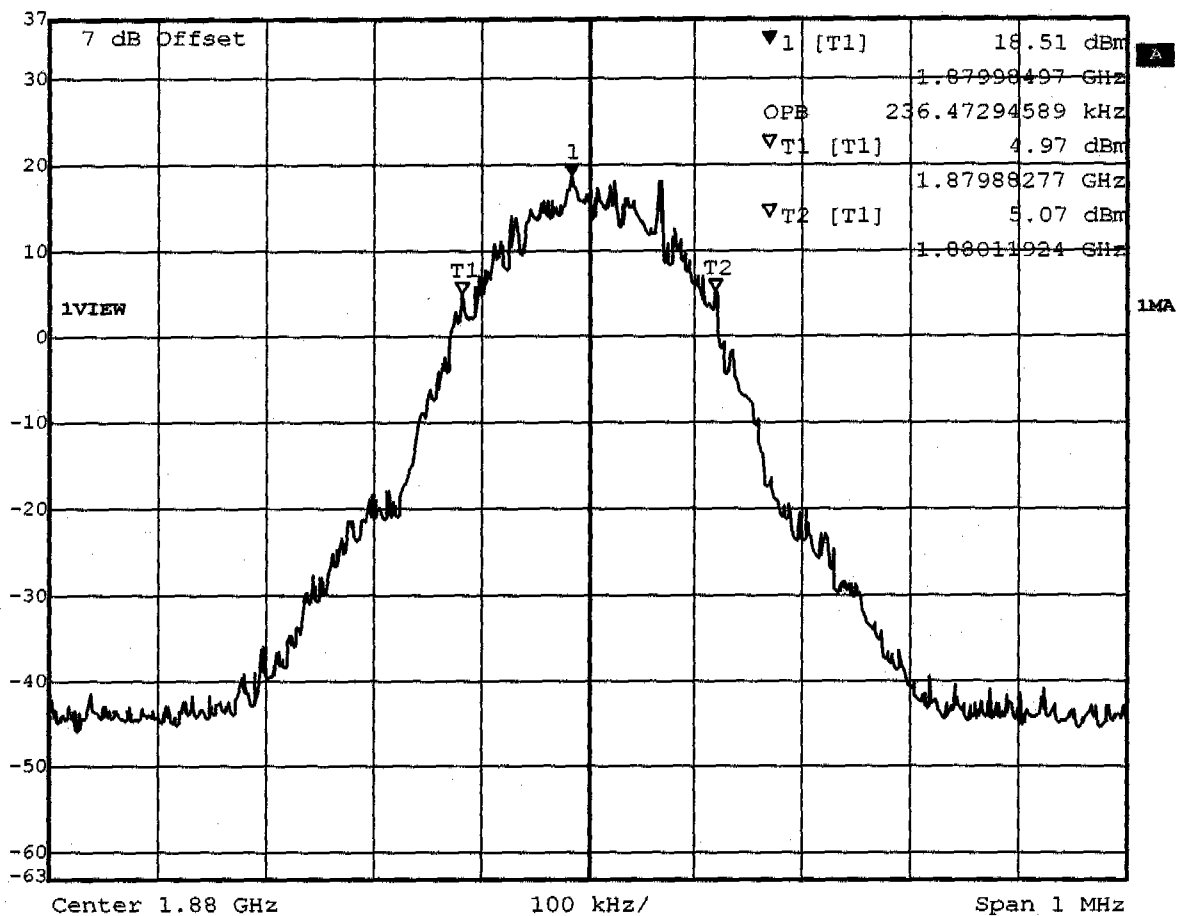

Title: Occupied Power Bandwidth Channel 661
Comment A: Peiker -- TPU-Q2426
Date: 15.JUL.2004 11:06:56




Marker 1 [T1] RBW 3 kHz RF Att 60 dB
Ref Lvl 19.04 dBm VBW 3 kHz
37 dBm 1.90978697 GHz SWT 280 ms Unit dBm

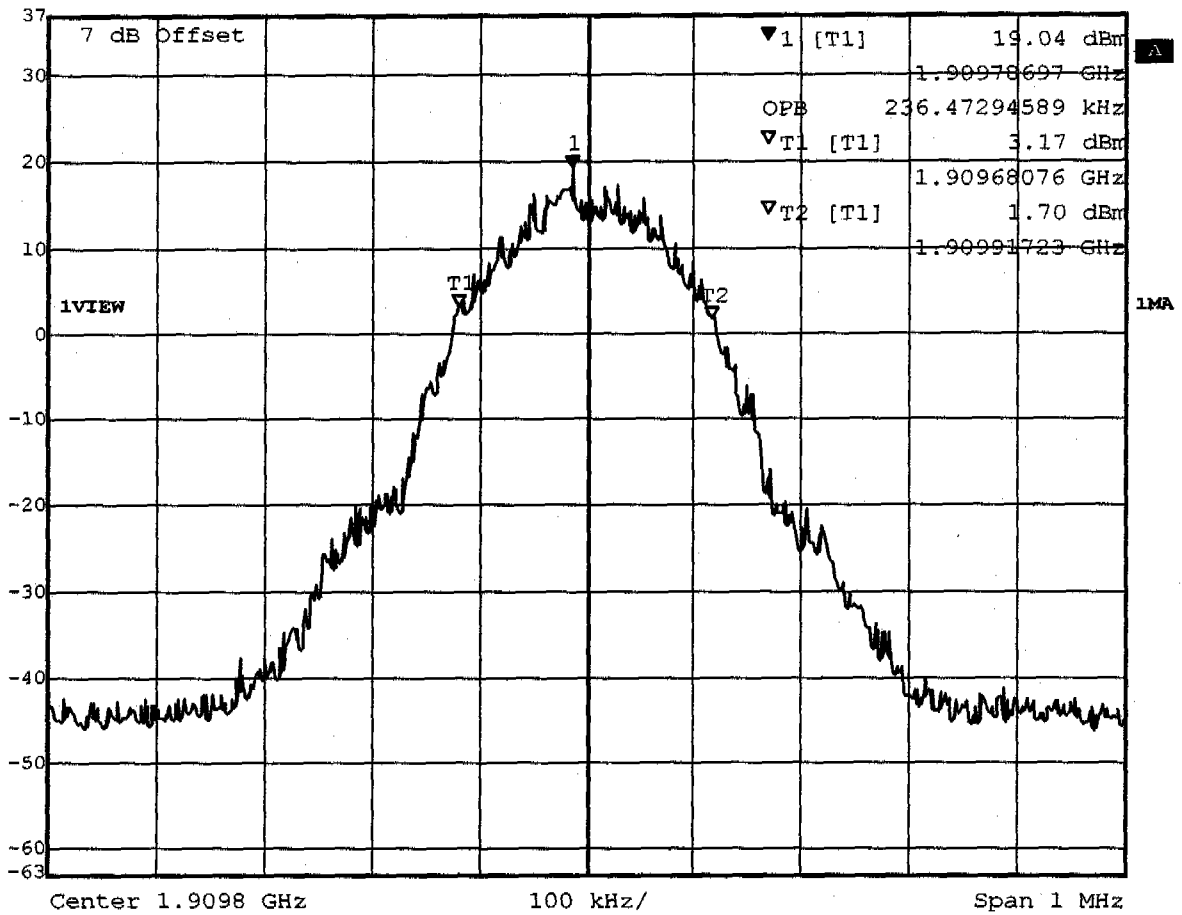

Title: Occupied Power Bandwidth Channel 810
Comment A: Peiker -- TPU-Q2426
Date: 15.JUL.2004 11:14:54




Marker 1 [T1 ndB] RBW 3 kHz RF Att 60 dB
Ref Lvl ndB 26.00 dB VBW 3 kHz
37 dBm BW 288.57715431 kHz SWT 280 ms Unit dBm

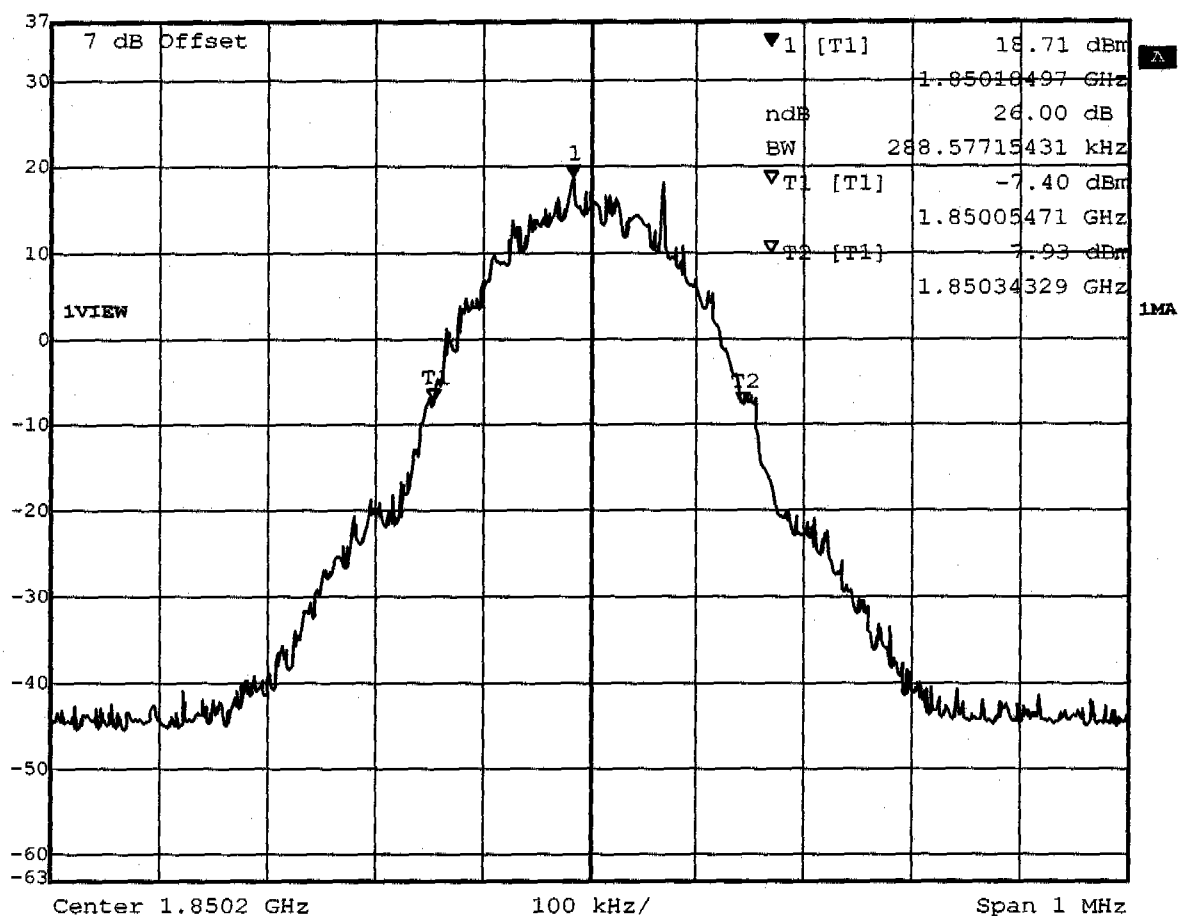

Title: -26 dBc Emission Bandwidth Channel 512
Comment A: Peiker -- TPU-Q2426
Date: 15.JUL.2004 10:57:11




Marker 1 [T1 ndB] RBW 3 kHz RF Att 60 dB
Ref Lvl ndB 26.00 dB VBW 3 kHz
37 dBm BW 292.58517034 kHz SWT 280 ms Unit dBm

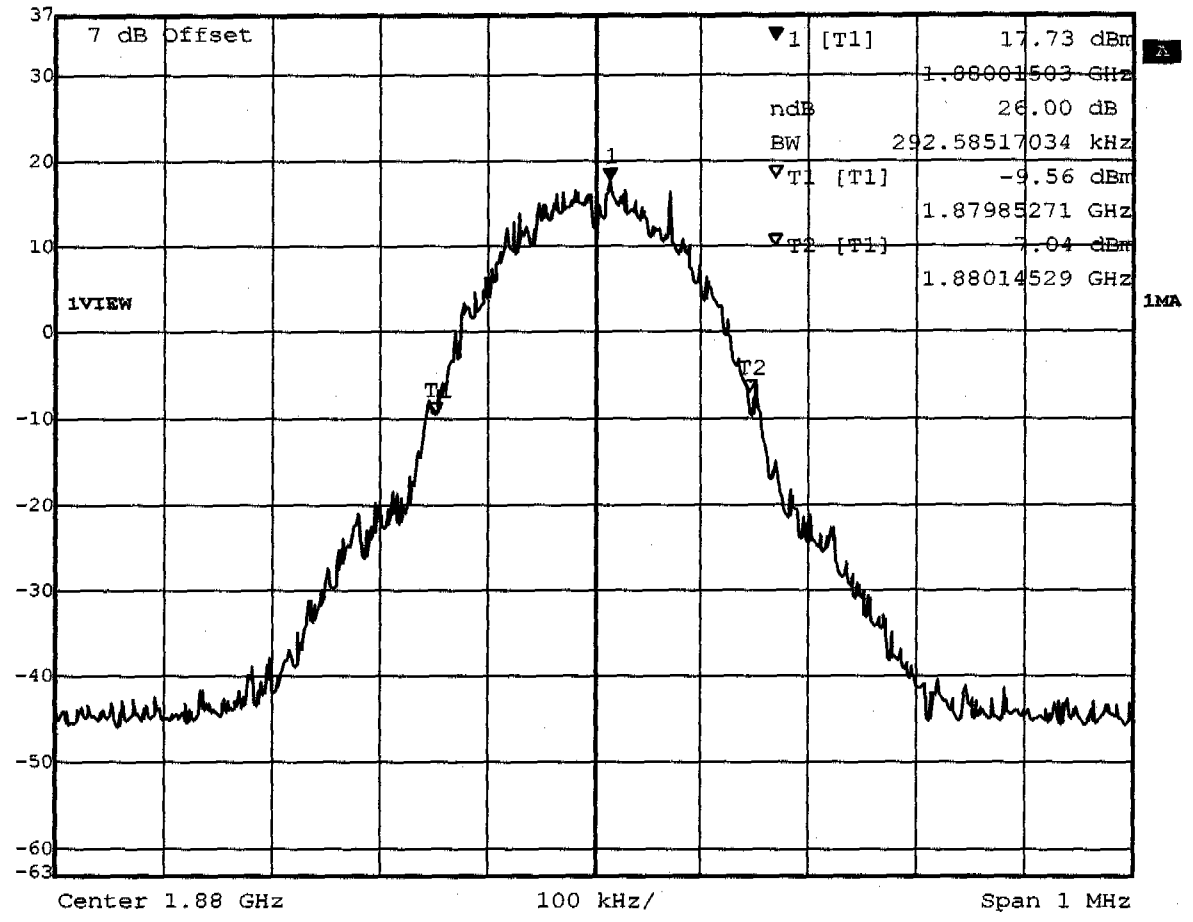

Title: -26 dBc Emission Bandwidth Channel 661
Comment A: Peiker -- TPU-Q2426
Date: 15.JUL.2004 11:08:13




Marker 1 [T1 ndB] RBW 3 kHz RF Att 60 dB
Ref Lvl ndB 26.00 dB VBW 3 kHz
37 dBm BW 296.59318637 kHz SWT 280 ms Unit dBm

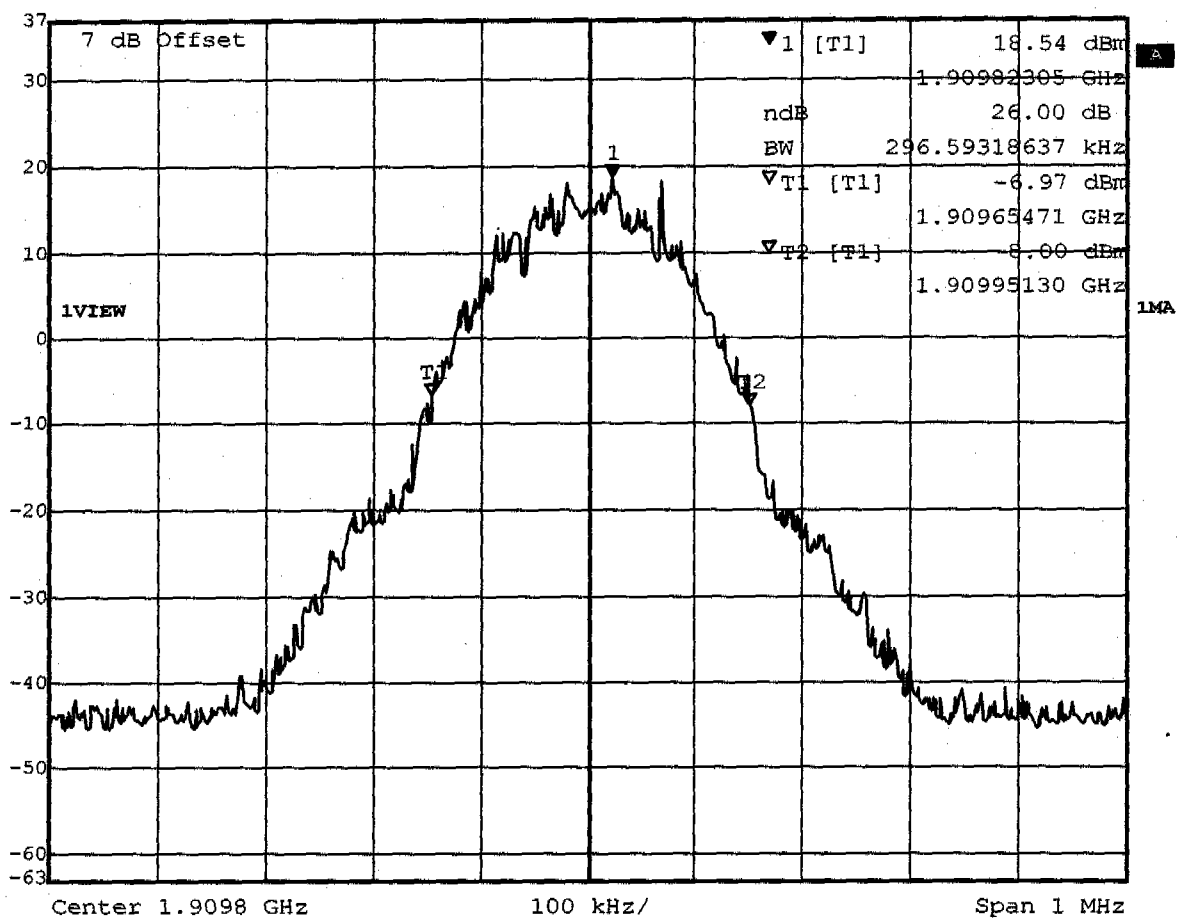

Title: -26 dBc Emission Bandwidth Channel 810
Comment A: Peiker -- TPU-Q2426
Date: 15.JUL.2004 11:13:35




Marker 1 [T1] RBW 3 kHz RF Att 50 dB
Ref Lvl 22.38 dBm VBW 3 kHz
36 dBm 836.18496994 MHz SWT 280 ms Unit dBm

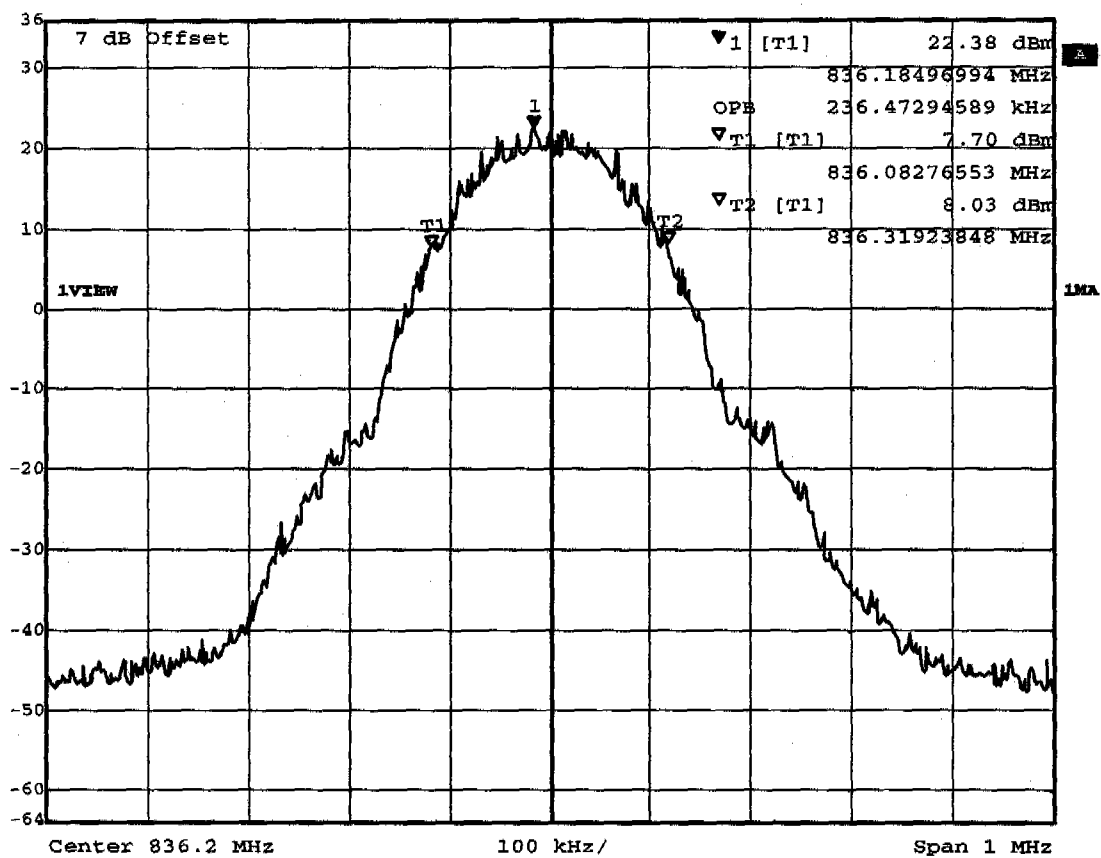

Title: Occupied Bandwidth Channel 188
Comment A: Peiker -- TPU-Q2426
Date: 15.JUL.2004 10:35:03




Marker 1 [T1] RBW 3 kHz RF Att 50 dB
Ref Lvl 23.69 dBm VBW 3 kHz
36 dBm 824.22104208 MHz SWT 280 ms Unit dBm

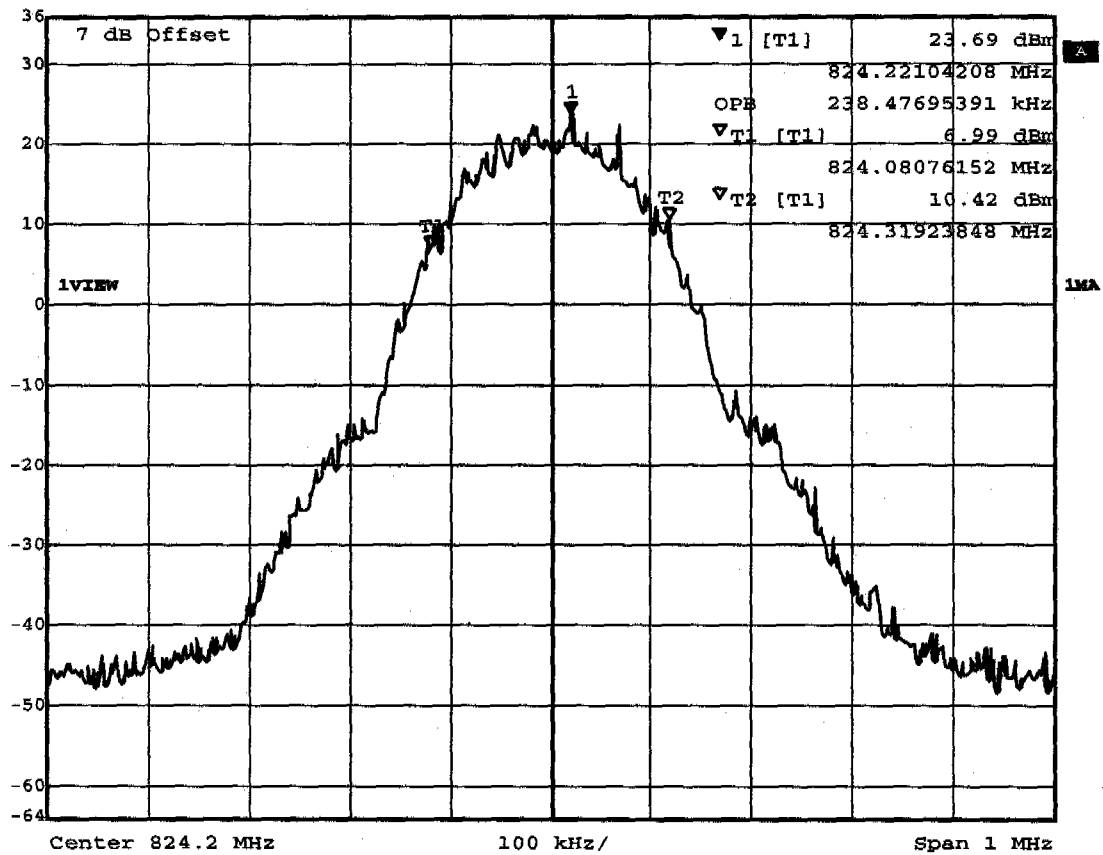

Title: Occupied Bandwidth Channel 128
Comment A: Peiker -- TPU-Q2426
Date: 15.JUL.2004 10:08:42




Marker 1 [T1] RBW 3 kHz RF Att 50 dB
Ref Lvl 21.97 dBm VBW 3 kHz
36 dBm 848.78296593 MHz SWT 280 ms Unit dBm

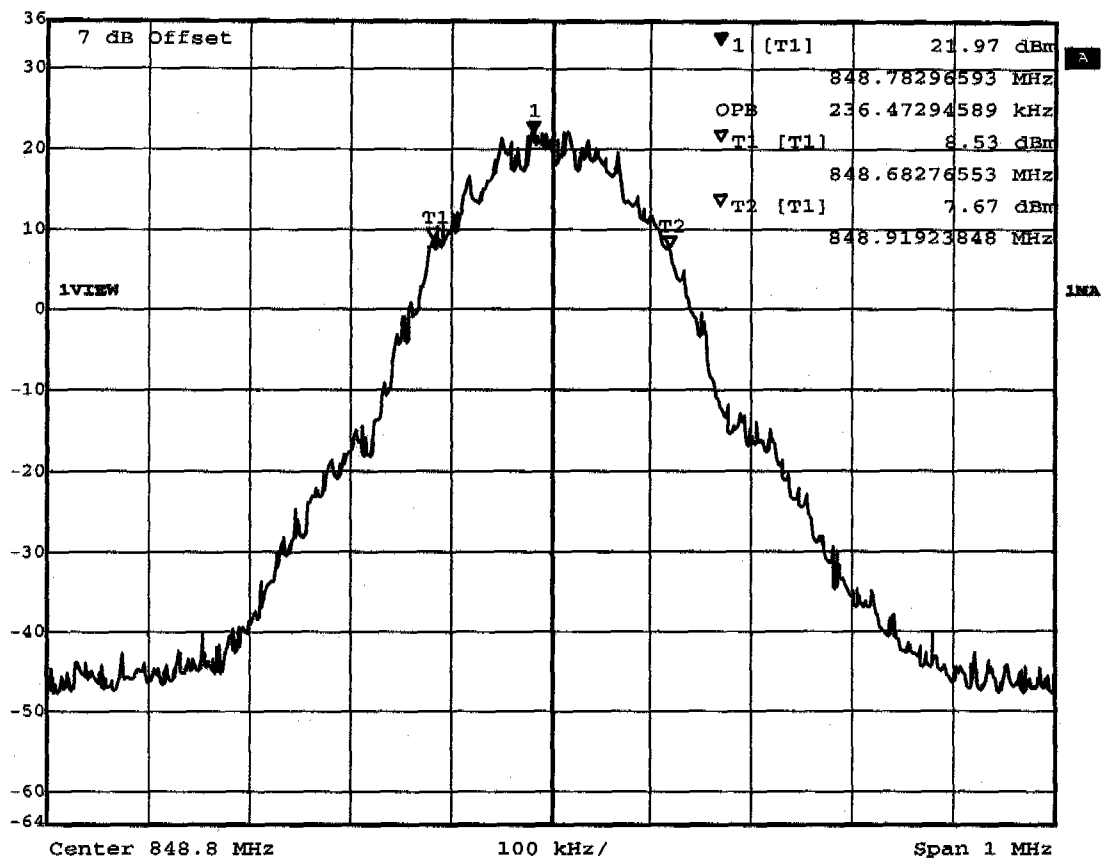

Title: Occupied Bandwidth Channel 251
Comment A: Peiker -- TPU-Q2426
Date: 15.JUL.2004 10:27:37




Marker 1 [T1 ndB] RBW 3 kHz RF Att 50 dB
Ref Lvl ndB 26.00 dB VBW 3 kHz
36 dBm BW 300.60120240 kHz SWT 280 ms Unit dBm

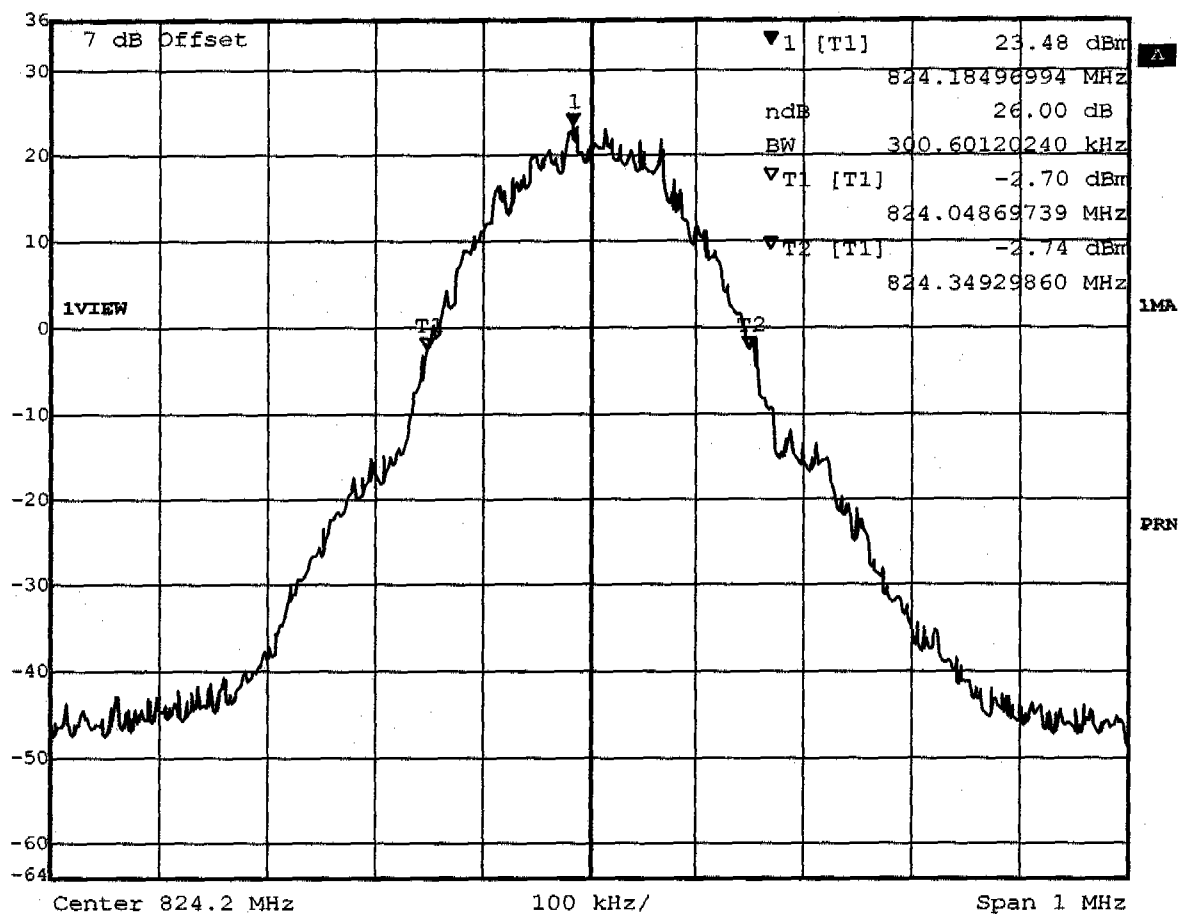

Title: -26dBc Emission Bandwidth Channel 128
Comment A: Peiker -- TPU-Q2426
Date: 15.JUL.2004 10:06:20




Marker 1 [T1 ndB] RBW 3 kHz RF Att 50 dB
Ref Lvl ndB 26.00 dB VBW 3 kHz
36 dBm BW 294.58917836 kHz SWT 280 ms Unit dBm

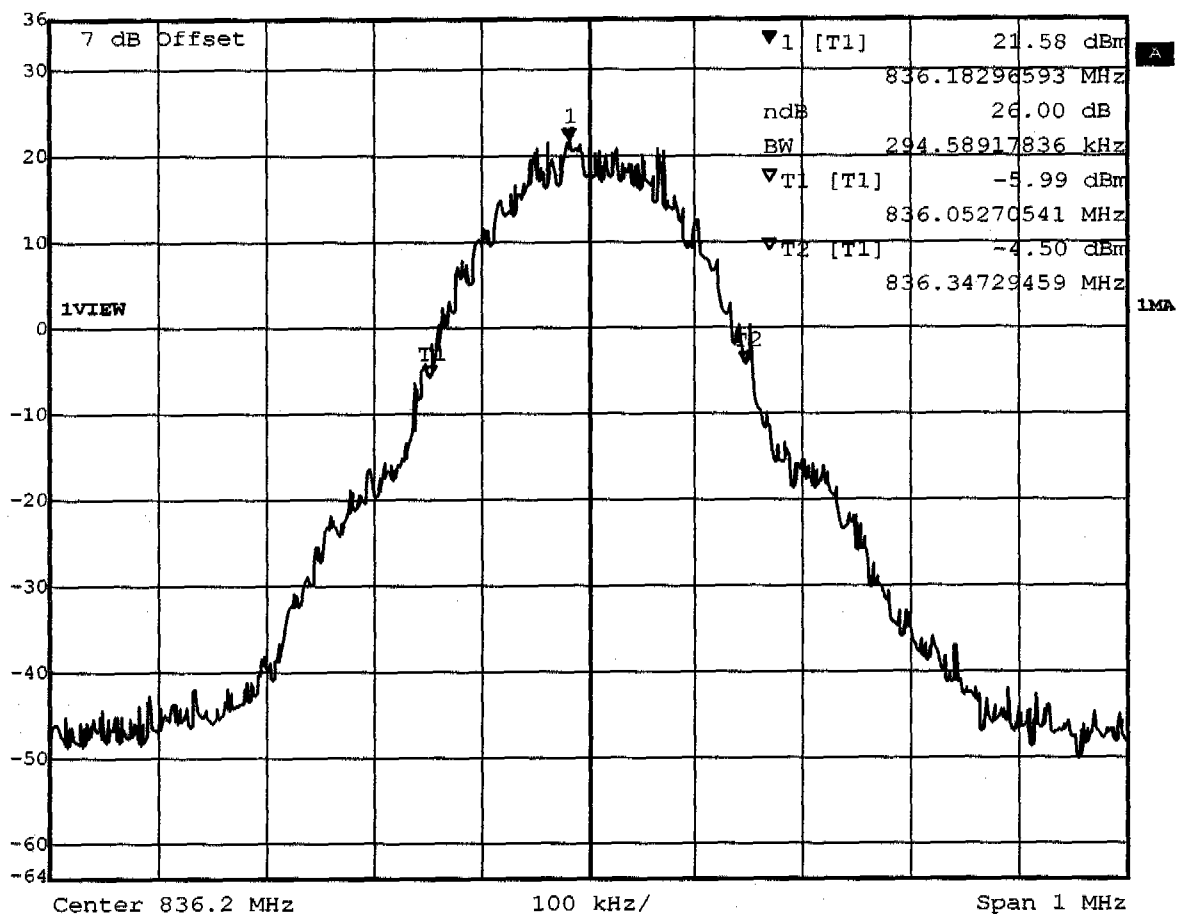

Title: -26dBc Emission Bandwidth Channel 188
Comment A: Peiker -- TPU-Q2426
Date: 15.JUL.2004 10:38:16



Marker 1 [T1 ndB] RBW 3 kHz RF Att 50 dB
Ref Lvl ndB 26.00 dB VBW 3 kHz
36 dBm BW 290.58116232 kHz SWT 280 ms Unit dBm

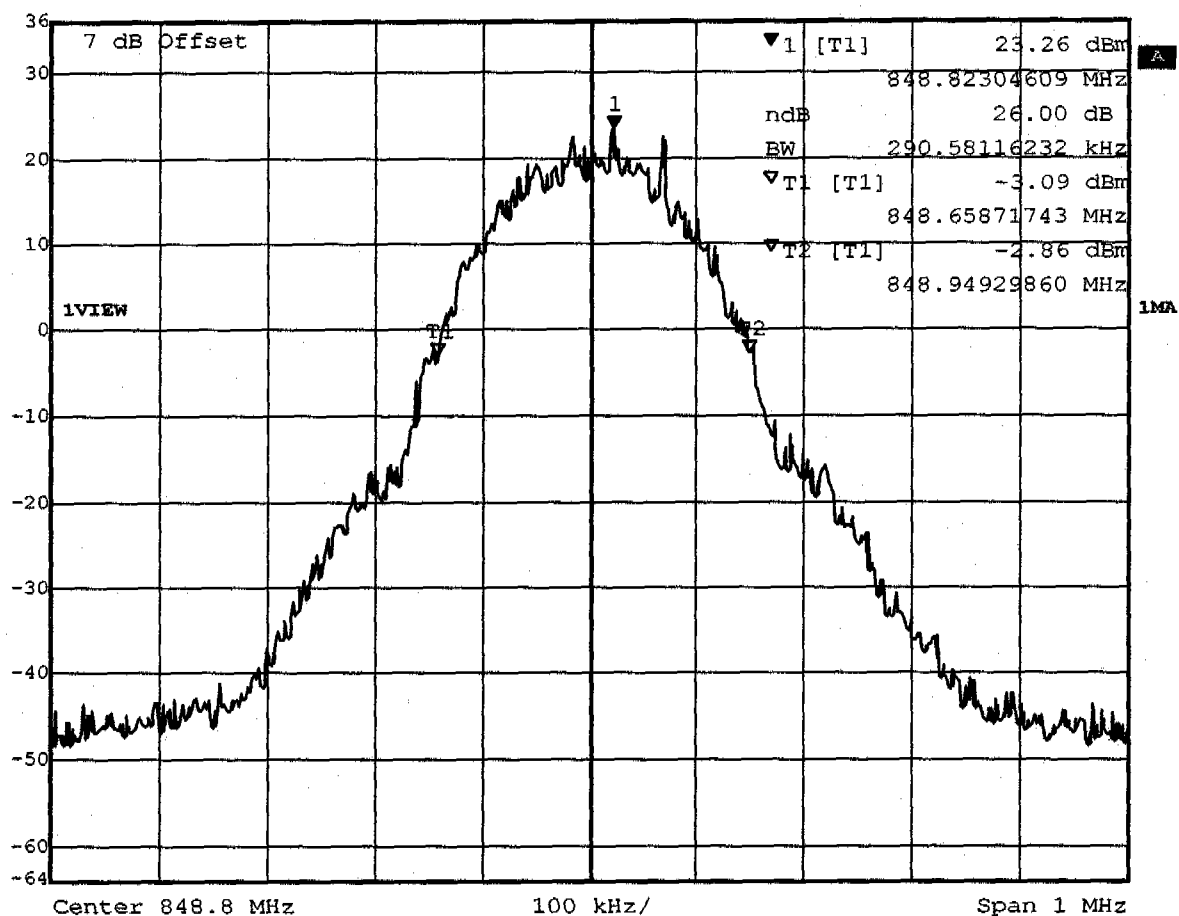

Title: -26dBc Emission Bandwidth Channel 251
Comment A: Peiker -- TPU-Q2426
Date: 15.JUL.2004 10:29:59

Appendix H


Out of Band Emission at Antenna Terminals Mobile Emissions In Base
Frequency Range

Appendix I

Field Strength of Spurious Radiation


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 512
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 61.356MHz, Pmax: -53.56dBm, RBW: 1MHz

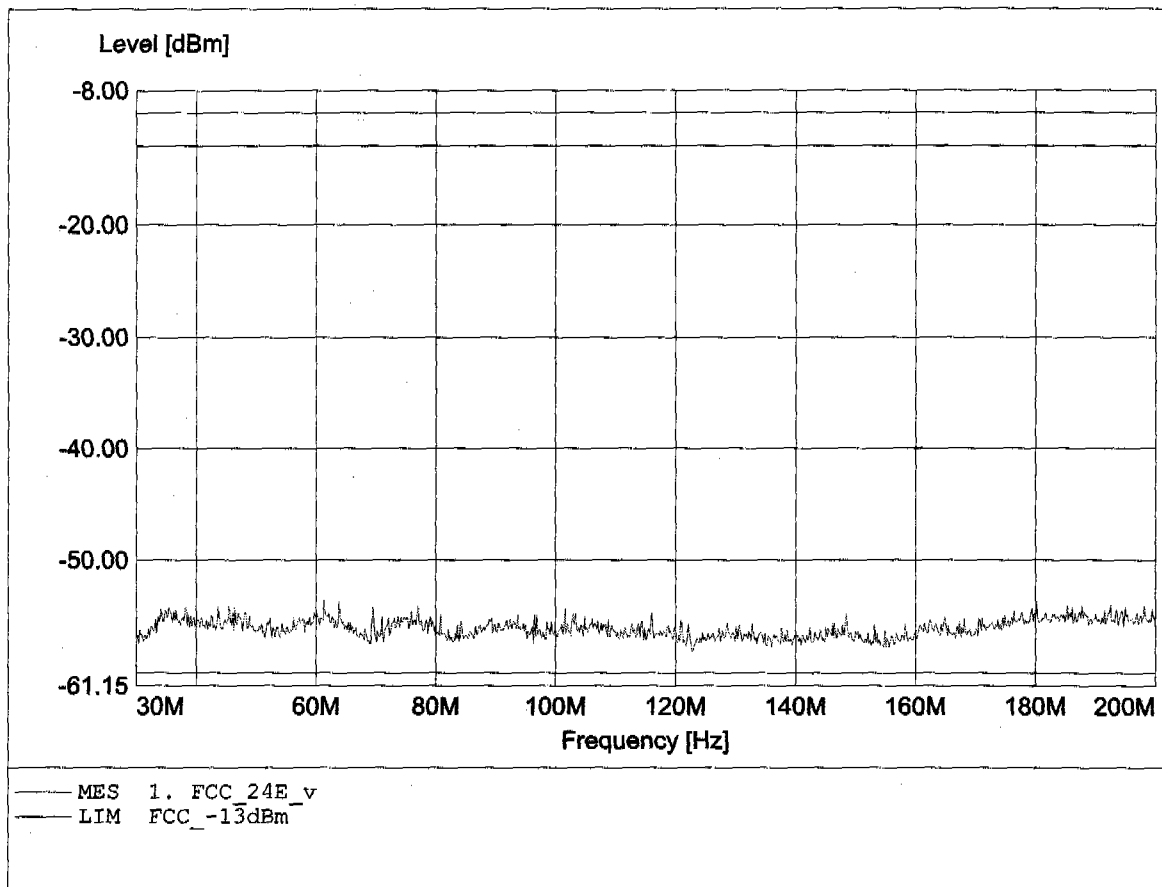


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 512
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 45.300MHz, Pmax: -52.63dBm, RBW: 1MHz

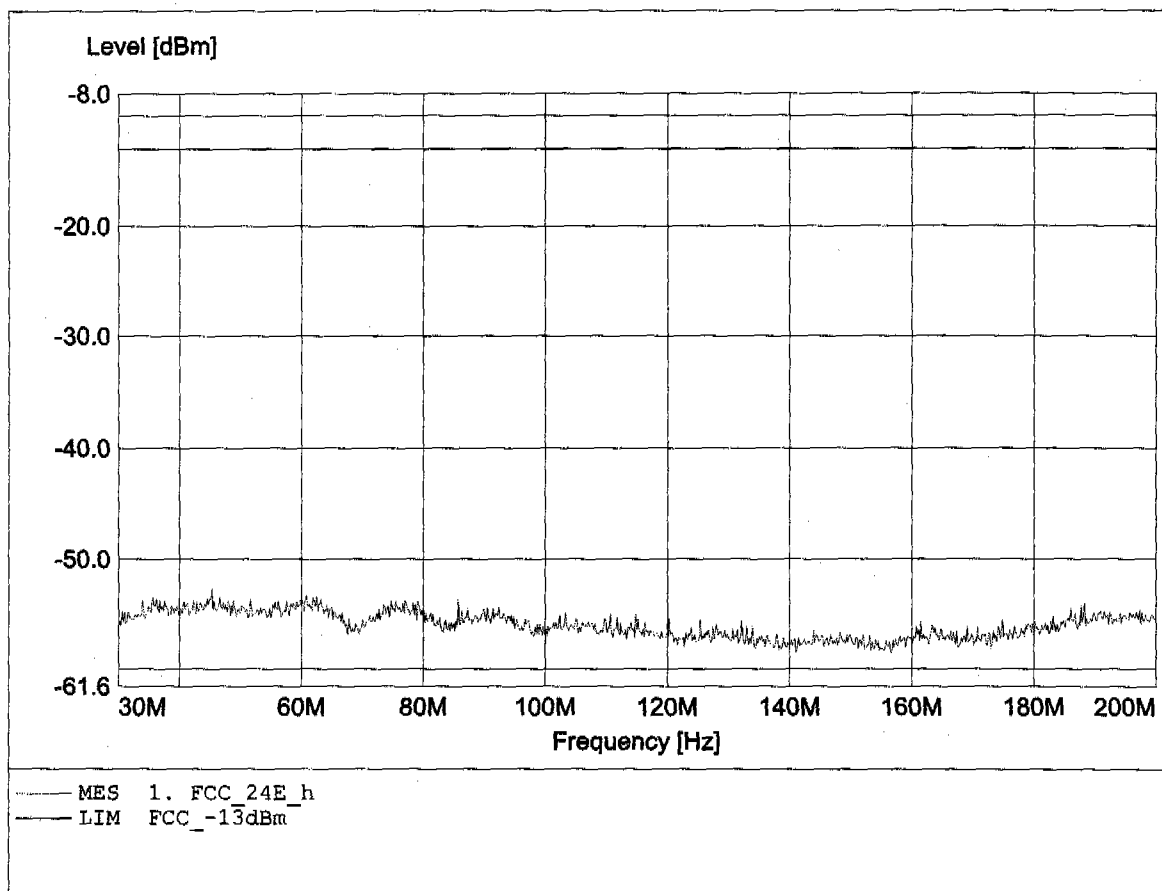


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 512
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 926.222MHz, Pmax: -40.11dBm, RBW: 1MHz

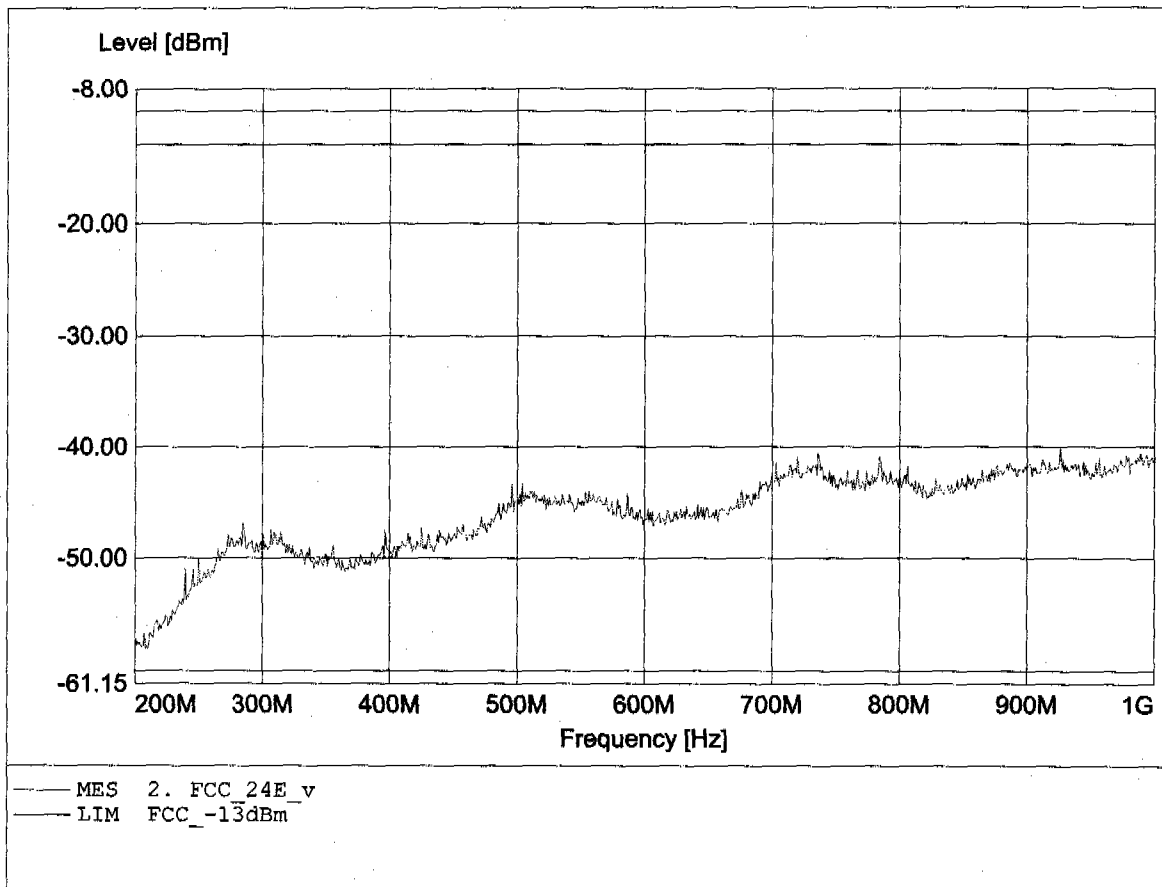


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 512
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 868.444MHz, Pmax: -36.92dBm, RBW: 1MHz

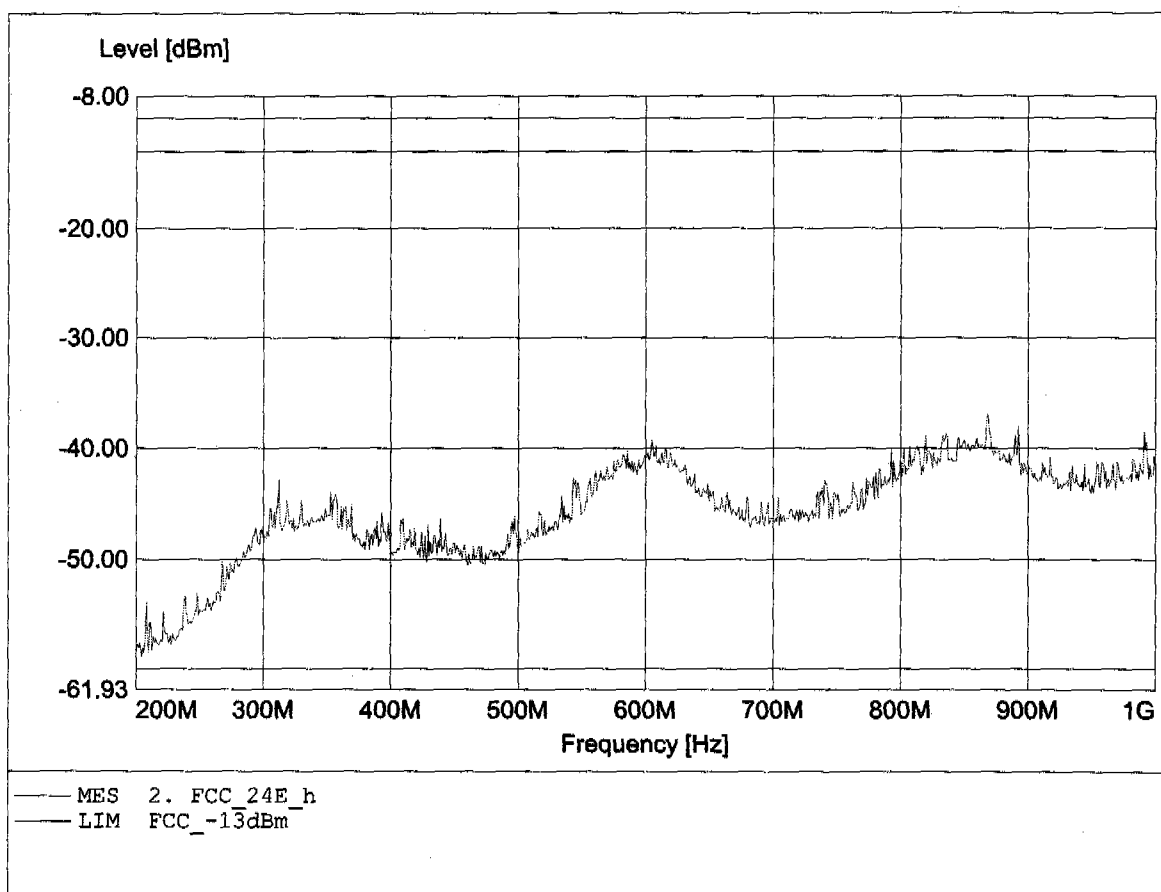


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Channel: 512
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.548GHz, Pmax: -22.88dBm, RBW: 1MHz/3kHz

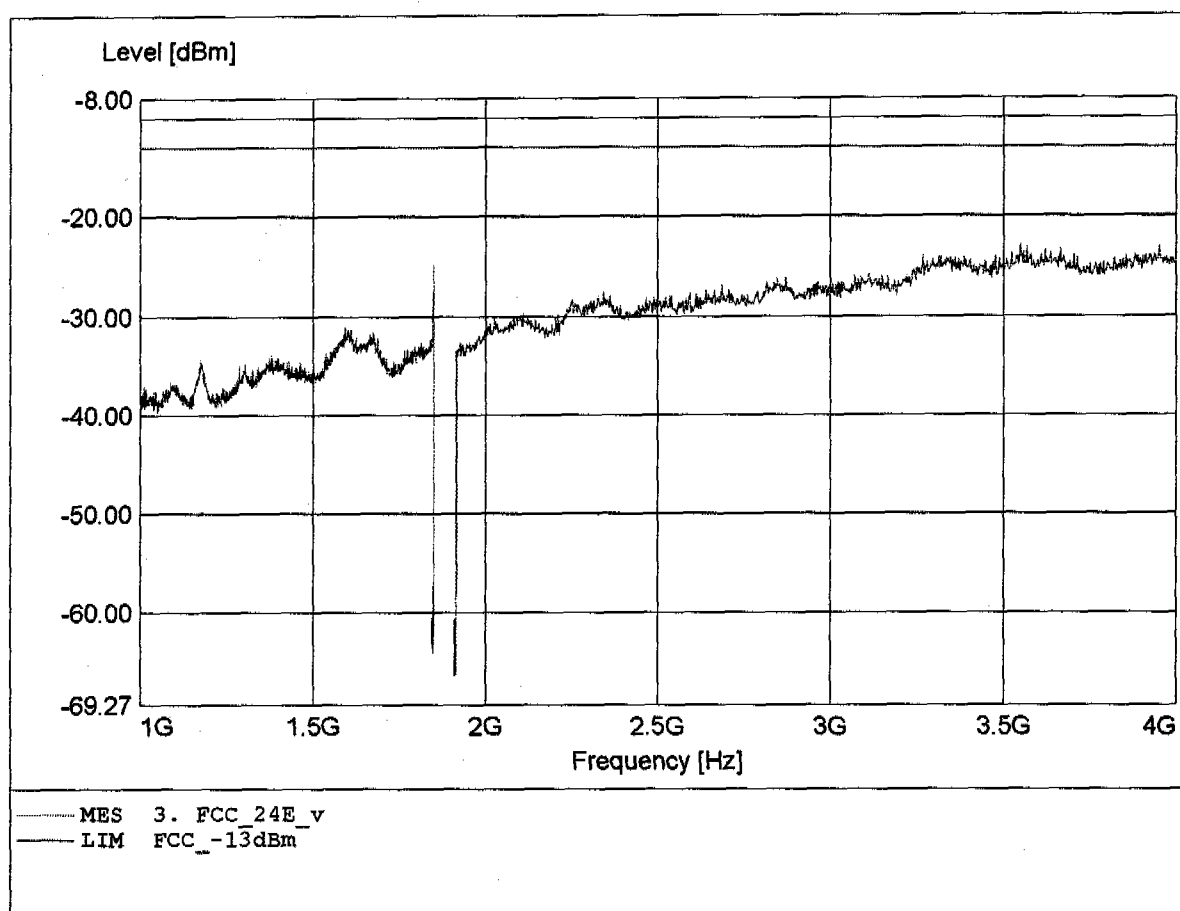


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Peiker acoustic GmbH & Co. KG
 EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
 Channel: 512
 Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
 Test Site / Operator: ETS / Mr. Hoppe
 Test Specification: according to §24.238
 Comment 1: Dist.: 3m, Ant.: HL025
 Comment 2: Freq: 3.977GHz, Pmax: -22.60dBm, RBW: 1MHz/3kHz

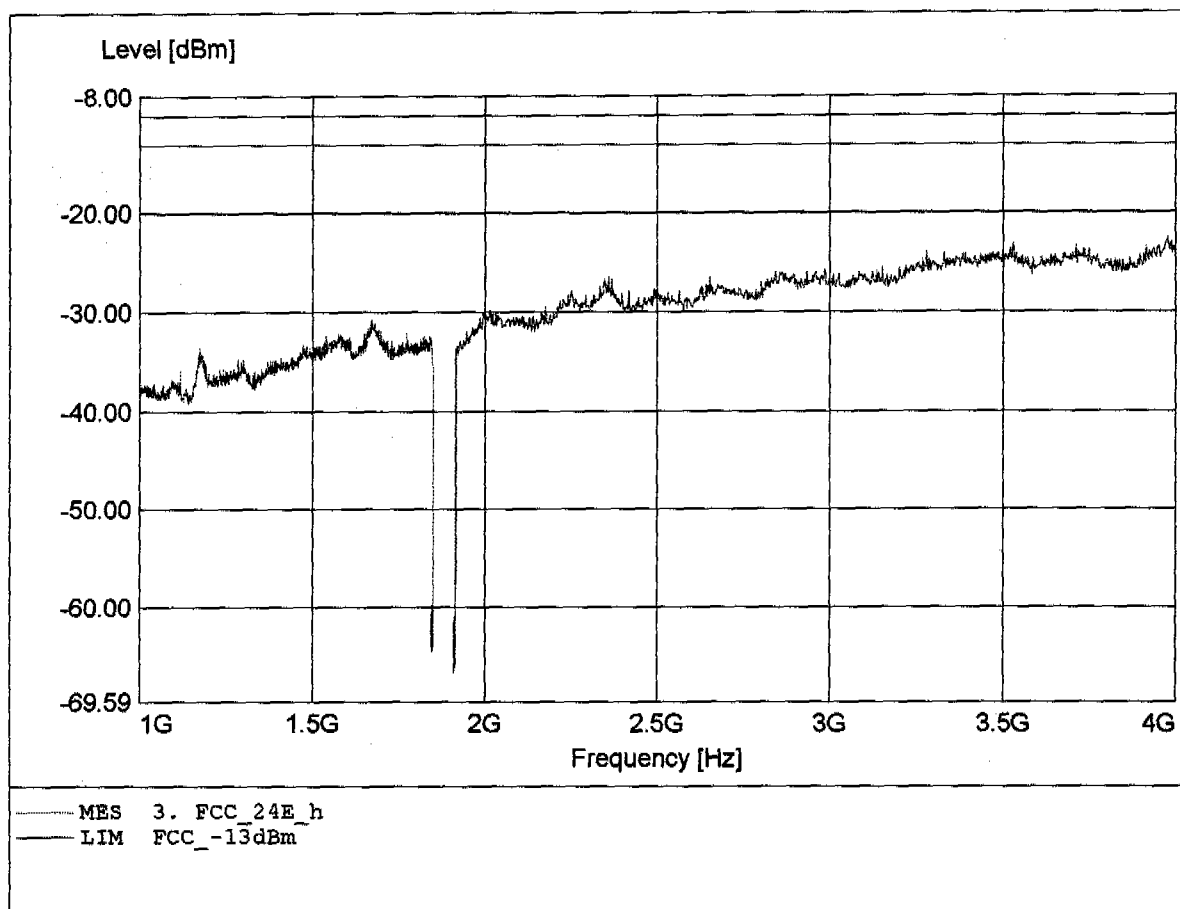


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Channel: 512
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 5.556GHz, Pmax: -20.55dBm, RBW: 1MHz

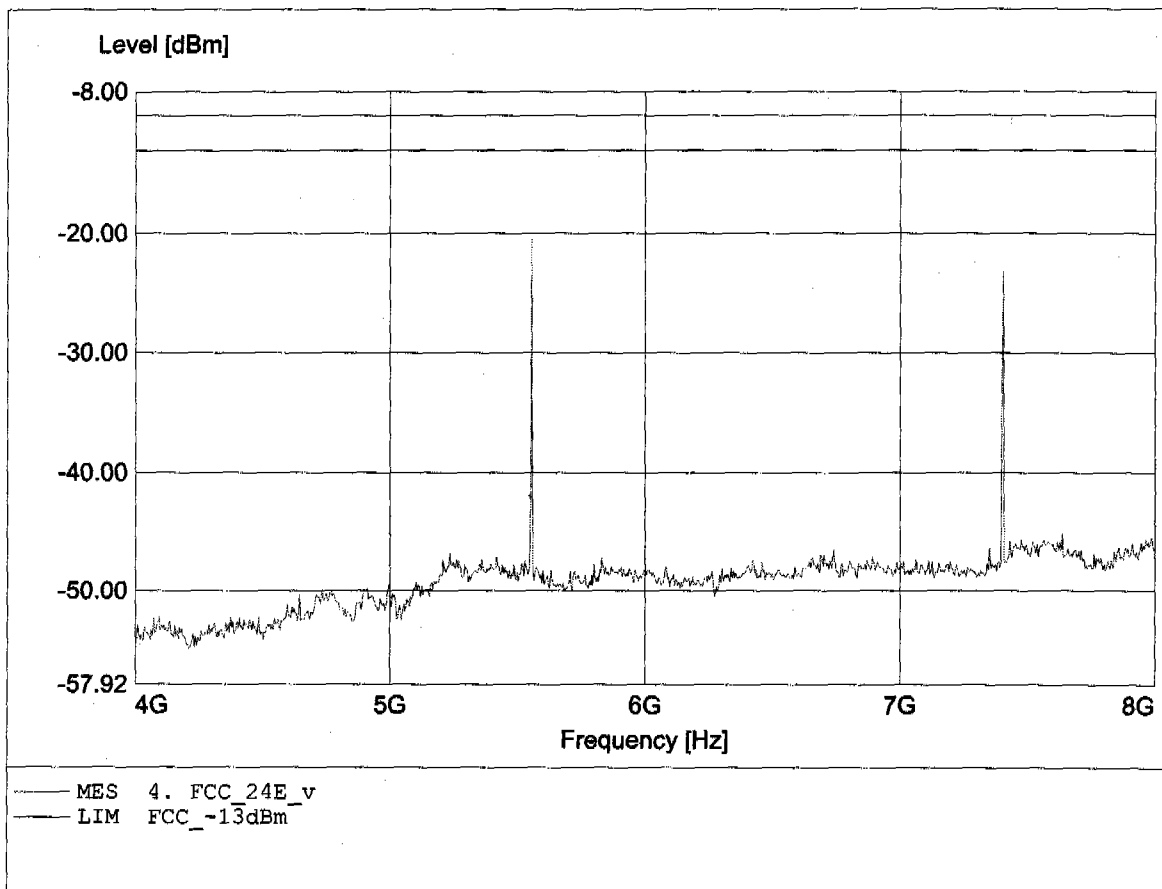


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Channel: 512
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.404GHz, Pmax: -23.00dBm, RBW: 1MHz

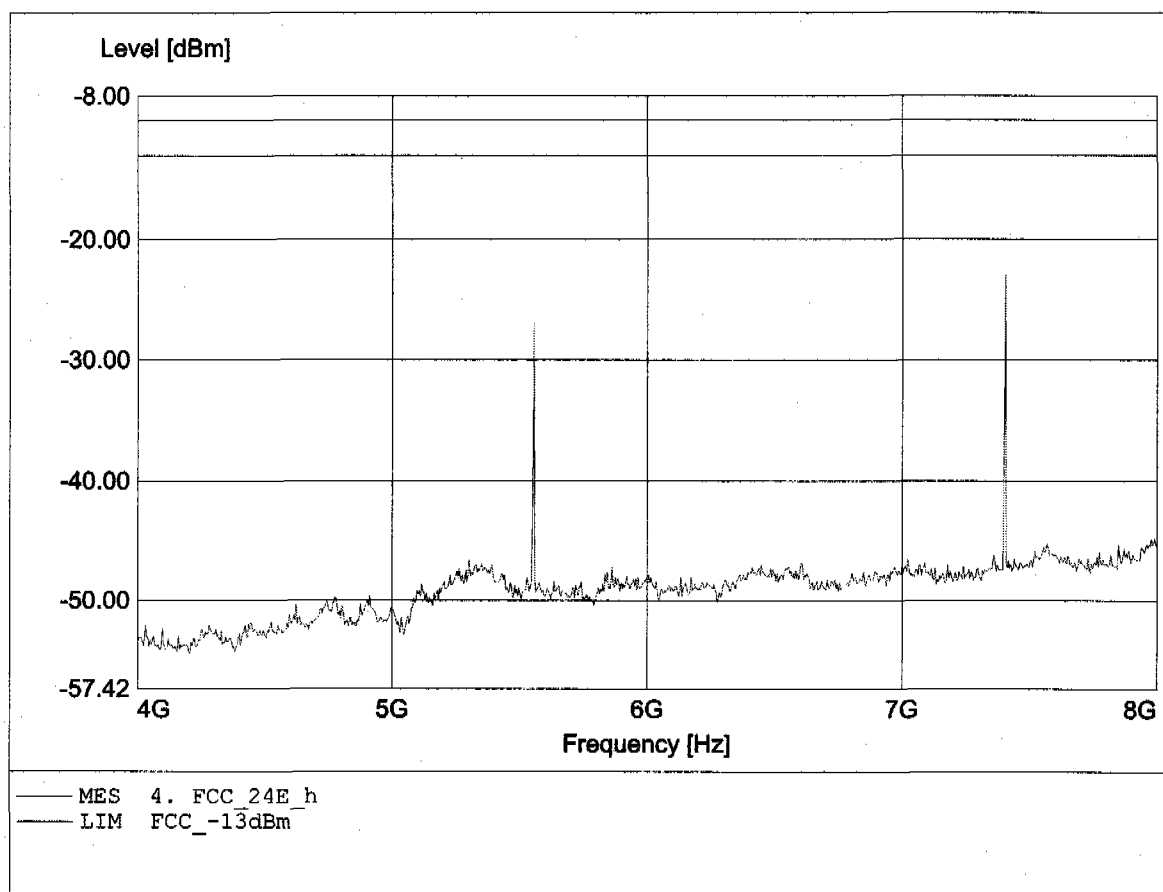


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 512
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 9.253GHz, Pmax: -26.56dBm, RBW: 1MHz

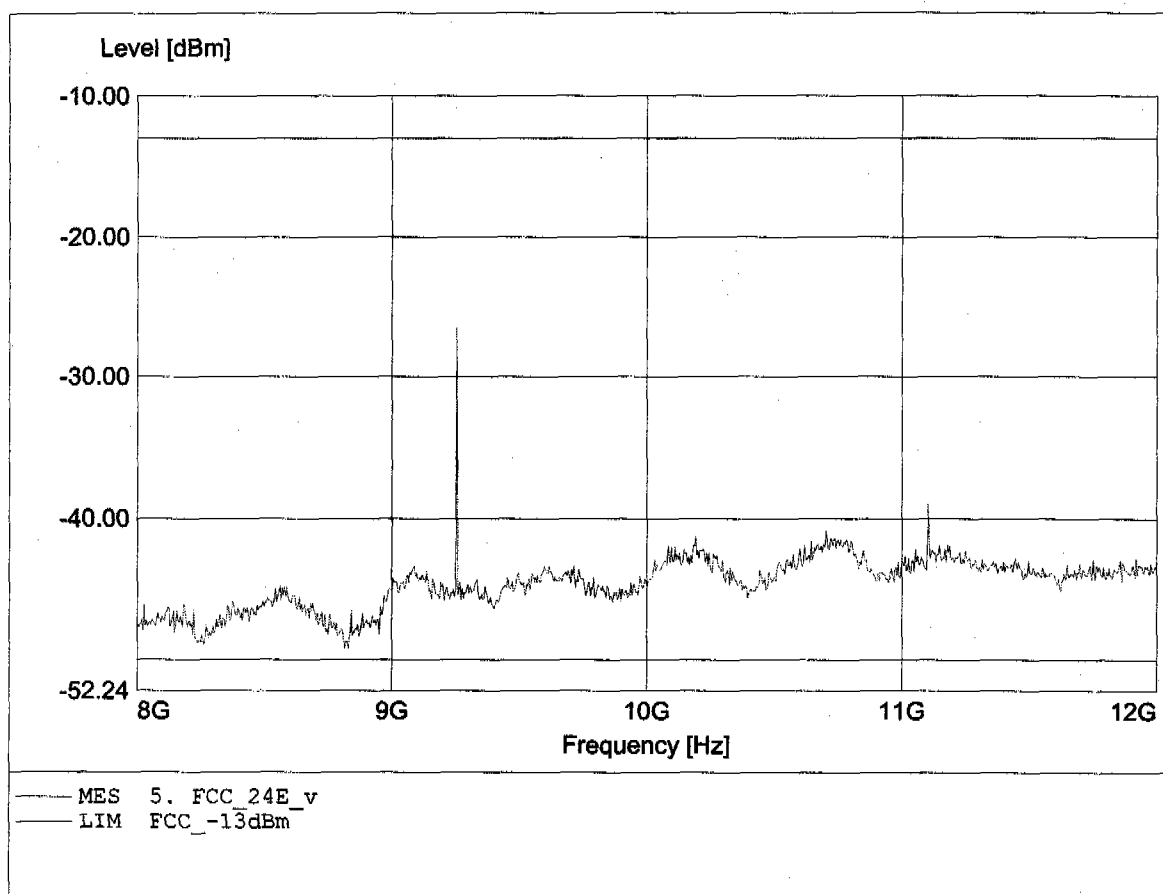


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 512
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 9.253GHz, Pmax: -28.12dBm, RBW: 1MHz

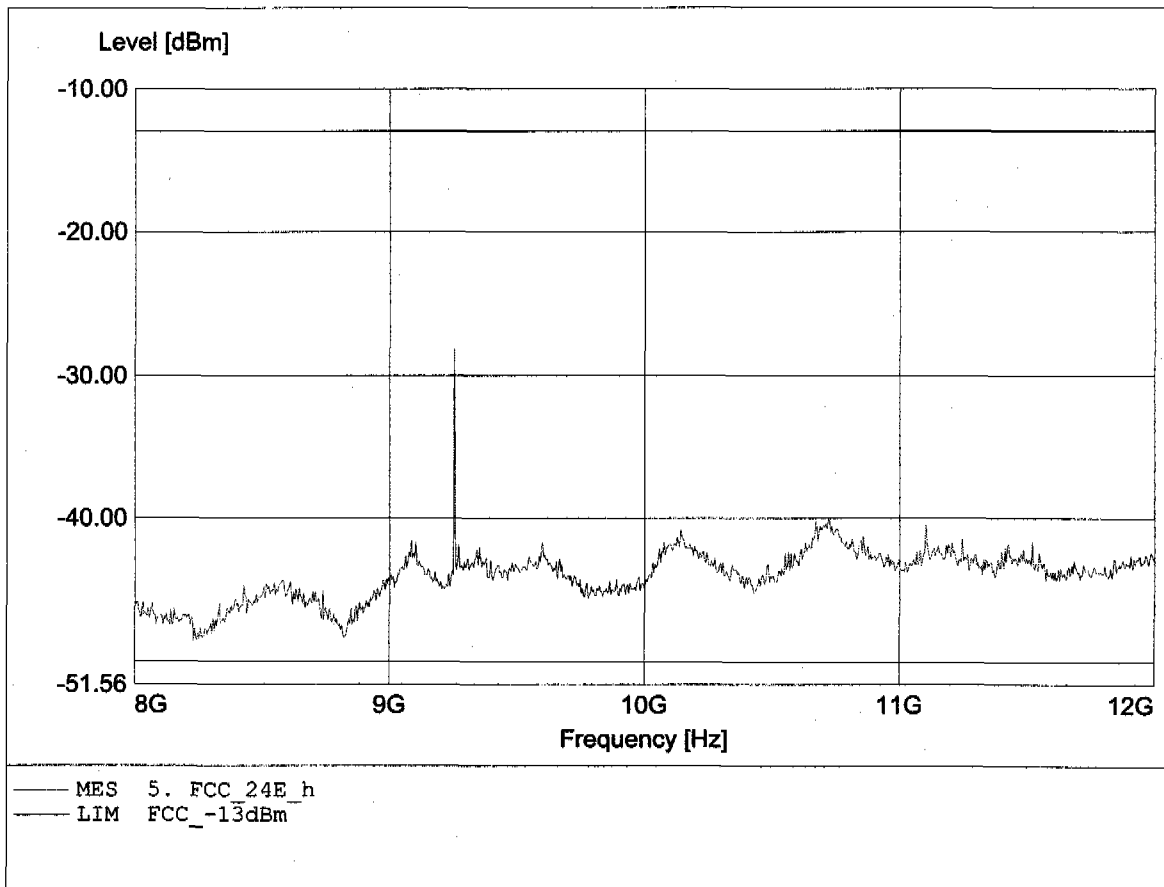


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 512
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: BTS / Mr. Hoppe
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.500GHz, Pmax: -32.14dBm, RBW: 1MHz

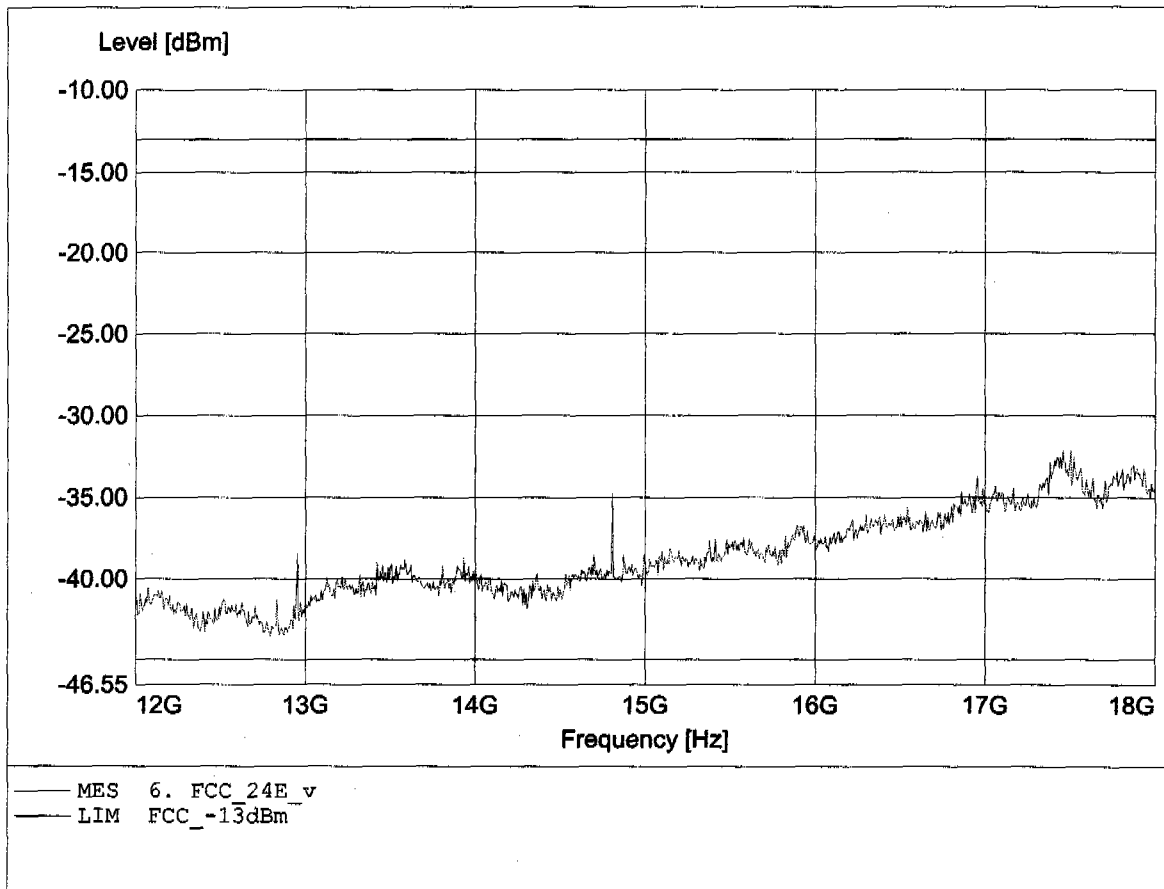


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 512
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.453GHz, Pmax: -31.68dBm, RBW: 1MHz

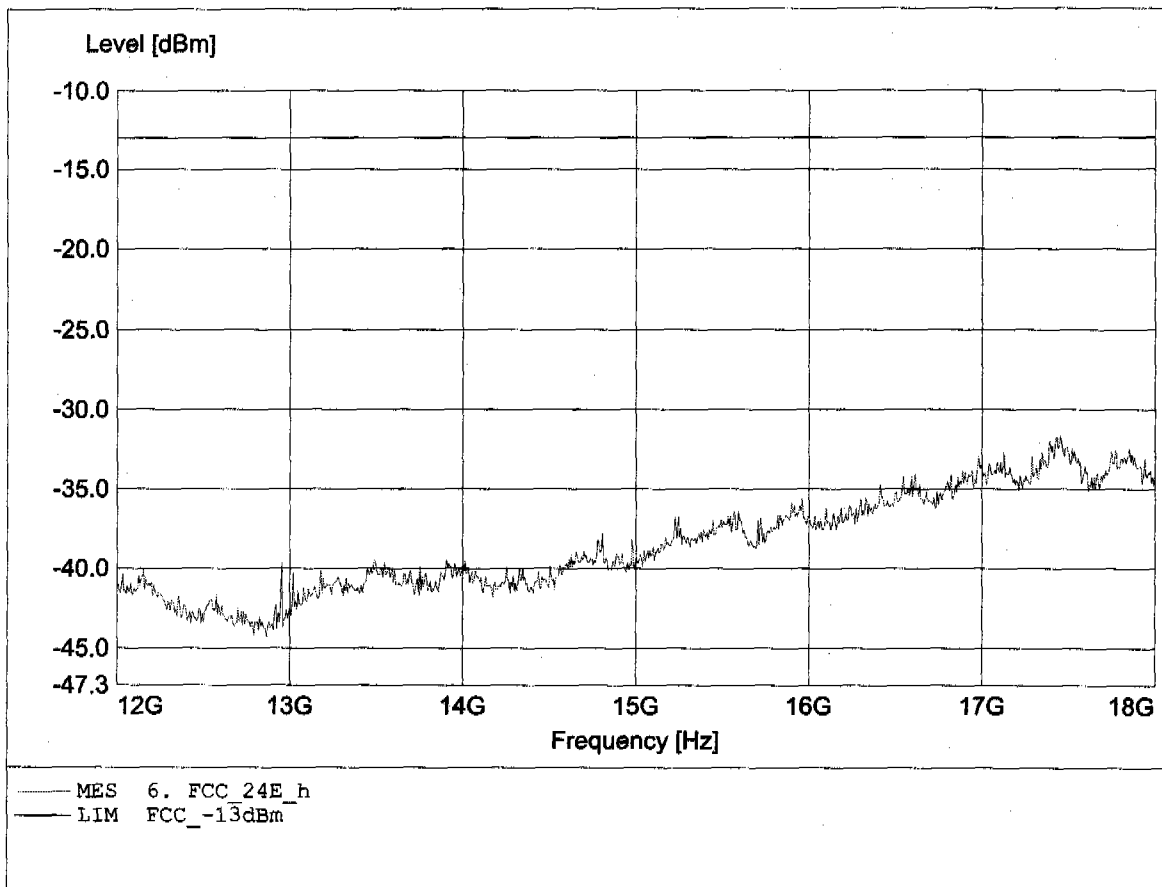


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 512
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.453GHz, Pmax: -24.64dBm, RBW: 1MHz

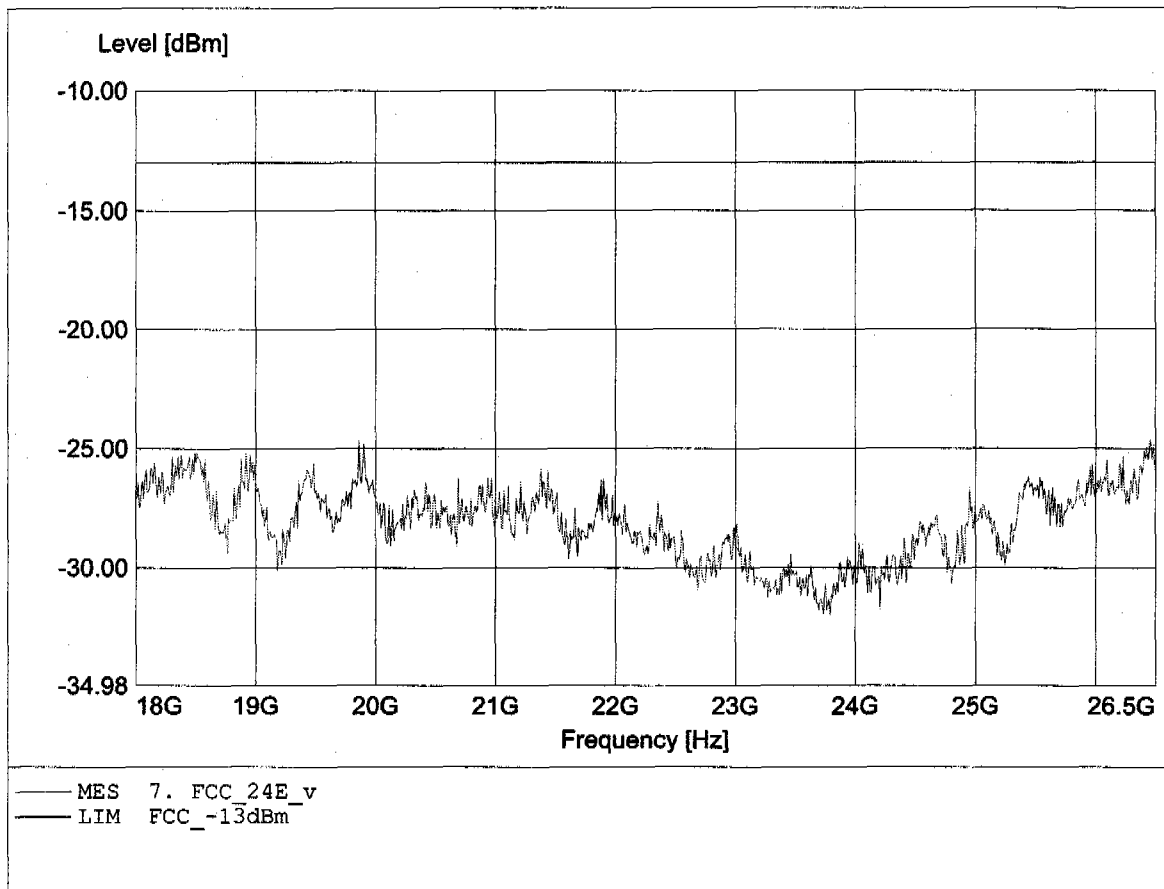


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 512
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 19.889GHz, Pmax: -24.45dBm, RBW: 1MHz

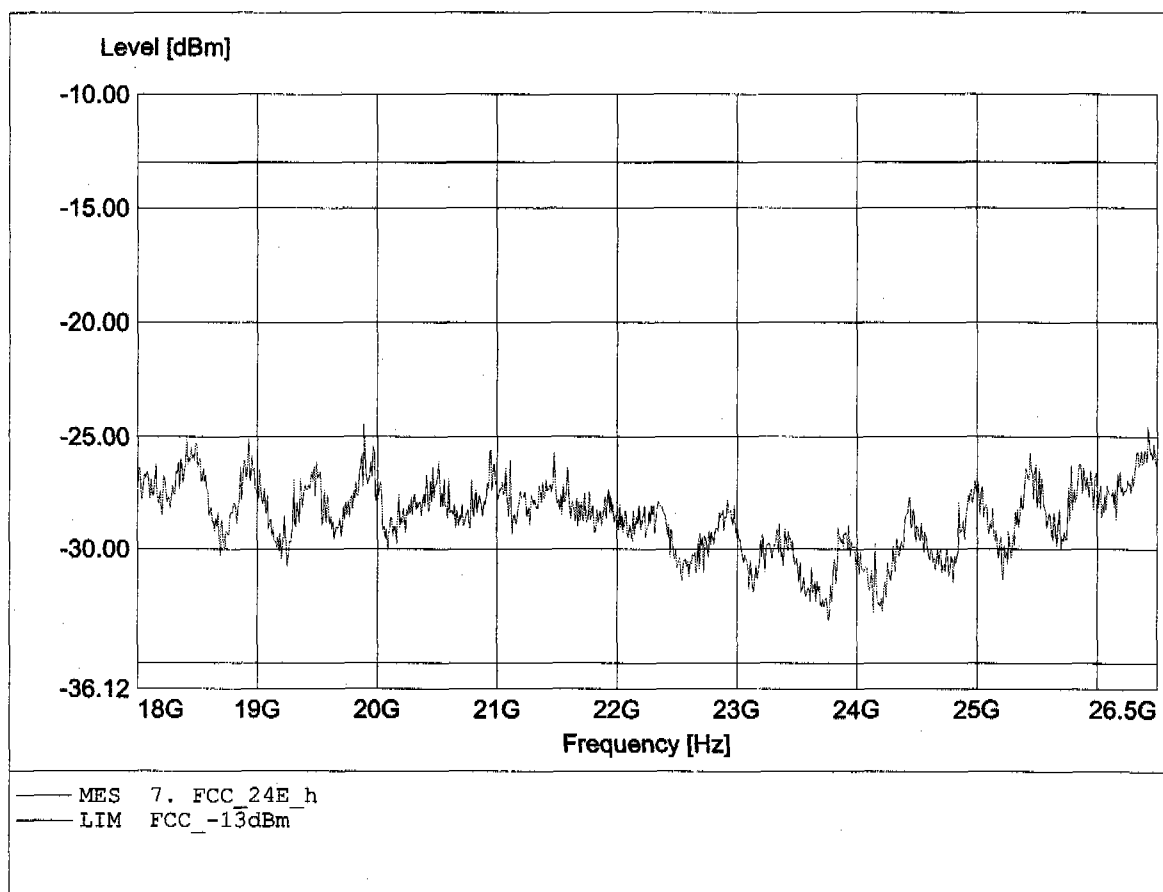


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 661
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 185.267MHz, Pmax: -53.45dBm, RBW: 1MHz

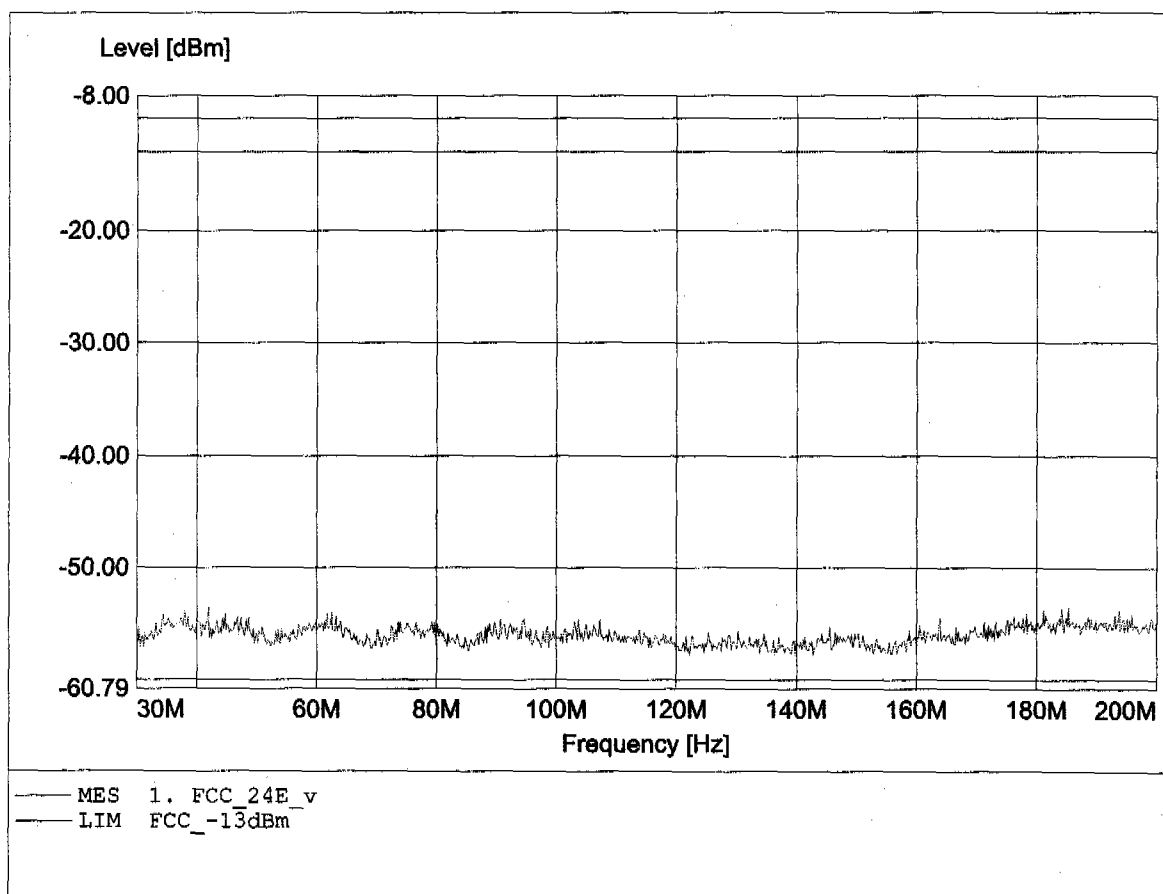


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 661
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 74.956MHz, Pmax: -53.03dBm, RBW: 1MHz

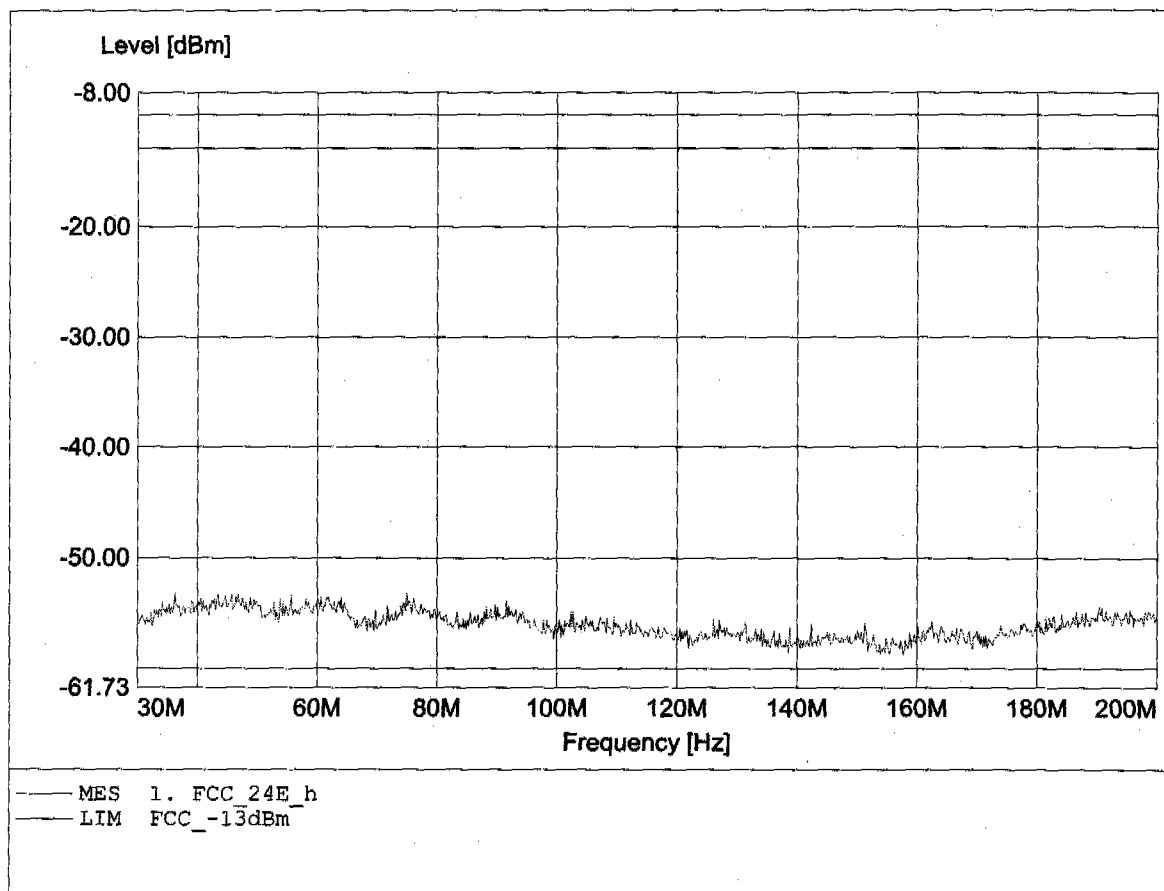


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 661
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 941.333MHz, Pmax: -39.41dBm, RBW: 1MHz

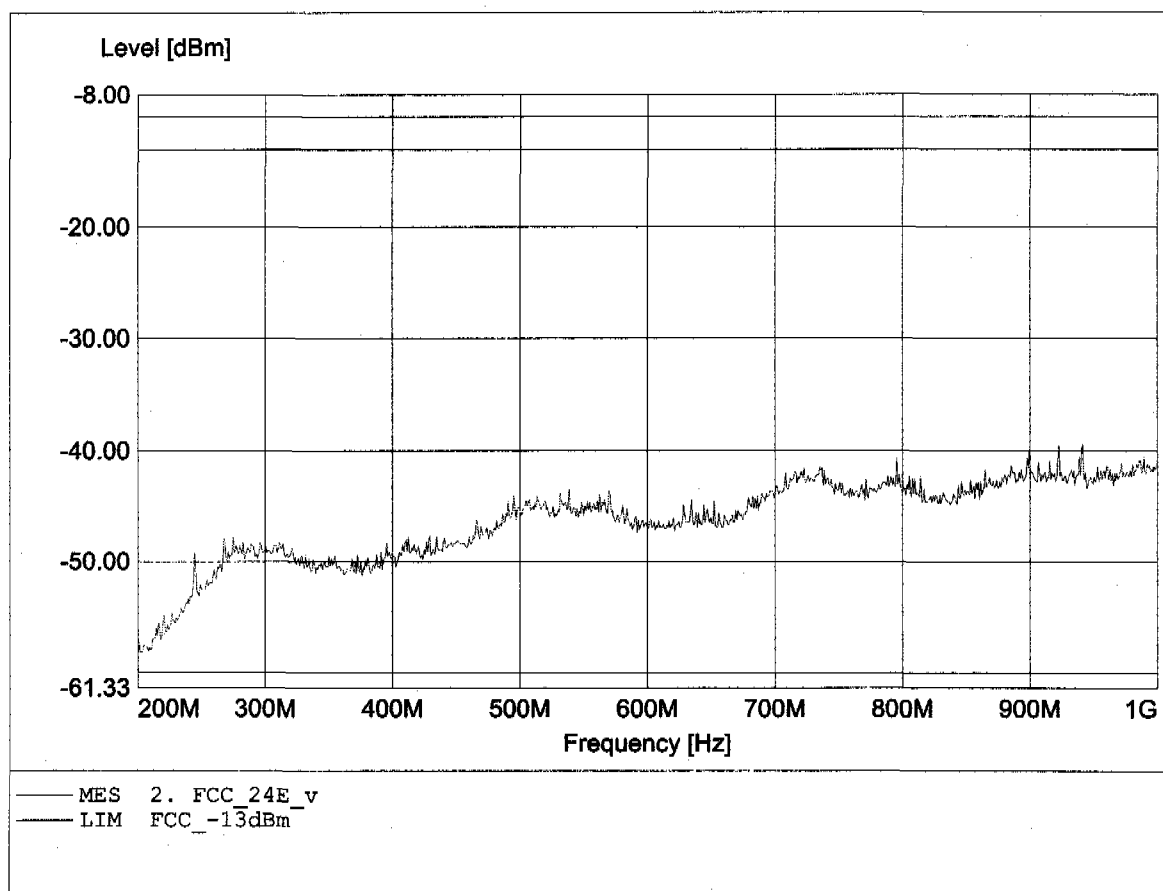


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 661
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 867.556MHz, Pmax: -39.04dBm, RBW: 1MHz

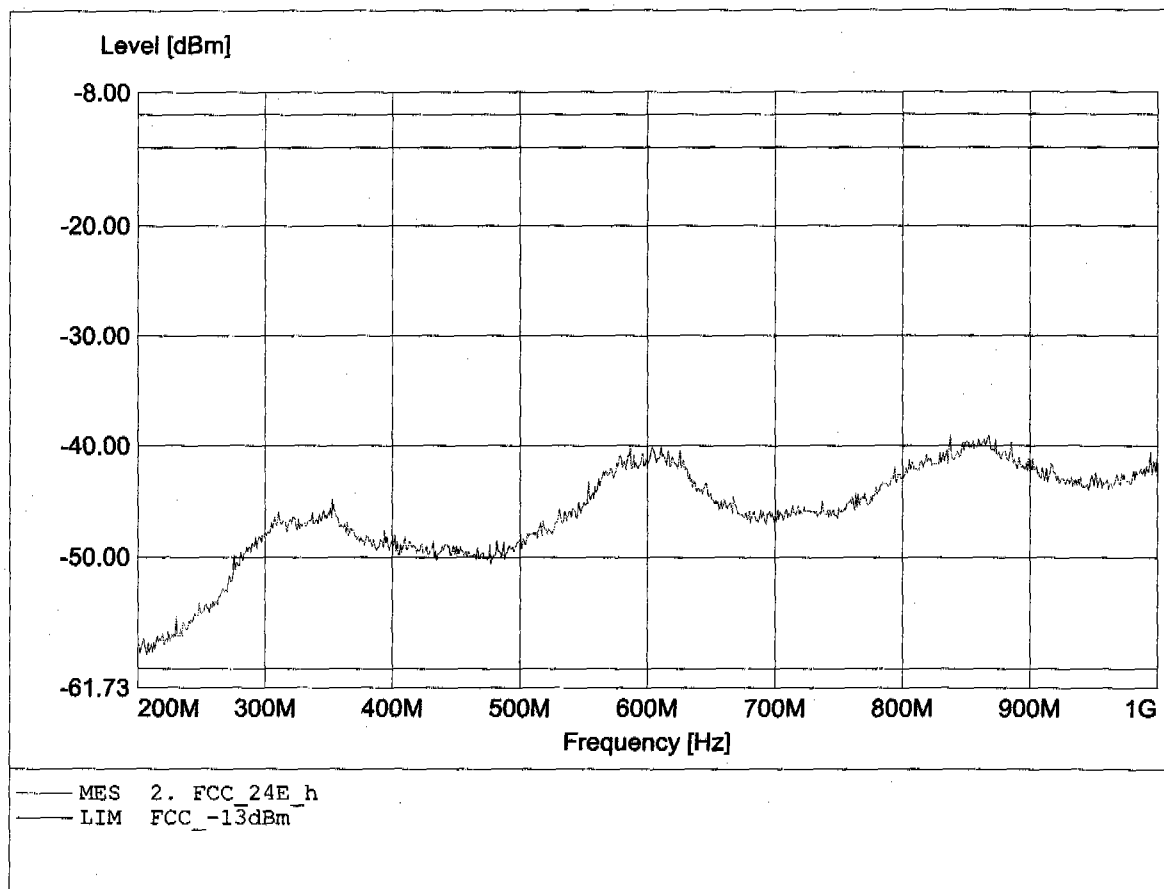


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 661
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.620GHz, Pmax: -22.18dBm, RBW: 1MHz/3kHz

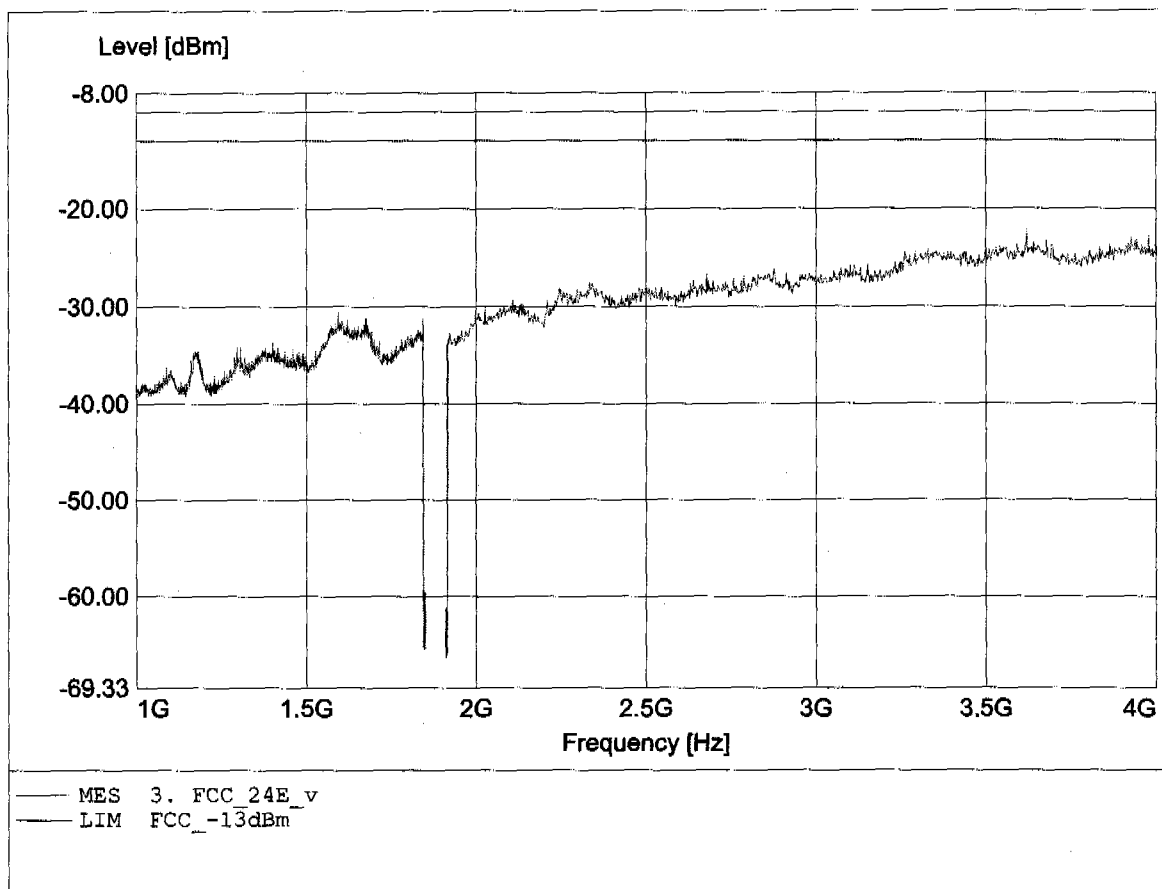


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Channel: 661
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 4.000GHz, Pmax: -22.52dBm, RBW: 1MHz/3kHz

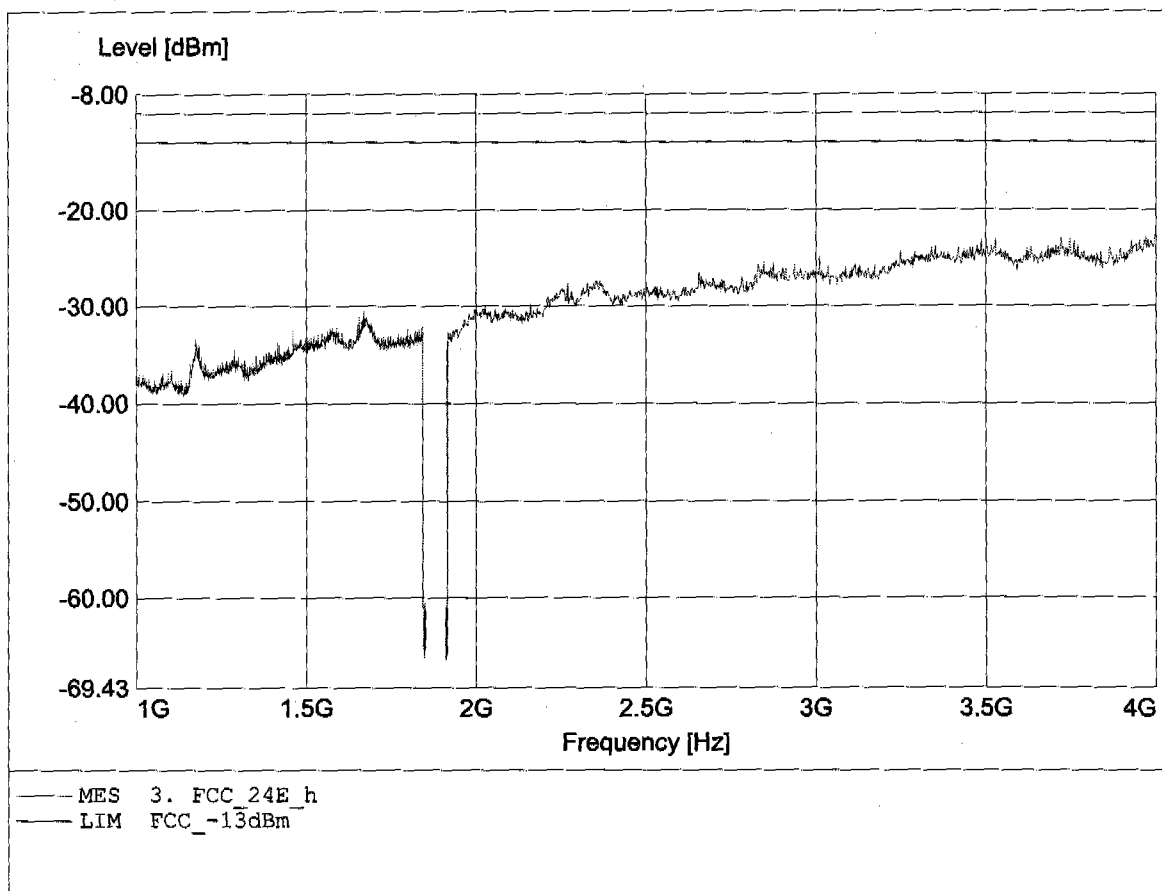


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Channel: 661
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 5.644GHz, Pmax: -24.06dBm, RBW: 1MHz

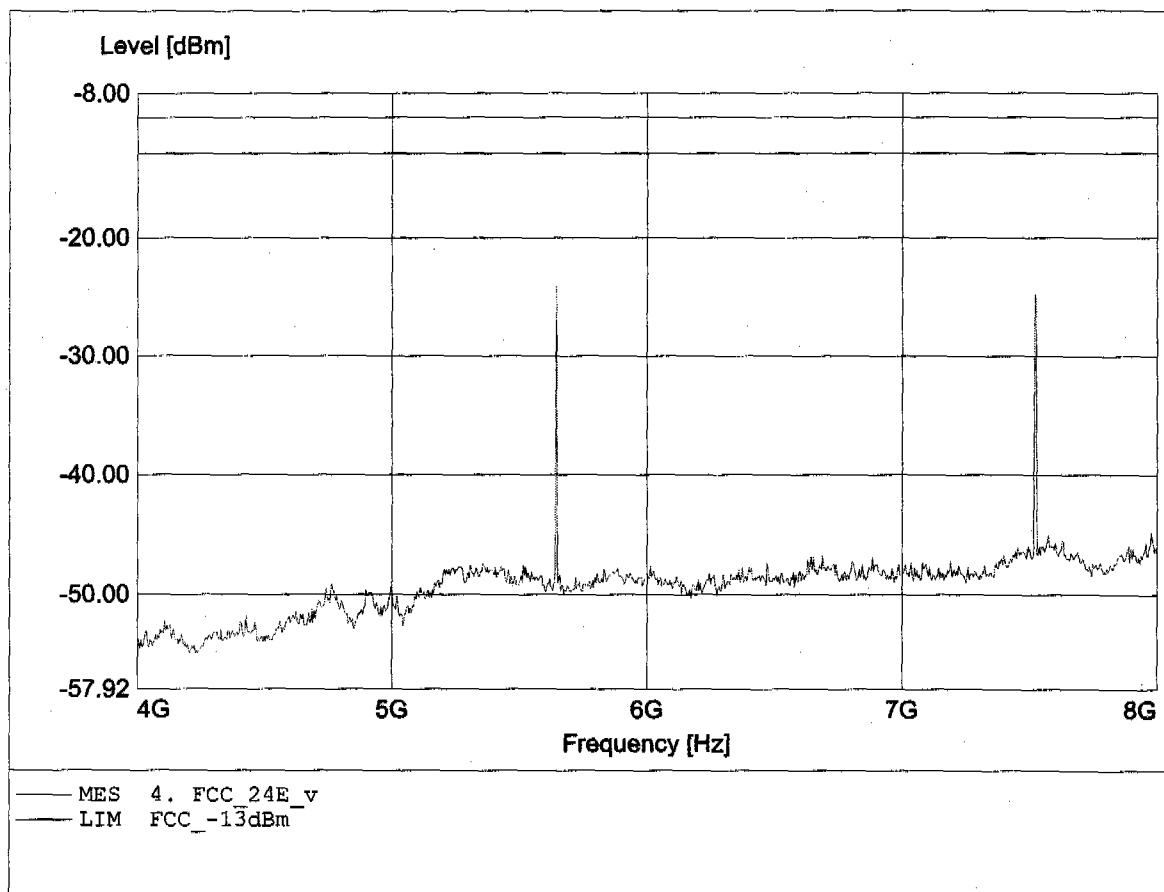


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Channel: 661
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.520GHz, Pmax: -23.72dBm, RBW: 1MHz

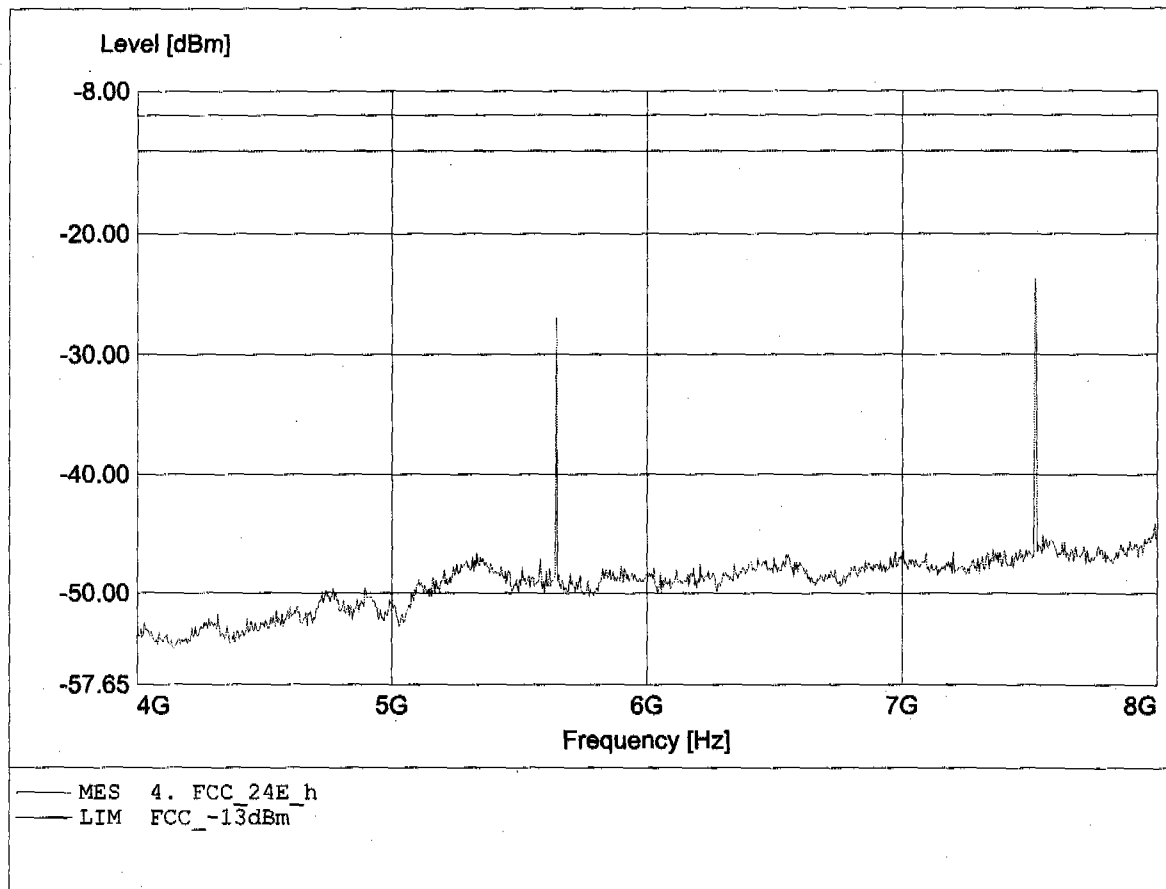


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 661
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 9.404GHz, Pmax: -27.42dBm, RBW: 1MHz

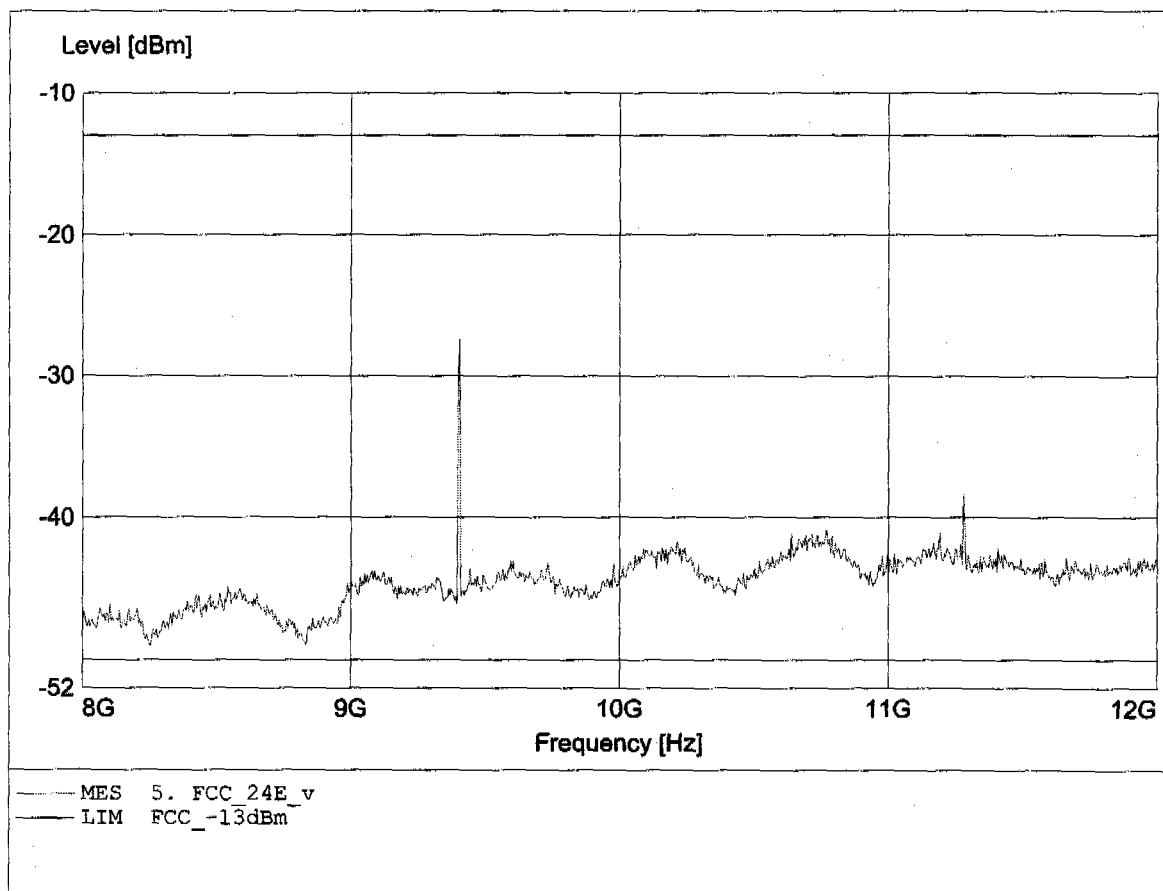


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 661
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 9.404GHz, Pmax: -28.93dBm, RBW: 1MHz

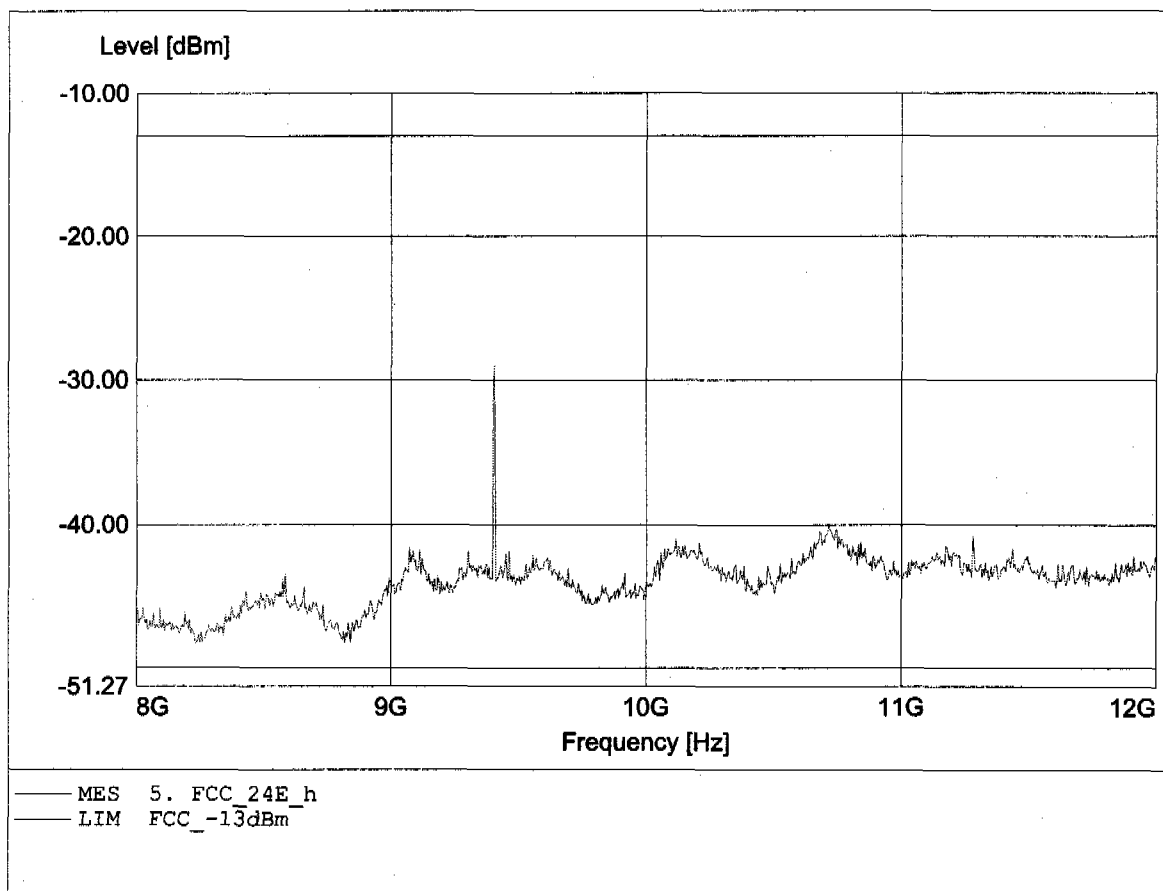


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 661
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.460GHz, Pmax: -32.37dBm, RBW: 1MHz

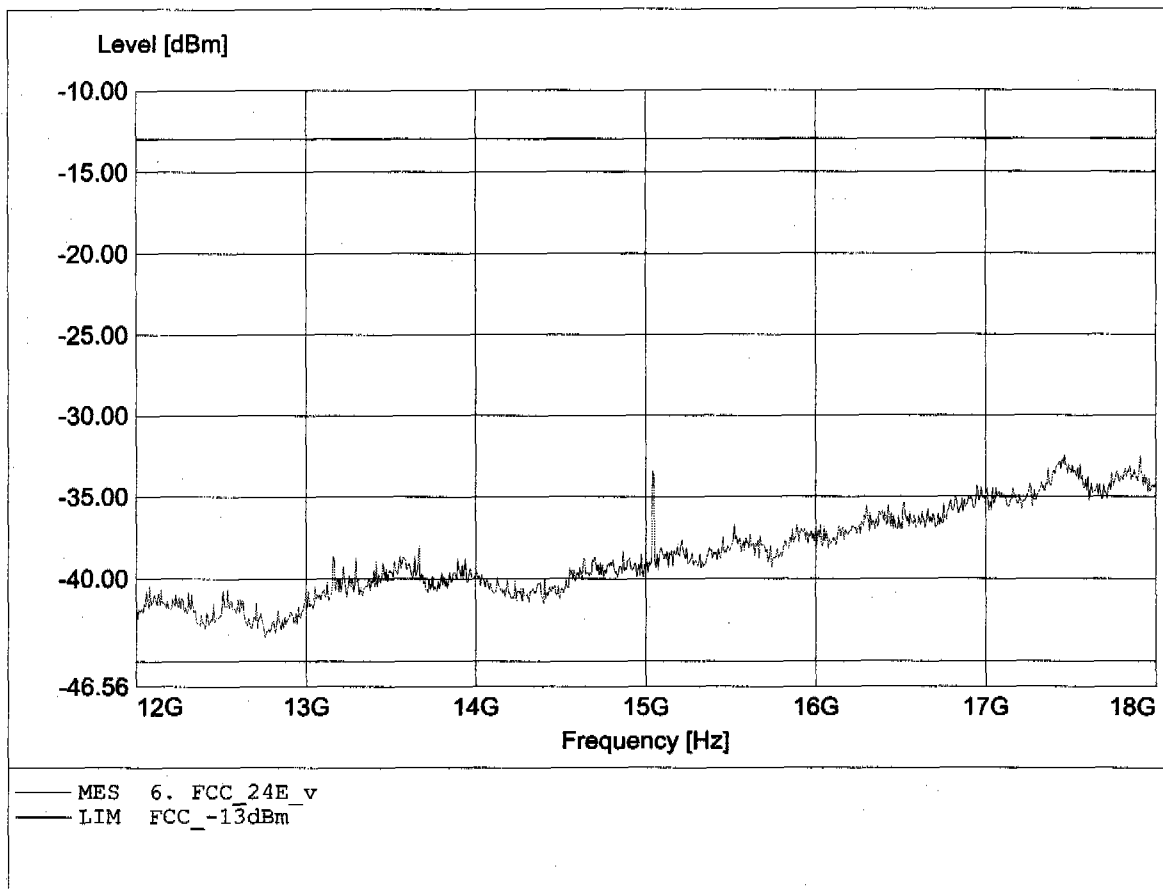


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 661
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.433GHz, Pmax: -31.66dBm, RBW: 1MHz

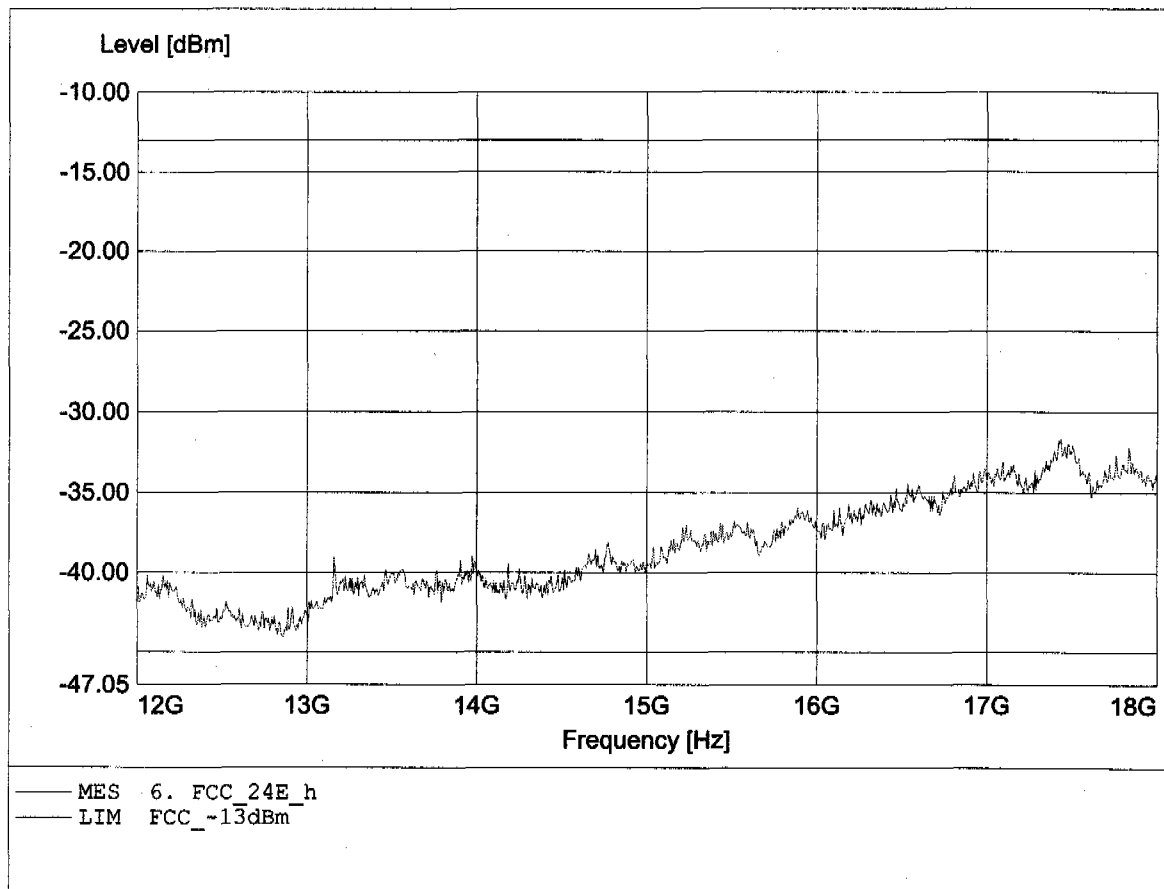


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 661
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 18.434GHz, Pmax: -24.35dBm, RBW: 1MHz

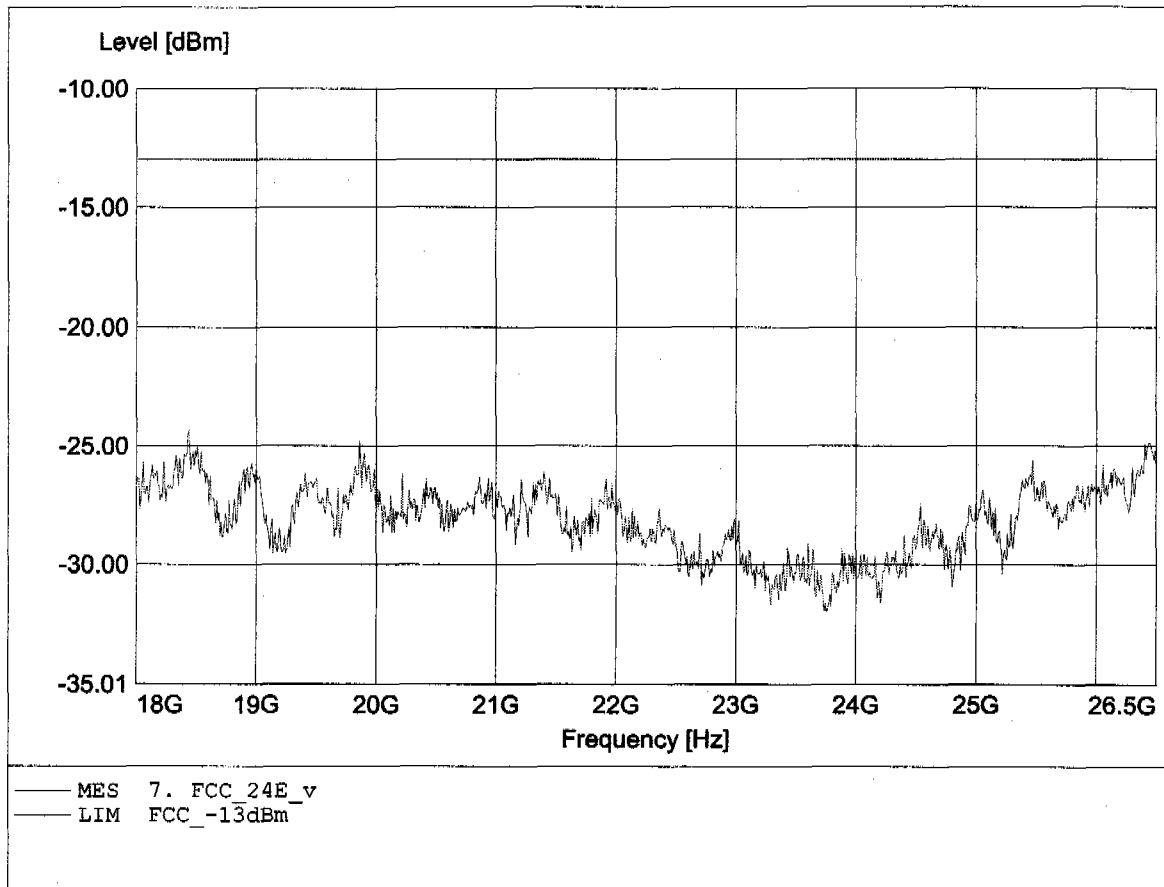


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 661
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.453GHz, Pmax: -23.95dBm, RBW: 1MHz

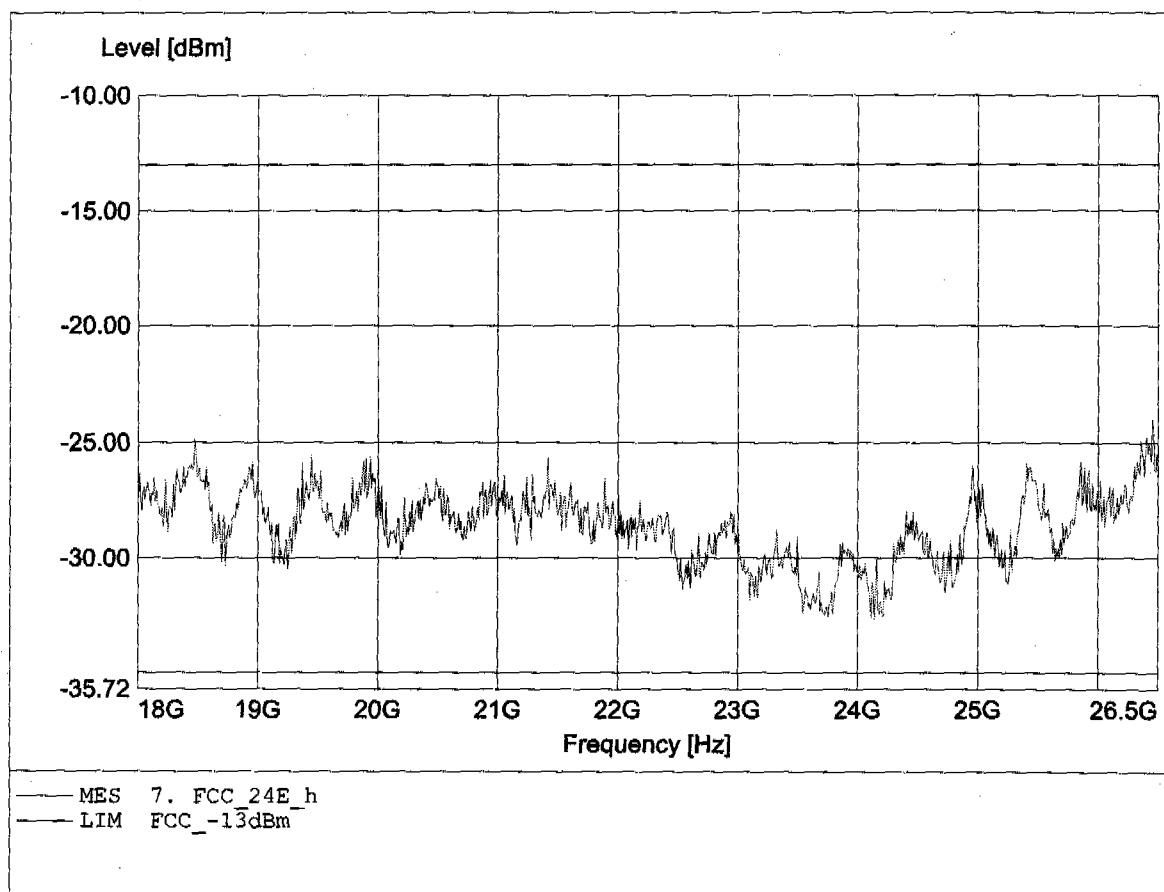


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 810
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 189.422MHz, Pmax: -53.76dBm, RBW: 1MHz

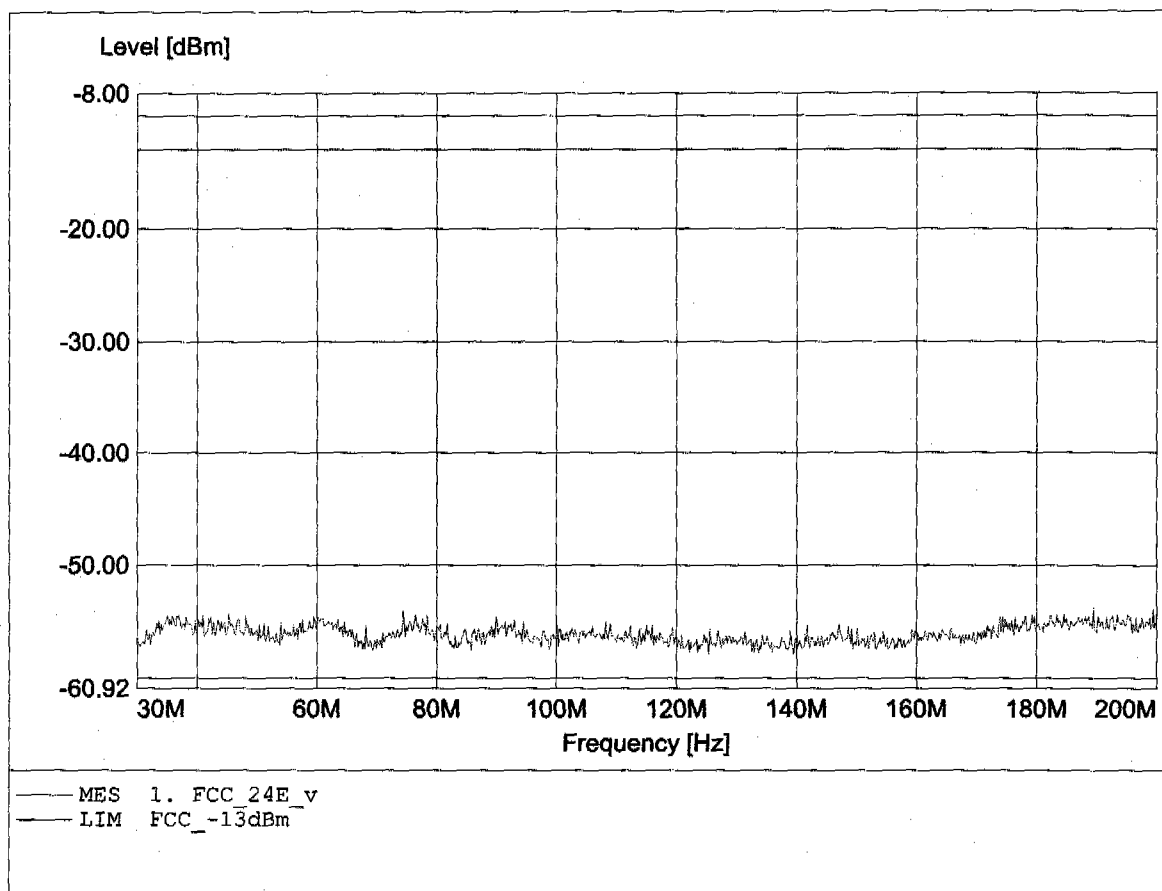


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 810
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 63.811MHz, Pmax: -52.18dBm, RBW: 1MHz

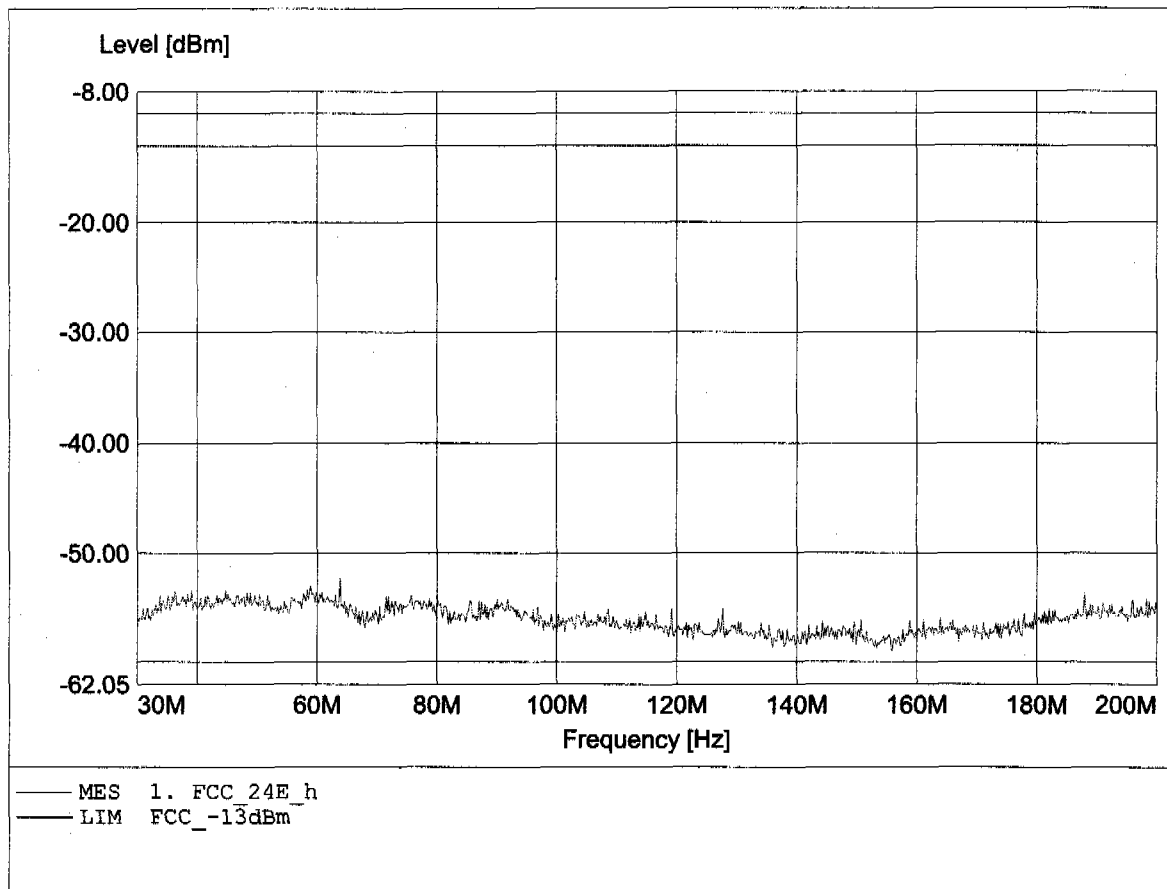


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 810
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 987.556MHz, Pmax: -39.38dBm, RBW: 1MHz

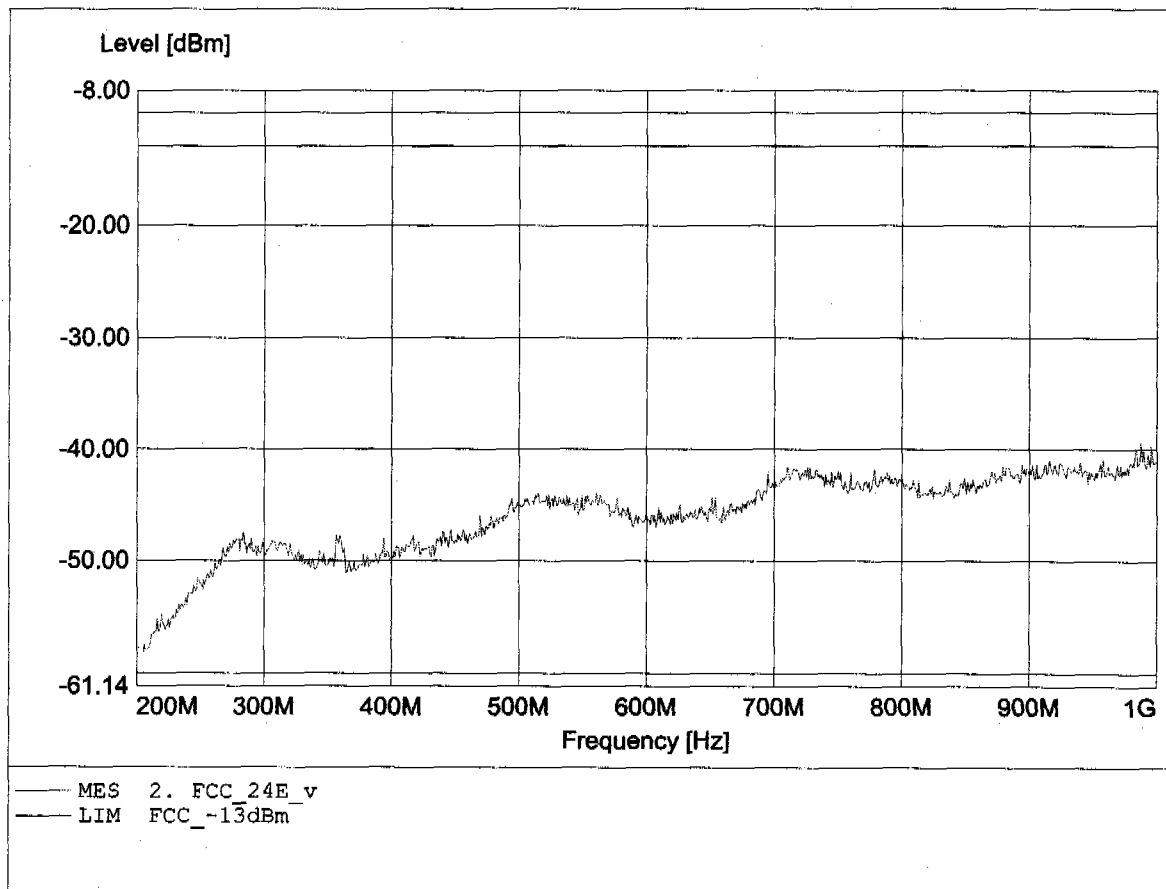


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 810
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 841.778MHz, Pmax: -38.61dBm, RBW: 1MHz

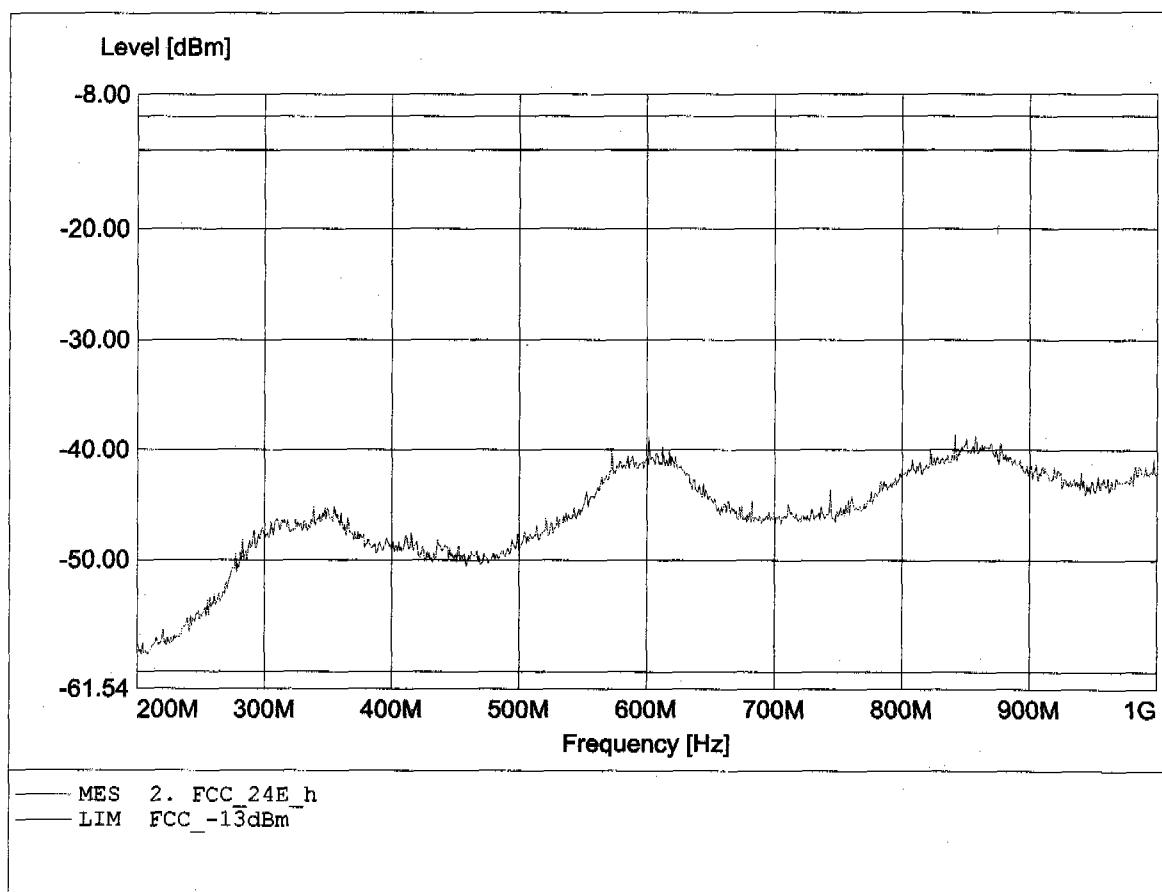


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 810
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.597GHz, Pmax: -23.16dBm, RBW: 1MHz/3kHz

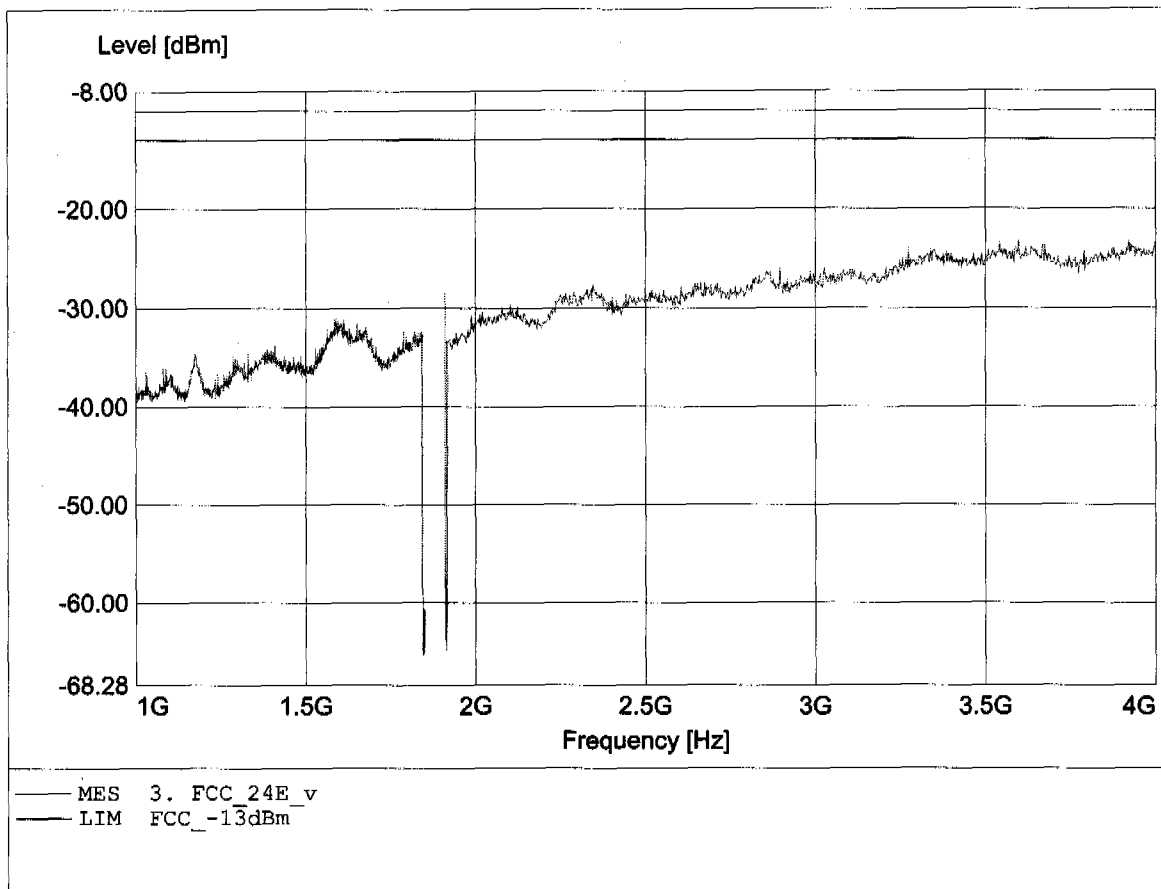


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Channel: 810
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.981GHz, Pmax: -22.29dBm, RBW: 1MHz/3kHz

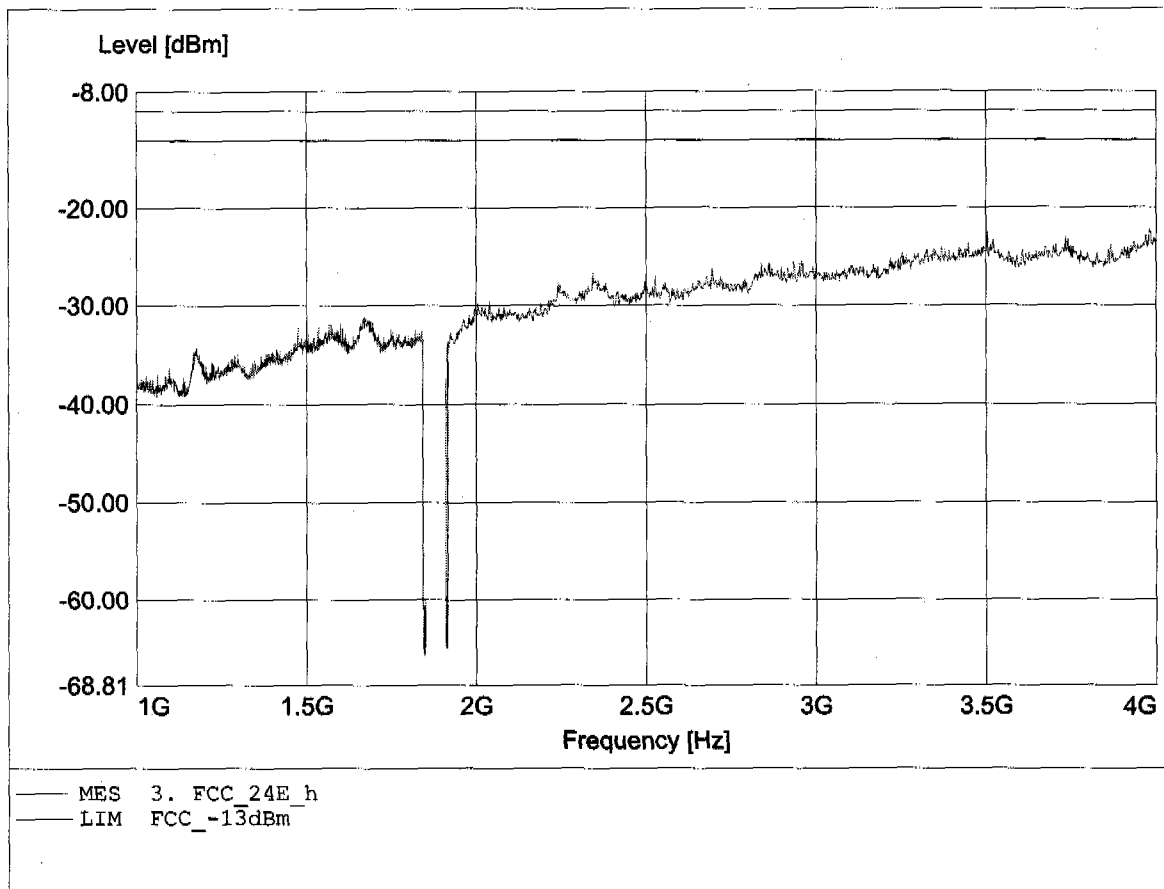


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Channel: 810
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.640GHz, Pmax: -23.19dBm, RBW: 1MHz

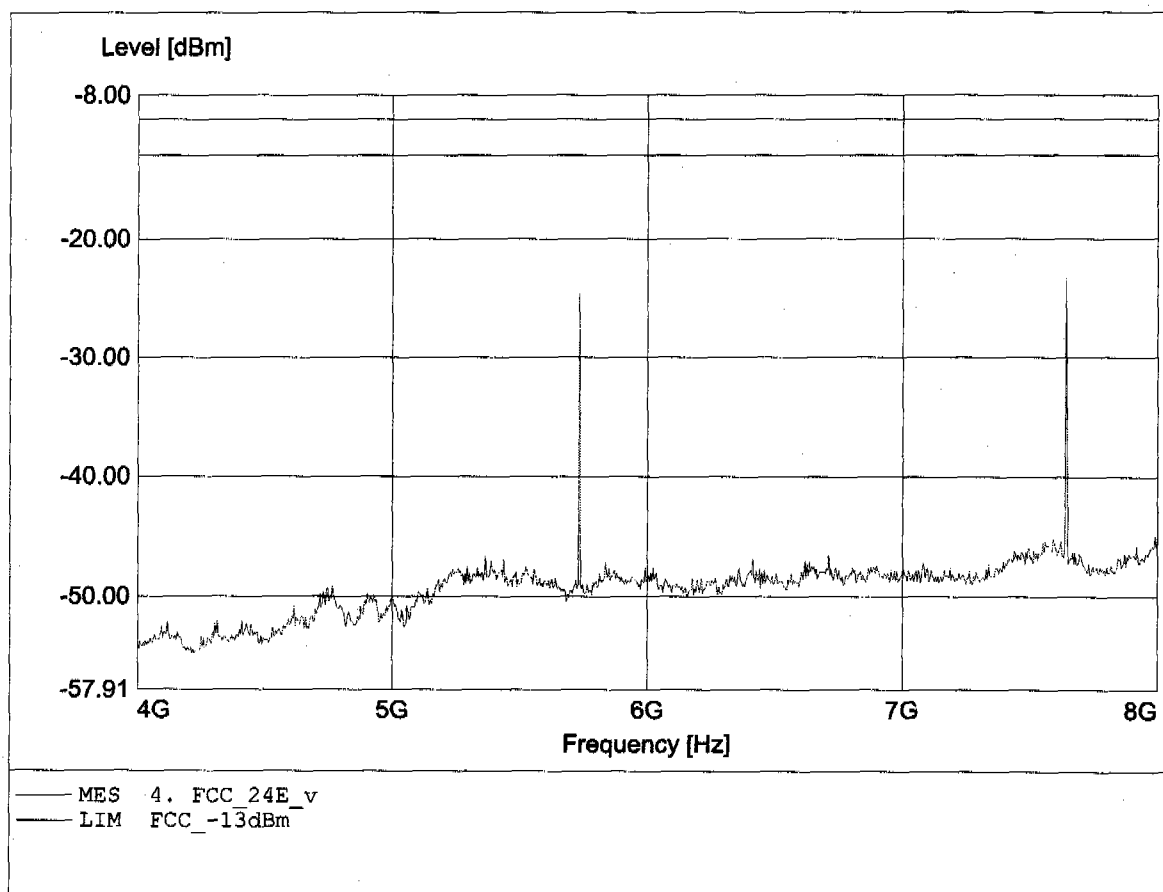


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Channel: 810
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.640GHz, Pmax: -24.80dBm, RBW: 1MHz

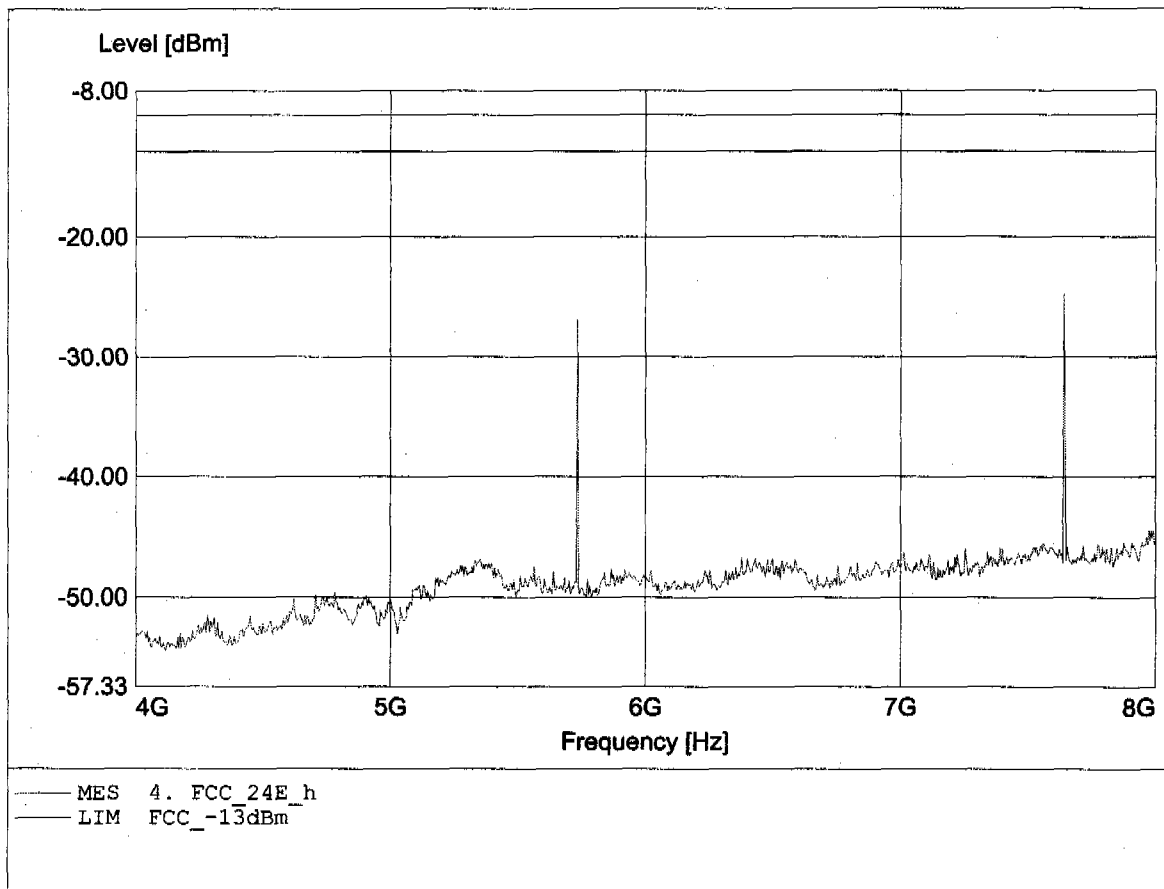


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 810
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 9.551GHz, Pmax: -29.85dBm, RBW: 1MHz

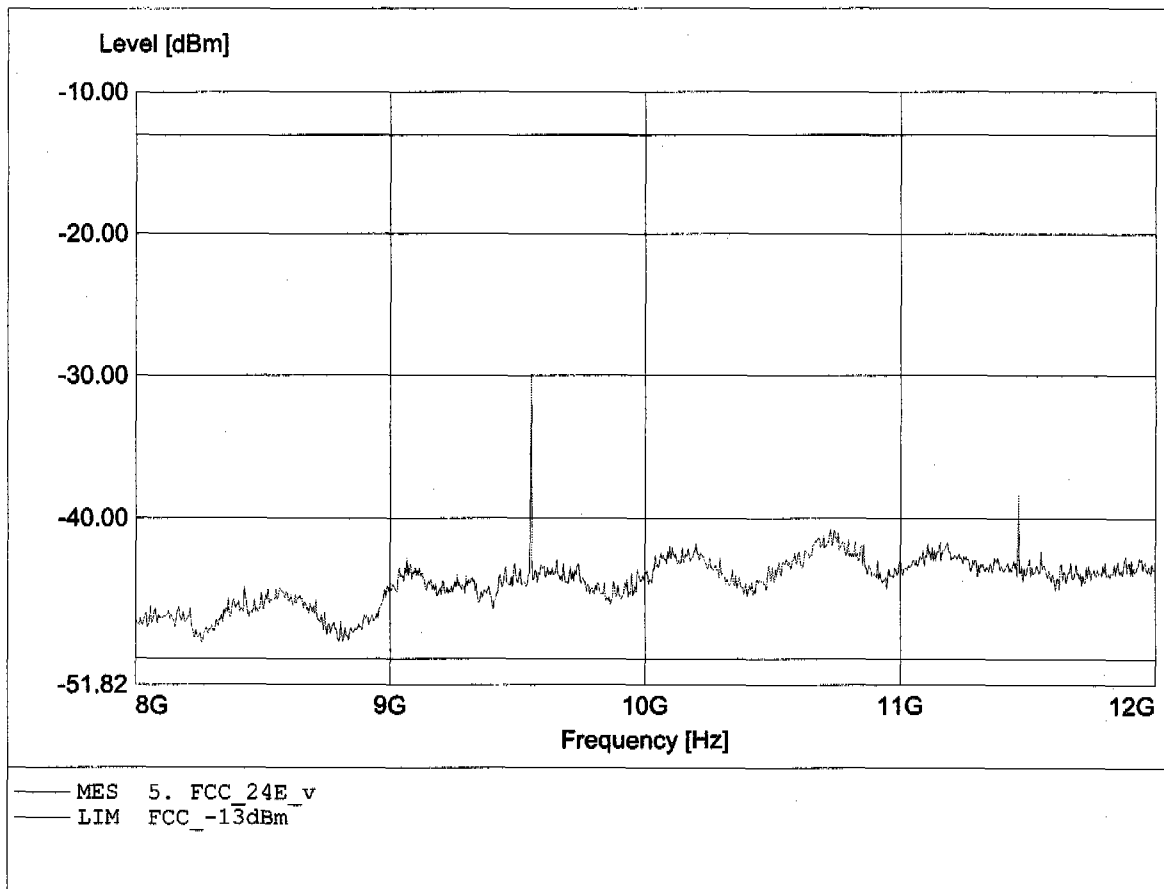


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 810
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 9.551GHz, Pmax: -29.83dBm, RBW: 1MHz

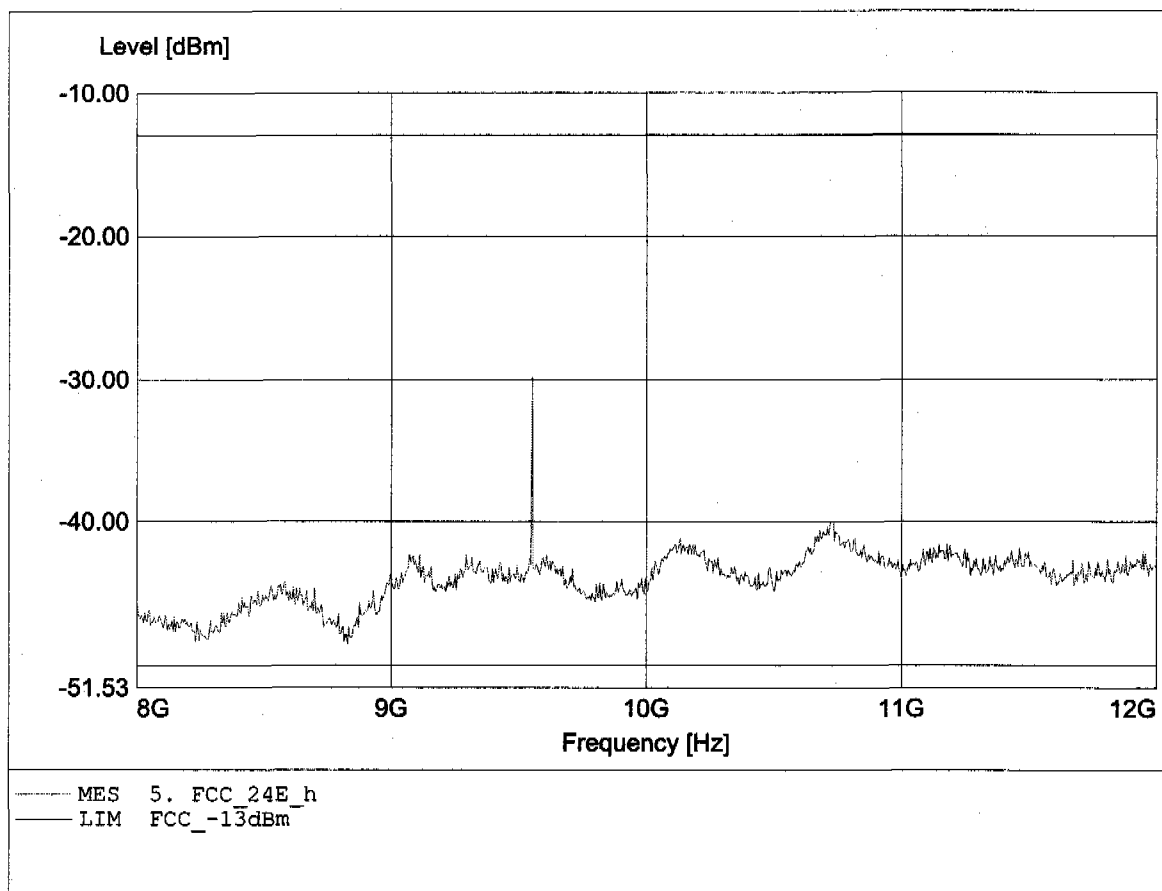


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 810
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.447GHz, Pmax: -31.85dBm, RBW: 1MHz

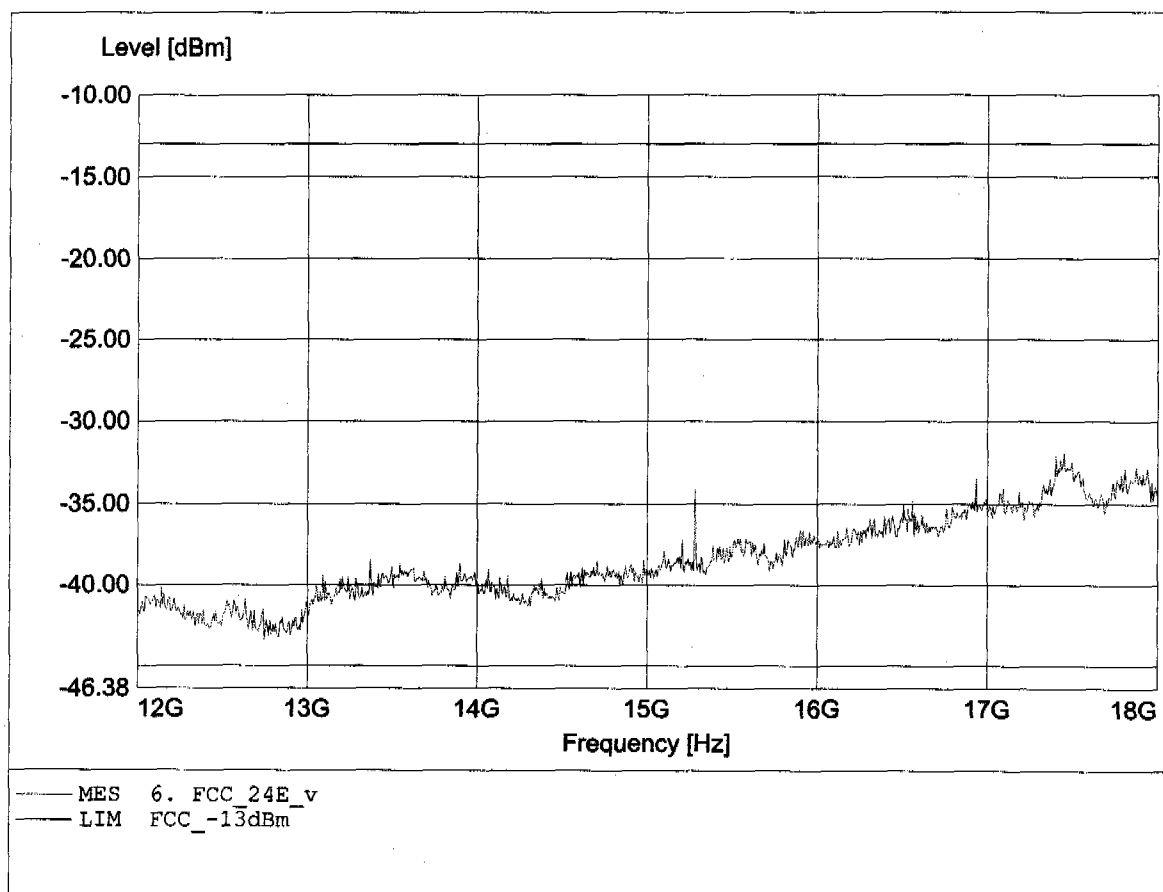


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 810
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 15.280GHz, Pmax: -31.02dBm, RBW: 1MHz

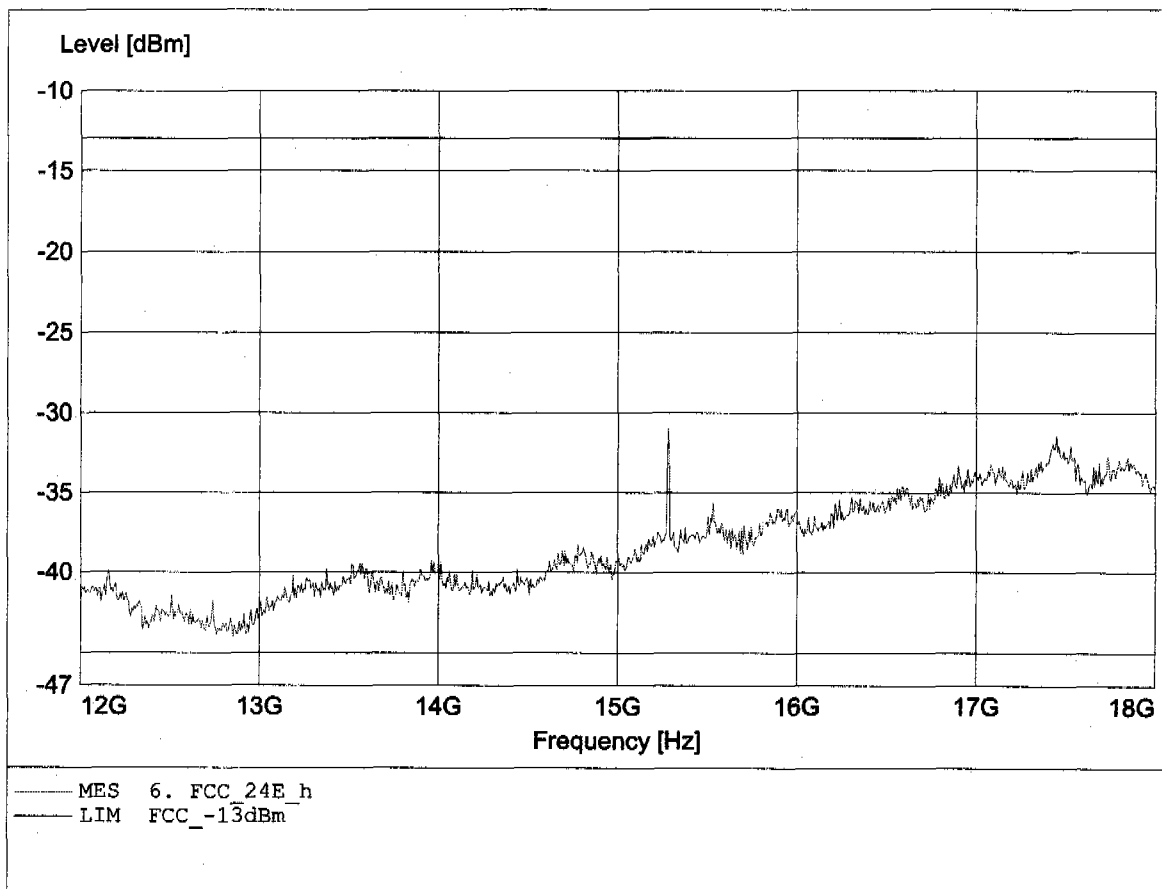


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 810
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.462GHz, Pmax: -23.82dBm, RBW: 1MHz

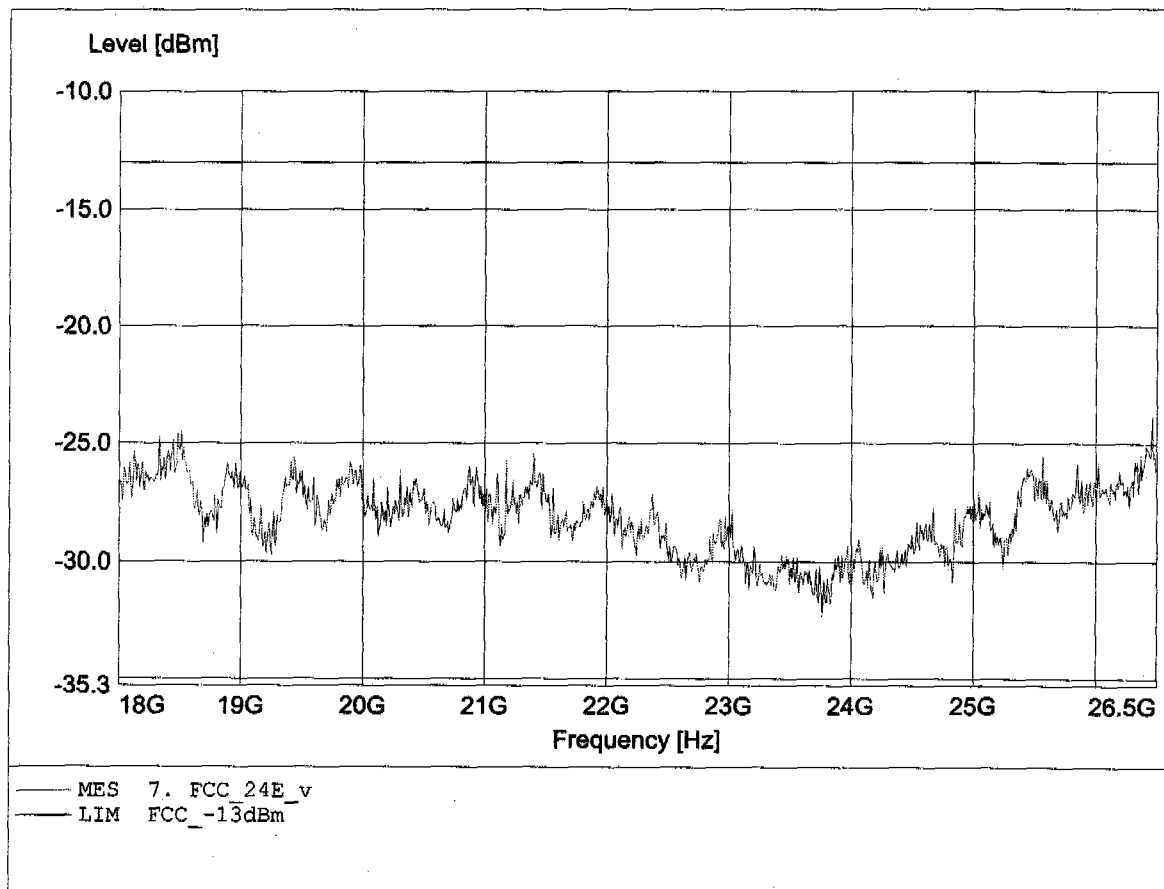


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 810
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 18.491GHz, Pmax: -24.98dBm, RBW: 1MHz

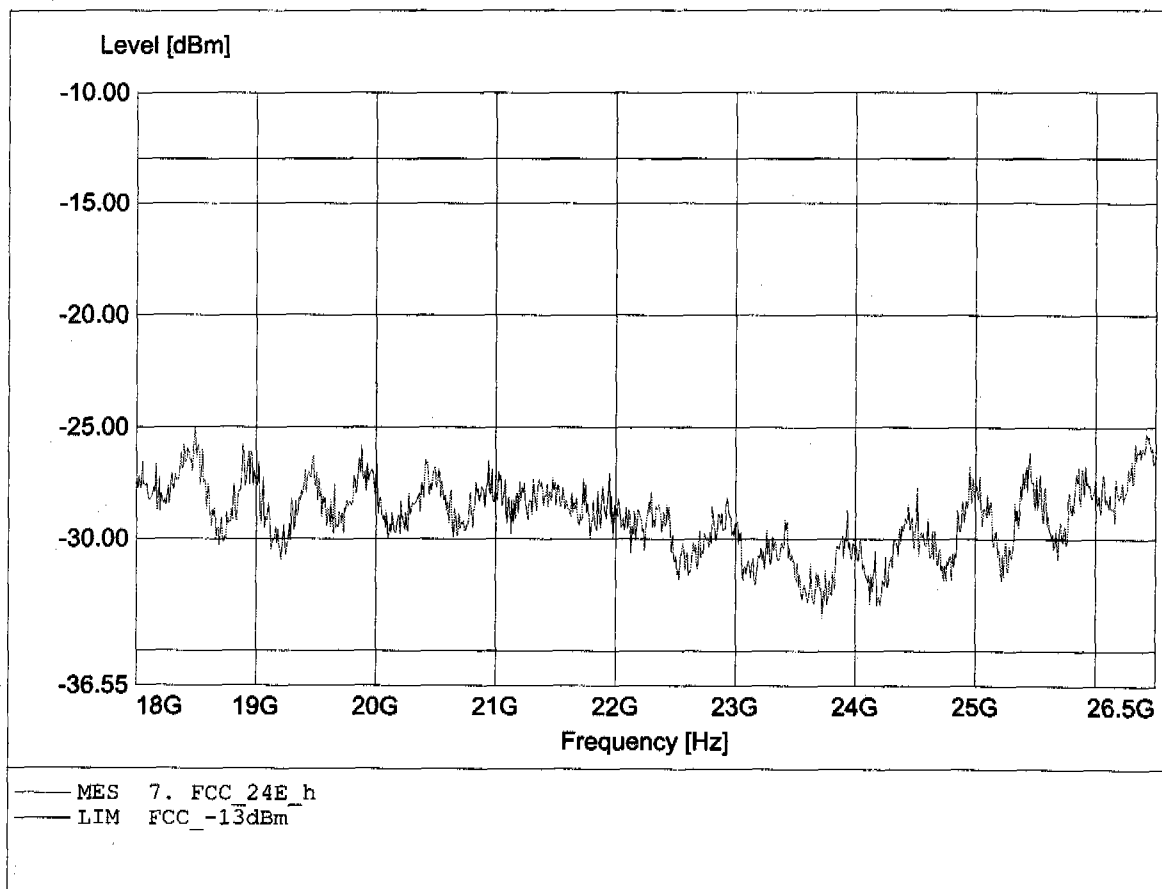


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 128
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 36.044MHz, Pmax: -52.85dBm, RBW: 1MHz

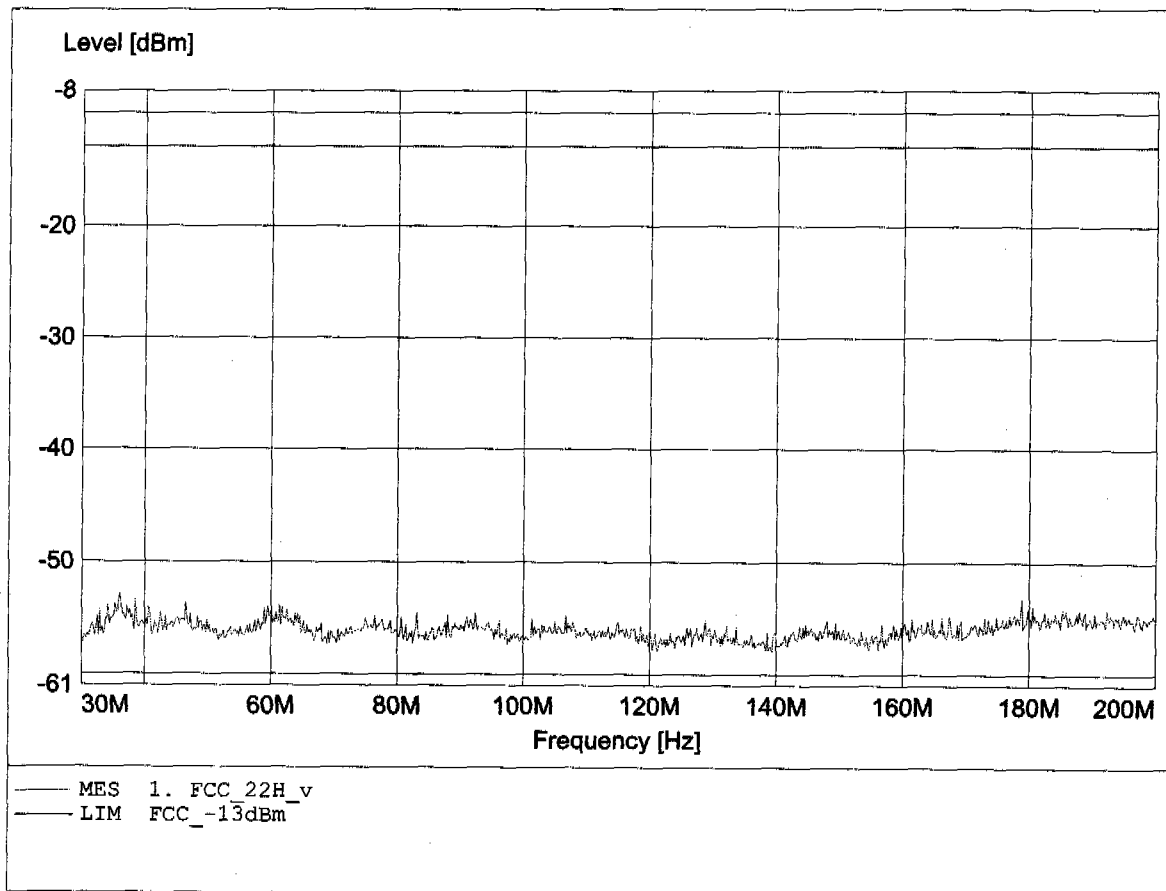


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 128
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 91.578MHz, Pmax: -52.79dBm, RBW: 1MHz

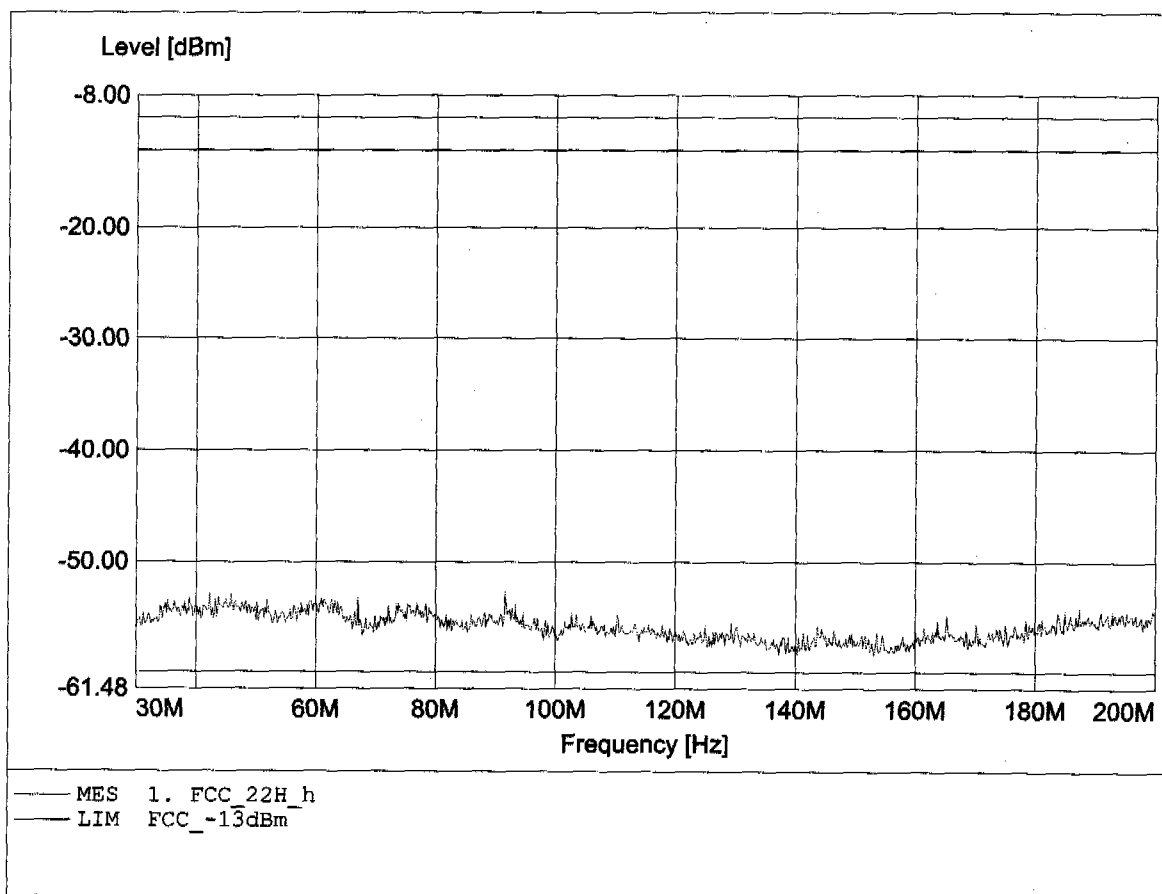


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 128
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL 223+notch
Comment 2: Freq: 823.994MHz, Pmax: -31.19dBm, RBW: 1MHz

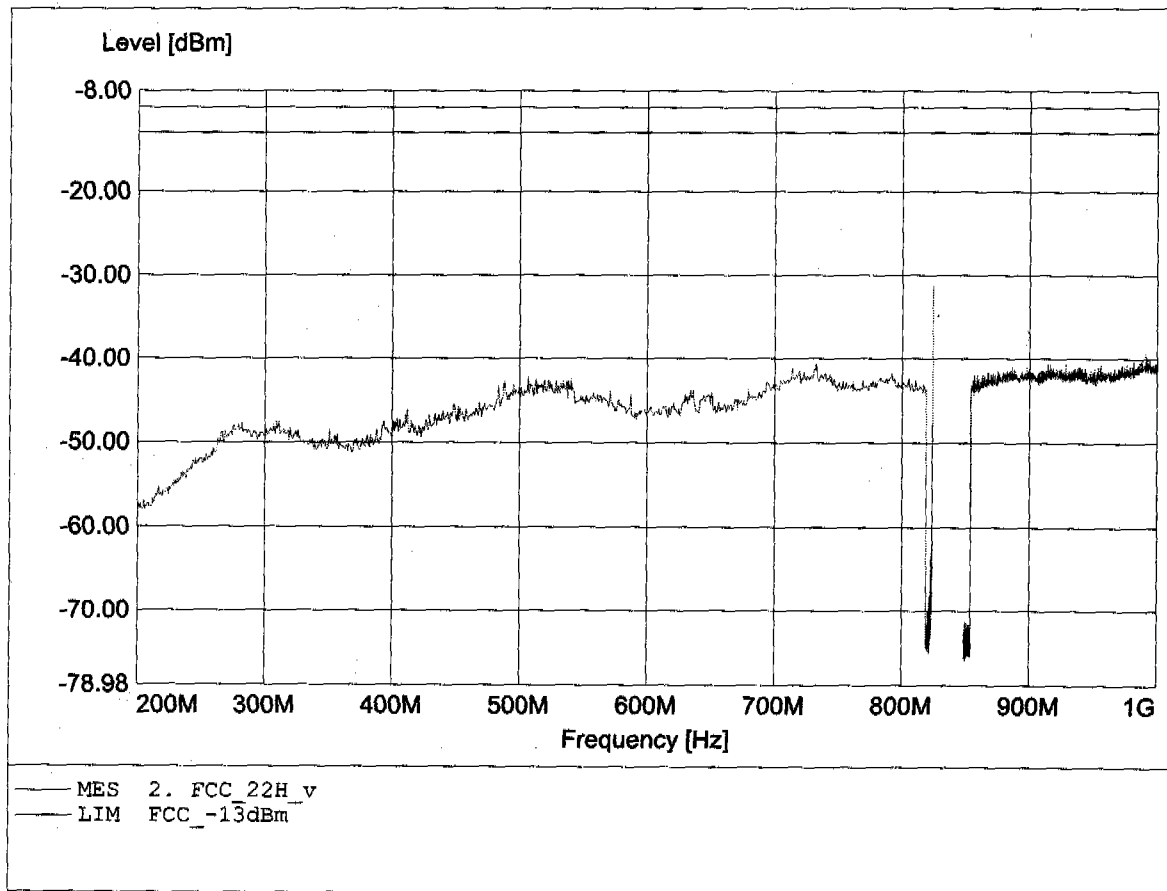


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 128
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL 223+notch
Comment 2: Freq: 823.994MHz, Pmax: -32.08dBm, RBW: 1MHz

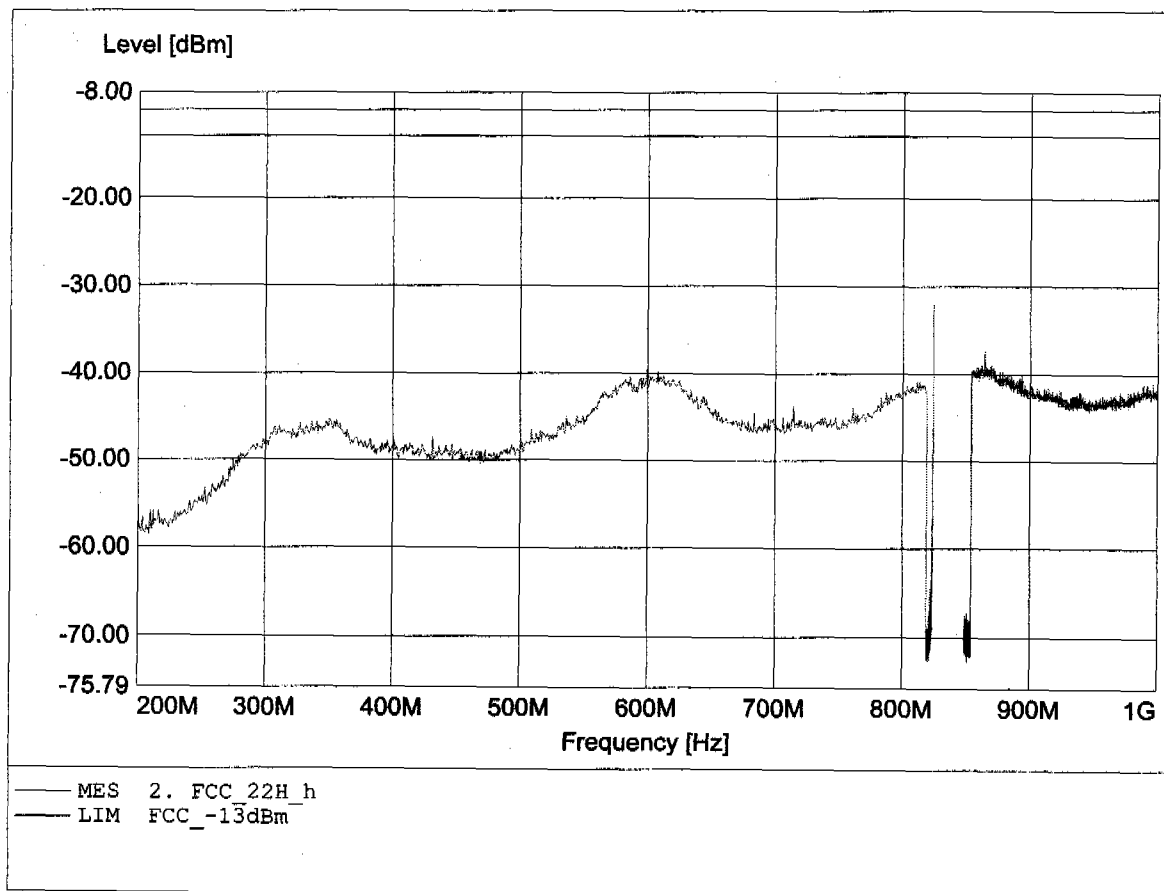


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 128
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.627GHz, Pmax: -22.62dBm, RBW: 1MHz

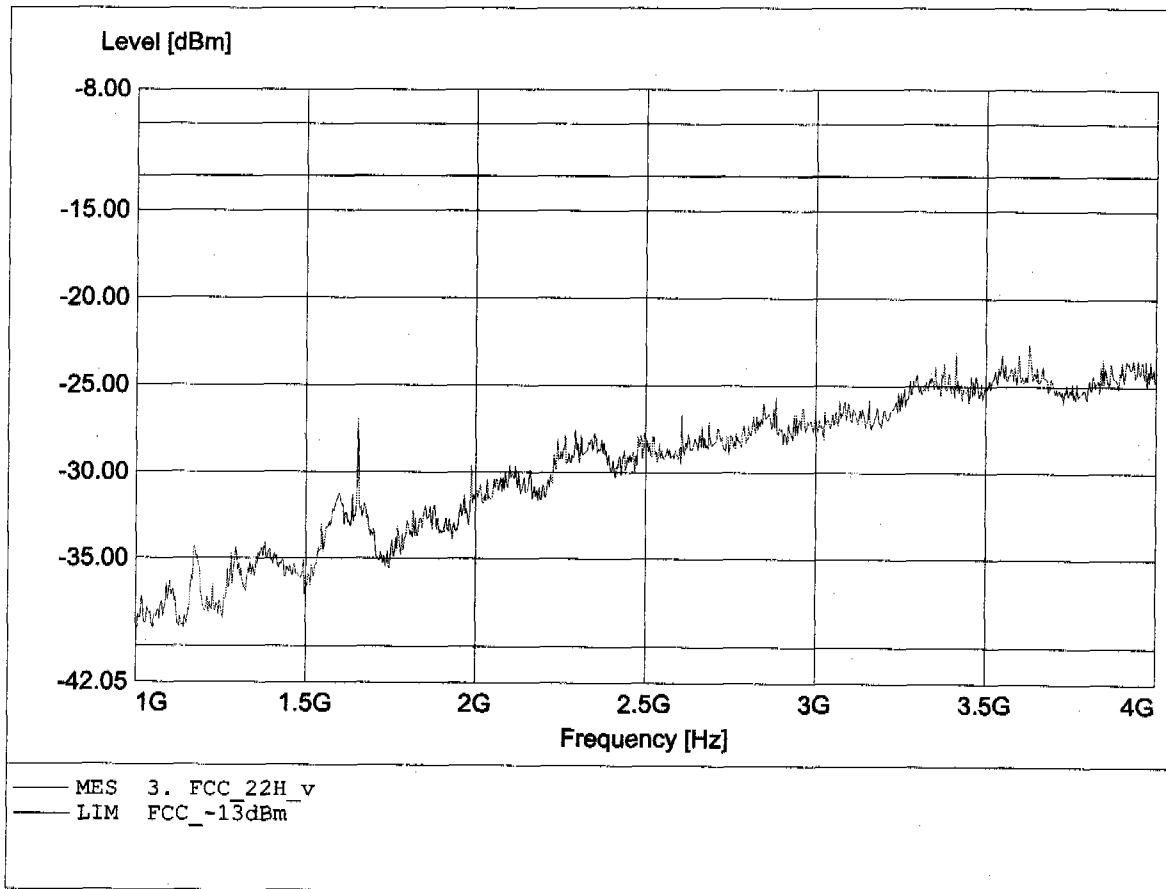


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 128
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 1.653GHz, Pmax: -22.48dBm, RBW: 1MHz

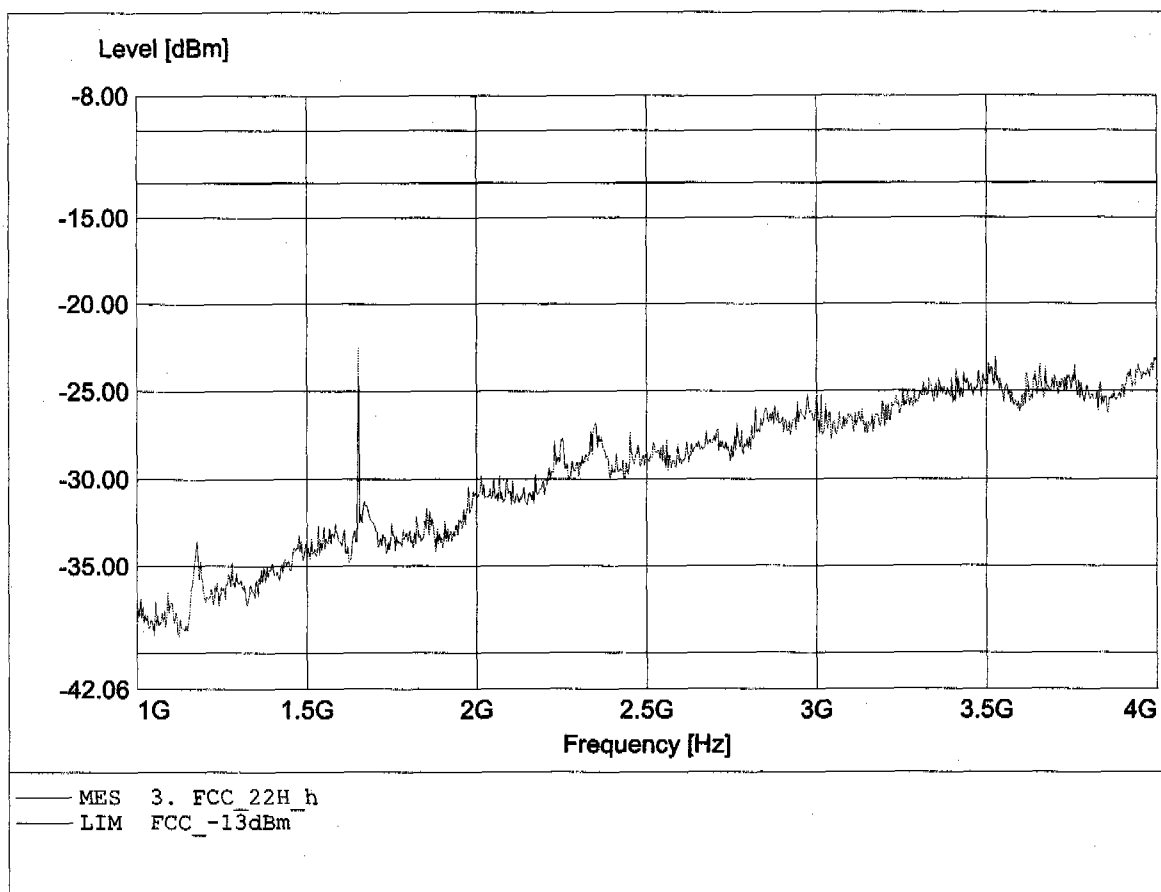


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 128
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.418GHz, Pmax: -38.28dBm, RBW: 1MHz

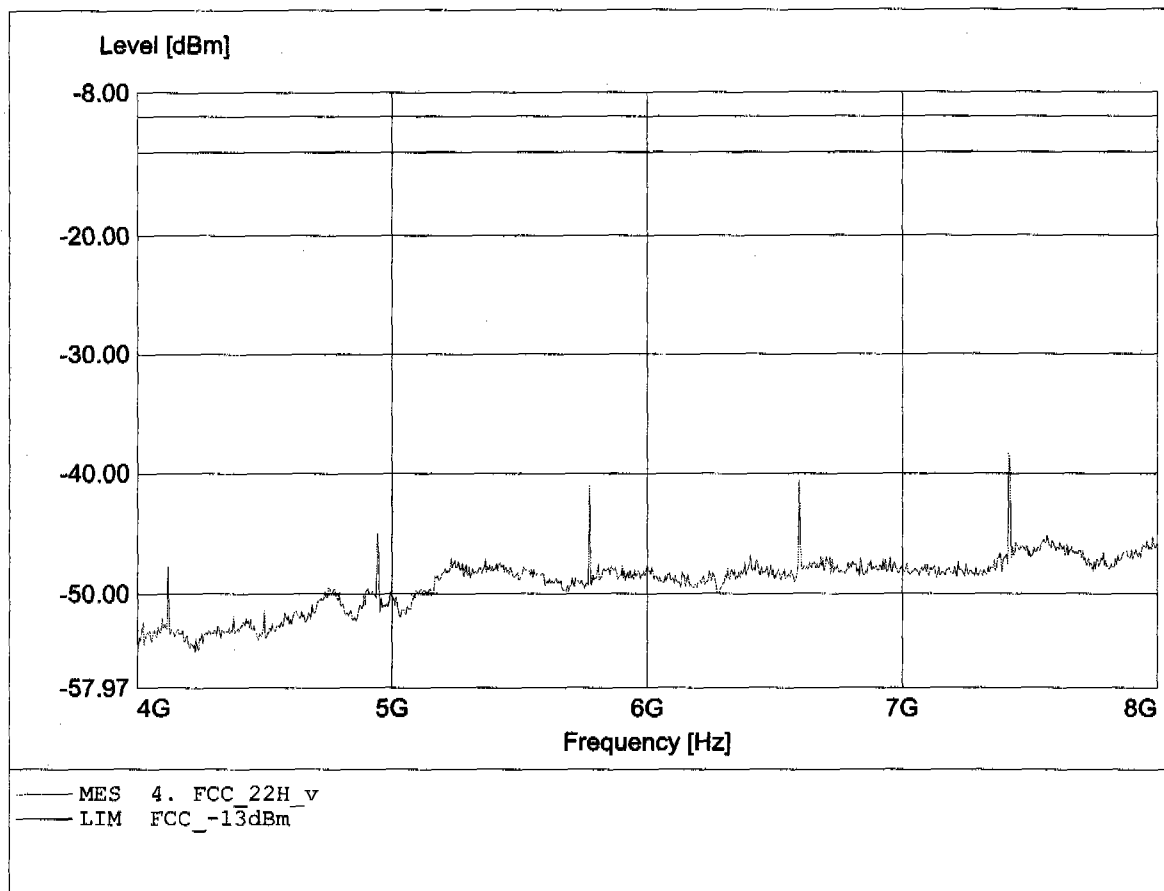


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 128
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 6.596GHz, Pmax: -40.52dBm, RBW: 1MHz

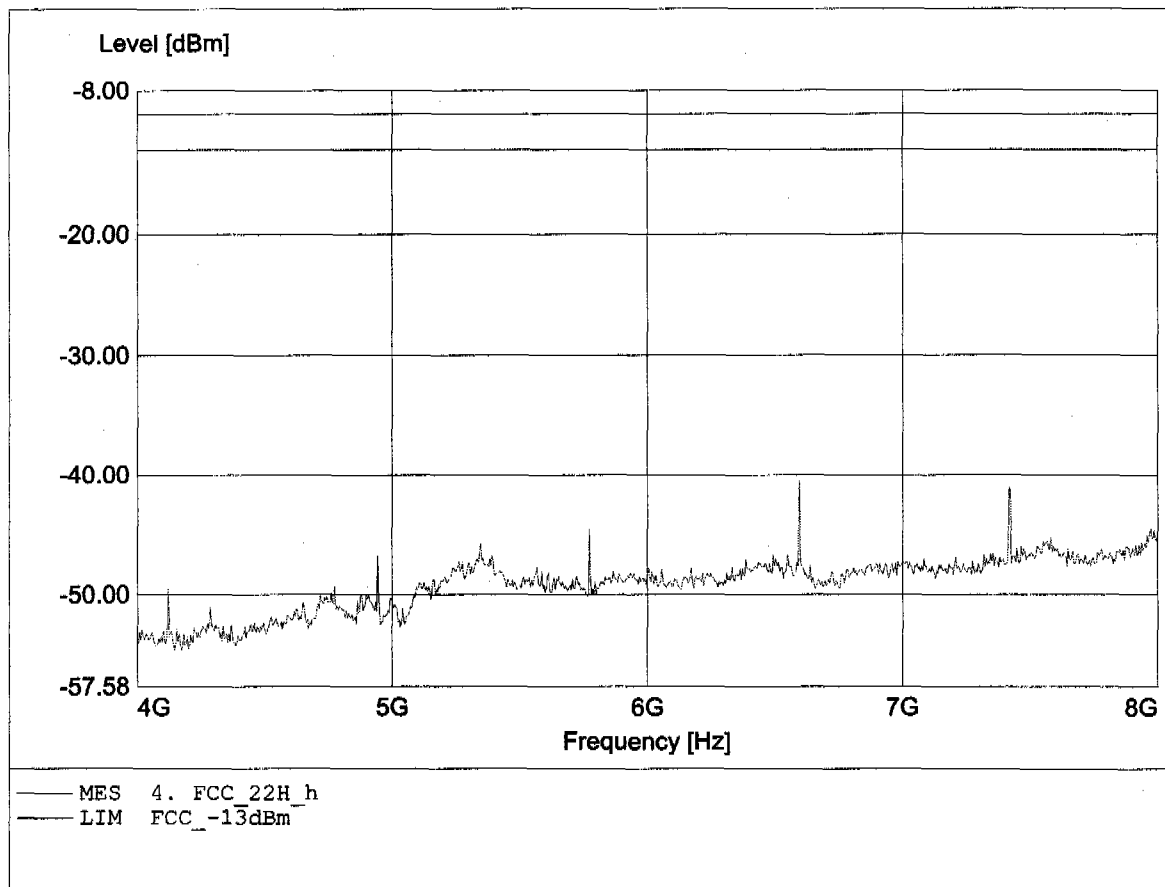


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 128
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.729GHz, Pmax: -40.50dBm, RBW: 1MHz

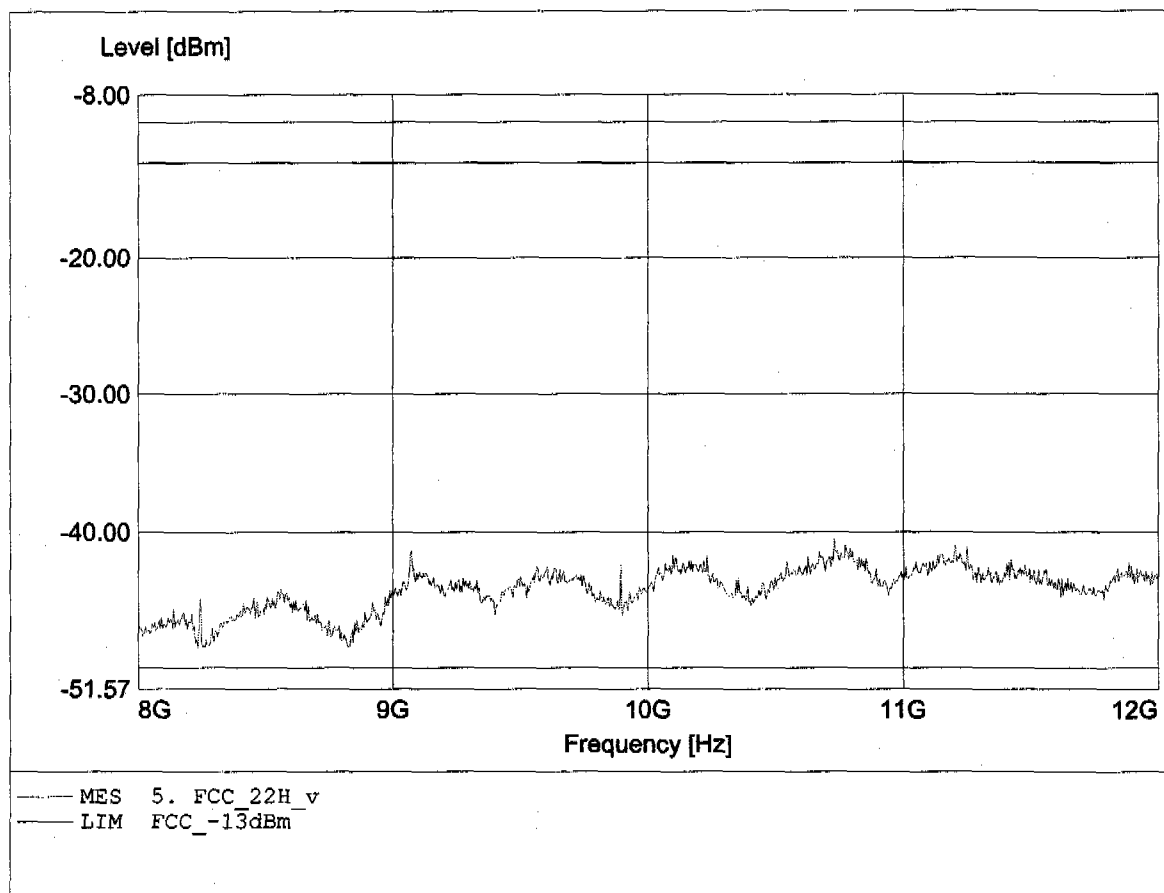


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 128
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.747GHz, Pmax: -40.00dBm, RBW: 1MHz

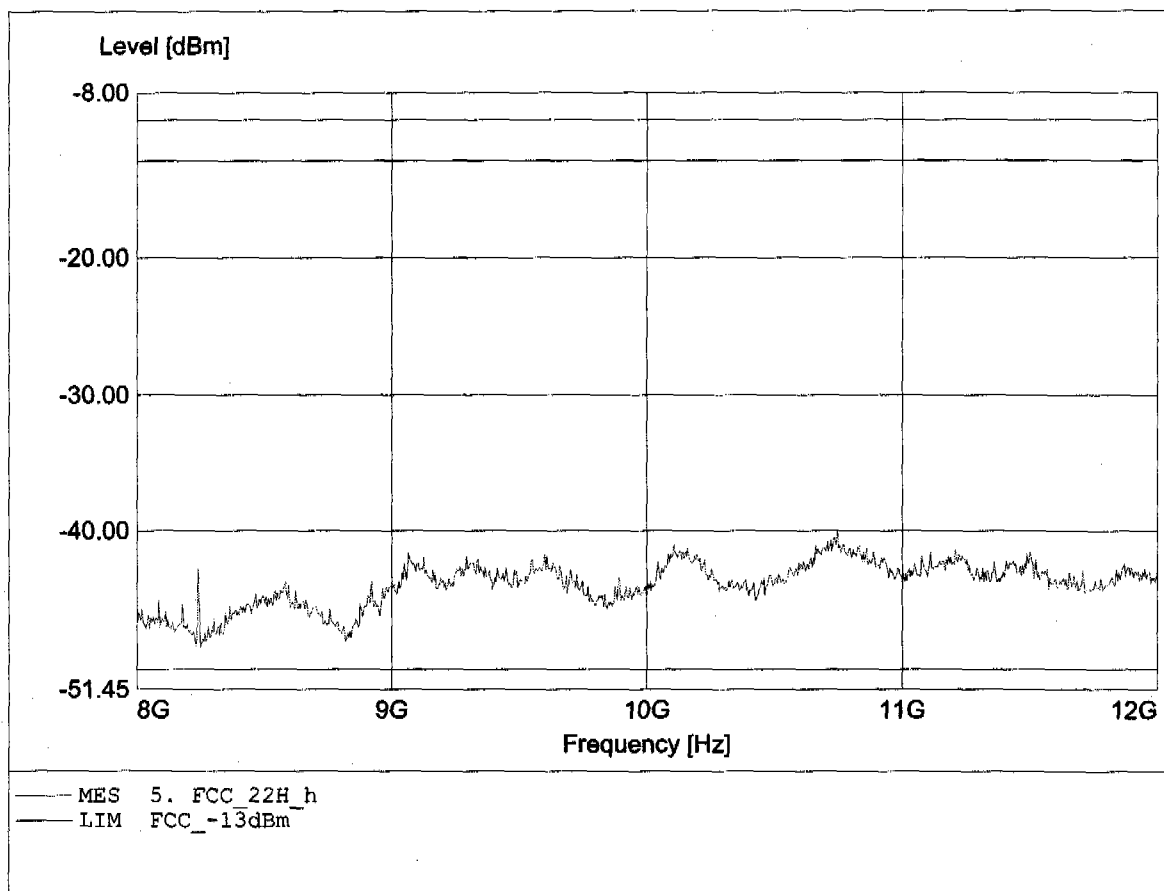


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 188
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 191.689MHz, Pmax: -53.48dBm, RBW: 1MHz

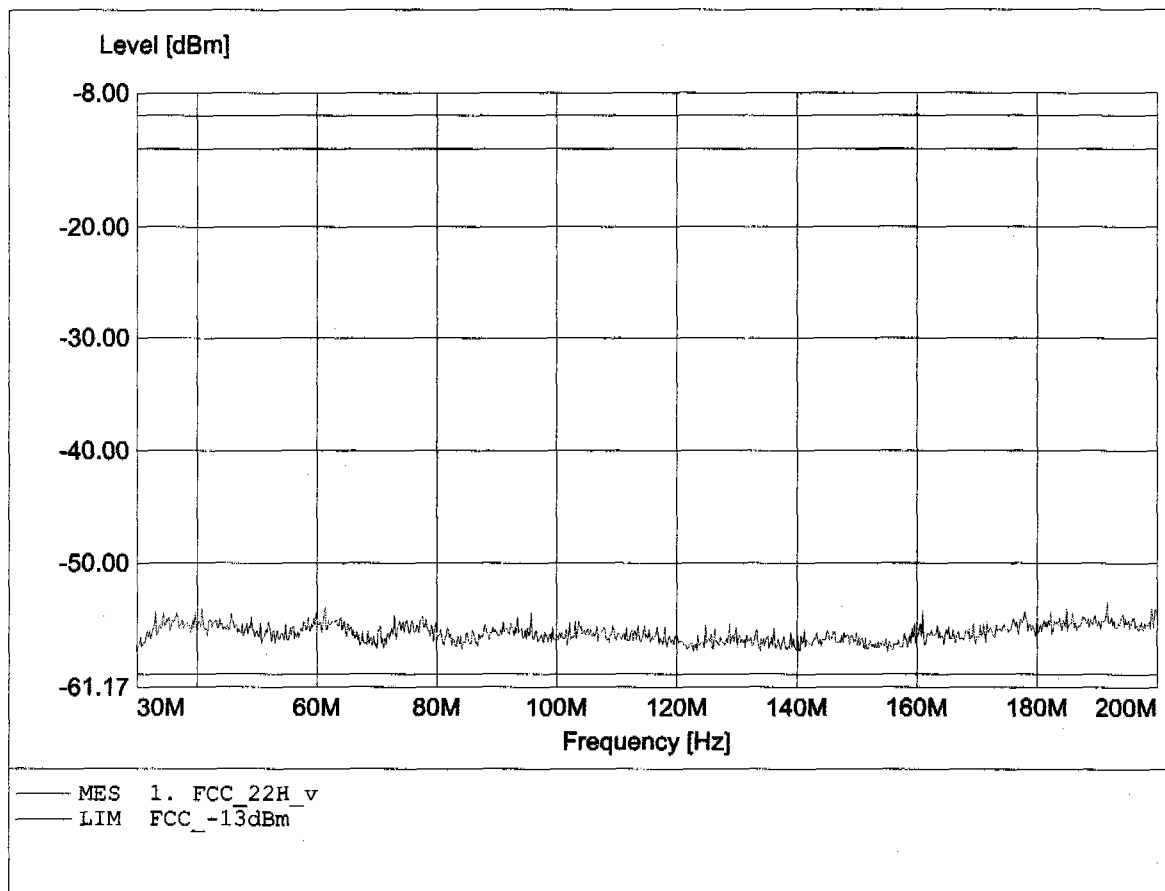


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 188
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 43.789MHz, Pmax: -52.30dBm, RBW: 1MHz

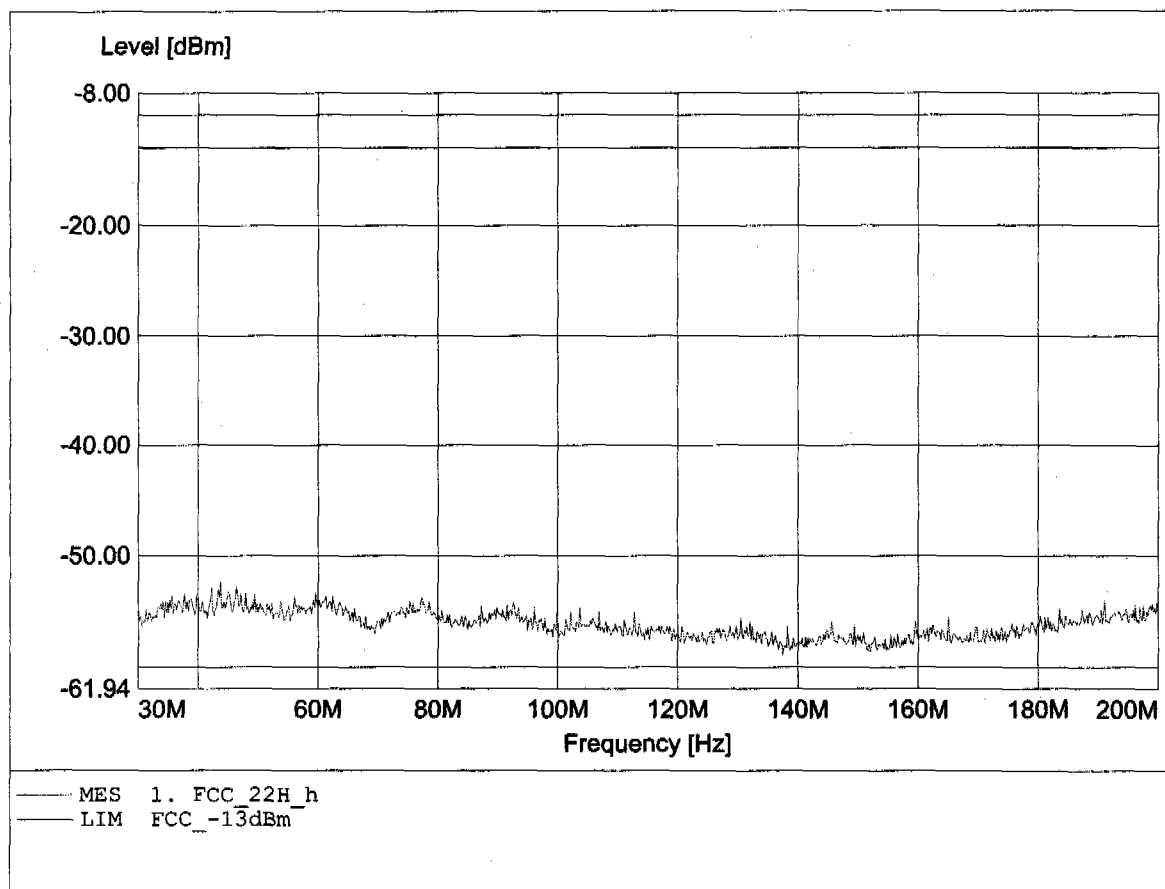


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 188
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL 223+notch
Comment 2: Freq: 929.109MHz, Pmax: -38.83dBm, RBW: 1MHz

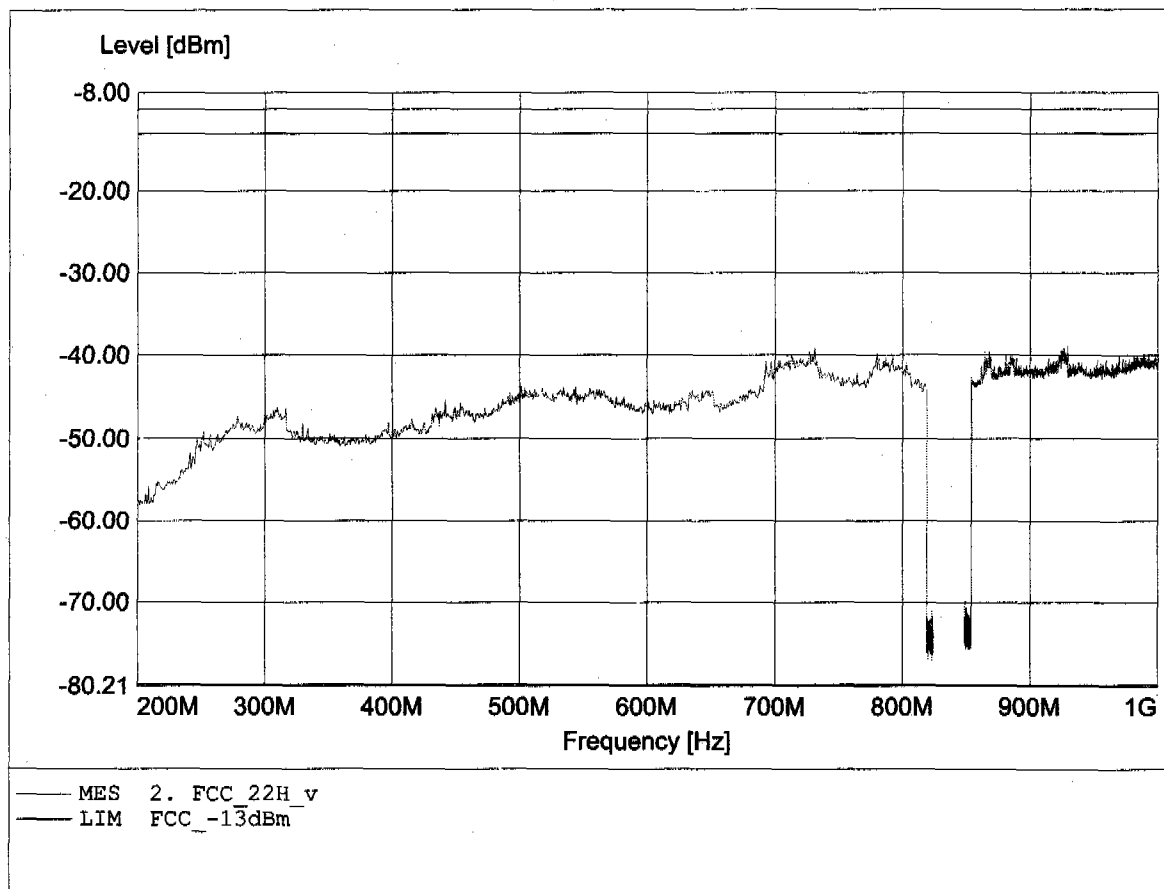


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 188
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL 223+notch
Comment 2: Freq: 855.136MHz, Pmax: -38.41dBm, RBW: 1MHz

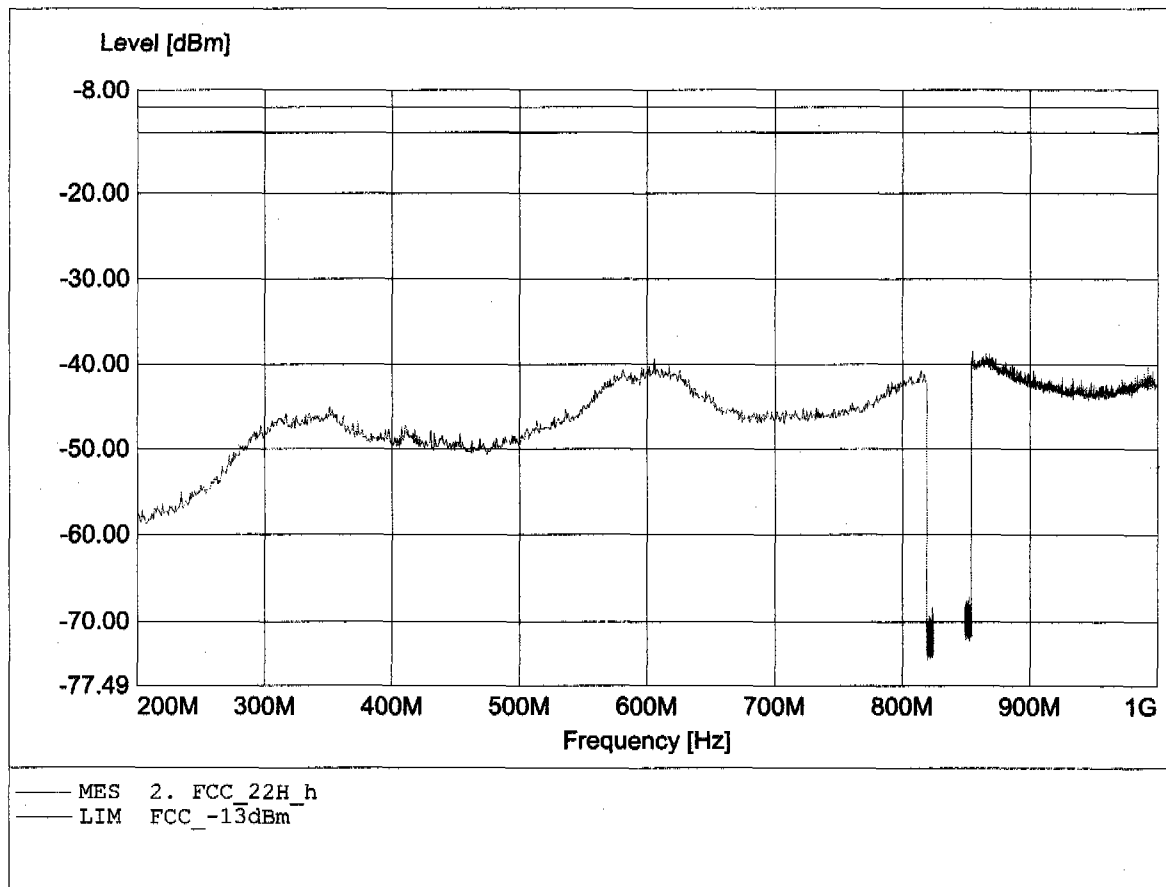


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 188
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.943GHz, Pmax: -23.04dBm, RBW: 1MHz

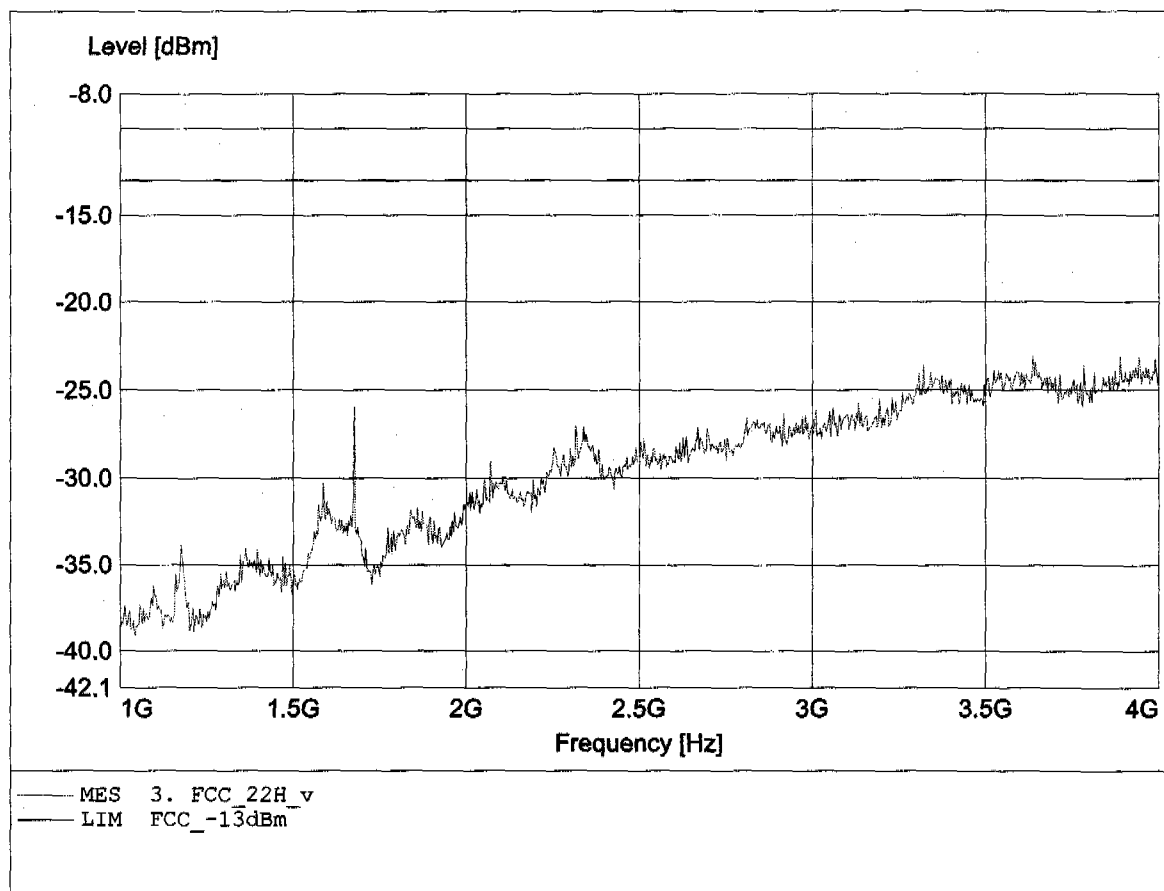


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 188
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 1.677GHz, Pmax: -21.75dBm, RBW: 1MHz

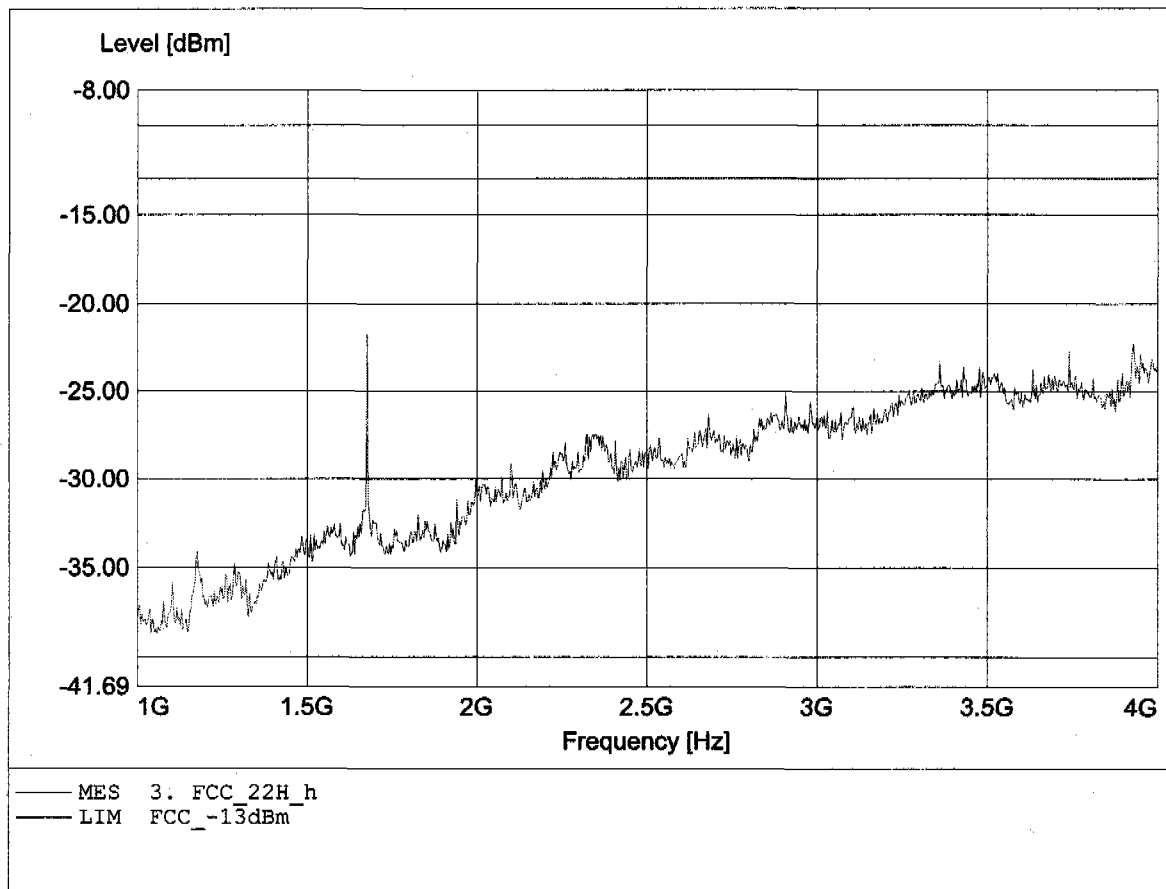


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 188
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 6.693GHz, Pmax: -38.33dBm, RBW: 1MHz

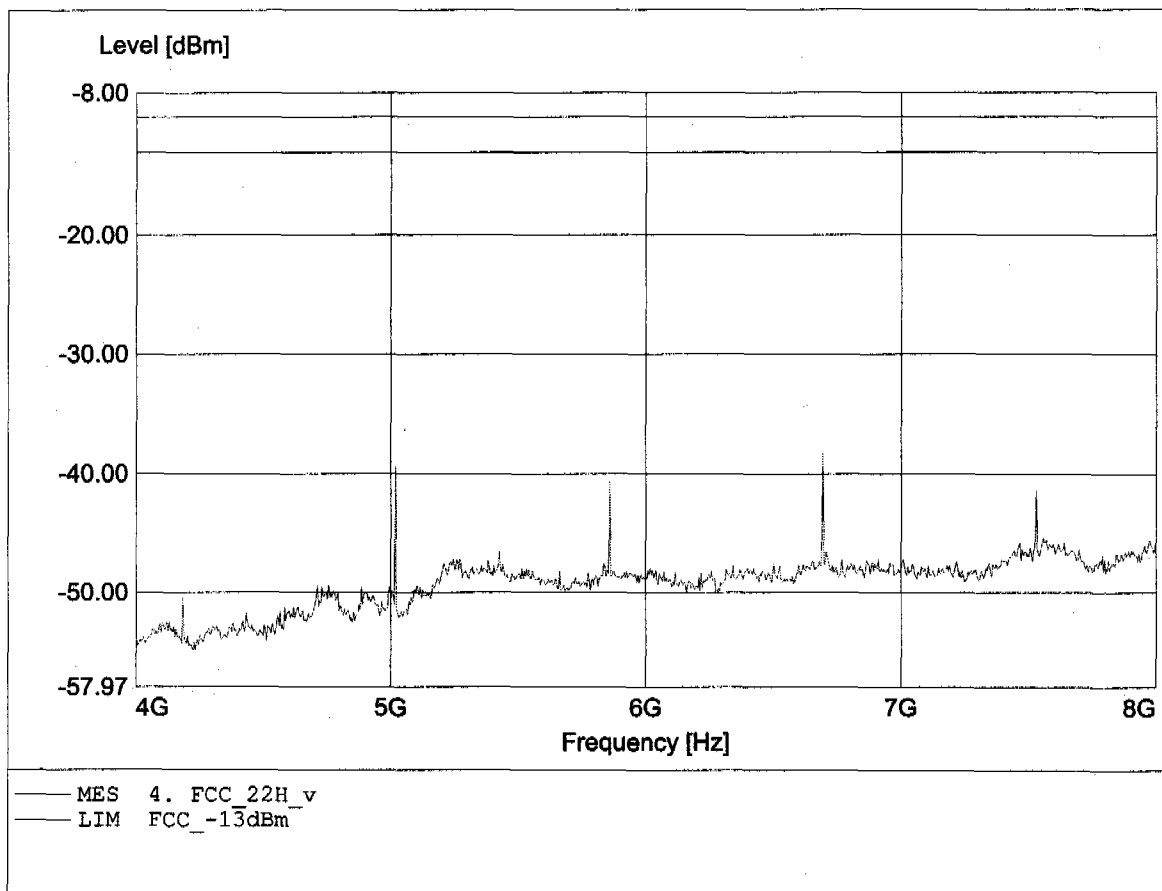


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 188
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 5.018GHz, Pmax: -41.22dBm, RBW: 1MHz

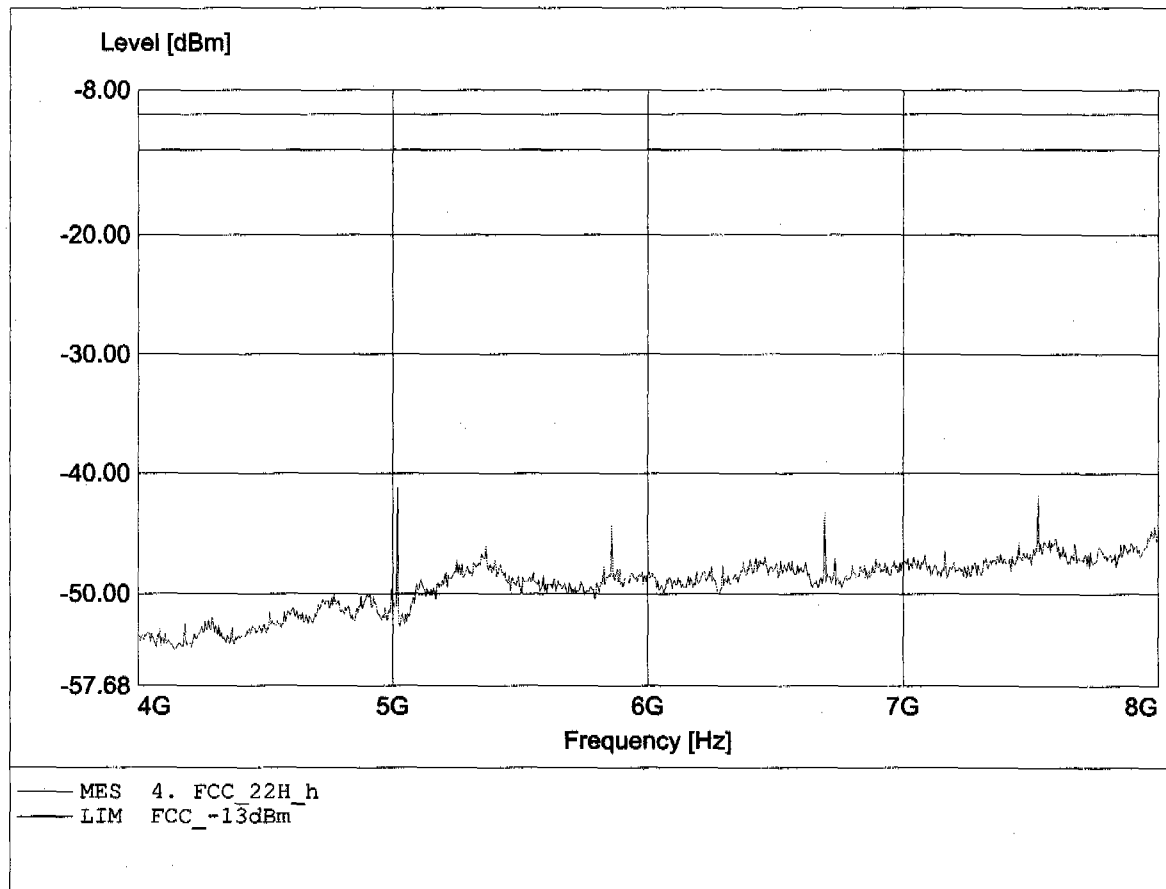


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 188
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 9.200GHz, Pmax: -40.07dBm, RBW: 1MHz

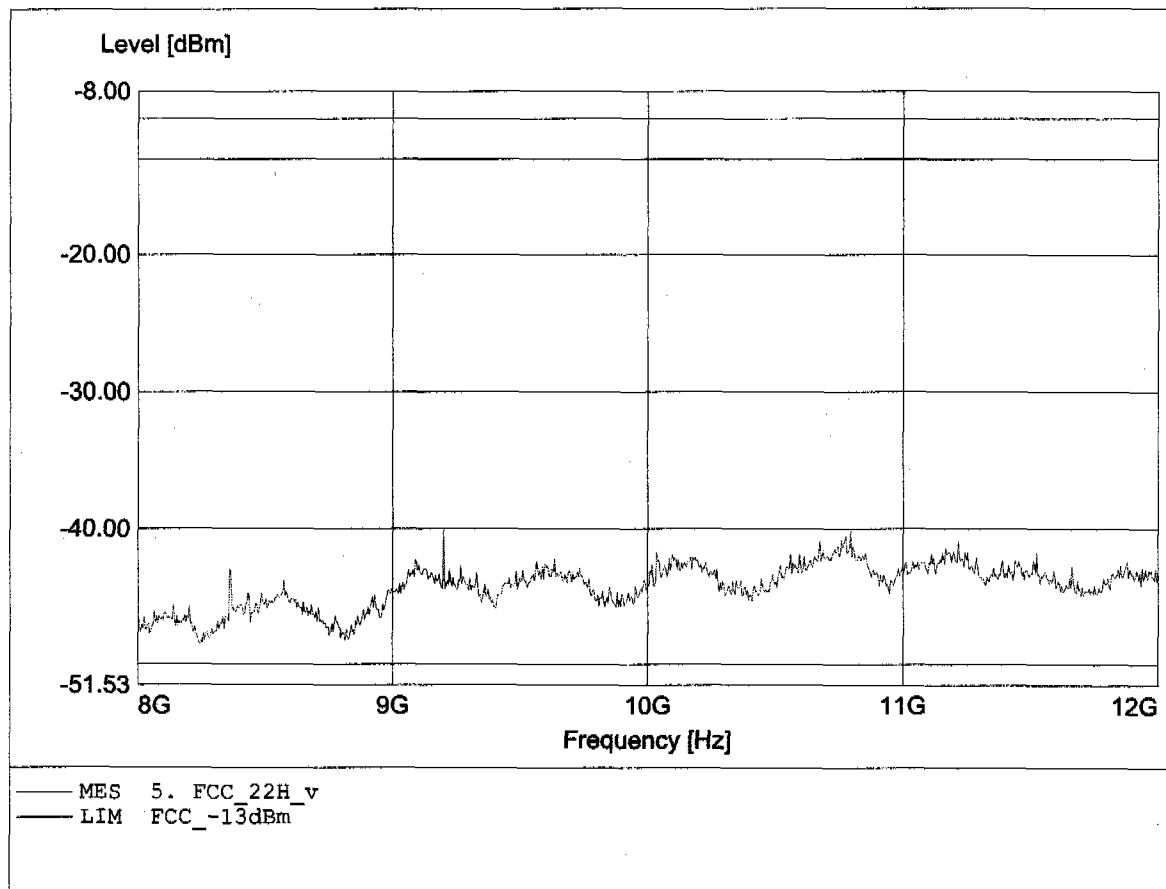


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 188
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: BTS / Mr. Hoppe
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.733GHz, Pmax: -40.15dBm, RBW: 1MHz

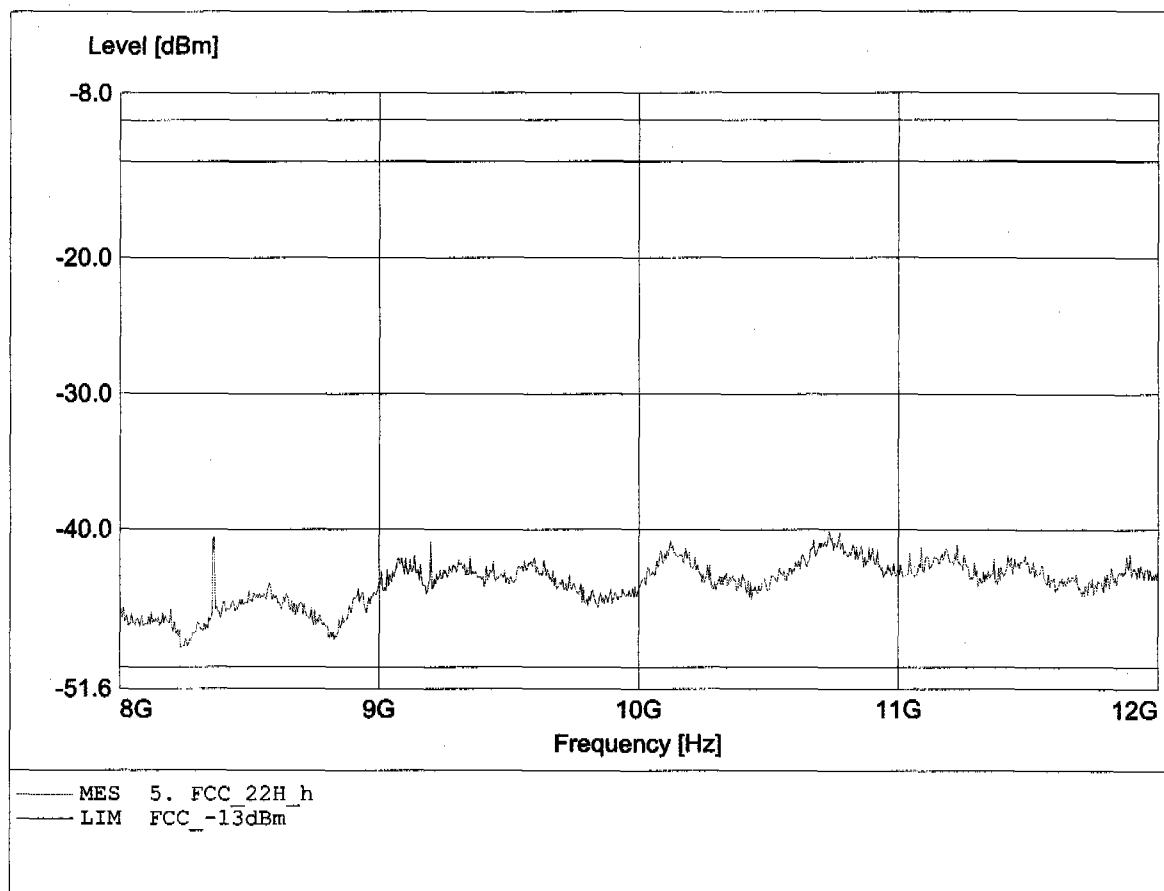


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 251
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 180.544MHz, Pmax: -53.42dBm, RBW: 1MHz

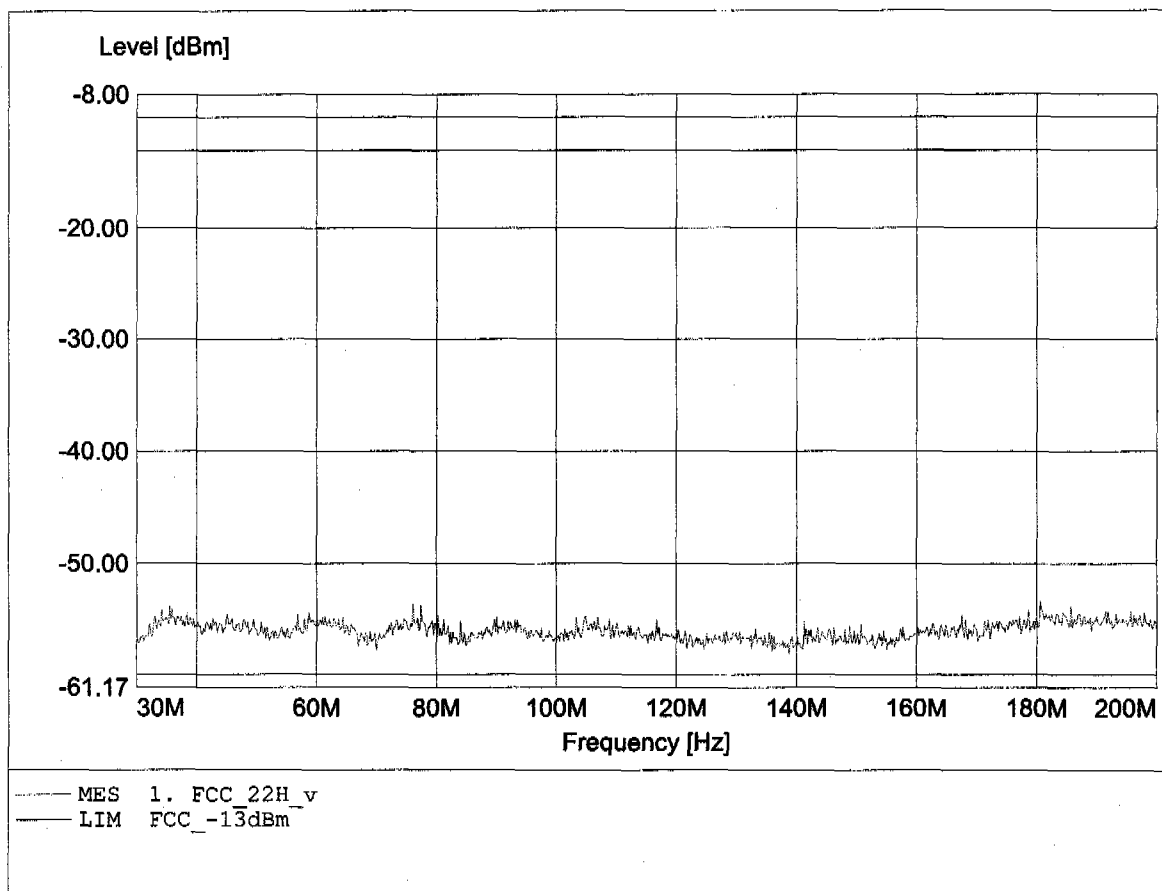


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 251
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 48.889MHz, Pmax: -53.18dBm, RBW: 1MHz

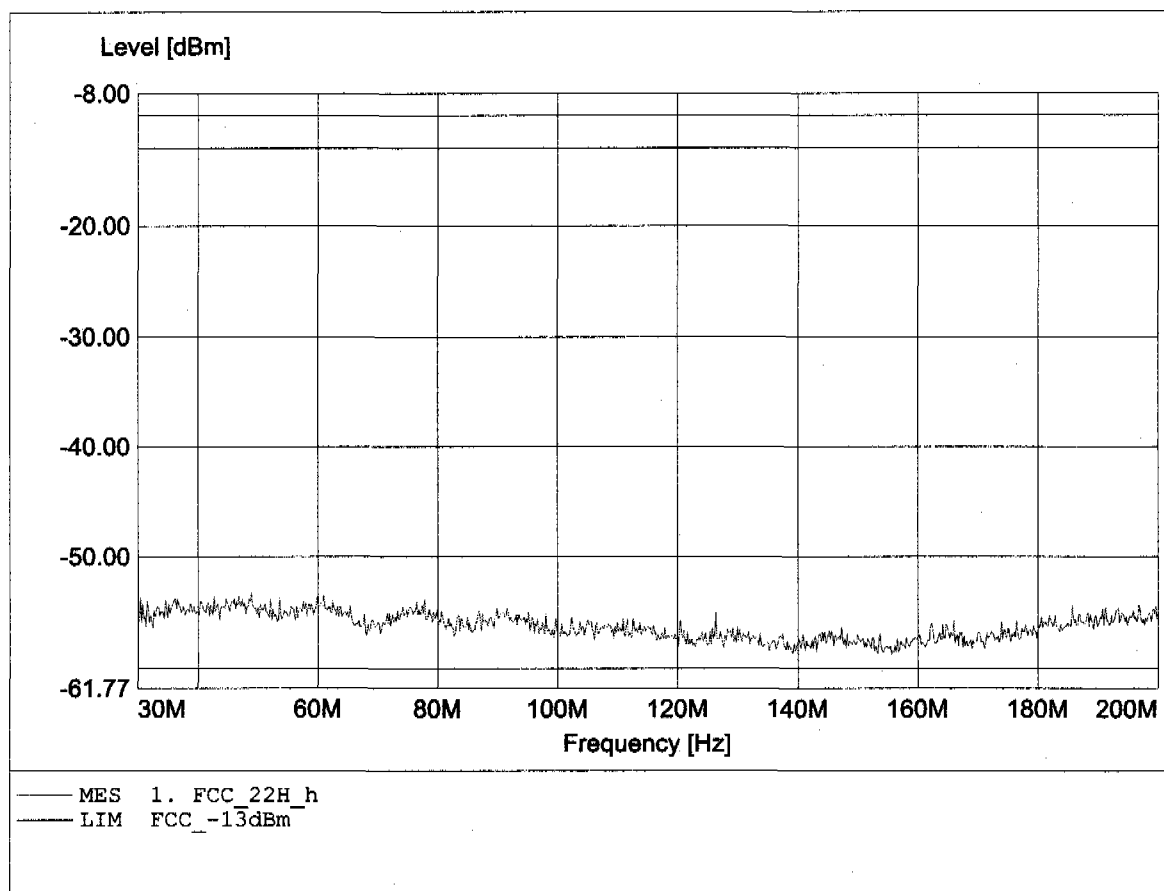


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Peiker acoustic GmbH & Co. KG
 EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
 Cannel: 251
 Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
 Test Site / Operator: ETS / Mr. Hoppe
 Test Specification: according to S22.917
 Comment 1: Dist.: 3m, Ant.: HL 223+notch
 Comment 2: Freq: 849.017MHz, Pmax: -23.99dBm, RBW: 1MHz

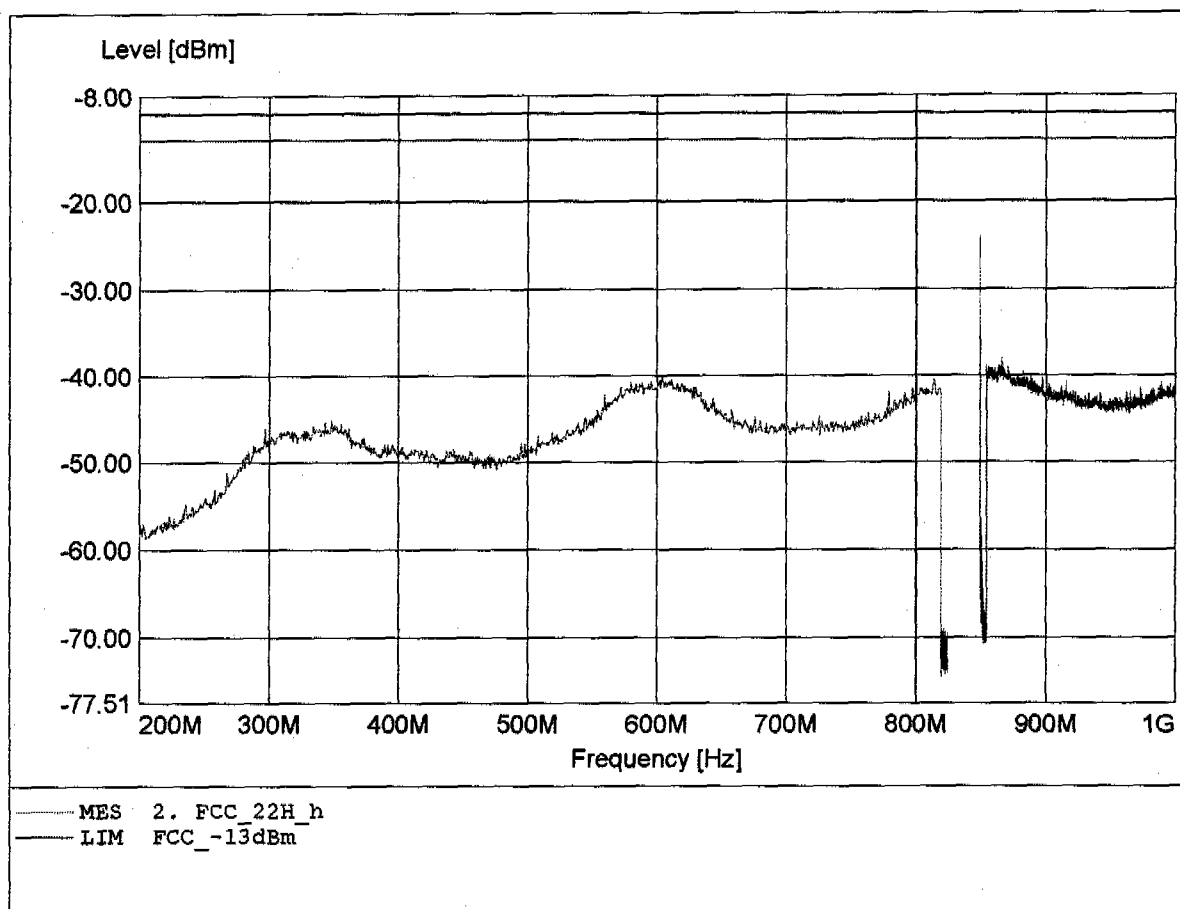


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 251
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL 223+notch
Comment 2: Freq: 849.017MHz, Pmax: -25.09dBm, RBW: 1MHz

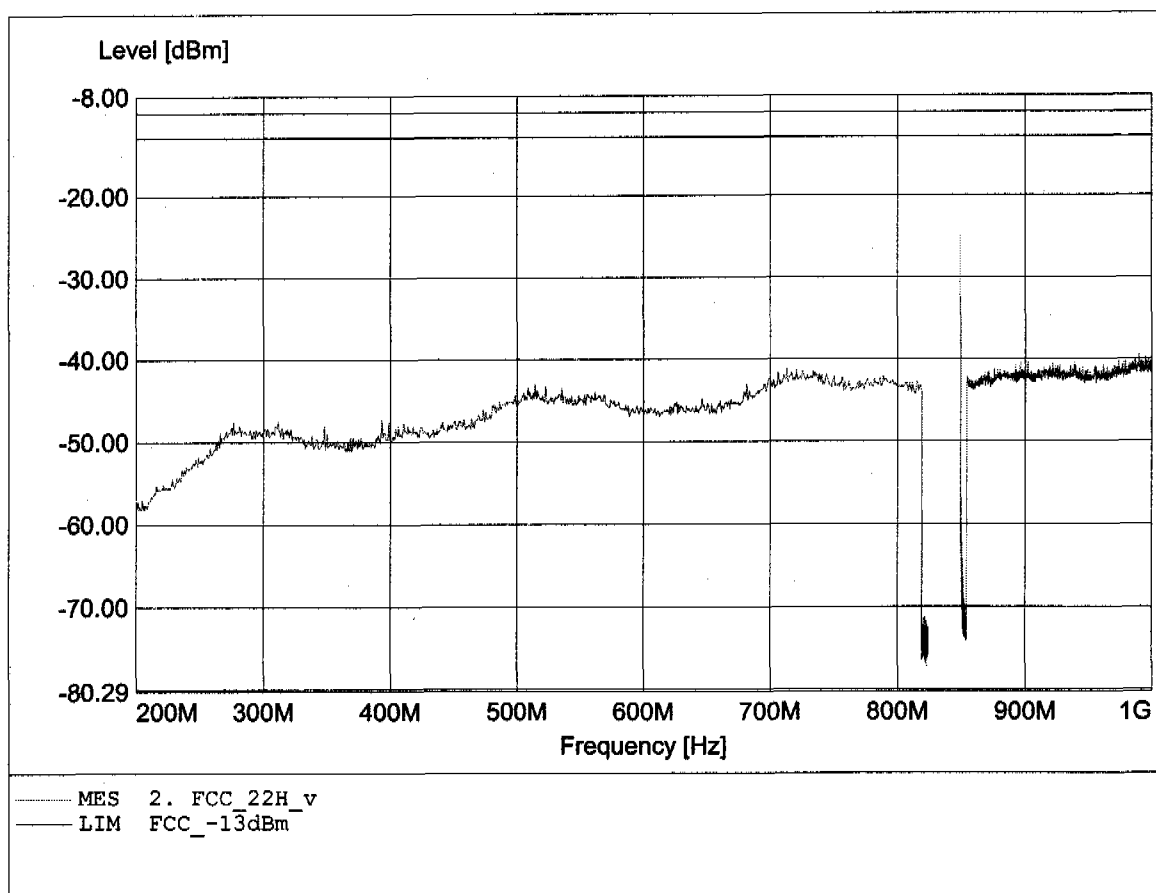


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 251
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.930GHz, Pmax: -22.99dBm, RBW: 1MHz

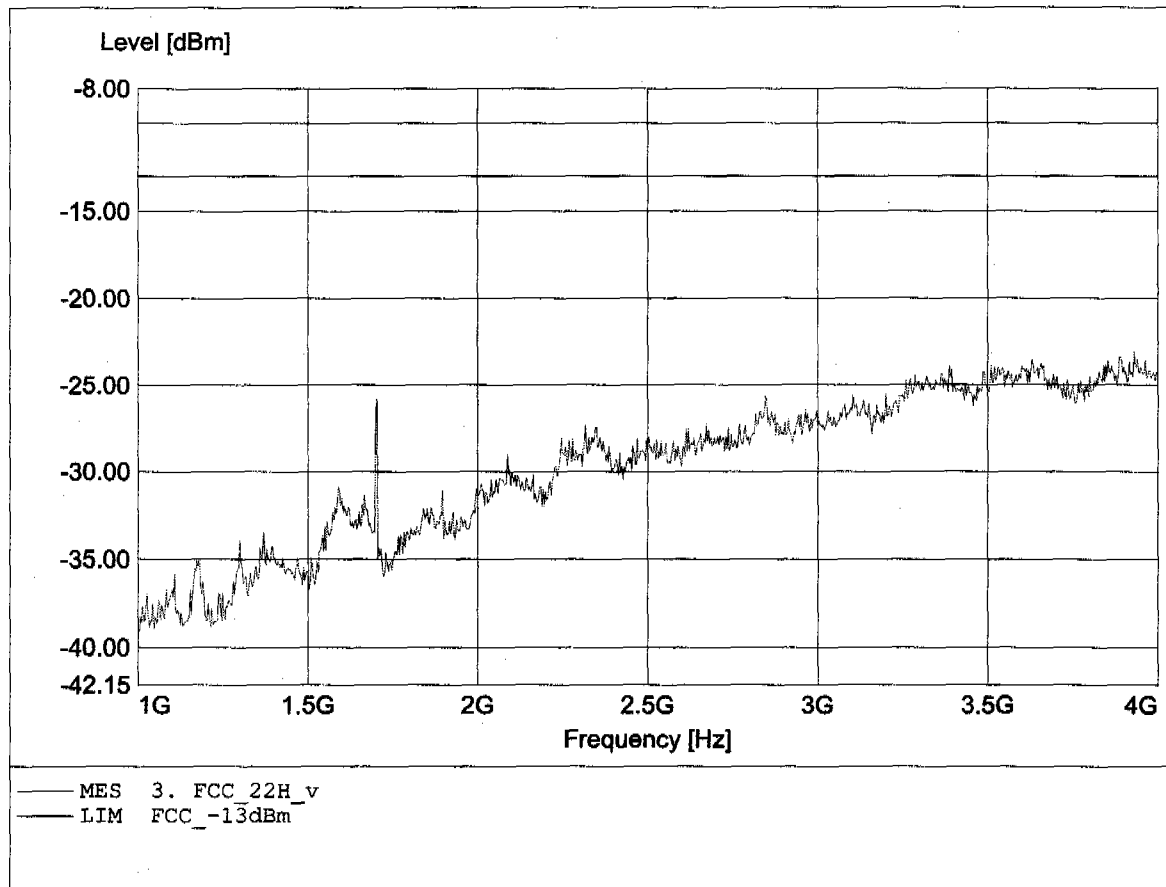


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 251
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 1.700GHz, Pmax: -21.71dBm, RBW: 1MHz

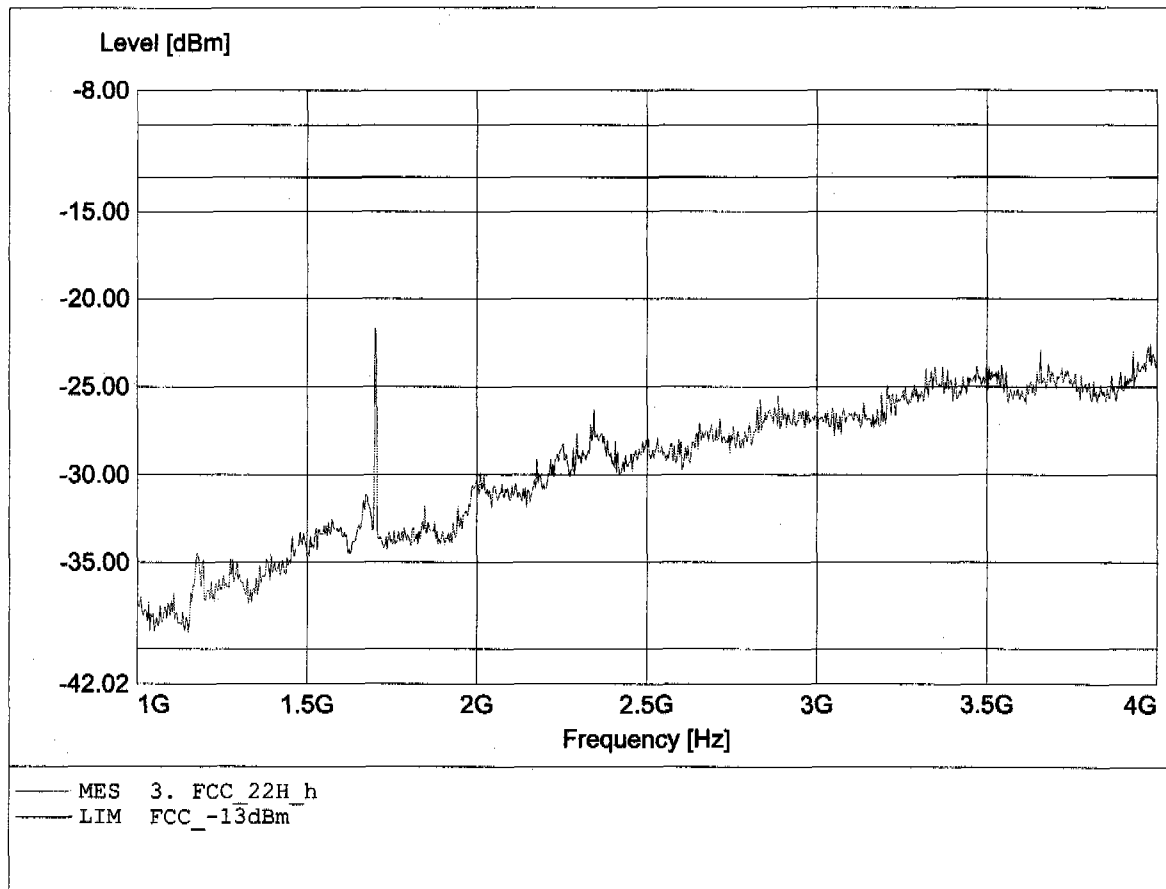


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 251
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 6.791GHz, Pmax: -37.34dBm, RBW: 1MHz

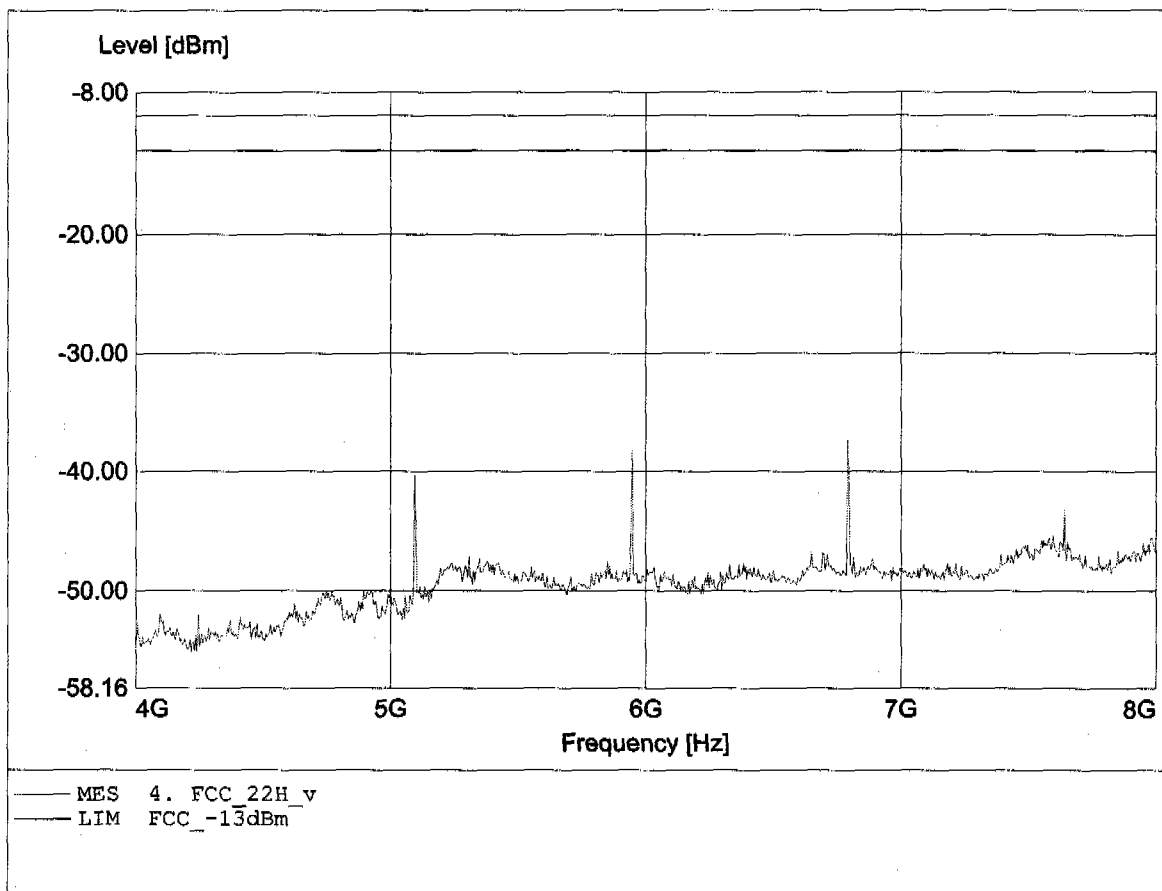


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 251
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 5.093GHz, Pmax: -39.28dBm, RBW: 1MHz

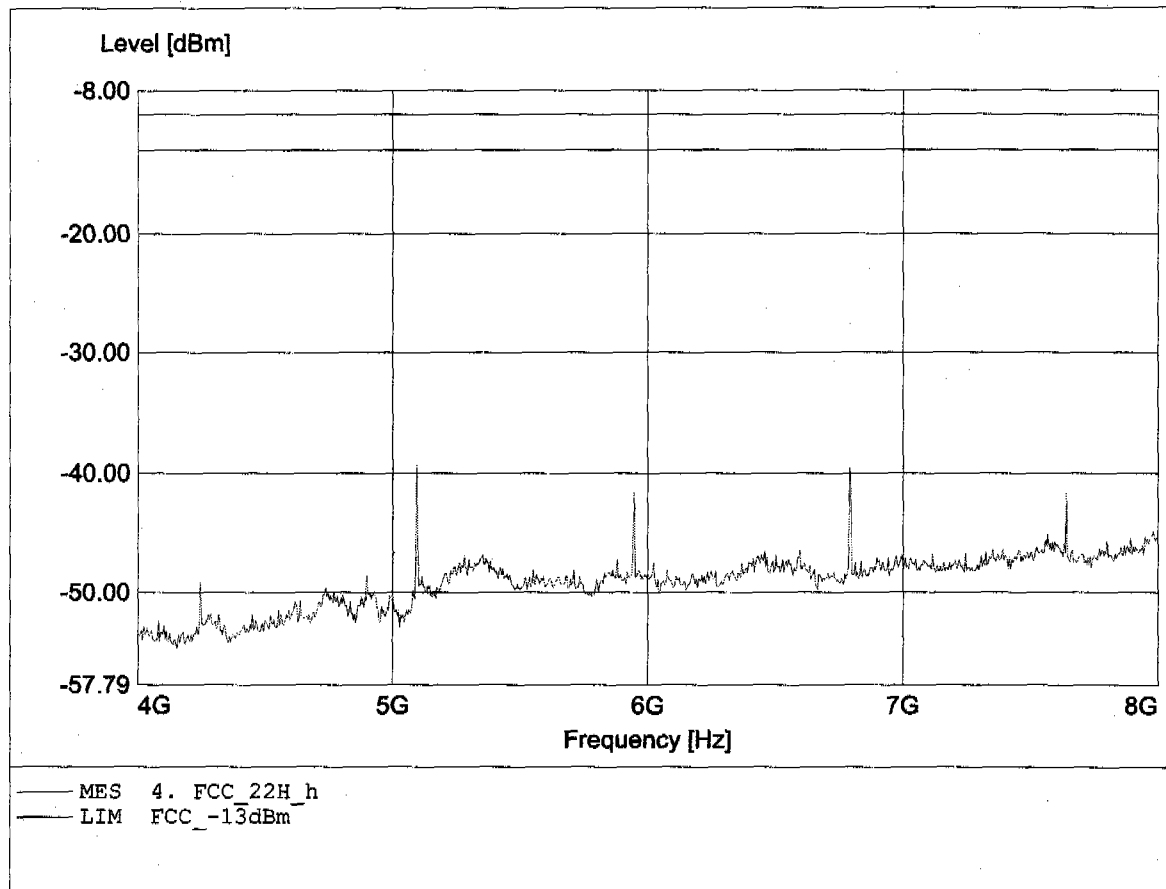


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 251
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.680GHz, Pmax: -40.37dBm, RBW: 1MHz

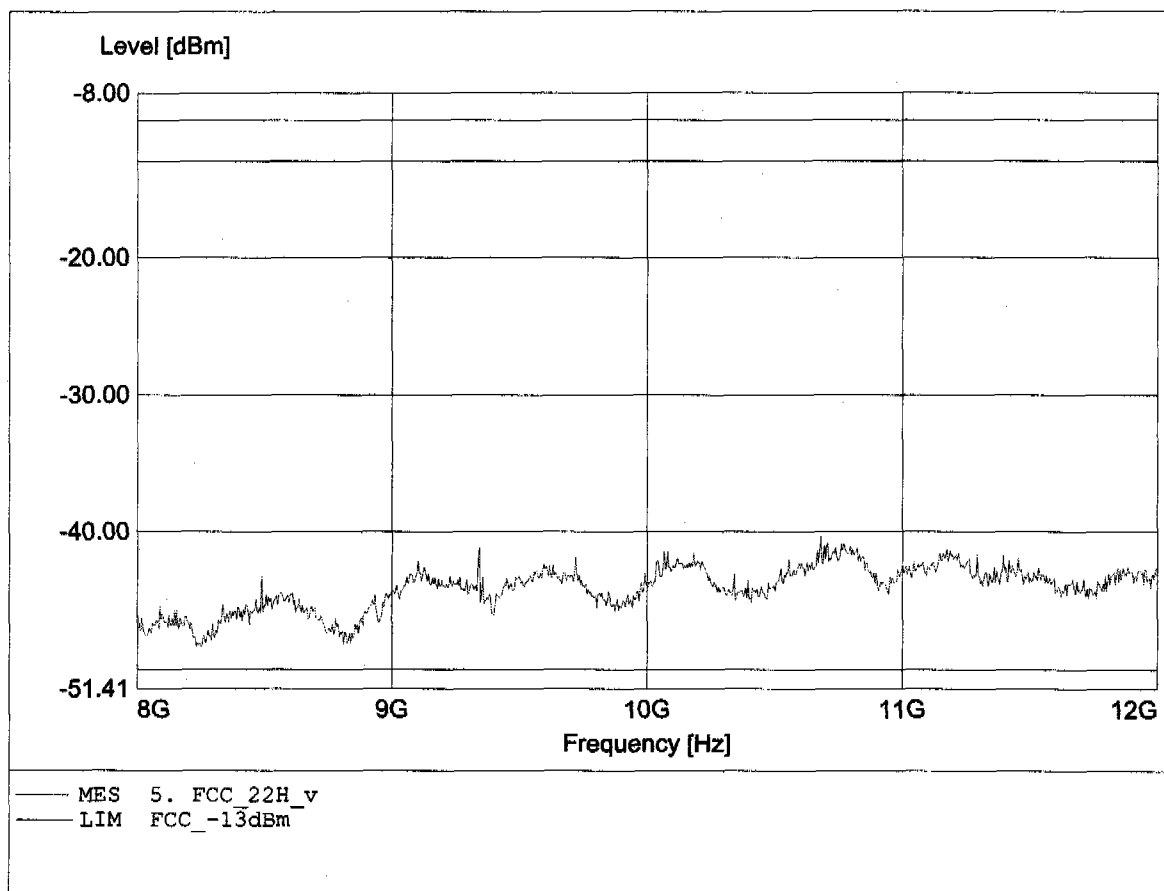

Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Peiker acoustic GmbH & Co. KG
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426
Cannel: 251
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 9.342GHz, Pmax: -38.81dBm, RBW: 1MHz

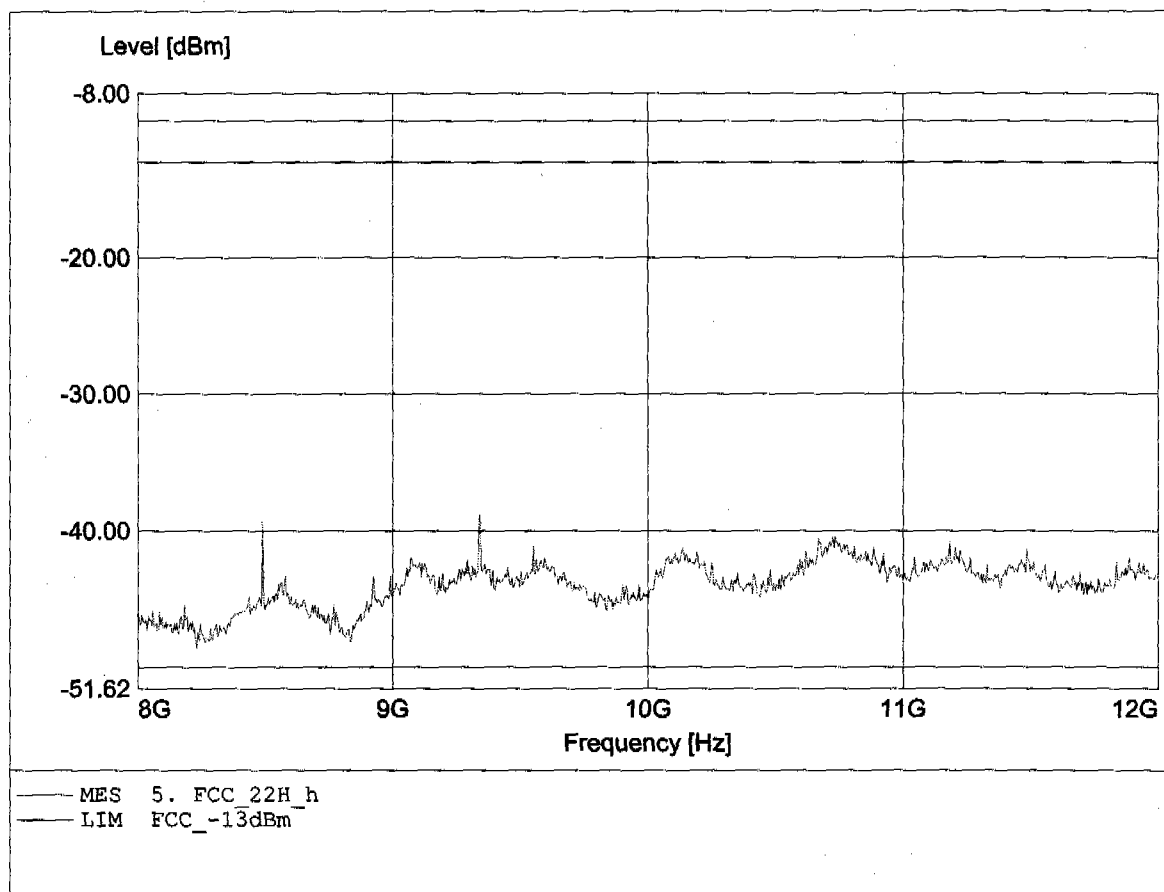

Appendix J

Line Conducted Emissions

Appendix K

Frequency Stability vs. Temperature

No diagrams
Refer to point 13.2

Appendix L

Frequency Stability vs. Voltage

No diagrams
Refer to point 14.2