

FCC Radio Test Report

FCC ID: XMF-MID1035

Change II

Report No. : TB-FCC179113
Applicant : Lightcomm Technology Co., Ltd.
Equipment Under Test (EUT)
EUT Name : 10.1"Tablet
Model No. : 100026203
Series Model No. : MID1035A, 100003562, MID1035
Brand Name : onn
Sample ID : 20210310-36-1#
Receipt Date : 2021-03-12
Test Date : 2021-03-13 to 2021-03-16
Issue Date : 2021-03-17
Standards : FCC Part 15, Subpart C 15.247
Test Method : ANSI C63.10: 2013
Conclusions : **PASS**

In the configuration tested, the EUT complied with the standards specified above,

Test/Witness

Engineer

Engineer

Supervisor

Engineer Manager

: *Rebecca*

: *IVAN SU*

: *Ray Lai*



Rebecca

Ivan Su

Ray Lai

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.

Contents

| | |
|---|-----------|
| CONTENTS..... | 2 |
| 1. GENERAL INFORMATION ABOUT EUT..... | 4 |
| 1.1 Client Information..... | 4 |
| 1.2 General Description of EUT (Equipment Under Test) | 4 |
| 1.3 Block Diagram Showing the Configuration of System Tested..... | 5 |
| 1.4 Description of Support Units | 6 |
| 1.6 Description of Test Software Setting | 7 |
| 1.7 Measurement Uncertainty | 7 |
| 1.8 Test Facility..... | 8 |
| 2. TEST SUMMARY..... | 9 |
| 3. TEST SOFTWARE..... | 9 |
| 4. TEST EQUIPMENT..... | 10 |
| 5. RADIATED EMISSION TEST | 11 |
| 5.1 Test Standard and Limit..... | 11 |
| 5.2 Test Setup..... | 12 |
| 5.3 Test Procedure..... | 13 |
| 5.4 Deviation From Test Standard..... | 14 |
| 5.5 EUT Operating Condition | 14 |
| 5.6 Test Data..... | 14 |
| ATTACHMENT A-- RADIATED EMISSION TEST DATA | 15 |

Revision History

| Report No. | Version | Description | Issued Date |
|--------------|---------|--|-------------|
| TB-FCC178279 | Rev.01 | Initial issue of report | 2021-01-19 |
| TB-FCC179113 | Rev.02 | Delete the audio noise reduction IC module | 2021-03-17 |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

1. General Information about EUT

1.1 Client Information

| | | |
|---------------------|---|---|
| Applicant | : | Lightcomm Technology Co., Ltd. |
| Address | : | UNIT 1306 13/F ARION COMMERCIAL CENTRE, 2-12 QUEEN'S ROAD WEST, SHEUNG WAN HK |
| Manufacturer | : | Huizhou Hengdu Electronics Co., Ltd. |
| Address | : | No.8 Huitai Road, Huinan High-tech Industrial Park, Huiao Avenue, Huizhou, Guangdong, China |

1.2 General Description of EUT (Equipment Under Test)

| | | |
|-------------------------------|--------------------------|---|
| EUT Name | : | 10.1"Tablet |
| Models No. | : | 100026203, MID1035A, 100003562, MID1035 |
| Model Different | : | All these models are identical in the same PCB, layout and electrical circuit, The only difference is model name and memory capacity. |
| Product Description | Operation Frequency: | Bluetooth 5.0(BLE): 2402MHz~2480MHz |
| | Number of Channel: | Bluetooth 5.0(BLE): 40 channels see note(3) |
| | Antenna Gain: | 2.92dBi FPC Antenna |
| | Modulation Type: | GFSK |
| | Bit Rate of Transmitter: | 1/2Mbps(GFSK) |
| Power Rating | : | Adapter(TEKA-UCA20US) Input: 100-240V~, 50/60Hz, 0.35A MAX Output: DC 5V 2A DC 3.8V by 6600mAh Li-ion Polymer battery |
| Software Version | : | RP1A.200720.011 release-keys |
| Hardware Version | : | MID1035MQ_MT8768_LPDDR4_DSP_MB-VER1_1 |
| Connecting I/O Port(S) | : | Please refer to the User's Manual |
| Remark | : | The antenna gain and adapter provided by the applicant, the verified for the RF conduction test provided by TOBY test lab. |

Note:


- (1) This Test Report is FCC Part 15.247 for Bluetooth BLE, the test procedure follows the FCC KDB 558074 D01 15.247 Meas Guidance v05r02.

- (2) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- (3) Antenna information provided by the applicant.
- (4) Channel List:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|---------|-----------------|
| 00 | 2402 | 14 | 2430 | 28 | 2458 |
| 01 | 2404 | 15 | 2432 | 29 | 2460 |
| 02 | 2406 | 16 | 2434 | 30 | 2462 |
| 03 | 2408 | 17 | 2436 | 31 | 2464 |
| 04 | 2410 | 18 | 2438 | 32 | 2466 |
| 05 | 2412 | 19 | 2440 | 33 | 2468 |
| 06 | 2414 | 20 | 2442 | 34 | 2470 |
| 07 | 2416 | 21 | 2444 | 35 | 2472 |
| 08 | 2418 | 22 | 2446 | 36 | 2474 |
| 09 | 2420 | 23 | 2448 | 37 | 2476 |
| 10 | 2422 | 24 | 2450 | 38 | 2478 |
| 11 | 2424 | 25 | 2452 | 39 | 2480 |
| 12 | 2426 | 26 | 2454 | | |
| 13 | 2428 | 27 | 2456 | | |

1.3 Block Diagram Showing the Configuration of System Tested

Conducted Test

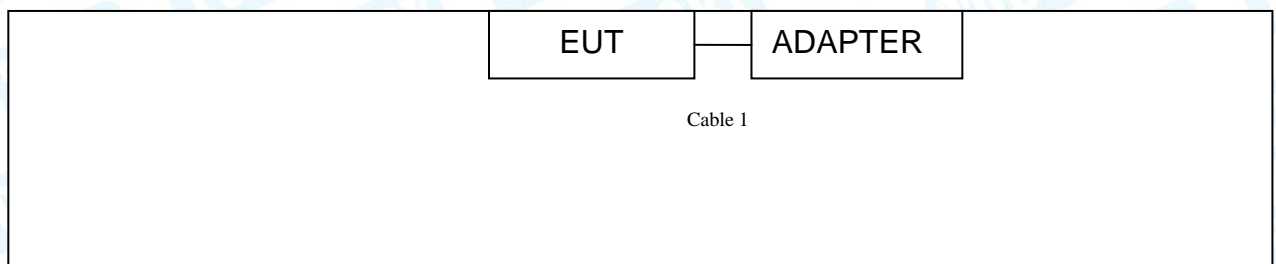

Radiated Test



1.4 Description of Support Units

| Equipment Information | | | | |
|-----------------------|---------------|--------------|--------------|-----------|
| Name | Model | FCC ID/VOC | Manufacturer | Used “√” |
| ---- | ----- | ---- | ---- | ---- |
| Cable Information | | | | |
| Number | Shielded Type | Ferrite Core | Length | Note |
| Cable 1 | Yes | NO | 1.0M | Accessory |

1.5 Description of Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

| For Conducted Test | |
|--------------------|-------------|
| Final Test Mode | Description |
| Mode 1 | N/A |

| For Radiated Test | |
|-------------------|----------------------------------|
| Final Test Mode | Description |
| Mode 2 | TX Mode |
| Mode 3 | TX 1Mbps Mode (Channel 00/20/39) |
| Mode 4 | TX 2Mbps Mode (Channel 00/20/39) |

Note:

- (1) For all test, we have verified the construction and function in typical operation. And all the test modes were carried out with the EUT in transmitting operation in maximum power with all kinds of data rate.
According to ANSI C63.10 standards, the measurements are performed at the highest, middle, lowest available channels, and the worst case data rate as follows:
BLE Mode: GFSK Modulation Transmitting mode.
- (2) During the testing procedure, the continuously transmitting with the maximum power mode was programmed by the customer.
- (3) The EUT is considered a portable unit; in normal use it was positioned on X-plane. The worst case was found positioned on X-plane. Therefore only the test data of this X-plane was used for radiated emission measurement test.

1.6 Description of Test Software Setting

During testing channel& Power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of RF setting.

| Test Software Version | LaunchEngmode | | |
|-----------------------|---------------|---------|----------|
| Frequency | 2402 MHz | 2442MHz | 2480 MHz |
| BLE GFSK | DEF | DEF | DEF |

1.7 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

| Test Item | Parameters | Expanded Uncertainty (U_{Lab}) |
|--------------------|---|------------------------------------|
| Conducted Emission | Level Accuracy: 9kHz~150kHz 150kHz to 30MHz | ± 3.50 dB ± 3.10 dB |
| Radiated Emission | Level Accuracy: 9kHz to 30 MHz | ± 4.60 dB |
| Radiated Emission | Level Accuracy: 30MHz to 1000 MHz | ± 4.50 dB |
| Radiated Emission | Level Accuracy: Above 1000MHz | ± 4.20 dB |

1.8 Test Facility

The testing was performed by the Shenzhen Toby Technology Co., Ltd., in their facilities located at: 1/F., Building 6, Rundongsheng Industrial Zone, Longzhu, Xixiang, Bao'an District, Shenzhen, Guangdong, China.

At the time of testing, the following bodies accredited the Laboratory:

CNAS (L5813)

The Laboratory has been accredited by CNAS to ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories for the competence in the field of testing. And the Registration No.: CNAS L5813.

A2LA Certificate No.: 4750.01

The laboratory has been accredited by American Association for Laboratory Accreditation(A2LA) to ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories for the technical competence in the field of Electrical Testing. And the A2LA Certificate No.: 4750.01. FCC Accredited Test Site Number: 854351. Designation Number: CN1223.

IC Registration No.: (11950A)

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A.

2. Test Summary

| FCC Part 15 Subpart C(15.247)/RSS 247 Issue 2 | | | | | |
|---|--------------------|--|----------------|----------|----------------|
| Standard Section | | Test Item | Test Sample(s) | Judgment | Remark |
| FCC | IC | | | | |
| 15.203 | | Antenna Requirement | N/A | N/A | N/A Note(2) |
| 15.207(a) | RSS-GEN 7.2.4 | Conducted Emission | N/A | N/A | N/A |
| 15.205&15.247(d) | RSS-GEN 7.2.2 | Band-Edge & Unwanted Emissions into Restricted Frequency | N/A | N/A | N/A Note(2) |
| 15.247(a)(2) | RSS 247 5.2 (1) | 6dB Bandwidth | N/A | N/A | N/A Note(2) |
| 15.247(b)(3) | RSS 247 5.4 (4) | Conducted Max Output Power | N/A | N/A | N/A |
| 15.247(e) | RSS 247 5.2 (2) | Power Spectral Density | N/A | N/A | N/A Note(2) |
| 15.205, 15.209&15.247(d) | RSS 247 5.5 | Transmitter Radiated Spurious & Unwanted Emissions into Restricted Frequency | 20210310-36-1# | PASS | N/A |

Note:

(1) N/A is an abbreviation for Not Applicable.

(2) This report is Class II change report for the original equipment have changed, the transmitter module itself has not changed. More information about the test data please refer to the original test report.

(3) As there is no change regard RF transmitter portion and Antenna assembly, the change will not have effect on Radiated emission above 1GHz by judging for experience, thus testing is performed up to 1GHz only.

3. Test Software

| Test Item | Test Software | Manufacturer | Version No. |
|--------------------|---------------|--------------|-------------|
| Conducted Emission | EZ-EMC | EZ | CDI-03A2 |
| Radiation Emission | EZ-EMC | EZ | FA-03A2RE |

4. Test Equipment

| Radiation Emission Test | | | | | |
|-------------------------|-----------------|---------------|-------------|---------------|---------------|
| Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Due Date |
| Spectrum Analyzer | Agilent | E4407B | MY45106456 | Jul. 06, 2020 | Jul. 05, 2021 |
| EMI Test Receiver | Rohde & Schwarz | ESPI | 100010/007 | Jul. 06, 2020 | Jul. 05, 2021 |
| Spectrum Analyzer | Rohde & Schwarz | FSV40-N | 102197 | Jul. 06, 2020 | Jul. 05, 2021 |
| Bilog Antenna | ETS-LINDGREN | 3142E | 00117537 | Mar.01, 2020 | Feb. 28, 2022 |
| Horn Antenna | ETS-LINDGREN | 3117 | 00143207 | Mar.01, 2020 | Feb. 28, 2022 |
| Horn Antenna | ETS-LINDGREN | BBHA 9170 | BBHA9170582 | Mar.01, 2020 | Feb. 28, 2022 |
| Loop Antenna | SCHWARZBECK | FMZB 1519 B | 1519B-059 | Jul. 06, 2020 | Jul. 05, 2021 |
| Pre-amplifier | Sonoma | 310N | 185903 | Feb. 25, 2021 | Feb. 24, 2022 |
| Pre-amplifier | HP | 8449B | 3008A00849 | Feb. 25, 2021 | Feb. 24, 2022 |
| Pre-amplifier | SKET | LNPA_1840G-50 | SK201904032 | Jul. 07, 2020 | Jul. 06, 2021 |
| Cable | HUBER+SUHNER | 100 | SUCOFLEX | Feb. 25, 2021 | Feb. 24, 2022 |
| Positioning Controller | ETS-LINDGREN | 2090 | N/A | N/A | N/A |

5. Radiated Emission Test

5.1 Test Standard and Limit

5.1.1 Test Standard

FCC Part 15.247(d)

5.1.2 Test Limit

Radiated Emission Limits (9kHz~1000MHz)

| Frequency (MHz) | Field Strength (microvolt/meter) | Measurement Distance (meters) |
|-----------------|----------------------------------|-------------------------------|
| 0.009~0.490 | 2400/F(KHz) | 300 |
| 0.490~1.705 | 24000/F(KHz) | 30 |
| 1.705~30.0 | 30 | 30 |
| 30~88 | 100 | 3 |
| 88~216 | 150 | 3 |
| 216~960 | 200 | 3 |
| Above 960 | 500 | 3 |


Radiated Emission Limit (Above 1000MHz)

| Frequency (MHz) | Distance Meters(at 3m) | |
|-----------------|------------------------|------------------|
| | Peak (dBuV/m) | Average (dBuV/m) |
| Above 1000 | 74 | 54 |


Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dBuV/m)=20log Emission Level (uV/m)


5.2 Test Setup

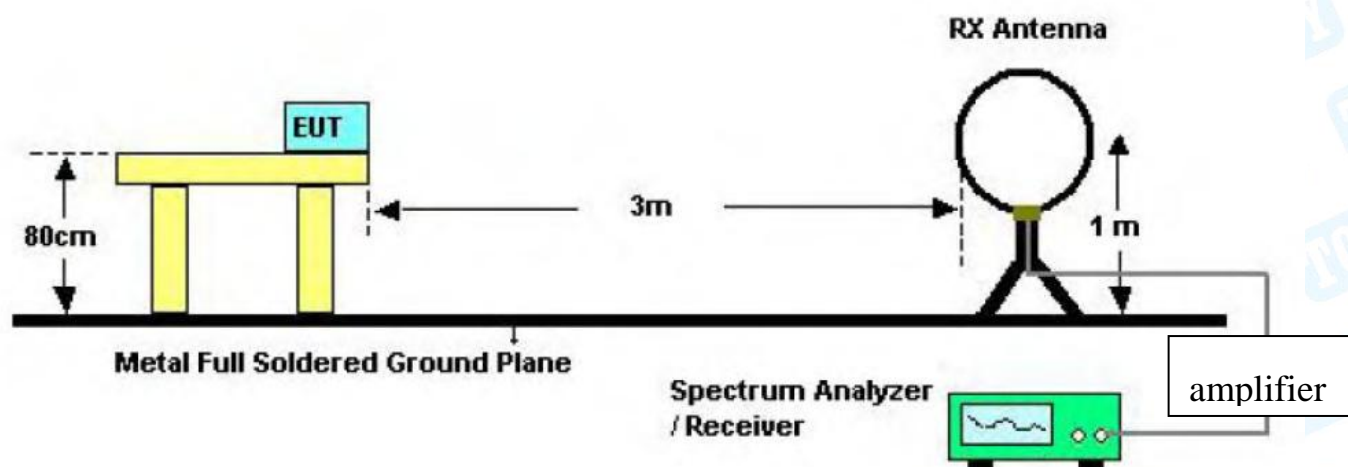

Below 30MHz Test Setup

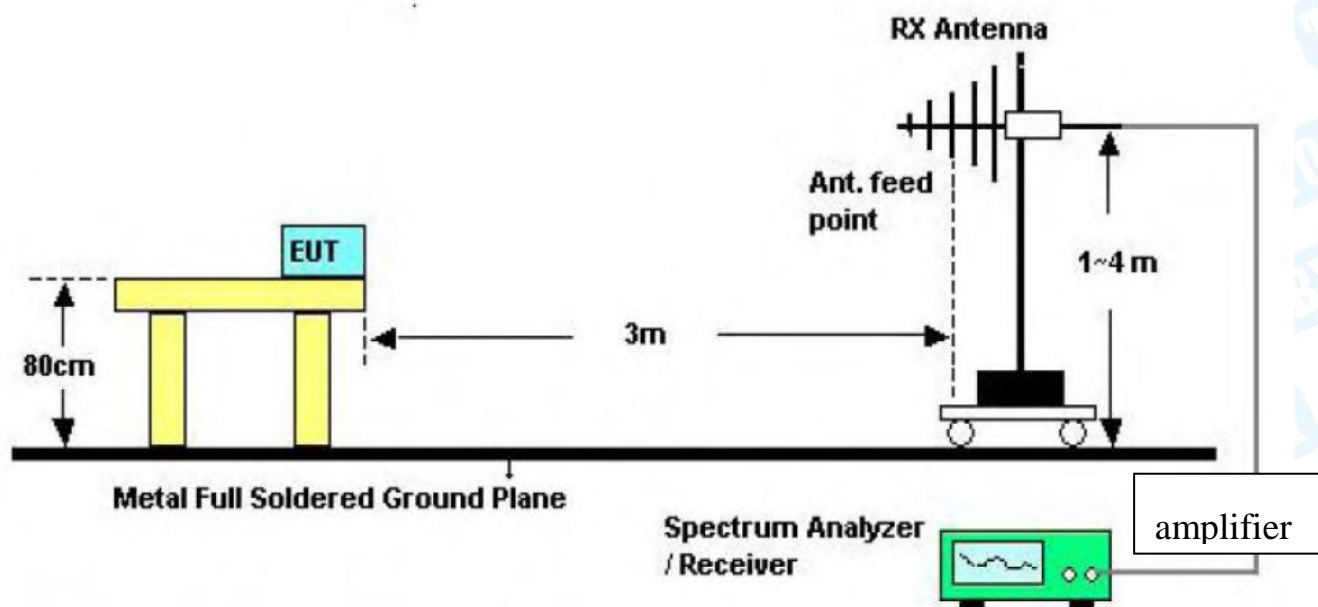

Below 1000MHz Test Setup

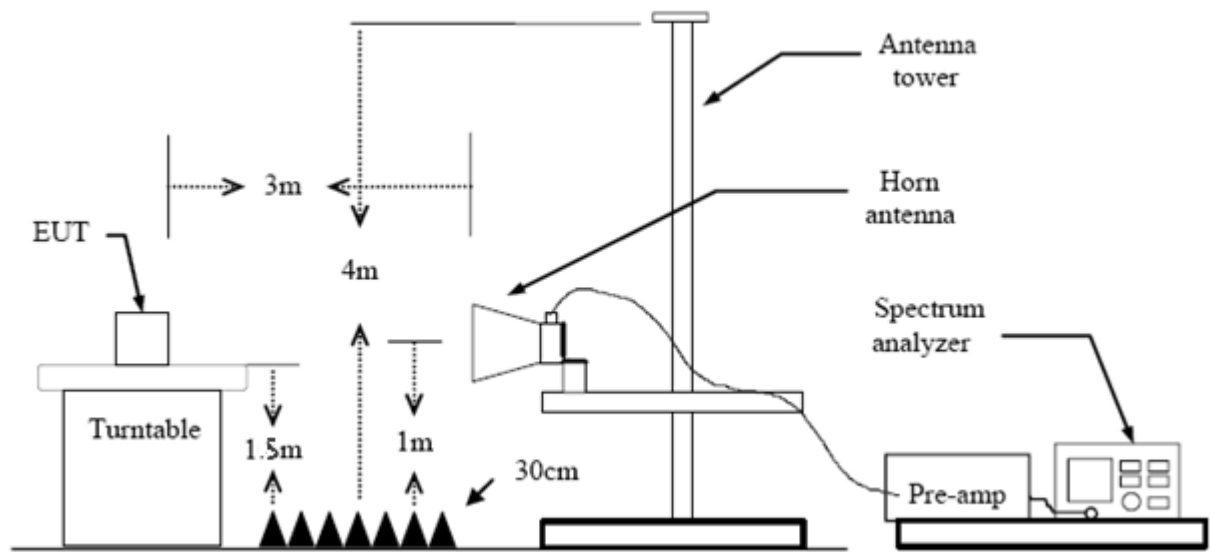

Above 1GHz Test Setup

5.3 Test Procedure

- (1) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1 GHz. The EUT was placed on a rotating 0.8m high above ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- (2) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (6) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (7) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- (8) For the actual test configuration, please see the test setup photo.

5.4 Deviation From Test Standard

No deviation

5.5 EUT Operating Condition

The Equipment Under Test was set to Continual Transmitting in maximum power.

5.6 Test Data

Remark: During testing above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.

Please refer to the Attachment A.

Attachment A-- Radiated Emission Test Data

9 KHz~30 MHz


From 9 KHz to 30 MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB

Below the permissible value has no need to be reported.

30MHz~1GHz


| | | | |
|---------------|-----------------------------|--------------------|-----|
| Temperature: | 23.2℃ | Relative Humidity: | 41% |
| Test Voltage: | DC 3.8V | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | Mode 2 2402MHz | | |
| Remark: | Only worse case is reported | | |

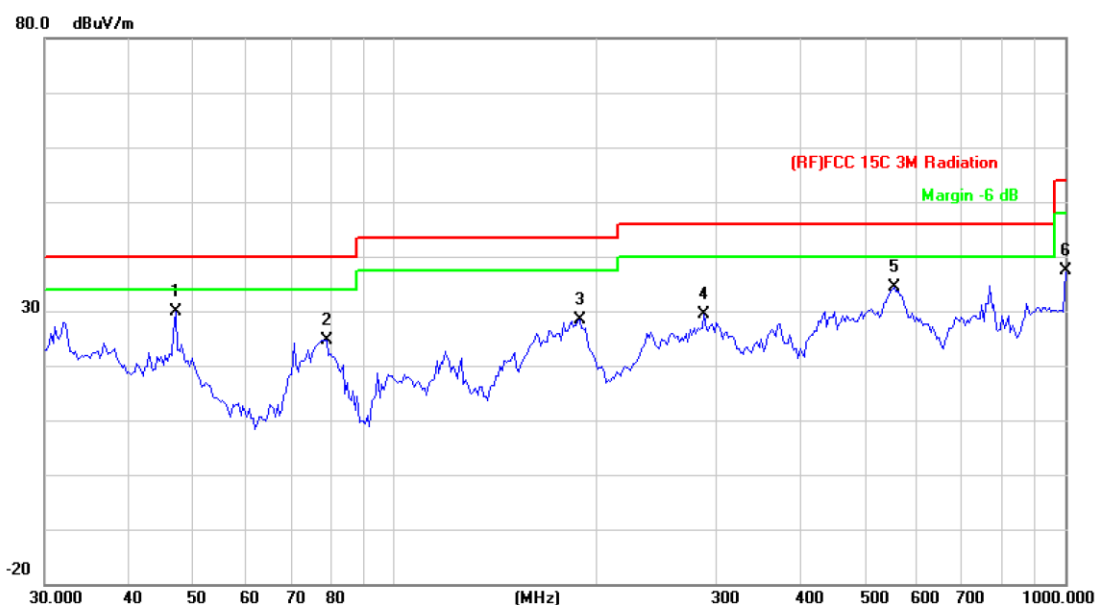

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB/m | Measure- ment dBuV/m | Limit dBuV/m | Over dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------|------------|----------|
| 1 | * | 46.9947 | 52.03 | -22.07 | 29.96 | 40.00 | -10.04 | peak |
| 2 | | 78.9651 | 47.18 | -22.56 | 24.62 | 40.00 | -15.38 | peak |
| 3 | | 188.4122 | 48.21 | -19.85 | 28.36 | 43.50 | -15.14 | peak |
| 4 | | 289.0020 | 45.86 | -16.50 | 29.36 | 46.00 | -16.64 | peak |
| 5 | | 554.8251 | 43.17 | -8.87 | 34.30 | 46.00 | -11.70 | peak |
| 6 | | 1000.0000 | 41.20 | -3.90 | 37.30 | 54.00 | -16.70 | peak |

*:Maximum data x:Over limit !:over margin

Emission Level= Read Level+ Correct Factor

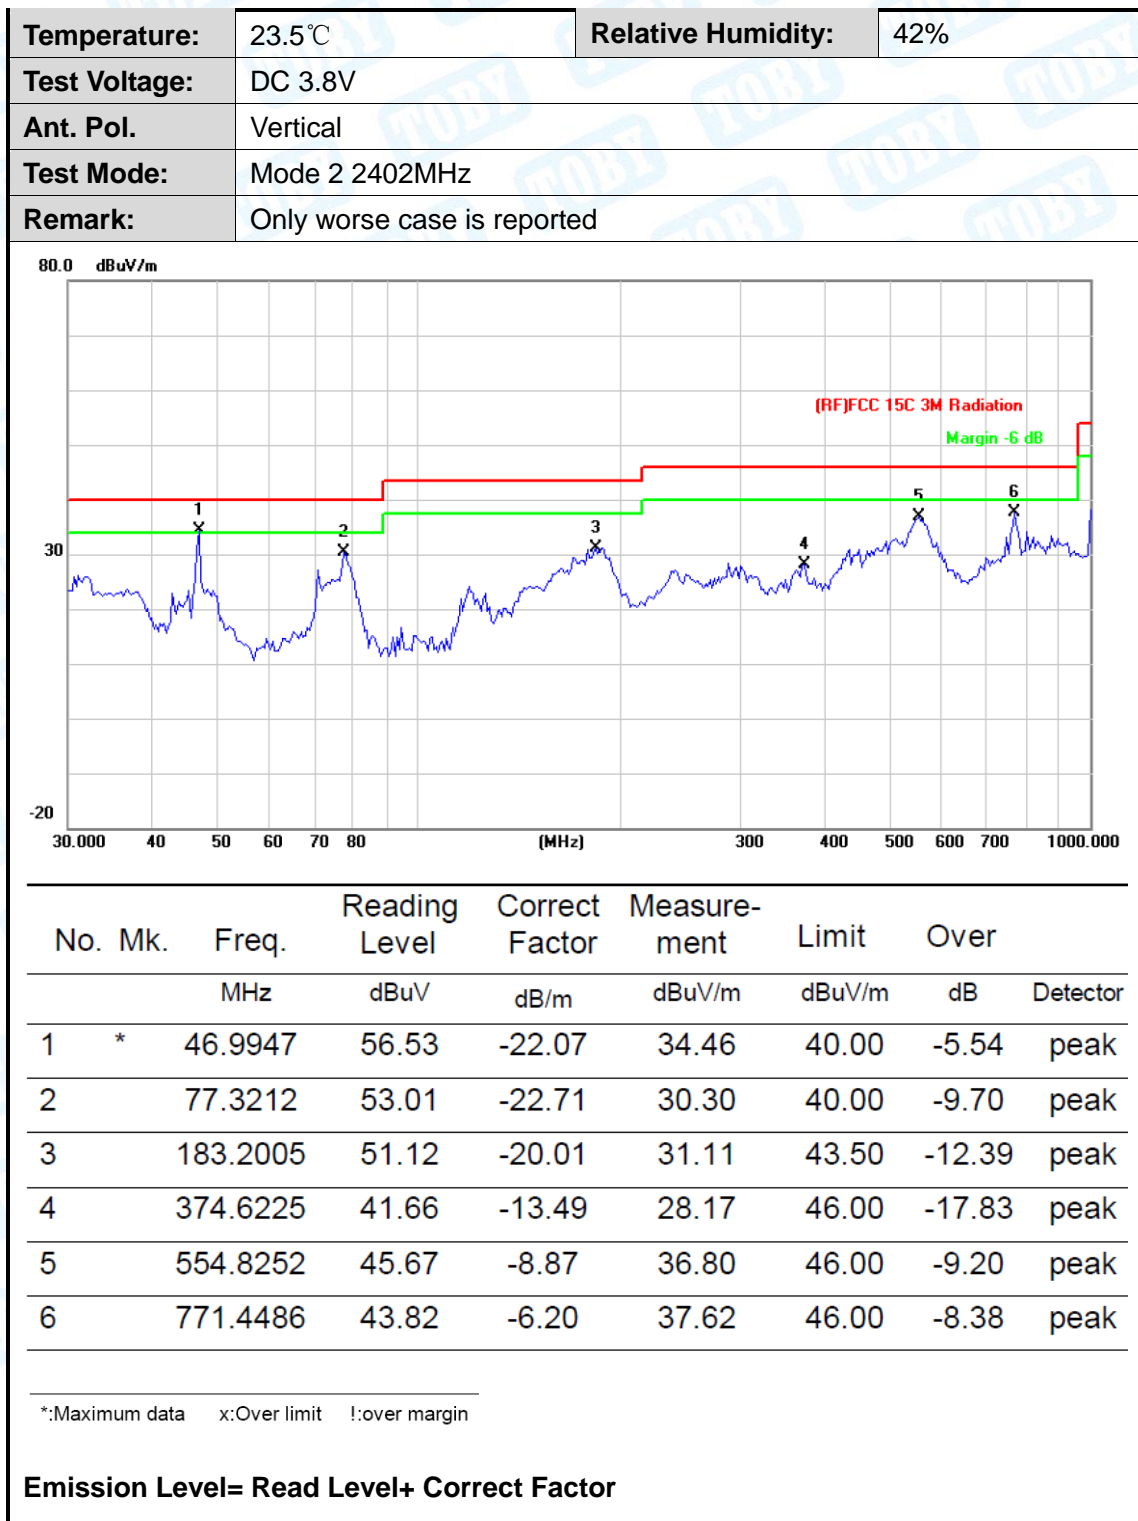

-----END OF REPORT-----