

FCC TEST REPORT

For

NINGBO DOOYA MECHANIC & ELECTRONIC TECHNOLOGY CO., LTD.

DC Venetian Blinds Drive

Model No.: DV24CE/L-0.6/34, DV24CEQ/L-0.6/34

Prepared for : Ningbo Dooya Mechanic & Electronic Technology Co., Ltd.
Address : Loutuo Industrial Area, Zhenhai, Ningbo, Zhejiang, China

Prepared by : SHENZHEN EMTEK CO., LTD
Address : Bldg 69, Majialong Industry Zone, Nanshan District,
Shenzhen, Guangdong, China

Tel: 0086-755-26954280
Fax: 0086-755-26954282

Report Number : ES150508070E
Date of Test : May 20, 2015 to June 02, 2015
Date of Report : June 06, 2015

TABLE OF CONTENT

TEST REPORT DESCRIPTION	PAGE
1. SUMMARY OF TEST RESULT	5
2. GENERAL INFORMATION	6
2.1. Description of Device (EUT)	6
2.2. Description of Test Facility	6
2.3. Support Device	6
2.4. Measurement Uncertainty	7
3. MEASURING DEVICE AND TEST EQUIPMENT	8
3.1. For Power Line Conducted Emission	8
3.2. For Radiated Emission Measurement	8
4. POWER LINE CONDUCTED EMISSION MEASUREMENT	9
4.1. Block Diagram of Test Setup	9
4.2. Measuring Standard	9
4.3. Power Line Conducted Emission Limits (Class B)	9
4.4. EUT Configuration on Measurement	9
4.5. Operating Condition of EUT	9
4.6. Test Procedure	10
4.7. Measurement Results	10
5. RADIATED EMISSION MEASUREMENT	13
5.1. Block Diagram of Test	13
5.2. Measuring Standard	13
5.3. Radiated Emission Limits (class B)	13
5.4. EUT Configuration on Test	14
5.5. Operating Condition of EUT	14
5.6. Test Procedure	14
5.7. Measuring Results	14
6. PHOTOGRAPH OF TEST	18
6.1. Photo of Conducted Emission Measurement	18
6.2. Photo of Radiation Emission Measurement	19
APPENDIX I	

TEST REPORT DESCRIPTION

Applicant : Ningbo Dooya Mechanic & Electronic Technology Co., Ltd.
Manufacturer : Loutuo Industrial Area, Zhenhai, Ningbo, Zhejiang, China
Trade Mark : N/A
EUT : DC Venetian Blinds Drive
Model No. : DV24CE/L-0.6/34, DV24CEQ/L-0.6/34
Input Voltage : DC 12V


Measurement Procedure Used:


FCC Rules and Regulations Part 15 Subpart B Class B & FCC / ANSI C63.4-2014

The device described above is tested by SHENZHEN EMTEK CO., LTD. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and SHENZHEN EMTEK CO., LTD. is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of SHENZHEN EMTEK CO., LTD.

Date of Test : May 20, 2015 to June 02, 2015

Prepared by : 
Jack Li/Editor

Reviewer : 
Joe Xia/Supervisor

Approved & Authorized Signer : 
Lisa Wang/Manager

Modified History

Version	Report No.	Revision date	Summary
Ver.1.0	ES150508070E	\	Original Report

1. SUMMARY OF TEST RESULT

Emission		
Description of test item	Standard & Limits	Results
Conducted disturbance at mains terminals	FCC Part15, Subpart B, Class B ANSI C63.4-2014	Pass
Radiated Disturbance	FCC Part15, Subpart B, Class B ANSI C63.4-2014	Pass
Note: N/A is an abbreviation for Not Applicable.		

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

EUT : DC Venetian Blinds Drive

Model Number : DV24CE/L-0.6/34, DV24CEQ/L-0.6/34
(Note: The models of DC24CE/L-0.6/34 and DC24CEQ/L-0.6/34 are identical and have same structures. We prepared model DV24CE/L-0.6/34 for test)

Test Voltage : DC 12V (Support Device/AC/DC ADAPTOR: AC 120V/60Hz)

Applicant : Ningbo Dooya Mechanic & Electronic Technology Co., Ltd.

Address : Loutuo Industrial Area, Zhenhai, Ningbo, Zhejiang, China

Manufacturer : Ningbo Dooya Mechanic & Electronic Technology Co., Ltd.

Address : Loutuo Industrial Area, Zhenhai, Ningbo, Zhejiang, China

Date of receiver : May 20, 2015

Date of Test : May 20, 2015 to June 02, 2015

2.2. Description of Test Facility

Site Description
EMC Lab. : Accredited by CNAS, 2013.10.29
The certificate is valid until 2016.10.28
The Laboratory has been assessed and proved to be in compliance with CNAS/CL01:2006(identical to ISO/IEC17025: 2005)
The Certificate Registration Number is L2291

Accredited by TUV Rheinland Shenzhen 2010.5.25
The Laboratory has been assessed according to the requirements ISO/IEC 17025

Accredited by FCC, April 17, 2014
The Certificate Registration Number is 406365.

Accredited by Industry Canada, March 5, 2010
The Certificate Registration Number is 4480A-2.

Name of Firm : SHENZHEN EMTEK CO., LTD
Site Location : Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China

2.3. Support Device

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
1.	AC /DC ADAPTOR	Ktec	KSASB0241200200HU	N/A	N/A	

2.4. Measurement Uncertainty

Conducted Emission Uncertainty : 2.8dB

Radiated Emission Uncertainty : 3.3dB (3m Chamber)

3. MEASURING DEVICE AND TEST EQUIPMENT

3.1. For Power Line Conducted Emission


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESCS30	101108	05/16/2015	1 Year
2.	L.I.S.N.	Rohde & Schwarz	ENV216	101193	05/16/2015	1 Year
3.	L.I.S.N.	Schwarzbeck	NNLK8129	8126-462	05/16/2015	1 Year
4.	50Ω Coaxial Switch	Anritsu	MP59B	2611115-001-0033	05/16/2015	1 Year
5.	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	38400	05/16/2015	1 Year

3.2. For Radiated Emission Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	05/16/2015	1 Year
2.	Pre-Amplifier	HP	8447D	2944A07999	05/16/2015	1 Year
3.	Pre-Amplifier	A.H.	PAM-0126	1415261	05/16/2015	1 Year
4.	Bilog Antenna	Schwarzbeck	VULB9163	142	05/16/2015	1 Year
5.	Loop Antenna	Schwarzbeck	FMZB 1519	1519-012	05/16/2015	1 Year
6.	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	05/16/2015	1 Year
7.	Horn Antenna	Schwarzbeck	BBHA 9120	D143	05/16/2015	1 Year
8.	Cable	Schwarzbeck	AK9513	ACRX1	05/16/2015	1 Year
9.	Cable	Rosenberger	N/A	FP2RX2	05/16/2015	1 Year
10.	Cable	Schwarzbeck	AK9513	CRPX1	05/16/2015	1 Year
11.	Cable	Schwarzbeck	AK9513	CRRX2	05/16/2015	1 Year

4. POWER LINE CONDUCTED EMISSION MEASUREMENT

4.1. Block Diagram of Test Setup

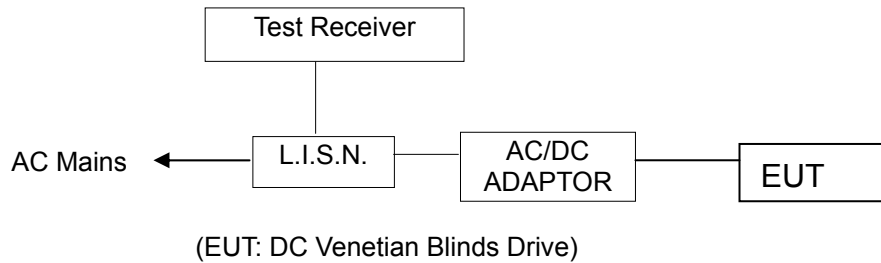

4.2. Measuring Standard

FCC Part15, Subpart B, Class B, ANSI C63.4-2014

4.3. Power Line Conducted Emission Limits (Class B)

Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66.0 ~ 56.0 *	56.0 ~ 46.0 *
0.50 ~ 5.00	56.0	46.0
5.00 ~ 30.00	60.0	50.0
NOTE1-The lower limit shall apply at the transition frequencies. NOTE2-The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.		

4.4. EUT Configuration on Measurement

The following equipments are installed on Conducted Emission Measurement to meet FCC requirements and operating in a manner which tends to maximize its emission characteristics in a normal application.

EUT : DC Venetian Blinds Drive
Model Number : DV24CE/L-0.6/34

4.5. Operating Condition of EUT

4.5.1. Turn on the power.

4.5.2. After that, let the EUT work in test mode (Receiving) and measure it.

4.6. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and connected to the AC mains through Line Impedance Stability Network (L.I.S.N). This provided a 50ohm coupling impedance for the tested equipments. Both sides of AC line are investigated to find out the maximum conducted emission according to the FCC regulations during conducted emission measurement.

The bandwidth of the test receiver (R&S ESU) is set at 9KHz in 150KHz~30MHz and 200Hz in 9KHz~150KHz.


The frequency range from 150kHz to 30MHz is investigated

4.7. Measurement Results

PASS.

Please refer to the following pages.

Test Data:

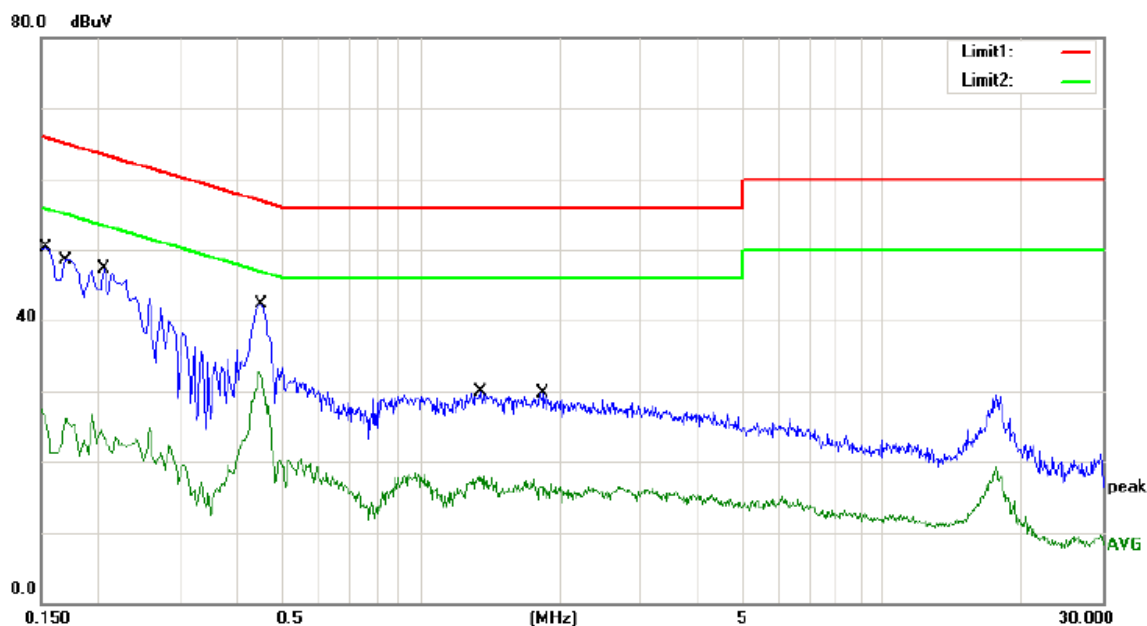

Site site #1

Phase: **L1**

Temperature: 20

Limit: (CE)FCC PART 15 class B_QP


Power: AC 120V/60Hz

Humidity: 51 %

Mode: Receiving

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1540	39.20	11.00	50.20	65.78	-15.58	QP	
2		0.1540	14.80	11.00	25.80	55.78	-29.98	AVG	
3		0.1700	37.50	11.00	48.50	64.96	-16.46	QP	
4		0.1700	15.10	11.00	26.10	54.96	-28.86	AVG	
5		0.2060	36.20	11.00	47.20	63.37	-16.17	QP	
6		0.2060	12.30	11.00	23.30	53.37	-30.07	AVG	
7	*	0.4500	31.30	11.00	42.30	56.88	-14.58	QP	
8		0.4500	21.30	11.00	32.30	46.88	-14.58	AVG	
9		1.3460	18.90	11.00	29.90	56.00	-26.10	QP	
10		1.3460	6.60	11.00	17.60	46.00	-28.40	AVG	
11		1.8380	18.70	11.00	29.70	56.00	-26.30	QP	
12		1.8380	4.30	11.00	15.30	46.00	-30.70	AVG	

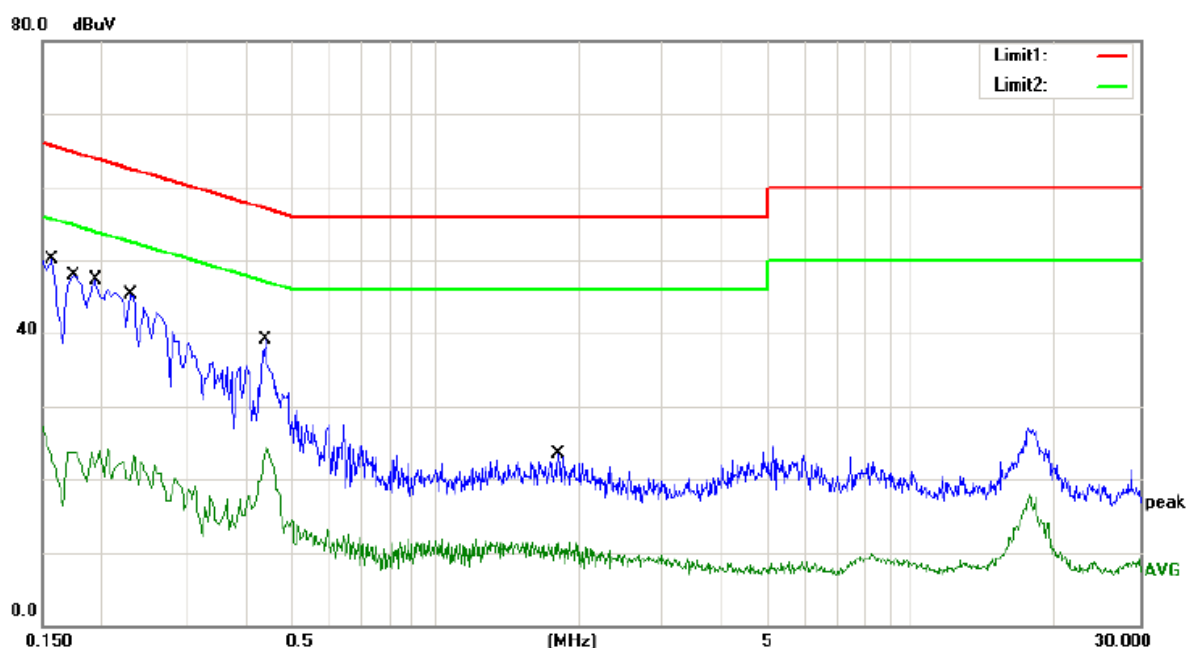

Site site #1

Phase: **N**

Temperature: 20

Limit: (CE)FCC PART 15 class B_QP

Power: AC 120V/60Hz

Humidity: 51 %

Mode: Receiving


Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1580	39.10	11.00	50.10	65.57	-15.47	QP	
2		0.1580	11.40	11.00	22.40	55.57	-33.17	AVG	
3		0.1740	36.90	11.00	47.90	64.77	-16.87	QP	
4		0.1740	12.70	11.00	23.70	54.77	-31.07	AVG	
5		0.1940	36.30	11.00	47.30	63.86	-16.56	QP	
6		0.1940	10.90	11.00	21.90	53.86	-31.96	AVG	
7		0.2300	34.30	11.00	45.30	62.45	-17.15	QP	
8		0.2300	9.10	11.00	20.10	52.45	-32.35	AVG	
9		0.4420	28.00	11.00	39.00	57.02	-18.02	QP	
10		0.4420	12.90	11.00	23.90	47.02	-23.12	AVG	
11		1.8180	12.40	11.00	23.40	56.00	-32.60	QP	
12		1.8180	0.30	11.00	11.30	46.00	-34.70	AVG	


5. RADIATED EMISSION MEASUREMENT

5.1. Block Diagram of Test

5.1.1. Block diagram of connection between the EUT and simulators.

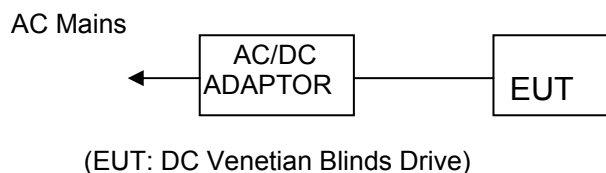

5.1.2. Block diagram of test setup (In chamber)

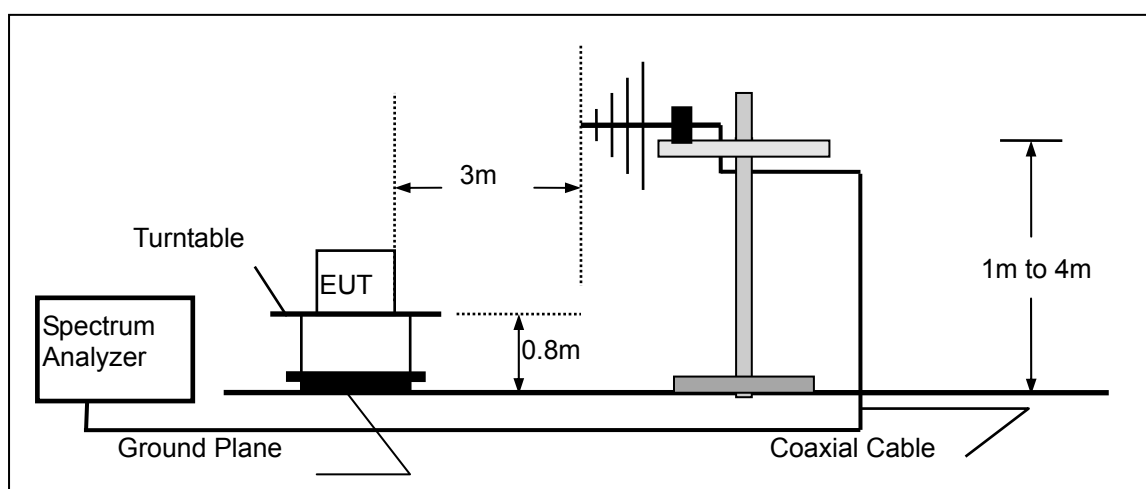

(EUT: DC Venetian Blinds Drive)

5.2. Measuring Standard

FCC Part15, Subpart B, Class B ANSI C63.4-2014

5.3. Radiated Emission Limits (class B)

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0

Remark: (1) Emission level $(\text{dB})\mu\text{V} = 20 \log \text{Emission level } \mu\text{V}/\text{m}$

(2) The smaller limit shall apply at the cross point between two frequency bands.

(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

5.4. EUT Configuration on Test

The FCC Class B regulations test method must be used to find the maximum emission during radiated emission measurement.

5.5. Operating Condition of EUT

5.5.1. Turn on the power.

5.5.2. After that, let the EUT work in test mode (Receiving) and measure it.

5.6. Test Procedure

The EUT is placed on a turn table which is 0.8 meter high above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on an antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Bilog antenna (calibrated by Dipole Antenna) and horn antenna are used as a receiving antenna. Both horizontal and vertical polarization of the antenna are set on test.

The frequency range from 30MHz to 1000MHz was pre-scanned with a peak detector (RBW=100kHz, VBW=300kHz) and all final readings of measurement from Test Receiver are Quasi-Peak values (Quasi Peak detector used with a bandwidth of 120 kHz).


The frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.

5.7. Measuring Results

PASS.

Please refer to the following pages.

Below 1000MHz (30M-1GHz)

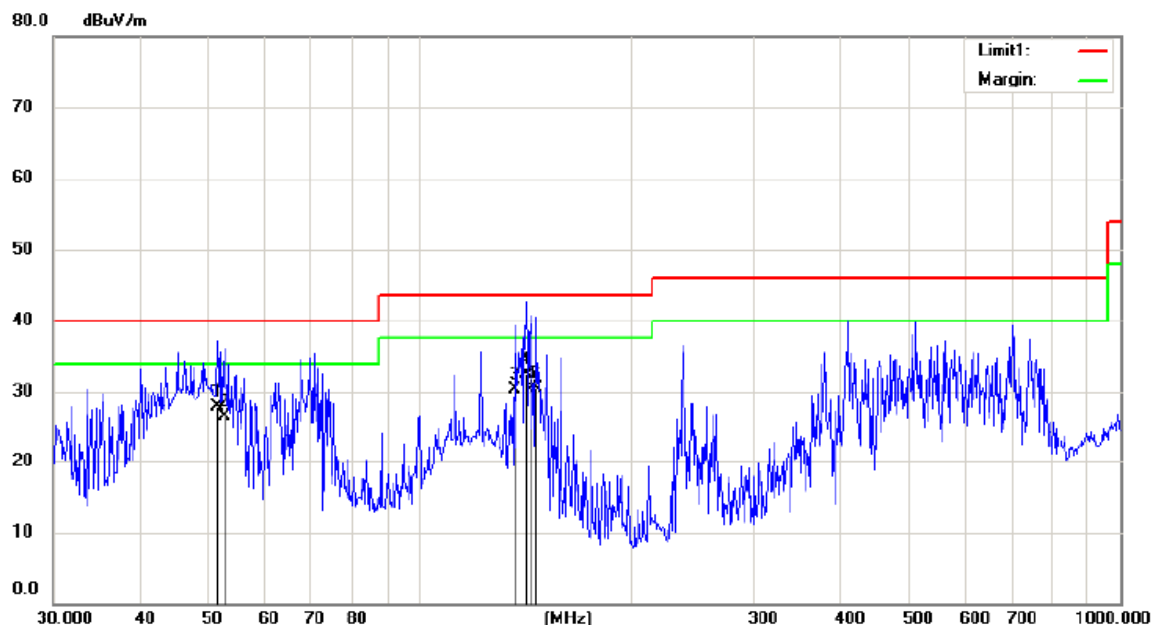

Site site #1

Polarization: **Vertical**

Temperature: 20 C

Limit: FCC Part15 Class B 3M Radiation


Power: AC 120V/60Hz

Humidity: 52 %

Mode: Receiving

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		51.4807	47.39	-19.49	27.90	40.00	-12.10	QP		
2		52.7600	46.17	-19.57	26.60	40.00	-13.40	QP		
3		136.4598	56.18	-25.88	30.30	43.50	-13.20	QP		
4	*	141.8262	58.76	-26.16	32.60	43.50	-10.90	QP		
5		144.3347	56.70	-26.10	30.60	43.50	-12.90	QP		
6		146.3734	56.23	-25.73	30.50	43.50	-13.00	QP		

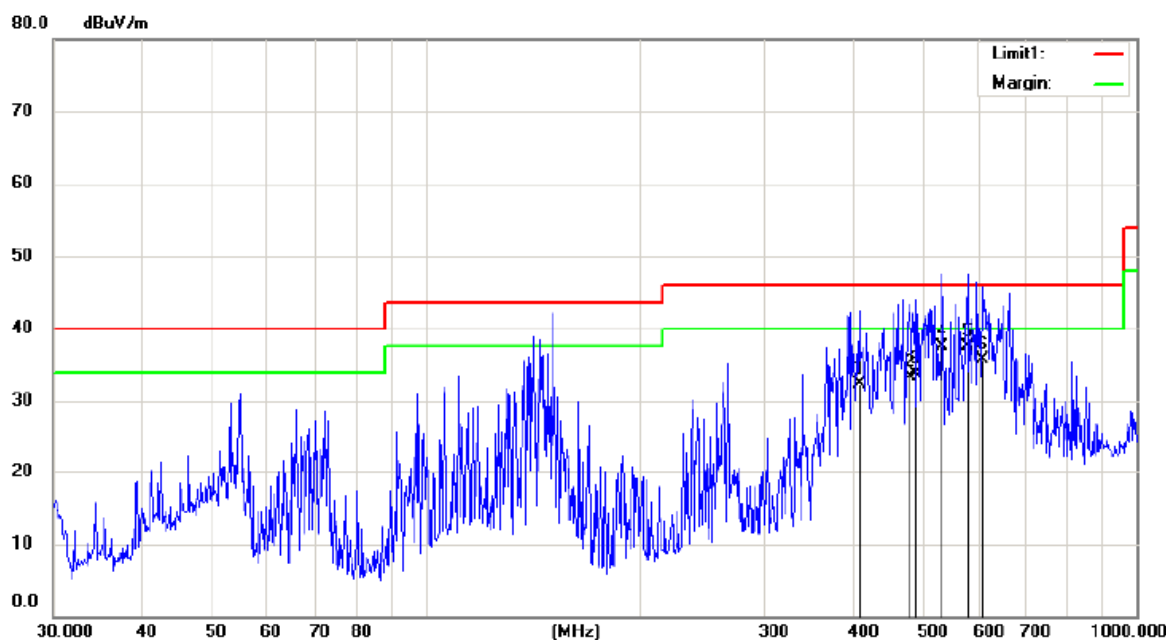

Site site #1 Polarization: **Horizontal** Temperature: 20 C
 Limit: FCC Part15 Class B 3M Radiation Power: AC 120V/60Hz Humidity: 52 %
 Mode: Receiving
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		407.5145	49.30	-16.90	32.40	46.00	-13.60	QP		
2		480.5276	48.49	-15.19	33.30	46.00	-12.70	QP		
3		489.0270	48.77	-14.97	33.80	46.00	-12.20	QP		
4	*	533.8321	50.63	-13.03	37.60	46.00	-8.40	QP		
5		578.6700	49.05	-11.55	37.50	46.00	-8.50	QP		
6		607.7867	48.59	-12.89	35.70	46.00	-10.30	QP		

Above 1000MHz:

Test Date : 05/23/2015 Temperature : 24 °C
 Test Result: PASS Humidity : 53 %
 Test By: KK

Mode: Receiving							
Freq. (MHz)	Ant.Pol. (H/V)	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
1152.244	V	37.21	17.84	74.00	54.00	-36.79	-36.16
4020.833	V	40.73	22.18	74.00	54.00	-33.27	-31.82
4413.462	V	43.26	23.2	74.00	54.00	-30.74	-30.8
4597.756	V	43.48	24.26	74.00	54.00	-30.52	-29.74
5134.615	V	43.44	25.37	74.00	54.00	-30.56	-28.63
5847.756	V	43.91	25.45	74.00	54.00	-30.09	-28.55
1152.244	H	39.82	21.14	74.00	54.00	-34.18	-32.86
2434.295	H	39.62	20.39	74.00	54.00	-34.38	-33.61
4405.449	H	43.98	24.67	74.00	54.00	-30.02	-29.33
4709.936	H	44.62	26.66	74.00	54.00	-29.38	-27.34
5743.59	H	44.79	25.32	74.00	54.00	-29.21	-28.68
5943.91	H	44.16	25.47	74.00	54.00	-29.84	-28.53



---The End---

6.PHOTOGRAPH OF TEST



6.1Photo of Conducted Emission Measurement





6.2 Photo of Radiation Emission Measurement

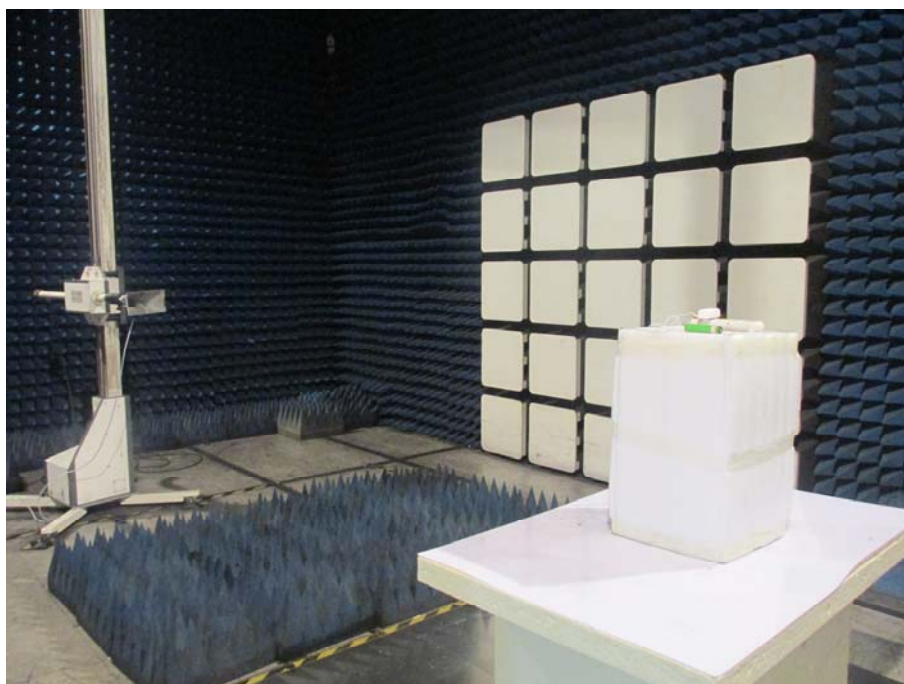
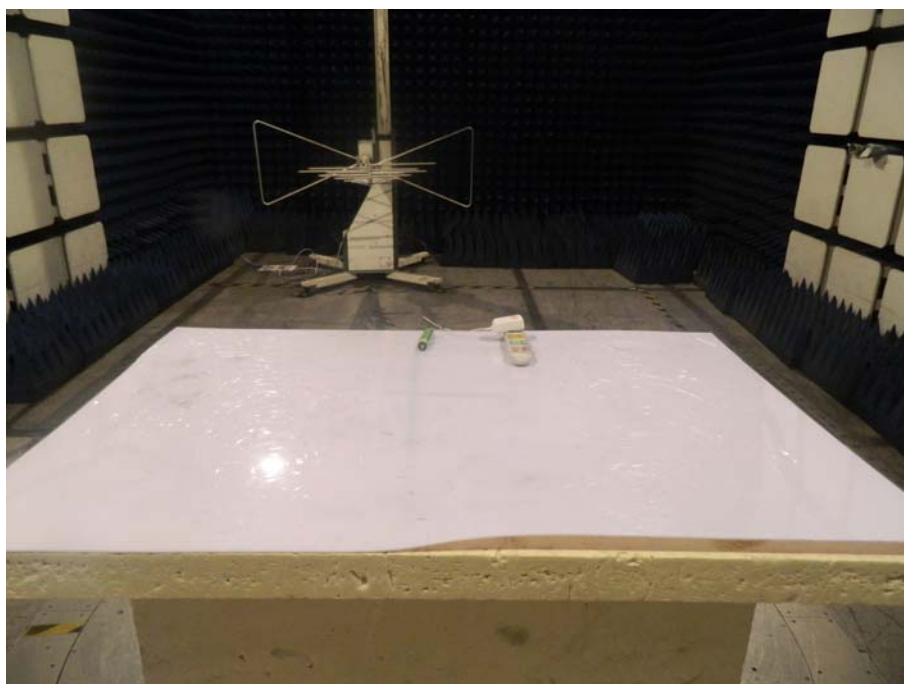




APPENDIX I (Photos of EUT)

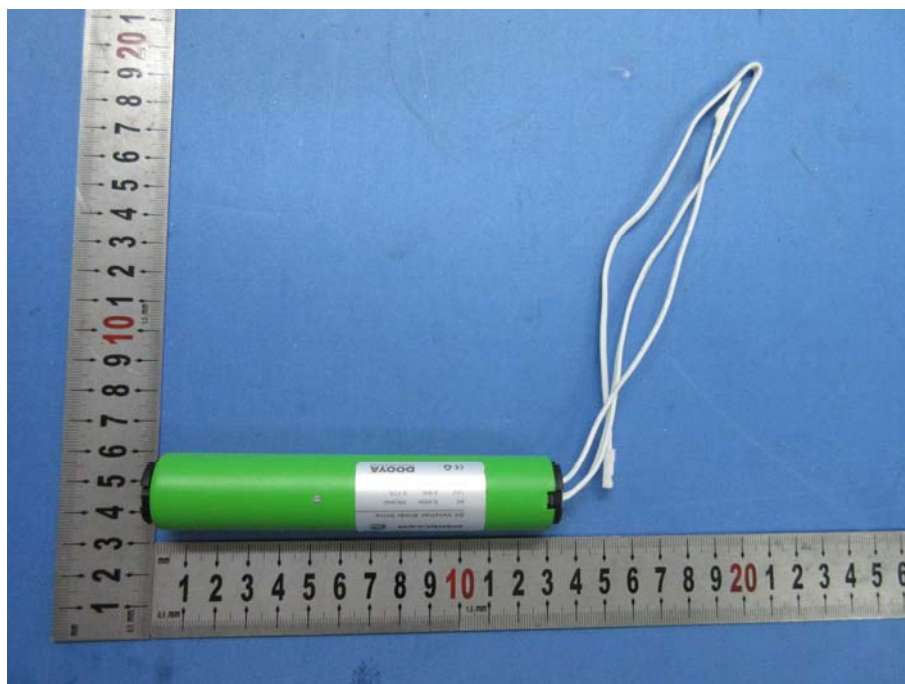
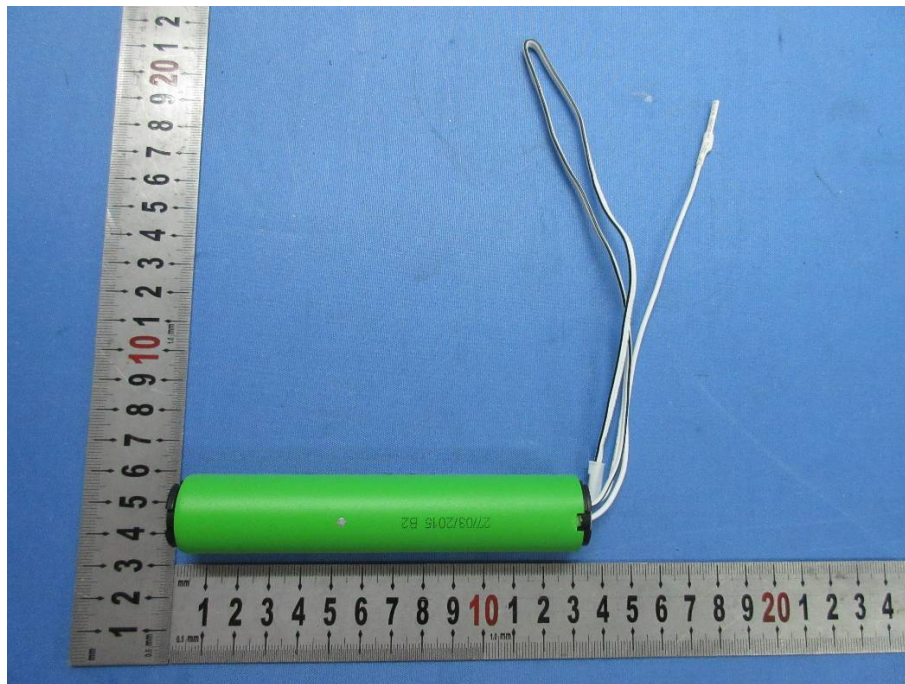


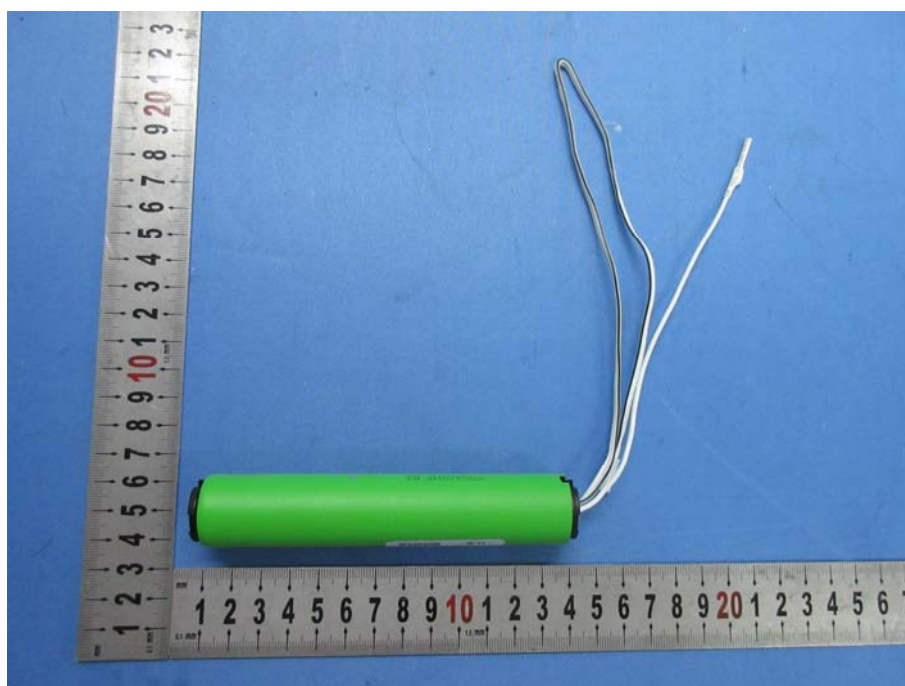
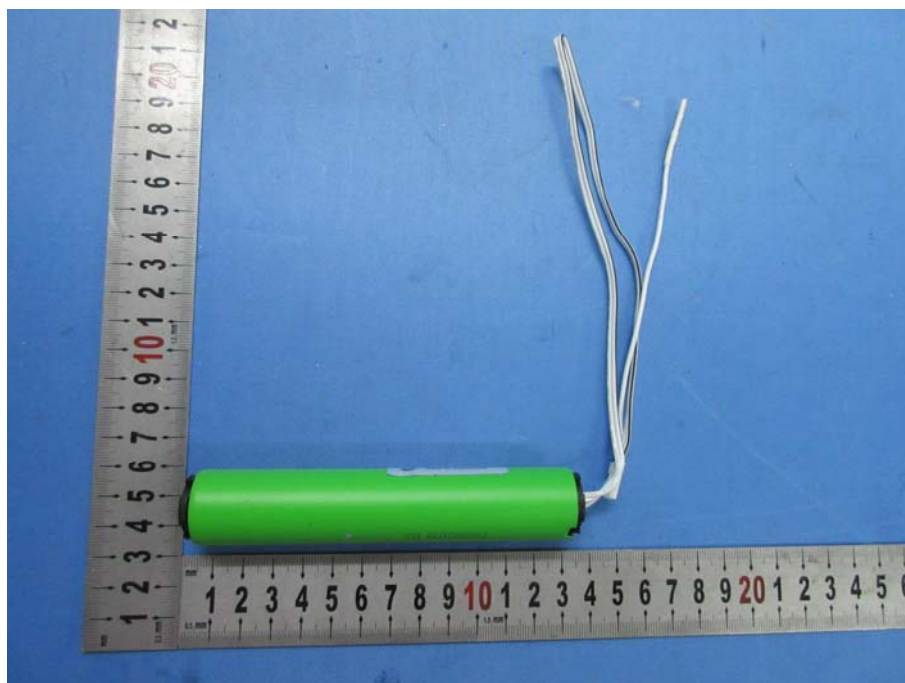






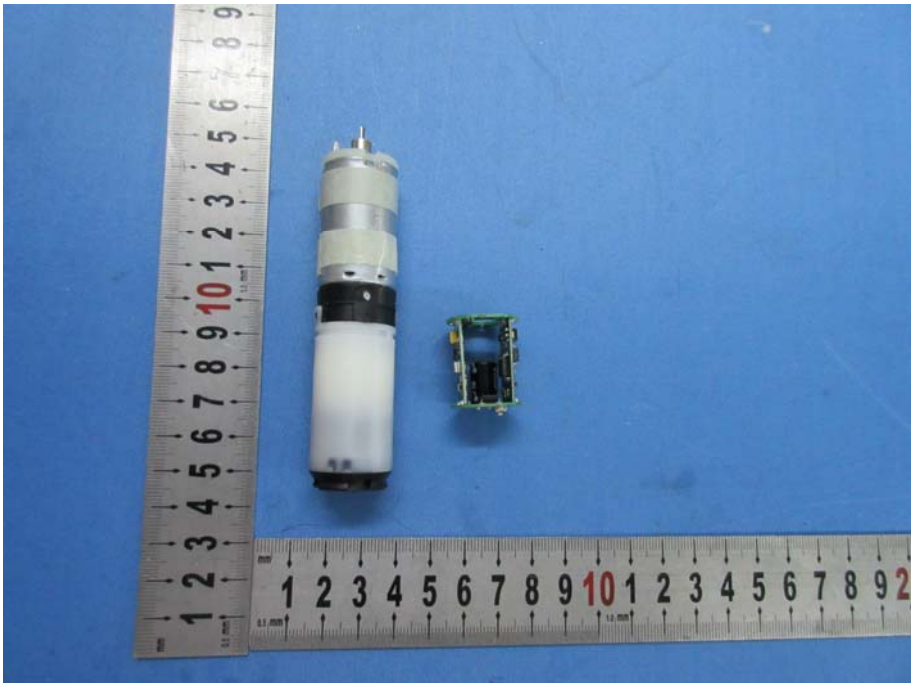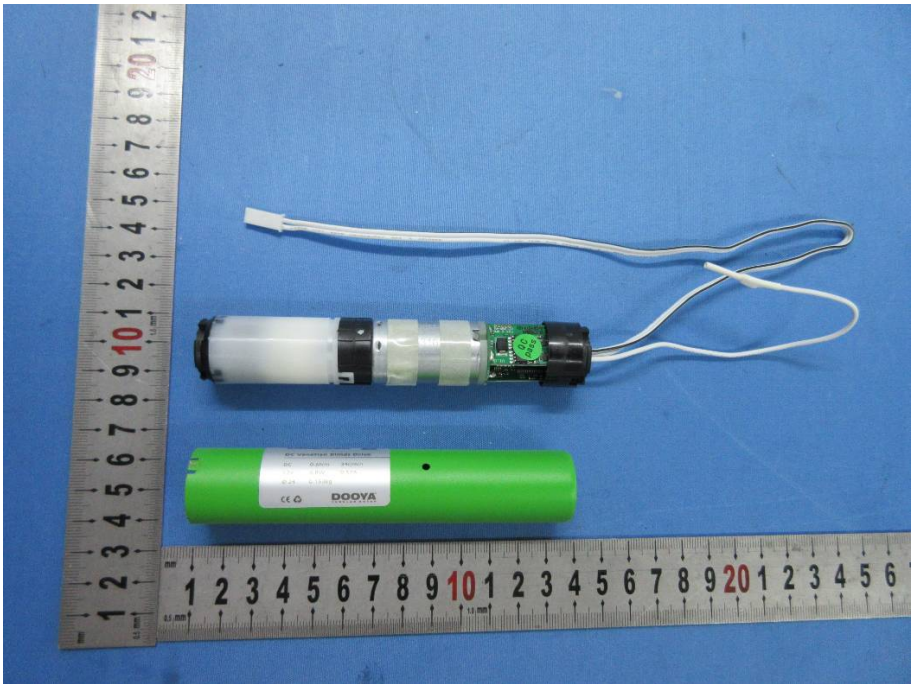

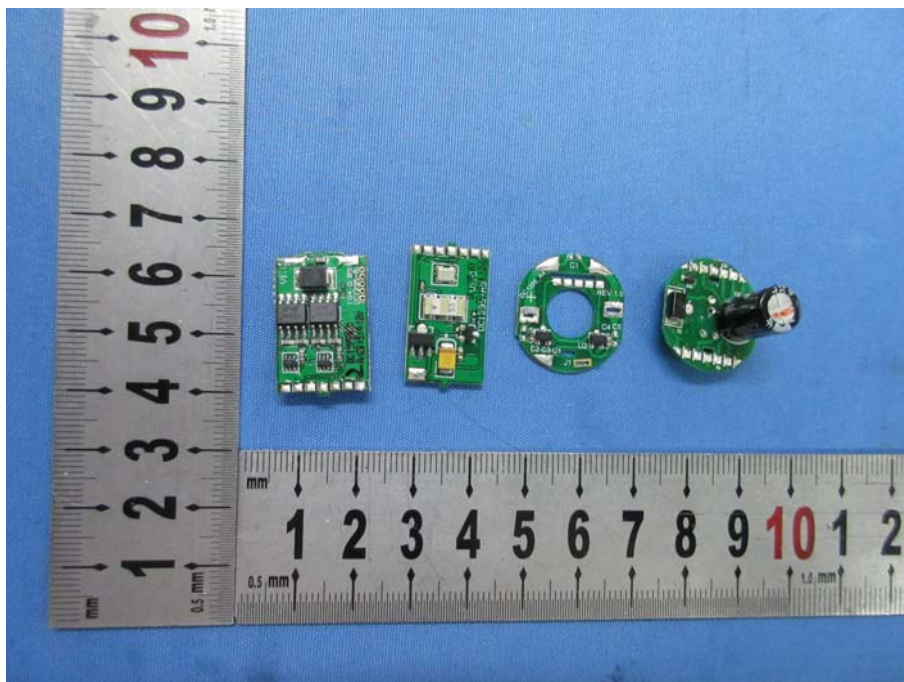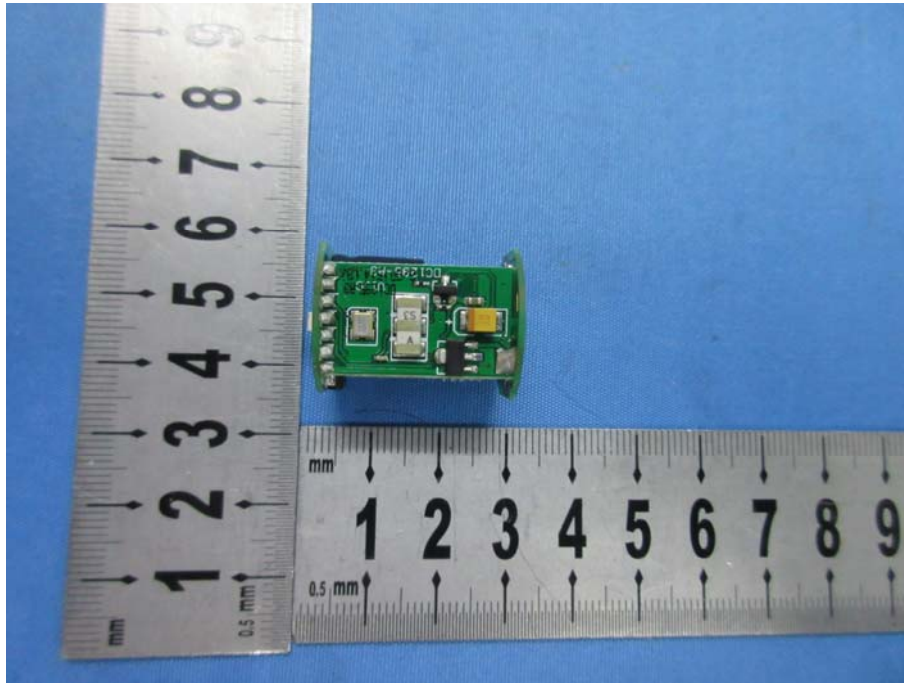

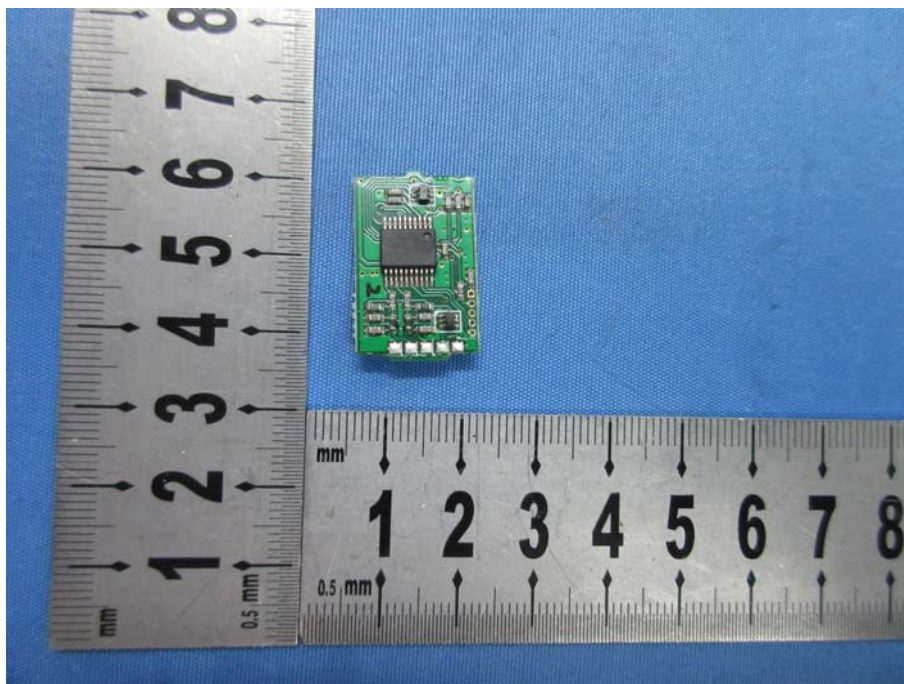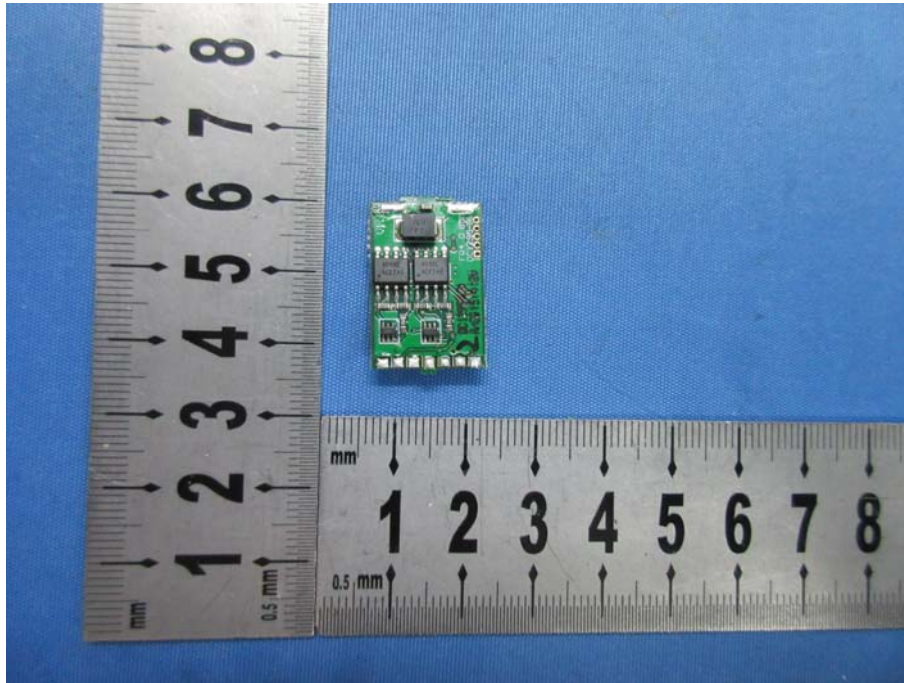

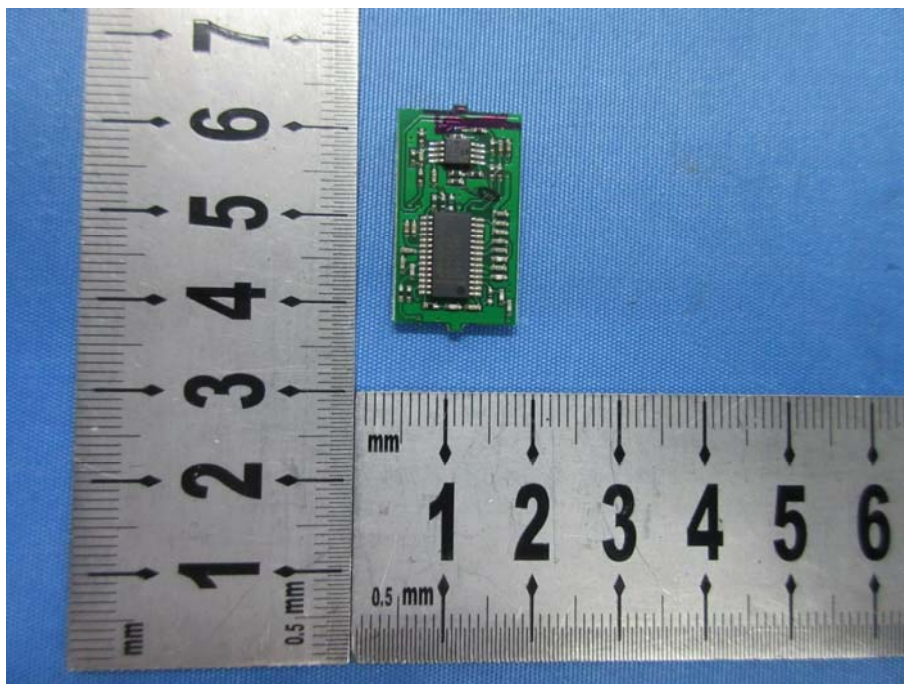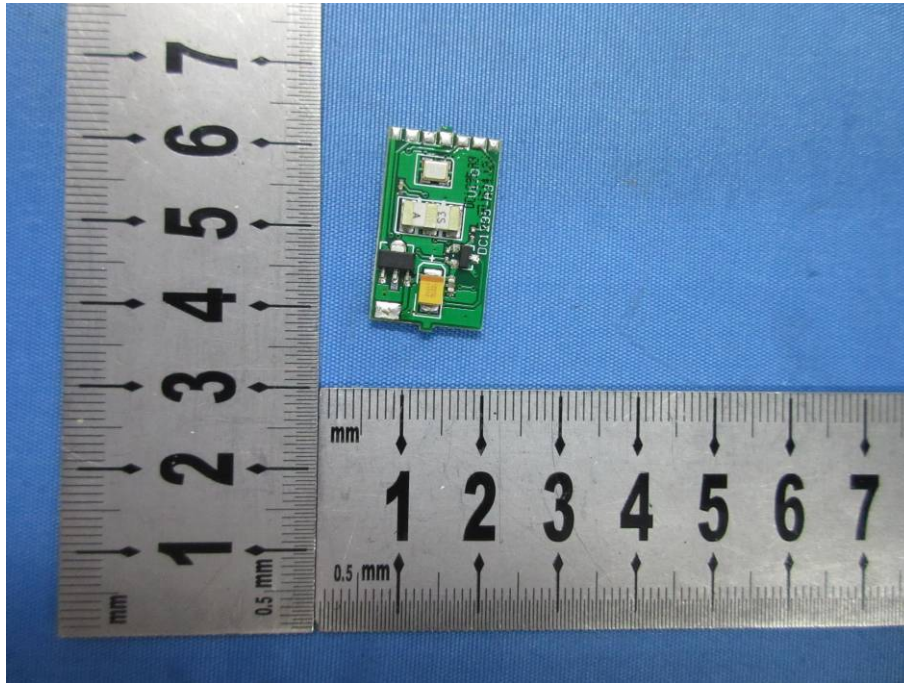

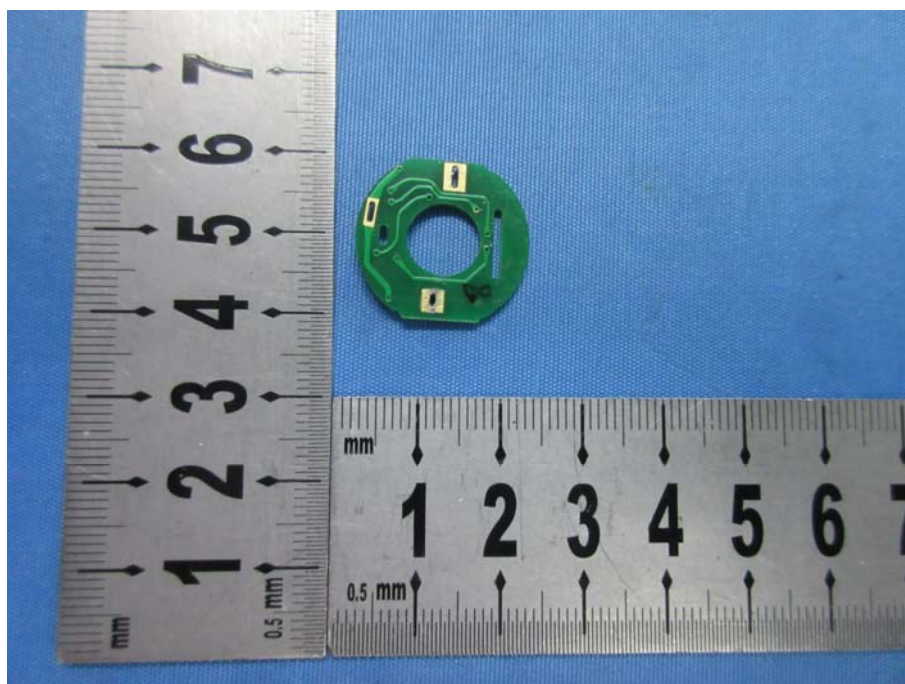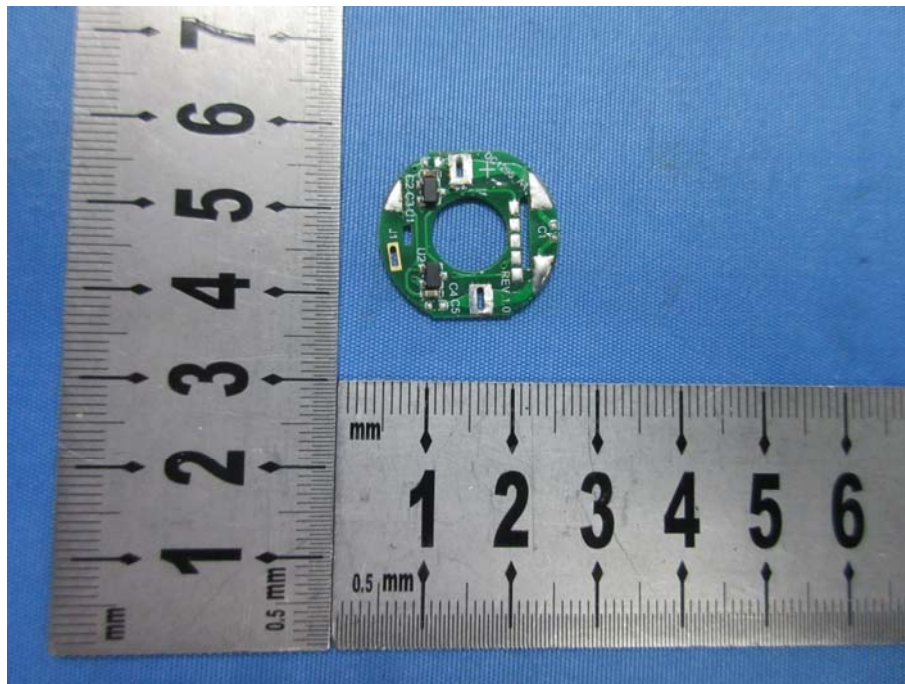



---The End---