



FCC TEST REPORT
FCC ID: 2A4MY-UAGRPB10

On Behalf of

Urban Armor Gear, LLC.

Rugged Wireless Power Bank

Model No.: UAG-WPB-01, 9B4411114030

Prepared for : Urban Armor Gear, LLC.
Address : 1601 Alton Pkwy, Irvine, CA 92606, United States

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District,
518103, Shenzhen, Guangdong, China

Report Number : A2310127-C01-R05
Date of Receipt : October 20, 2023
Date of Test : October 20, 2023 – November 2, 2023
Date of Report : November 10, 2023
Version Number : V0
Test Result : Pass

TABLE OF CONTENTS

Description	Page
1. Test Result Summary	5
2. General Information	6
2.1. Description of Device (EUT)	6
2.2. Accessories of Device (EUT).....	7
2.3. Tested Supporting System Details	7
2.4. Block Diagram of Connection between EUT and Simulators	7
2.5. Description of Test Modes	7
2.6. Test Conditions	7
2.7. Test Facility	8
2.8. Measurement Uncertainty.....	8
2.9. Test Equipment List	9
3. Test Results and Measurement Data	10
3.1. Conducted Emission	10
3.1.1. Test Specification	10
3.1.2. Test Data	11
3.2. Radiated Spurious Emission Measurement	14
3.2.1. Test Specification	14
3.2.2. Test Data	17
3.3. Test Specification	23
3.3.1. Test Data	24
4. Photos of Test Setup	25
5. Photographs of EUT	27

TEST REPORT DECLARATION

Applicant : Urban Armor Gear, LLC.
Address : 1601 Alton Pkwy, Irvine, CA 92606, United States
Manufacturer : Urban Armor Gear, LLC.
Address : 1601 Alton Pkwy, Irvine, CA 92606, United States
EUT Description : Rugged Wireless Power Bank
(A) Model No. : UAG-WPB-01, 9B4411114030

(B) Trademark :



Measurement Standard Used:

FCC CFR Title 47 Part 15 Subpart C Section 15.209

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed full responsibility for the accuracy and completeness of test. Also, this report shows that the EUT is technically compliant with the FCC CFR Title 47 Part 15 Subpart C Section 15.209 requirements.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....:

Yannis Wen
Project Engineer

A handwritten signature in black ink that reads 'Yannis Wen'. The signature is written in a cursive, flowing style. Below the signature is a horizontal dashed line.

Approved by (name + signature).....:

Reak Yang
Project Manager

A handwritten signature in black ink that reads 'Reak Yang'. The signature is written in a cursive, flowing style. Below the signature is a horizontal dashed line.

Date of issue.....

November 10, 2023

Revision History

Revision	Issue Date	Revisions	Revised By
V0	November 10, 2023	Initial released Issue	Yannis Wen

1. Test Result Summary

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203	PASS
AC Power Line Conducted Emission	§15.207	PASS
Spurious Emission	§15.209(a)(f)	PASS
Occupied Bandwidth	§15.215 (c)	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

2. General Information

2.1. Description of Device (EUT)

EUT Name	: Rugged Wireless Power Bank
Model No.	: UAG-WPB-01, 9B4411114030
DIFF.	: There is no difference except the name of the model. All tests are made with the UAG-WPB-01 model.
Power supply	: DC 5V from adapter, DC 3.85V from battery
EUT information	: Input (TYPE-C) : 5V =2.5A, 9V =2A, 12V =1.5A Output 1 (TYPE-C) : 5V =2.4A, 9V =2.22A, 12V =1.67A Output 2 (USB-A) : 5V =3A, 9V =2A, 12V =1.5A Wireless Output 3: 5W/7.5W/10W
Operation frequency	: 112~205KHz
Modulation	: MSK
Antenna Type	: Coil Antenna, Maximum Gain is 0dBi (This value is supplied by applicant).
Software version	: V1.1
Hardware version	: V1.0
Connector cable loss	: 0.5dB (This value is supplied by applicant).
Intend use environment	: Residential, commercial and light industrial environment


2.2. Accessories of Device (EUT)

Accessories1 : Cable
 Manufacturer : Urban Armor Gear, LLC.
 Model : /
 Ratings : /

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification
1	AC ADAPTER	Shenzhen HUONIU Technology Co., Ltd.	HNFCQC3024UU	--	--
2	Wireless load	--	--	--	--

2.4. Block Diagram of Connection between EUT and Simulators

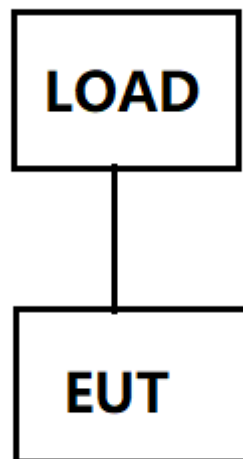

2.5. Description of Test Modes

Channel	Frequency (KHz)
1	148

2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35°C	24°C
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	98kPa

2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103, Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission

Registration Number: 293961

July 15, 2019 Certificated by IC

Registration Number: CN0085

2.8. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	1.63dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	3.5dB
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.74dB(Polarize: V)
	3.76dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	3.77dB(Polarize: V)
	3.80dB(Polarize: H)
Uncertainty for radio frequency	5.06×10^{-8} GHz
Uncertainty for conducted RF Power	0.40dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

2.9. Test Equipment List

Equipment	Manufacture	Model No.	Firmware version	Serial No.	Last cal.	Cal Interval
9*6*6 anechoic chamber	CHENYU	9*6*6	/	N/A	2022.05.17	3Year
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	2.3	102137	2023.08.16	1Year
Spectrum analyzer	Agilent	N9020A	A.14.16	MY499100060	2023.08.16	1Year
Receiver	ROHDE&SCHWARZ	ESR	2.28 SP1	1316.3003K03-10 2082-Wa	2023.08.16	1Year
Receiver	R&S	ESCI	4.42 SP1	101165	2023.08.16	1Year
Bilog Antenna	Schwarzbeck	VULB 9168	/	VULB 9168#627	2023.08.28	1Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	/	2106	2023.08.19	1Year
Loop Antenna	SCHWARZBECK	FMZB 1519B	/	00128	2023.08.19	1Year
RF Cable	Resenberger	Cable 1	/	RE1	2023.08.16	1Year
RF Cable	Resenberger	Cable 2	/	RE2	2023.08.16	1Year
RF Cable	Resenberger	Cable 3	/	CE1	2023.08.16	1Year
Pre-amplifier	HP	HP8347A	/	2834A00455	2023.08.16	1Year
Pre-amplifier	Agilent	8449B	/	3008A02664	2023.08.16	1Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	/	8126-466	2023.08.16	1Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	/	101043	2023.08.16	1Year
Horn Antenna	SCHWARZBECK	BBHA 9170	/	00946	2023.08.19	1Year
Preamplifier	SKET	LNPA_1840 -50	/	SK2018101801	2023.08.16	1 Year
Power Meter	Agilent	E9300A	/	MY41496628	2023.08.16	1 Year
Power Sensor	DARE	RPR3006W	/	15100041SNO91	2023.08.16	1 Year
Temp. & Humid. Chamber	Teelong	TL-HW408S	/	TL-20191205-01	2023.07.25	1 Year
Switching Mode Power Supply	JUNKE	JK12010S	/	20140927-6	2023.08.16	1 Year
Adjustable attenuator	MWRFTtest	N/A	/	N/A	N/A	N/A
10dB Attenuator	Mini-Circuits	DC-6G	/	N/A	N/A	N/A

Software Information			
Test Item	Software Name	Manufacturer	Version
RE	EZ-EMC	EZ	Alpha-3A1
CE	EZ-EMC	EZ	Alpha-3A1
RF-CE	MTS 8310	MW	V2.0.0.0

3. Test Results and Measurement Data

3.1. Conducted Emission

3.1.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2013														
Frequency Range:	150 kHz to 30 MHz														
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
Limits:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test Setup:	<div><p>Reference Plane</p><p>40cm</p><p>80cm</p><p>E.U.T</p><p>Adapter</p><p>LISN</p><p>Filter</p><p>AC power</p><p>EMI Receiver</p><p>Test table/Insulation plane</p><p>Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p></div>														
Test Mode:	Transmitting Mode														
Test Procedure:	<div><div>1. The E.U.T is connected to an adapter through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</div><div>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</div><div>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.</div></div>														
Test Result:	PASS														


3.1.2. Test Data

Please refer to following diagram for individual

Test Mode	: Charging+5V/1A Output 2 (USB-A)+5W(Wireless Output 3)
Test Result	: PASS
Note:	<p>The test results are listed in next pages.</p> <p>All test modes has been tested, this report only reflected the worst mode.(Charging+5W)</p> <p>If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector and quasi-peak detector need not be carried out.</p> <p>If the limits for the measurement with the average detector are met when using a receiver with a quasi-peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.</p>

Pol

Line

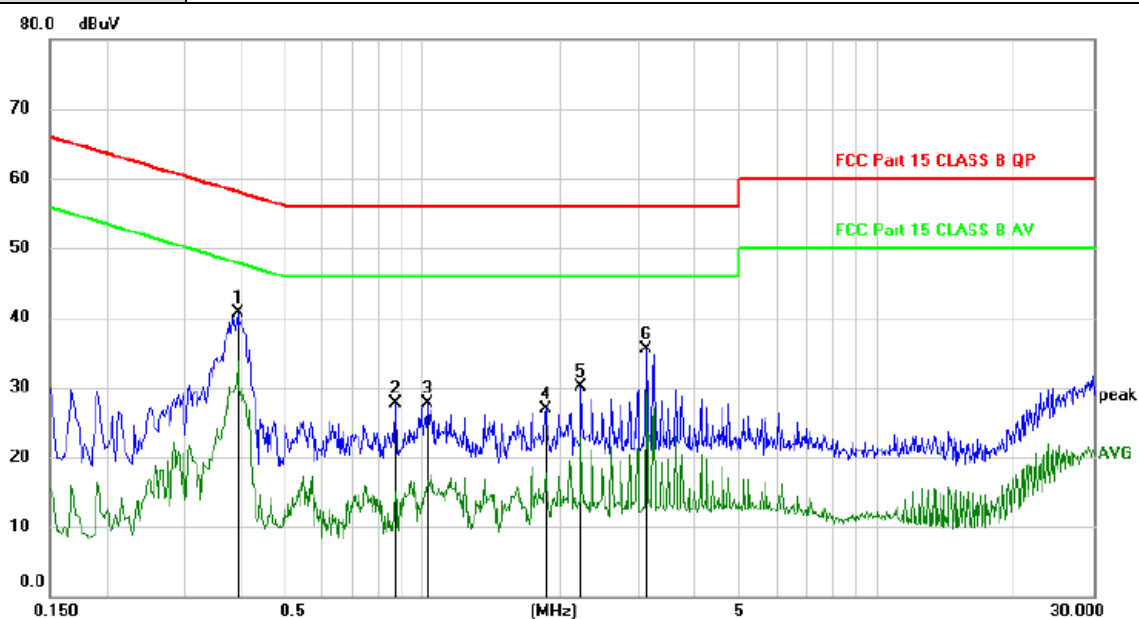


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.3899	30.83	9.94	40.77	58.07	-17.30	peak	
2		0.8670	17.73	9.96	27.69	56.00	-28.31	peak	
3		1.0230	17.80	9.92	27.72	56.00	-28.28	peak	
4		1.8600	16.98	9.88	26.86	56.00	-29.14	peak	
5		2.2320	20.17	9.89	30.06	56.00	-25.94	peak	
6		3.1020	25.47	9.96	35.43	56.00	-20.57	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Pol	Neutral
-----	---------

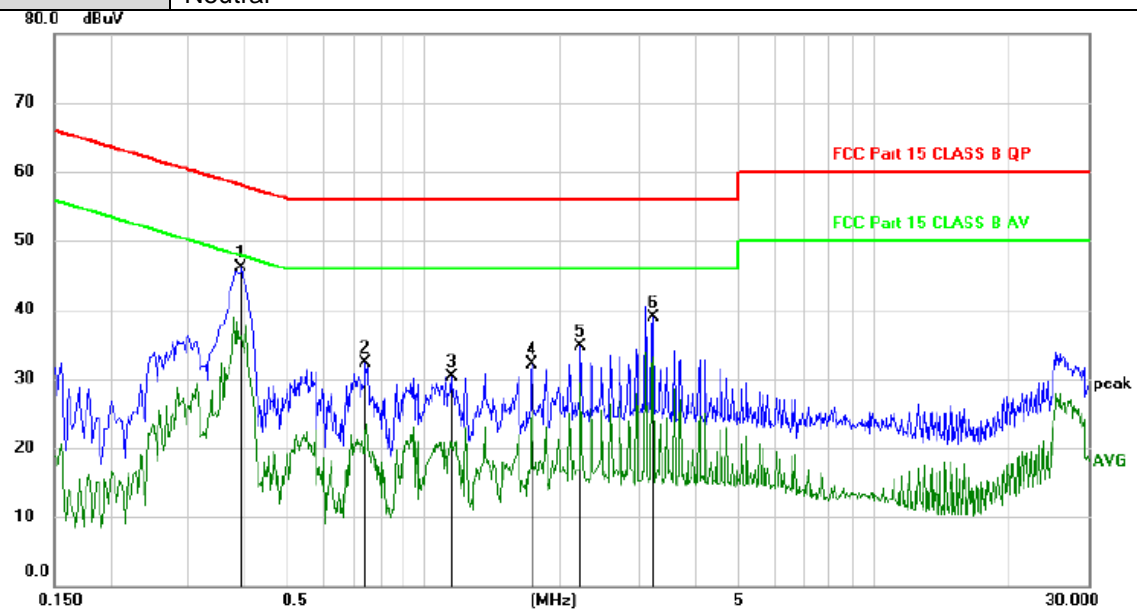

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	0.3930	36.19	9.94	46.13	58.00	-11.87	peak	
2		0.7409	22.30	9.93	32.23	56.00	-23.77	peak	
3		1.1520	20.34	9.89	30.23	56.00	-25.77	peak	
4		1.7370	22.15	9.89	32.04	56.00	-23.96	peak	
5		2.2320	24.86	9.89	34.75	56.00	-21.25	peak	
6		3.2250	28.86	9.96	38.82	56.00	-17.18	peak	


*:Maximum data x:Over limit !:over margin

(Reference Only)


Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

3.2. Radiated Spurious Emission Measurement


3.2.1. Test Specification

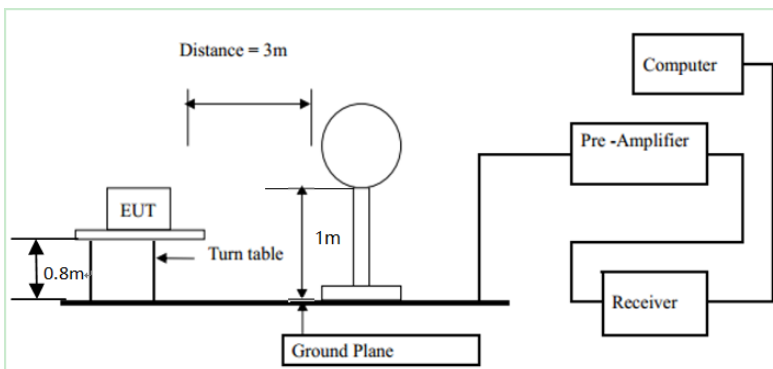Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10: 2013				
Frequency Range:	9 kHz to 25 GHz				
Measurement Distance:	3 m				
Antenna Polarization:	Horizontal & Vertical				
Operation mode:	Refer to item 4.1				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz-150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz-30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
Peak		1MHz	10Hz	Average Value	
Limit:	Frequency		Field Strength (microvolts/meter)		Measurement Distance (meters)
	0.009-0.490		2400/F(KHz)		300
	0.490-1.705		24000/F(KHz)		30
	1.705-30		30		30
	30-88		100		3
	88-216		150		3
	216-960		200		3
	Above 960		500		3
	Frequency		Field Strength (microvolts/meter)	Measurement Distance (meters)	Detector
	Above 1GHz	500	3	Average	
5000		3	Peak		
Test setup:	For radiated emissions below 30MHz				
					
	30MHz to 1GHz				

30MHz to 1GHz

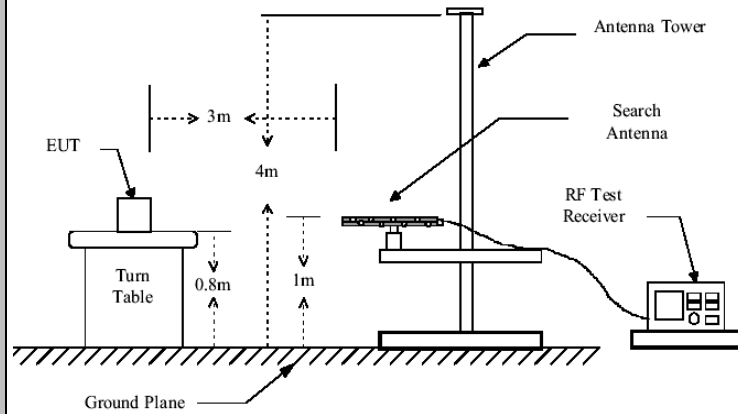

Above 1GHz

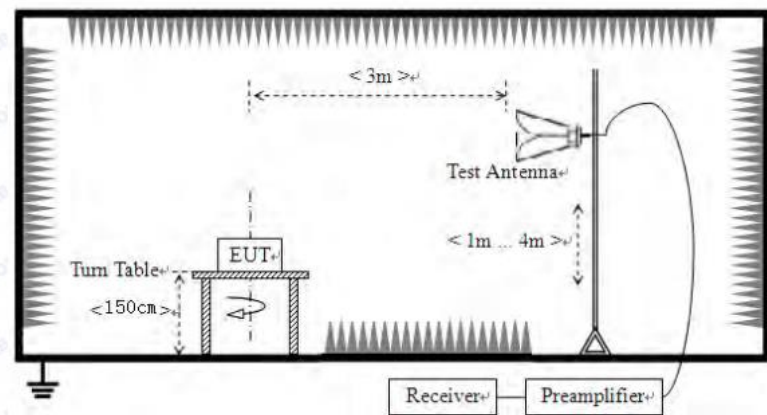

Test Procedure:

1. For the radiated emission test below 1GHz:

The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level.

For the radiated emission test above 1GHz:

Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.


2. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
3. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using

	<p>the quasi-peak detector and reported.</p> <p>4. Use the following spectrum analyzer settings:</p> <p>(1) Span shall wide enough to fully capture the emission being measured;</p> <p>(2) Set RBW=100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;</p> <p>(3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.</p> <p>For average measurement: VBW = 10 Hz, when duty cycle is no less than 98 percent. VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.</p>
Test mode:	Refer to section 4.1 for details
Test results:	PASS

3.2.2. Test Data

Please refer to following diagram for individual


Frequency Range	: 9KHz~30MHz
Test Mode	: TX: 148kHz
Test Results	: PASS
Note:	<ol style="list-style-type: none">1. The test results are listed in next pages.2. This mode is worst case mode, so this report only reflected the worst mode.3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the quasi-peak detector need not be carried out.

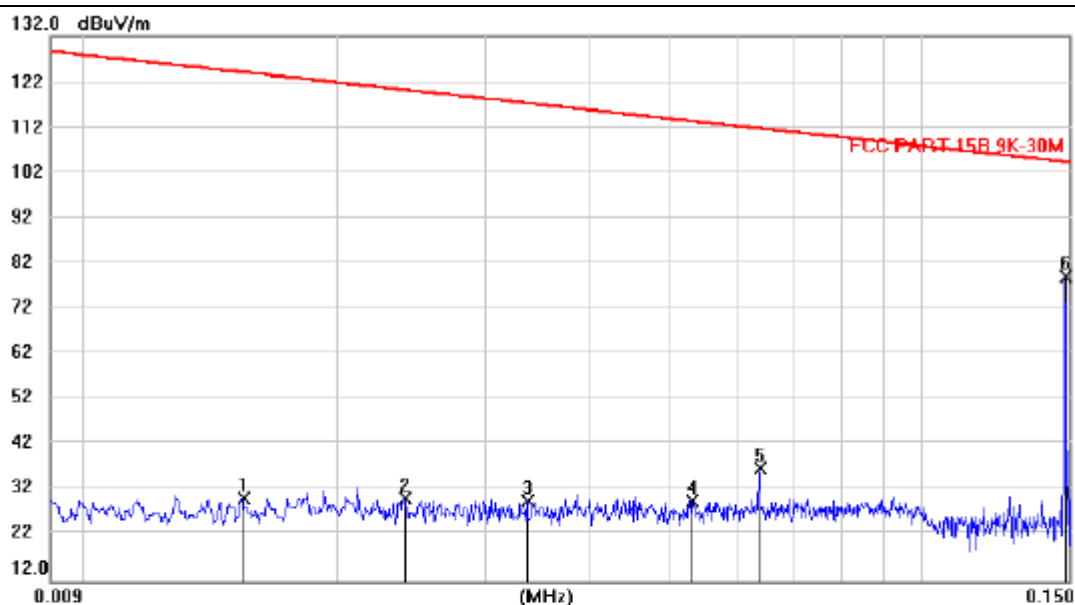

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		0.0153	8.83	21.37	30.20	124.0	-93.81	peak		
2		0.0240	9.10	21.15	30.25	120.1	-89.86	peak		
3		0.0337	8.63	20.79	29.42	117.1	-87.76	peak		
4		0.0527	9.74	19.94	29.68	113.3	-83.62	peak		
5		0.0638	16.54	20.11	36.65	111.6	-75.00	peak		
6	*	0.1482	59.01	20.17	79.18	104.3	-25.17	peak		

Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

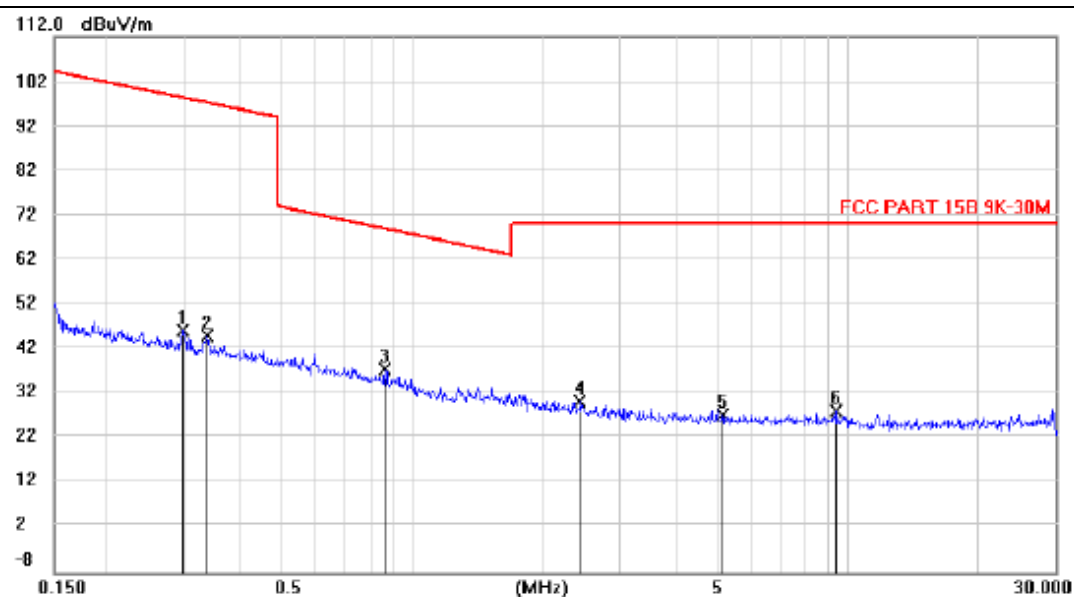

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table
		MHz	Level	Factor	ment			Height	Degree
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		0.2976	26.23	19.99	46.22	98.32	-52.10	peak	
2		0.3386	24.95	19.93	44.88	97.20	-52.32	peak	
3	*	0.8637	17.44	19.92	37.36	69.00	-31.64	peak	
4		2.4269	9.85	20.36	30.21	70.00	-39.79	peak	
5		5.1508	5.70	21.68	27.38	70.00	-42.62	peak	
6		9.3849	6.65	21.51	28.16	70.00	-41.84	peak	

Note: 1. *:Maximum data; x:Over limit; !:over margin.


2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Frequency Range	: 30MHz~1000MHz
Test Mode	: Charging+5V/1A Output 2 (USB-A)+5W(Wireless Output 3)
Test Results	: PASS
Note:	<p>1. The test results are listed in next pages.</p> <p>2. All test modes has been tested, this report only reflected the worst mode. (Charging+5W)</p> <p>3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the quasi-peak detector need not be carried out.</p>

Frequency Range		:	Above 1GHz			
EUT		:	/	Test Date	:	/
M/N		:	/	Temperature	:	/
Test Engineer		:	/	Humidity	:	/
Test Mode		:	/			
Test Results		:	N/A			
Note:	1. The highest frequency of the internal sources of the EUT is less than 108 MHz, the measurement shall only be made up to 1 GHz. So the frequency rang above 1GHz radiation test not applicable.					


30MHz-1GHz

Pol	Vertical
------------	----------

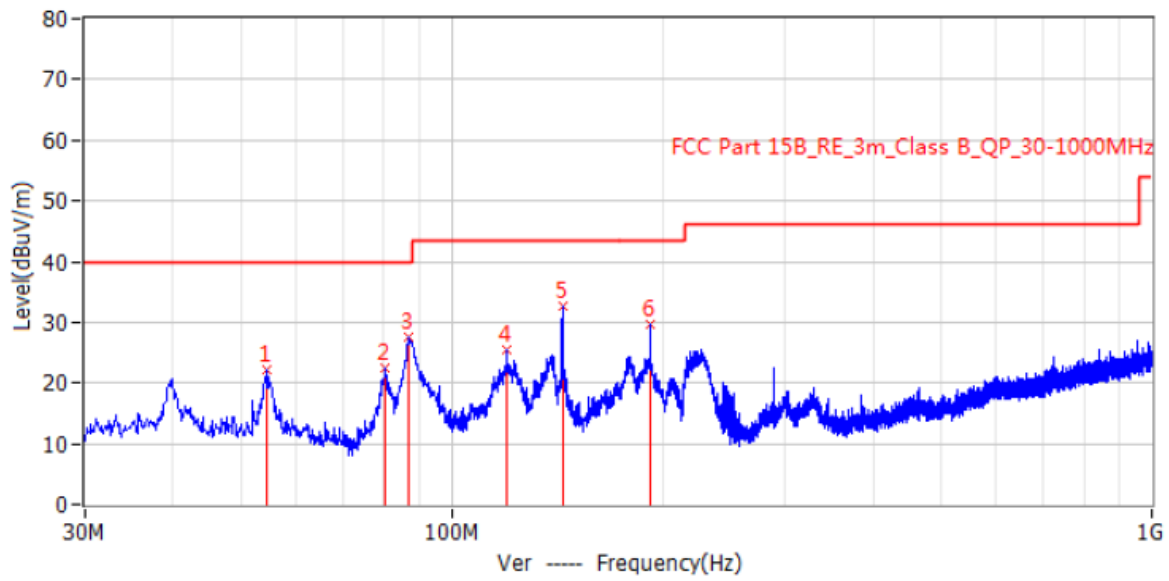


No.	Frequency	Limit dBuV/m	Level dBuV/m	Margin dB	Factor dB/m	Detector	Height cm	Height cm	Angle deg
1*	54.614MHz	40.0	22.1	-17.9	15.4	PK	Ver	100.0	116.0
2*	80.561MHz	40.0	22.6	-17.4	11.3	PK	Ver	100.0	156.0
3*	86.866MHz	40.0	27.5	-12.5	11.3	PK	Ver	100.0	142.0
4*	119.968MHz	43.5	25.5	-18.0	13.8	PK	Ver	100.0	168.0
5*	143.975MHz	43.5	32.7	-10.8	15.2	PK	Ver	100.0	0.0
6*	191.990MHz	43.5	29.8	-13.7	12.5	PK	Ver	100.0	39.0

Pol	Horizontal
------------	------------

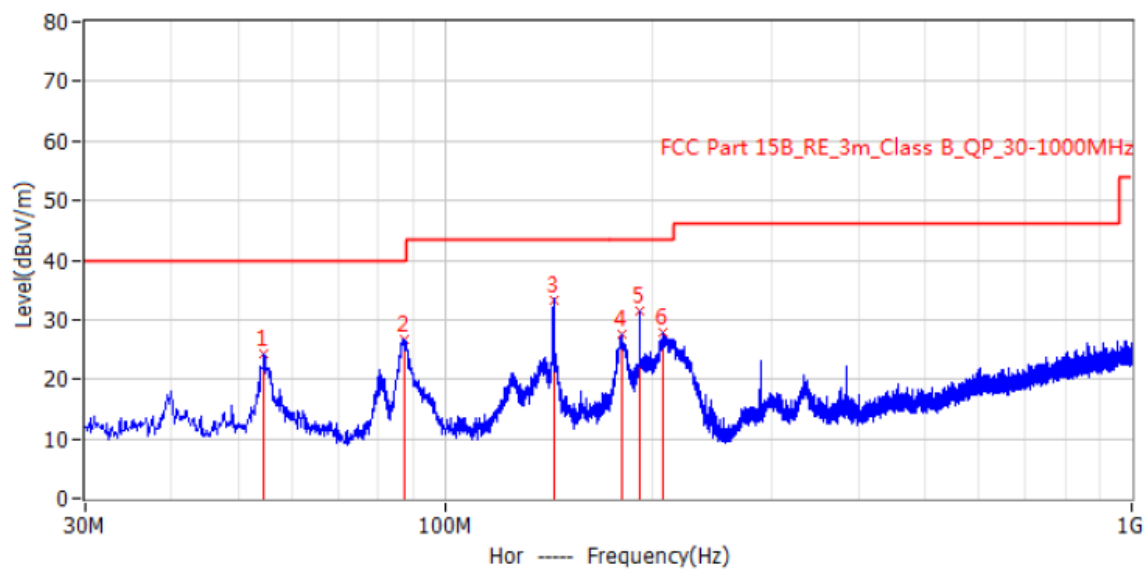

No.	Frequency	Limit dBuV/m	Level dBuV/m	Margin dB	Factor dB/m	Detector	Height cm	Height cm	Angle deg
1*	54.614MHz	40.0	24.3	-15.7	15.4	PK	Hor	200.0	161.0
2*	87.594MHz	40.0	26.8	-13.2	11.3	PK	Hor	200.0	84.0
3*	143.975MHz	43.5	33.4	-10.1	15.2	PK	Hor	200.0	266.0
4*	181.078MHz	43.5	27.5	-16.0	13.7	PK	Hor	200.0	0.0
5*	191.990MHz	43.5	31.4	-12.1	12.5	PK	Hor	116.0	0.0
6*	207.874MHz	43.5	27.9	-15.6	11.8	PK	Hor	187.0	0.0


3.3. Test Specification

Test Requirement:	FCC Part15 C Section 15.215(c)
Test Method:	ANSI C63.10: 2013
Limit:	N/A
Test Procedure:	<ol style="list-style-type: none"> 1. According to the follow Test-setup, keep the relative position between the artificial antenna and the EUT. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Use the following spectrum analyzer settings for 20dB Bandwidth measurement. Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel; RBW\geq1% of the 20 dB bandwidth; VBW\geqRBW; Sweep = auto; Detector function = peak; Trace = max hold. 4. Measure and record the results in the test report.
Test setup:	 <p style="text-align: center;">Spectrum Analyzer EUT</p>
Test Mode:	Refer to section 4.1 for details
Test results:	PASS

3.3.1. Test Data



Frequency(KHz)	20dB Occupy Bandwidth (kHz)	Limit (kHz)	Conclusion
148	3.847	---	PASS

Test plots as follows:

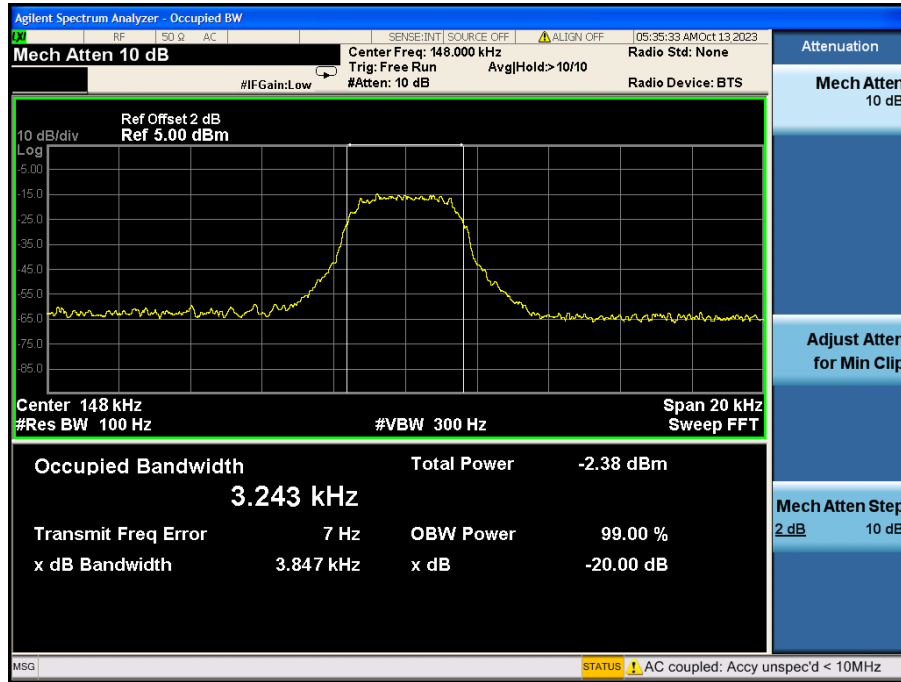


4. Photos of Test Setup


Radiated Emission

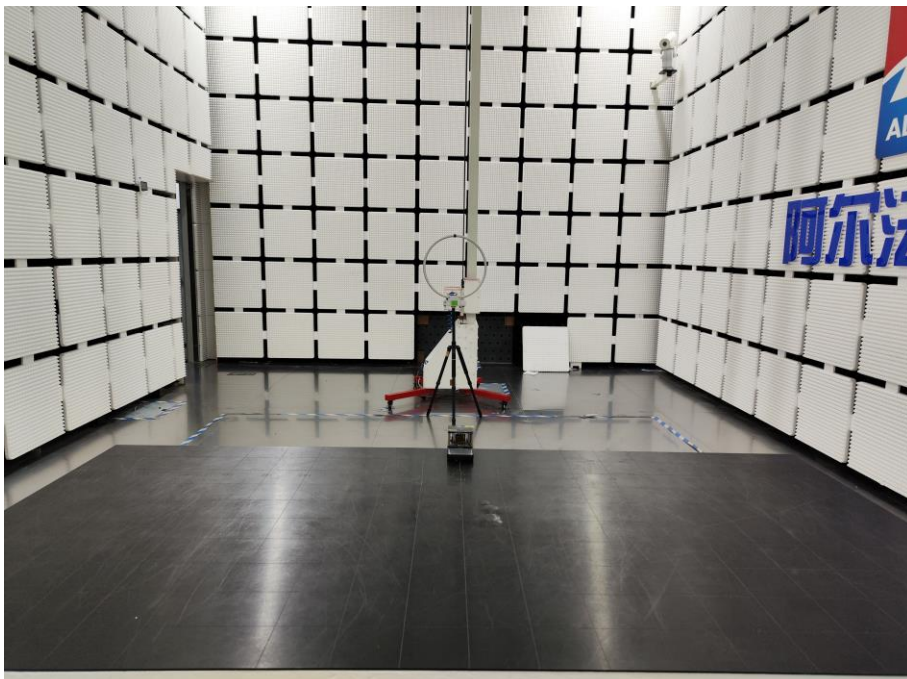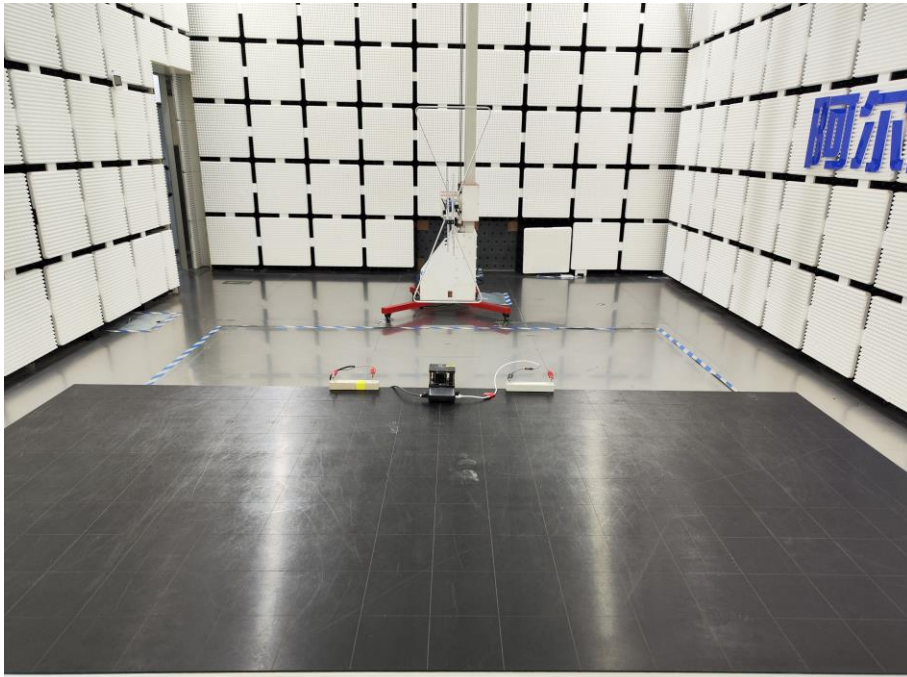




Conducted Emission

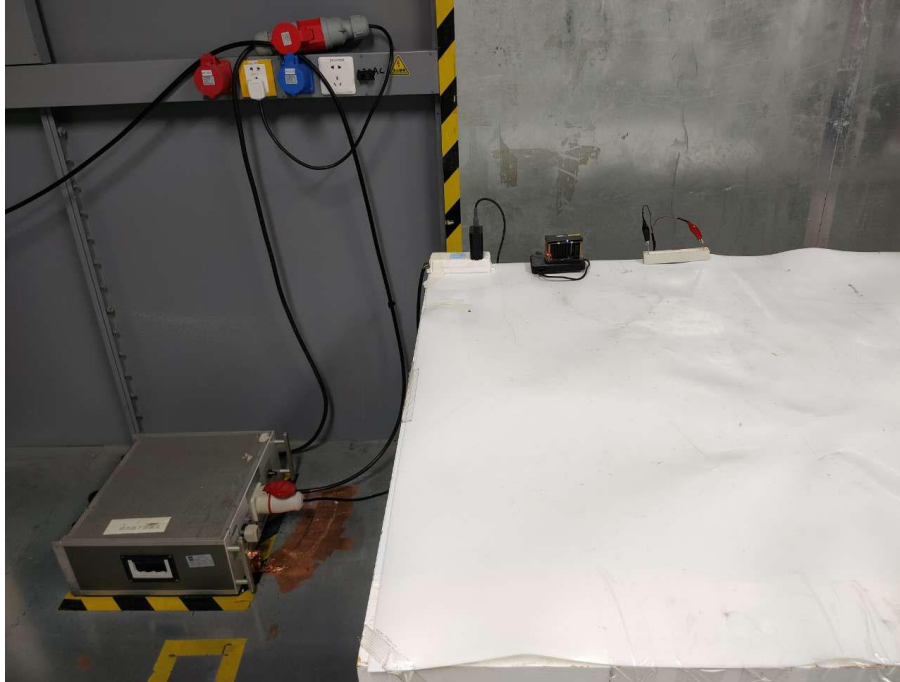


5. Photographs of EUT


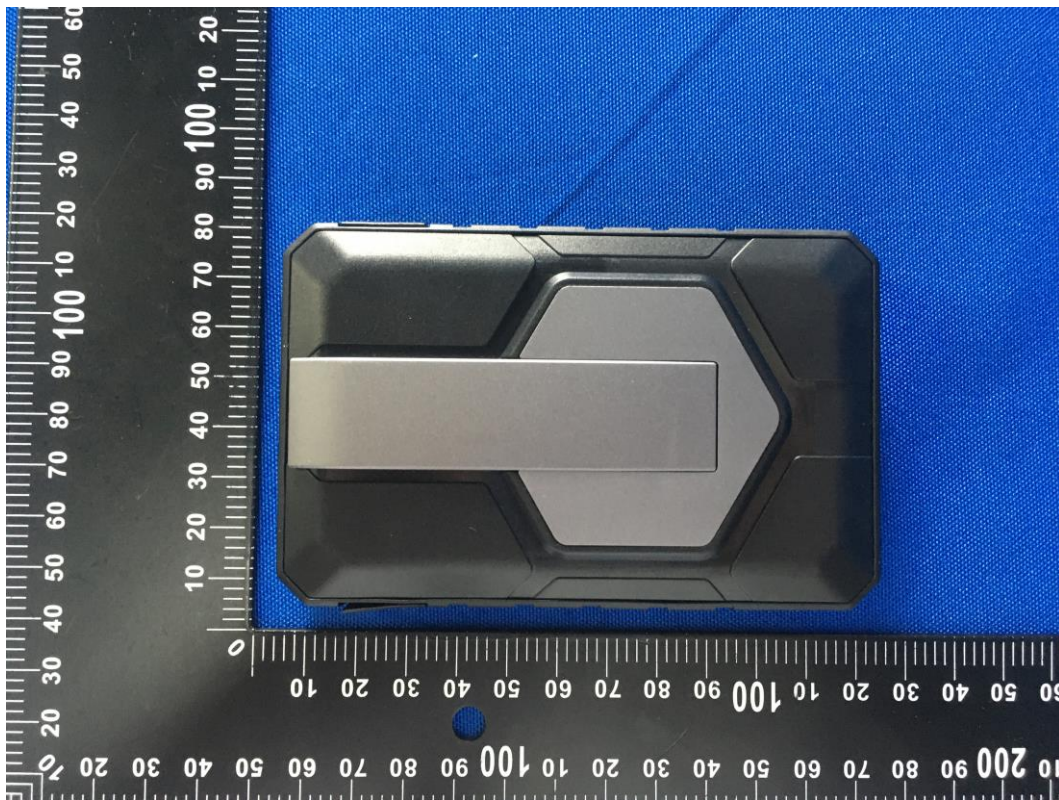



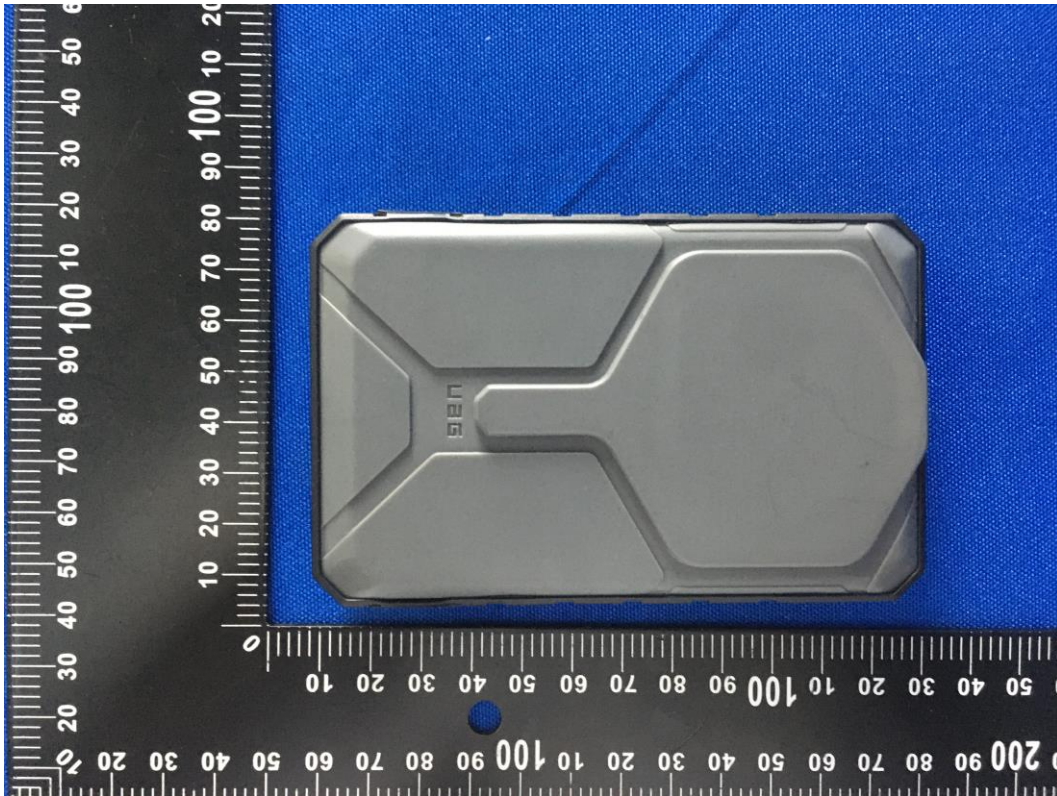


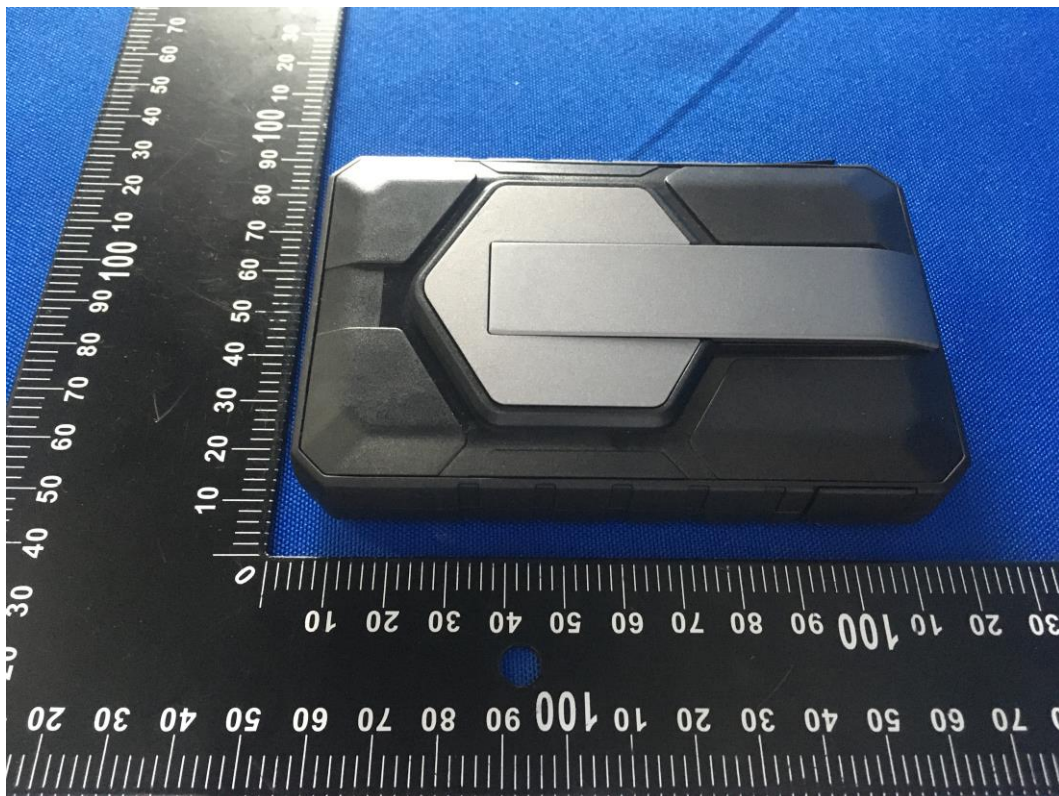
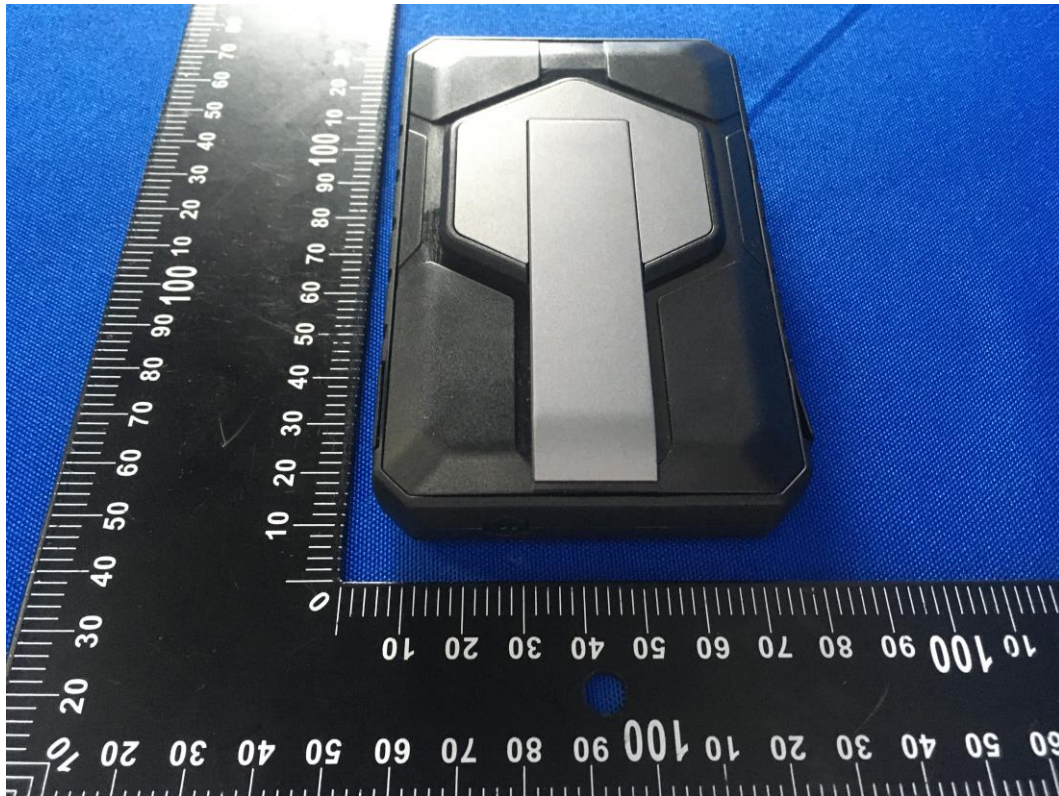


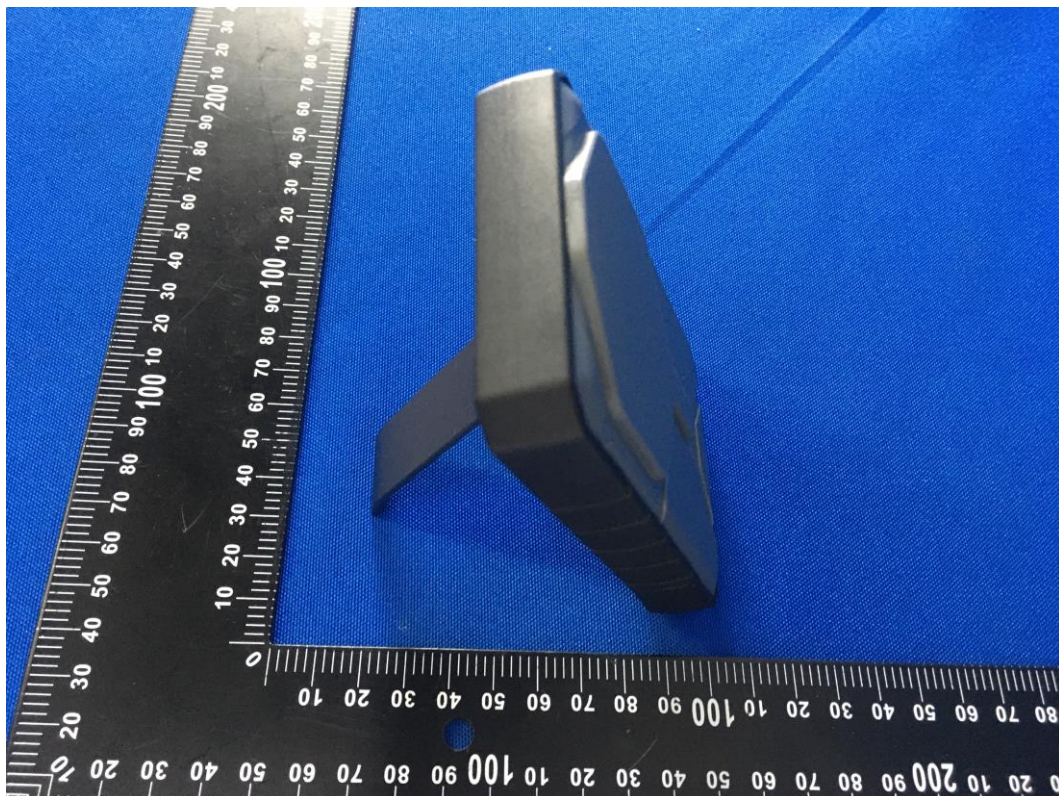






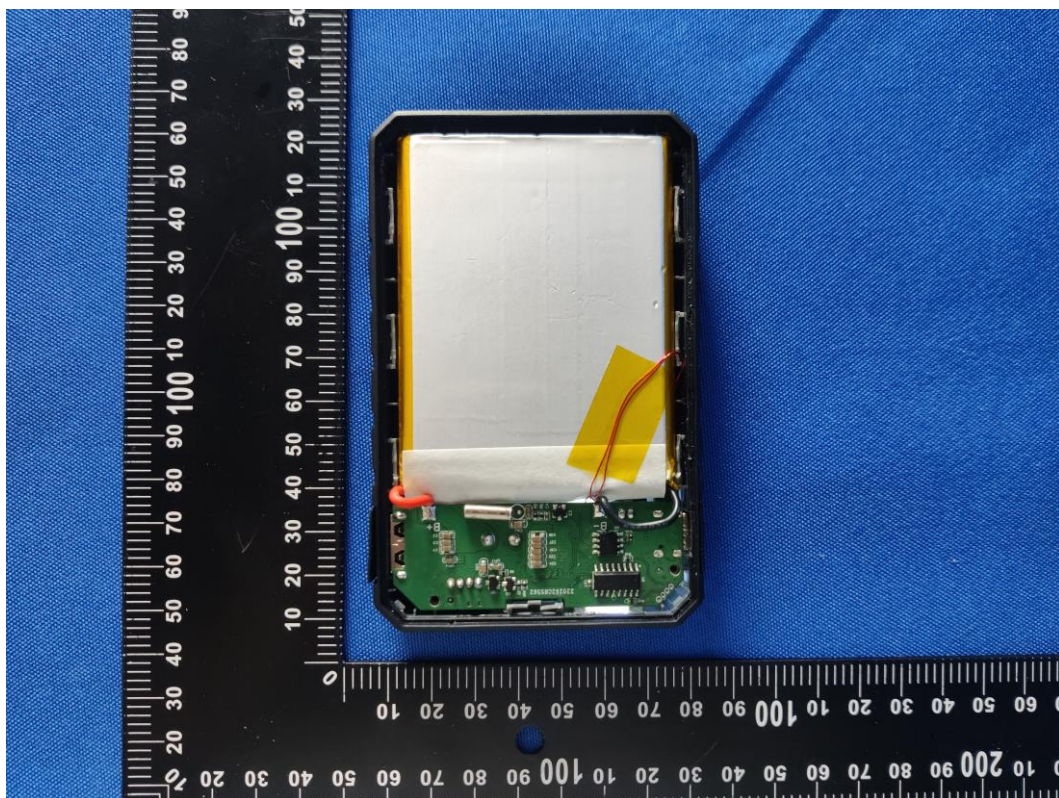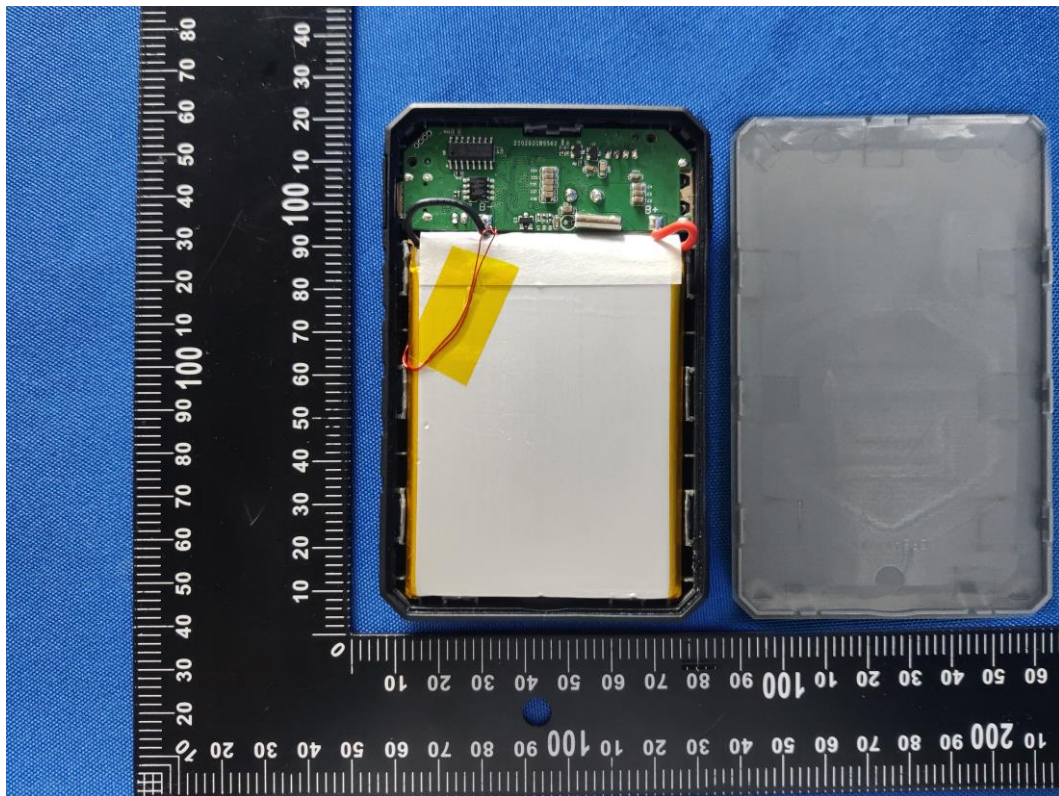


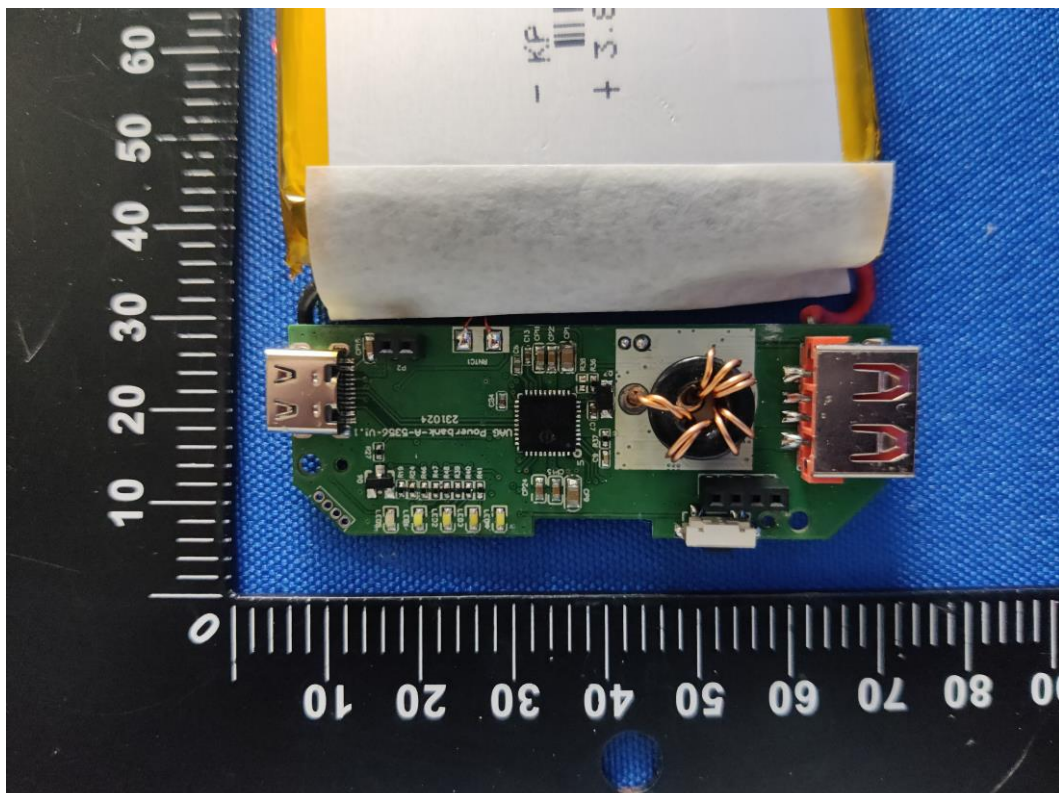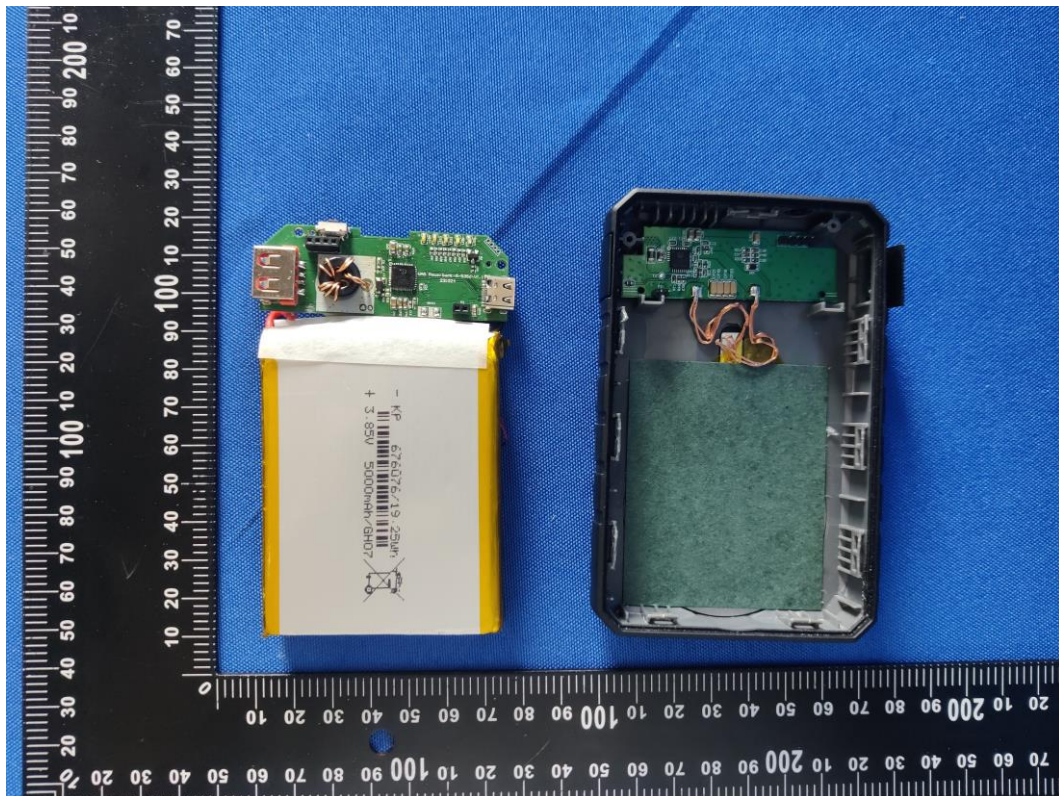

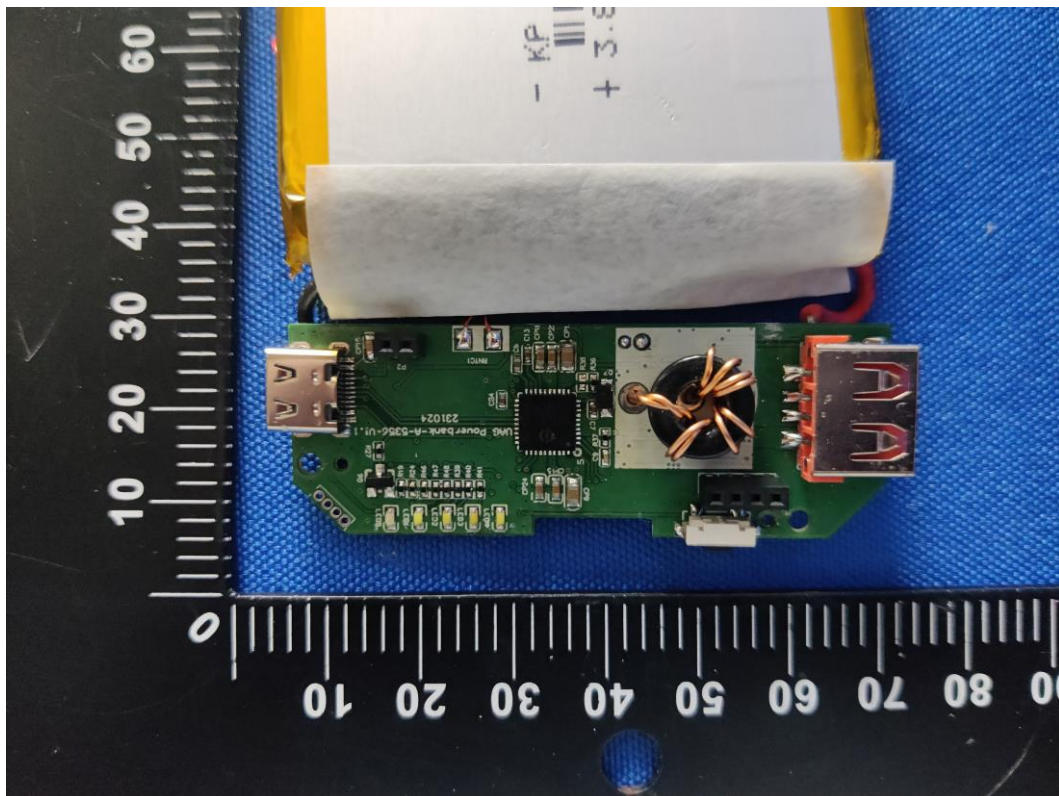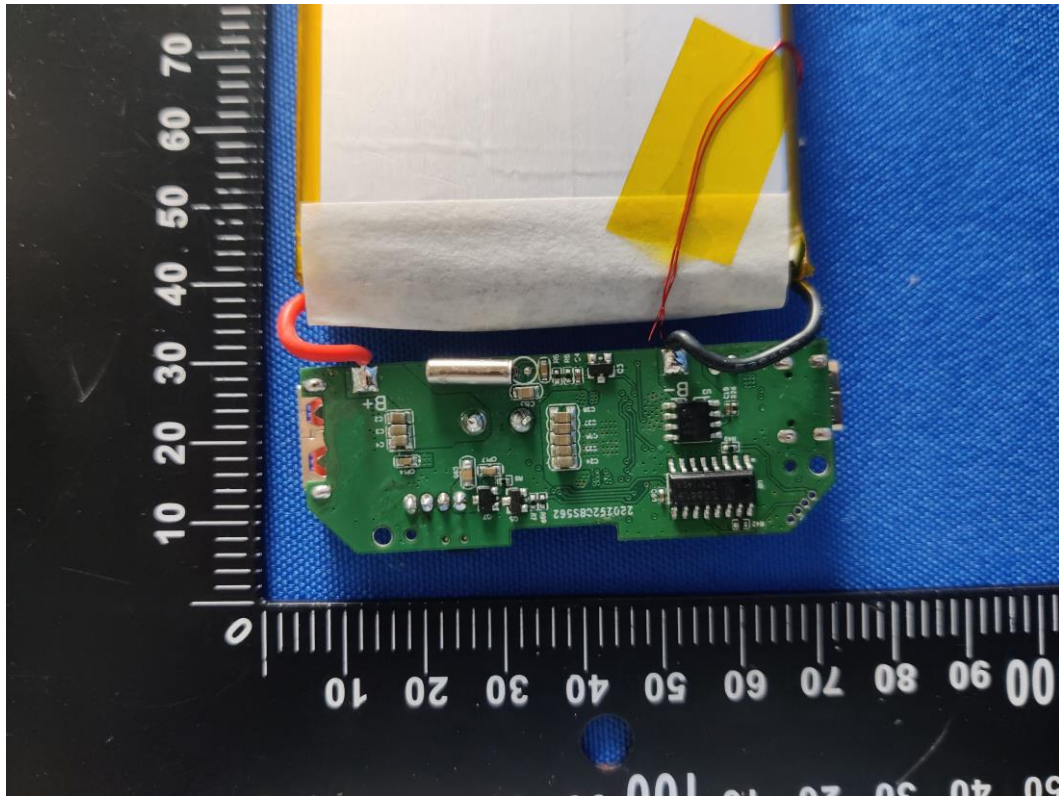

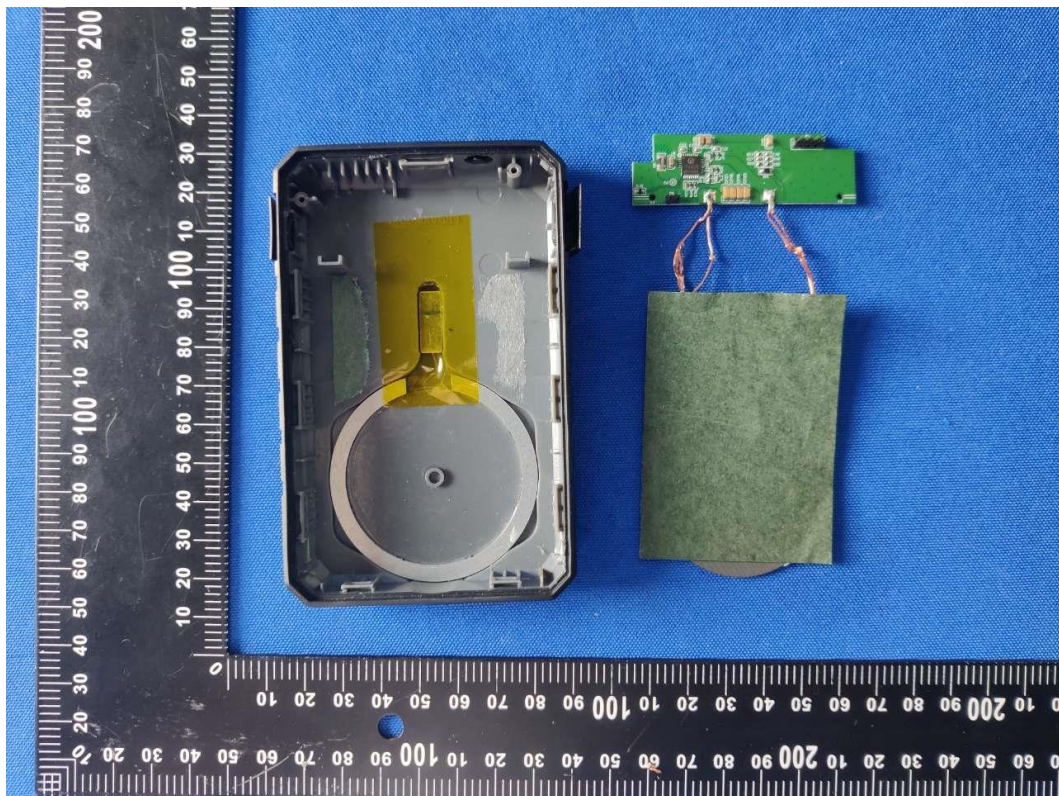

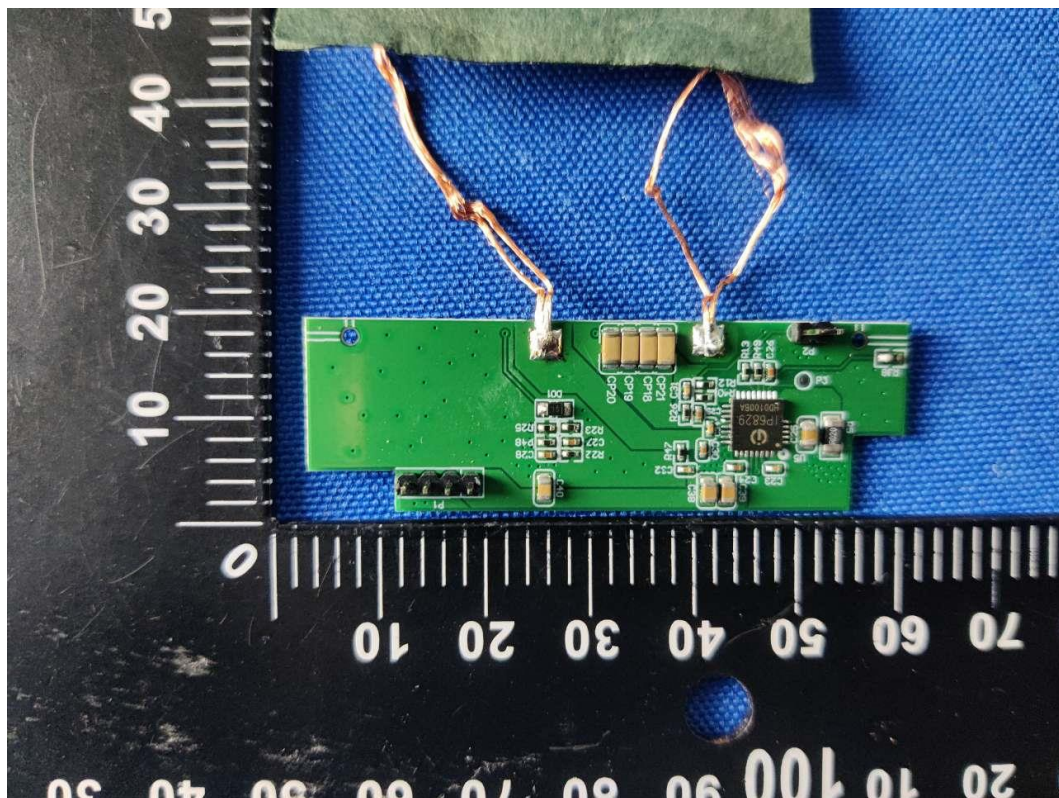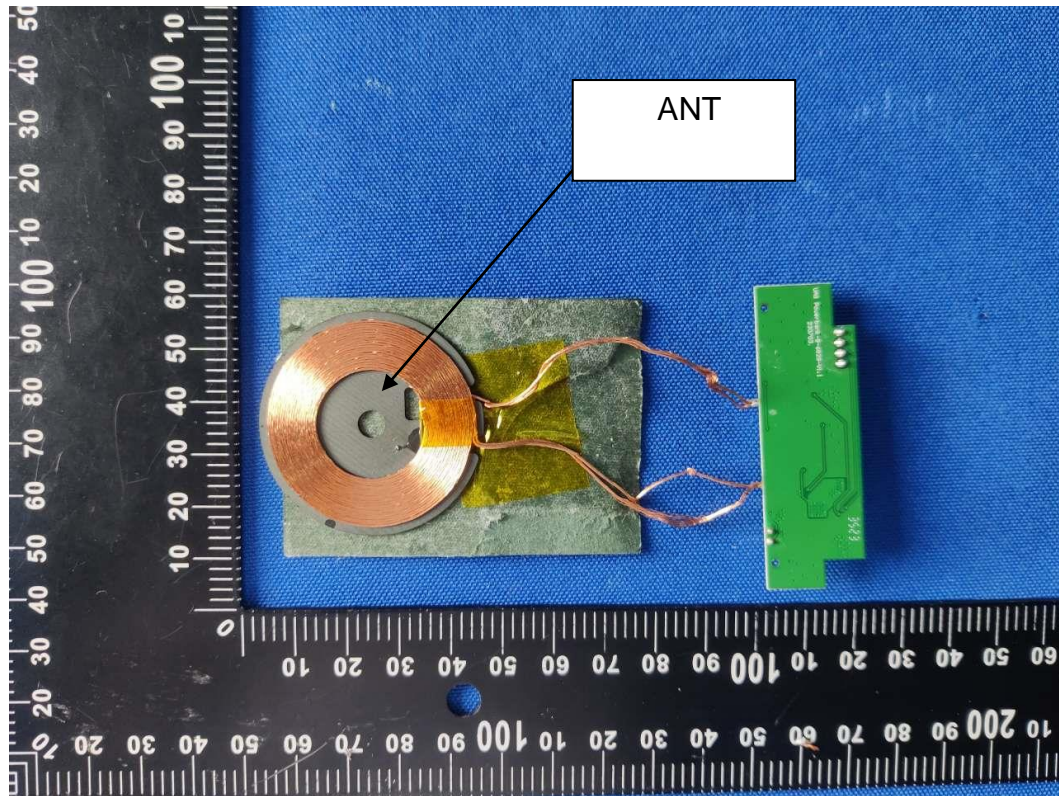

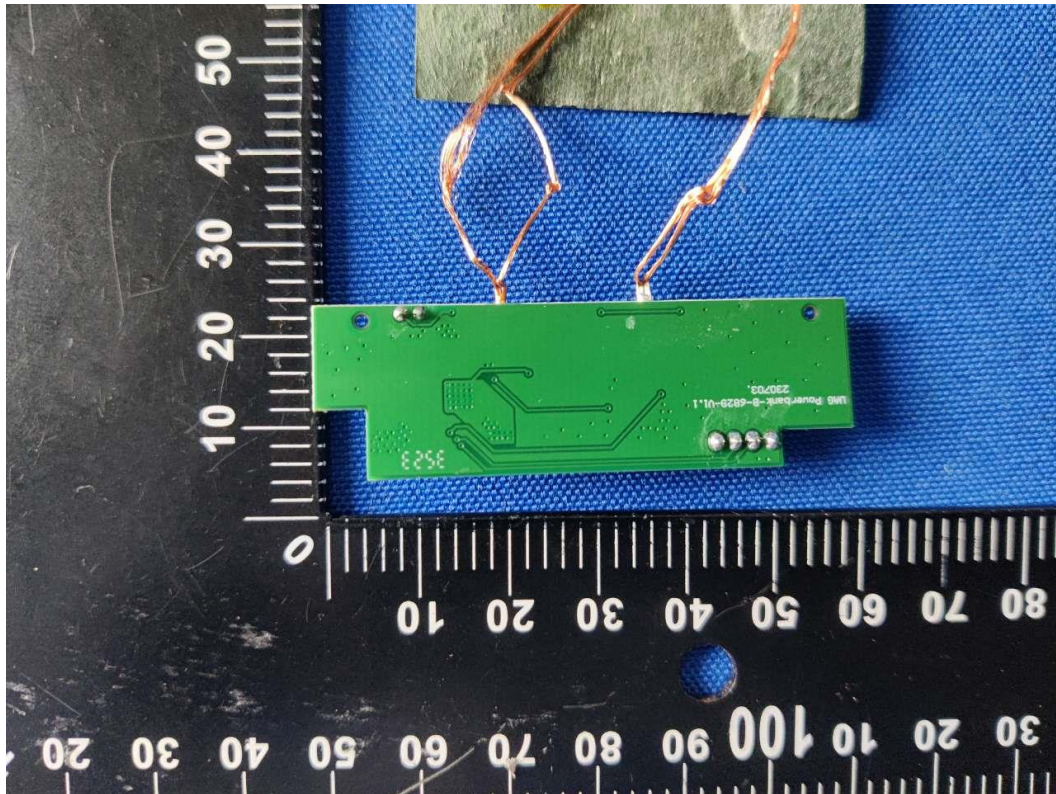

----- END OF REPORT-----